



Test Report

Product Name	USB PUCK
Model No.	ASU1003,MXL-1191-T,STX-5091-T,SPRO-5091-T
FCC ID	BJM-ASU1003

Applicant	TATUNG CO.
Address	22, Chungshan N. Rd., 3rd Sec. Taipei, Taiwan, 104, R.O.C.

Date of Receipt	Oct. 26, 2007
Issued Date	Nov. 13, 2007
Report No.	07B024R-RFUSP06V01

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: Nov. 13, 2007

Report No.: 07B024R-RFUSP06V01



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200347-0

Product Name	USB PUCK
Applicant	TATUNG CO.
Address	22, Chungshan N. Rd., 3rd Sec. Taipei, Taiwan, 104, R.O.C.
Manufacturer	TATUNG CO.
Model No.	ASU1003,MXL-1191-T,STX-5091-T,SPRO-5091-T
Rated Voltage	AC 120V/60Hz
Working Voltage	DC 5V (via USB)
Trade Name	TATUNG, GEAR HEAD, MAXELL, FreeTalk
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2006 CISPR 22: 2005,ANSI C63.4: 2003
Test Result	Complied



Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By

:

Leven Huang

(Engineering Adm. Assistant /
Leven Huang)



Tested By

:

Molin Huang

(Engineer /Molin Huang)



Testing Laboratory

1313

Approved By

:

Vincent Lin

(Deputy Manager / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of Test System.....	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure	10
2.5. Uncertainty	10
2.6. Test Result of Conducted Emission.....	11
3. Peak Power Output	13
3.1. Test Equipment.....	13
3.2. Test Setup	13
3.3. Limit	13
3.4. Test Procedure	13
3.5. Uncertainty	13
3.6. Test Result of Peak Power Output.....	14
4. RF Antenna Conducted Test.....	15
4.1. Test Equipment.....	15
4.2. Test Setup	15
4.3. Limits	15
4.4. Test Procedure	15
4.5. Uncertainty	15
4.6. Test Result of RF Antenna Conducted Test.....	16
5. Radiated Emission.....	19
5.1. Test Equipment.....	19
5.2. Test Setup	20
5.3. Limits	21
5.4. Test Procedure	22
5.5. Uncertainty	22
5.6. Test Result of Radiated Emission.....	23
6. Band Edge	27
6.1. Test Equipment.....	27
6.2. Test Setup	27
6.3. Limit	28
6.4. Test Procedure	28
6.5. Uncertainty	28
6.6. Test Result of Band Edge	29

7.	Occupied Bandwidth.....	33
7.1.	Test Equipment.....	33
7.2.	Test Setup	33
7.3.	Limits	33
7.4.	Test Procedure	33
7.5.	Uncertainty	33
7.6.	Test Result of Occupied Bandwidth	34
8.	Power Density	37
8.1.	Test Equipment.....	37
8.2.	Test Setup	37
8.3.	Limits	37
8.4.	Test Procedure	37
8.5.	Uncertainty	37
8.6.	Test Result of Power Density	38
9.	EMI Reduction Method During Compliance Testing	41

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	USB PUCK
Trade Name	TATUNG, GEAR HEAD, MAXELL, FreeTalk
Model No.	ASU1003,MXL-1191-T,STX-5091-T,SPRO-5091-T
FCC ID	BJM-ASU1003
Frequency Range	2405-2477MHz
Number of Channels	37
Channel Separation	2MHz
Type of Modulation	$\pi/4$ DQPSK (Differential Quadrature Phase Shift Keying)
Antenna Type	Printed
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	TATUNG	N/A	1.91dBi for 2.4 GHz

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 2:	2405 MHz	Channel 3:	2407 MHz	Channel 4:	2409 MHz
Channel 5:	2411 MHz	Channel 6:	2413 MHz	Channel 7:	2415 MHz
Channel 8:	2417 MHz	Channel 9:	2419 MHz	Channel 10:	2421 MHz
Channel 11:	2423 MHz	Channel 12:	2425 MHz	Channel 13:	2427 MHz
Channel 14:	2429 MHz	Channel 15:	2431 MHz	Channel 16:	2433 MHz
Channel 17:	2435 MHz	Channel 18:	2437 MHz	Channel 19:	2439 MHz
Channel 20:	2441 MHz	Channel 21:	2443 MHz	Channel 22:	2445 MHz
Channel 23:	2447 MHz	Channel 24:	2449 MHz	Channel 25:	2451 MHz
Channel 26:	2453 MHz	Channel 27:	2455 MHz	Channel 28:	2457 MHz
Channel 29:	2459 MHz	Channel 30:	2461 MHz	Channel 31:	2463 MHz
Channel 32:	2465 MHz	Channel 33:	2467 MHz	Channel 34:	2469 MHz
Channel 35:	2471 MHz	Channel 36:	2473 MHz	Channel 37:	2475 MHz
Channel 38:	2477 MHz				

Note:

1. The EUT is a USB PUCK with a built-in 2.4GHz transceiver.
2. The different of the each model is shown as below:

Model Number	Trade Name
ASU1003	TATUNG, GEAR HEAD
MXL-1191-T	MAXELL
STX-5091-T,SPRO-5091-T	FreeTalk

3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
5. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

1.2. Operational Description

The EUT is a PC USB Headset with a built-in 2.4GHz transceiver.

It uses the latest 2.4GHz wireless audio solution which can provide high quality wide-band audio and robust wireless audio transmission. Total numbers of channels supported by this device are 37 channels operating from 2405 to 2477MHz with 2MHz channel spacing.

This is a digital transmission system but not a FHSS since only one fixed channel is selected to transmit and receive data. This device uses the preset channel number to transmit and receives data and it will scan to select a fixed channel to transmit and receive data when no channel is preset.

The EUT built-in Avnera ICs (AV7101) are fully integrated single-chip wireless audio solutions, including a complete RF transceiver, Audio Fidelity Processing™ signal coding and processing, complete digital audio interfaces, and voltage regulation. The antenna type is Printed antenna and the modulation type is $\pi/4$ DQPSK (Differential Quadrature Phase Shift Keying).

SPDT TQS5200 is a T/R switch used to control the signal path. When transmitting data, it is switched to “transmit switch” which allows RF DQPSK modulation data sent from CPU AV7101 through PA TQP770001, BPF, T/R switch and then Antenna.

PA TQP770001 is a power amplifier used to amplify the modulation frequency range from 2405MHz to 2477MHz. BPF (Band pass Filter) is used for suppressing the harmonics including 2nd and 3rd harmonics which usually are generated after power amplifier.

When receiving data, the SPDT TQS5200 is controlled to be at “receive switch” which allows the data received from the air by the antenna directly to the single chip CPU AV7101 to be processed.

Test Mode	Mode 1: Transmitter
-----------	---------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1.	Notebook PC	DELL	PPT	N/A	DoC	Non-Shielded, 0.8m

Signal Cable Type	Signal Cable Description
A. USB Cable	Non-Shielded, 1.5m

1.4. Configuration of Test System

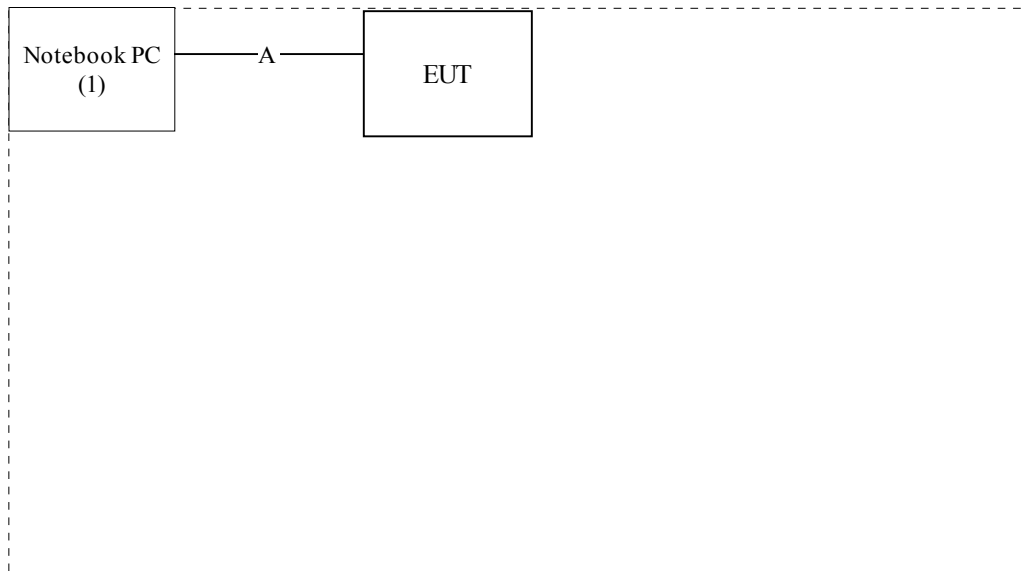

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Connect the EUT to a notebook via a USB cable.
- (3) Execute AWAflash.exe on the notebook.
- (4) Double-click "AV7101" and select USB as a primary connection interface.
- (5) Setup the test channel.
- (6) Press "Apply" to start the continuous transmission.
- (7) Verify that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: File on
Federal Communications Commission
Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 365520



Accredited by TAF
Accreditation Number: 1313
Effective through: December 28, 2010



Accredited by NVLAP
NVLAP Lab Code: 200347-0
Effective through: September 30, 2008



Site Name: Quietek Corporation
Site Address: No.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwan, R.O.C.
TEL : 886-3-592-8858 / FAX : 886-3-592-8859
E-Mail : service@quietek.com

FCC Accreditation Number: TW1013

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/014	Feb., 2007	
2	L.I.S.N.	R & S	ESH3-Z5/825562/002	Feb., 2007	EUT
3	L.I.S.N.	R & S	ENV4200/848411/010	Feb., 2007	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2/100410	July, 2007	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

2.2. Test Setup

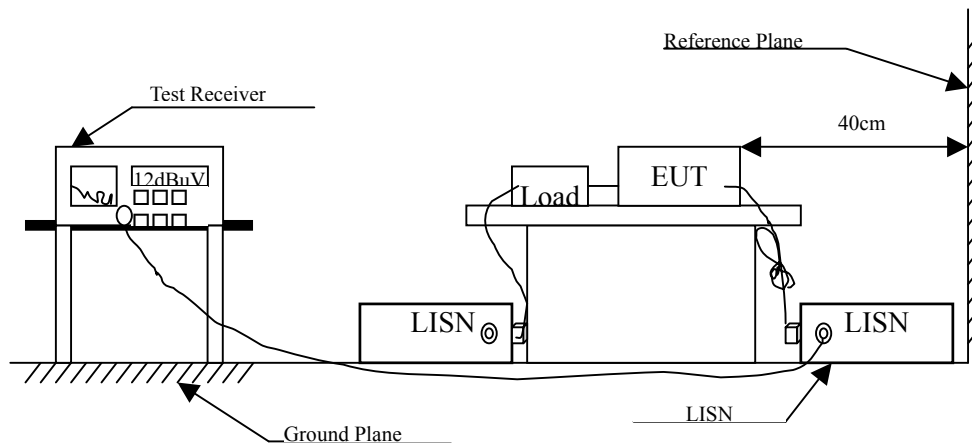

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56 _(註)	56-46 _(註)
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : USB PUCK
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
LINE 1					
Quasi-Peak					
0.189	0.725	44.770	45.495	-19.391	64.886
0.310	0.300	39.990	40.290	-21.139	61.429
0.533	0.300	35.020	35.320	-20.680	56.000
1.002	0.315	32.130	32.445	-23.555	56.000
3.509	0.385	20.230	20.615	-35.385	56.000
24.869	1.200	21.170	22.370	-37.630	60.000
Average					
0.189	0.725	32.120	32.845	-22.041	54.886
0.310	0.300	38.830	39.130	-12.299	51.429
0.533	0.300	26.800	27.100	-18.900	46.000
1.002	0.315	18.230	18.545	-27.455	46.000
3.509	0.385	12.890	13.275	-32.725	46.000
24.869	1.200	15.430	16.630	-33.370	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : USB PUCK
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
LINE 2					
Quasi-Peak					
0.158	0.300	44.930	45.230	-20.541	65.771
0.306	0.300	41.270	41.570	-19.973	61.543
0.795	0.320	32.780	33.100	-22.900	56.000
1.404	0.330	27.940	28.270	-27.730	56.000
6.818	0.450	18.920	19.370	-40.630	60.000
21.373	0.950	21.000	21.950	-38.050	60.000
Average					
0.158	0.300	33.480	33.780	-21.991	55.771
0.306	0.300	39.290	39.590	-11.953	51.543
0.795	0.320	21.240	21.560	-24.440	46.000
1.404	0.330	17.660	17.990	-28.010	46.000
6.818	0.450	8.740	9.190	-40.810	50.000
21.373	0.950	15.100	16.050	-33.950	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Peak Power Output

3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2007
X	Power Sensor	Anritsu	MA2491A/034457	May, 2007

Note: 1. All equipments are calibrated every one year.
 2. Test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

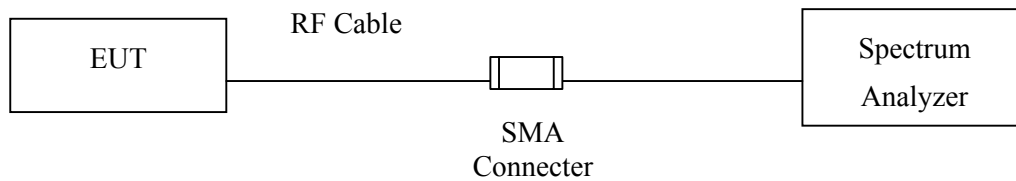

3.3. Limit

According to FCC Section 15.247(b)(3). The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

(1)Set the RBW greater than 6 dB bandwidth of the emission or use a peak power meter.
 The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : USB PUCK
Test Item : Peak Power Output
Test Site : CTR1
Test Mode : Mode 1: Transmitter

Channel No.	Frequency (MHz)	Channel Power (dBm)	Required Limit	Result
2	2405.00	-3.43	1 Watt= 30 dBm	Pass
20	2441.00	-5.01	1 Watt= 30 dBm	Pass
38	2477.00	-6.48	1 Watt= 30 dBm	Pass


4. RF Antenna Conducted Test

4.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	HP	E4407B / US39440758	June, 2007

Note: 1. All equipments are calibrated every one year.
2. The test instruments Marked "X" are used to measure the final test results.

4.2. Test Setup

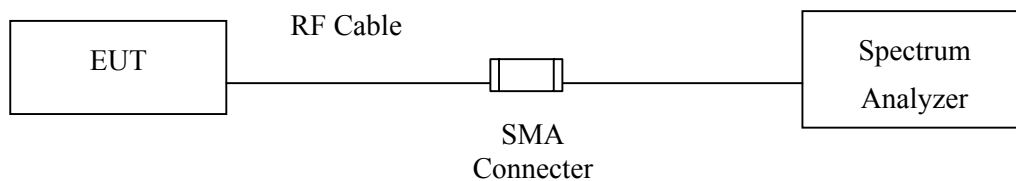

4.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

4.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.


4.5. Uncertainty

$\pm 150\text{Hz}$


4.6. Test Result of RF Antenna Conducted Test

Product : USB PUCK
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2405MHz)

Figure Channel 2: 30-1GHz

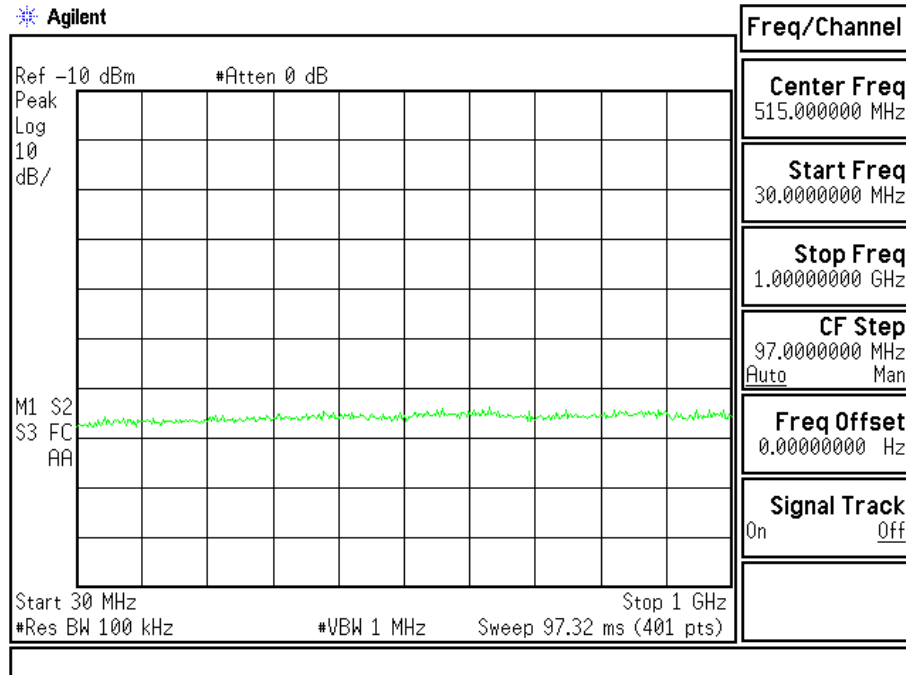


1-25GHz

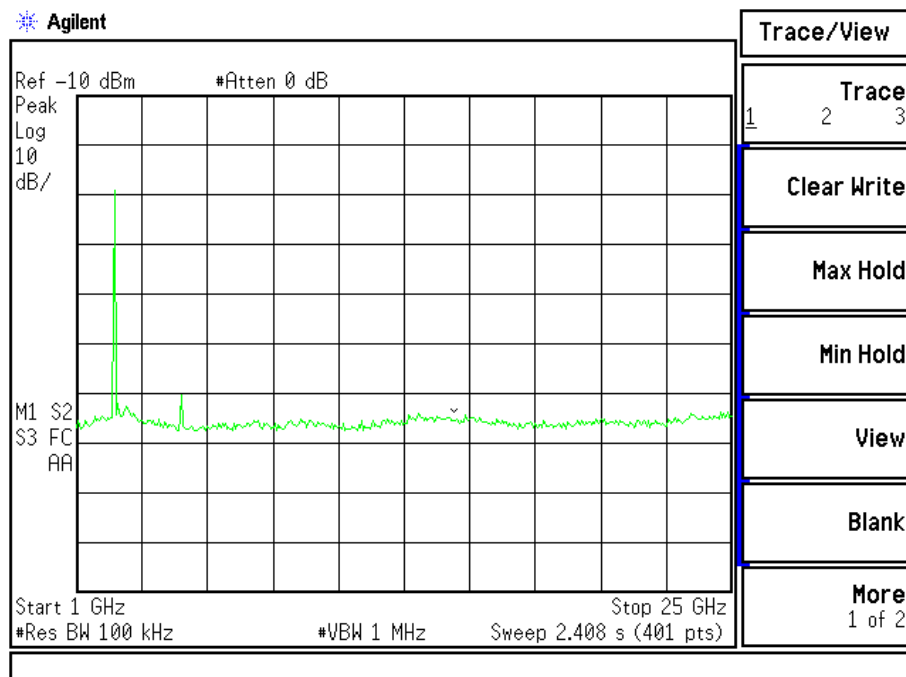


Product : USB PUCK
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Figure Channel 20: 30-1GHz

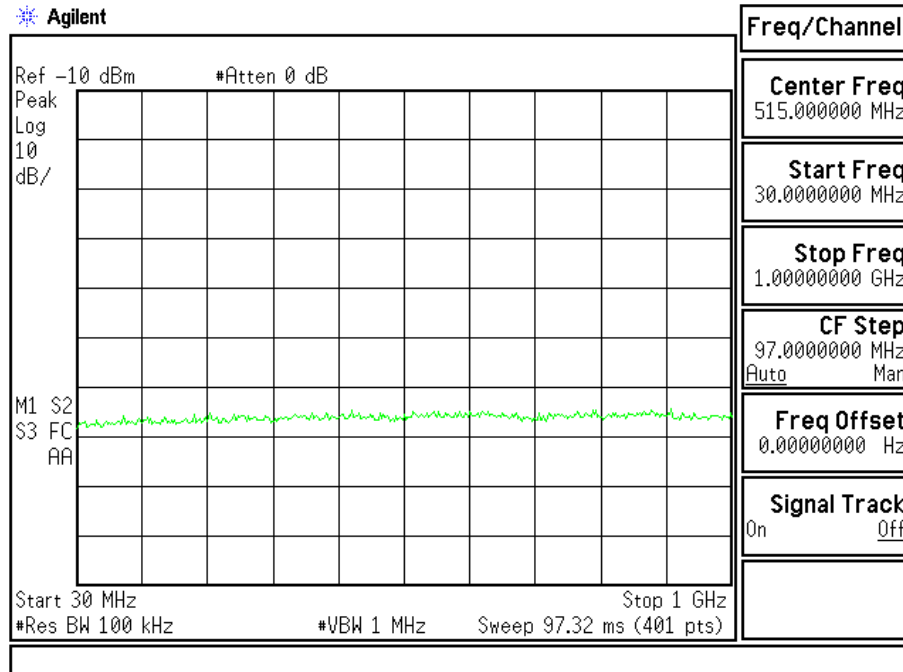


1-25GHz

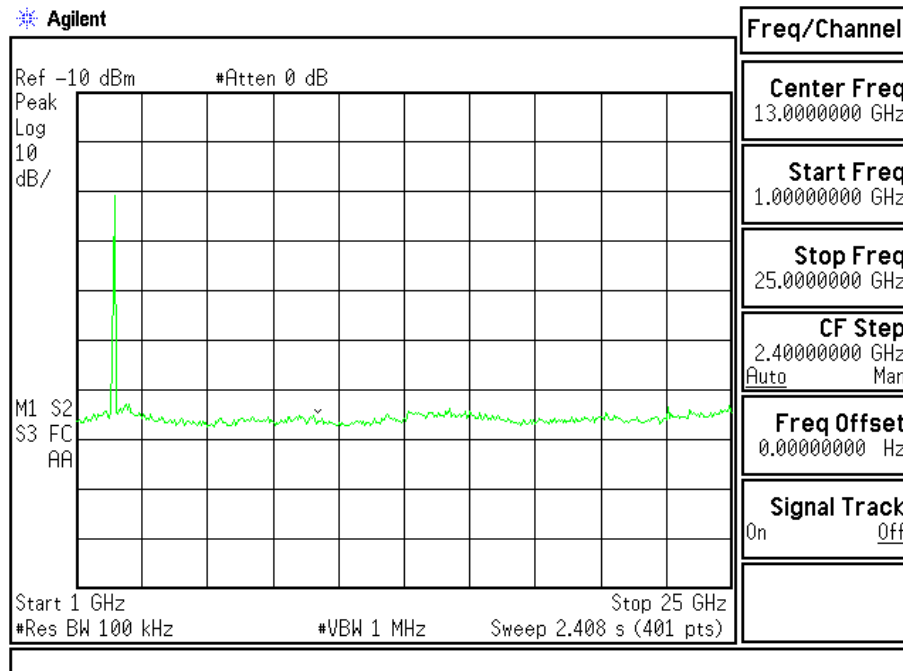


Product : USB PUCK
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2477MHz)

Figure Channel 38: 30-1GHz

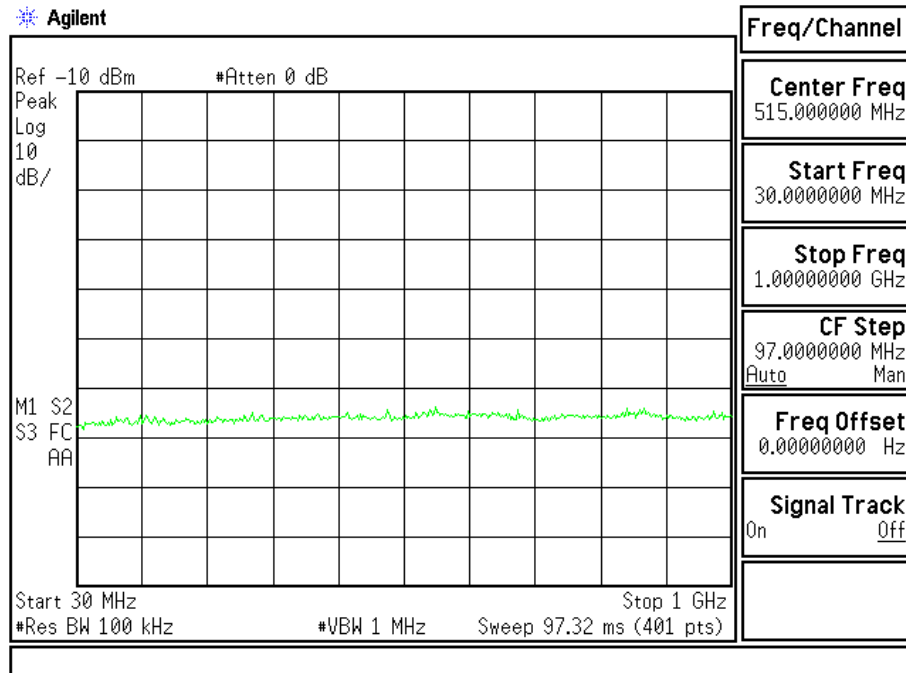

1-25GHz

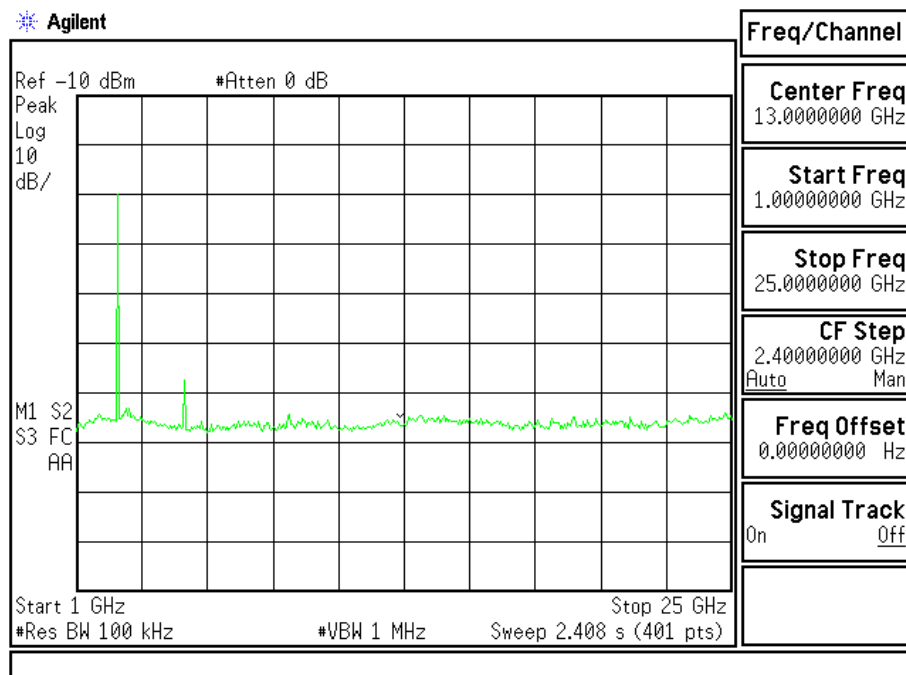

5. Radiated Emission


5.1. Test Equipment

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2007
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2007
	X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2007
	X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2007
	X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2007
	X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2007
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2007
	X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2007


Note: 1. All equipments are calibrated every one year.
2. Test equipments marked by "X" are used to measure the final test results.

5.2. Test Setup

Below 1GHz

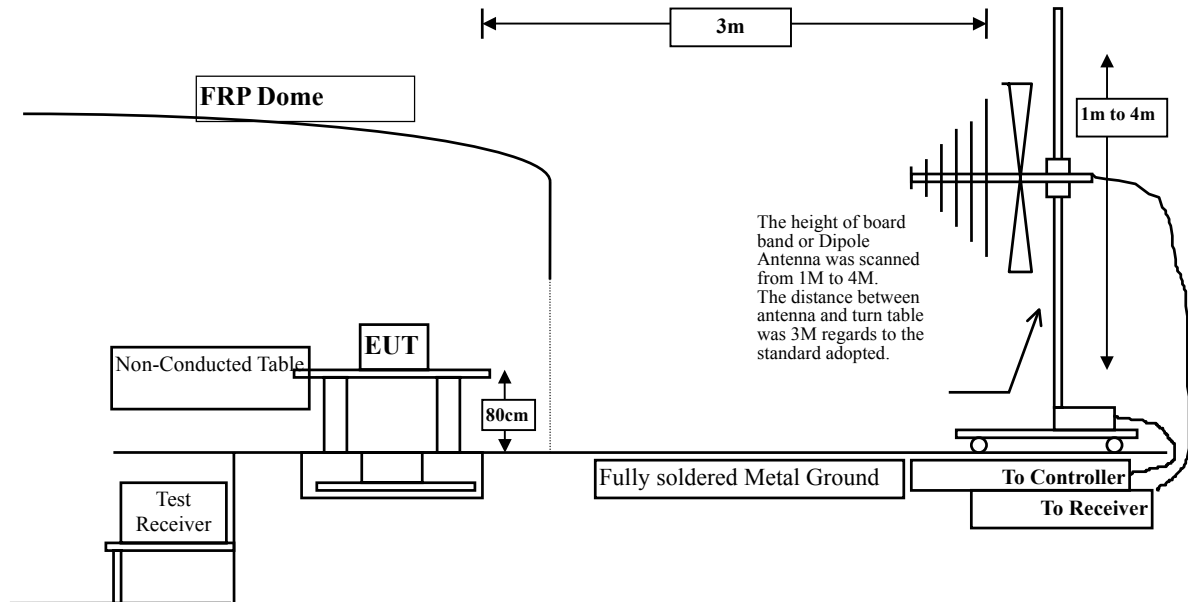

Above 1GHz

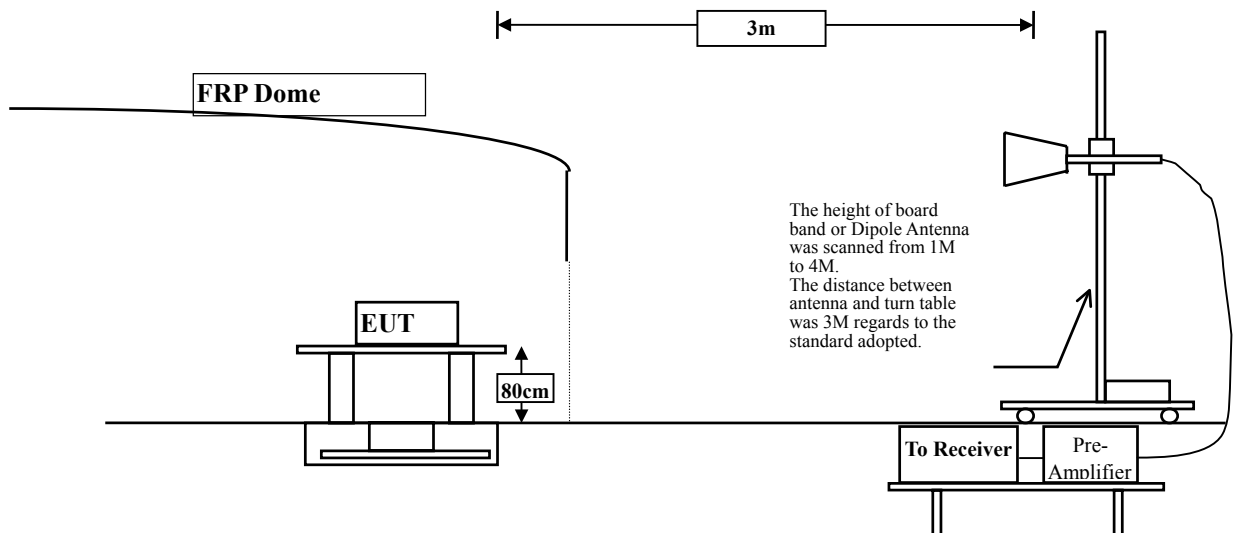

5.3. Limits

➤ General Radiated Emission Limits

Attenuation below the general limits specified in FCC 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must also comply in FCC 15.209(a) (see FCC 15.205(c)).

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = $20 \log \text{RF Voltage (uV)}$
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

5.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

5.6. Test Result of Radiated Emission

Product : USB PUCK
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmitter (2405MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4810.000	2.898	42.600	45.498	-28.502	74.000
7215.000	9.451	39.880	49.330	-24.670	74.000
9620.000	10.491	37.390	47.881	-26.119	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4810.000	2.898	40.250	43.148	-30.852	74.000
7215.000	9.451	46.480	55.930	-18.070	74.000
9620.000	10.491	37.570	48.061	-25.939	74.000
Average					
Detector:					
7215.000	3.233	36.863	40.095	-13.905	54.000

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : USB PUCK
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4882.000	3.056	39.200	42.256	-31.744	74.000
7323.000	9.570	39.220	48.790	-25.210	74.000
9764.000	10.614	36.080	46.694	-27.306	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4882.000	3.056	39.580	42.636	-31.364	74.000
7323.000	9.570	44.030	53.600	-20.400	74.000
9764.000	10.614	36.170	46.784	-27.216	74.000
Average					
Detector:					
--					

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : USB PUCK
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2477 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4954.000	3.222	39.930	43.152	-30.848	74.000
7431.000	9.679	38.290	47.969	-26.031	74.000
9908.000	10.730	35.660	46.391	-27.609	74.000

Average

Detector:

--

Vertical

Peak Detector:

4954.000	3.222	41.050	44.272	-29.728	74.000
7431.000	9.679	42.110	51.789	-22.211	74.000
9908.000	10.730	35.420	46.151	-27.849	74.000

Average

Detector:

--

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : USB PUCK
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
53.200	7.669	22.050	29.719	-10.281	40.000
398.600	16.458	17.042	33.500	-12.500	46.000
522.700	18.601	17.273	35.874	-10.126	46.000
598.400	19.922	19.405	39.327	-6.673	46.000
664.380	20.676	14.474	35.150	-10.850	46.000
930.160	22.928	12.820	35.748	-10.252	46.000
Vertical					
113.420	11.727	21.729	33.456	-10.044	43.500
398.600	17.966	17.681	35.647	-10.353	46.000
522.760	18.745	15.507	34.252	-11.748	46.000
598.480	21.726	15.732	37.458	-8.542	46.000
749.740	23.178	13.499	36.677	-9.323	46.000
829.280	21.434	14.816	36.250	-9.750	46.000

Note:

1. The reading levels below 1GHz are quasi-peak values.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested. Only the worst case is shown on the report.

6. Band Edge

6.1. Test Equipment


Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Test Receiver	R & S	ESI 26 / 838786/004	May, 2007
X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2007
X Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2007
X Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2007
X Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2007
X Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2007
X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2007
X Pre-Amplifier	HP	8449B / 3008A01123	July, 2007

OATS No.3


- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement:

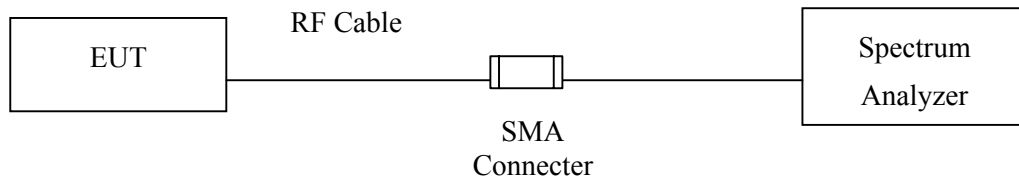

RF Radiated Measurement:

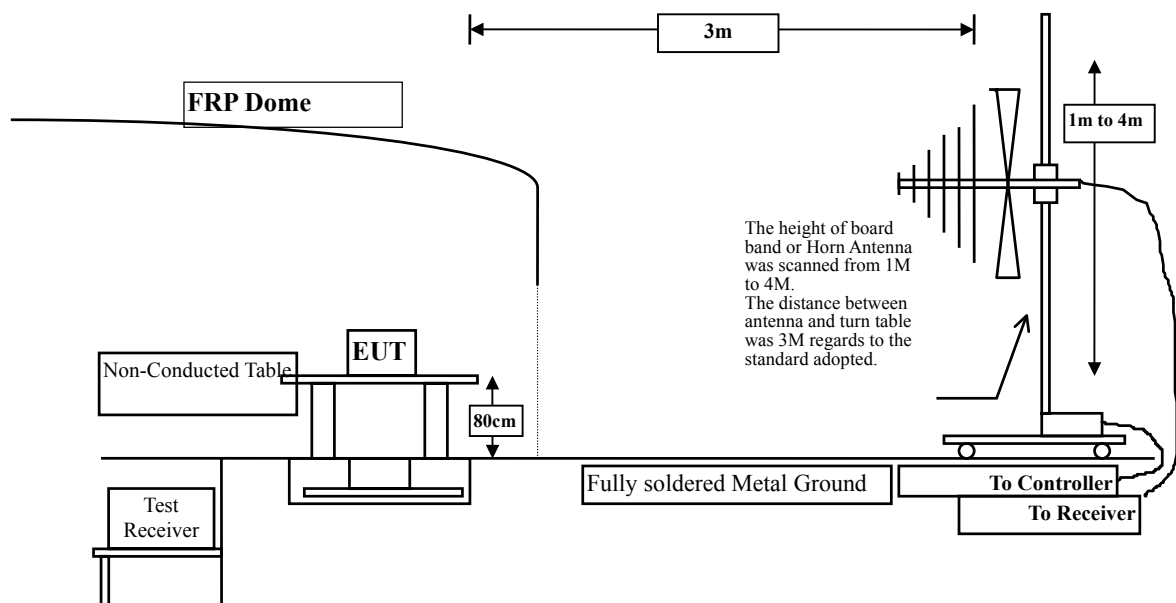

6.3. Limit

Attenuation below the general limits specified in FCC 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must also comply in FCC 15.209(a) (see FCC 15.205(c)).

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: 1. RF Voltage (dBuV) = $20 \log$ RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

6.5. Uncertainty

Conducted is ± 1 MHz

Radiated is ± 3.9 dB


6.6. Test Result of Band Edge

Product : USB PUCK
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
2 (Peak)	2388.920	-1.410	42.456	41.046	74.00	54.00	Pass
2 (Peak)	2390.000	-1.407	40.676	39.269	74.00	54.00	Pass
2 (Peak)	2400.000	-1.363	46.542	45.179	74.00	54.00	Pass
2 (Peak)	2405.160	-1.346	84.372	83.026	74.00	54.00	Pass

Figure Channel 2: Horizontal (Peak)

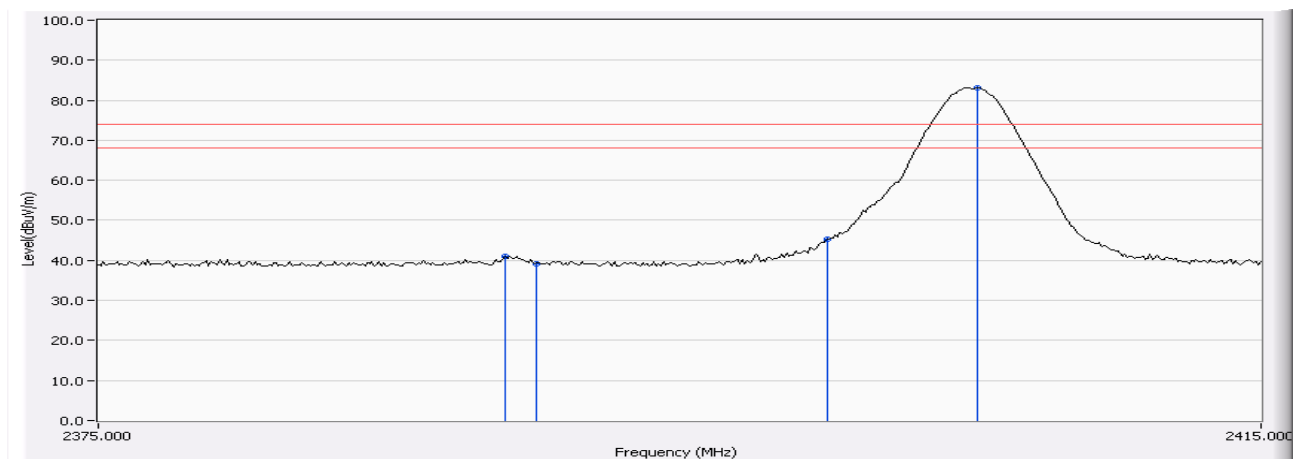


Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Product : USB PUCK
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
2 (Peak)	2382.840	-1.429	42.217	40.789	74.00	54.00	Pass
2 (Peak)	2390.000	-1.407	40.136	38.729	74.00	54.00	Pass
2 (Peak)	2400.000	-1.363	47.675	46.312	74.00	54.00	Pass
2 (Peak)	2404.760	-1.347	86.709	85.362	74.00	54.00	Pass

Figure Channel 2: Vertical (Peak)

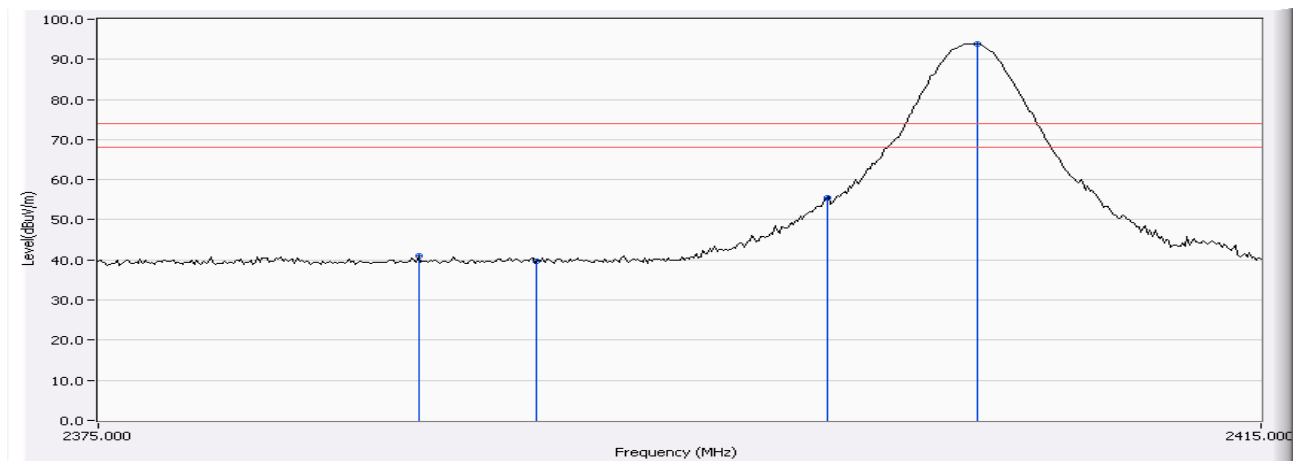

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms


Product : USB PUCK
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38(Peak)	2476.800	-1.067	83.630	82.563	74.00	54.00	Pass
38(Peak)	2483.500	-1.037	41.585	40.548	74.00	54.00	Pass
38(Peak)	2500.000	-0.988	40.194	39.206	74.00	54.00	Pass

Figure Channel 38:

Horizontal (Peak)

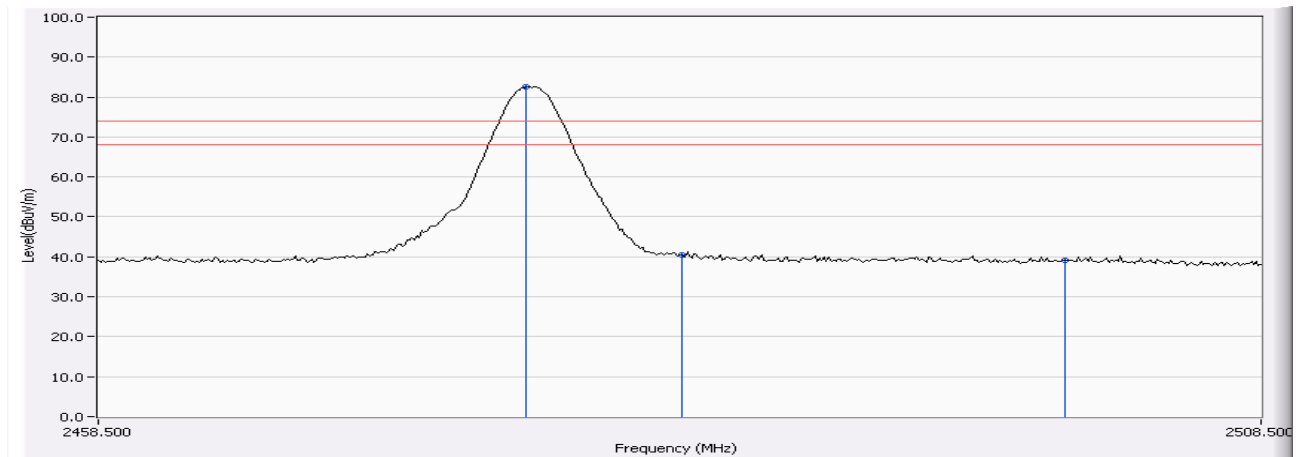


Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Product : USB PUCK
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38(Peak)	2476.900	-1.067	86.813	85.746	74.00	54.00	Pass
38(Peak)	2483.500	-1.037	42.344	41.307	74.00	54.00	Pass
38(Peak))	2500.000	-0.988	39.709	38.721	74.00	54.00	Pass

Figure Channel 38: Vertical (Peak)

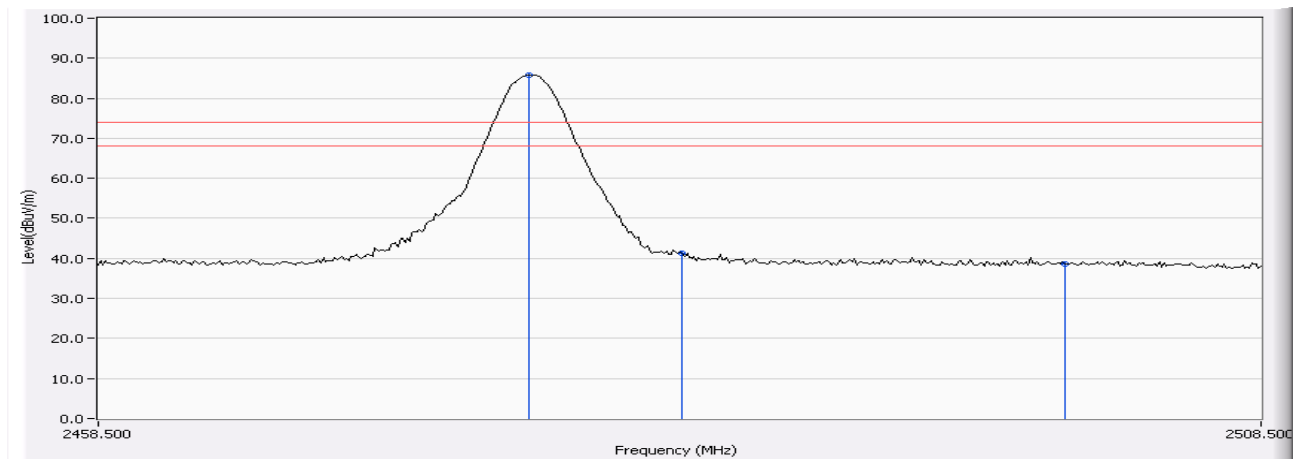

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms


7. Occupied Bandwidth

7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	HP	E4407B / US39440758	June, 2007

Note: 1. All equipments are calibrated every one year.
2. The test instruments Marked “X” are used to measure the final test results.

7.2. Test Setup

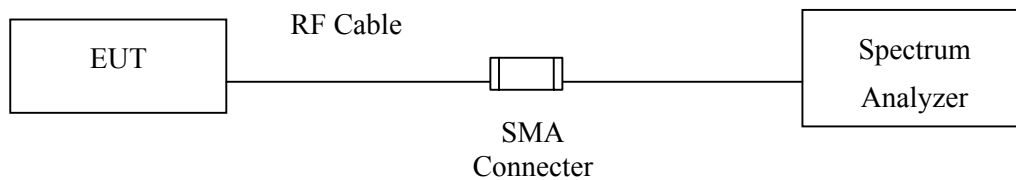

7.3. Limits

According to FCC Section 15.247(a)(2). The 6 dB bandwidth must be greater than 500 kHz.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : USB PUCK
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2405MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
2	2405.00	1172	>500	Pass


Figure Channel 2:

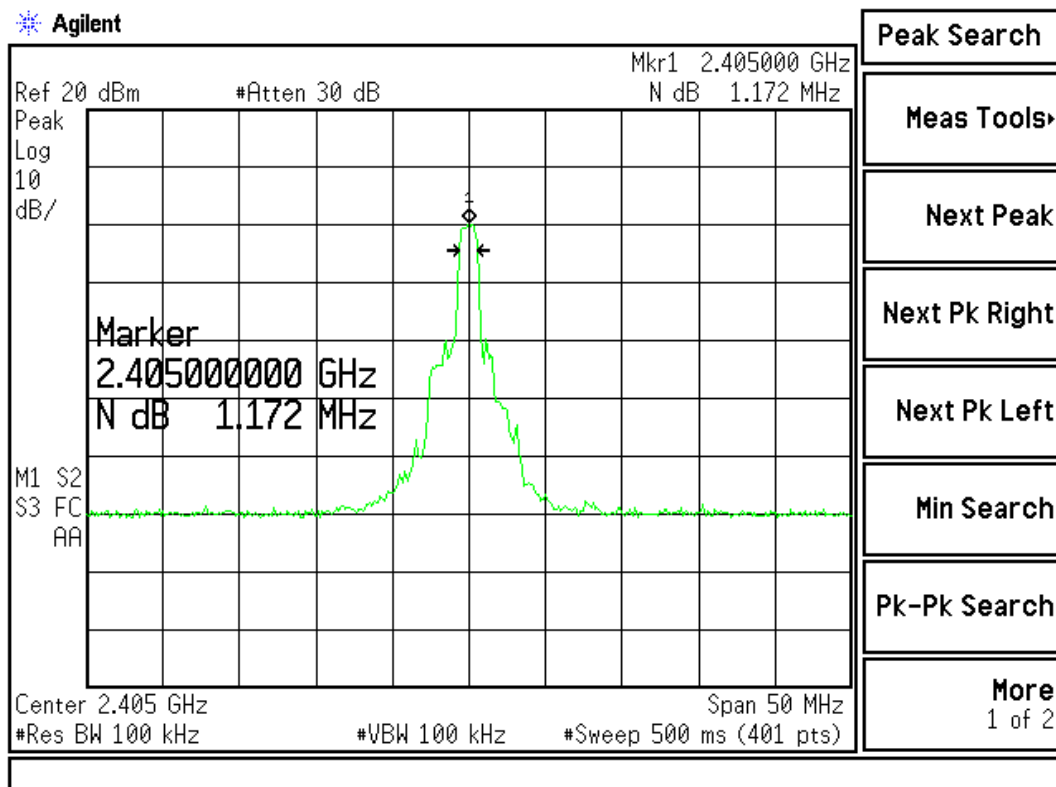

Product : USB PUCK
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
20	2441.00	1172	>500	Pass


Figure Channel 20

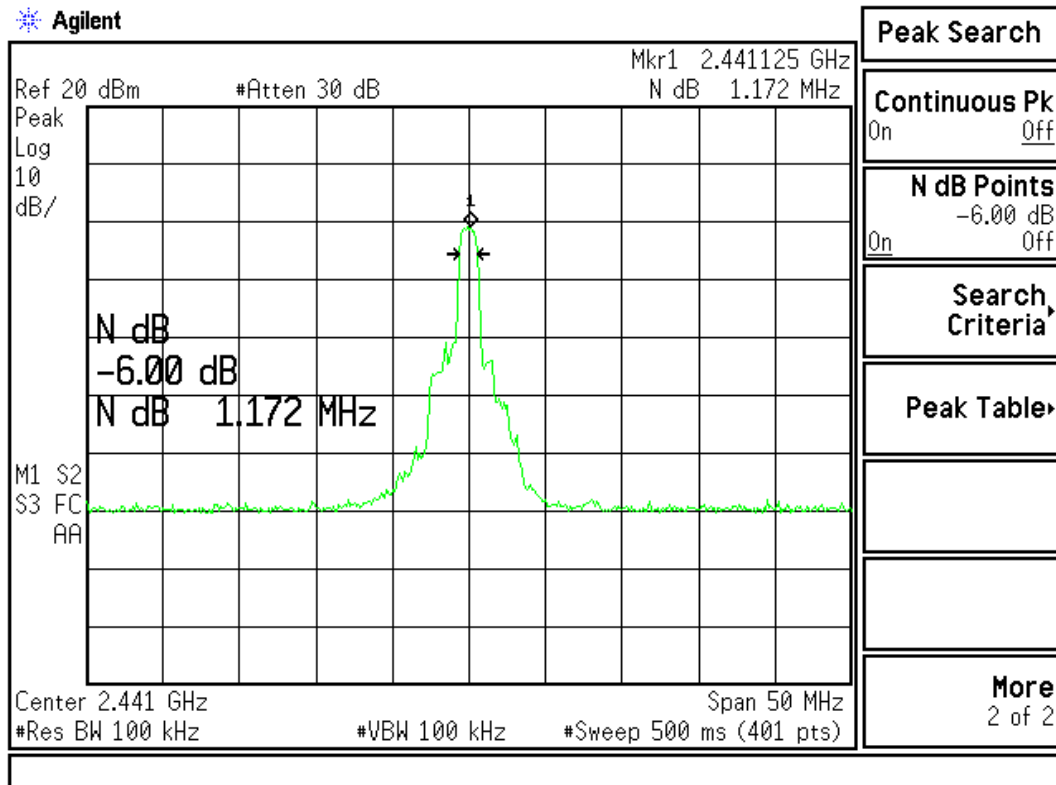

Product : USB PUCK
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2477MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
38	2477.00	1172	>500	Pass

Figure Channel 38

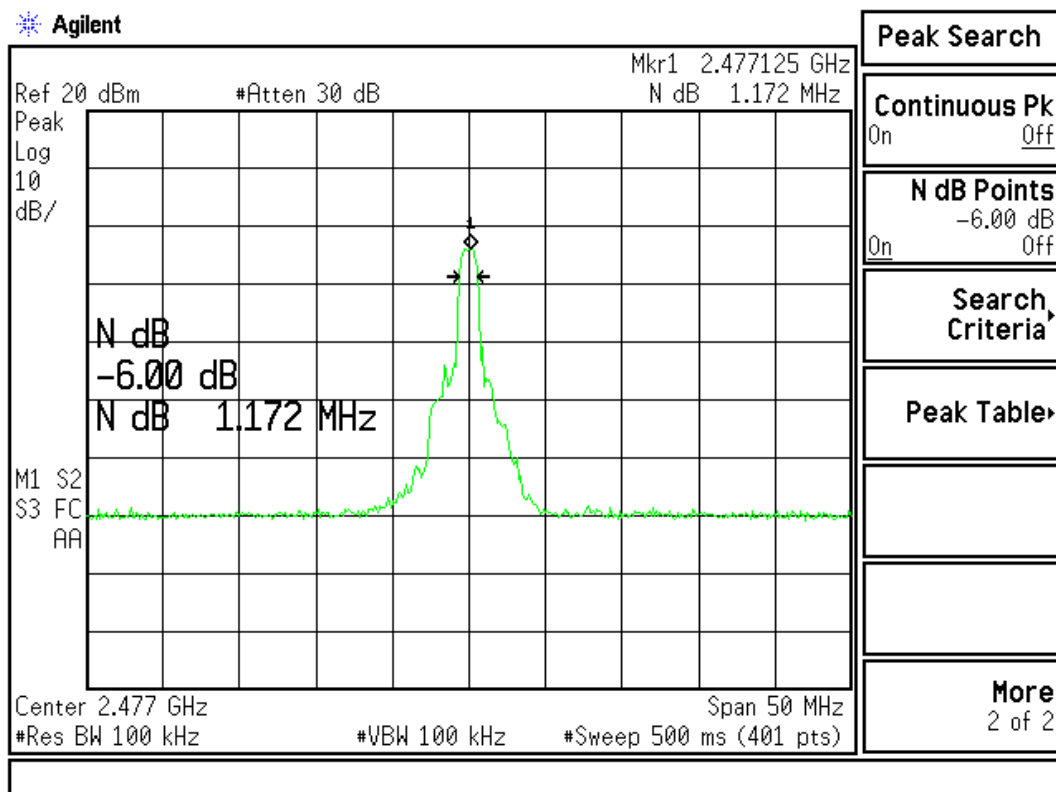

8. Power Density


8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	HP	E4407B / US39440758	June, 2007

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

8.2. Test Setup

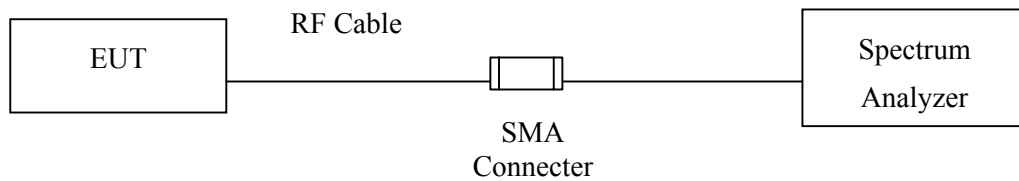

8.3. Limits

According to FCC Section 15.247(e). The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements

8.5. Uncertainty


± 1.27 dB

8.6. Test Result of Power Density

Product : USB PUCK
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2405MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
2	2405.00	-20.07	< 8dBm	Pass


Figure Channel 2:

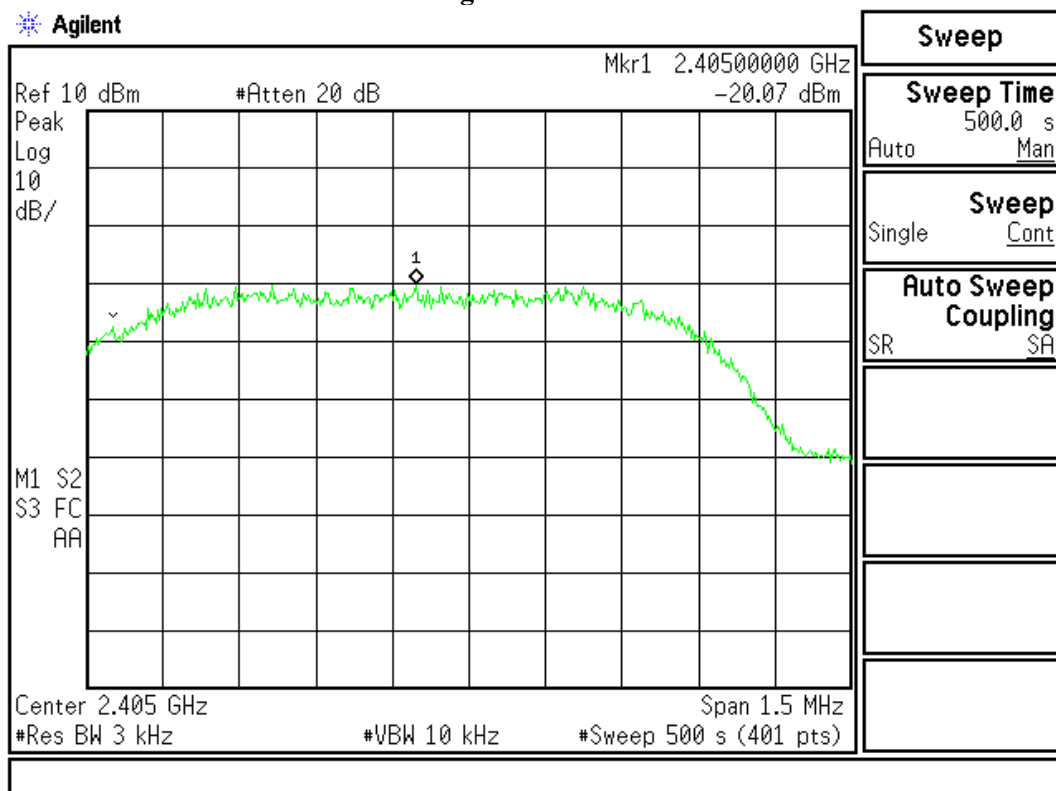

Product : USB PUCK
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
20	2441.000	-21.83	< 8dBm	Pass


Figure Channel 20

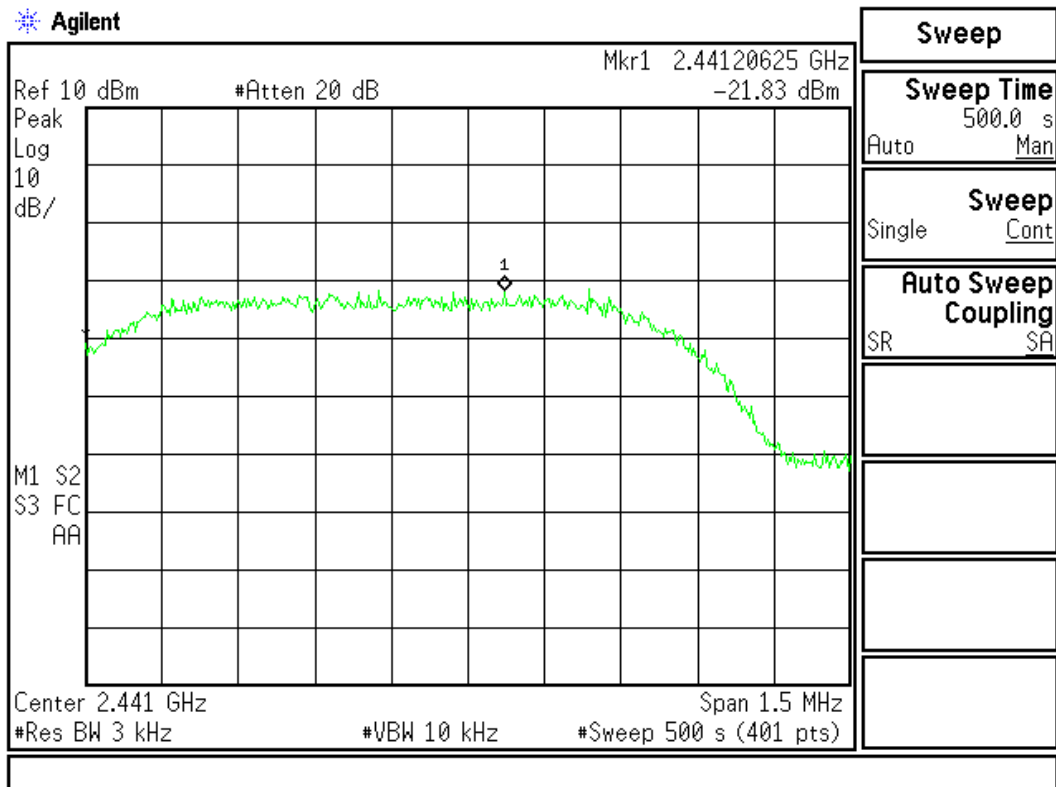

Product : USB PUCK
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2477MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
38	2477.00	-24.24	< 8dBm	Pass

Figure Channel 38

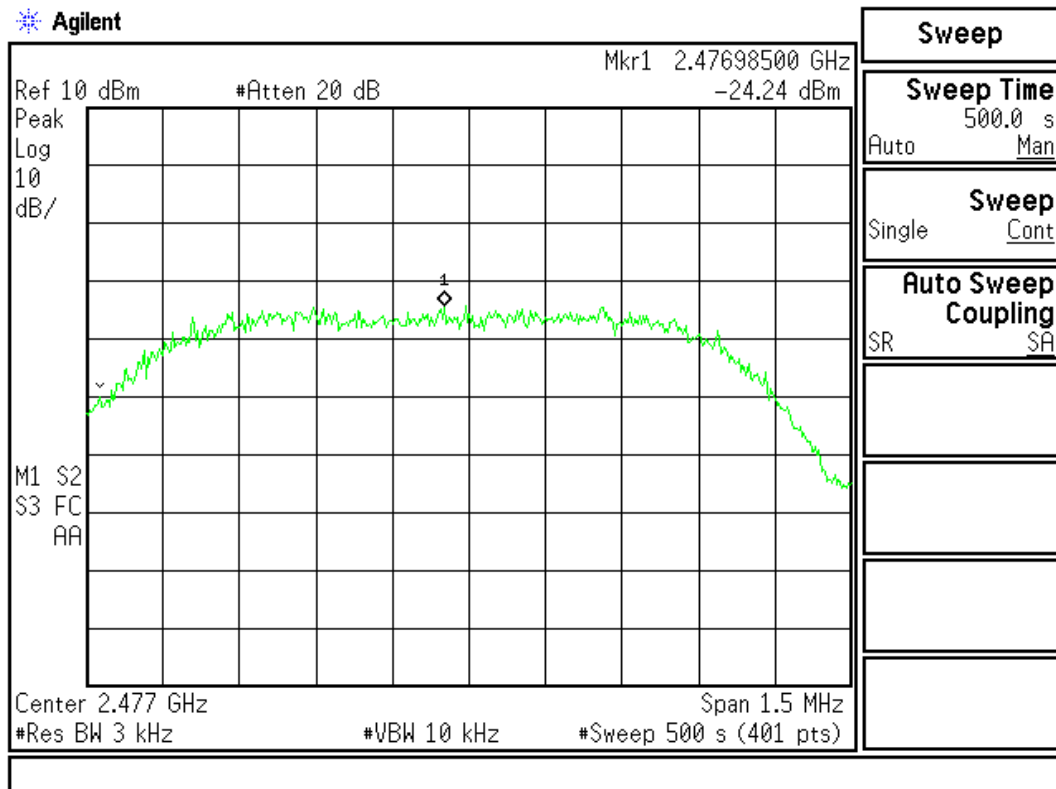

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.