

APPROVAL SHEET

MULTILAYER CERAMIC ANTENNA

RFANT Series

2.4 GHz ISM Band Working Frequency

P/N: RFANT3216090A0T

*Contents in this sheet are subject to change without prior notice. ■



REVISION HISTORY

Rev	P/N	Description	Date
V01	RFANT3216090A0T	First Version	2004-12-10

**FEATURES**

- ☐ Surface Mounted Devices with a small dimension of $3.2 \times 1.6 \times 0.9 \text{ mm}^3$ meet future miniaturization trend.
- ☐ Embedded and LTCC (Low Temperature Co-fired Ceramic) technology is able to future integrate with system design as well as beautifying the housing of final product.
- ☐ High Stability in Temperature / Humidity Change

APPLICATIONS

- ☐ Bluetooth
- ☐ Wireless LAN
- ☐ ISM band 2.4GHz wireless applications

DESCRIPTION

Walsin Technology Corporation develops a new ceramic embedded antenna specified for 2.4 GHz ISM Band application, as shown in below "CONSTRUCTION". Both of Wireless LAN IEEE 802.11b/g and Bluetooth™ typically located on this unlicensed frequency band which range covers from 2.4GHz to 2.4835GHz. To fulfil the friendly usage for antenna, this antenna has been designed to a typical 350MHz bandwidth through Walsin's advanced LTCC (Low Temperature Co-fired Ceramic) technology and superior product design via 3D EM Simulation Skill.

This antenna has a rectangular ceramic body with a tiny dimension of $3.2 \times 1.6 \times 0.9 \text{ mm}^3$ meet the future SMT automation and miniaturization requirements on modern portable devices.

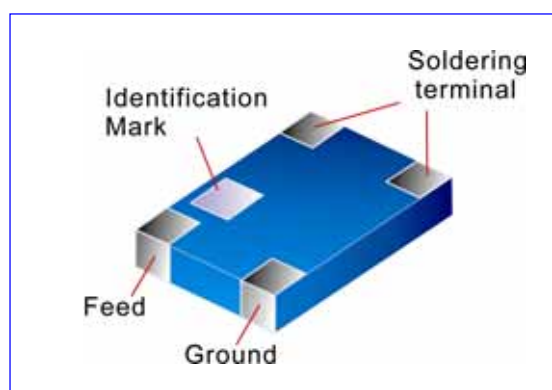
CONSTRUCTION

Fig 1. Outline of 2.4GHz Antenna – RFANT3216090A0T

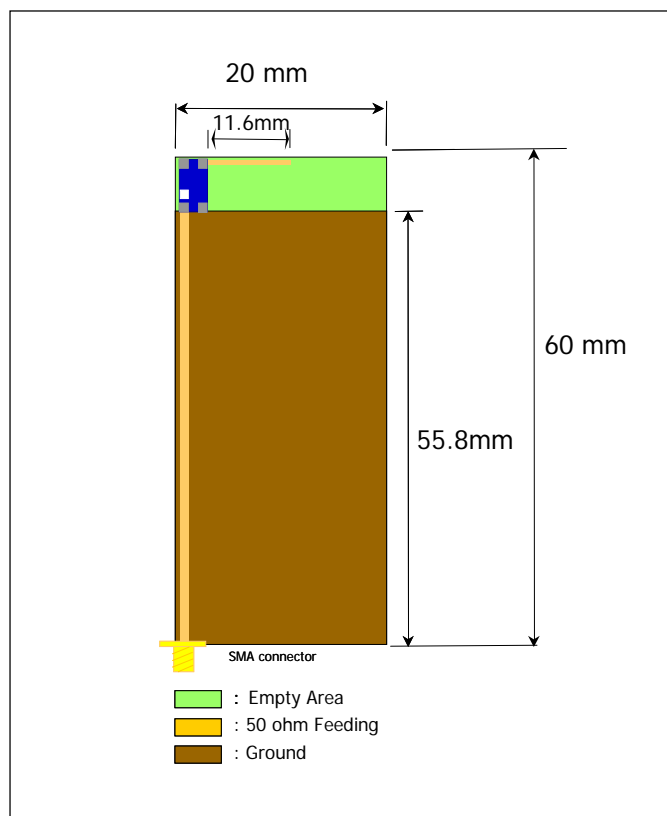
DIMENSIONS

Figure	Dimension		Port definition
	L	$3.20 \pm 0.15 \text{ mm}$	-
	W	$1.60 \pm 0.15 \text{ mm}$	-
	T	$0.90 \pm 0.10 \text{ mm}$	-
	F	$0.50 \pm 0.10 \text{ mm}$	Feed termination
	G	$0.50 \pm 0.10 \text{ mm}$	Ground termination
	P1	$0.50 \pm 0.10 \text{ mm}$	Solder termination
	C	$0.60 \pm 0.15 \text{ mm}$	-


ELECTRICAL CHARACTERISTICS

Item	Specification
Working Frequency Range	2.4 GHz ~ 2.5GHz
Gain	2 dBi (Typical)
VSWR	2 max.
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Impedance	50Ω
Rated Power (max.)	500 mW
Operation Temperature	-40°C ~ +85°C


Remark: The specification is defined based on the test board dimension as in below

Antenna on Test Board

Antenna S11 on Test Board


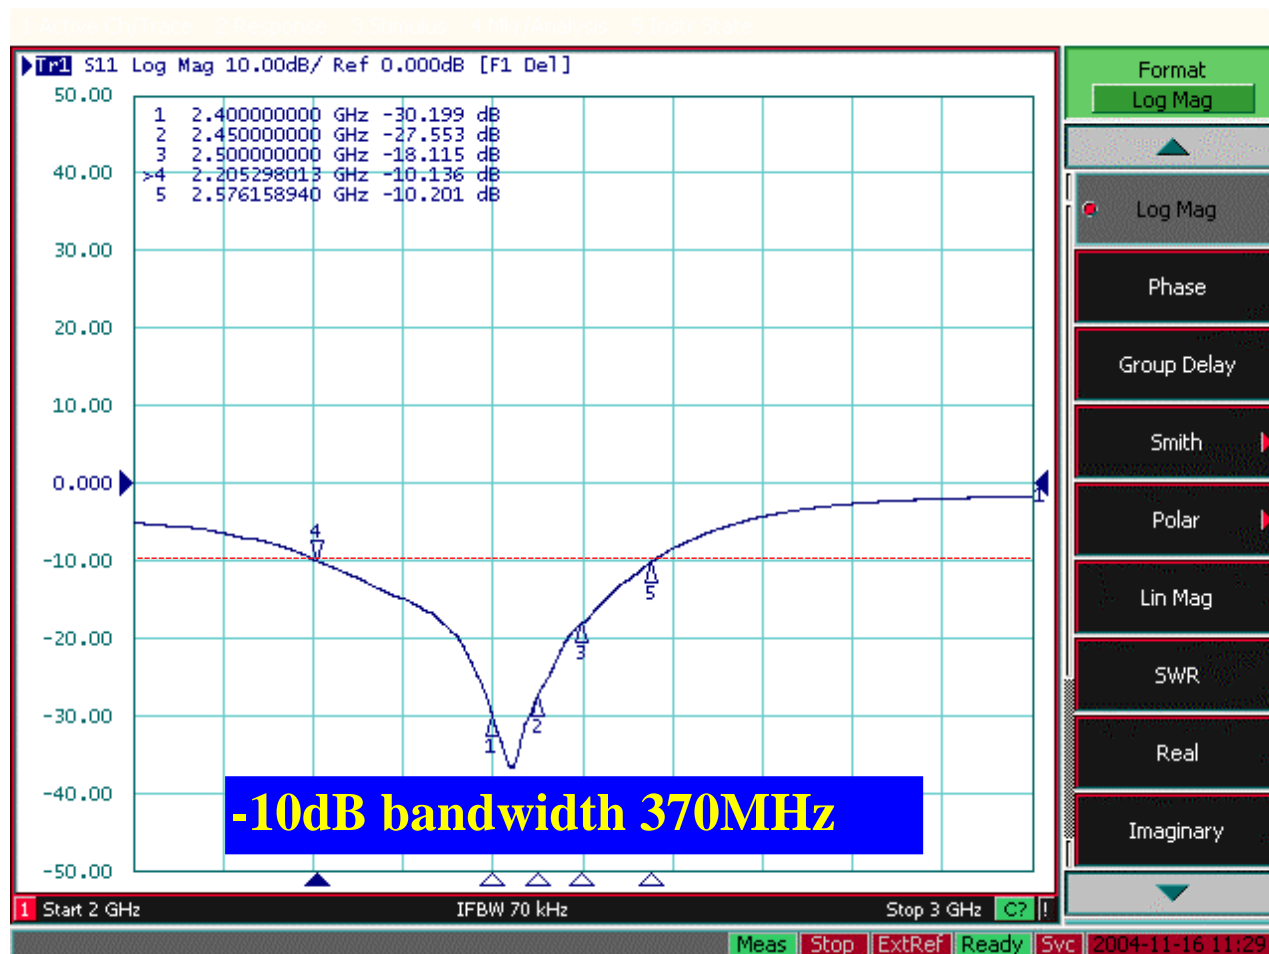



SOLDER LAND PATTERN DESIGN

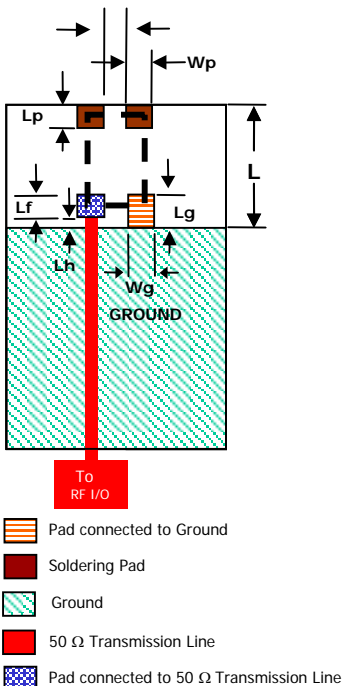Figure	Symbol	Dimension
	L	$4.20 \pm 0.10 \text{ mm}$
	Lp	$0.60 \pm 0.10 \text{ mm}$
	Wp	$0.70 \pm 0.10 \text{ mm}$
	Lf	$0.80 \pm 0.10 \text{ mm}$
	Lg	$1.00 \pm 0.10 \text{ mm}$
	Wg	$0.70 \pm 0.10 \text{ mm}$
	Lh	$0.20 \pm 0.10 \text{ mm}$
	Wd	$0.60 \pm 0.10 \text{ mm}$

RADIATION PATTERN


Radiation Pattern and Gain were dependent on measurement board design. The specification of RFANT3216090A0T antenna was measured based on the test board size and the antenna installation position as shown in the below:

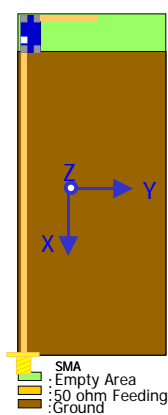

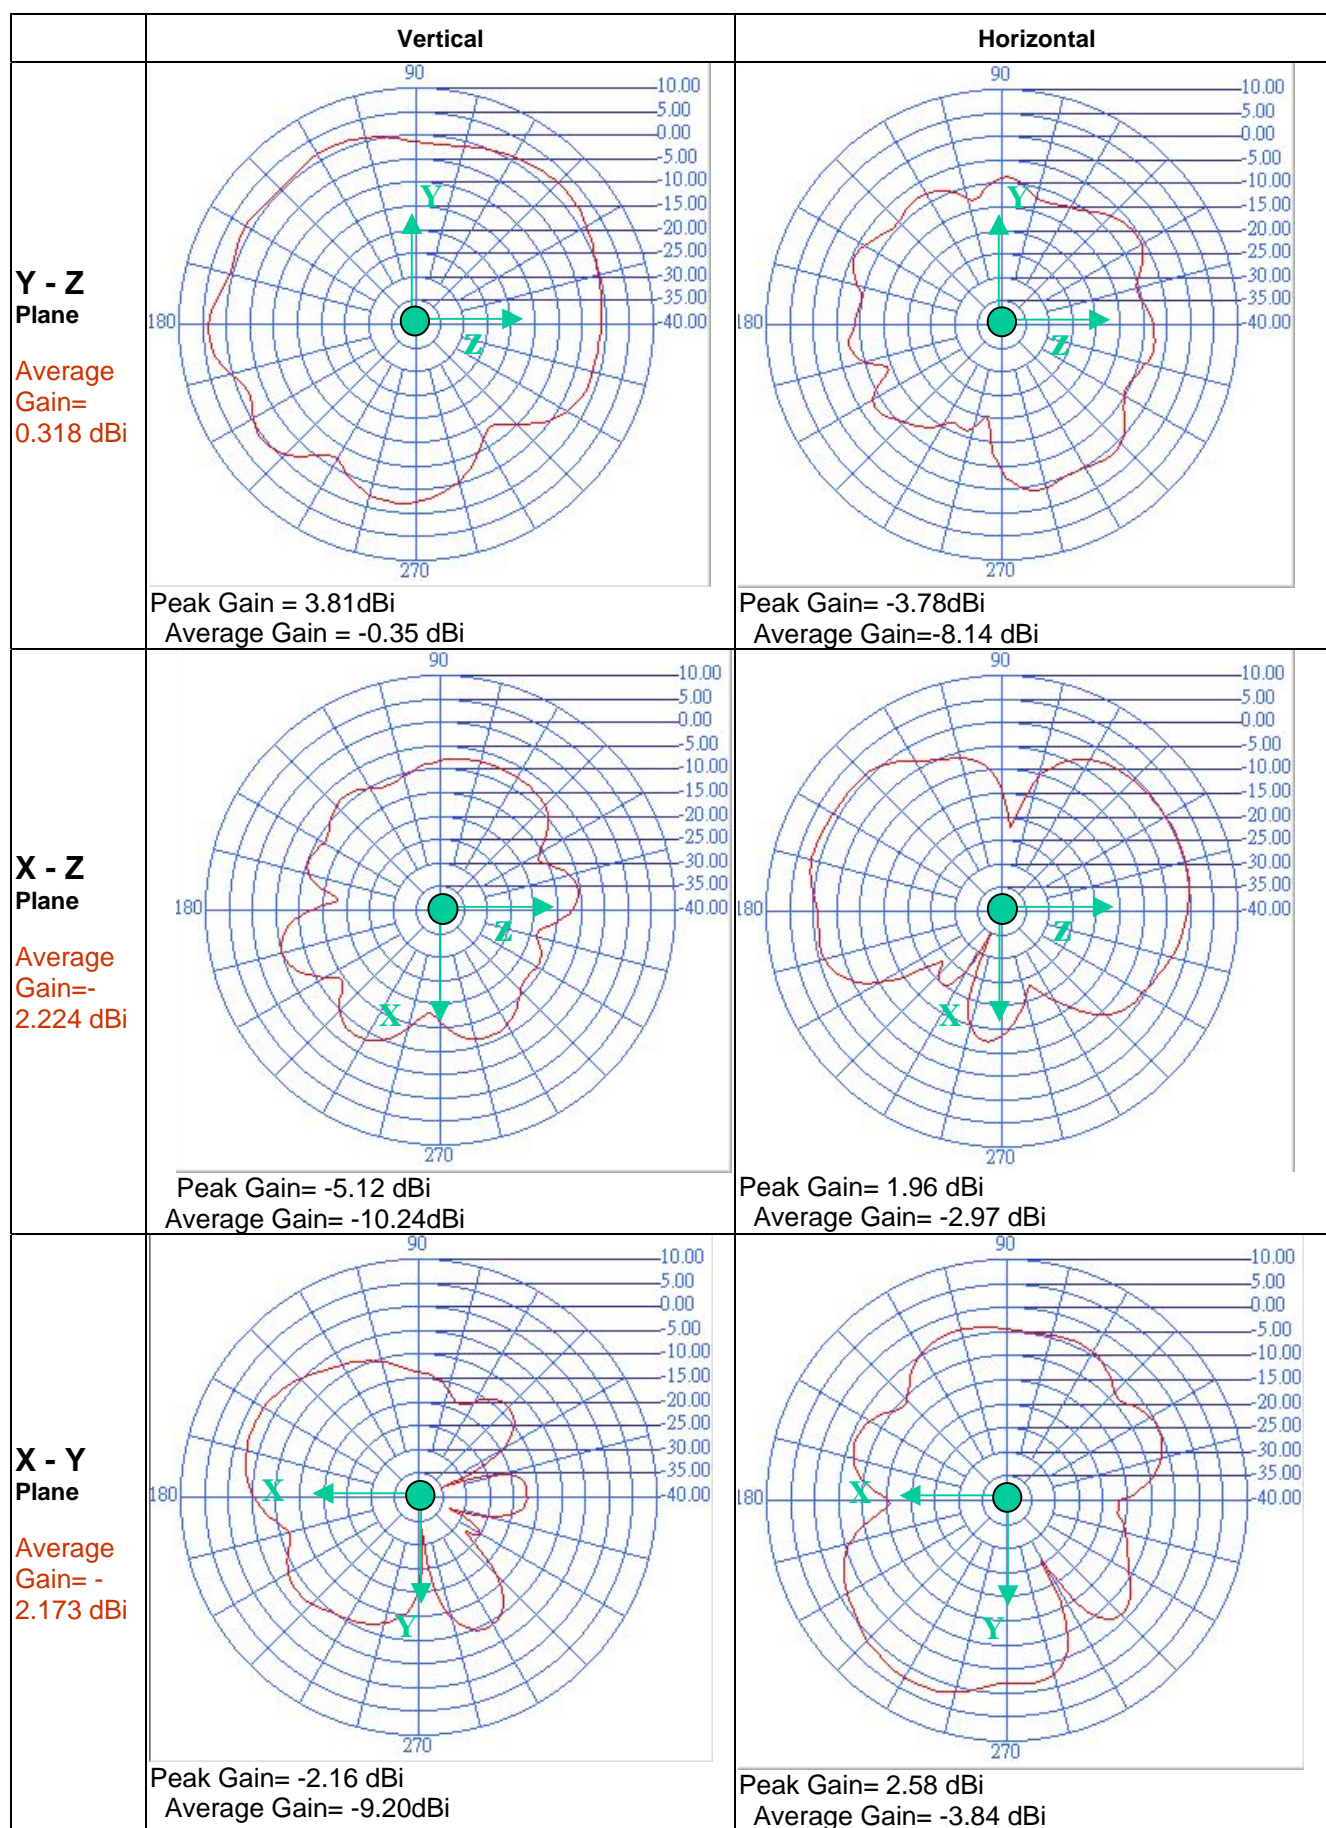





(1). Layout-A, Antenna Area (Empty Space): 4.2 x 20mm²

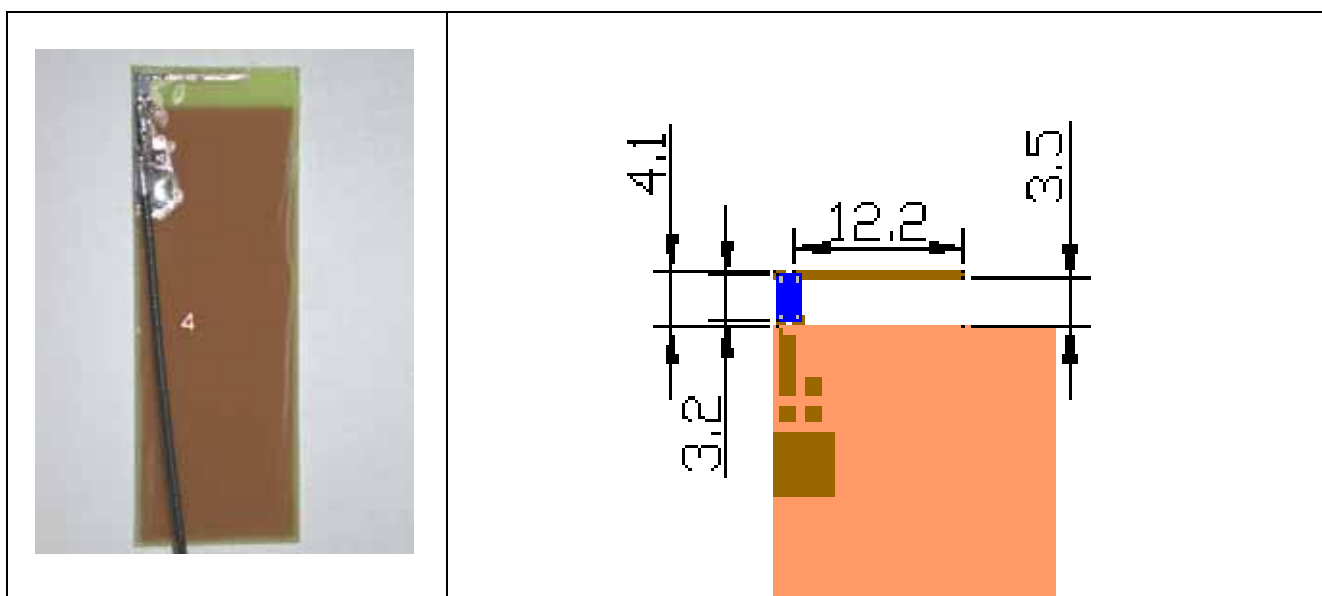


S11 for RFANT3216090A0T at Layout-A:

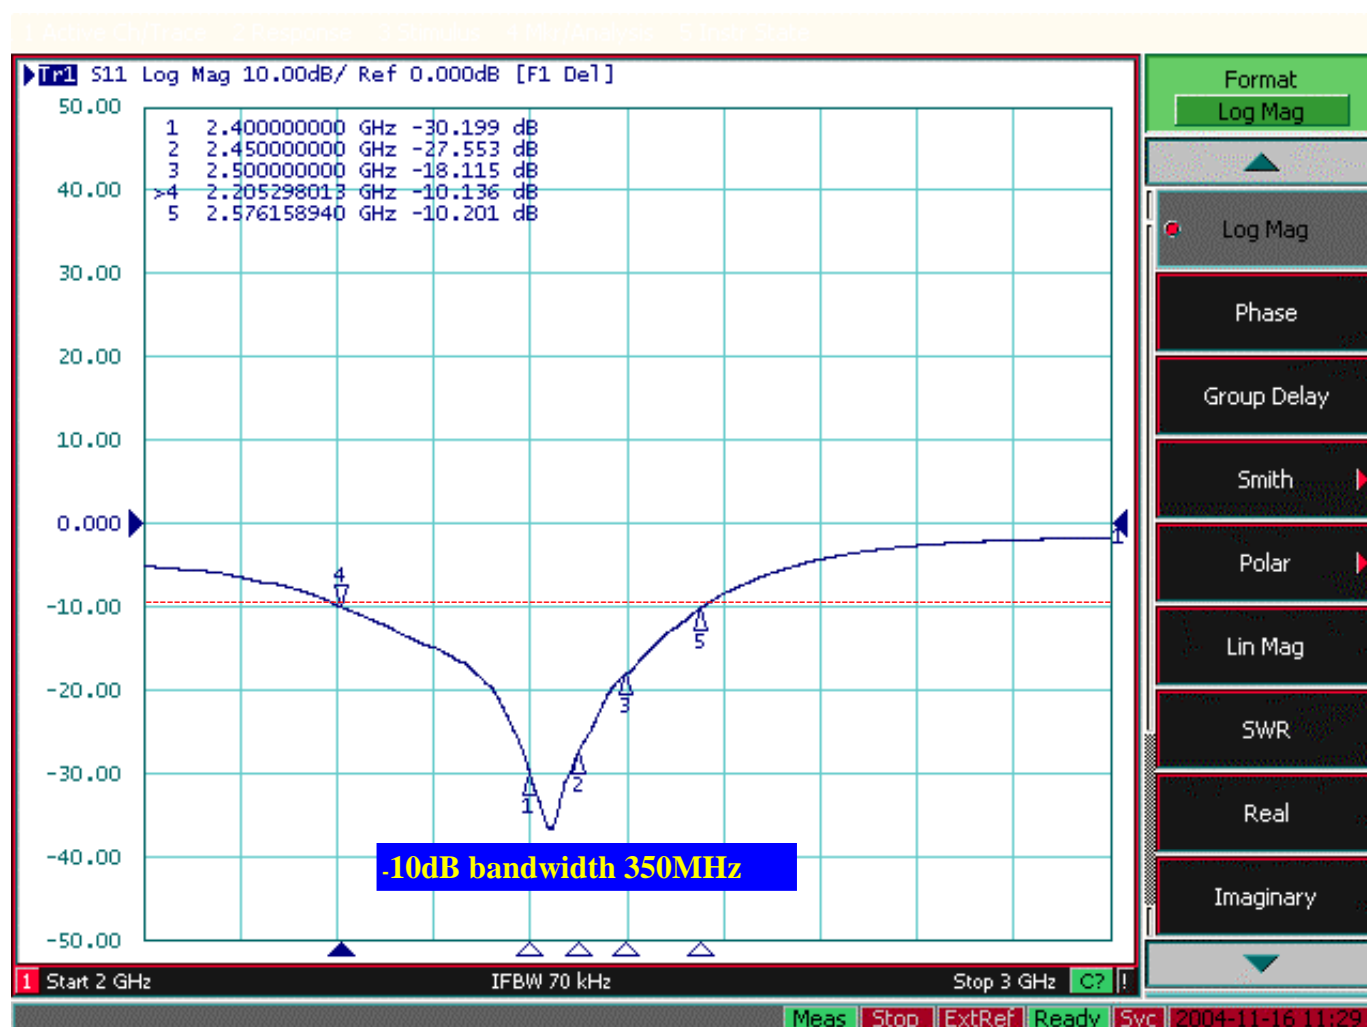

Radiation Pattern at 2.45GHz:

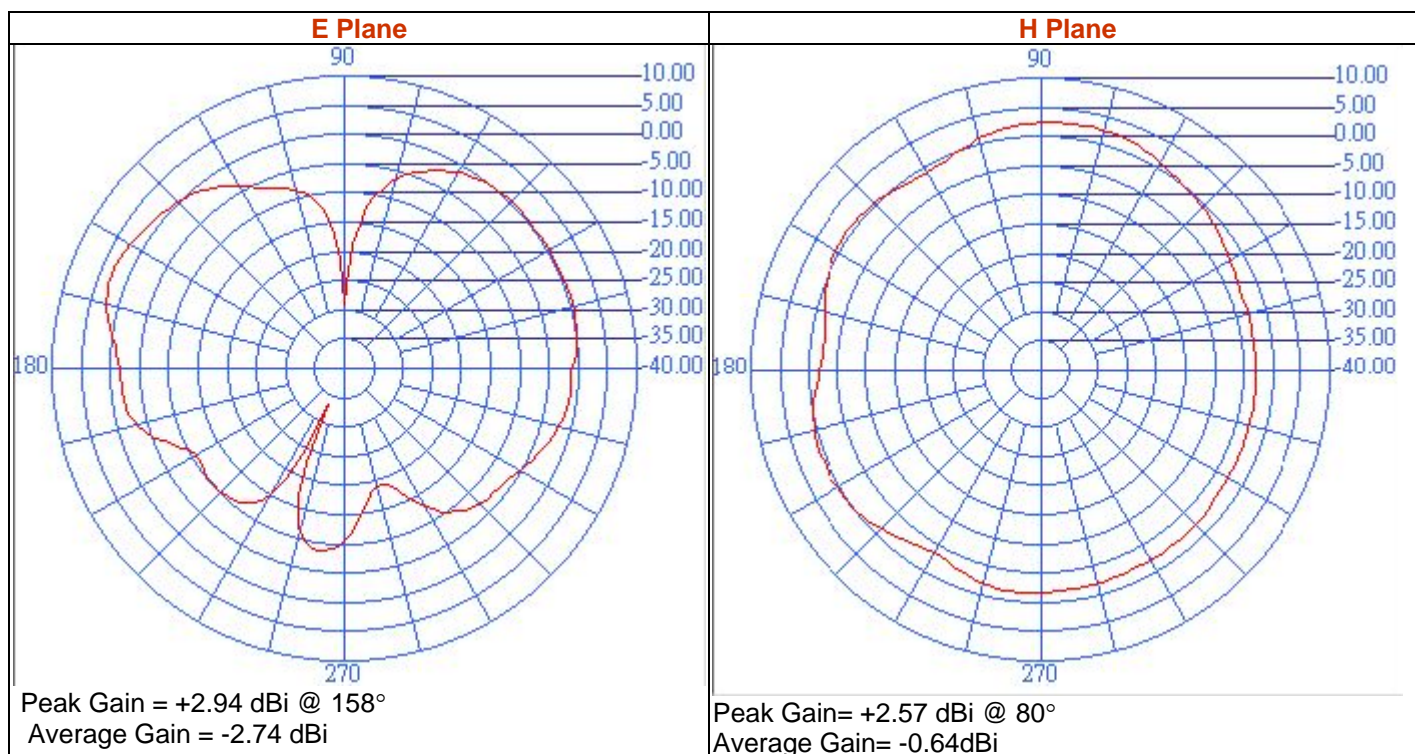


(2). Layout-B, Antenna Area (Empty Space): 2.95 x 20mm²

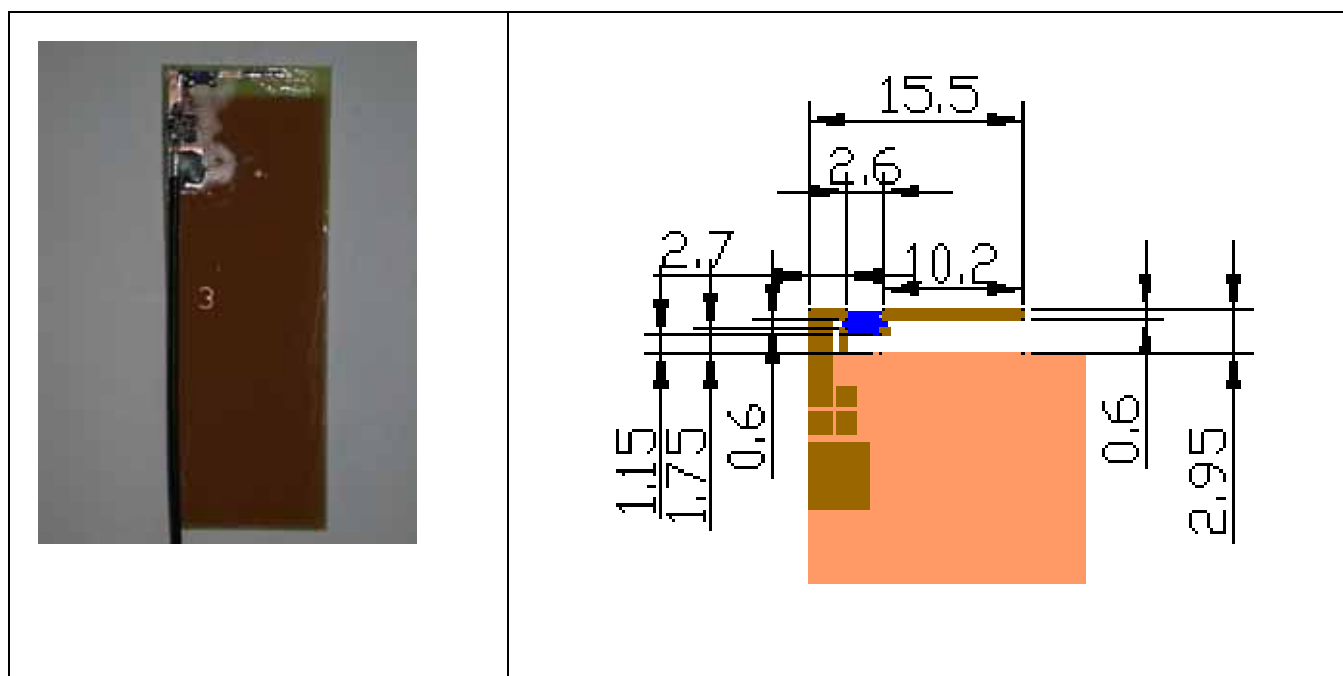





S11 for RFANT3216090A0T at Layout-B :

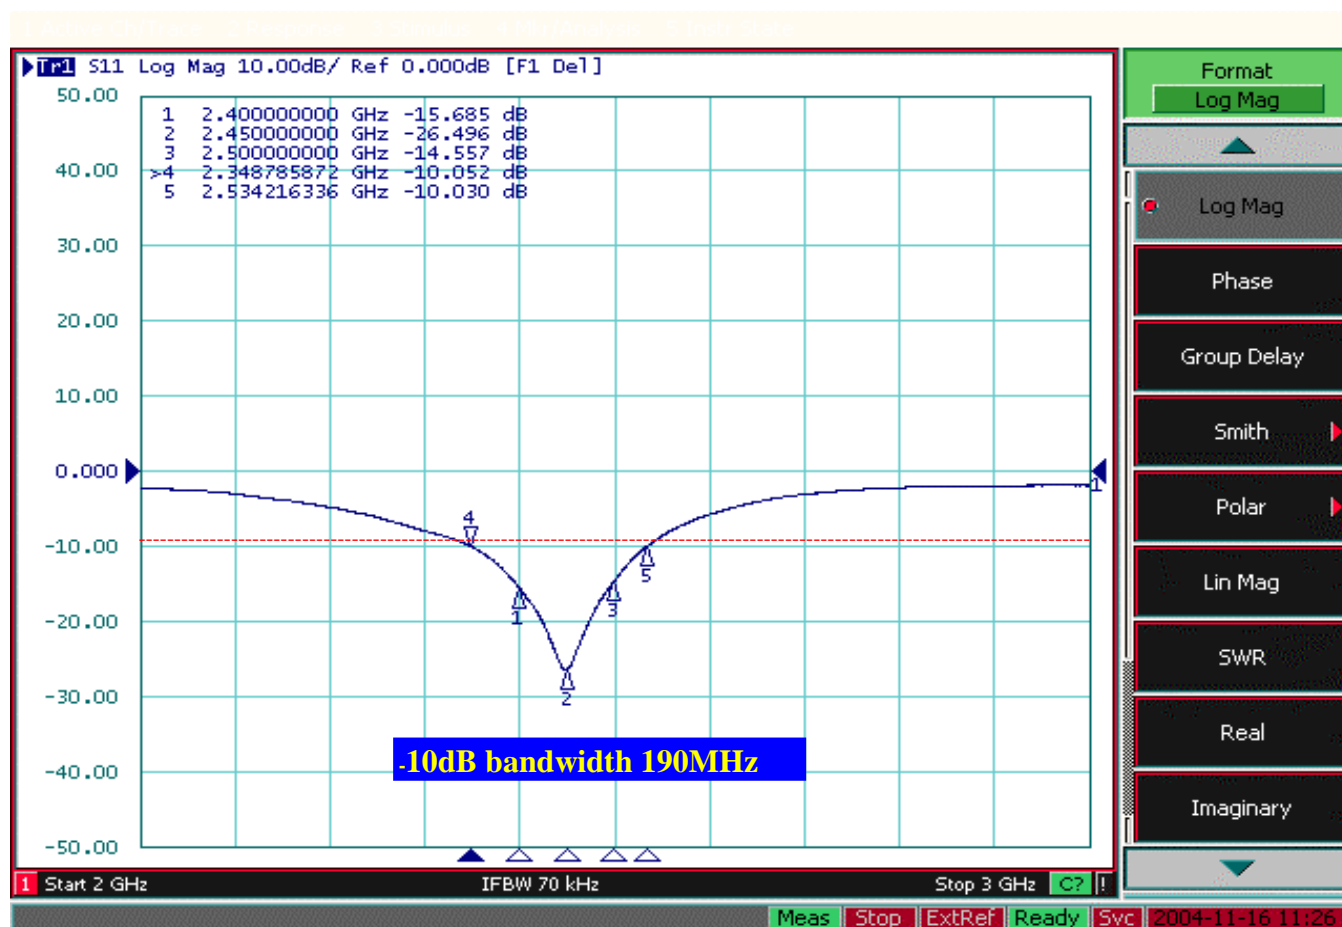


Radiation Pattern at 2.45GHz:

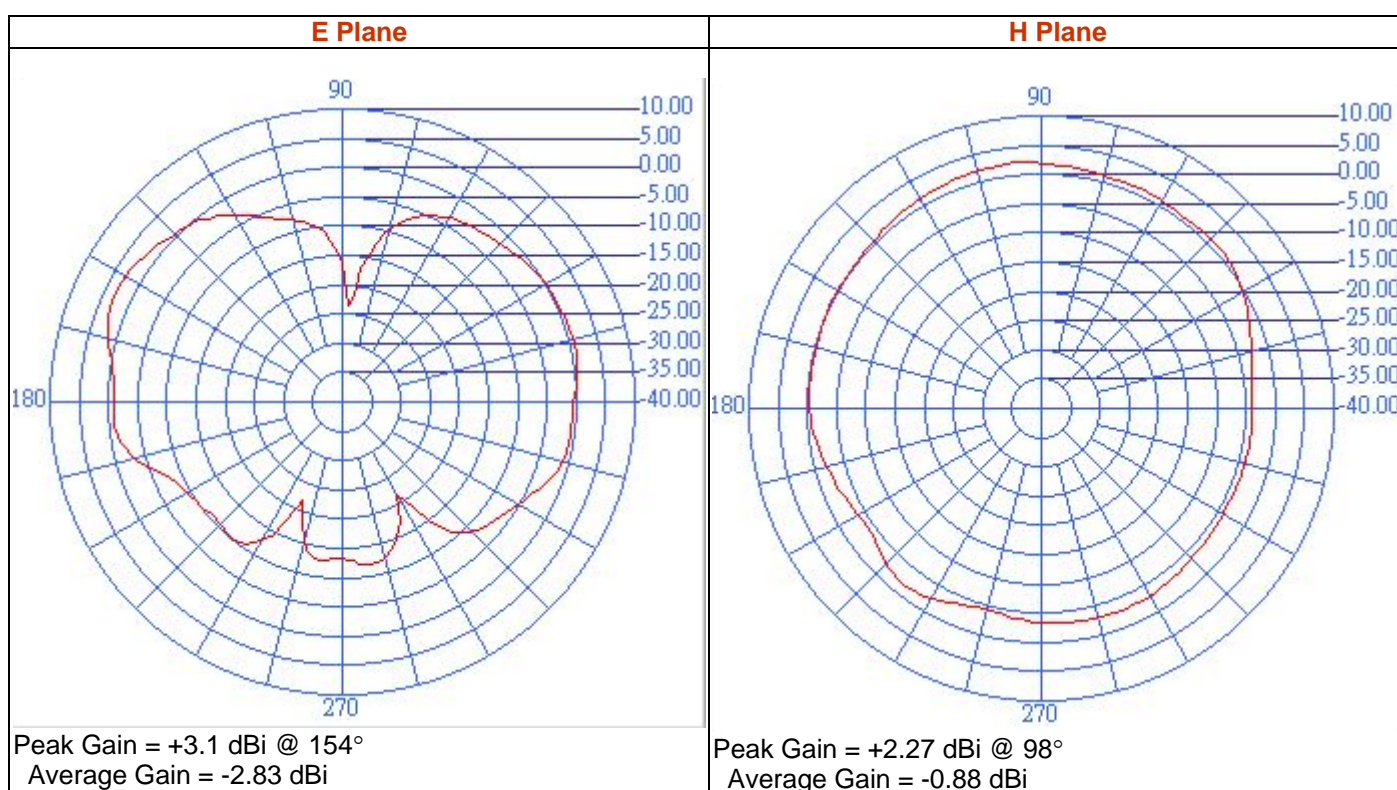


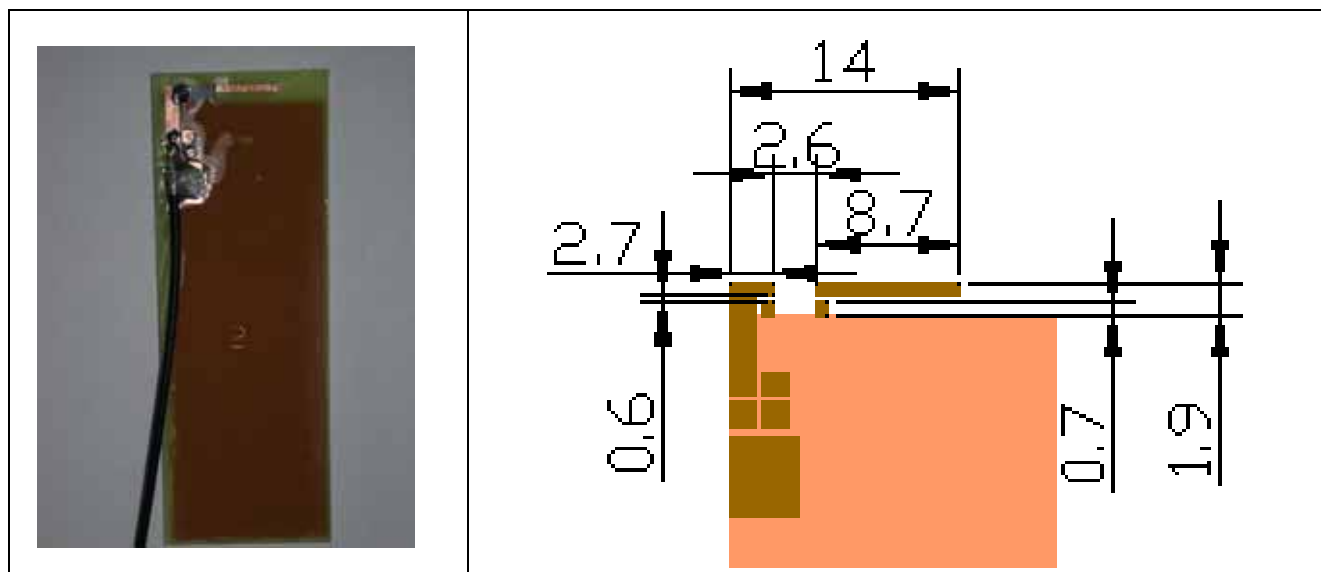(3). Layout-C, Antenna Area (Empty Space): $1.9 \times 20\text{mm}^2$ 

S11 for RFANT3216090A0T at Layout-C :

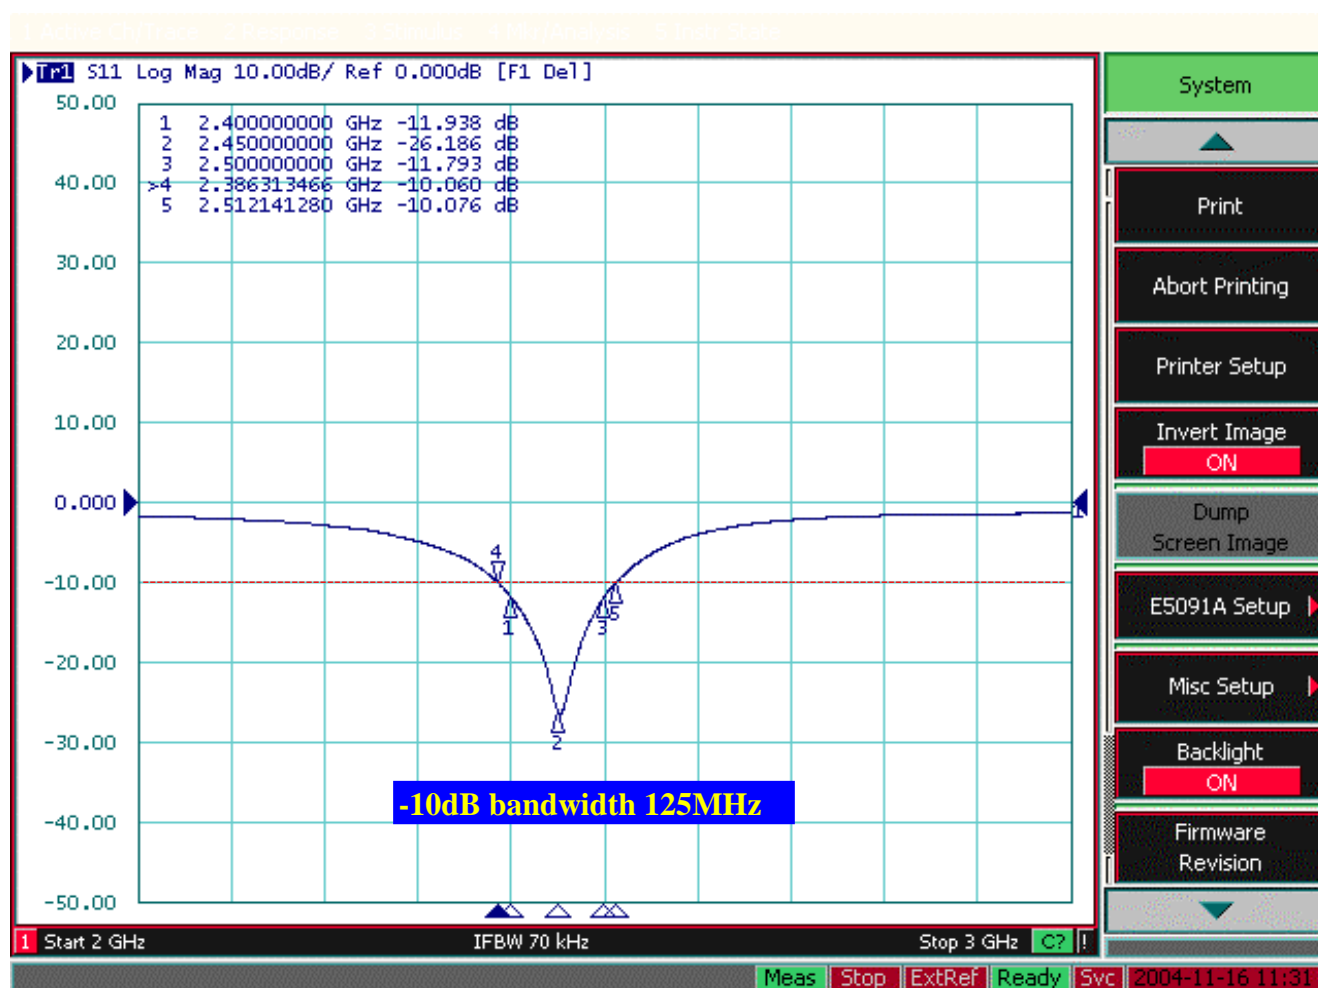

Radiation Pattern at 2.45GHz:

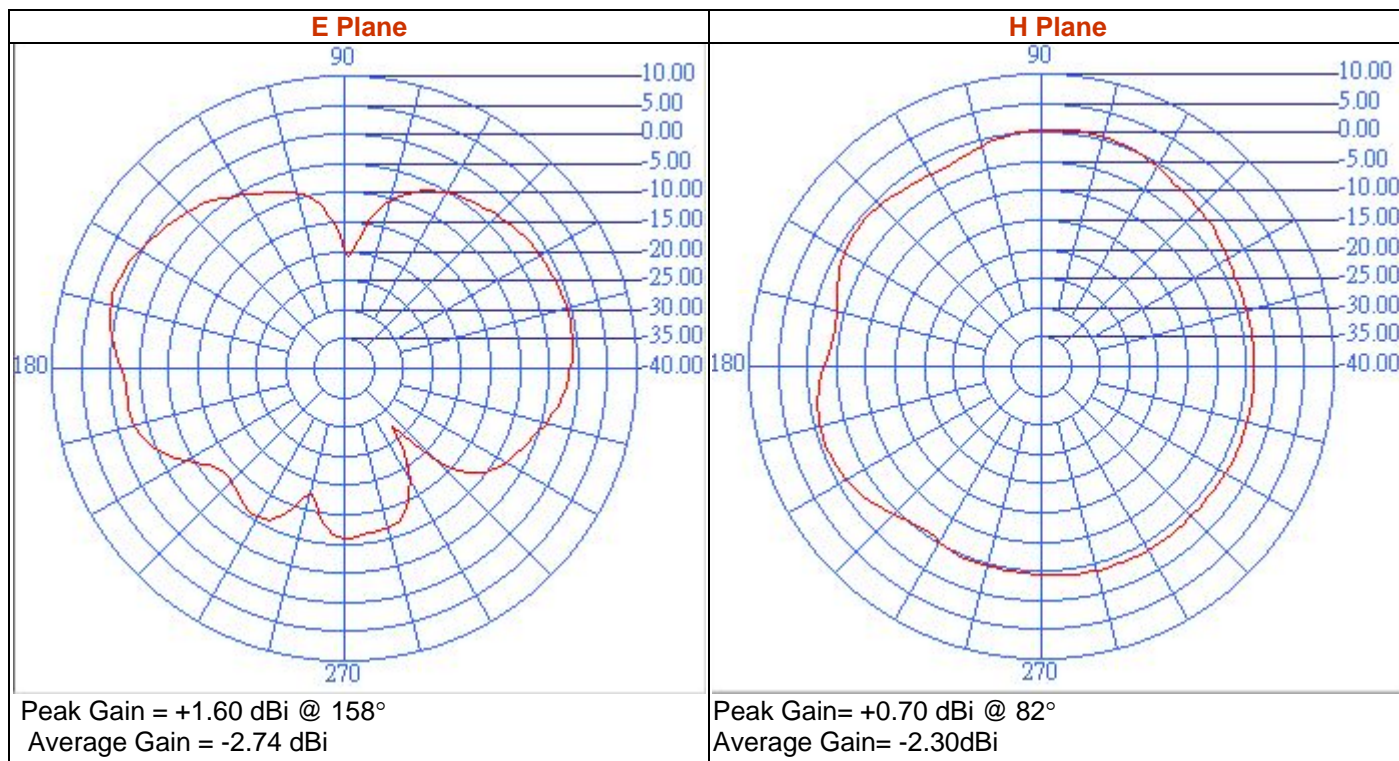

**RELIABILITY TEST****■ Mechanical performance**

Test item	Test condition / Test method	Specification
Solderability	Solder temp. : $235 \pm 5^{\circ}\text{C}$ Immersion time: 2 ± 1 sec Solder: SN63	95% min. coverage of all metabolised area
Resistance to soldering heat	Solder: Sn63 Preheating temperature: $150 \pm 10^{\circ}\text{C}$ Solder Temperature: $260 \pm 5^{\circ}\text{C}$ Immersion time: 10 ± 1 sec Measurement to be made after keeping at room temp. for 24 ± 2 hrs.	No mechanical damage. Ceramic surface shall not be exposed in the middle of the termination or on the terminated product edge by leaching.
Drop test	Height : 75 cm Times : 3 times	No mechanical damage. Samples shall satisfy electrical specification after test..

Environmental characteristics


Test item	Test condition / Test method	Specification
Humidity Resistance	Humidity: 90% to 95% R.H. Tempertaure: $40 \pm 2^{\circ}\text{C}$ Time: 500 ± 24 hours. Measurement: After placing for 24 hours Minimum.	No mechanical damage. Samples shall satisfy electrical specification after test.
Temperature cycle	1. 30 ± 3 minutes at $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, 2. 10~15 minutes at room temperature, 3. 30 ± 3 minutes at $+85^{\circ}\text{C} \pm 3^{\circ}\text{C}$, 4. 10~15 minutes at room temperature, Total 100 continuous cycles Measurement after placing for 48 ± 2 hrs min.	No mechanical damage. Samples shall satisfy electrical specification after test.
High temperature	Temperature: $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Test duration: 24 hours Measurement must be taken after subjection to the above conditions, followed by exposure in room environment for 1 to 2 hours.	No mechanical damage. Samples shall satisfy electrical specification after test.
Low temperature	Temperature: $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ Test duration: 24 hours Measurement must be taken after subjection to the above conditions, followed by exposure in room environment for 1 to 2 hours.	No mechanical damage. Samples shall satisfy electrical specification after test.

**ORDERING CODE**


RF	ANT	321609	0	A	0	T
Walsin RF device	Product code ANT : Antenna	Dimension code Per 2 digits of Length, Width, Thickness : e.g. : 321609 = Length 32, Width 16, Thickness 9	Unit of dimension 0 : 0.1 mm 1 : 1.0 mm	Application A : 2.4GHZ ISM Band	Specification Code from 0 ~ 9 dependent on different electrical specification	Packing T : 7" Reeled G : 10" Reeled B : Bulk X : SFC product

PACKAGING

Plastic Tape specifications (unit :mm)

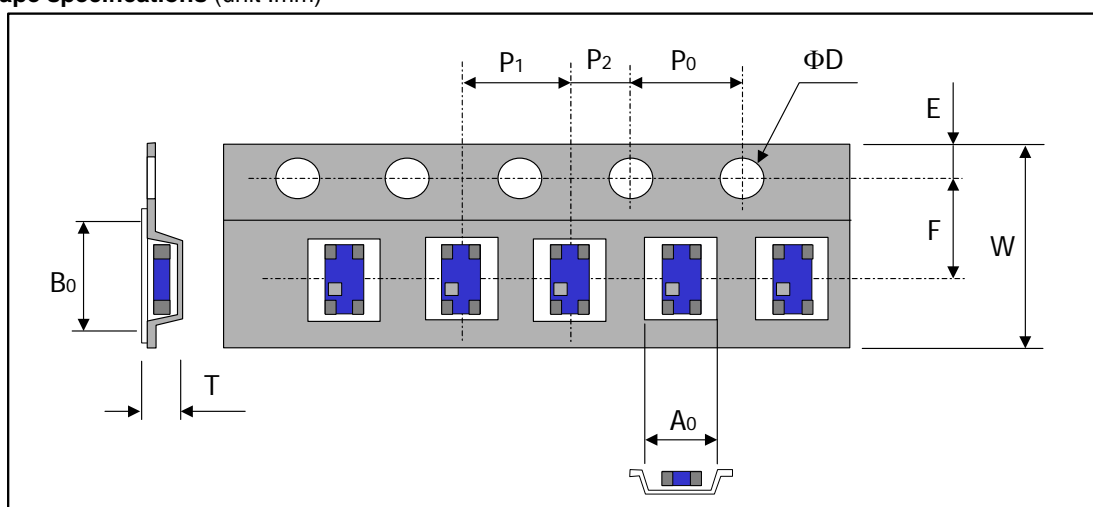

Index	Ao	Bo	ΦD	T	W
Dimension (mm)	1.85 ± 0.10	3.45 ± 0.10	1.55 ± 0.05	1.04 ± 0.10	8.0 ± 0.3
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05

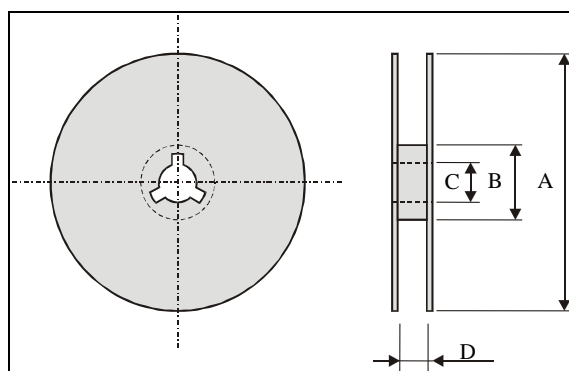Reel dimensions

Index	A	B	C	D
Dimension (mm)	Φ178	Φ60.0	Φ13.5	8.5 ± 0.1

Typing Quantity: 2000 pieces per 7" reel

**CAUTION OF HANDLING****Limitation of Applications**

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Medical equipment
- (5) Disaster prevention / crime prevention equipment
- (6) Traffic signal equipment
- (7) Transportation equipment (vehicles, trains, ships, etc.)
- (8) Applications of similar complexity and /or reliability requirements to the applications listed in the above.

Storage condition

- (1) Products should be used in 6 months from the day of WALSIN outgoing inspection, which can be confirmed.
- (2) Storage environment condition.
 - Products should be storage in the warehouse on the following conditions.
 - Temperature : -10 to +40°C
 - Humidity : 30 to 70% relative humidity
 - Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.
 - Products should be storage on the palette for the prevention of the influence from humidity, dust and son on.
 - Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be storage under the airtight packaged condition.