



Test Report

Product Name	Wireless Headphone
Model No.	WHP-210
FCC ID	BJM-WHP210

Applicant	TATUNG CO.
Address	22, Chungshan N. Rd., 3rd Sec. Taipei, Taiwan, 104, R.O.C.

Date of Receipt	Apr. 27, 2007
Issued Date	May 29, 2007
Report No.	075L010-RFUSP05V01

The test results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: May 29, 2007

Report No.: 075L010-RFUSP05V01



Product Name	Wireless Headphone
Applicant	TATUNG CO.
Address	22, Chungshan N. Rd., 3rd Sec. Taipei, Taiwan, 104, R.O.C.
Manufacturer	TATUNG CO.
Model No.	WHP-210
Rated Voltage	AC 120V/60Hz
Working Voltage	3.7V (Battery)
Trade Name	Sound On
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2006 CISPR 22: 2005 ANSI C63.4: 2003
Test Result	Complied



Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Rita Huang
(Engineering Adm. Specialist / Rita Huang)



Tested By : Dino Chen
(Engineer / Dino Chen)



Approved By : Gene Chang
(President / Gene Chang)

0914

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	5
1.1. EUT Description.....	5
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of Test System.....	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure	10
2.5. Uncertainty	10
2.6. Test Result of Conducted Emission.....	11
3. Peak Power Output	13
3.1. Test Equipment.....	13
3.2. Test Setup	13
3.3. Limit	13
3.4. Uncertainty	13
3.5. Test Result of Peak Power Output.....	14
4. Radiated Emission.....	16
4.1. Test Equipment.....	16
4.2. Test Setup	17
4.3. Limits	18
4.4. Test Procedure	19
4.5. Uncertainty	19
4.6. Test Result of Radiated Emission.....	20
5. Band Edge	24
5.1. Test Equipment.....	24
5.2. Test Setup	24
5.3. Limit	25
5.4. Test Procedure	25
5.5. Uncertainty	25
5.6. Test Result of Band Edge	26
6. Occupied Bandwidth.....	30
6.1. Test Equipment.....	30
6.2. Test Setup	30
6.3. Limits	30
6.4. Uncertainty	30
6.5. Test Result of Occupied Bandwidth	31
7. Power Density	34
7.1. Test Equipment.....	34

7.2.	Test Setup	34
7.3.	Limits	34
7.4.	Uncertainty	34
7.5.	Test Result of Power Density	35
8.	EMI Reduction Method During Compliance Testing	38

- Attachment 1: EUT Test Photographs
- Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless Headphone
Trade Name	Sound On
Model No.	WHP-210
FCC ID	BJM-WHP210
Frequency Range	2405-2479MHz
Number of Channels	38
Channel Separation	2MHz
Data Rate	N/A
Type of Modulation	$\pi/4$ DQPSK (Differential Quadrature Phase Shift Keying)
Antenna Type	Chip Antenna
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto
Power Adapter	DELTA, ADP-5FH B Cable out: Shielded, 2.1m

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	WALSNI	RFANT7635110A1T	2dBi for 2.4 GHz

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 2:	2405 MHz	Channel 3:	2407 MHz	Channel 4:	2409 MHz
Channel 5:	2411 MHz	Channel 6:	2413 MHz	Channel 7:	2415 MHz
Channel 8:	2417 MHz	Channel 9:	2419 MHz	Channel 10:	2421 MHz
Channel 11:	2423 MHz	Channel 12:	2425 MHz	Channel 13:	2427 MHz
Channel 14:	2429 MHz	Channel 15:	2431 MHz	Channel 16:	2433 MHz
Channel 17:	2435 MHz	Channel 18:	2437 MHz	Channel 19:	2439 MHz
Channel 20:	2441 MHz	Channel 21:	2443 MHz	Channel 22:	2445 MHz
Channel 23:	2447 MHz	Channel 24:	2449 MHz	Channel 25:	2451 MHz
Channel 26:	2453 MHz	Channel 27:	2455 MHz	Channel 28:	2457 MHz
Channel 29:	2459 MHz	Channel 30:	2461 MHz	Channel 31:	2463 MHz
Channel 32:	2465 MHz	Channel 33:	2467 MHz	Channel 34:	2469 MHz
Channel 35:	2471 MHz	Channel 36:	2473 MHz	Channel 37:	2475 MHz
Channel 38:	2477 MHz	Channel 39:	2479 MHz		

Note:

1. The EUT is a Wireless Headphone with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

1.2. Operational Description

The EUT is a Wireless Headphonewith a built-in 2.4GHz transceiver. There are 38 channels in 2405 – 2479MHz. The channels are separated by 2MHz. The signals are modulated by $\pi/4$ DQPSK. The antenna type is chip antenna.

Test Mode	Mode 1: Transmitter
-----------	---------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1.	Notebook PC	DELL	PPT	N/A	DoC	Non-Shielded, 0.8m
2.	Fixture	Aardvark	N/A	N/A	N/A	N/A

	Signal Cable Type	Signal Cable Description
A.	USB Cable	Shielded, 1.5m
B.	Control Cable	Non-Shielded, 1.0m

1.4. Configuration of Test System

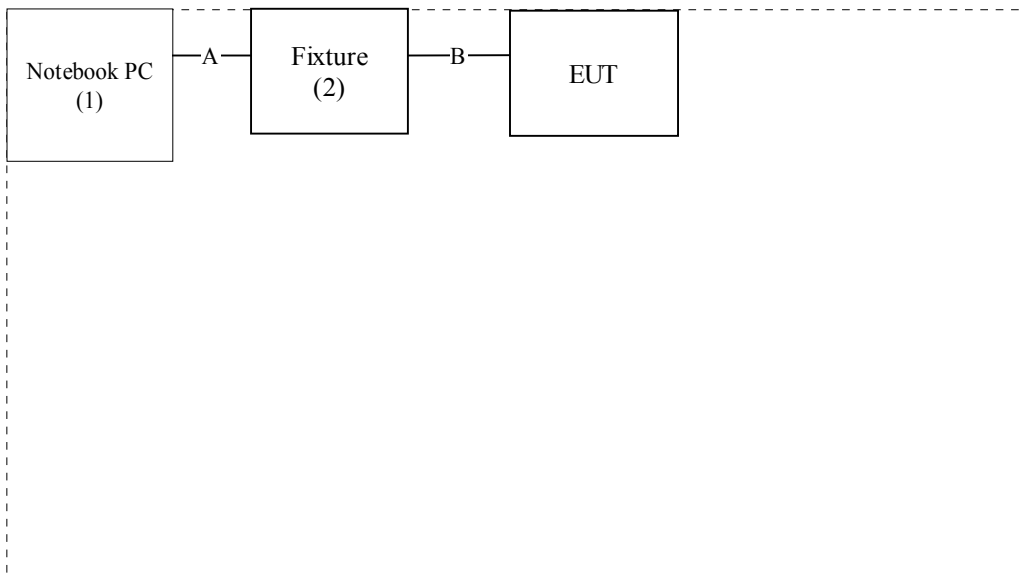

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Connect the EUT to a notebook via a USB cable.
- (3) Execute AWAflash.exe on the notebook.
- (4) Double-click “AV7101” and select USB as a primary connection interface.
- (5) Setup the test channel.
- (6) Press “Apply” to start the continuous transmission.
- (7) Verify that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation
 Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com



0914

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2007	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2007	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2007	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2007	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

2.2. Test Setup

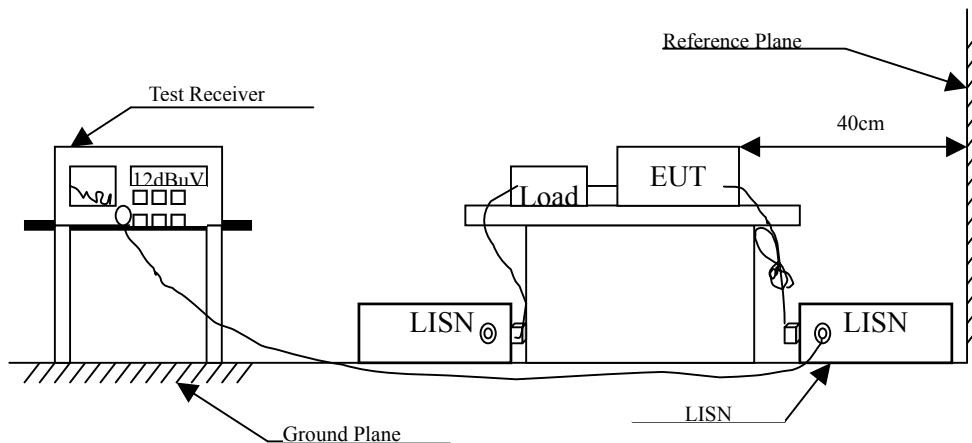

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56 _(註)	56-46 _(註)
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Wireless Headphone
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 1					
Quasi-Peak					
0.170	0.202	48.830	49.032	-16.397	65.429
0.228	0.203	41.940	42.143	-21.628	63.771
0.963	0.232	34.760	34.992	-21.008	56.000
1.810	0.264	40.910	41.174	-14.826	56.000
3.396	0.325	46.210	46.535	-9.465	56.000
9.744	0.620	27.470	28.090	-31.910	60.000
Average					
0.170	0.202	41.660	41.862	-13.567	55.429
0.228	0.203	34.910	35.113	-18.658	53.771
0.963	0.232	28.300	28.532	-17.468	46.000
1.810	0.264	34.680	34.944	-11.056	46.000
3.396	0.325	35.130	35.455	-10.545	46.000
9.744	0.620	17.410	18.030	-31.970	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Wireless Headphone
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBuV
	dB	dBuV	dBuV		
LINE 2					
Quasi-Peak					
0.170	0.202	47.360	47.562	-17.867	65.429
0.451	0.216	34.600	34.816	-22.584	57.400
0.791	0.230	35.370	35.600	-20.400	56.000
1.869	0.274	37.960	38.234	-17.766	56.000
3.736	0.340	41.880	42.220	-13.780	56.000
9.849	0.531	24.530	25.061	-34.939	60.000
Average					
0.170	0.202	41.120	41.322	-14.107	55.429
0.451	0.216	28.320	28.536	-18.864	47.400
0.791	0.230	25.100	25.330	-20.670	46.000
1.869	0.274	29.770	30.044	-15.956	46.000
3.736	0.340	31.310	31.650	-14.350	46.000
9.849	0.531	16.310	16.841	-33.159	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Peak Power Output

3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R & S	FSP40 / 100170	Nov., 2006

- Note:
1. All equipments are calibrated every one year.
 2. Test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

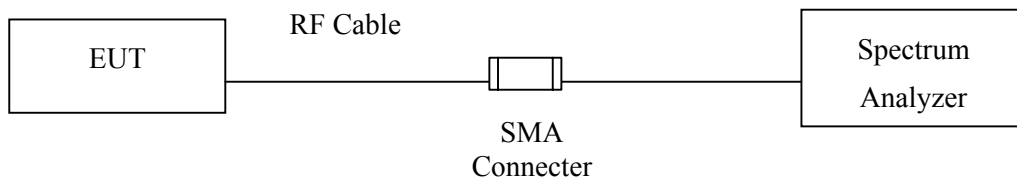

3.3. Limit

The maximum peak power shall be less 1Watt.

3.4. Uncertainty


± 1.27 dB

3.5. Test Result of Peak Power Output


Product : Wireless Headphone
 Test Item : Peak Power Output
 Test Site : CTR1
 Test Mode : Mode 1: Transmitter

Channel No.	Frequency (MHz)	Channel Power (dBm)	Required Limit	Result
2	2405.00	3.34	1Watt= 30 dBm	Pass
20	2441.00	1.93	1Watt= 30 dBm	Pass
39	2479.00	0.46	1Watt= 30 dBm	Pass


Channel 2

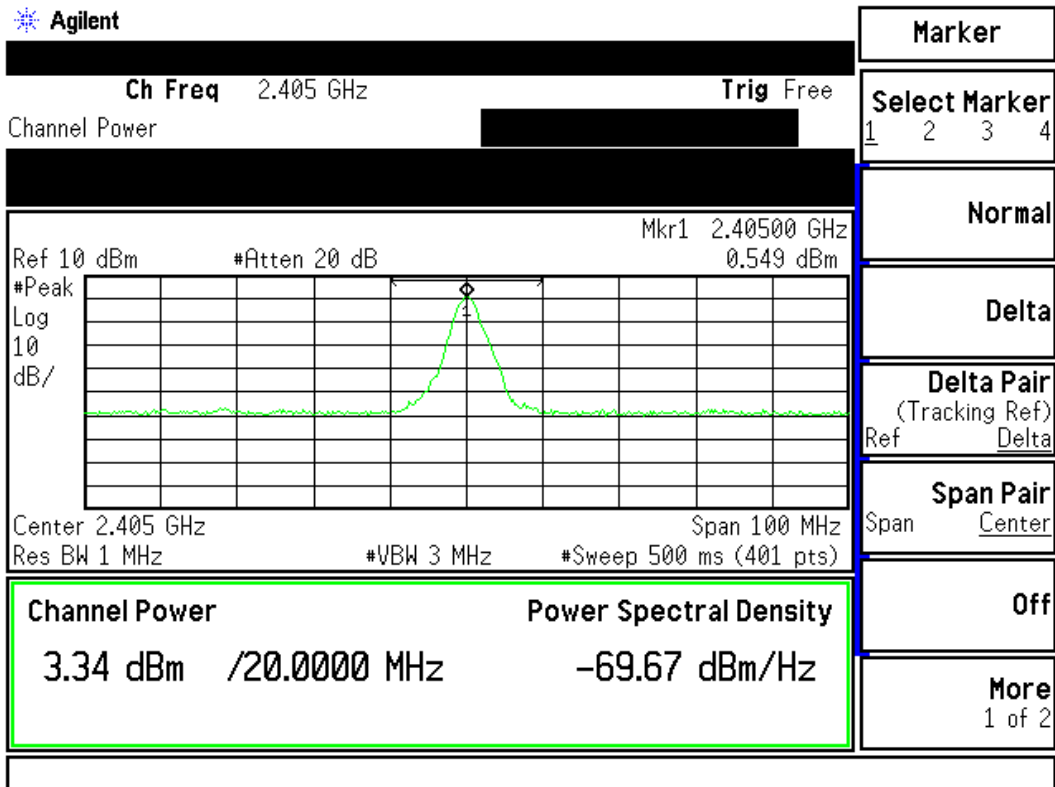

Channel 20

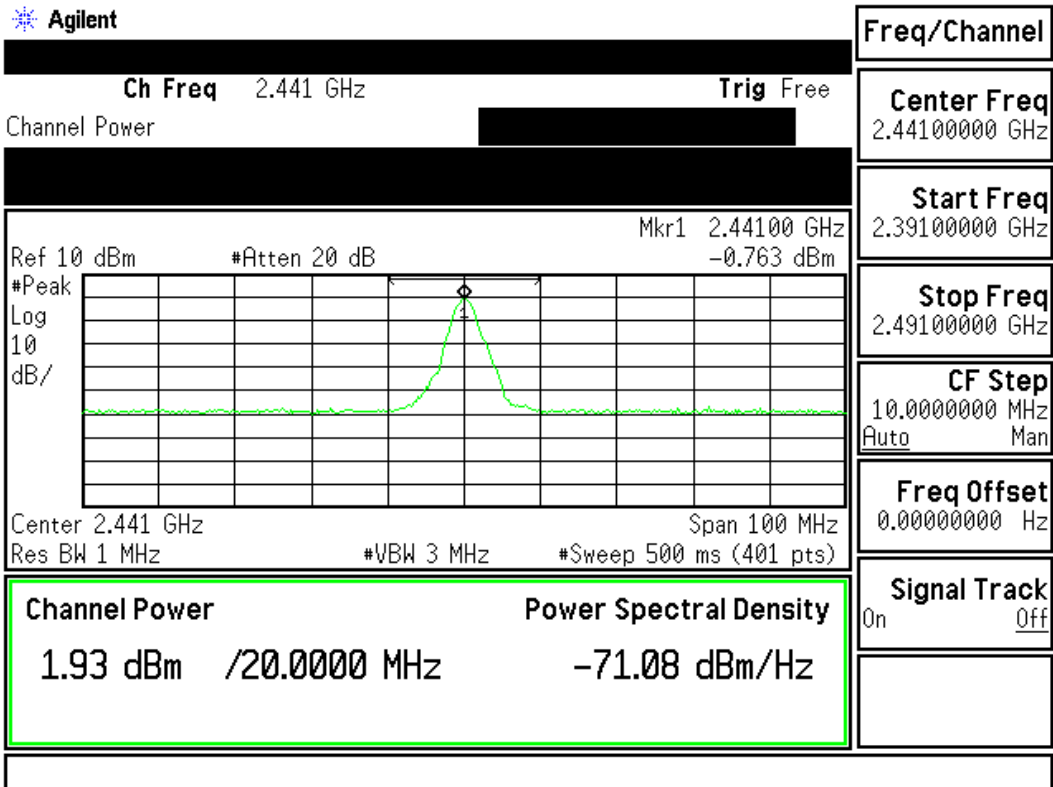

Channel 39

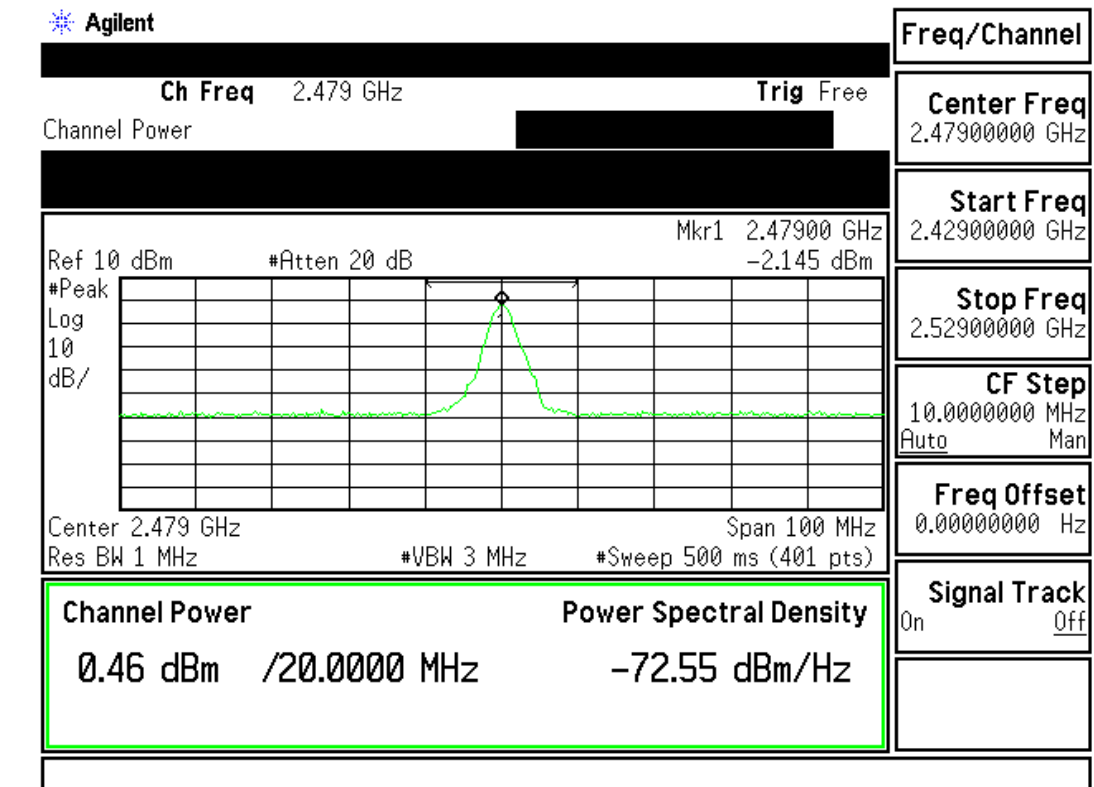

4. Radiated Emission


4.1. Test Equipment

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1		Test Receiver	R & S	ESVS 10 / 834468/003	May, 2007
		Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2007
		Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2007
		Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2006
<input type="checkbox"/> Site # 2		Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2007
		Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2007
		Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2007
		Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2007
		Horn Antenna	ETS	3115 / 0005-6160	Sep., 2006
		Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2007
<input checked="" type="checkbox"/> Site # 3	X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2007
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2007
	X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2007
	X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2006
	X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2006
	X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2007
	X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2006


- Note: 1. All equipments are calibrated every one year.
 2. Test equipments marked by "X" are used to measure the final test results.

4.2. Test Setup

Below 1GHz

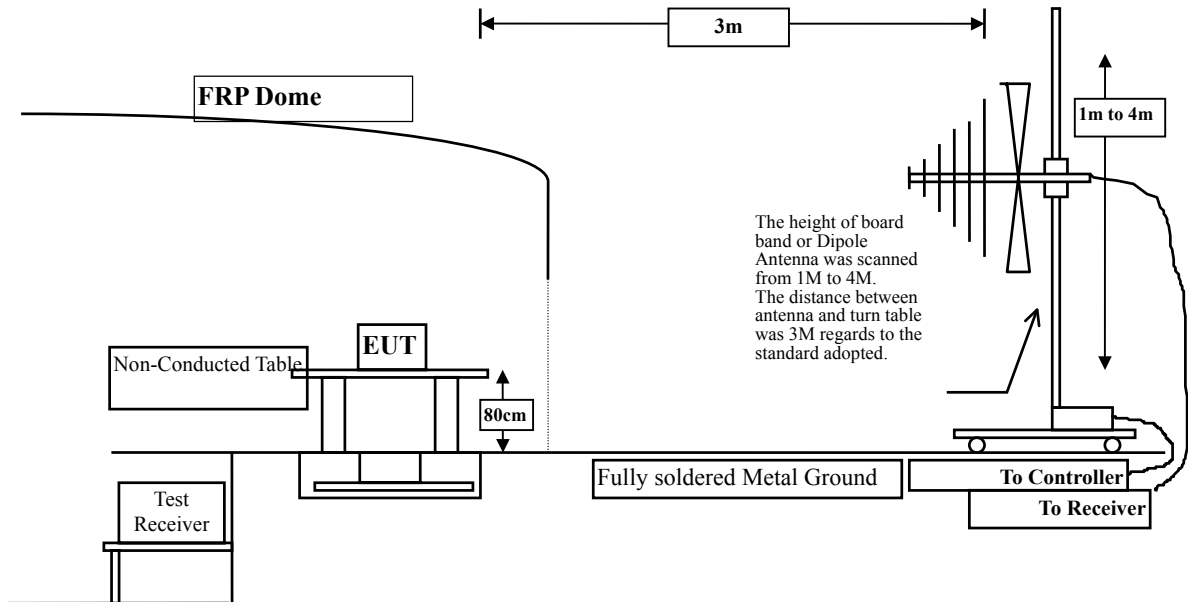

Above 1GHz

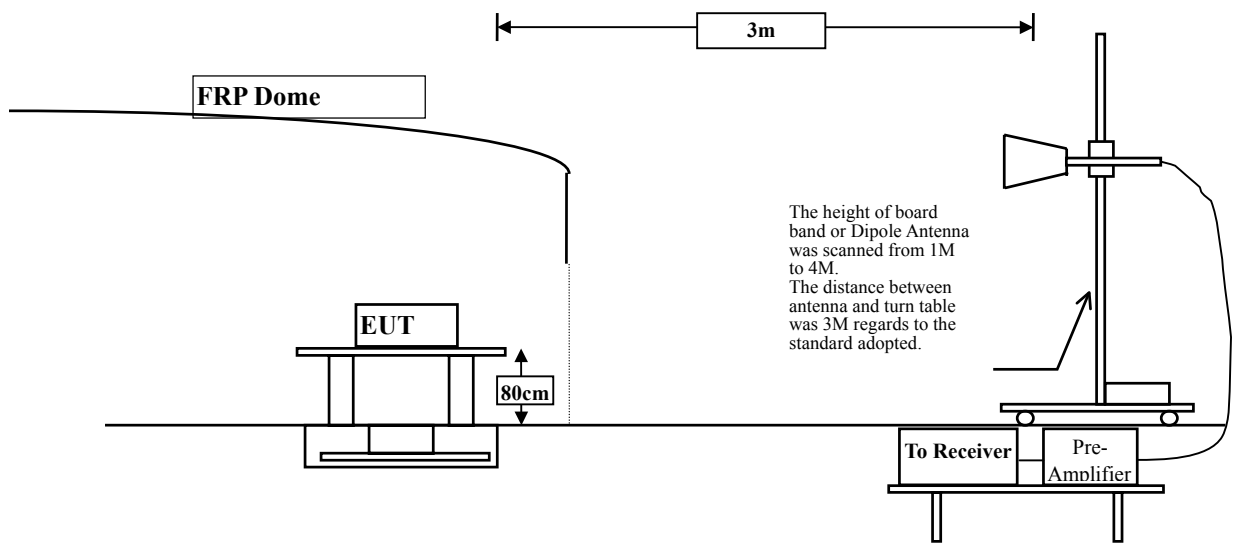

4.3. Limits

➤ General Radiated Emission Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must also comply in FCC 15.209(a) (see FCC 15.205(c)).

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Wireless Headphone
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2405MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4810.000	2.898	41.565	44.463	-29.537	74.000
7215.000	9.451	45.717	55.167	-18.833	74.000
9620.000	10.491	37.429	47.919	-26.081	74.000
Average Detector:					
7215.000	9.451	38.269	47.719	-6.281	54.000
Vertical					
Peak Detector:					
4810.000	2.898	44.437	47.335	-26.665	74.000
7215.000	9.451	44.732	54.182	-19.818	74.000
9620.000	10.491	39.348	49.838	-24.162	74.000
Average Detector:					
7215.000	9.451	39.692	49.142	-4.858	54.000

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Headphone
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4882.000	3.056	40.830	43.886	-30.114	74.000
7323.000	9.570	40.253	49.822	-24.178	74.000
9764.000	10.614	37.525	48.139	-25.861	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4879.875	3.051	46.862	49.912	-24.088	74.000
7323.000	9.570	42.156	51.725	-22.275	74.000
9764.000	10.614	38.703	49.317	-24.683	74.000
Average Detector:					
--					

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Headphone
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2479 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4958.000	3.232	41.165	44.397	-29.603	74.000
7437.000	9.685	37.747	47.432	-26.568	74.000
9916.000	10.738	37.873	48.611	-25.389	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4955.875	3.227	46.799	50.025	-23.975	74.000
7437.000	9.685	39.948	49.633	-24.367	74.000
9916.000	10.738	38.946	49.684	-24.316	74.000
Average Detector:					
--					

Note:

1. The reading levels below 1GHz and above 1GHz are quasi-peak values and peak/average values, respectively.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Headphone
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
388.900	15.913	13.231	29.144	-16.856	46.000
468.925	18.778	11.525	30.304	-15.696	46.000
546.525	20.465	10.639	31.103	-14.897	46.000
830.250	21.907	10.606	32.513	-13.487	46.000
883.600	22.418	9.107	31.525	-14.475	46.000
944.225	22.818	9.730	32.547	-13.453	46.000
Vertical					
294.325	13.808	14.515	28.323	-17.677	46.000
376.775	16.582	12.879	29.461	-16.539	46.000
539.250	19.997	6.844	26.841	-19.159	46.000
619.275	21.591	9.958	31.549	-14.451	46.000
684.750	20.297	7.662	27.959	-18.041	46.000
806.000	21.759	7.233	28.992	-17.008	46.000

Note:

1. The reading levels below 1GHz are quasi-peak values.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested. Only the worst case is shown on the report.

5. Band Edge

5.1. Test Equipment


Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Test Receiver	R & S	ESI 26 / 838786/004	May, 2007
X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2007
X Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2007
X Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2006
X Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2006
X Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2006
X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2007
X Pre-Amplifier	HP	8449B / 3008A01123	July, 2006

OATS No.3


- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

5.2. Test Setup

RF Conducted Measurement:

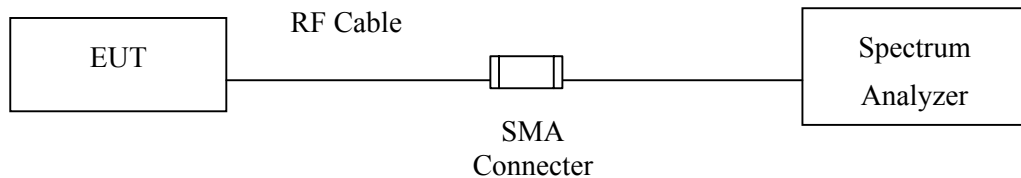

RF Radiated Measurement:

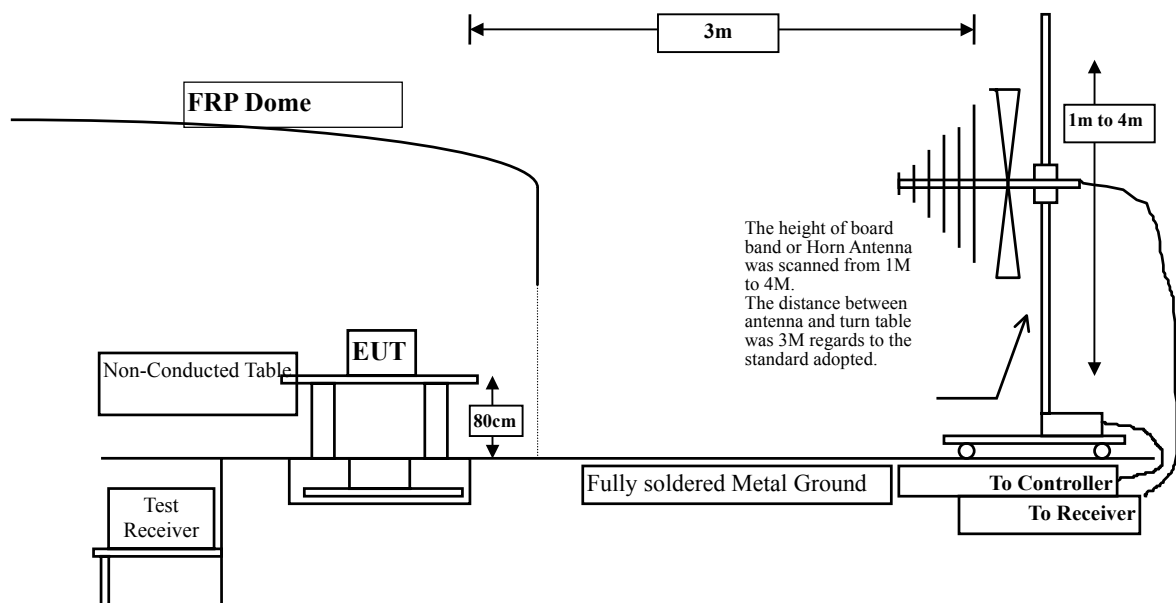

5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must also comply in FCC 15.209(a) (see FCC 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

5.5. Uncertainty

Conducted is ± 1 MHz

Radiated is ± 3.9 dB

5.6. Test Result of Band Edge

Product : Wireless Headphone
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
2 (Horizontal)	<2400	>20	Pass

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
2 (Peak)	2383.875	-1.425	48.671	47.246	74.00	54.00	Pass
2 (Average)	--	--	--	--	74.00	54.00	Pass

Figure Channel 2: Horizontal (Peak)

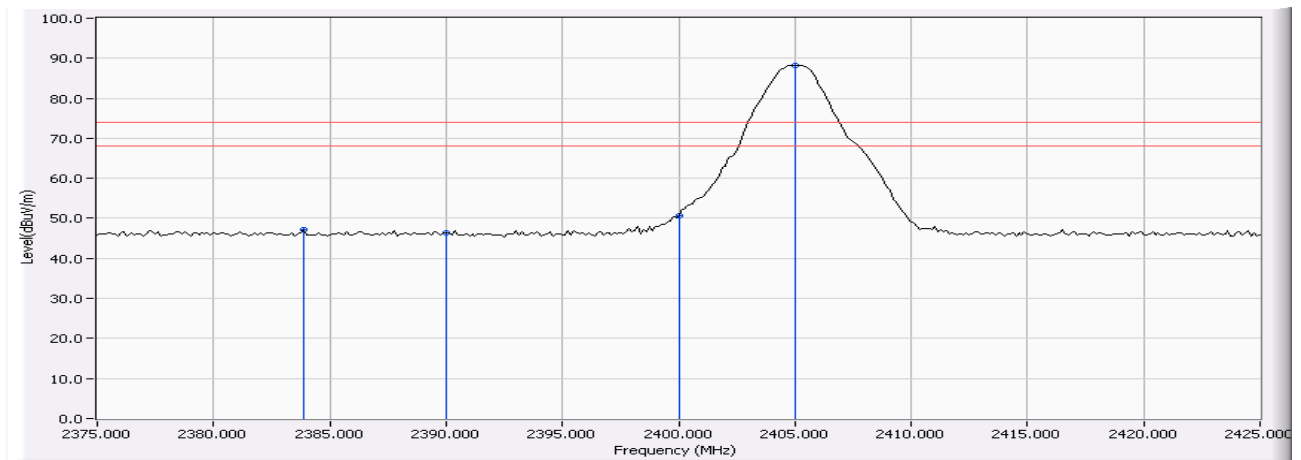

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Product : Wireless Headphone
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
2 (Vertical)	<2400	>20	Pass

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
2 (Peak)	2384.625	-1.424	49.090	47.667	74.00	54.00	Pass
2 (Average)	--	--	--	--	74.00	54.00	Pass

Figure Channel 2: Vertical (Peak)

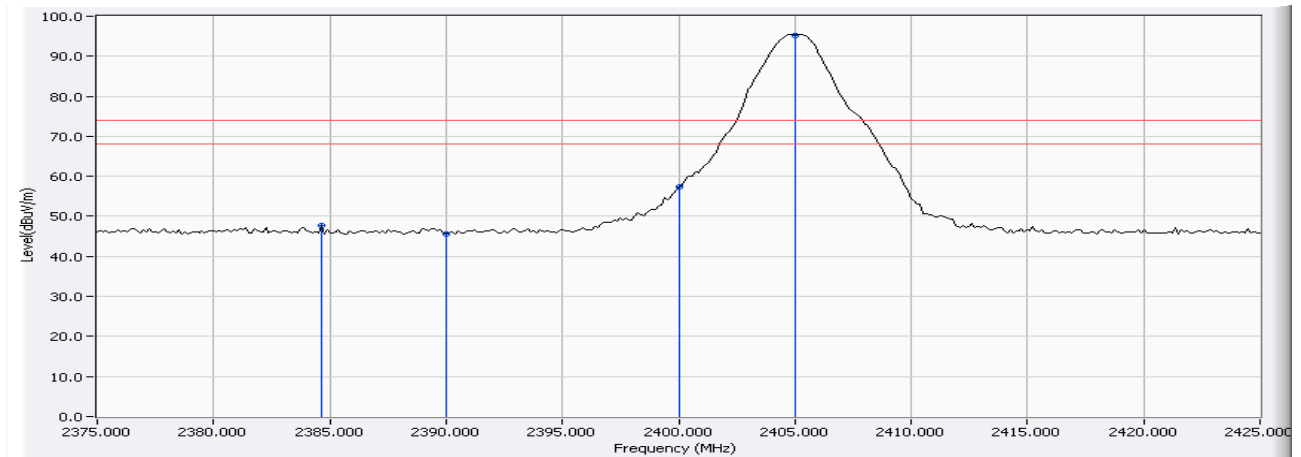

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Product : Wireless Headphone
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
39 (Horizontal)	>2483.5	>20	Pass

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39(Peak)	2483.750	-1.036	51.101	50.065	74.00	54.00	Pass
39(Average)	--	--	--	--	74.00	54.00	Pass

Figure Channel 39: Horizontal (Peak)

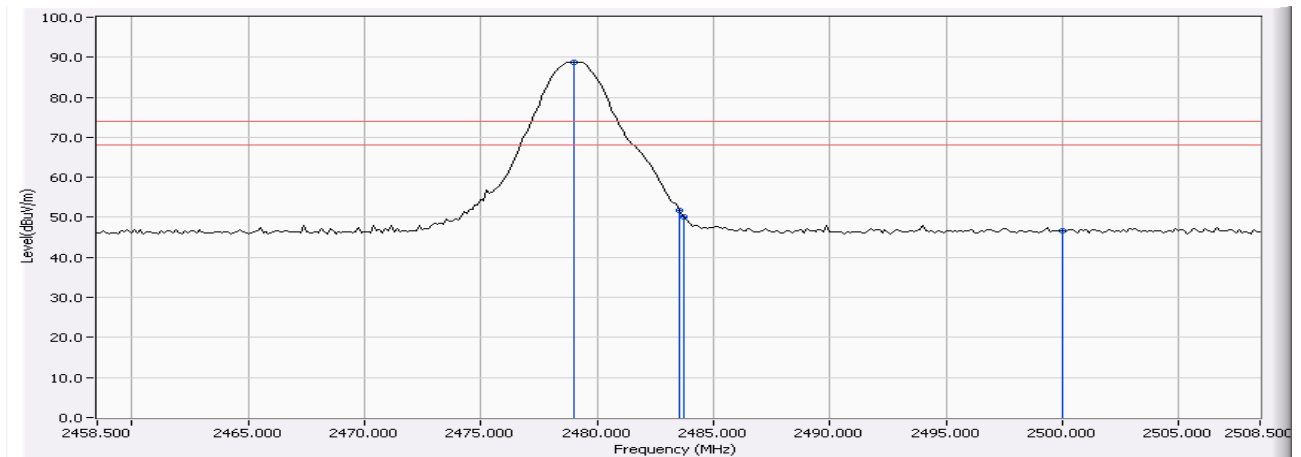

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Product : Wireless Headphone
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter


RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
39 (Vertical)	>2483.5	>20	Pass

RF Radiated Measurement (Vertical):


Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39(Peak)	2483.750	-1.036	56.784	55.748	74.00	54.00	Pass
39(Average)	2483.750	-1.036	50.213	49.177	74.00	54.00	Pass

Figure Channel 39: Vertical (Peak)

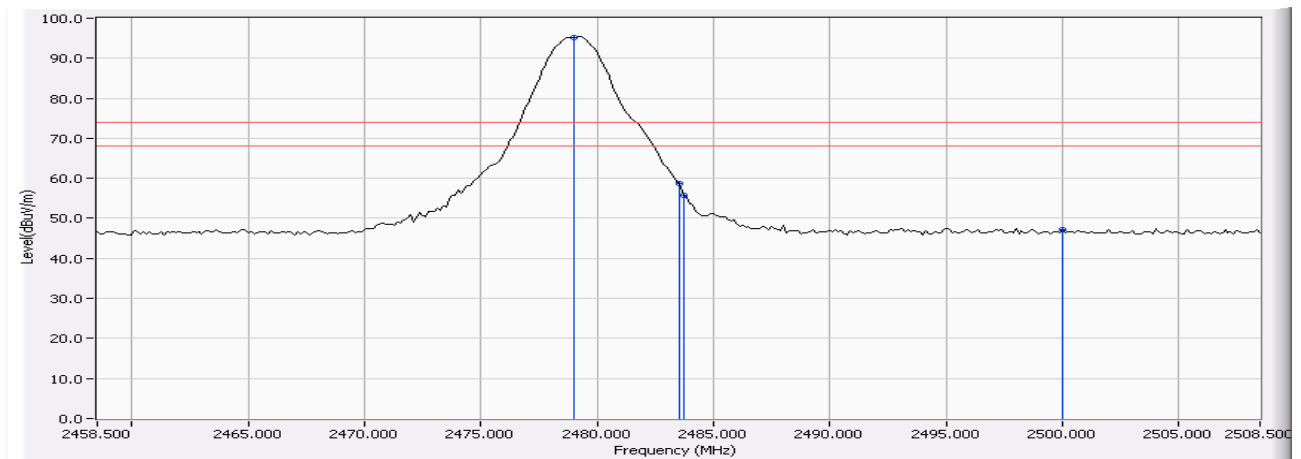

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Figure Channel 39: Vertical (Average)

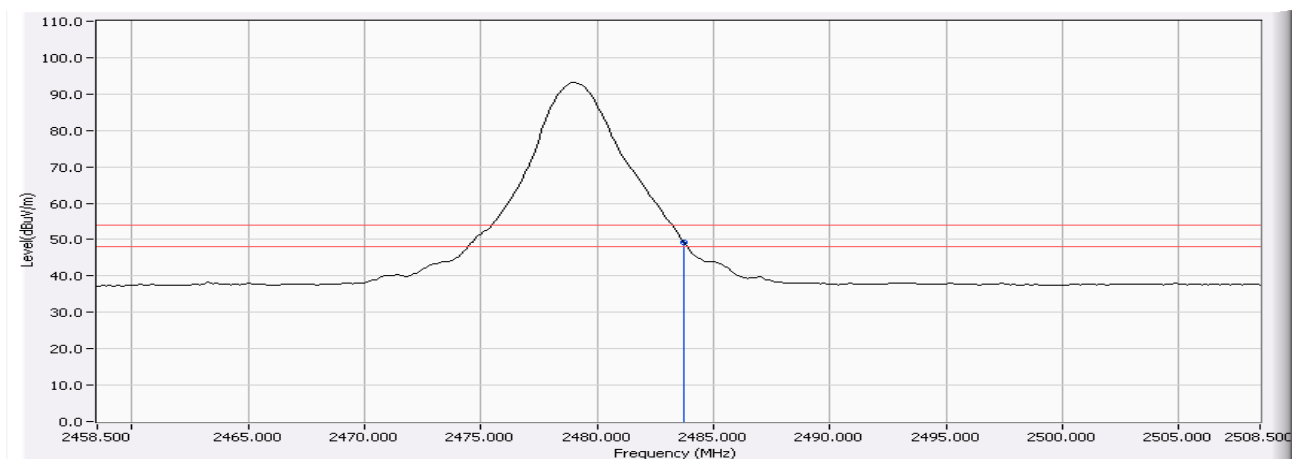

Note: RBW=1MHz, VBW=1MHz, Sweep=500ms

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.


6. Occupied Bandwidth

6.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R & S	FSP40 / 100170	Nov., 2006

- Note: 1. All equipments are calibrated every one year.
 2. The test instruments Marked "X" are used to measure the final test results.

6.2. Test Setup

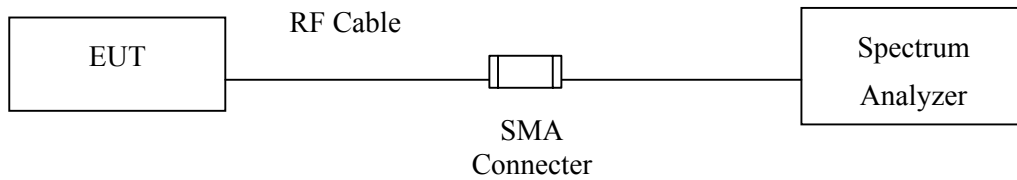

6.3. Limits

N/A

6.4. Uncertainty


± 150Hz

6.5. Test Result of Occupied Bandwidth

Product : Wireless Headphone
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2405MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
2	2405.00	1000	>500	Pass


Figure Channel 2:

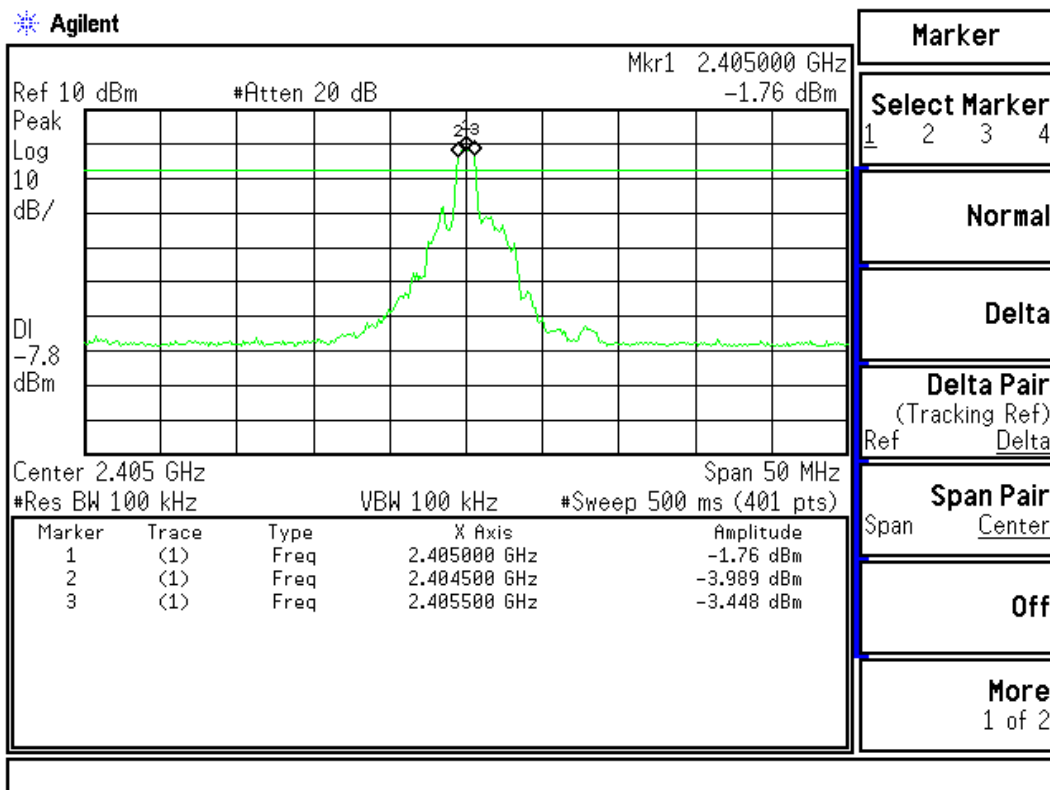

Product : Wireless Headphone
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
20	2441.00	1000	>500	Pass


Figure Channel 20:

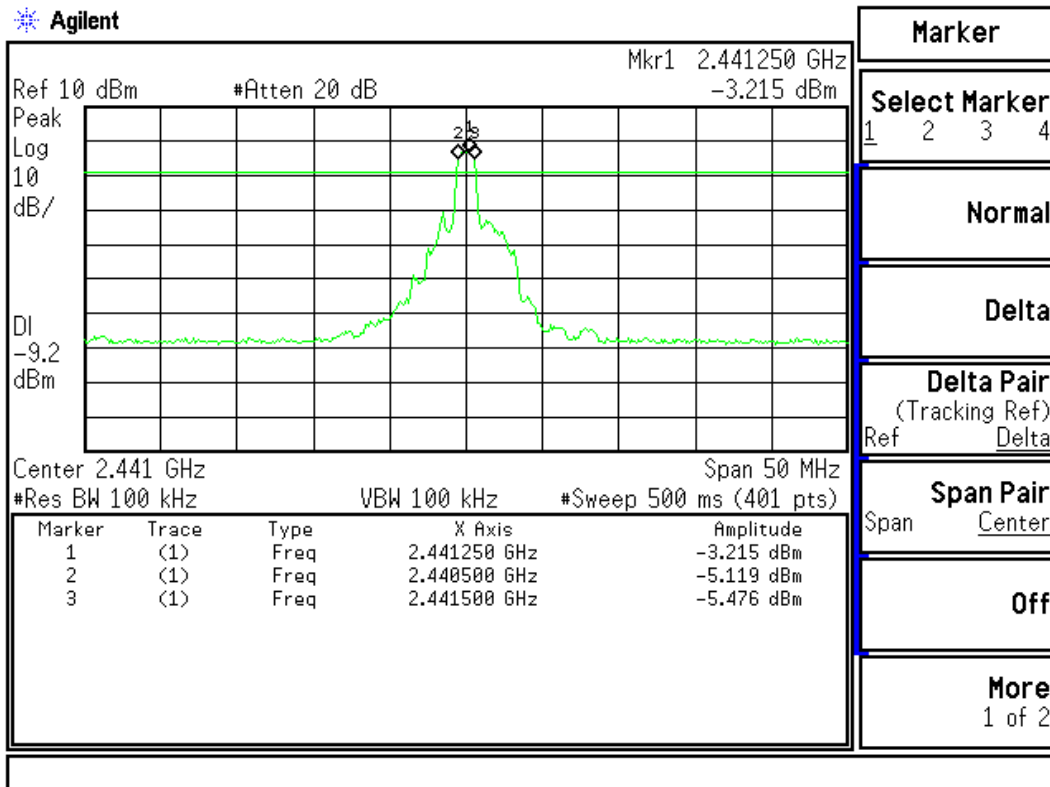

Product : Wireless Headphone
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2479MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2479.00	1000	>500	Pass

Figure Channel 39:

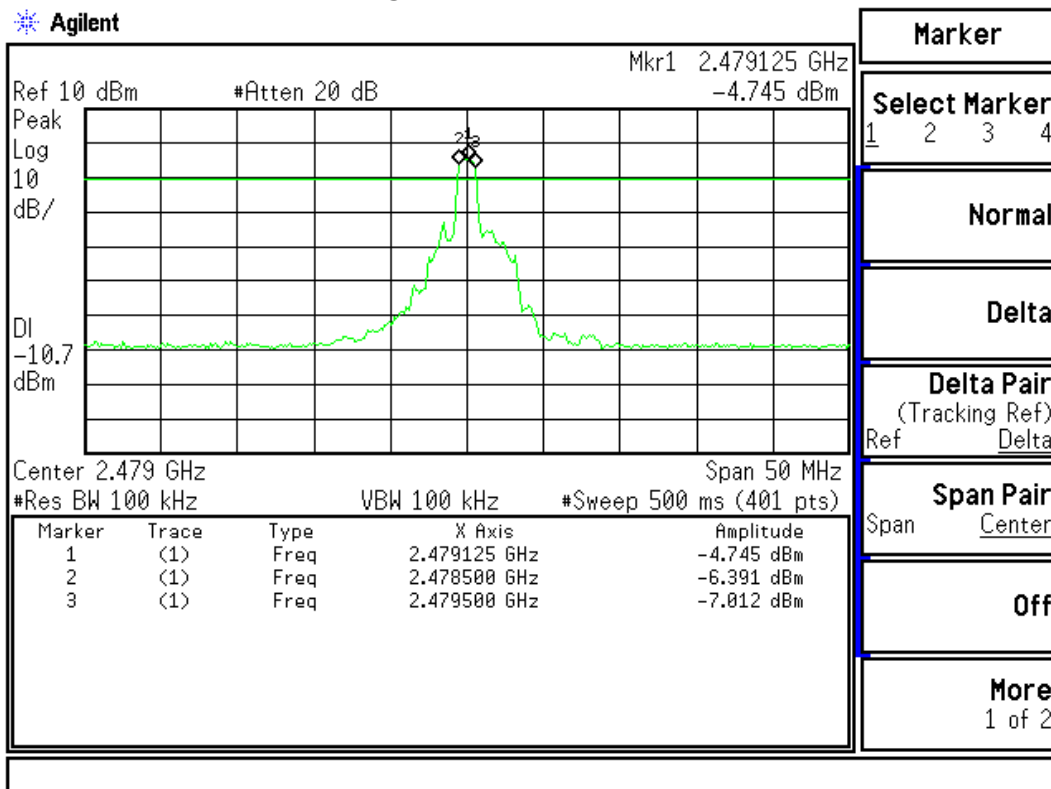

7. Power Density


7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R & S	FSP40 / 100170	Nov., 2006

- Note:
1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

7.2. Test Setup

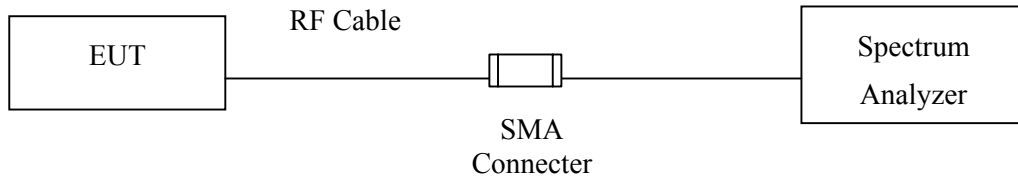

7.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

7.4. Uncertainty


± 1.27 dB

7.5. Test Result of Power Density

Product : Wireless Headphone
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2405MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
2	2405.00	-12.85	< 8dBm	Pass


Figure Channel 2:

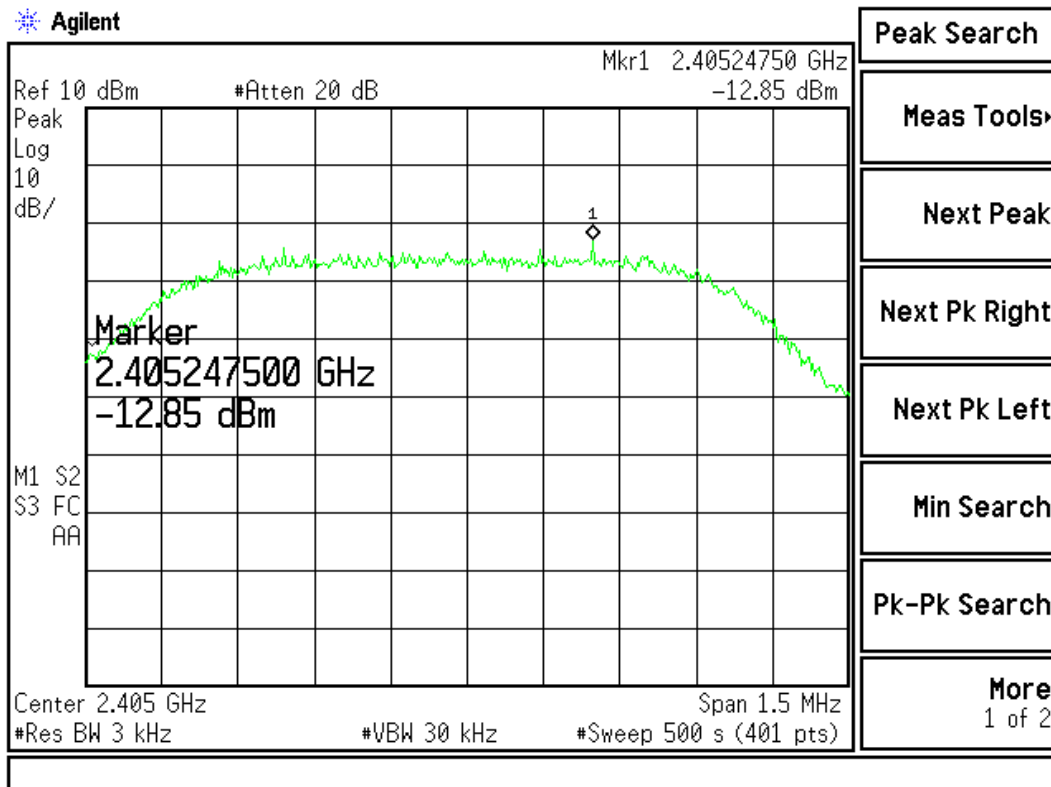

Product : Wireless Headphone
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmitter (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
20	2441.000	-15.3	< 8dBm	Pass


Figure Channel 20:

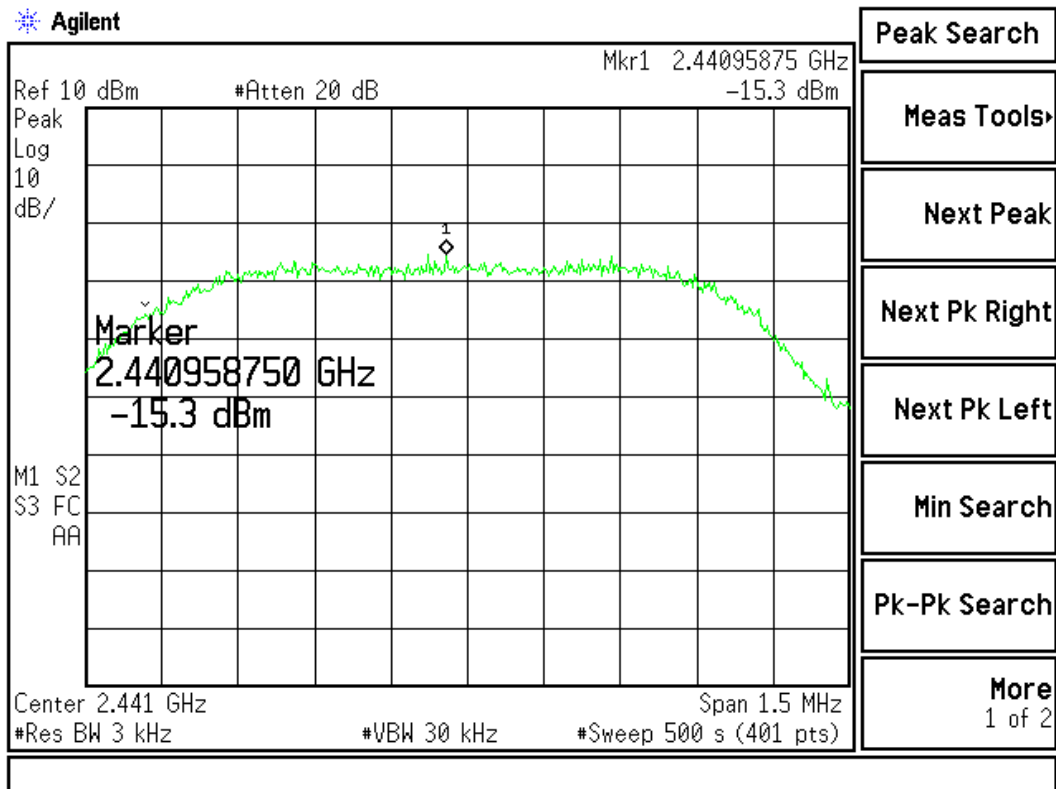

Product : Wireless Headphone
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2479MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2479.00	-17.37	< 8dBm	Pass

Figure Channel 39:

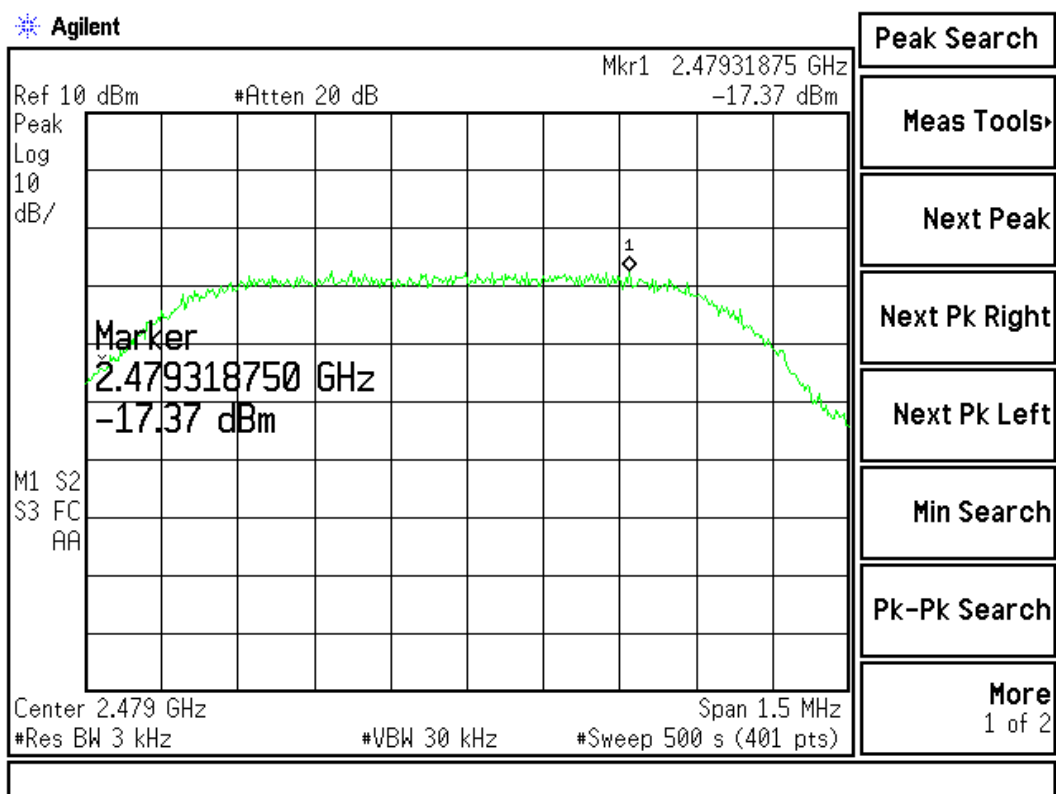

8. EMI Reduction Method During Compliance Testing

No modification was made during testing.