



99 % Occupied Bandwidth

11ax-40(OFDMA), 52-tone RU

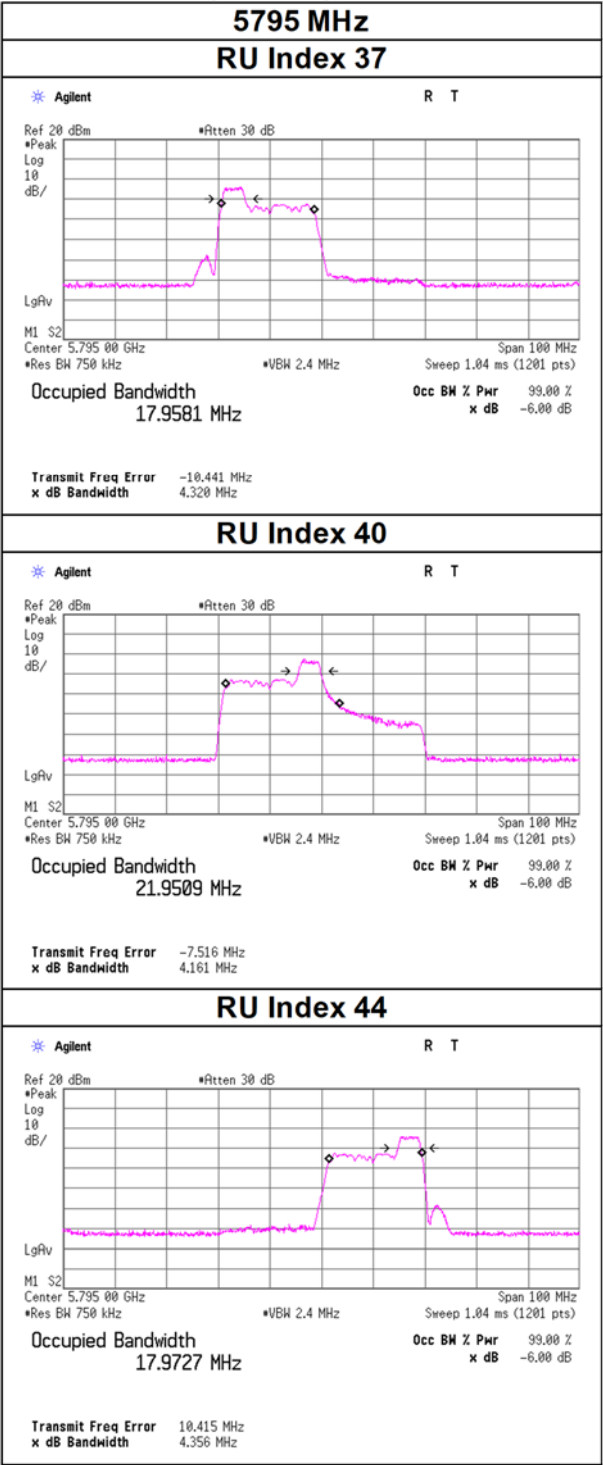


99 % Occupied Bandwidth

11ax-40(OFDMA), 106-tone RU

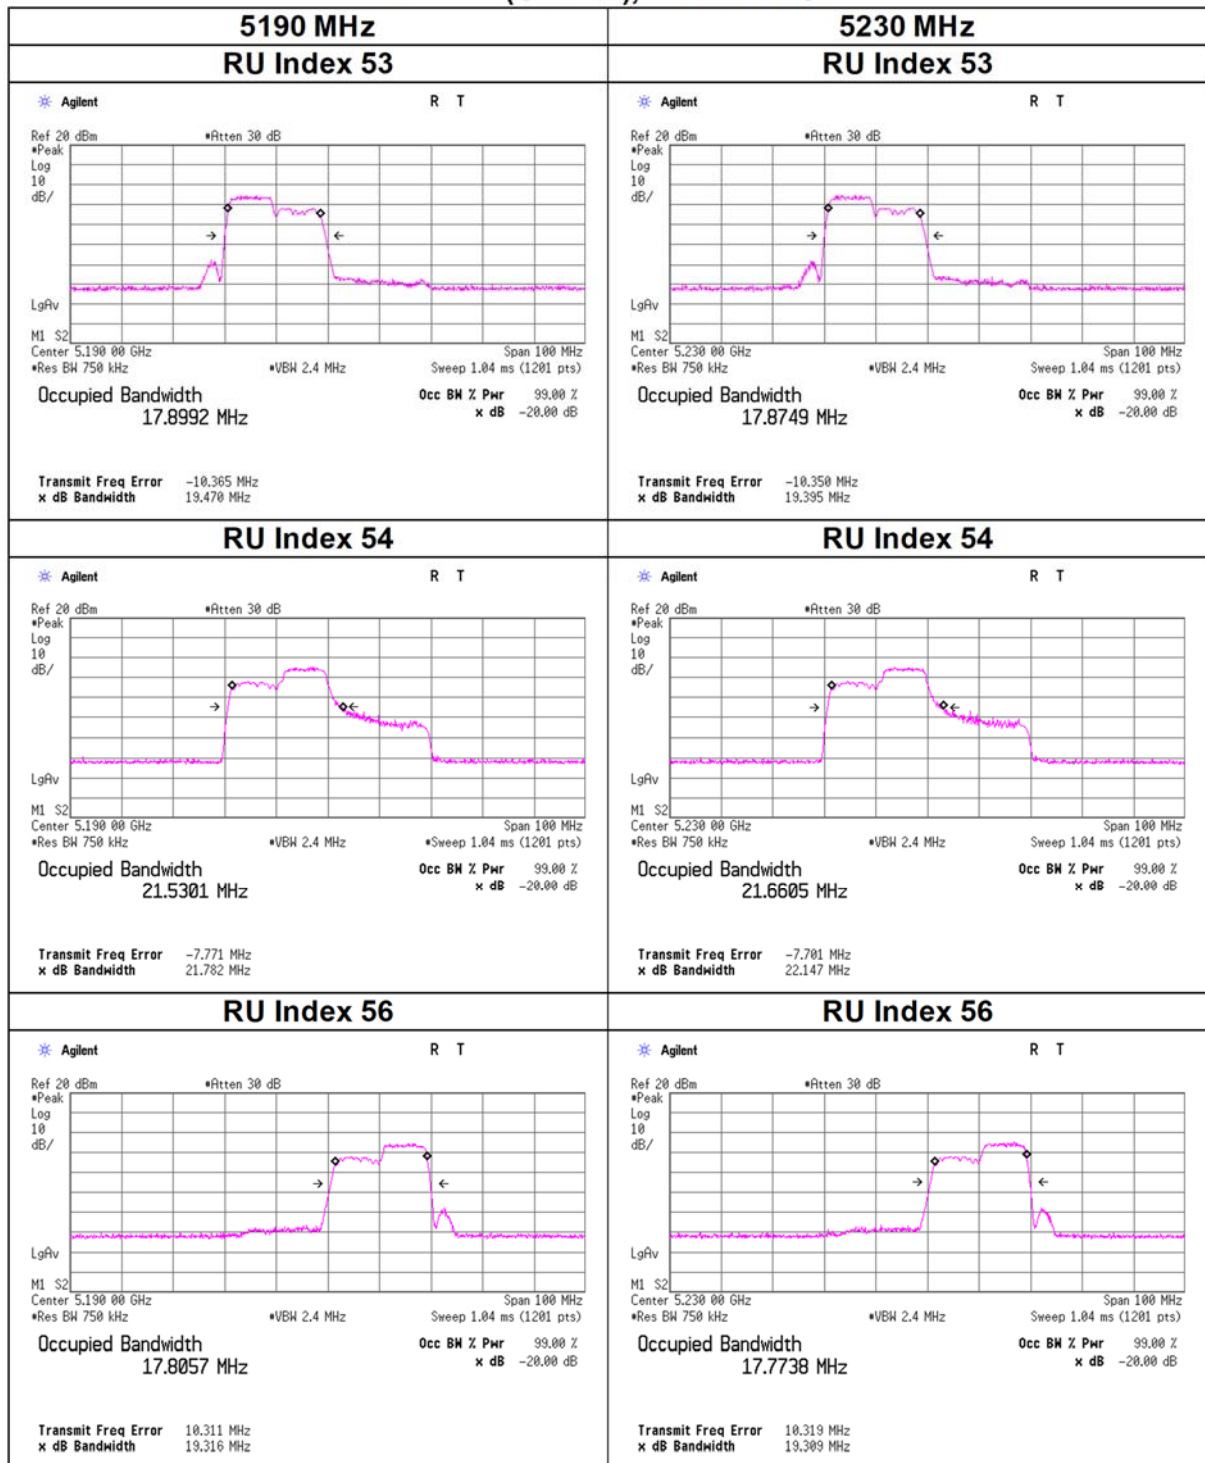


99 % Occupied Bandwidth

11ax-40(OFDMA), 106-tone RU

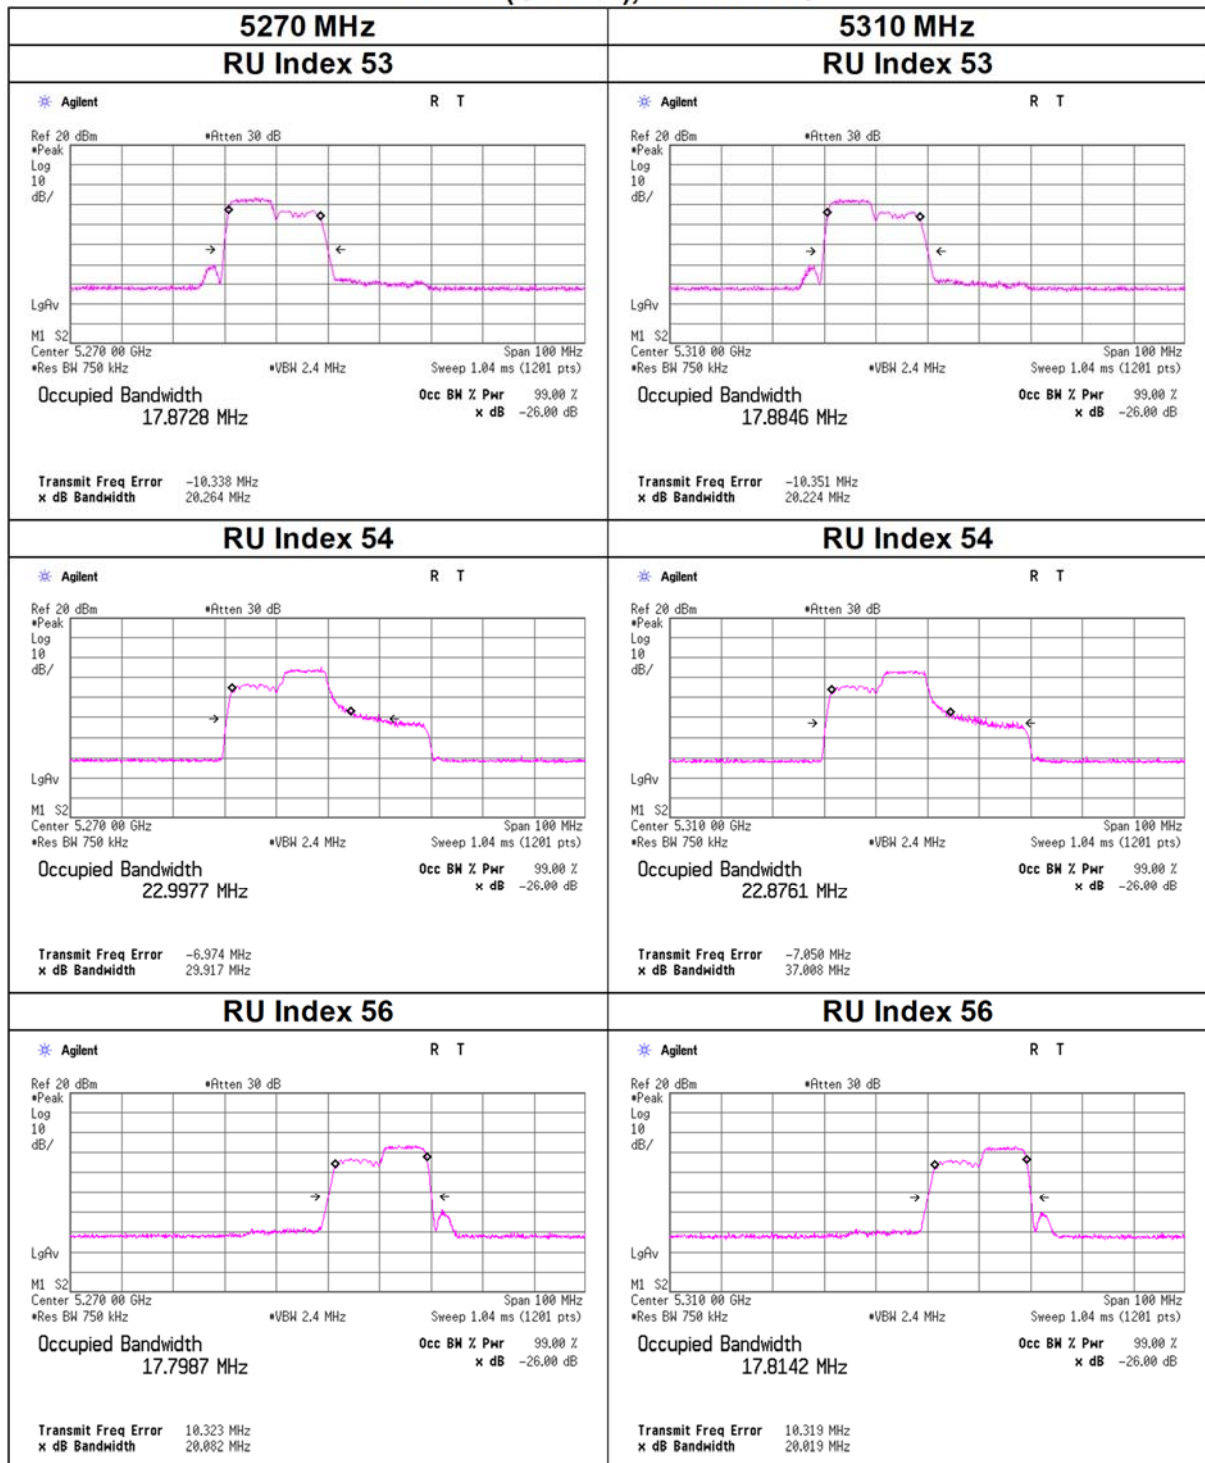


99 % Occupied Bandwidth

11ax-40(OFDMA), 106-tone RU

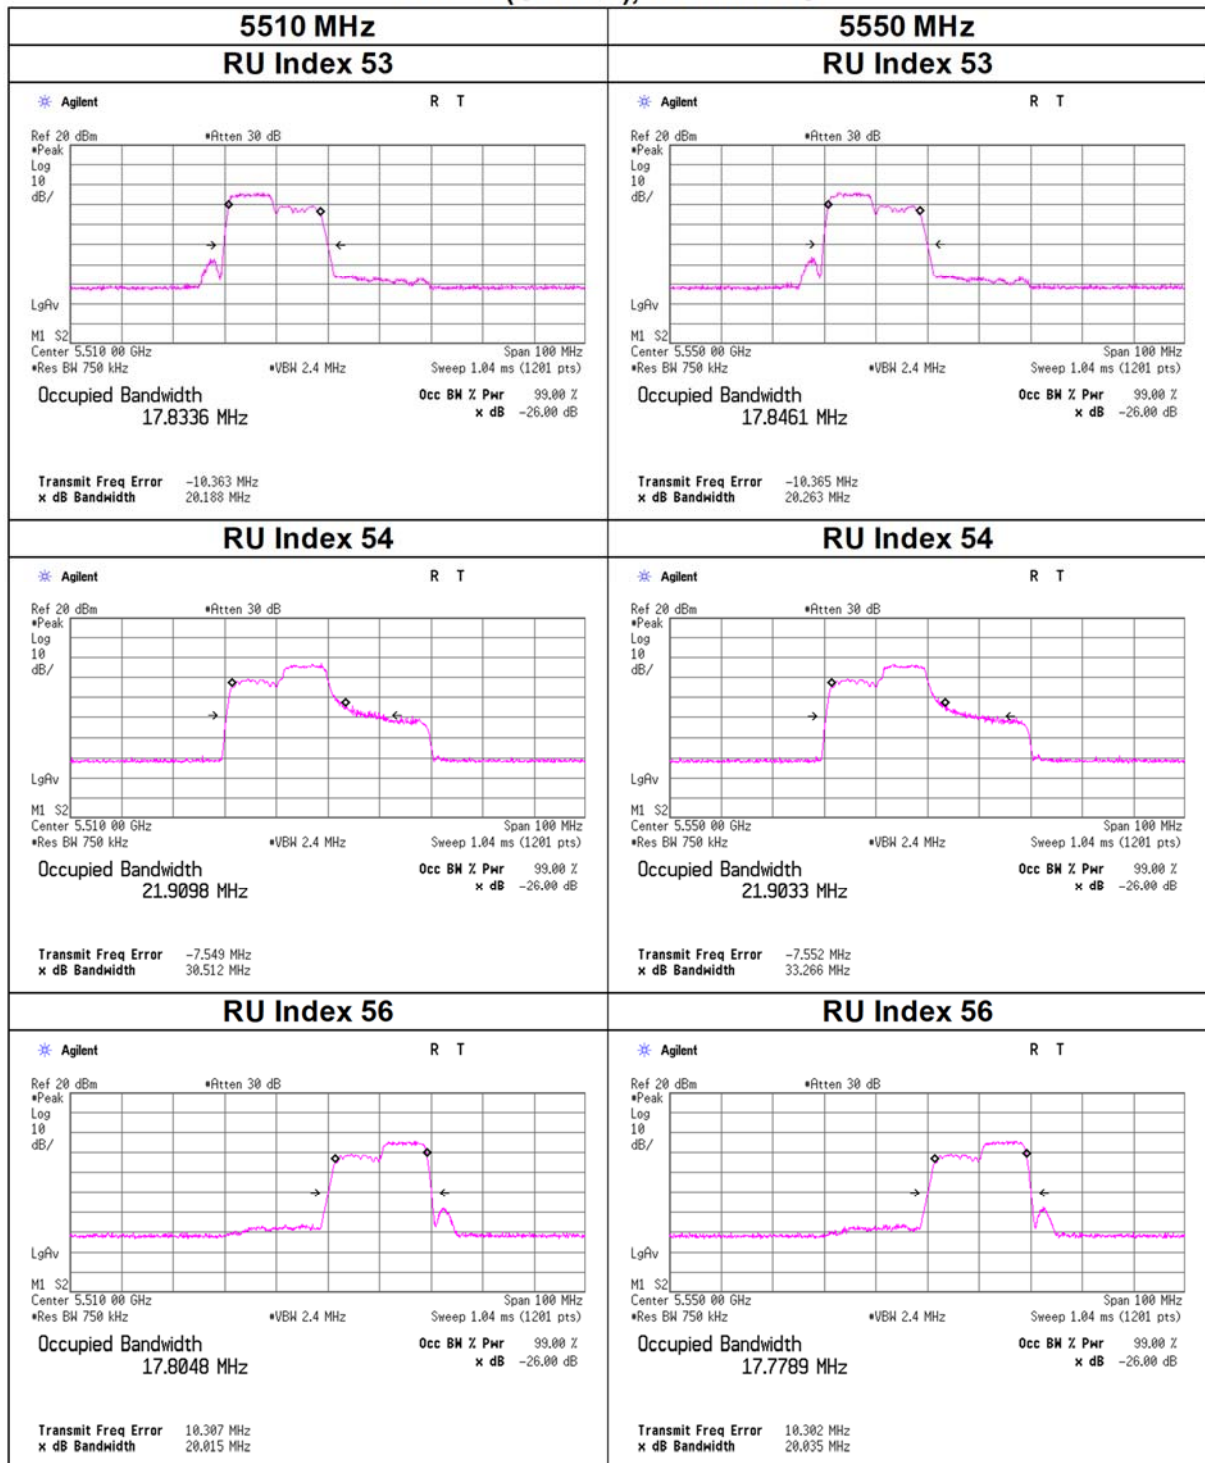


99 % Occupied Bandwidth

11ax-40(OFDMA), 106-tone RU

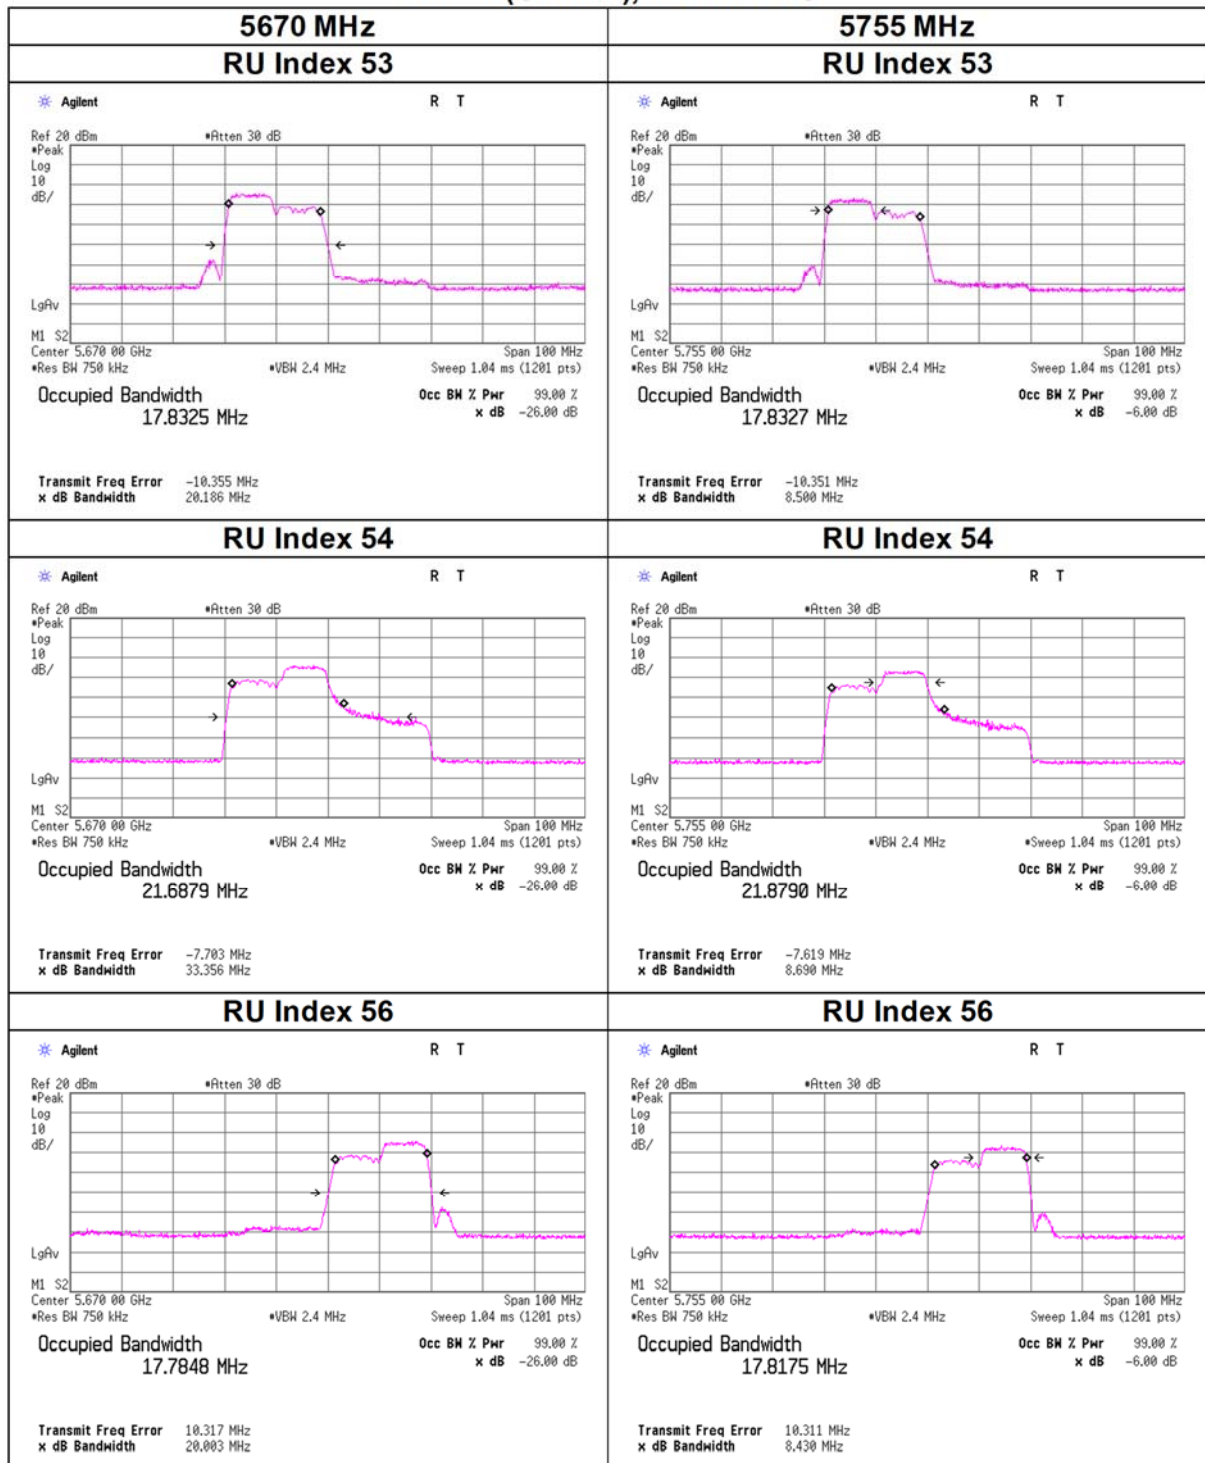


99 % Occupied Bandwidth

11ax-40(OFDMA), 106-tone RU

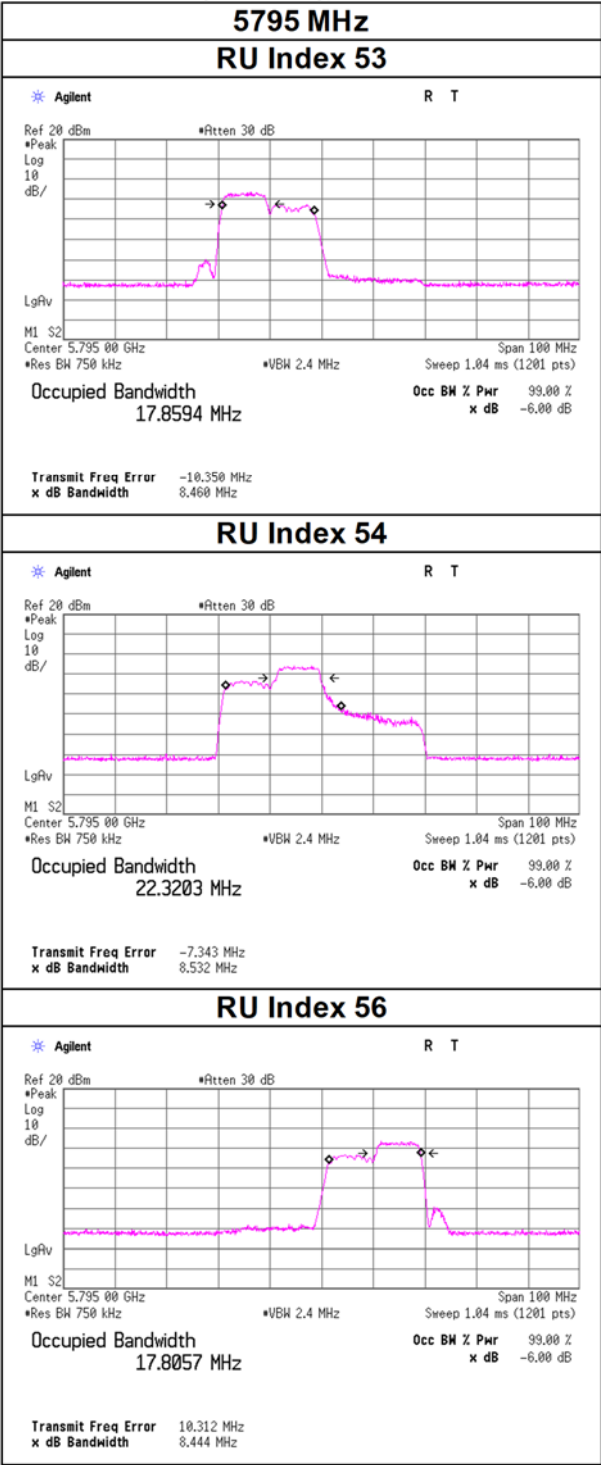


99 % Occupied Bandwidth

11ax-40(OFDMA), 242-tone RU

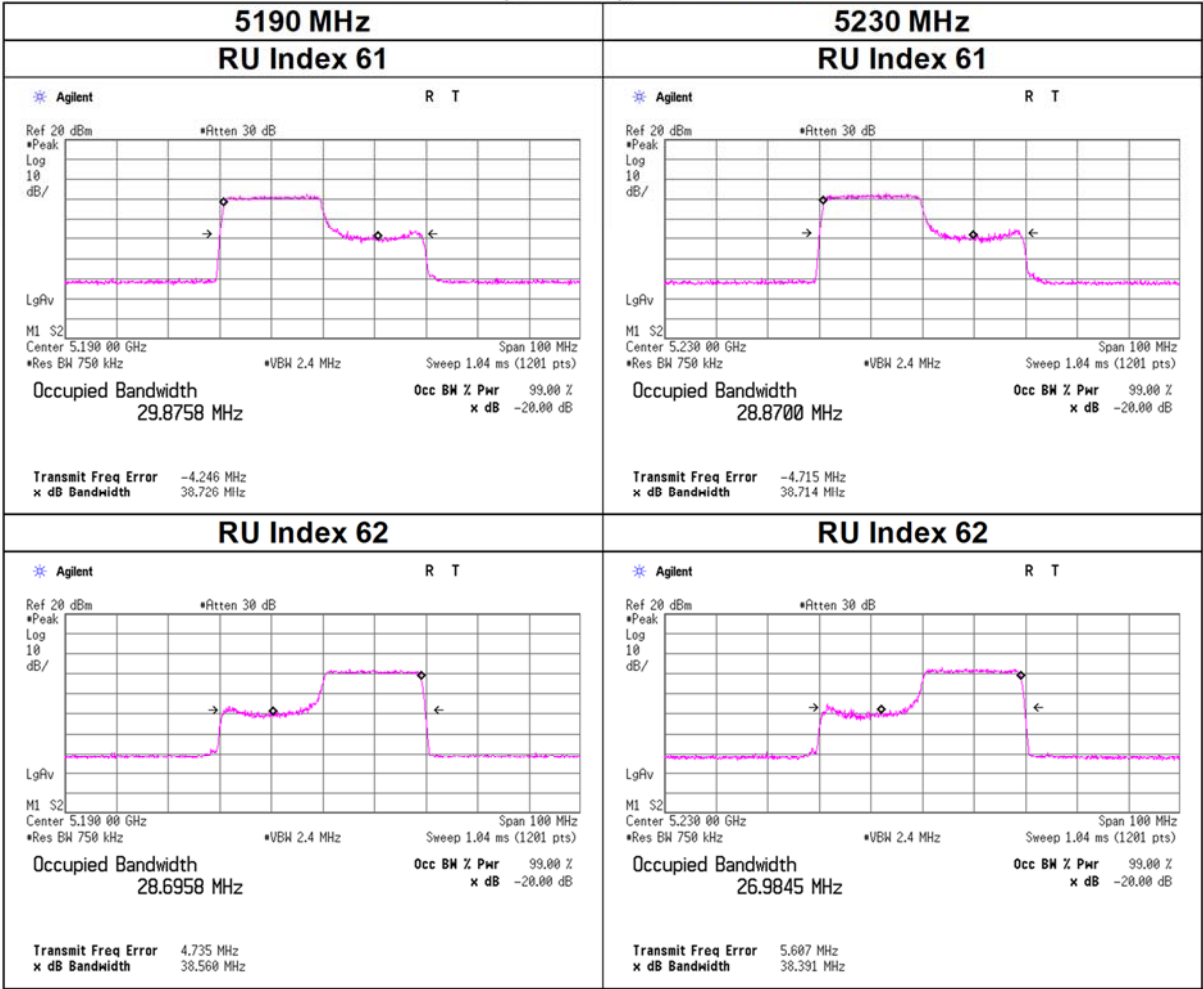


99 % Occupied Bandwidth

11ax-40(OFDMA), 242-tone RU

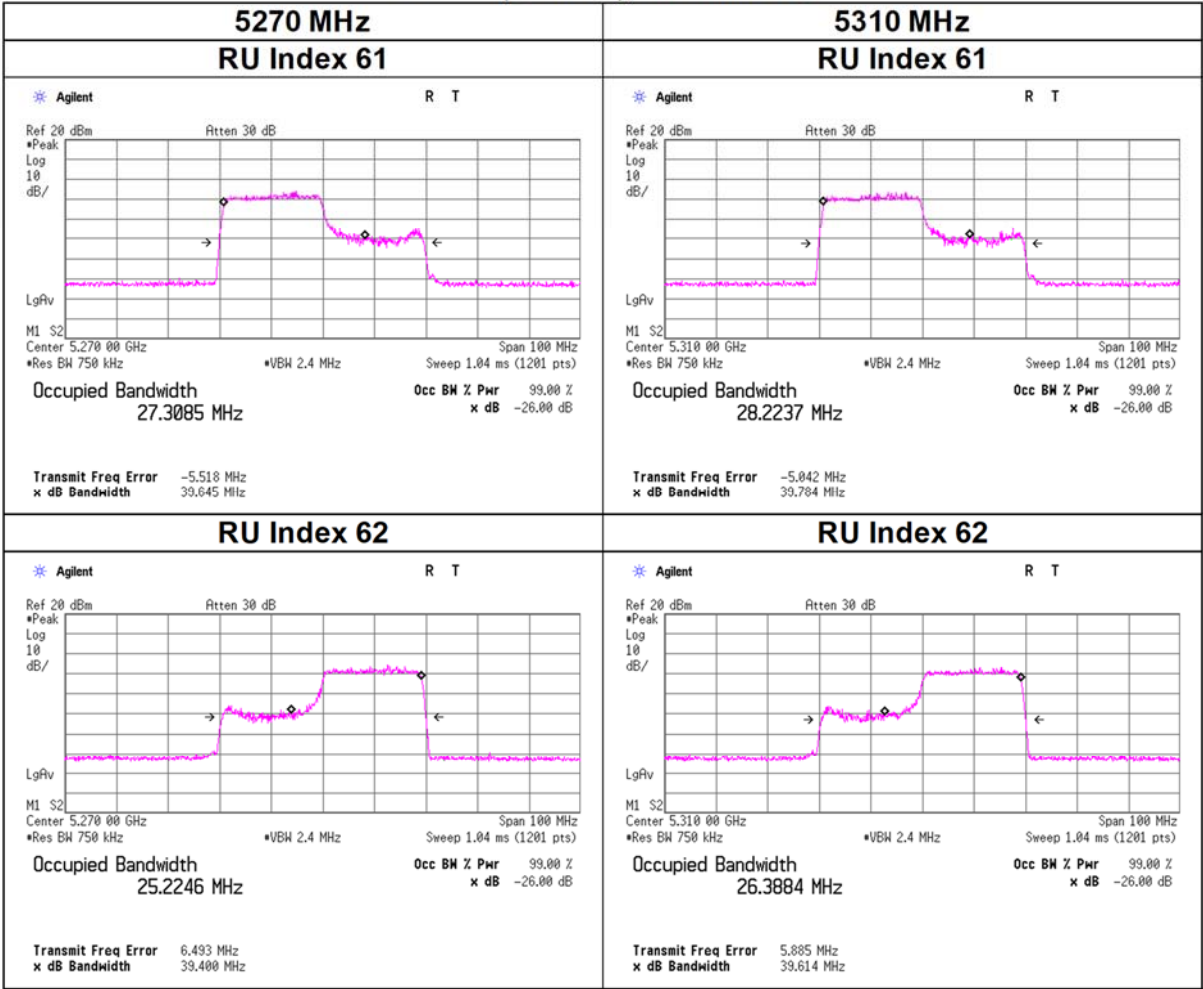


99 % Occupied Bandwidth

11ax-40(OFDMA), 242-tone RU

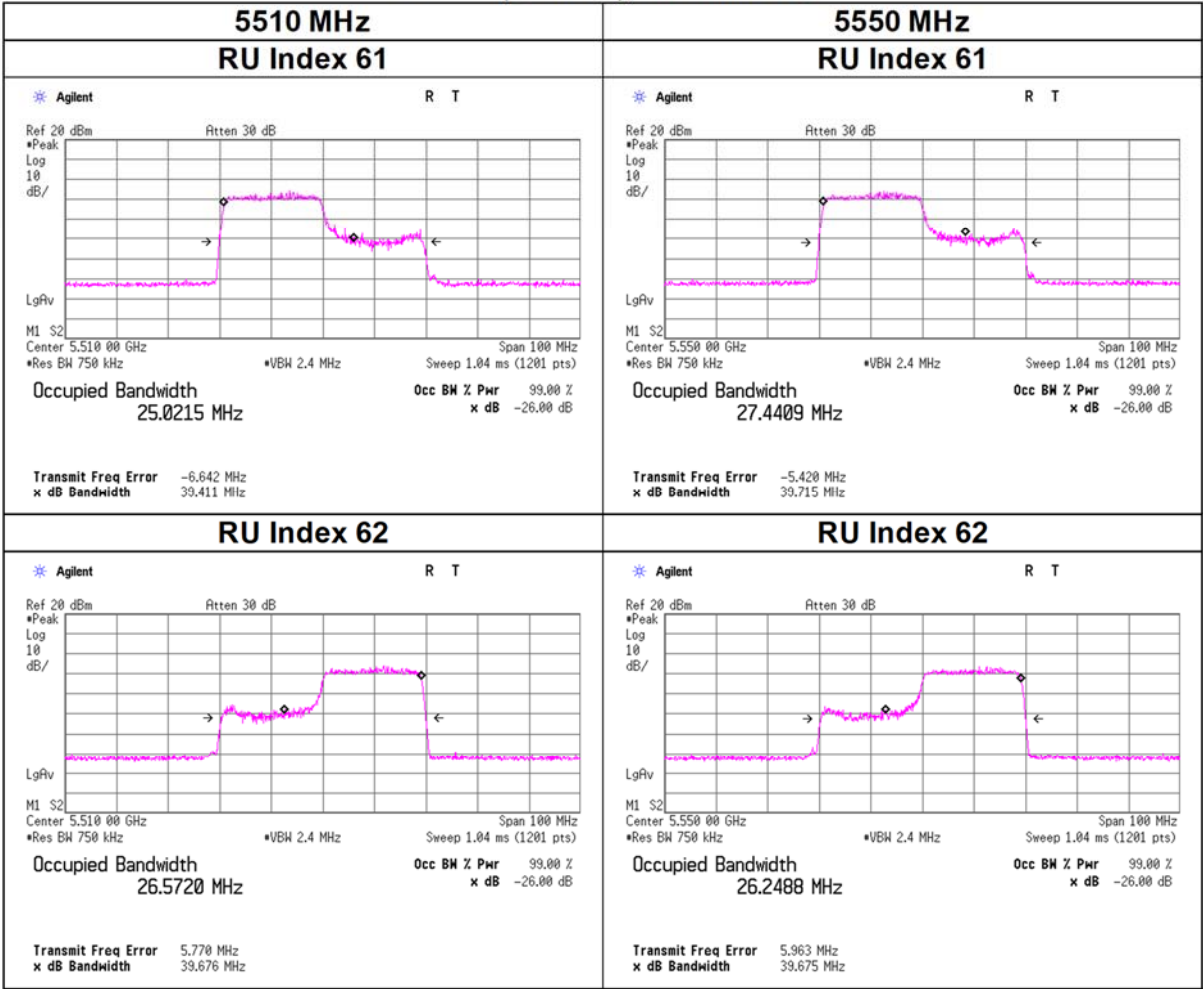


99 % Occupied Bandwidth

11ax-40(OFDMA), 242-tone RU

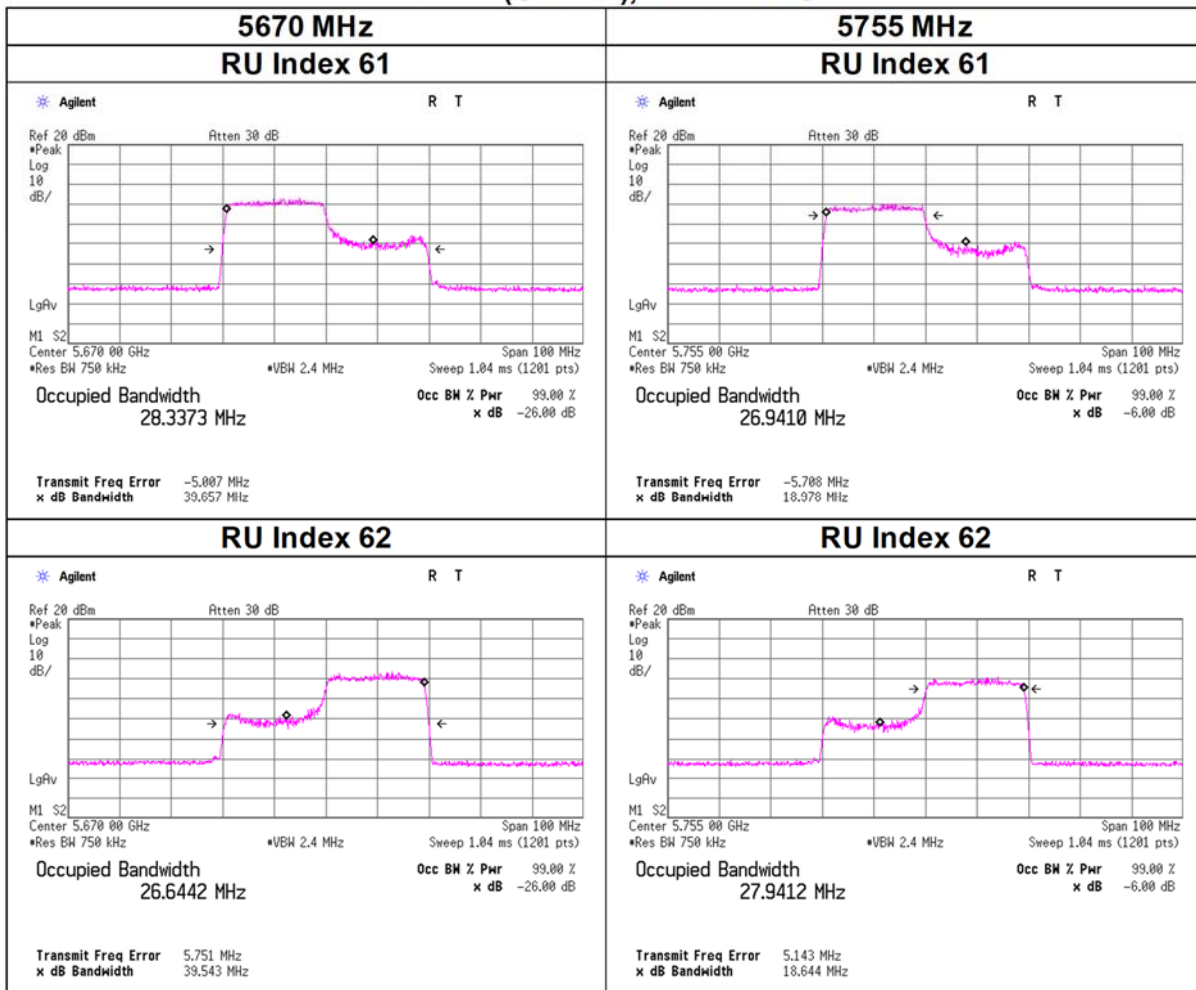


99 % Occupied Bandwidth

11ax-40(OFDMA), 242-tone RU

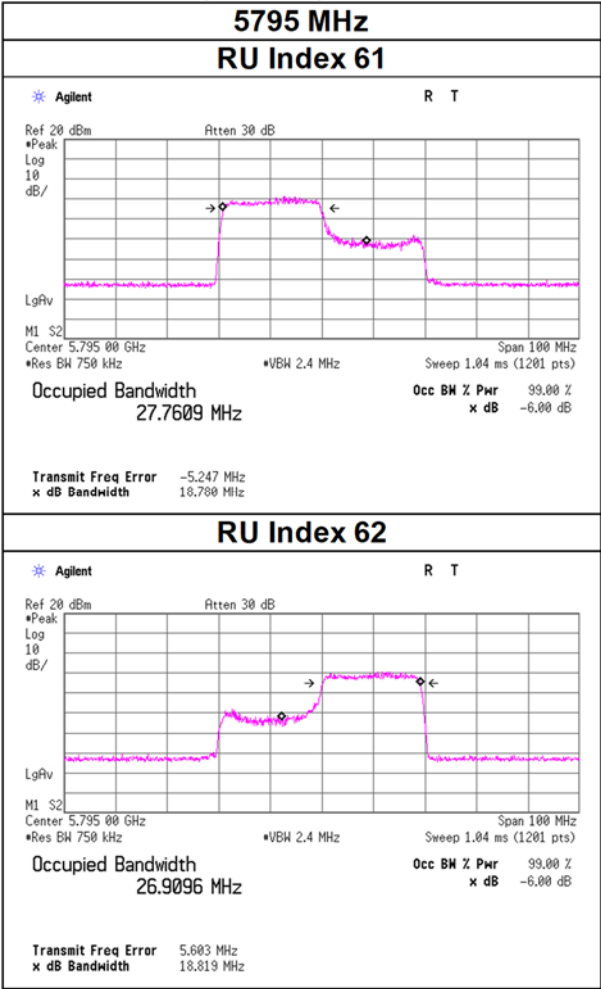


99 % Occupied Bandwidth


11ax-40(OFDMA), 484-tone RU

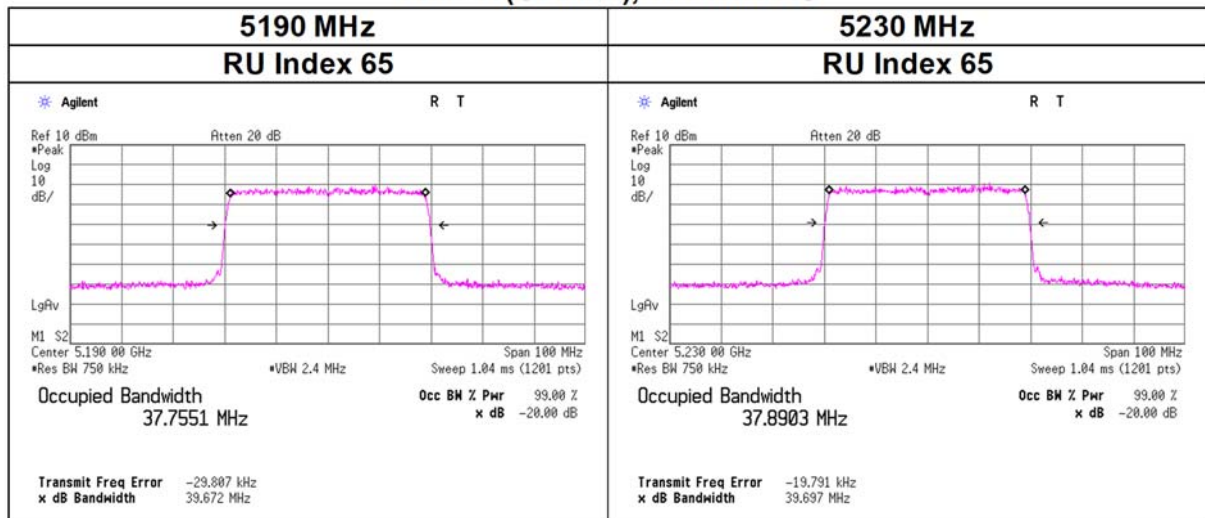

11ax-40(OFDMA), 484-tone RU

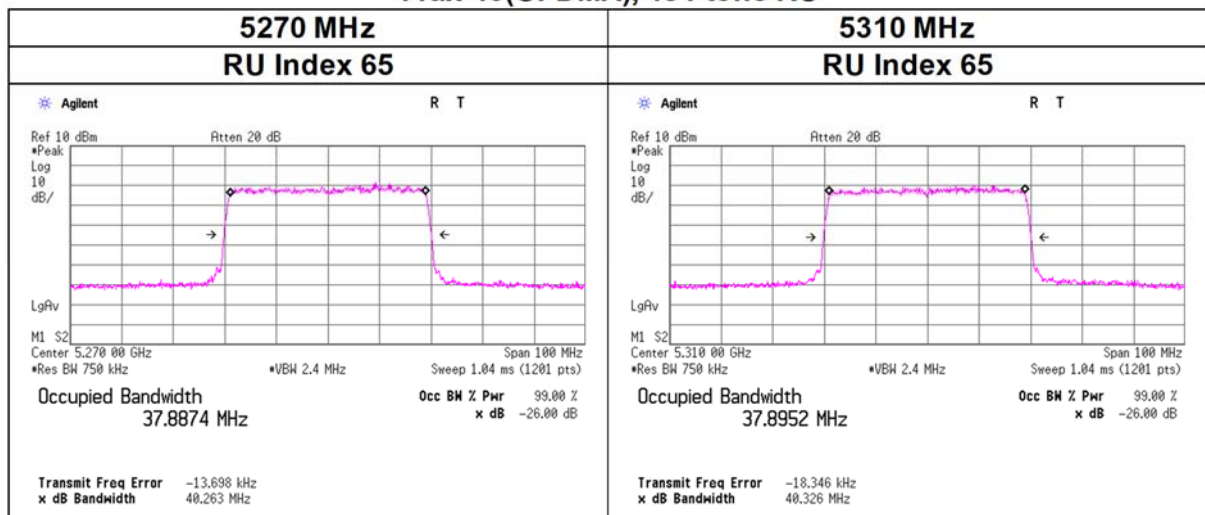

11ax-40(OFDMA), 484-tone RU

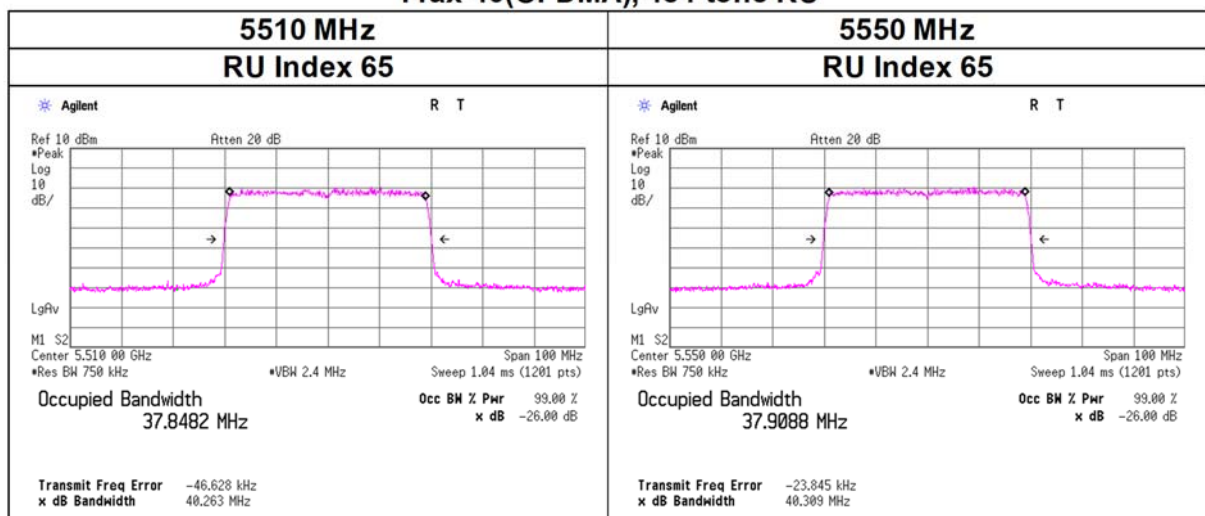


99 % Occupied Bandwidth

11ax-40(OFDMA), 484-tone RU




11ax-40(OFDMA), 484-tone RU

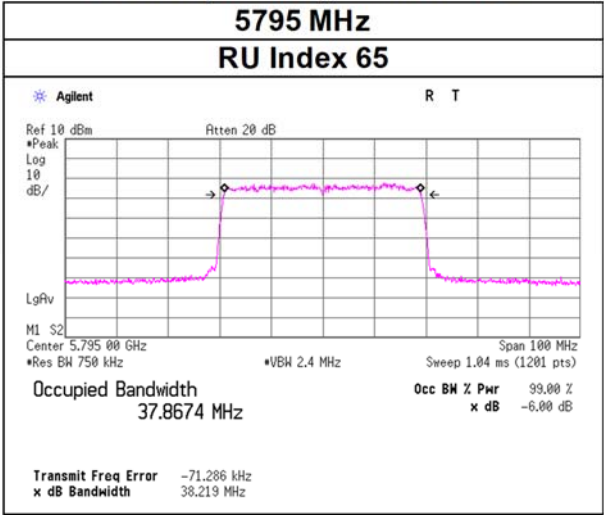


99 % Occupied Bandwidth

11ax-80(OFDMA), 26-tone RU

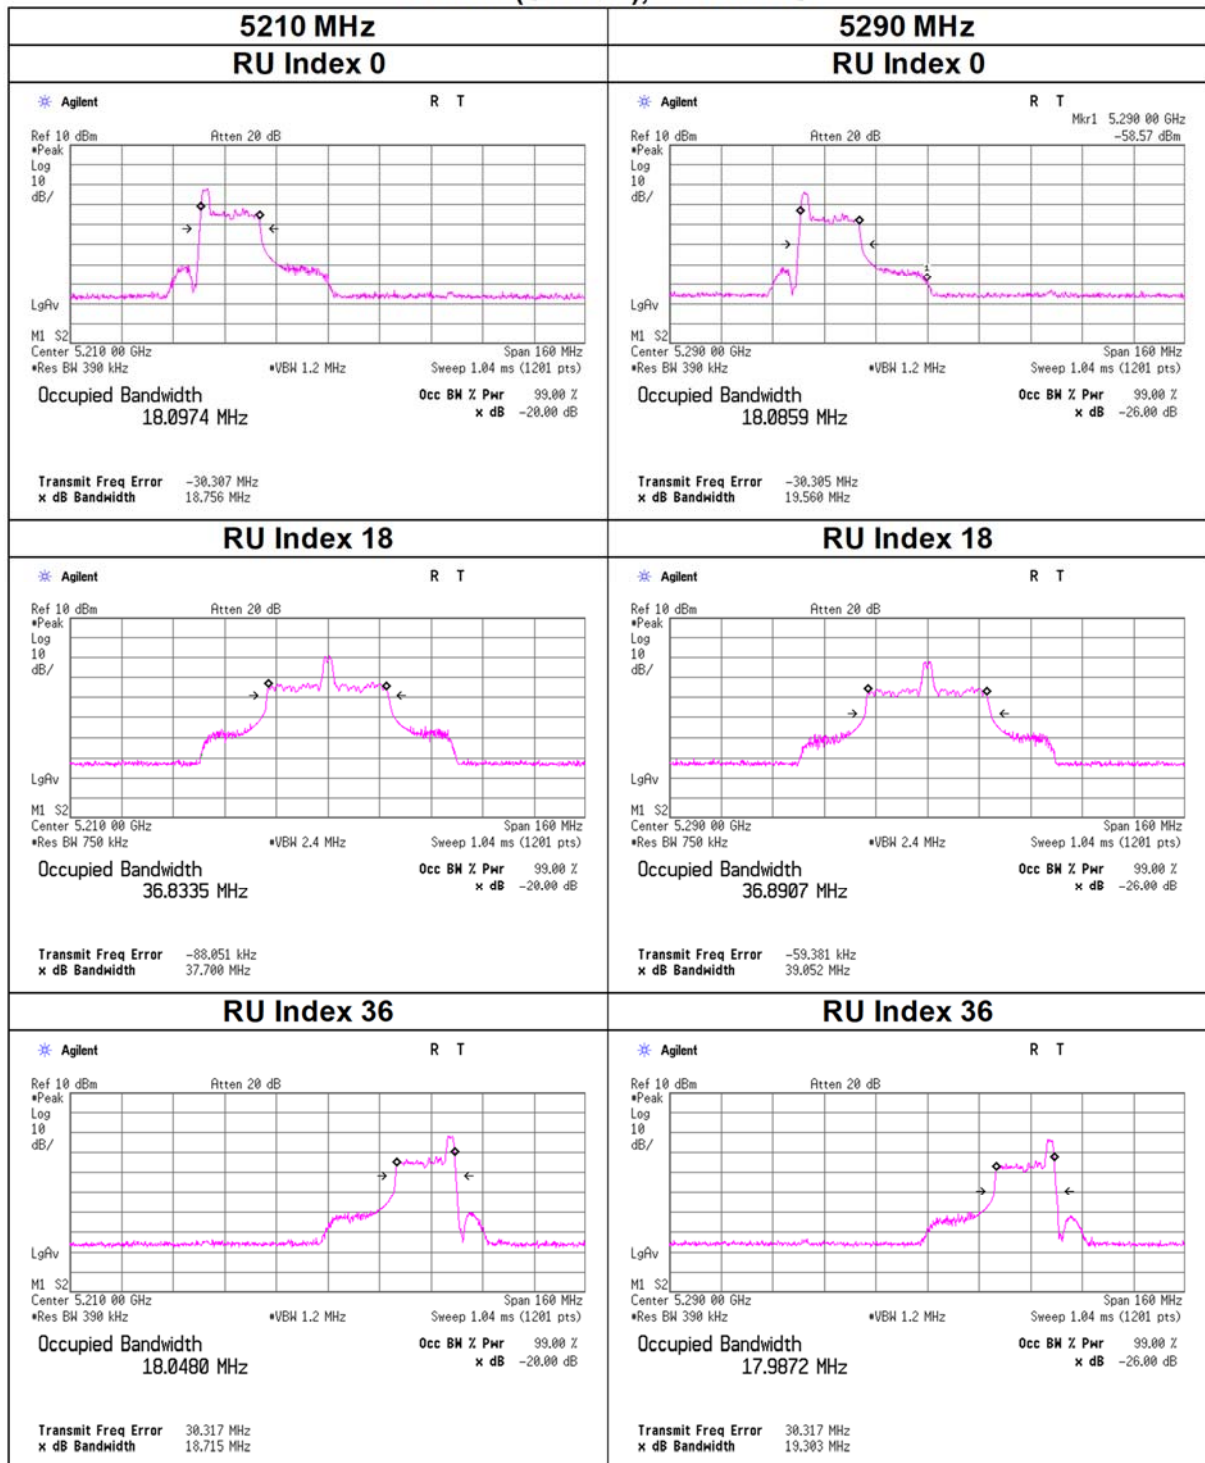


99 % Occupied Bandwidth

11ax-80(OFDMA), 26-tone RU

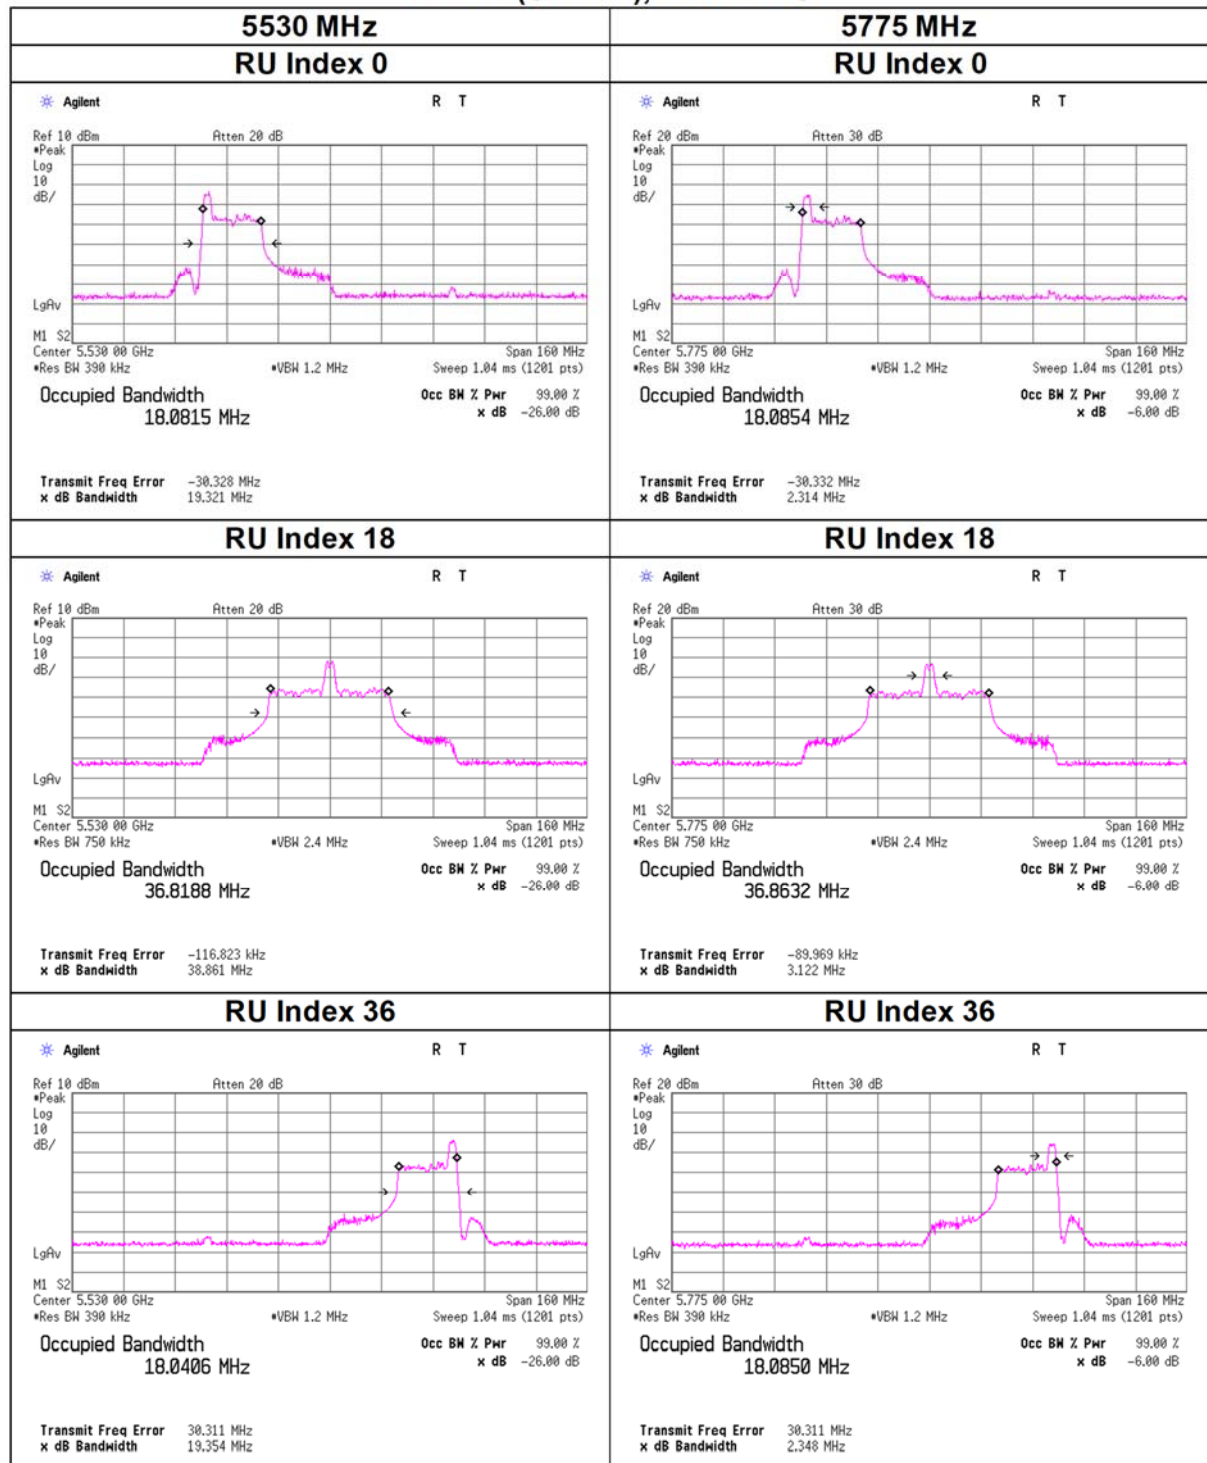


99 % Occupied Bandwidth

11ax-80(OFDMA), 52-tone RU

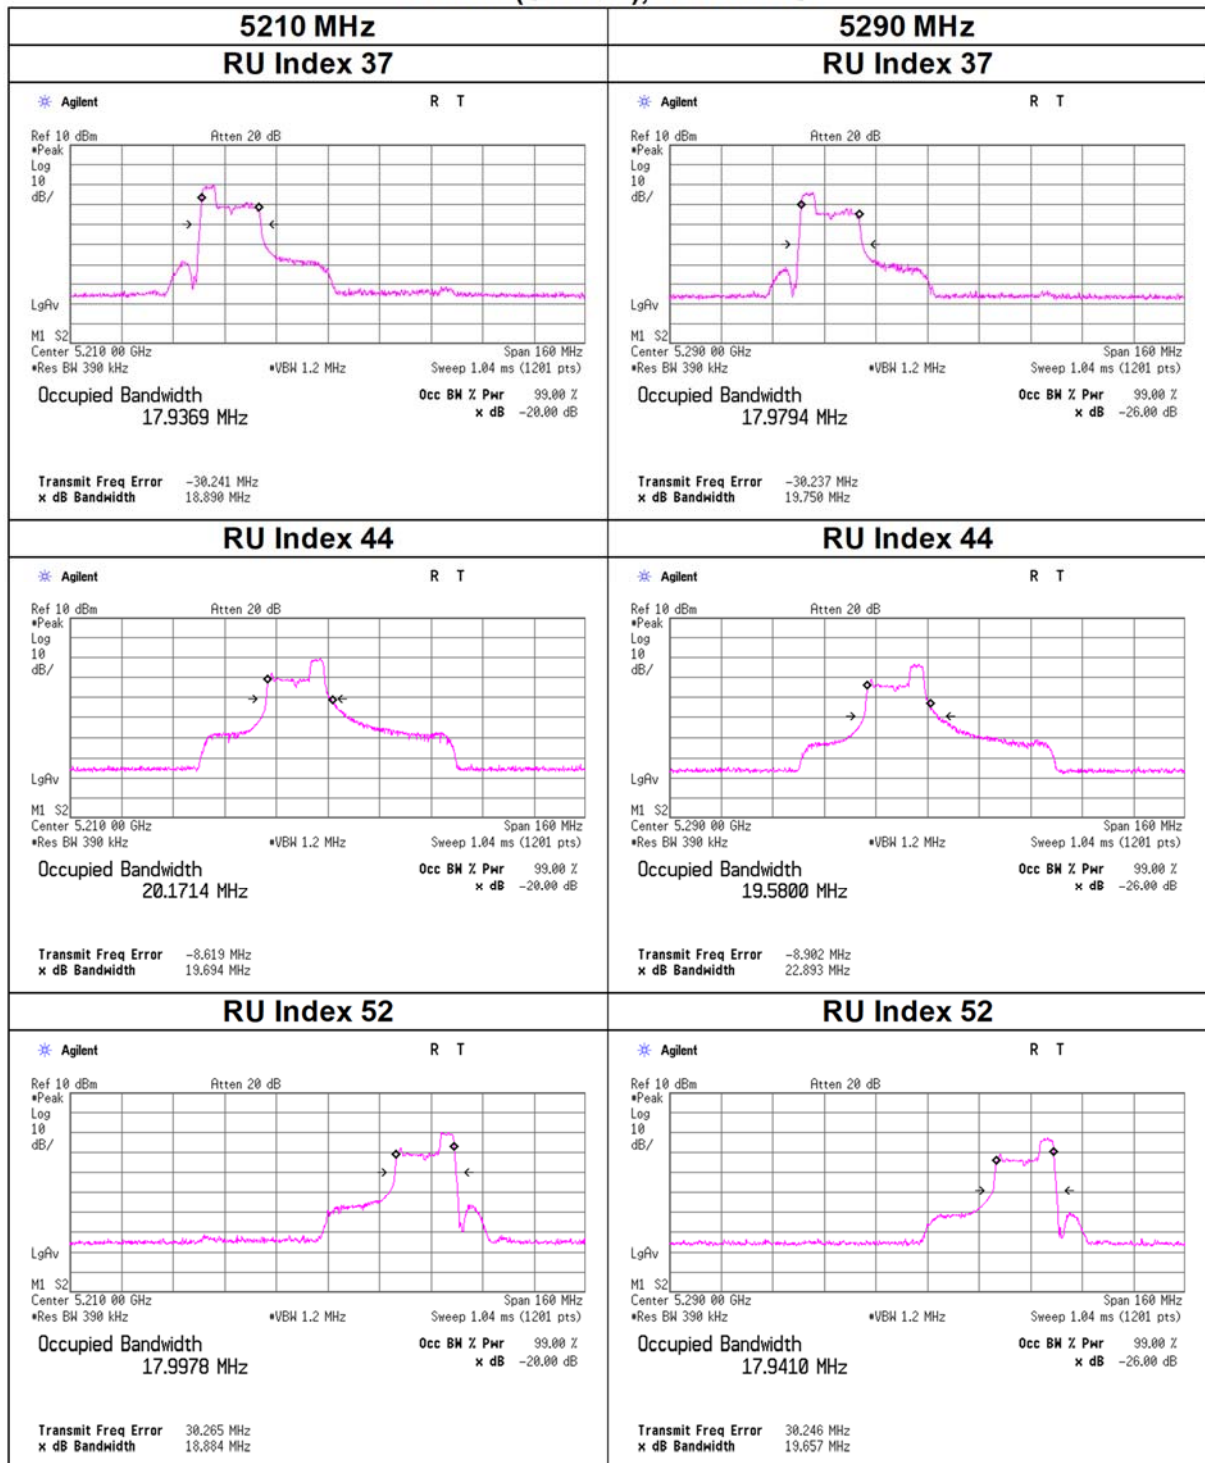


99 % Occupied Bandwidth

11ax-80(OFDMA), 52-tone RU

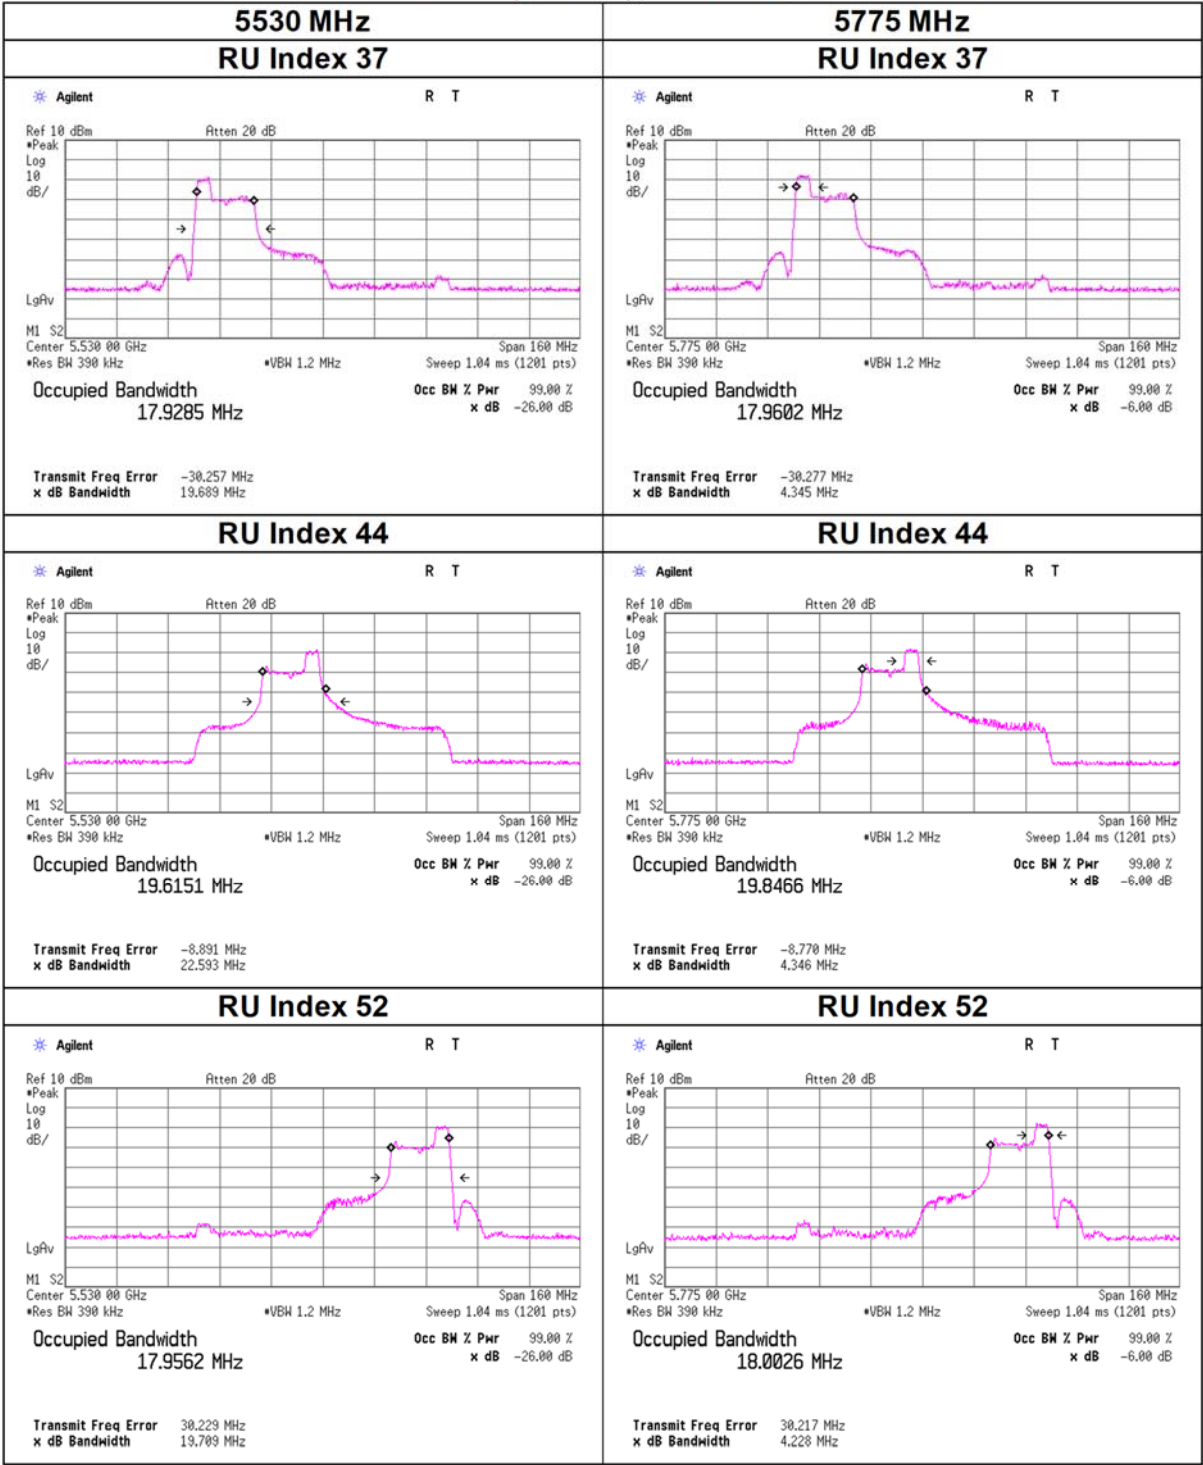


99 % Occupied Bandwidth

11ax-80(OFDMA), 106-tone RU

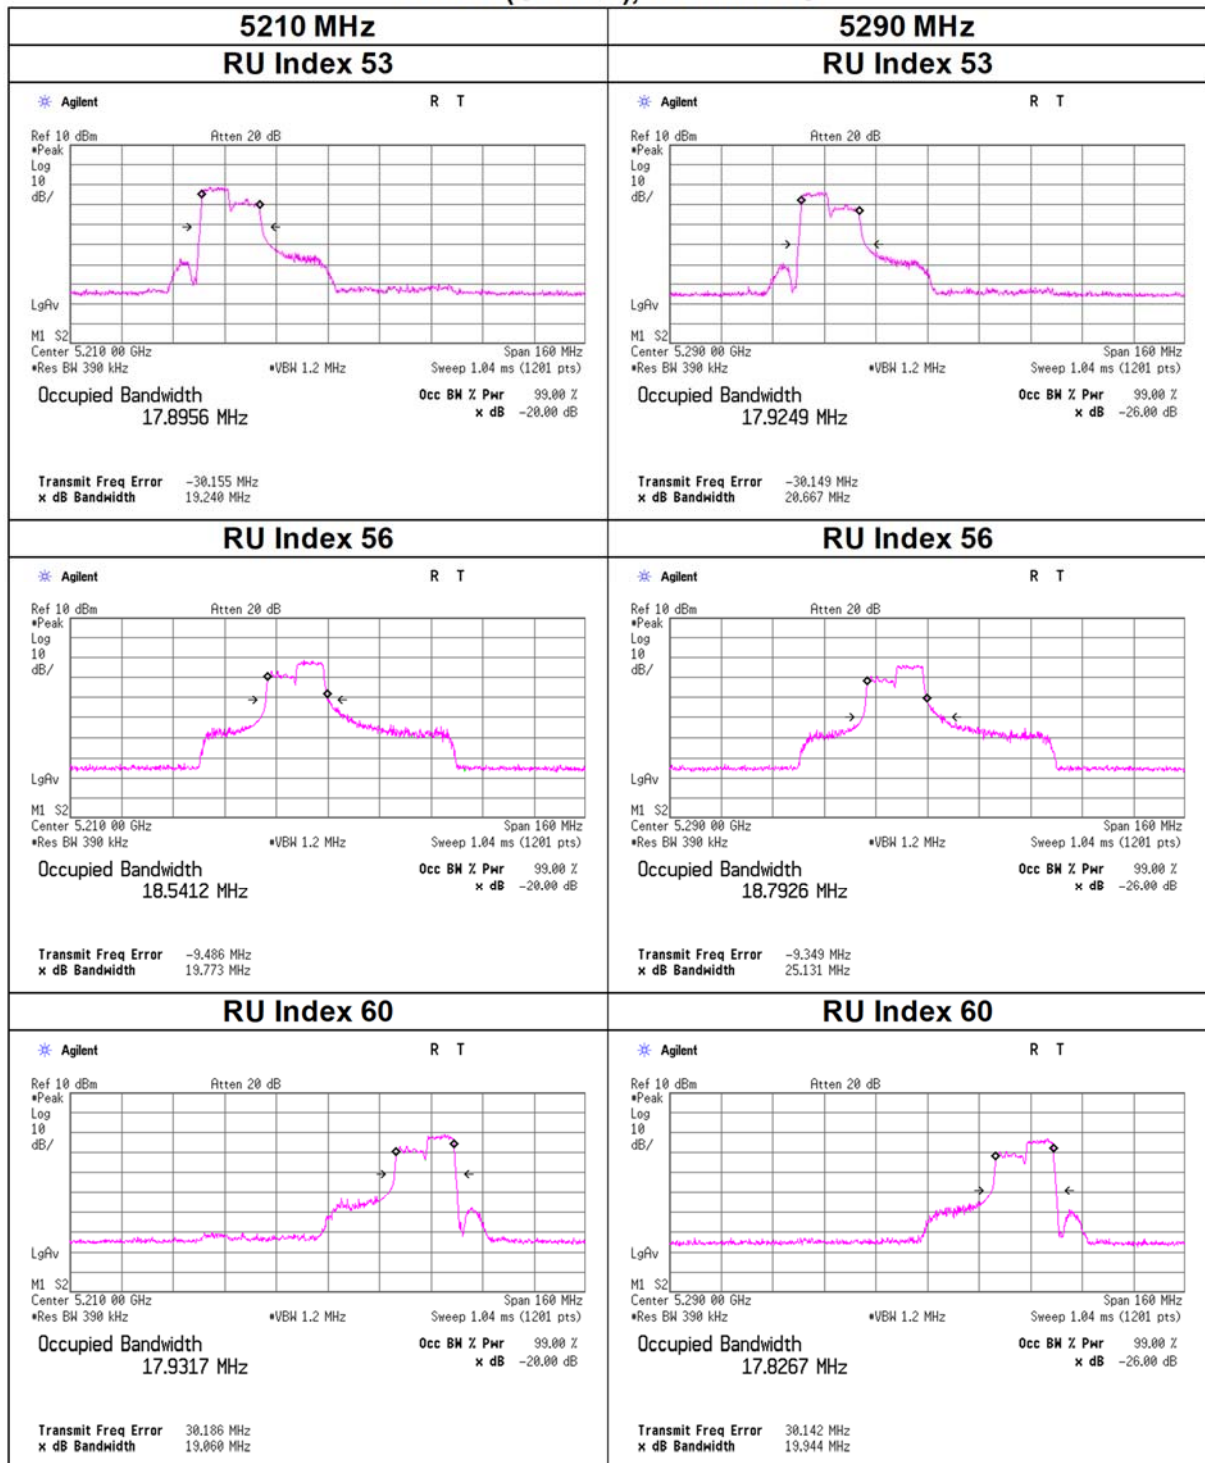


99 % Occupied Bandwidth

11ax-80(OFDMA), 106-tone RU

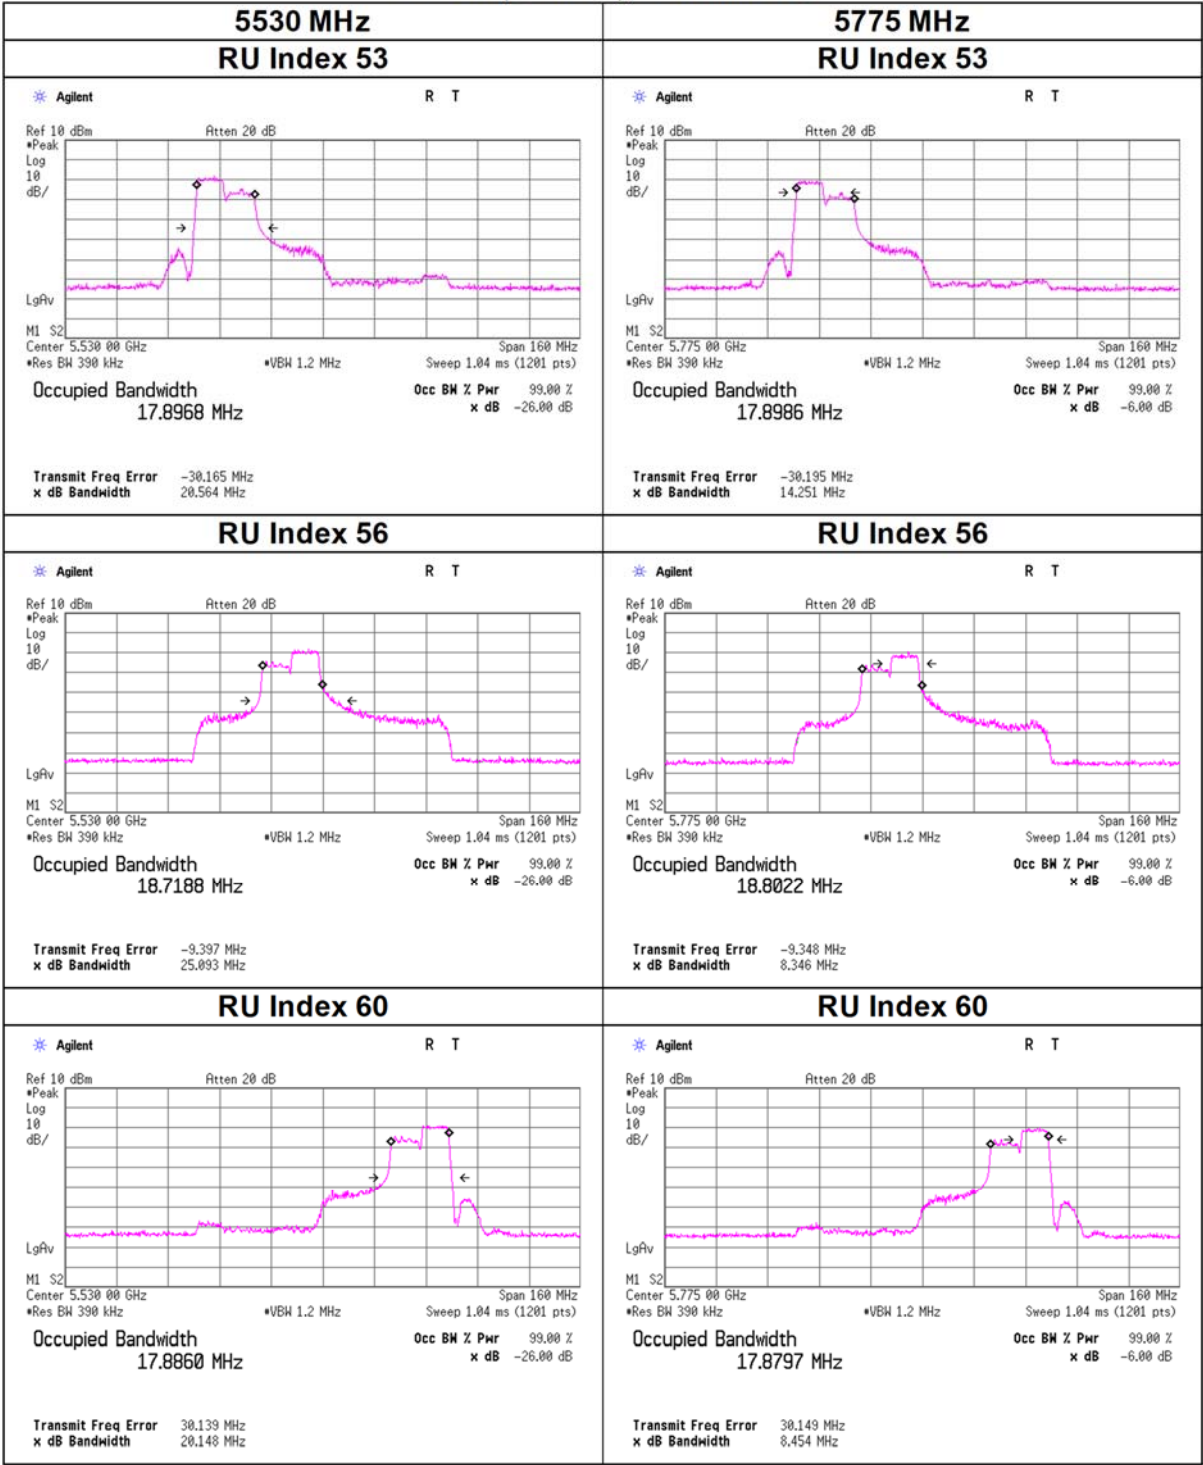


99 % Occupied Bandwidth

11ax-80(OFDMA), 242-tone RU

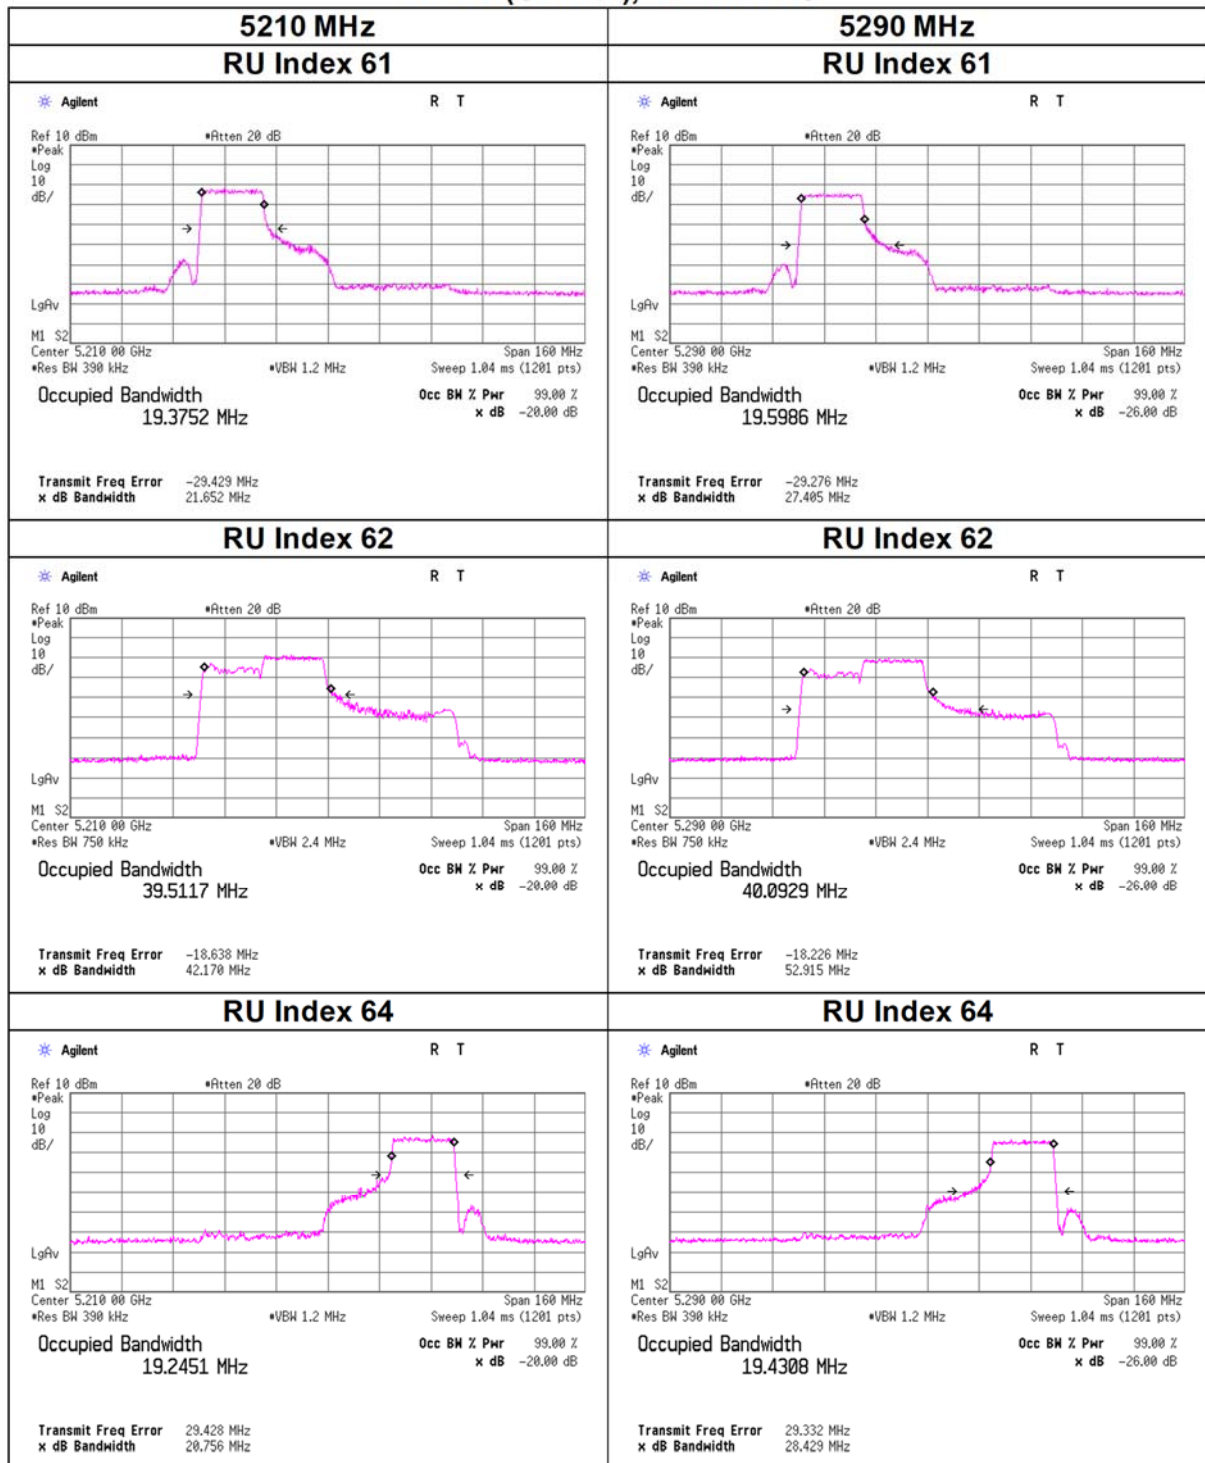


99 % Occupied Bandwidth

11ax-80(OFDMA), 242-tone RU

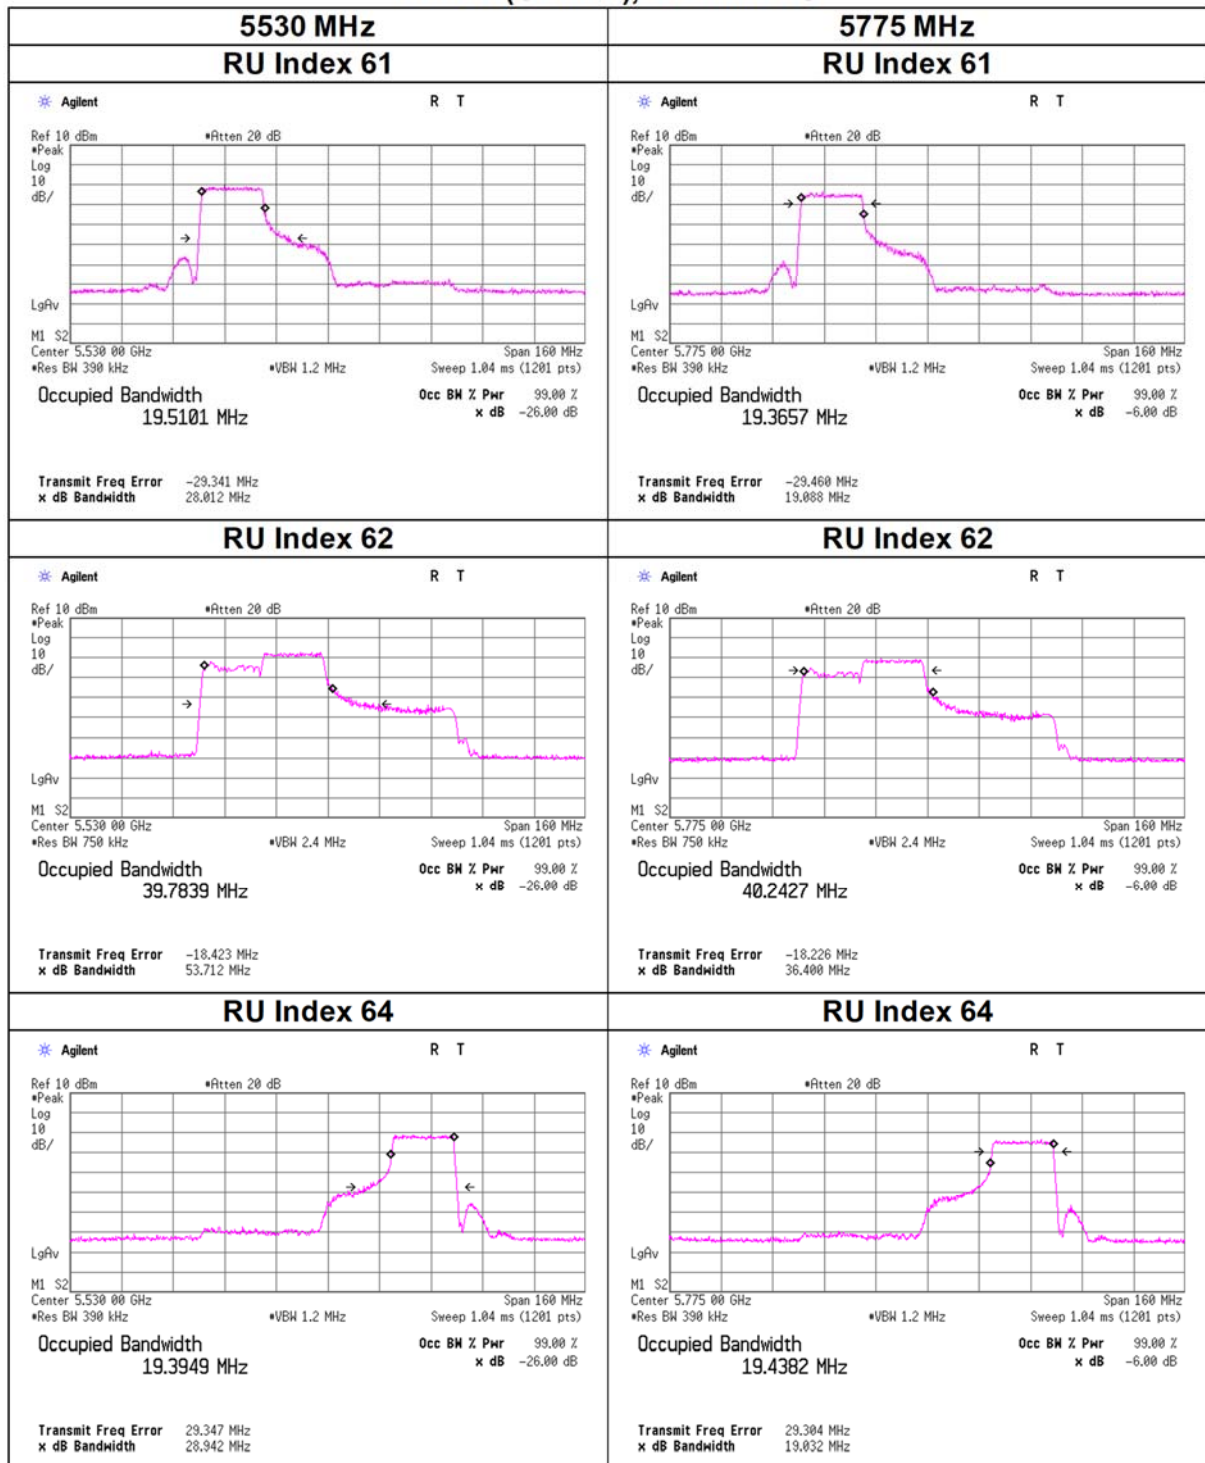


99 % Occupied Bandwidth

11ax-80(OFDMA), 484-tone RU

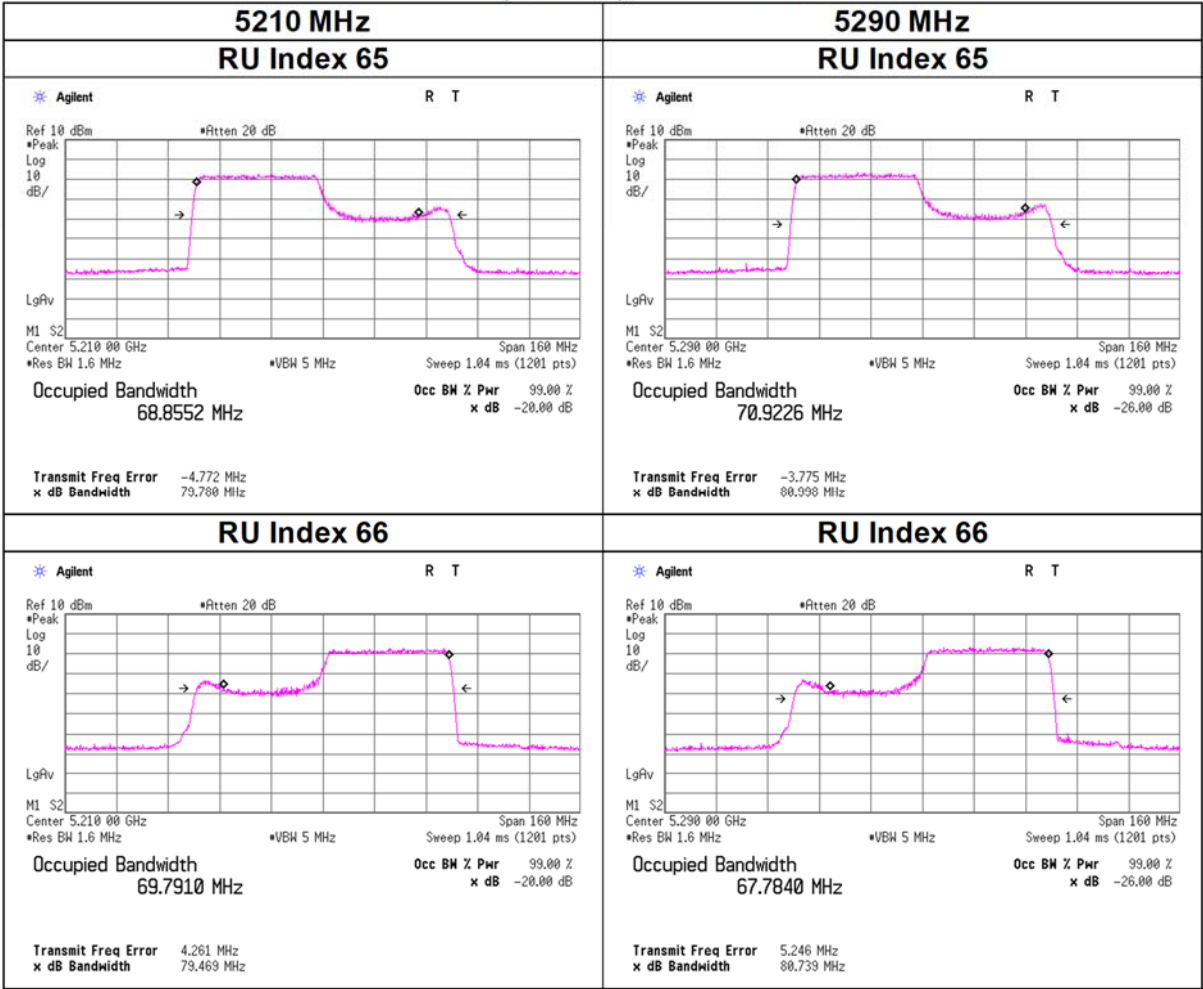

99 % Occupied Bandwidth

11ax-80(OFDMA), 484-tone RU

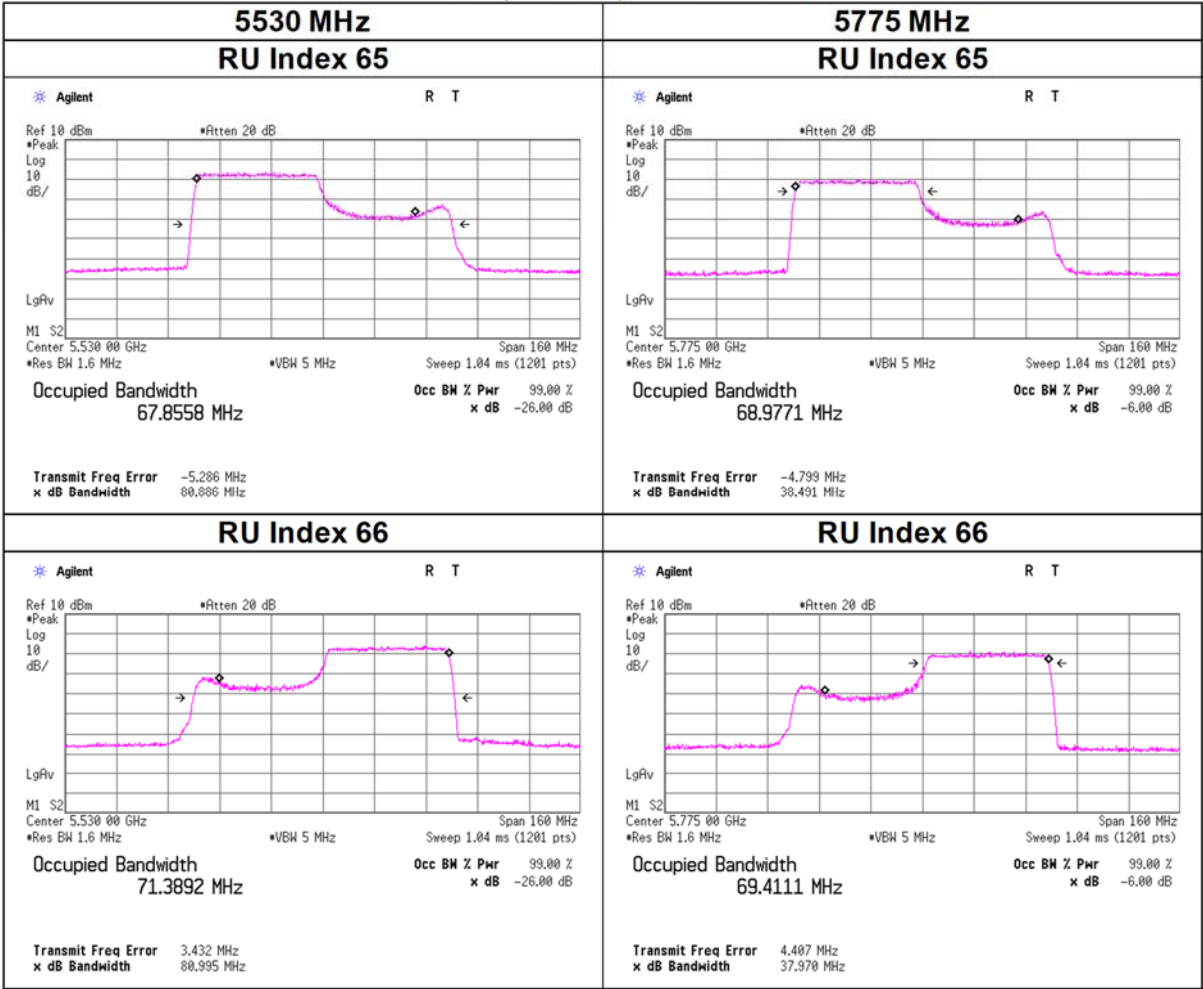


99 % Occupied Bandwidth

11ax-80(OFDMA), 996-tone RU



11ax-80(OFDMA), 996-tone RU

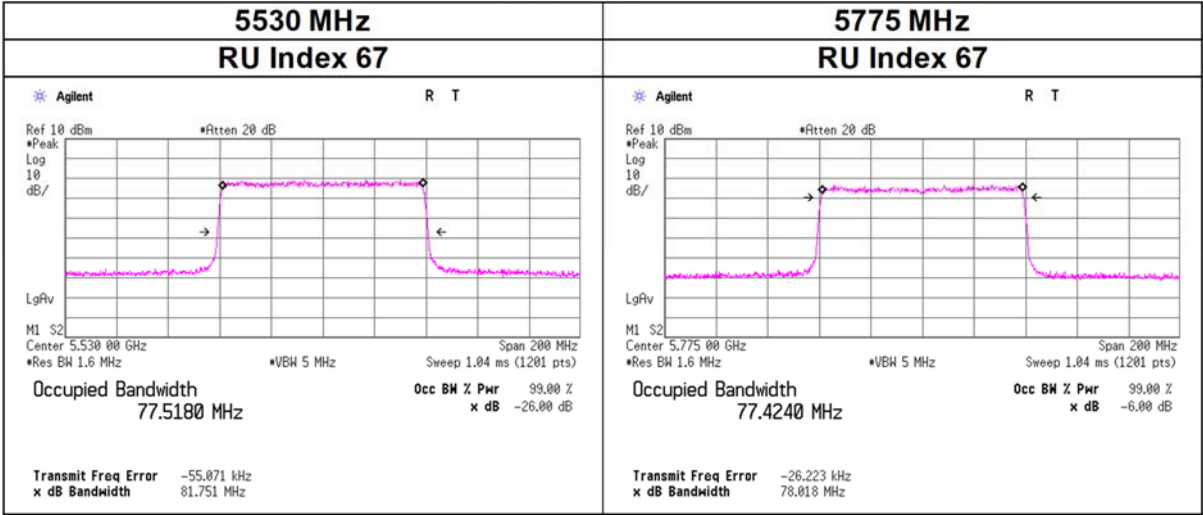

6 dB Bandwidth


Test place	Shonan EMC Lab. Wireless shielded room 2
Date	January 26, 2024
Temperature / Humidity	24 deg. C / 20 % RH
Engineer	Miku Ikudome
Mode	Tx, OFDM, (SISO)
Antenna	Ant 2

11a

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	16.377	> 0.500
5785	16.309	> 0.500
5825	16.274	> 0.500

6 dB Bandwidth

11a

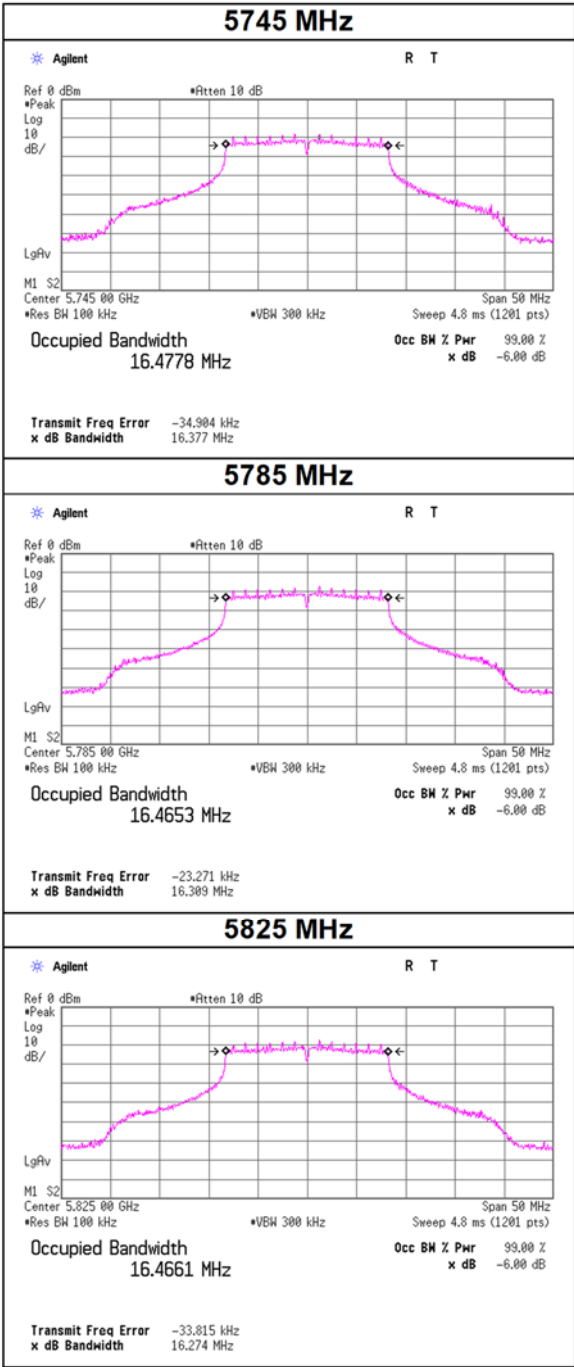

6 dB Bandwidth

Test place Shonan EMC Lab. Wireless shielded room 2
Date February 26, 2024 February 27, 2024
Temperature / Humidity 20 deg. C / 43 % RH 21 deg. C / 31% RH
Engineer Miku Ikudome Kouki Yamada
Mode Tx, OFDM, (SDM)
Antenna Ant 2

11n-20

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	17.597	> 0.500
5785	17.586	> 0.500
5825	17.560	> 0.500

11ac-20

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	17.381	> 0.500
5785	17.637	> 0.500
5825	17.619	> 0.500

11ax-20(OFDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	19.136	> 0.500
5785	19.148	> 0.500
5825	19.144	> 0.500

11n-40

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5755	35.135	> 0.500
5795	35.128	> 0.500

11ac-40

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5755	35.139	> 0.500
5795	35.125	> 0.500

11ax-40(OFDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5755	38.187	> 0.500
5795	38.195	> 0.500


11ac-80

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5775	75.221	> 0.500


11ax-80(OFDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5775	78.274	> 0.500







6 dB Bandwidth

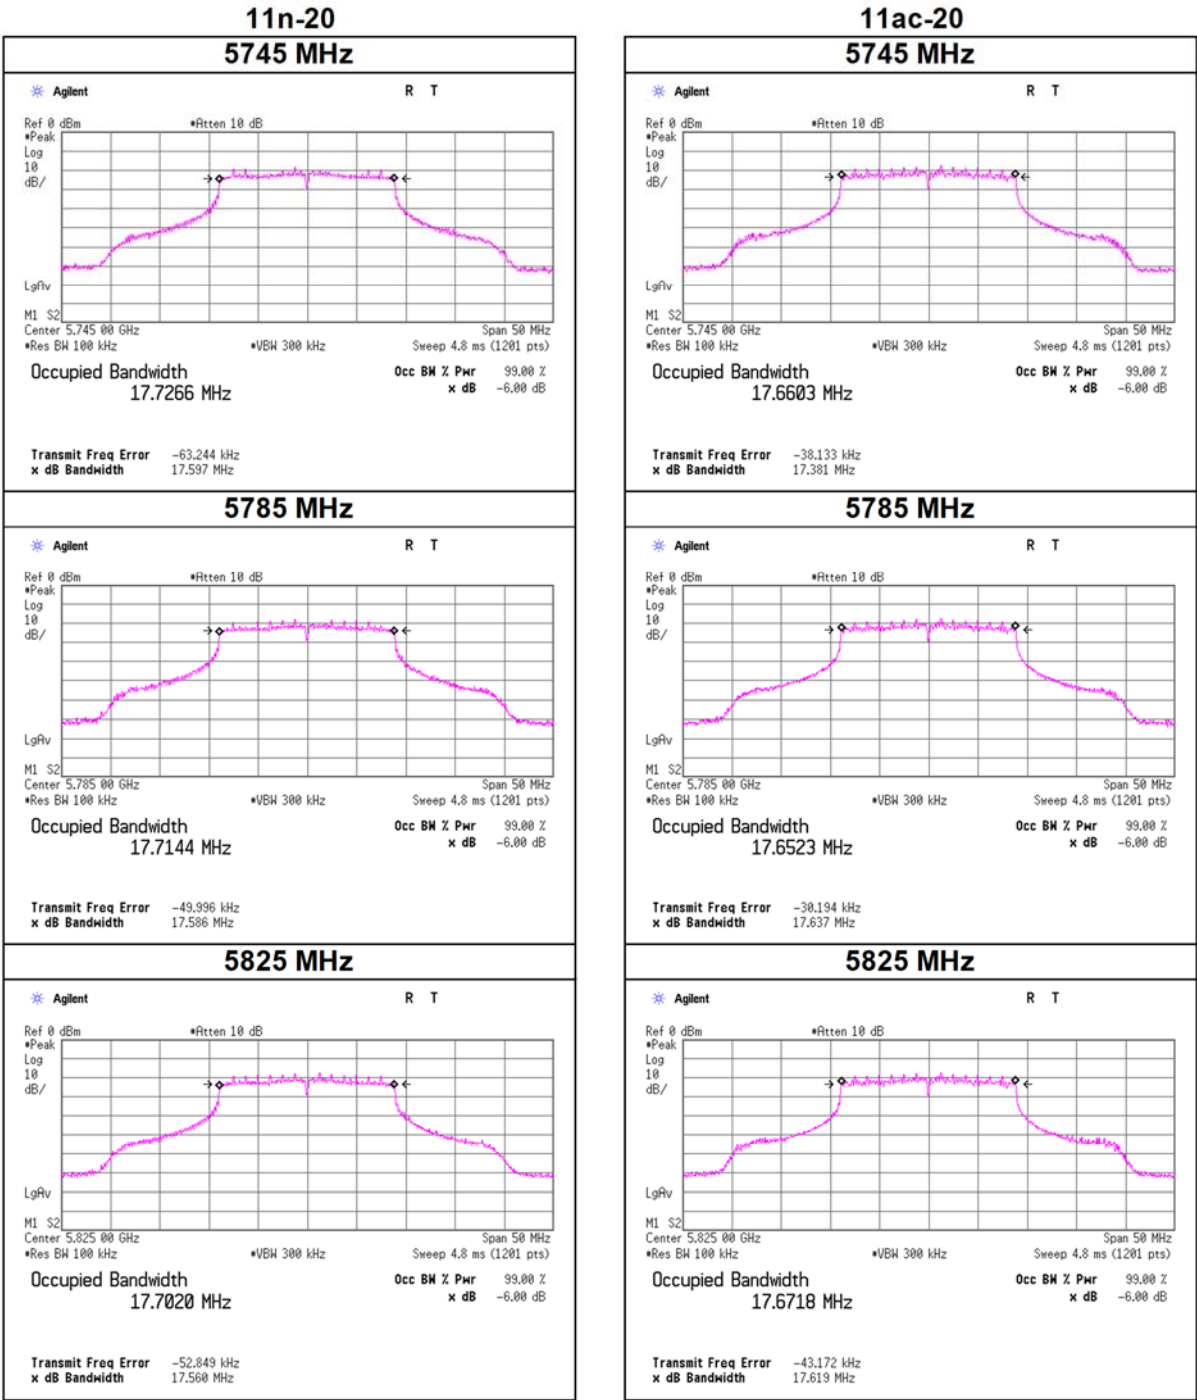

6 dB Bandwidth

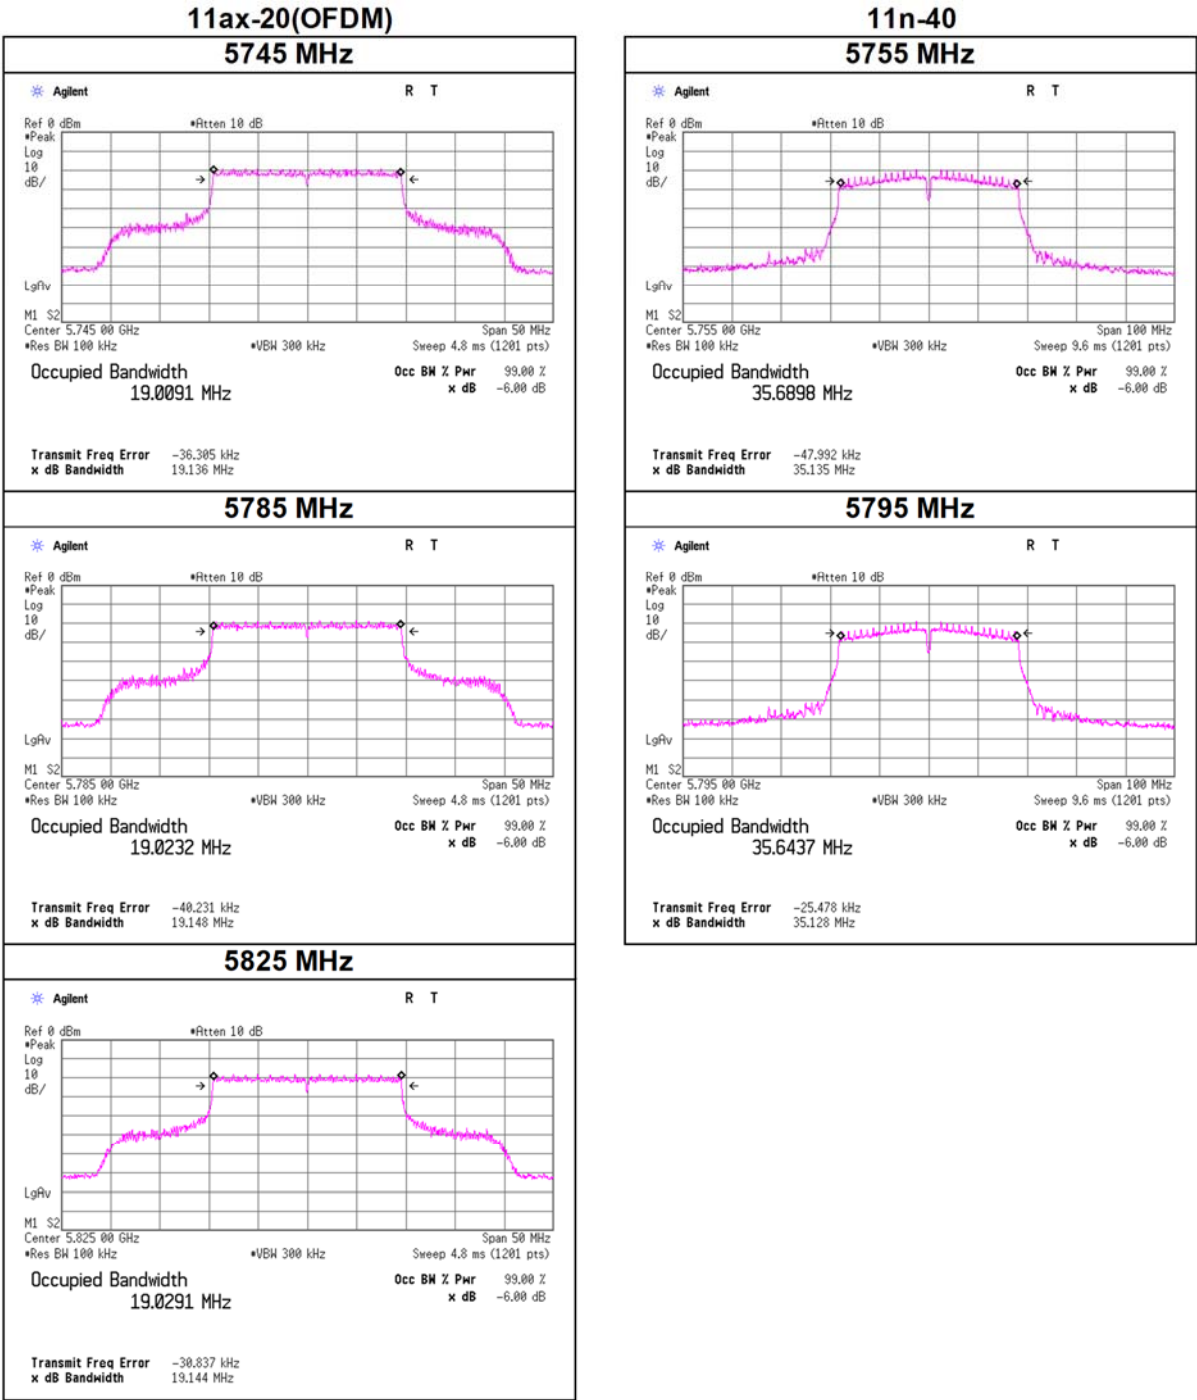

6 dB Bandwidth

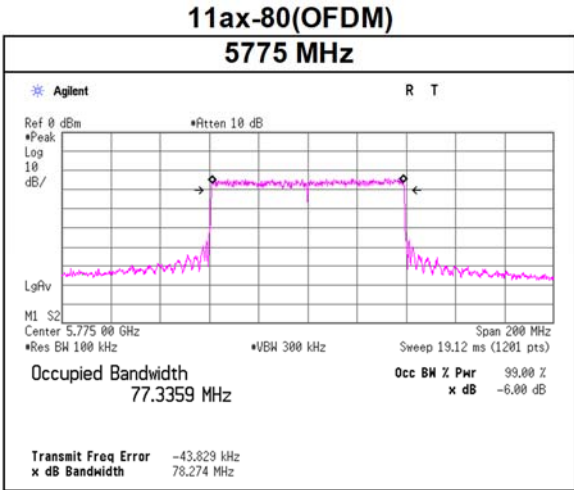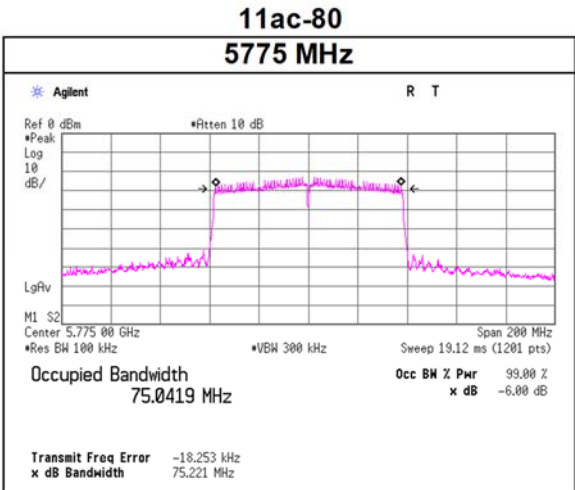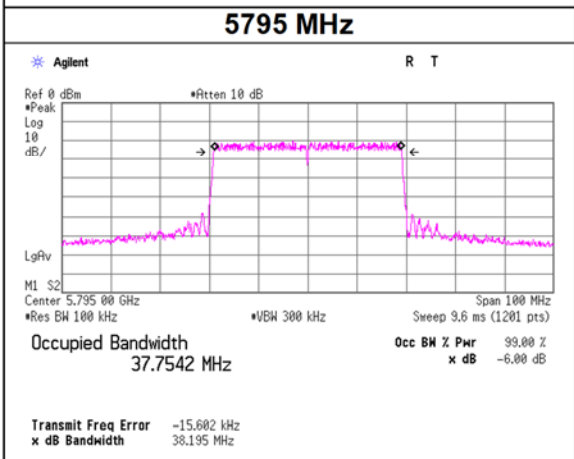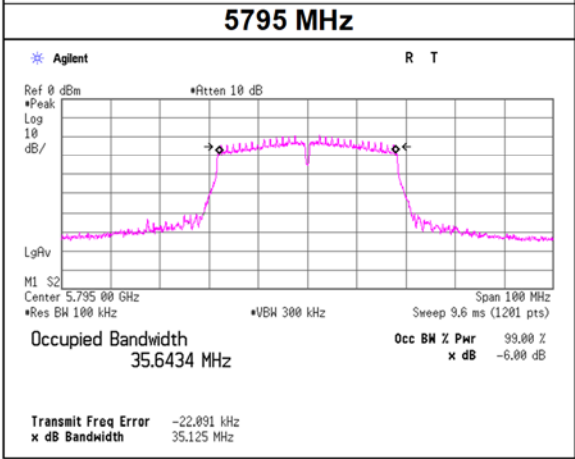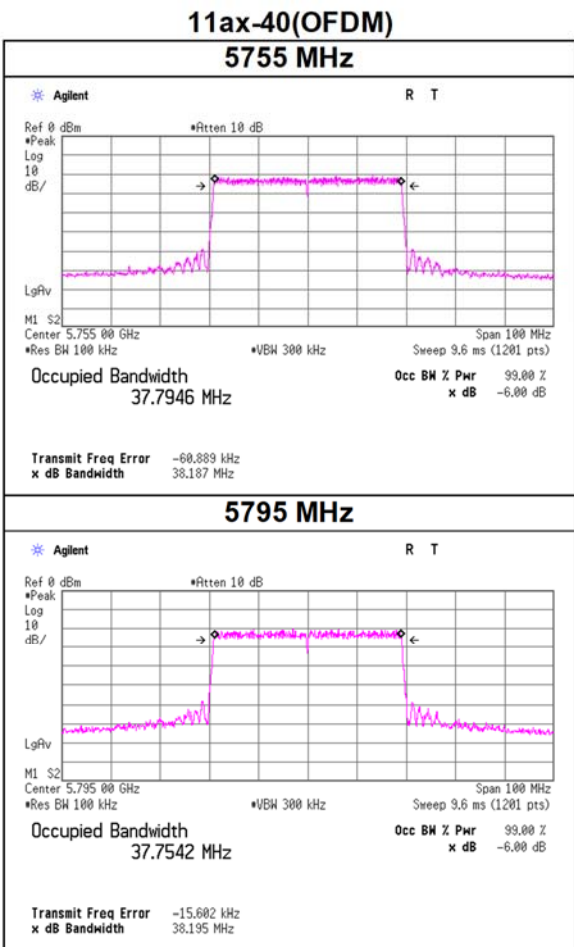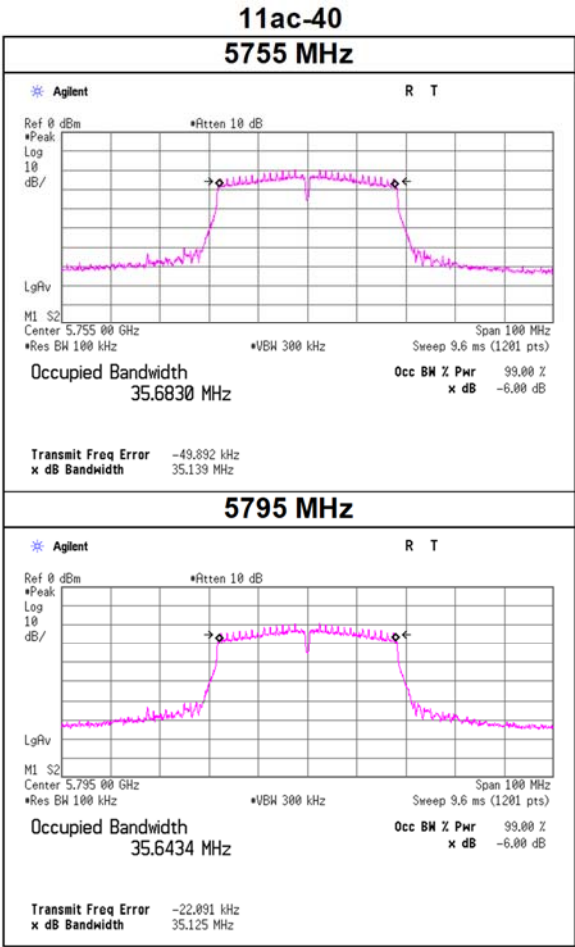

6 dB Bandwidth

Test place Shonan EMC Lab. Wireless shielded room 2
Date February 27, 2024
Temperature / Humidity 21 deg. C / 31 % RH
Engineer Kouki Yamada
Mode Tx, (SDM)
Antenna Ant 2

11ax-20(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
26-tone RU	5745	0	2.064	> 0.500
		4	2.586	> 0.500
		8	2.087	> 0.500
	5785	0	2.026	> 0.500
		4	2.616	> 0.500
		8	2.073	> 0.500
	5825	0	2.055	> 0.500
		4	2.626	> 0.500
		8	2.078	> 0.500

11ax-20(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
52-tone RU	5745	37	4.519	> 0.500
		38	4.025	> 0.500
		40	3.969	> 0.500
	5785	37	4.059	> 0.500
		38	4.001	> 0.500
		40	4.086	> 0.500
	5825	37	4.011	> 0.500
		38	4.096	> 0.500
		40	4.048	> 0.500

11ax-20(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
106-tone RU	5745	53	8.401	> 0.500
		54	8.392	> 0.500
	5785	53	8.395	> 0.500
		54	8.379	> 0.500
	5825	53	8.388	> 0.500
		54	8.371	> 0.500

11ax-20(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
242-tone RU	5745	61	19.142	> 0.500
	5785	61	19.095	> 0.500
	5825	61	19.133	> 0.500

6 dB Bandwidth

Test place Shonan EMC Lab. Wireless shielded room 2
Date February 27, 2024 February 27, 2024 February 28, 2024
Temperature / Humidity 21 deg. C / 31 % RH 21 deg. C / 31 % RH 22 deg. C / 29 % RH
Engineer Kouki Yamada Yusuke Tanikawara Miku Ikudome
Mode Tx, (SDM)
Antenna Ant 2

11ax-40(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
26-tone RU	5755	0	2.088	> 0.500
		8	2.073	> 0.500
		17	2.084	> 0.500
	5795	0	2.071	> 0.500
		8	2.053	> 0.500
		17	2.076	> 0.500

11ax-40(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
52-tone RU	5755	37	4.083	> 0.500
		40	4.014	> 0.500
		44	4.095	> 0.500
	5795	37	4.068	> 0.500
		40	4.097	> 0.500
		44	4.084	> 0.500

11ax-40(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
106-tone RU	5755	53	8.227	> 0.500
		54	8.489	> 0.500
		56	8.290	> 0.500
	5795	53	8.261	> 0.500
		54	8.586	> 0.500
		56	8.284	> 0.500

11ax-40(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
242-tone RU	5755	61	18.882	> 0.500
		62	18.837	> 0.500
	5795	61	18.830	> 0.500
		62	18.879	> 0.500

11ax-40(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
484-tone RU	5755	65	38.196	> 0.500
	5795	65	38.136	> 0.500

6 dB Bandwidth

Test place Shonan EMC Lab. Wireless shielded room 2
Date February 28, 2024 February 28, 2024
Temperature / Humidity 22 deg. C / 29 % RH 24 deg. C / 30 % RH
Engineer Miku Ikudome Yusuke Tanikawara
Mode Tx, (SDM)
Antenna Ant 2

11ax-80(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
26-tone RU	5775	0	2.097	> 0.500
		18	2.576	> 0.500
		36	2.078	> 0.500

11ax-80(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
52-tone RU	5775	37	4.087	> 0.500
		44	3.932	> 0.500
		52	3.942	> 0.500

11ax-80(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
106-tone RU	5775	53	8.320	> 0.500
		56	8.268	> 0.500
		60	8.302	> 0.500

11ax-80(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
242-tone RU	5775	61	18.817	> 0.500
		62	18.816	> 0.500
		64	18.847	> 0.500

11ax-80(OFDMA)


RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
484-tone RU	5775	65	37.701	> 0.500
		66	37.673	> 0.500

11ax-80(OFDMA)

RU Type	Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
996-tone RU	5775	67	78.204	> 0.500

6 dB Bandwidth

11ax-20(OFDMA), 26-tone RU

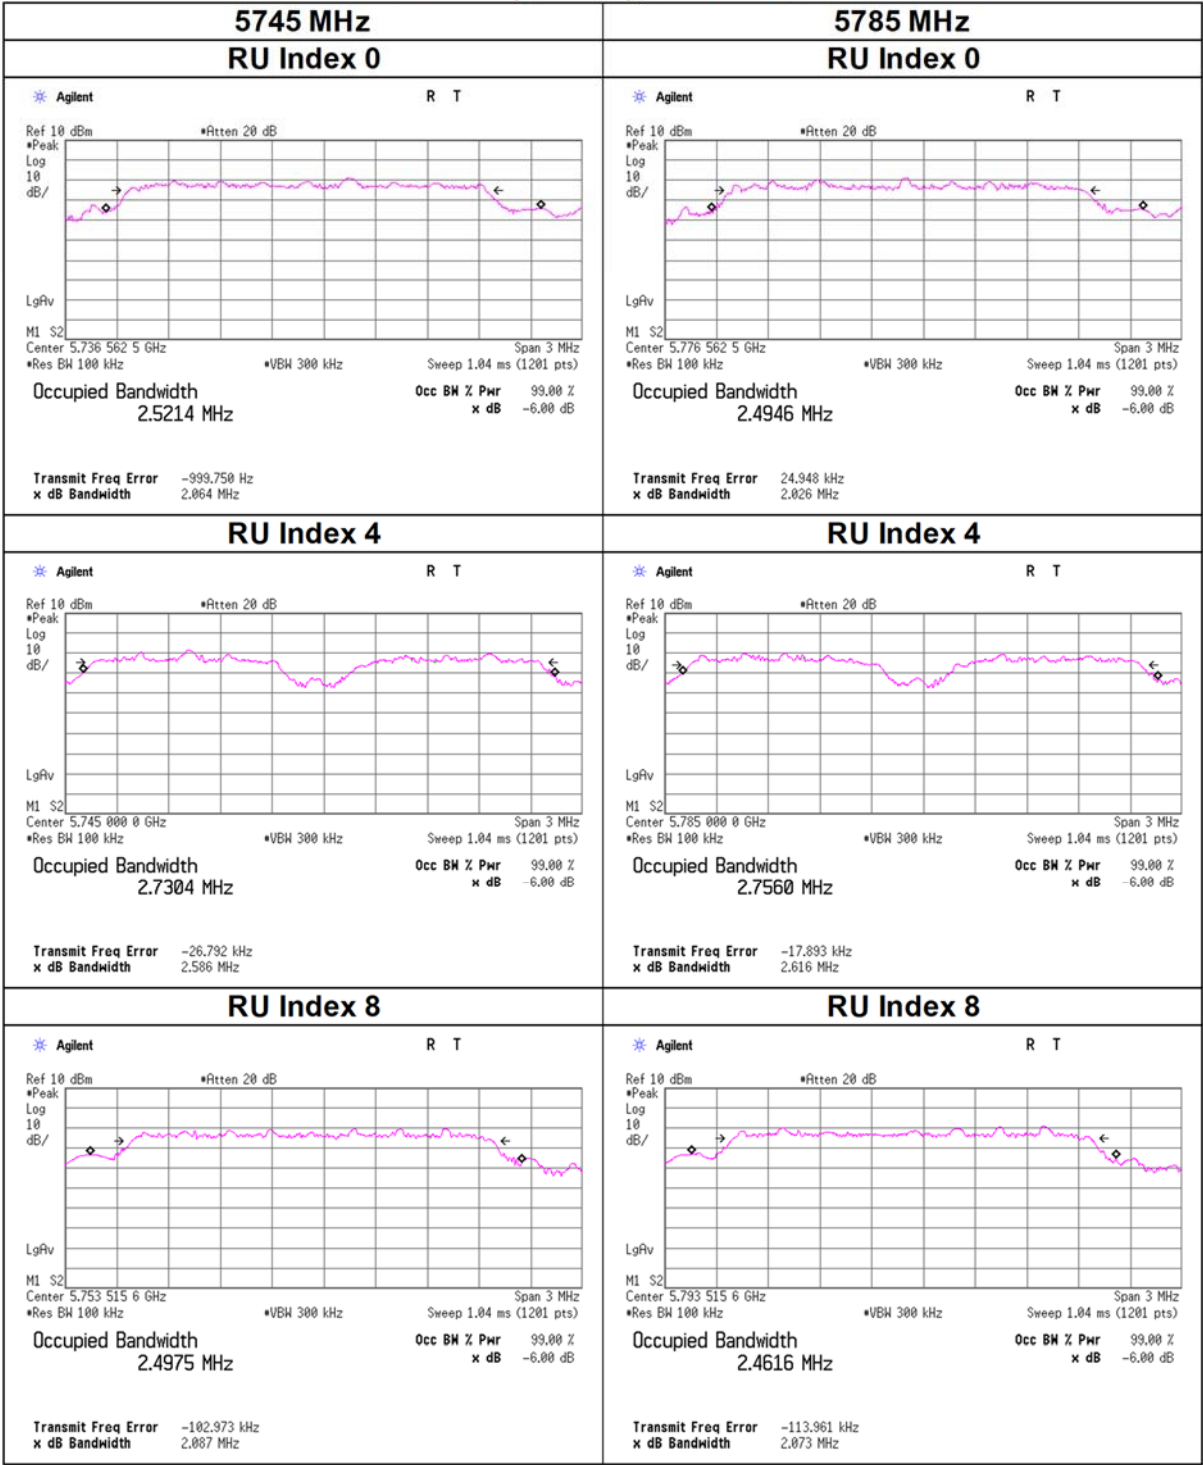

6 dB Bandwidth

11ax-20(OFDMA), 26-tone RU

