




# RADIO TEST REPORT


Test Report No. : 11334871S-E-R1

**Applicant** : Nintendo Co., Ltd.  
**Type of Equipment** : Game Console  
**Model No.** : HAC-001  
(for Wireless LAN (5 GHz bands) part, except DFS tests)  
**FCC ID** : BKEHAC001  
**Test regulation** : FCC Part 15 Subpart E: 2016  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11334871S-E. 11334871S-E is replaced with this report.

**Date of test:** August 24 to December 2, 2016

**Representative test engineer:**   
Shinichi Takano  
Engineer  
Consumer Technology Division

**Approved by:**   
Akio Hayashi  
Leader  
Consumer Technology Division



- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429



---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information.....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.).....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results.....</b>	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing.....</b>	<b>8</b>
<b>SECTION 5: Conducted Emission.....</b>	<b>14</b>
<b>SECTION 6: Radiated Spurious Emission and Band Edge Compliance.....</b>	<b>15</b>
<b>SECTION 7: Antenna Terminal Conducted Tests.....</b>	<b>17</b>
<b>APPENDIX 1: Test data .....</b>	<b>18</b>
Conducted Emission .....	18
26 dB Emission Bandwidth and 99 % Occupied Bandwidth.....	19
20 dB Bandwidth .....	53
6 dB Bandwidth .....	56
Maximum Conducted Output Power .....	63
Average Output Power.....	83
Burst rate confirmation .....	92
Maximum Power Spectral Density .....	97
Radiated Spurious Emission .....	131
Conducted Spurious Emission .....	191
<b>APPENDIX 2: Test instruments .....</b>	<b>192</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>194</b>
Conducted Emission .....	194
Radiated Spurious Emission .....	195
Pre-check of Worst Case Position.....	196

---

## **SECTION 1: Customer information**

Company Name : Nintendo Co., Ltd.  
Address : 11-1 Hokotate-cho, Kamitoba, Minami-ku, Kyoto 601-8501, Japan  
Telephone Number : +81-75-662-9600  
Facsimile Number : +81-75-662-9624  
Contact Person : Kazuya Kuramoto

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Game Console  
Model No. : HAC-001  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC 3.7 V (battery),  
AC Adapter input: AC 100 – 240 V, 50 / 60 Hz, 1 A,  
AC Adapter output: DC 5 V – DC 15 V, 2.6 A  
Receipt Date of Sample : August 2, 2016  
Country of Mass-production : China  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab.

### **2.2 Product Description**

Model: HAC-001 (referred to as the EUT in this report) is a Game Console.

#### **General Specification**

Clock frequency(ies) in the system : 37.4 MHz

#### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : Wireless LAN part: 2412 MHz - 2472 MHz,  
W52: 5180 MHz -5240 MHz,  
W53: 5260 MHz -5320 MHz,  
W56: 5500 MHz -5700 MHz \*,  
W58: 5745 MHz -5825 MHz \*,  
Bluetooth part: 2402 MHz - 2480 MHz  
Modulation : Wireless LAN part:  
2.4 GHz bands: DBPSK, DQPSK, CCK, OFDM  
5 GHz bands: OFDM  
Bluetooth part:  
BDR (Basic Data Rate): GFSK  
EDR (Enhanced Data Rate):  $\pi/4$ -DQPSK, 8DPSK  
LE (Low Energy mode): GFSK  
Antenna type : PCB Antenna (Dipole)  
Antenna connector : (Ant: 0): MHF 4L, (Ant: 1): MHF II  
Antenna Gain : 2.4 GHz band:  
-0.70 dBi max (ANT0: Wireless LAN & Bluetooth), -8.38 dBi max (ANT1: Wireless LAN)  
5 GHz band:  
+3.31 dBi max (ANT0: Wireless LAN), -0.96 dBi max (ANT1: Wireless LAN)  
Operation temperature : +5 deg.C to +35 deg.C

Remarks: This Wireless Module consists of 1 chip each of 5 GHz band and 2.4 GHz band.

\*This model does not have 40 MHz Bandwidth mode on W56 and W58.

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## SECTION 3: Test specification, procedures & results

### 3.1 Test Specification

Test Specification : FCC Part 15 Subpart E  
FCC Part 15 final revised on November 14, 2016 and effective December 14, 2016  
Title : FCC 47CFR Part15 Radio Frequency Device Subpart E  
Unlicensed National Information Infrastructure Devices  
Section 15.407 General technical requirements

\* The revision on November 14, 2016, does not affect the test specification applied to the EUT.

\*\* The EUT has been tested for compliance with FCC Part 15 Subpart B / ICES-003 Issue 6: 2016.

### 3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013	FCC: 15.407 (b) (6) / 15.207	8.6 dB, AV, 0.45898 MHz, N Tx 5260 MHz IEEE 802.11ac-VHT20	Complied	-
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
26 dB Emission Bandwidth	FCC: KDB Publication Number 789033	FCC: 15.407 (a) (1) (2) (3)	See data	N/A	Conducted
Maximum Conducted Output Power	IC: -	IC: -			
	FCC: KDB Publication Number 789033	FCC: 15.407 (a) (1) (2) (3)			
IC: -	IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)				
Maximum Power Spectral Density	FCC: KDB Publication Number 789033	FCC : 15.407 (a) (1) (2) (3)	Complied	Complied	Conducted
	IC: -	IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)			
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013	FCC: 15.407 (b), 15.205 and 15.209	0.2 dB, AV, 5460.000 MHz, Vertical Tx 5530 MHz IEEE 802.11ac-80, MIMO	Complied	Conducted (< 30 MHz) / Radiated (> 30 MHz) *1)
	KDB Publication Number 789033	IC: RSS-247 6.2.1 (2) 6.2.2 (2) 6.2.3 (2) 6.2.4 (2)			
6 dB Emission Bandwidth	FCC: ANSI C63.10-2013	FCC: 15.407 (e)	See data	Complied	Conducted
	IC: -	IC: RSS-247 6.2.4 (1)			
99 % Occupied Band Width	RSS-Gen 6.6	IC: -	N/A	N/A	Conducted

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\* For DFS tests, please see the test report number 11334871S-G issued by UL Japan, Inc.

\*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

#### **FCC Part 15.31 (e)**

This EUT provides stable voltage (DC 3.3 V) constantly to RF Part regardless of input voltage. Therefore, the EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the EUT complies with the requirement.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 6.6	IC: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .  
Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4 SAC / SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.1 dB	2.1 dB	2.6 dB	2.2 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	2.7 dB	2.7 dB	3.1 dB	-
	30 MHz-200 MHz	4.4 dB	4.4 dB	4.6 dB	-
	200 MHz-1 GHz	5.6 dB	5.5 dB	5.3 dB	-
Radiated emission (Measurement distance: 1 m)	1 GHz-13 GHz	5.2 dB	5.2 dB	5.2 dB	-
	13 GHz-18 GHz	4.9 dB	4.9 dB	4.9 dB	-
	18 GHz-40 GHz	4.9 dB	4.9 dB	4.9 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	0.76 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	0.79 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.74 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.08 dB
Spurious emission (Conducted) below 1GHz	1.5 dB
Spurious emission (Conducted) 1 GHz-3 GHz	1.7 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.4 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.5 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.5 dB
Bandwidth Measurement	0.66 %
Duty cycle and Time Measurement	0.012 %

#### Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.  
 1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN  
 Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401  
 JAB Accreditation No. RTL02610

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Mode(s)**

\*1) Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ac mode by the pre-test.

<b>Test item</b>	<b>Mode</b>	<b>Tested frequency</b>	<b>Worst data rate *2)</b>	<b>Antenna *2)</b>
Conducted emission, Radiated emission (below 1 GHz), Out of band emissions (Conducted) *1)	Transmitting (Tx), IEEE 802.11ac VHT20 (11ac-20), SISO	5260 MHz	MCS 3, PN9	0
26 dB Emission Bandwidth, 20 dB Bandwidth, Occupied Bandwidth (99%), Maximum Conducted Output Power, Maximum Power Spectral Density	Transmitting (Tx), IEEE 802.11a (11a)	(Low bands): 5180 MHz, 5220 MHz, 5240 MHz, (Middle bands): 5260 MHz, 5300 MHz, 5320 MHz (Additional bands): 5500 MHz, 5580 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5785 MHz, 5825 MHz	48 Mbps, PN9	0
	Transmitting (Tx), IEEE 802.11n HT20 (11n-20), SISO	(Low bands): 5180 MHz, 5220 MHz, 5240 MHz, (Middle bands): 5260 MHz, 5300 MHz, 5320 MHz (Additional bands): 5500 MHz, 5580 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5785 MHz, 5825 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11n HT20 (11n-20), MIMO	(Low bands): 5180 MHz, 5220 MHz, 5240 MHz, (Middle bands): 5260 MHz, 5300 MHz, 5320 MHz (Additional bands): 5500 MHz, 5580 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5785 MHz, 5825 MHz	MCS11, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11ac VHT20 (11ac-20), SISO	(Low bands): 5180 MHz, 5220 MHz, 5240 MHz, (Middle bands): 5260 MHz, 5300 MHz, 5320 MHz (Additional bands): 5500 MHz, 5580 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5785 MHz, 5825 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11ac VHT20 (11ac-20), MIMO	(Low bands): 5180 MHz, 5220 MHz, 5240 MHz, (Middle bands): 5260 MHz, 5300 MHz, 5320 MHz (Additional bands): 5500 MHz, 5580 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5785 MHz, 5825 MHz	MCS 3, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11n HT40 (11n-40), SISO	(Low bands): 5190 MHz, 5230 MHz, (Middle bands): 5270 MHz, 5310 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11n HT40 (11n-40), MIMO	(Low bands): 5190 MHz, 5230 MHz, (Middle bands): 5270 MHz, 5310 MHz	MCS11, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11ac VHT40 (11ac-40), SISO	(Low bands): 5190 MHz, 5230 MHz, (Middle bands): 5270 MHz, 5310 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11ac VHT40 (11ac-40), MIMO	(Low bands): 5190 MHz, 5230 MHz, (Middle bands): 5270 MHz, 5310 MHz	MCS 3, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11ac VHT80 (11ac-80), SISO	(Low bands): 5210 MHz (Middle bands): 5290 MHz (Additional bands): 5530 MHz, 5610MHz (Upper bands): 5775 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11ac VHT80 (11ac-80), MIMO	(Low bands): 5210 MHz (Middle bands): 5290 MHz (Additional bands): 5530 MHz, 5610MHz (Upper bands): 5775 MHz	MCS 3, PN9	0 & 1

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



Radiated emission (above 1 GHz) *3)	Transmitting (Tx), IEEE 802.11n HT20 (11n-20), MIMO *4)	(Low bands): 5180 MHz (Middle bands): 5320 MHz (Additional bands): 5500 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5825 MHz	MCS 11, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11ac VHT20 (11ac-20), SISO	(Low bands): 5180 MHz, 5240 MHz, (Middle bands): 5260 MHz, 5320 MHz (Additional bands): 5500 MHz, 5580 MHz, 5700 MHz, (Upper bands): 5745 MHz, 5785 MHz, 5825 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11n HT40 (11n-40), MIMO *4)	(Low bands): 5190 MHz (Middle bands): 5310 MHz	MCS 11, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11ac HT40 (11n-40), SISO	(Low bands): 5190 MHz, 5230 MHz, (Middle bands): 5310 MHz	MCS 3, PN9	0
	Transmitting (Tx), IEEE 802.11ac VHT80 (11ac-80), MIMO *4)	(Low bands): 5210 MHz, (Middle bands): 5290 MHz, (Additional bands): 5530 MHz, 5610MHz (Upper bands): 5775 MHz	MCS 3, PN9	0 & 1
	Transmitting (Tx), IEEE 802.11ac VHT80 (11ac-80), SISO	(Low bands): 5210 MHz, (Middle bands): 5290 MHz, (Additional bands): 5530 MHz, 5610MHz (Upper bands): 5775 MHz	MCS 3, PN9	0

\*Power of the EUT was set by the software as follows;

Power settings: Fixed (refer to power setting (target power) table)

Software: cmd.exe, Ver. 6.3.9600.17415,

\*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.

\*2) The worst condition was determined based on the test result of Maximum Conducted Output Power.

\*3) Since 11a, 11n and 11ac mode have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest radiated carrier power.

\*4) This mode wasn't worst, but only band edge of spurious emissions were measured for confirmation.


(Power setting (target power) table) 1/2

Bandwidth	Channel frequency	Mode	Rate / MCS mode [dBm]										
			6 M	9 M	12 M	18 M	24 M	36 M	48 M	54 M	-	-	
20 MHz	5180 MHz – 5240 MHz	11a	6 M	9 M	12 M	18 M	24 M	36 M	48 M	54 M	-	-	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-	
	5180 MHz – 5240 MHz	11n-20 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	-	-	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-	
	5180 MHz – 5240 MHz	11n-20 (MIMO)	MCS 8	MCS 9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15	-	-	
10.5			10.5	10.5	10.5	10.5	10.5	10.5	10.5	-	-		
5180 MHz – 5240 MHz	11ac-20 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	-		
		13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.0	-		
5180 MHz – 5240 MHz	11ac-20 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	-		
		10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-		
40 MHz	5190 MHz	11n-40 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	-	-	
			10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	-	-	
	5230 MHz	11n-40 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	-	-	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-	
	5190 MHz	11n-40 (MIMO)	MCS 8	MCS 9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15	-	-	
			7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	-	-	
	5230 MHz	11n-40 (MIMO)	MCS 8	MCS 9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15	-	-	
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-	-	
	5190 MHz	11ac-40 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
			10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	
	5230 MHz	11ac-40 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.0	13.0	
5190 MHz	11ac-40 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9		
		7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0		
5230 MHz	11ac-40 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9		
		10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5		
80 MHz	5210 MHz	11ac-80 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
			9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	
	5210 MHz	11ac-80 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
20 MHz	5260 MHz – 5320 MHz	11a	6 M	9 M	12 M	18 M	24 M	36 M	48 M	54 M	-	-	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-	
	5260 MHz – 5320 MHz	11n-20 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	-	-	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-	
	5260 MHz – 5320 MHz	11n-20 (MIMO)	MCS 8	MCS 9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15	-	-	
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-	-	
	5260 MHz – 5320 MHz	11ac-20 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	-	
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.0	-	
	5260 MHz – 5320 MHz	11ac-20 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	-	
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-	
	40 MHz	5270 MHz – 5310 MHz	11n-40 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	-	-
				13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-
5270 MHz – 5310 MHz		11n-40 (MIMO)	MCS 8	MCS 9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15	-	-	
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-	-	
5270 MHz – 5310 MHz	11ac-40 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9		
		13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.0	13.0		
5270 MHz – 5310 MHz	11ac-40 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9		
		10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5		
80 MHz	5290 MHz	11ac-80 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
			9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	
	5290 MHz	11ac-80 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
			6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	

(Power setting (target power) table) 2/2

Bandwidth	Channel frequency	Mode	Rate / MCS mode [dBm]									
			6 M	9 M	12 M	18 M	24 M	36 M	48 M	54 M	-	-
20 MHz	5500 MHz – 5700 MHz, 5745 MHz – 5825 MHz	11a	6 M	9 M	12 M	18 M	24 M	36 M	48 M	54 M	-	-
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-
	5500 MHz – 5700 MHz, 5745 MHz – 5825 MHz	11n-20 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	-	-
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	-	-
	5500 MHz – 5700 MHz, 5745 MHz – 5825 MHz	11n-20 (MIMO)	MCS 8	MCS 9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15	-	-
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-	-
	5500 MHz – 5700 MHz, 5745 MHz – 5825 MHz	11ac-20 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	-
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	11.0
	5500 MHz – 5700 MHz, 5745 MHz – 5825 MHz	11ac-20 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	-
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	-
80 MHz	5530 MHz, 5610 MHz, 5775MHz	11ac-80 (SISO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
			13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	10.5
	5530 MHz, 5610 MHz, 5775MHz	11ac-80 (MIMO)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
			10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5

## 4.2 Configuration and peripherals

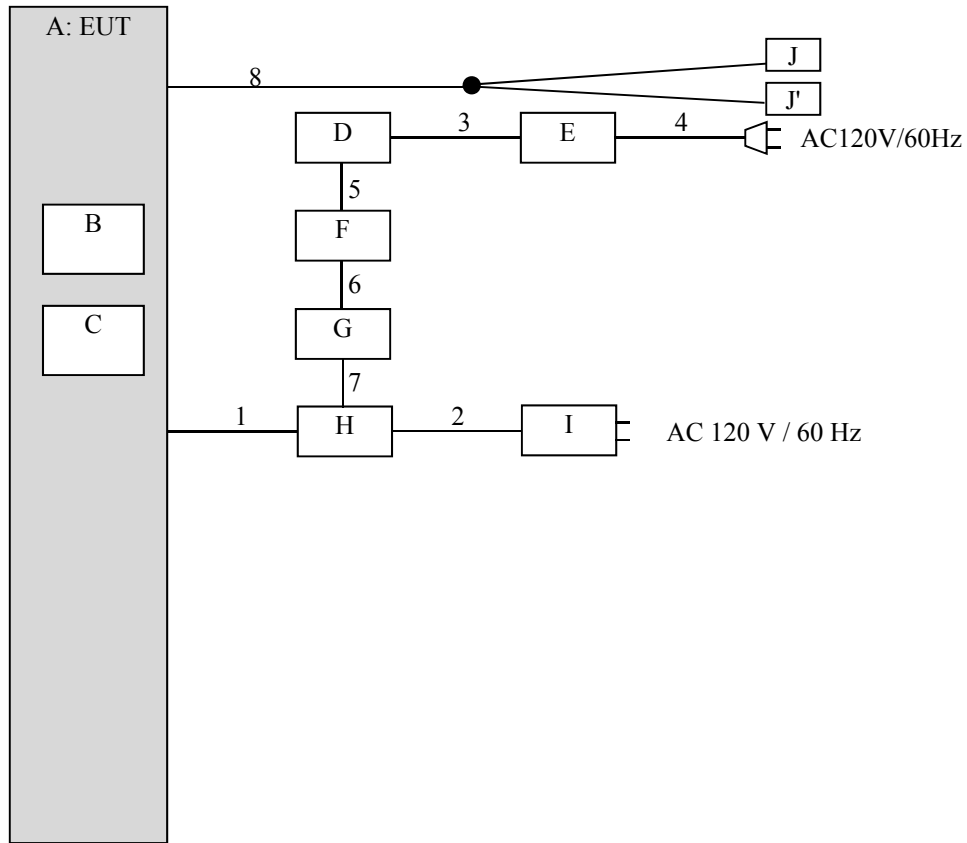

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

**Description of EUT and support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Game Console	HAC-001	XAW0150000760 *1) XAW0150000754 *2)	Nintendo	EUT
B	Game Card	HAC-008	001	Nintendo	-
C	Micro SD Memory	RP-SMEB08GJK	UJ3AA005855	Panasonic	-
D	Laptop PC	HP EliteBook 820G1	JPA416GD4K	hp	-
E	AC Adapter	HSTNN-LA35	WCWVT0A1R5SORI	hp	-
F	GIGA Ethernet Adapter	LAN-GTJU3	61L349604916A	Logitech	-
G	Wii LAN ADAPTER	RVL-015	40F407557DB7	Nintendo	-
H	SDEV Cradle	HAT-003	XZL0000000605	Nintendo	-
I	AC Adapter	HAC-002	-	Nintendo	-
J, J'	Headphone	-	-	Nintendo	-

\*1) Used for Antenna Terminal conducted test (Type B).

\*2) Used for Conducted Emission test and Radiated Emission test (Type B).

\*The EUT for final test was selected based on following preliminary test.

- Radiated Emission: Comparison of Type A and Type B on Band Edges, Harmonics and Spurious emission.

- Conducted Emission: Comparison of Type A and Type B on representative mode.

- Antenna Terminal Conducted test: Comparison of Type A and Type B on Output Power

Accessory and model differences

The difference between Type A and Type B is as following table.

The two crystals are compatible and are electrically identical having same radio parameters.

Parts	Manufacturer	
	Type A	Type B
Crystal (X501)	TXC	DAISHINKU

So, for the all tests, the E.U.T. was selected worse type by preliminary tests.

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB	0.4	Shielded	Shielded	-
2	USB	1.8	Shielded	Shielded	-
3	DC	1.8	Unshielded	Unshielded	-
4	AC	0.9	Unshielded	Unshielded	-
5	USB	0.1	Shielded	Shielded	-
6	LAN	0.5	Unshielded	Unshielded	-
7	USB	0.15	Shielded	Shielded	-
8	Headphone	0.5 + 0.3	Shielded	Shielded	-

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT via AC adapter in a Shielded room.

The EUT via AC adapter was connected to a LISN (AMN).  
An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Detector** : QP and CISPR Average  
**Measurement range** : 0.15 MHz-30 MHz  
**Test data** : APPENDIX  
**Test result** : Pass

---

## **SECTION 6: Radiated Spurious Emission and Band Edge Compliance**

### **Test Procedure**

< Below 1 GHz >

EUT was placed on a platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1 GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1 GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

\*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad ; P \text{ is the e.i.r.p. (Watts)}$$

**Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method VB *1) RBW: 1 MHz VBW: 1/T (T: burst length, refer to APPENDIX) Detector: Peak Trace: ≥ 100 traces
Test Distance	3 m	3.9 m*2) (1 GHz – 13 GHz), 1 m*3) (13 GHz – 40 GHz)	

\*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r03 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on August 22, 2016)".

\*2) Distance Factor:  $20 \times \log(3.9 \text{ m}/3.0 \text{ m}) = 2.28 \text{ dB}$

\*3) Distance Factor:  $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.54 \text{ dB}$

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Mode	Antenna polarization	Carrier	Spurious (Below 1 GHz)	Spurious (1 GHz – 6.4 GHz)	Spurious (6.4 GHz - 13 GHz)	Spurious (Above 13 GHz)
SISO	Horizontal	X	Y	X	X	X
	Vertical	Y	Z	Y	Y	X
MIMO	Horizontal	X	-	X	X	X
	Vertical	Y	-	Y	Y	X

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz-40 GHz  
**Test data** : APPENDIX  
**Test result** : Pass



## **SECTION 7: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

<b>Test</b>	<b>Span</b>	<b>RBW</b>	<b>VBW</b>	<b>Sweep time</b>	<b>Detector</b>	<b>Trace</b>	<b>Instrument used and Test method</b>
26 dB Bandwidth	Enough to capture the emission	Close to 1 % of EBW	> RBW	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth	Enough width to display emission skirts	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
20 dB Bandwidth	Enough to capture the emission	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
6 dB Bandwidth	Enough to capture the emission	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Conducted Output Power	-	-	-	Auto	Average	-	Power Meter (Sensor: 160 MHz BW) (Method PM-G)
Maximum Power Spectral Density	Encompass the entire EBW	1 MHz or 100 kHz *2)	≥ 3 RBW	Auto	RMS Power Averaging (100 times)	Clear Write	Spectrum Analyzer
Conducted Spurious Emission*3)	9 kHz – 150 kHz 150 kHz – 30 MHz	200 Hz 10 kHz	620 Hz 30 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

\* The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r03 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on August 22, 2016)".

\*2) KDB 789033 D02 says that RBW is set to be 500 kHz for 5.725 GHz-5.850 GHz, but it is not possible with spectrum analyzer, so RBW Correction Factor ( $10 \log(500 \text{ kHz} / 100 \text{ kHz})$ ) was added to the test result.

\*3) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz-150 kHz: RBW = 200 Hz, 150 kHz-30 MHz: RBW = 10 kHz)

The test results and limit are rounded off to two decimals place, so some differences might be observed.

**Test data** : APPENDIX  
**Test result** : Pass

**APPENDIX 1: Test data**

**Conducted Emission**

**DATA OF CONDUCTED EMISSION TEST**


UL Japan, Inc. Shonan EMC Lab. No.3 Shielded Room  
Date : 2016/11/14

Mode : Tx IEEE802.11ac-VHT20 5260 MHz  
Power : AC 120 V / 60 Hz  
Temp./Humi. : 23 deg.C / 45 %RH

Remarks : SISO

Limit1 : FCC 15C (15.207) QP  
Limit2 : FCC 15C (15.207) AV

Engineer : Kazutaka Takeyama

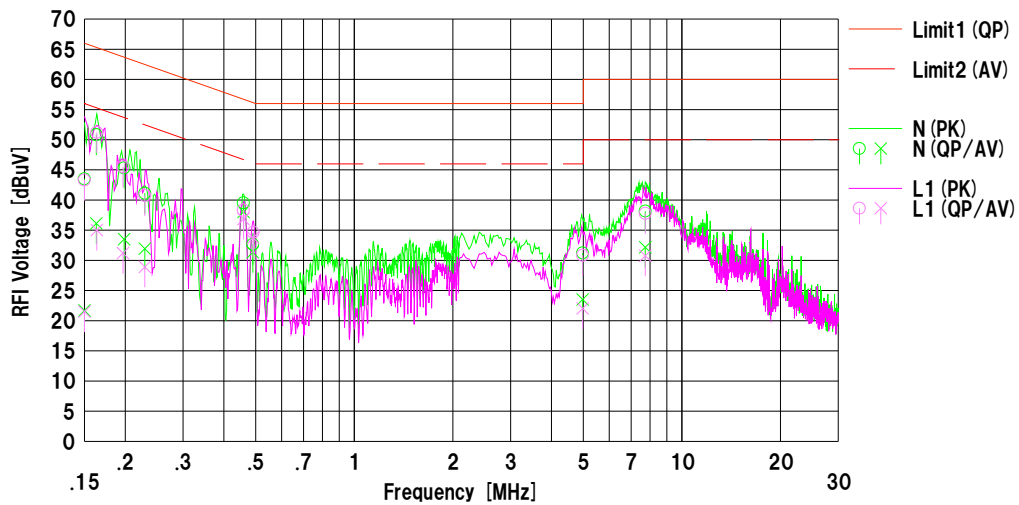

No.	Freq. [MHz]	Reading		C.Fac [dB]	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]		<QP> [dBuV]	<AV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.15000	31.00	9.20	12.51	43.51	21.71	66.00	56.00	22.4	34.2	N	
2	0.16327	38.30	23.60	12.52	50.82	36.12	65.30	55.30	14.4	19.1	N	
3	0.19844	32.80	21.00	12.51	45.31	33.51	63.68	53.68	18.3	20.1	N	
4	0.22960	28.60	19.40	12.53	41.13	31.93	62.46	52.46	21.3	20.5	N	
5	0.45898	27.00	25.50	12.54	39.54	38.04	56.71	46.71	17.1	8.6	N	
6	0.49031	20.10	18.80	12.54	32.64	31.34	56.16	46.16	23.5	14.8	N	
7	4.98000	18.20	10.50	13.03	31.23	23.53	56.00	46.00	24.7	22.4	N	
8	7.73664	24.80	18.80	13.37	38.17	32.17	60.00	50.00	21.8	17.8	N	
9	0.15000	30.80	9.00	12.51	43.31	21.51	66.00	56.00	22.6	34.4	L1	
10	0.16370	38.70	22.50	12.52	51.22	35.02	65.27	55.27	14.0	20.2	L1	
11	0.19680	33.00	18.70	12.51	45.51	31.21	63.74	53.74	18.2	22.5	L1	
12	0.22960	28.20	16.40	12.53	40.73	28.93	62.46	52.46	21.7	23.5	L1	
13	0.45898	25.80	24.30	12.54	38.34	36.84	56.71	46.71	18.3	9.8	L1	
14	0.49160	22.10	21.20	12.54	34.64	33.74	56.14	46.14	21.5	12.4	L1	
15	4.98400	17.80	9.00	13.03	30.83	22.03	56.00	46.00	25.1	23.9	L1	
16	7.73700	24.40	17.40	13.37	37.77	30.77	60.00	50.00	22.2	19.2	L1	

Calculation: Result [dBuV] = Reading [dBuV] + C.Fac (LISN+Cable+ATT) [dB]  
LISN: SLS-02

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

---


## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place                      Shonan EMC Lab. No.1 Measurement Room  
Report No.                      11334871S-E-R1  
Date                              November 21, 2016                      December 2, 2016  
Temperature / Humidity        24 deg. C / 49 % RH                      24 deg. C / 38 % RH  
Engineer                        Kenichi Adachi                              Shinichi Takano  
Mode                              Tx 11a

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5180	-	17.117	-
	5220	-	17.147	-
	5240	-	17.133	-
	5260	20.782	17.082	-
	5300	20.950	17.084	-
	5320	20.919	17.053	-
	5500	20.601	17.105	-
	5580	20.782	17.064	-
	5700	20.797	17.134	-
	5745	-	17.157	-
	5785	-	17.130	-
	5825	-	17.075	-

## 26 dB Emission Bandwidth

### Tx 11a, Antenna 0 (worst port)

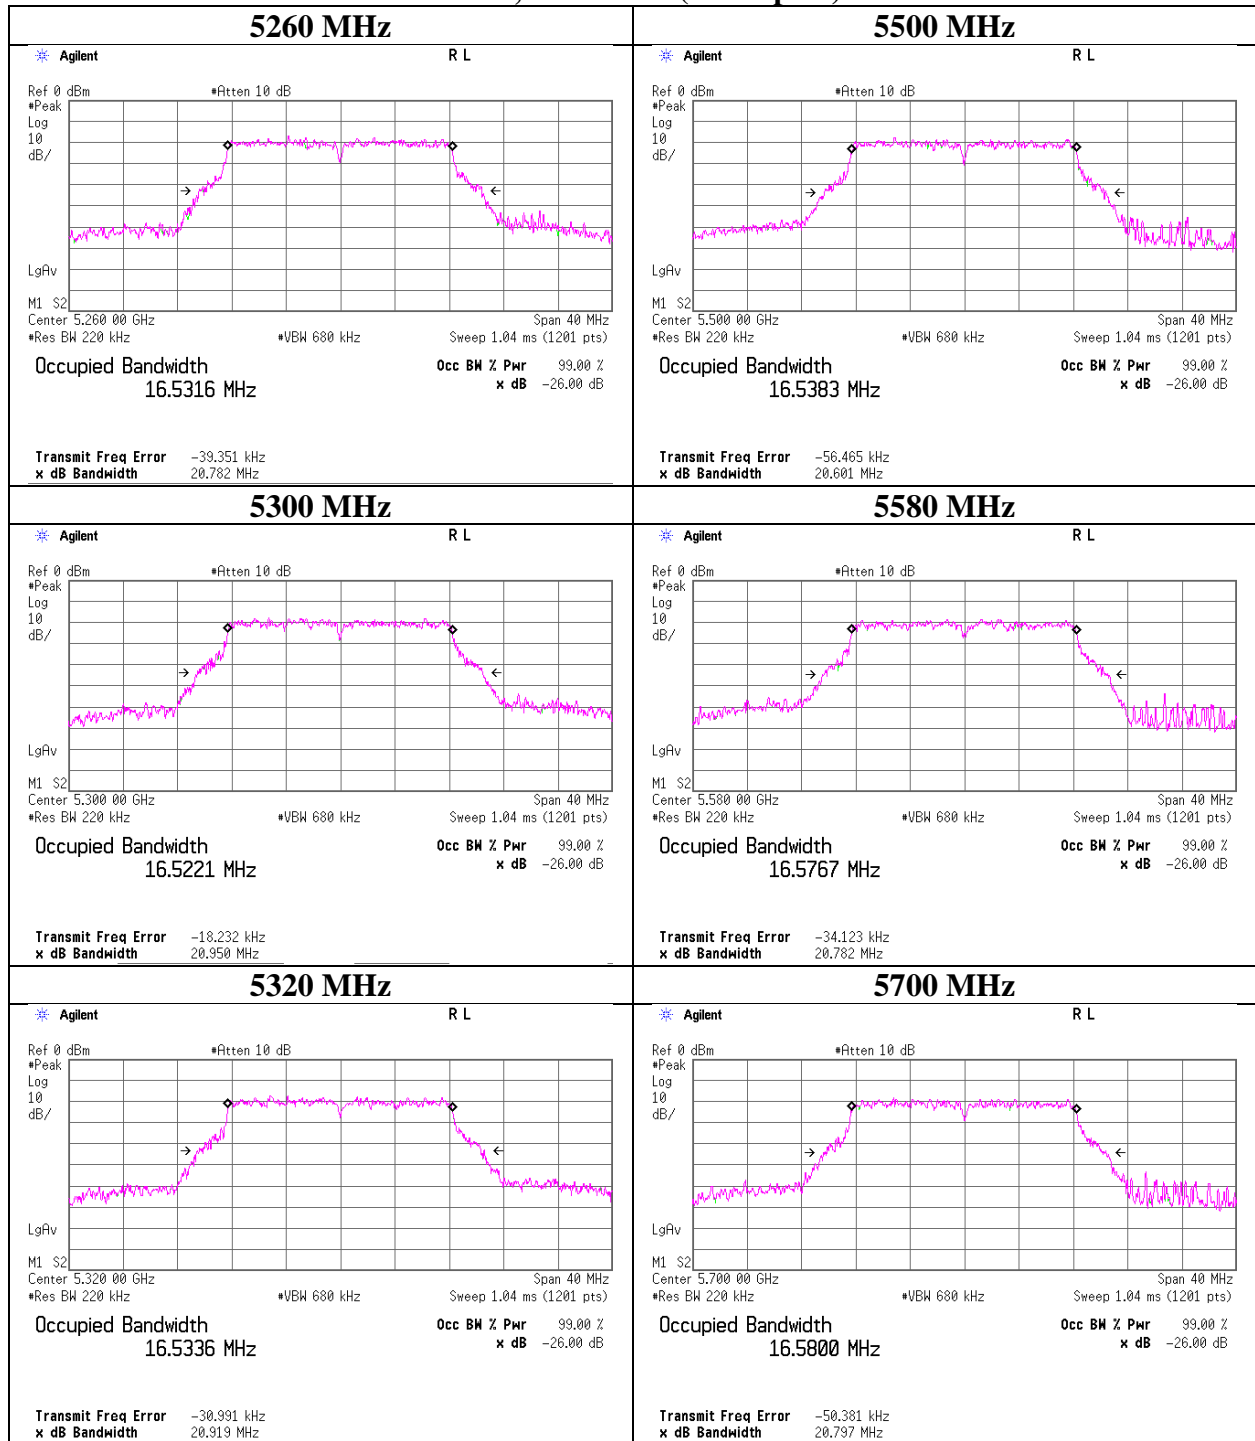

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## 99 % Occupied Bandwidth

### Tx 11a, Antenna 0 (worst port)

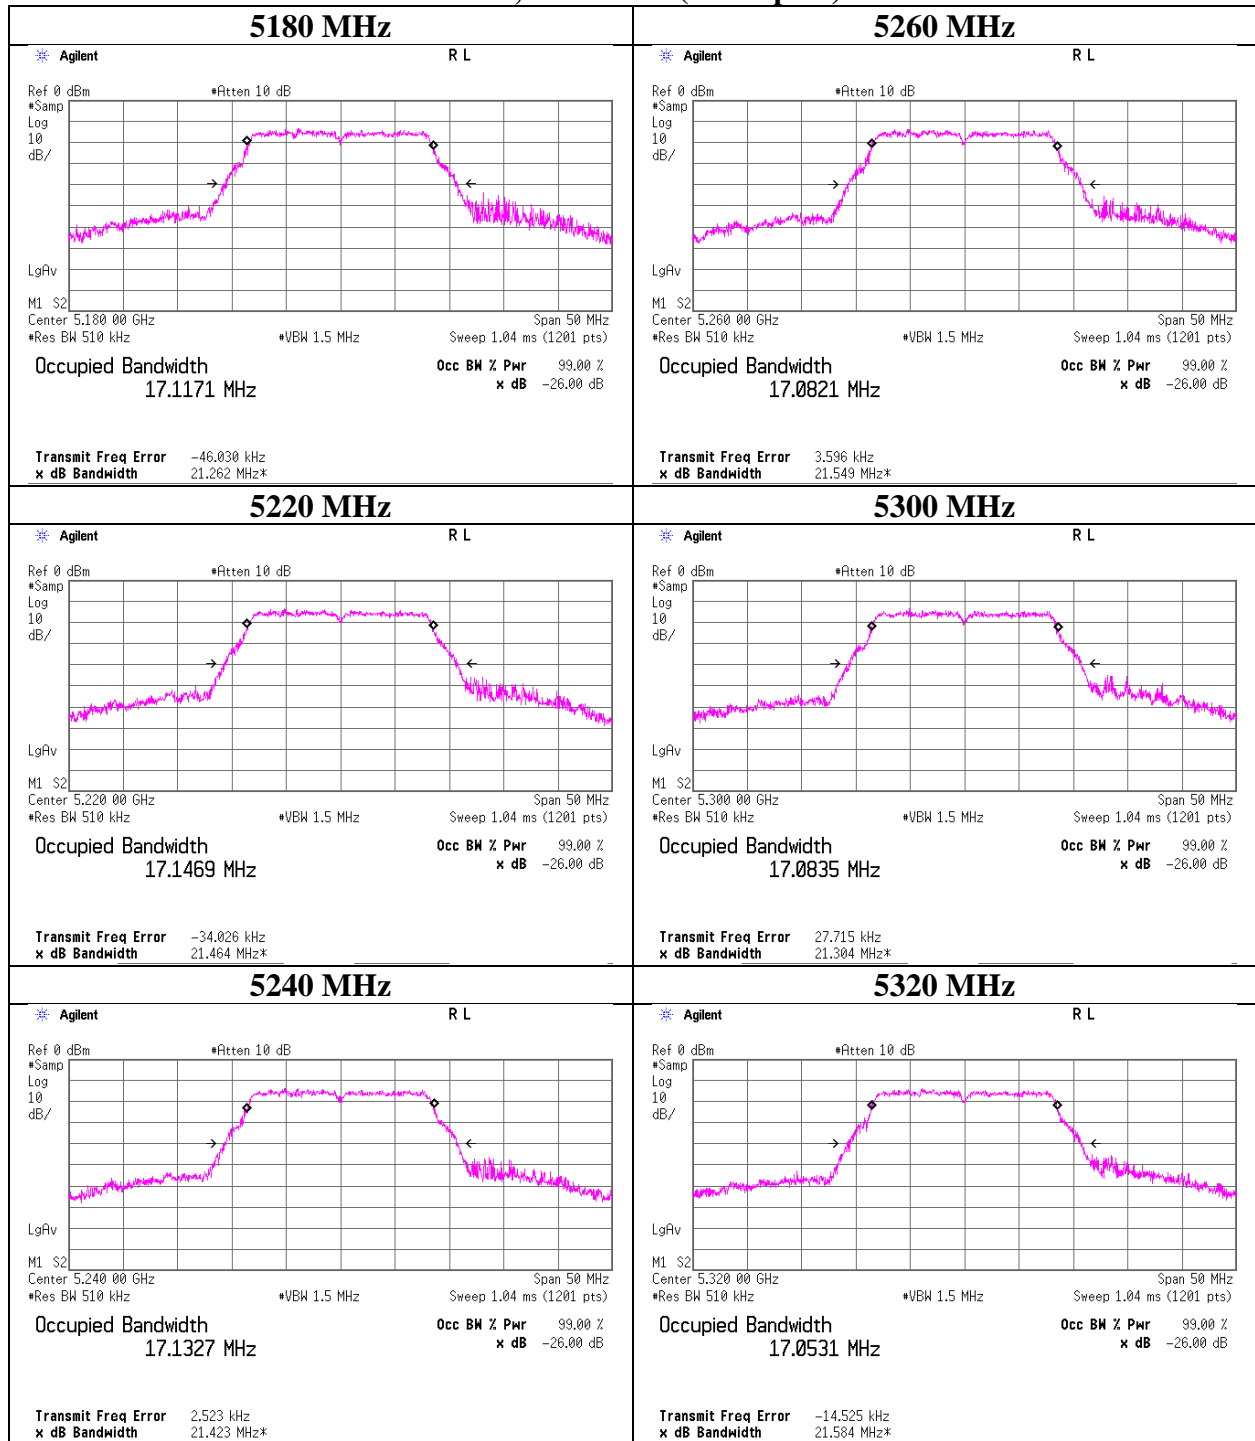

## 99 % Occupied Bandwidth

### Tx 11a, Antenna 0 (worst port)

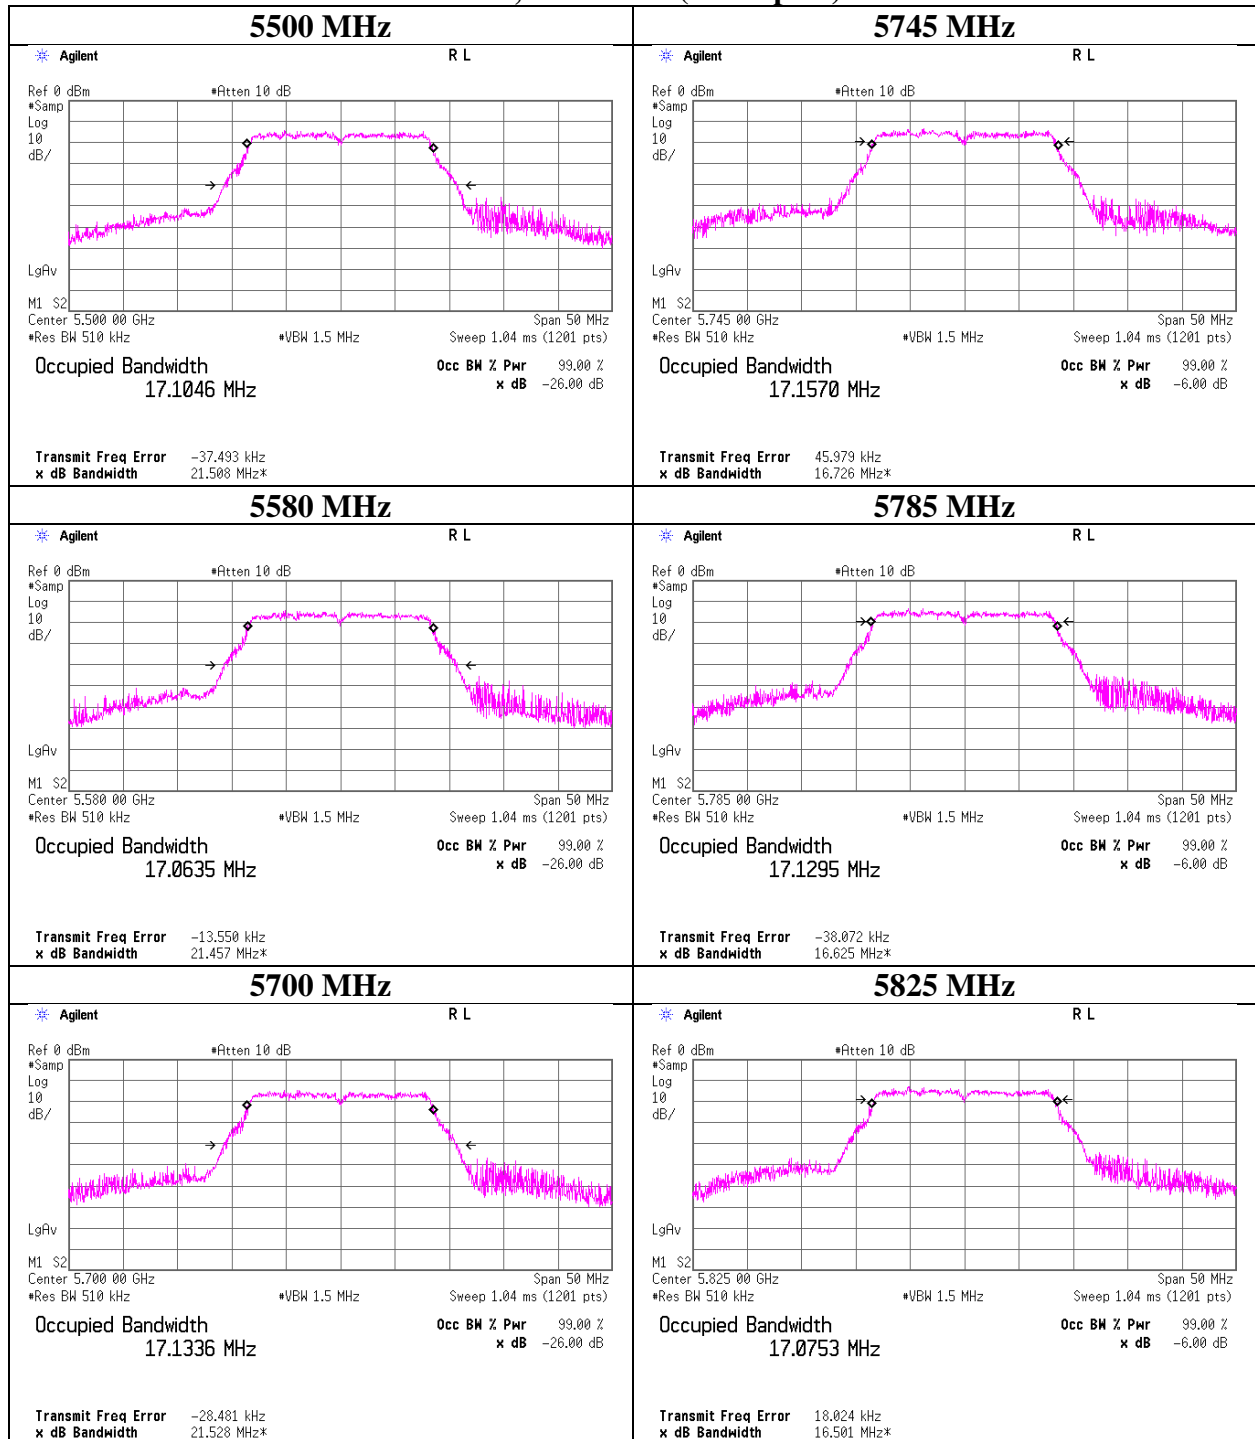

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

---


**26 dB Emission Bandwidth and 99 % Occupied Bandwidth**

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, SISO	

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5180	-	18.195	-
	5220	-	18.182	-
	5240	-	18.229	-
	5260	20.967	18.234	-
	5300	21.112	18.252	-
	5320	21.452	18.195	-
	5500	21.597	18.322	-
	5580	21.279	18.209	-
	5700	21.078	18.220	-
	5745	-	18.186	-
	5785	-	18.202	-
	5825	-	18.158	-

## 26 dB Emission Bandwidth


### Tx 11n-20, SISO, Antenna 0 (worst port)

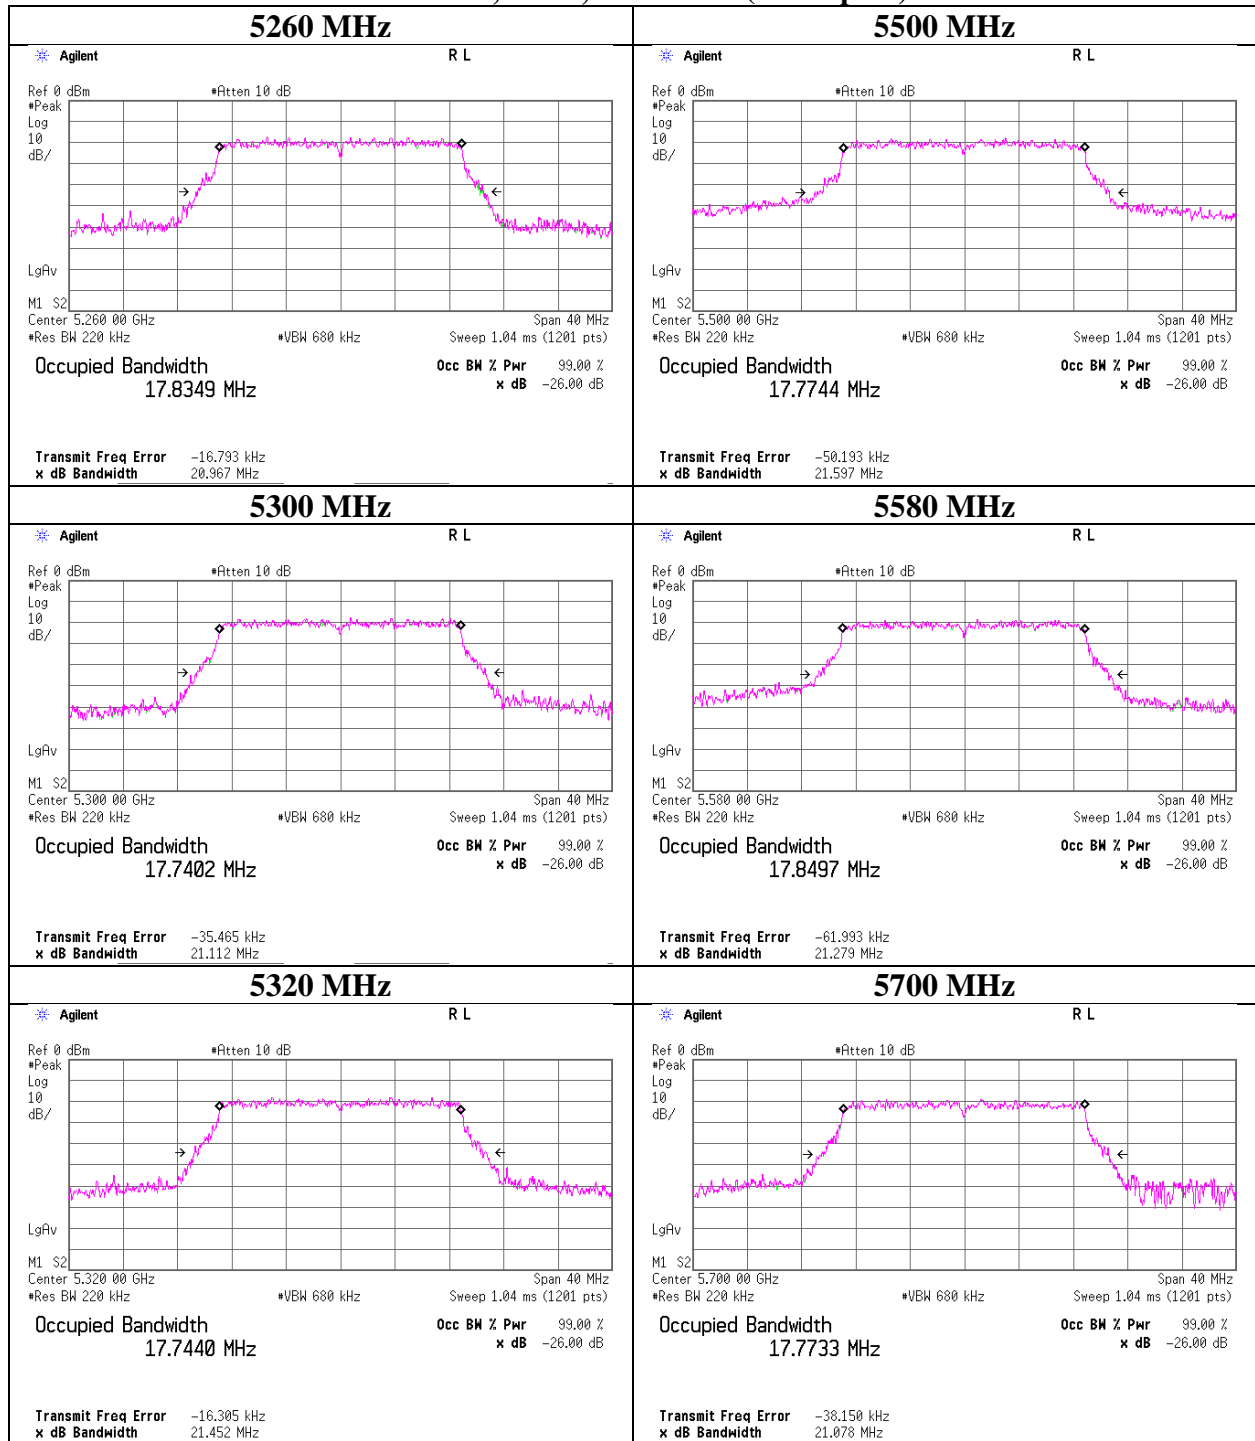



## 99 % Occupied Bandwidth

### Tx 11n-20, SISO, Antenna 0 (worst port)

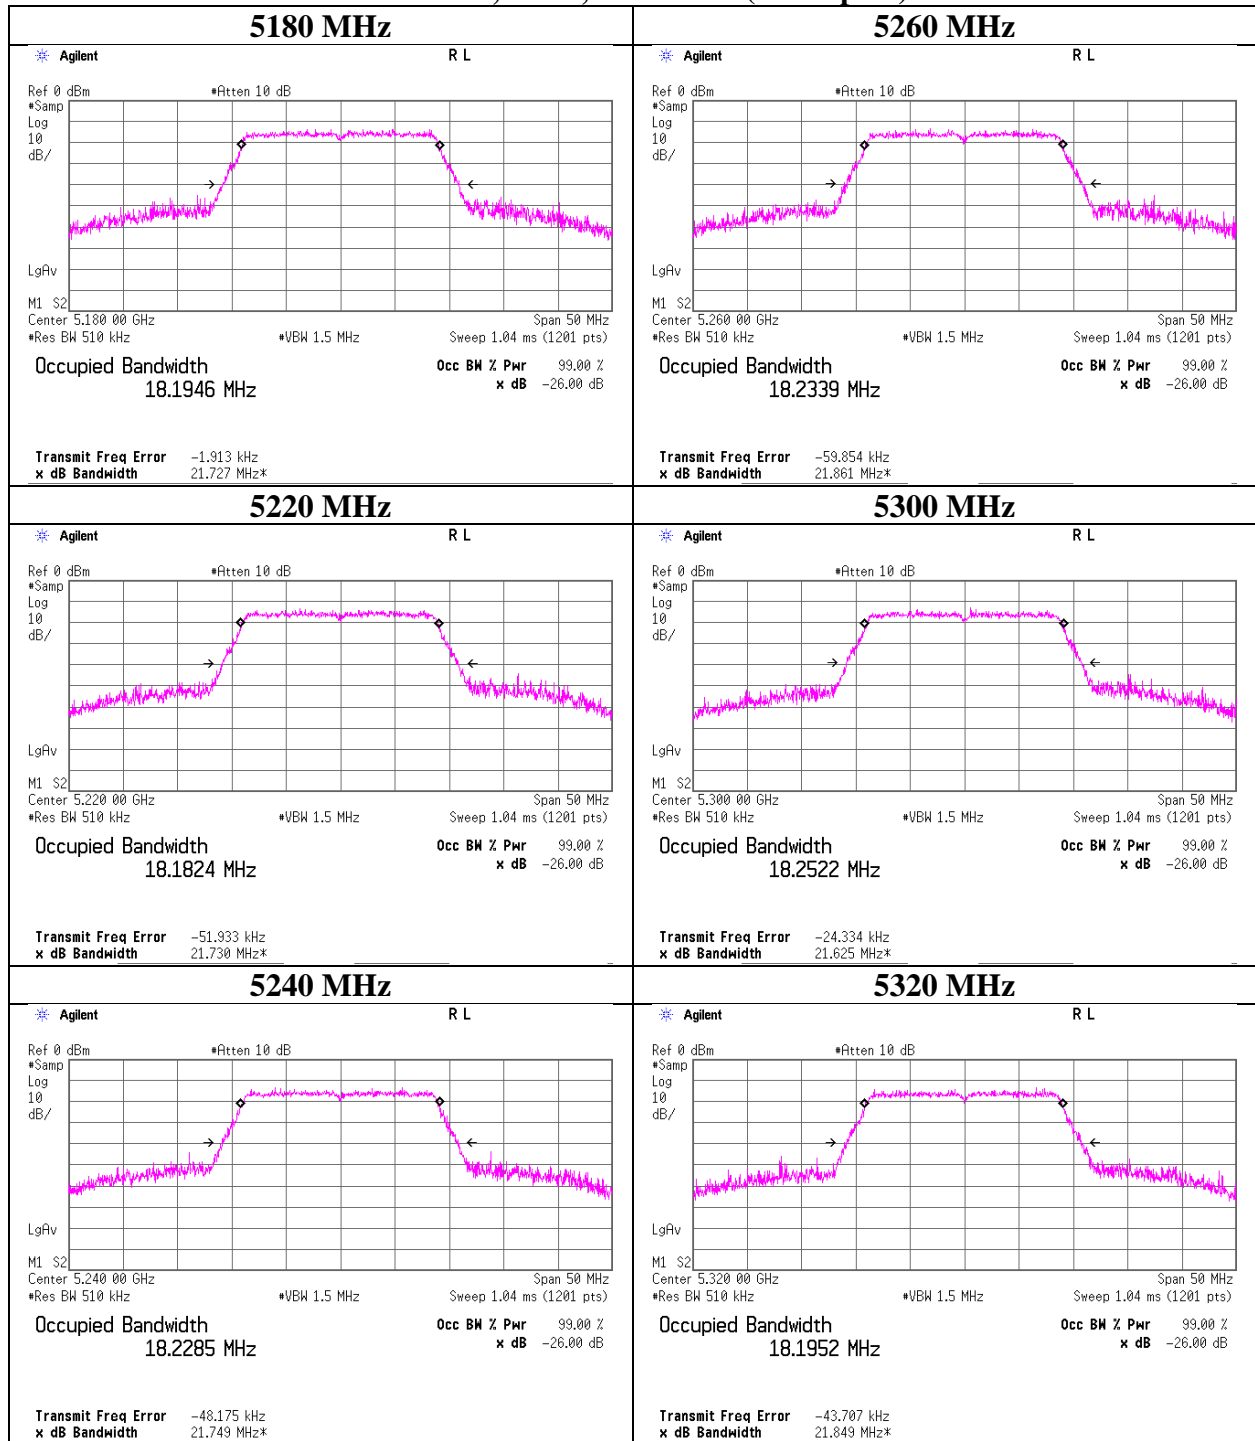

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 99 % Occupied Bandwidth

### Tx 11n-20, SISO, Antenna 0 (worst port)

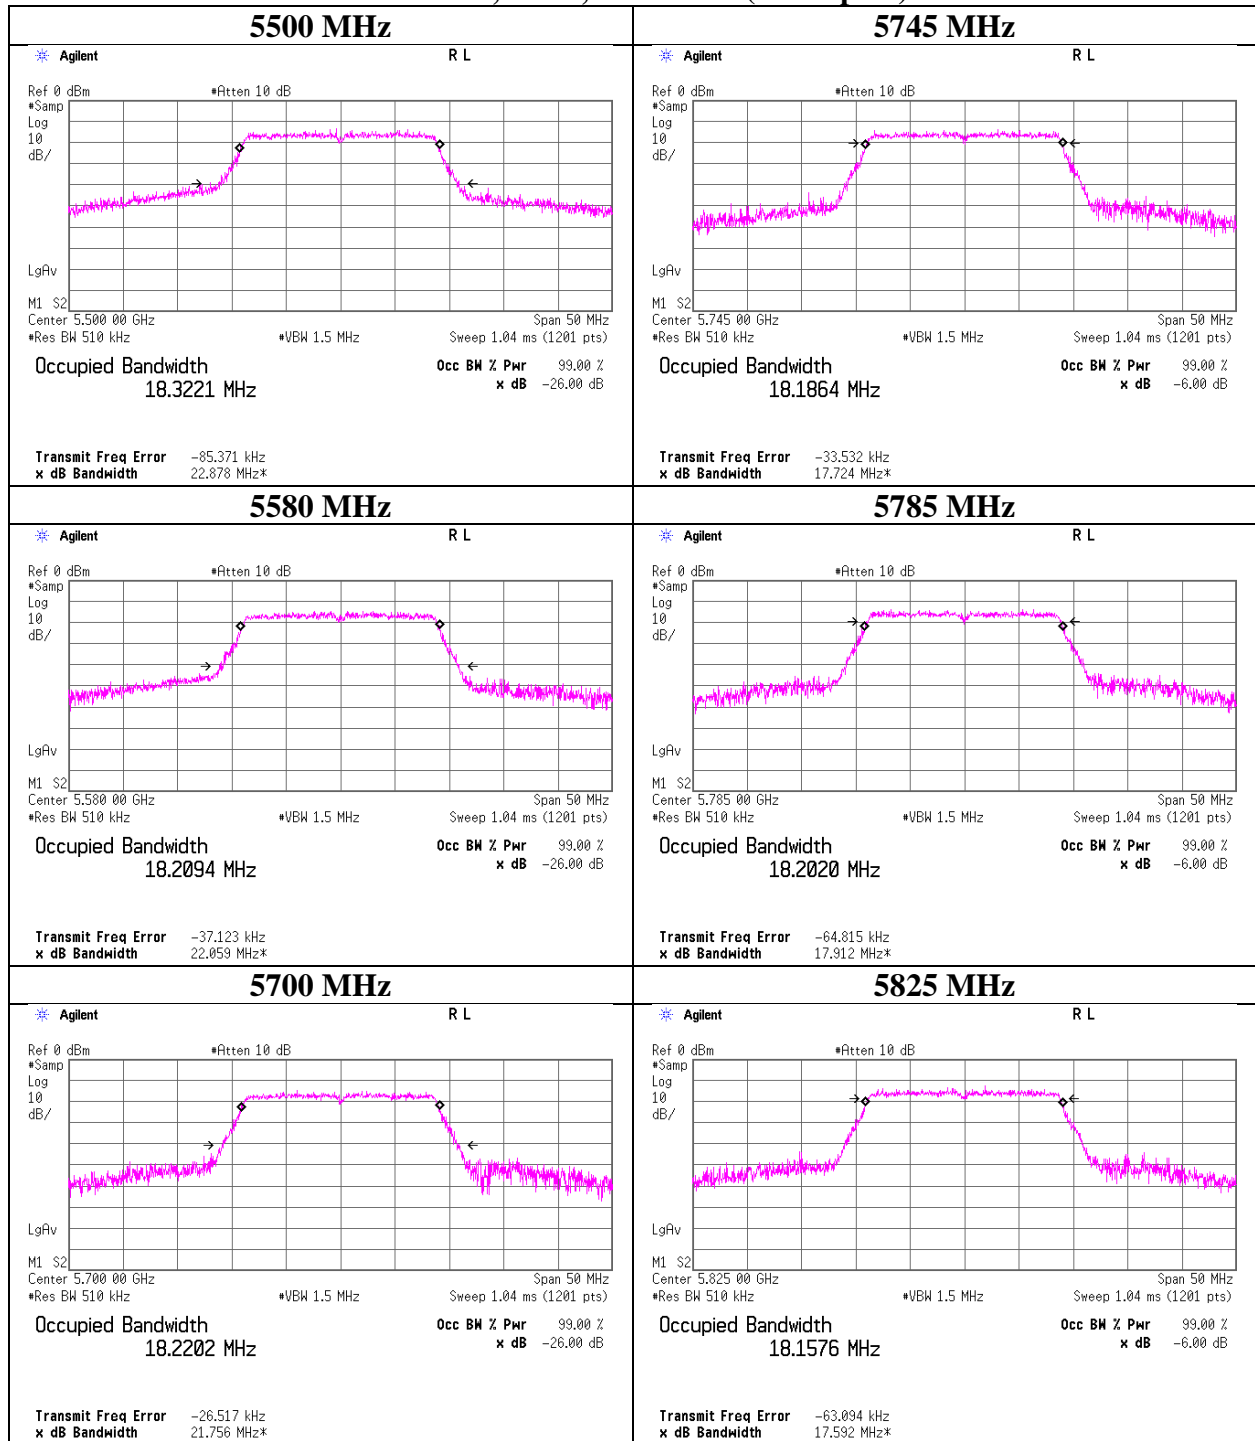

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

---


## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place Shonan EMC Lab. No.1 Measurement Room  
Report No. 11334871S-E-R1  
Date November 21, 2016 December 2, 2016  
Temperature / Humidity 24 deg. C / 49 % RH 24 deg. C / 38 % RH  
Engineer Kenichi Adachi Shinichi Takano  
Mode Tx 11ac-20, SISO

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5180	-	18.213	-
	5220	-	18.259	-
	5240	-	18.309	-
	5260	21.190	18.246	-
	5300	21.151	18.293	-
	5320	21.146	18.231	-
	5500	21.159	18.215	-
	5580	21.319	18.216	-
	5700	21.155	18.197	-
	5745	-	18.204	-
	5785	-	18.315	-
	5825	-	18.247	-


## 26 dB Emission Bandwidth

### Tx 11ac-20, SISO, Antenna 0 (worst port)

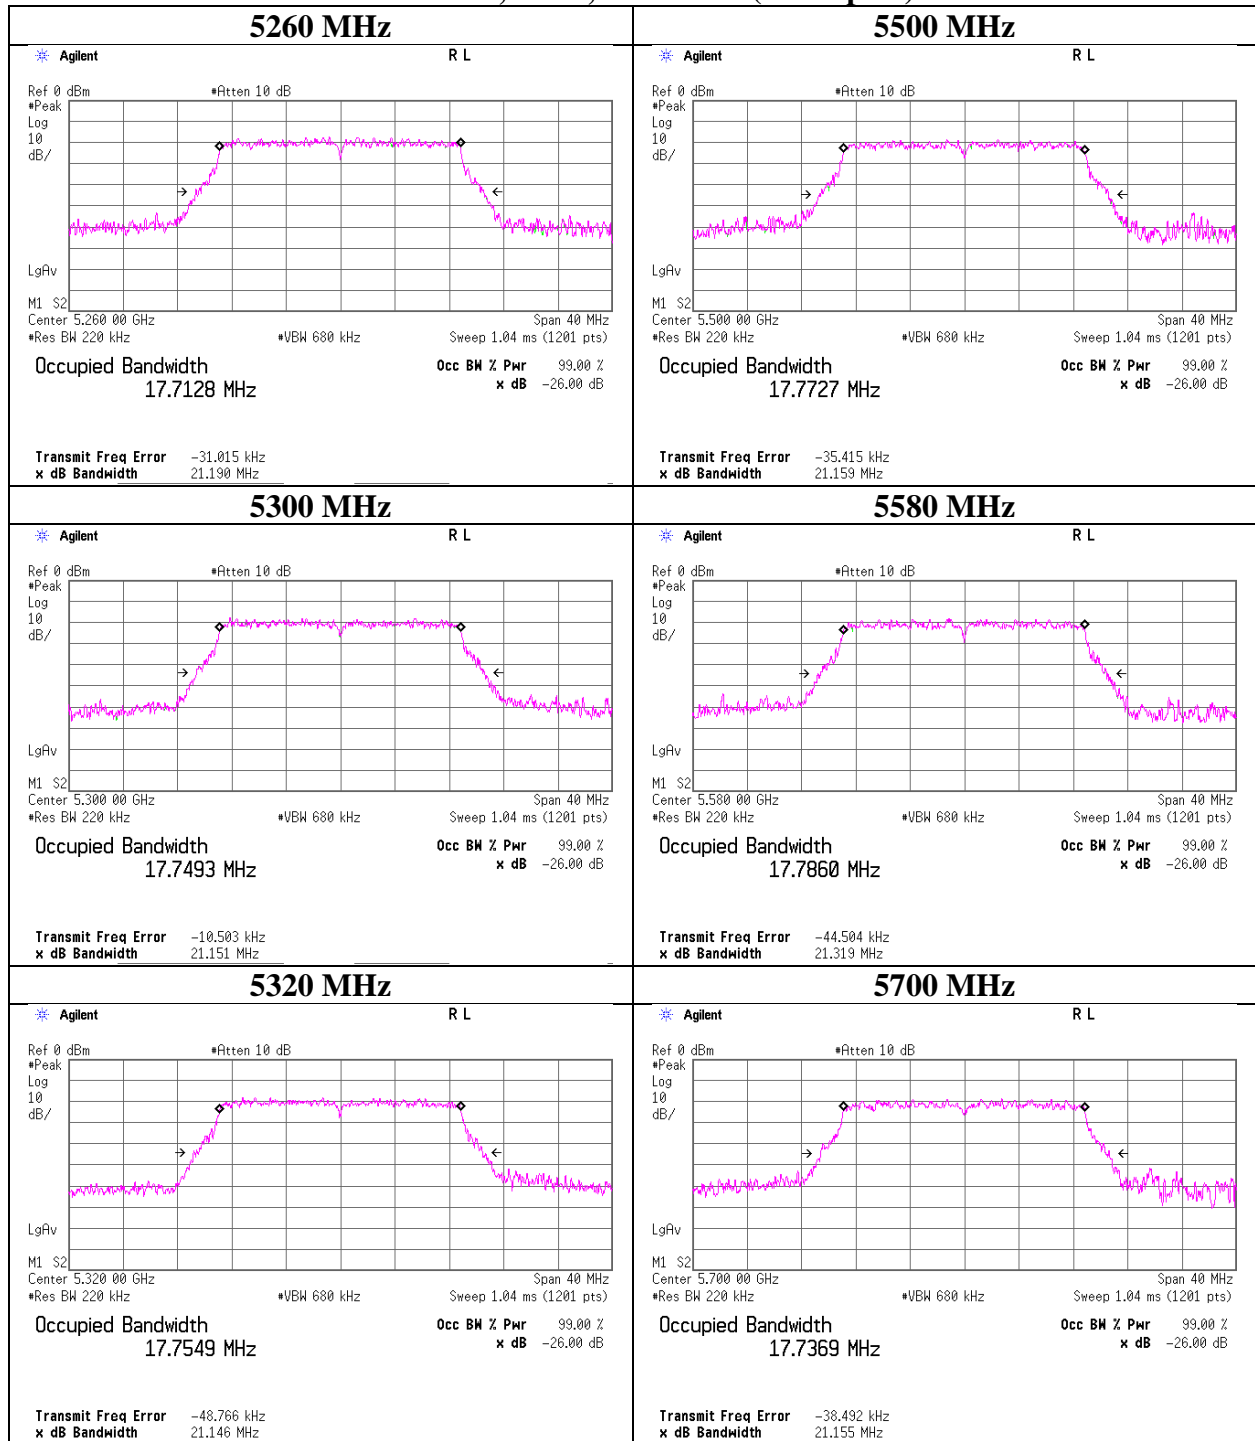


## 99 % Occupied Bandwidth

### Tx 11ac-20, SISO, Antenna 0 (worst port)

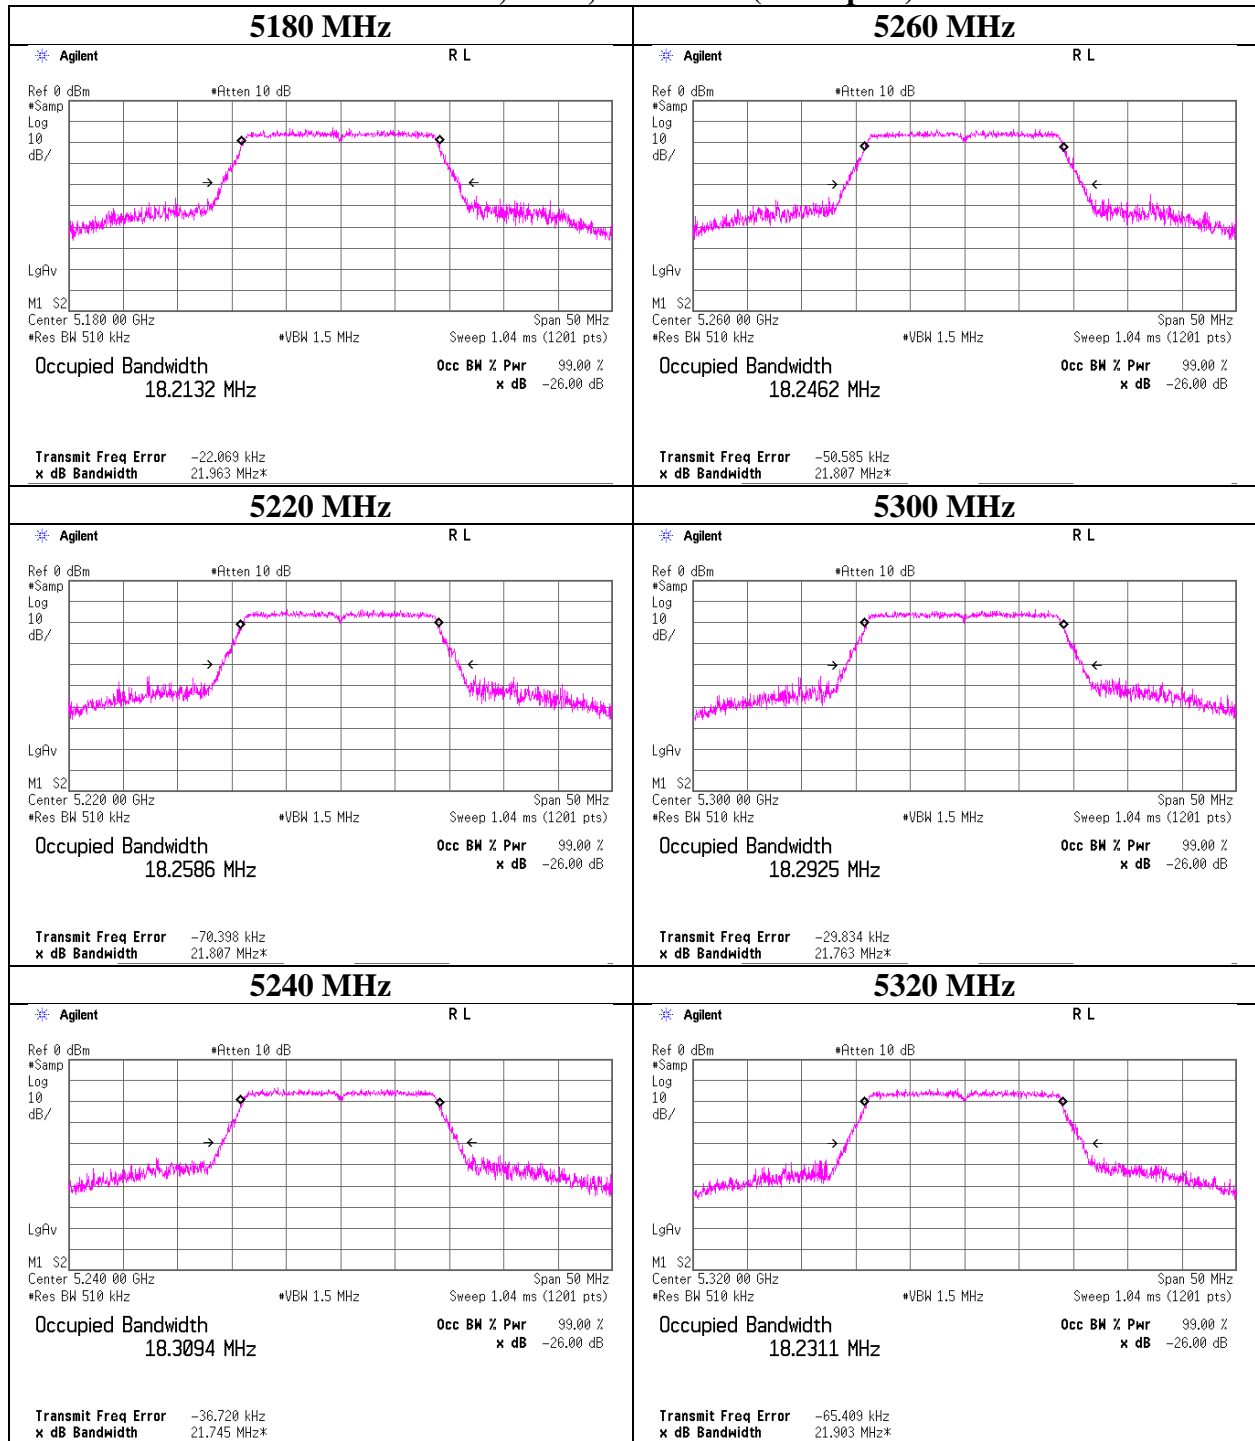

## 99 % Occupied Bandwidth

### Tx 11ac-20, SISO, Antenna 0 (worst port)

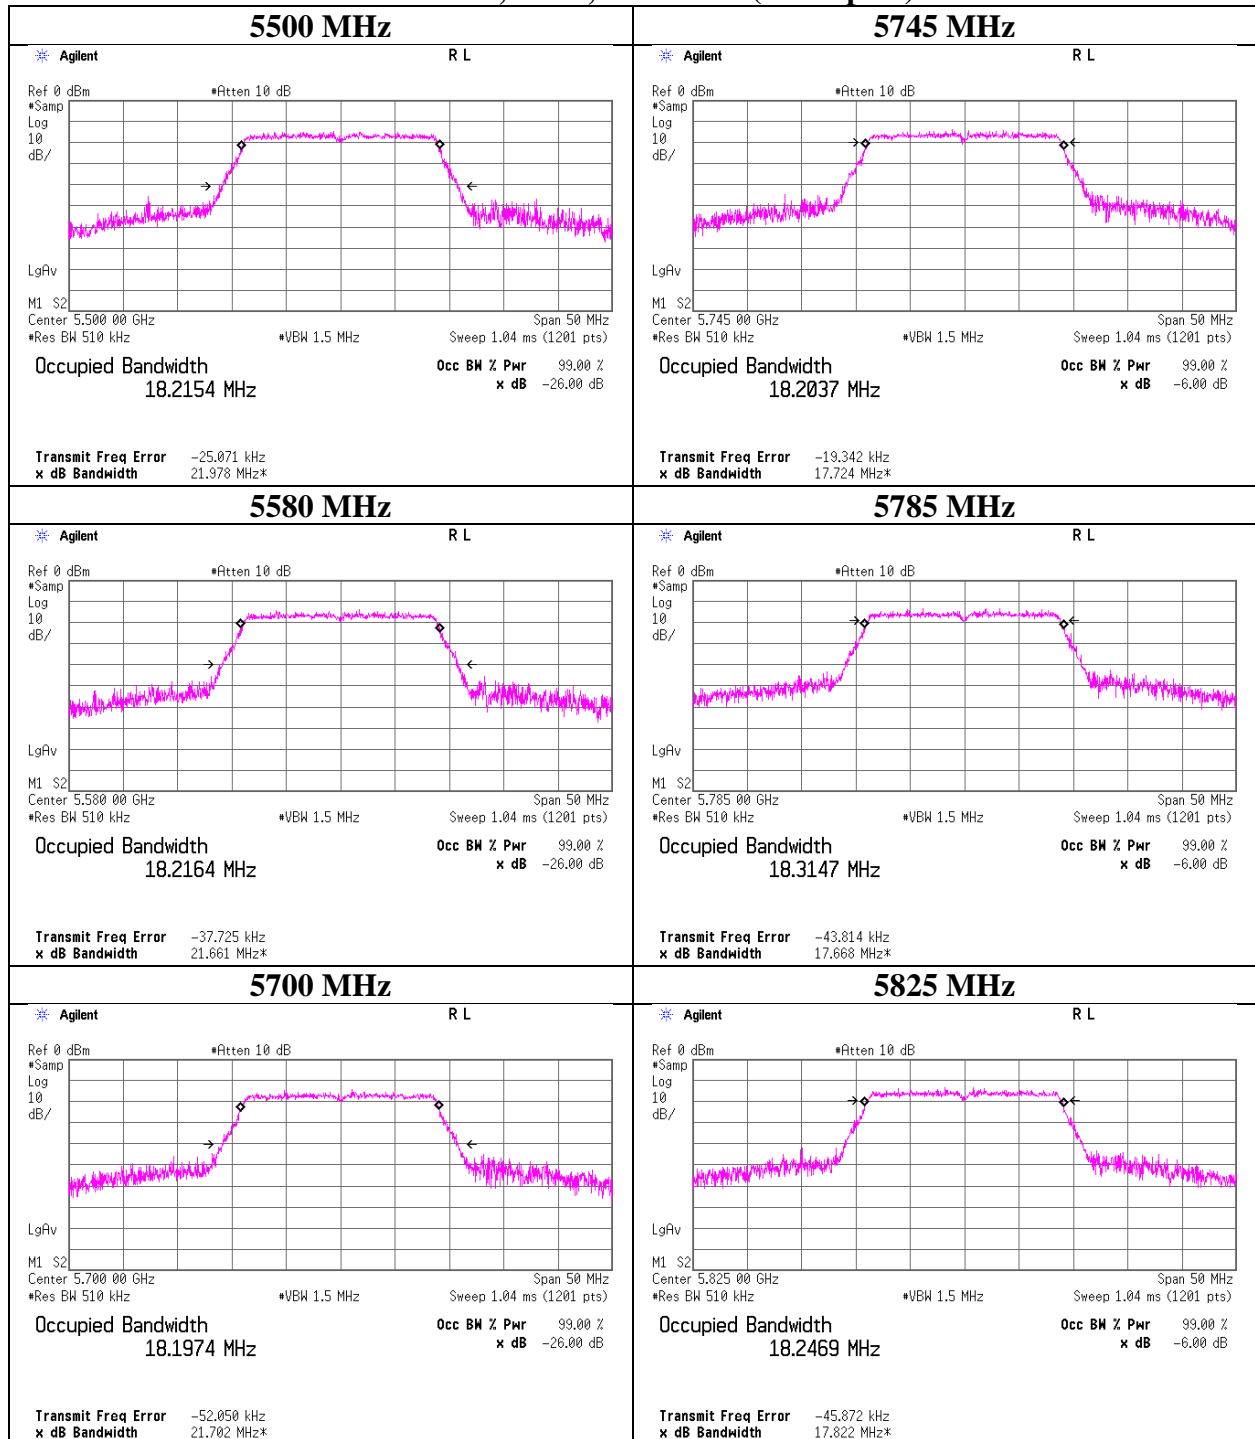

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 21, 2016
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Kenichi Adachi
Mode	Tx 11n-40, SISO


Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5190	-	36.639	-
	-	-	-	-
	5230	-	36.620	-
	5270	38.995	36.729	-
	-	-	-	-
	5310	39.558	36.685	-

### 26 dB Emission Bandwidth Tx 11n-40, SISO, Antenna 0 (worst port)

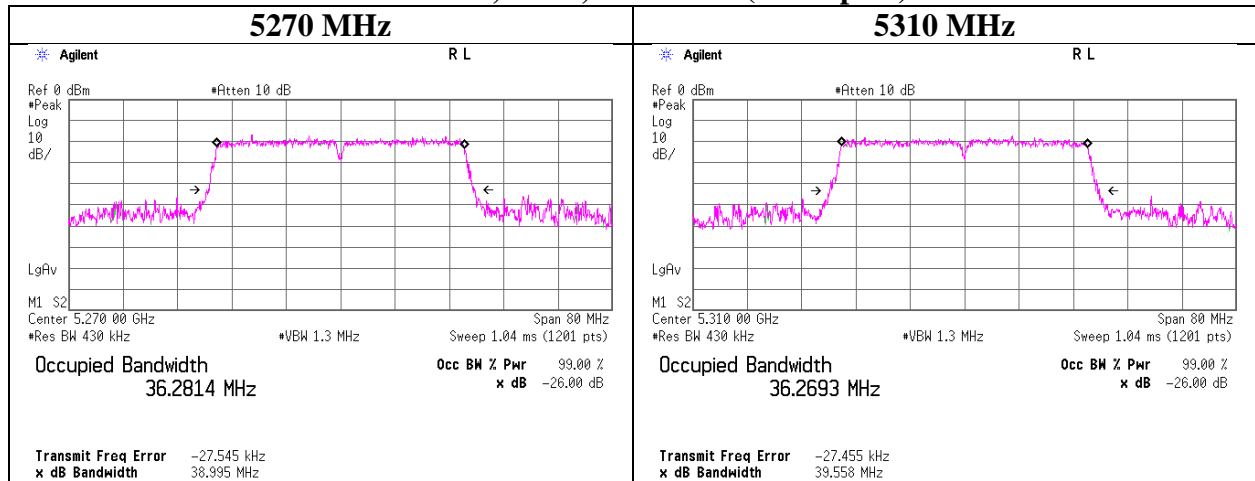

## 99 % Occupied Bandwidth

### Tx 11n-40, SISO, Antenna 0 (worst port)

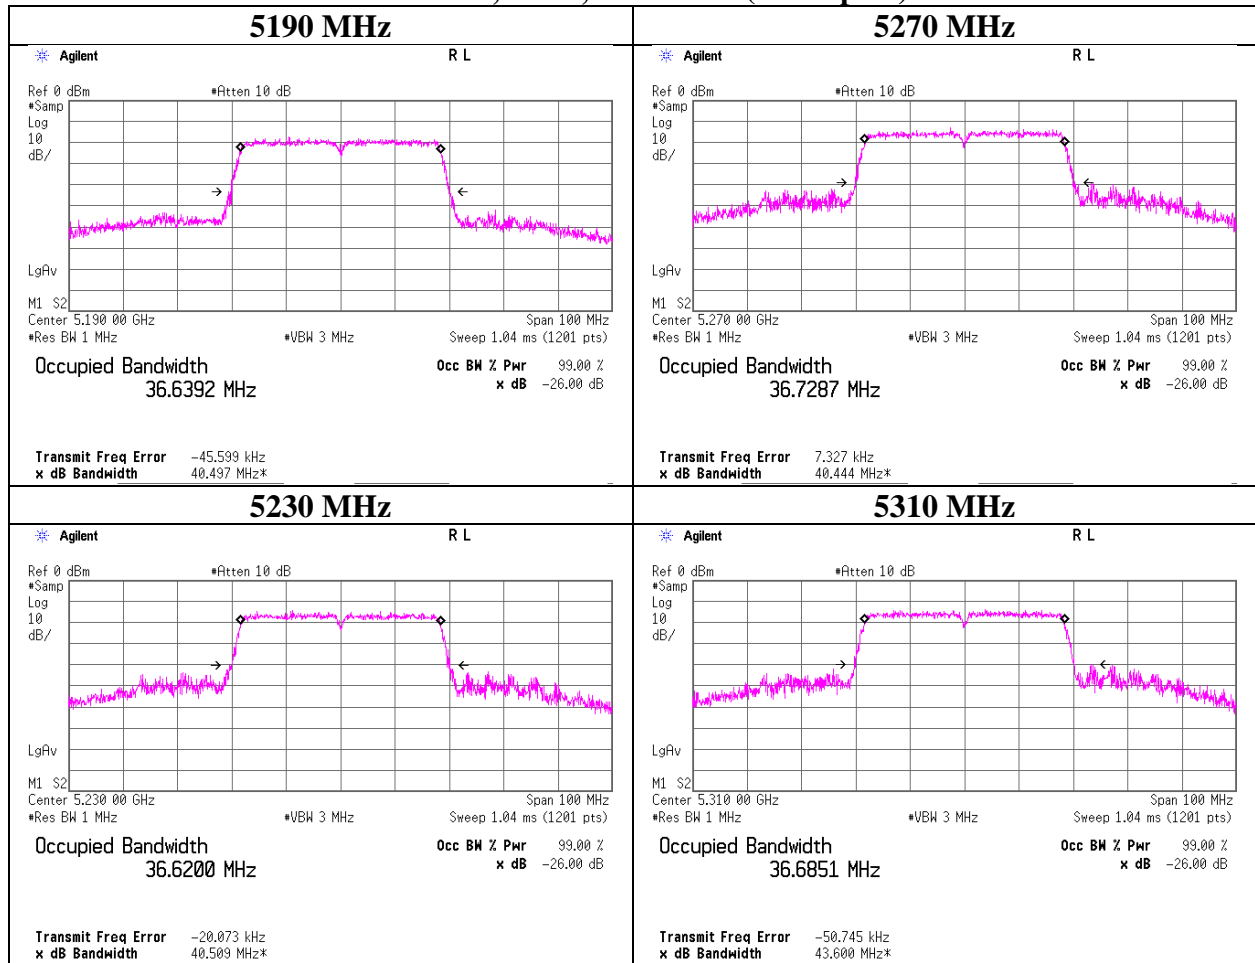

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401




## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 21, 2016
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-40, SISO


Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5190	-	36.494	-
	-	-	-	-
	5230	-	36.632	-
	5270	39.881	36.629	-
	-	-	-	-
	5310	39.181	36.578	-

### 26 dB Emission Bandwidth Tx 11ac-40, SISO, Antenna 0 (worst port)

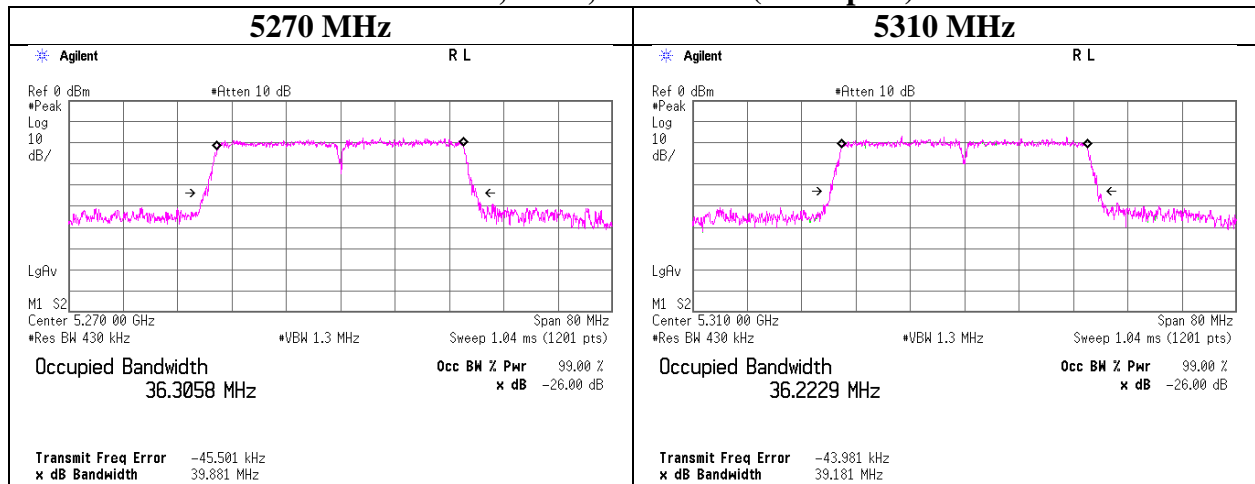

## 99 % Occupied Bandwidth

### Tx 11n-40, SISO, Antenna 0 (worst port)

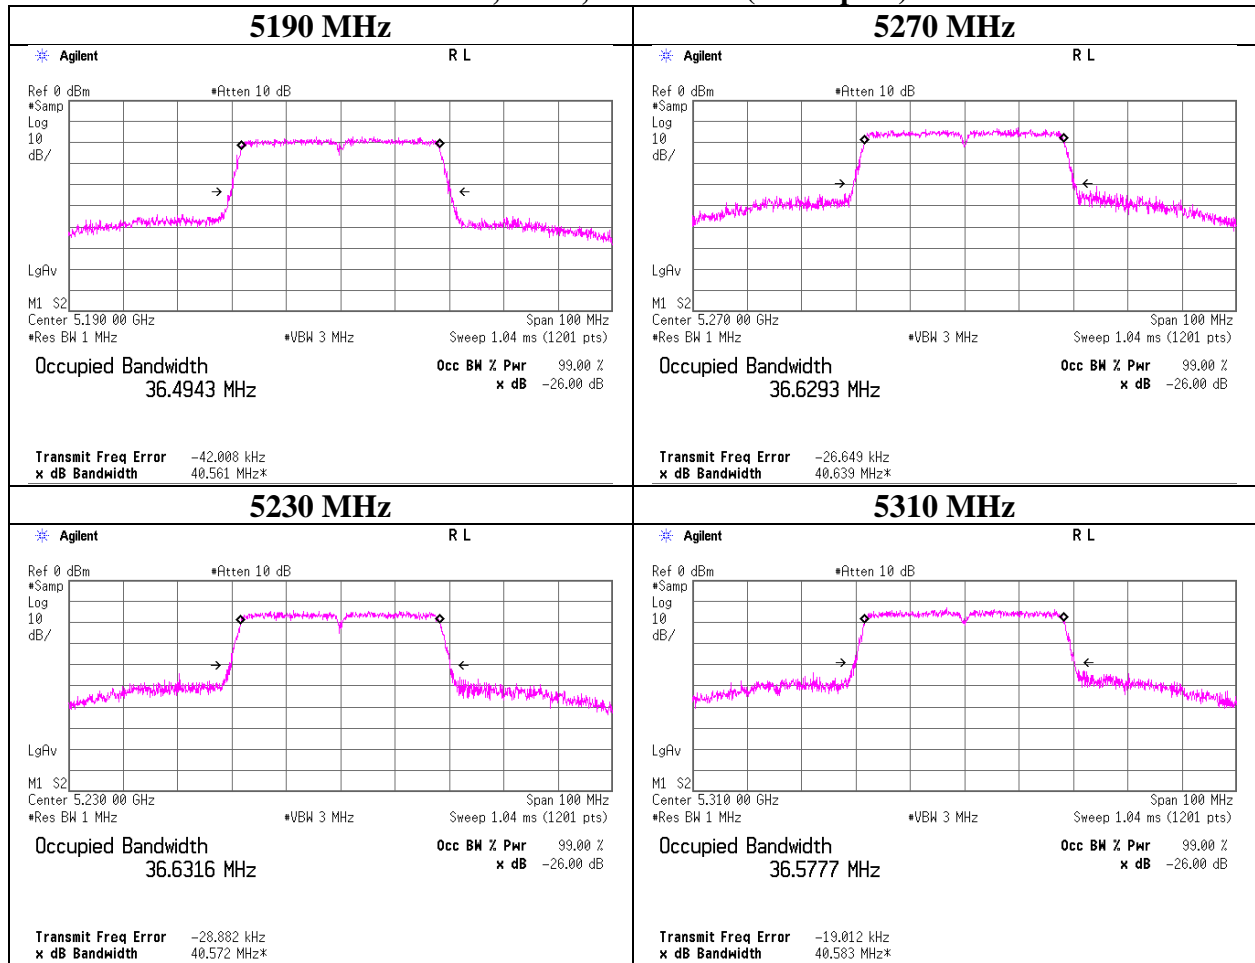

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

---


**26 dB Emission Bandwidth and 99 % Occupied Bandwidth**

Test place : Shonan EMC Lab. No.1 Measurement Room  
 Report No. : 11334871S-E-R1  
 Date : November 21, 2016                      December 2, 2016  
 Temperature / Humidity : 24 deg. C / 49 % RH                      24 deg. C / 38 % RH  
 Engineer : Kenichi Adachi                      Shinichi Takano  
 Mode : Tx 11ac-80, SISO

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5210	-	76.025	-
	-	-	-	-
	-	-	-	-
	5290	80.060	76.231	-
	-	-	-	-
	-	-	-	-
	5530	80.001	76.007	-
	-	-	-	-
	5610	80.031	76.037	-
	5775	-	76.215	-
	-	-	-	-
	-	-	-	-


## 26 dB Emission Bandwidth

### Tx 11ac-80, SISO, Antenna 0 (worst port)

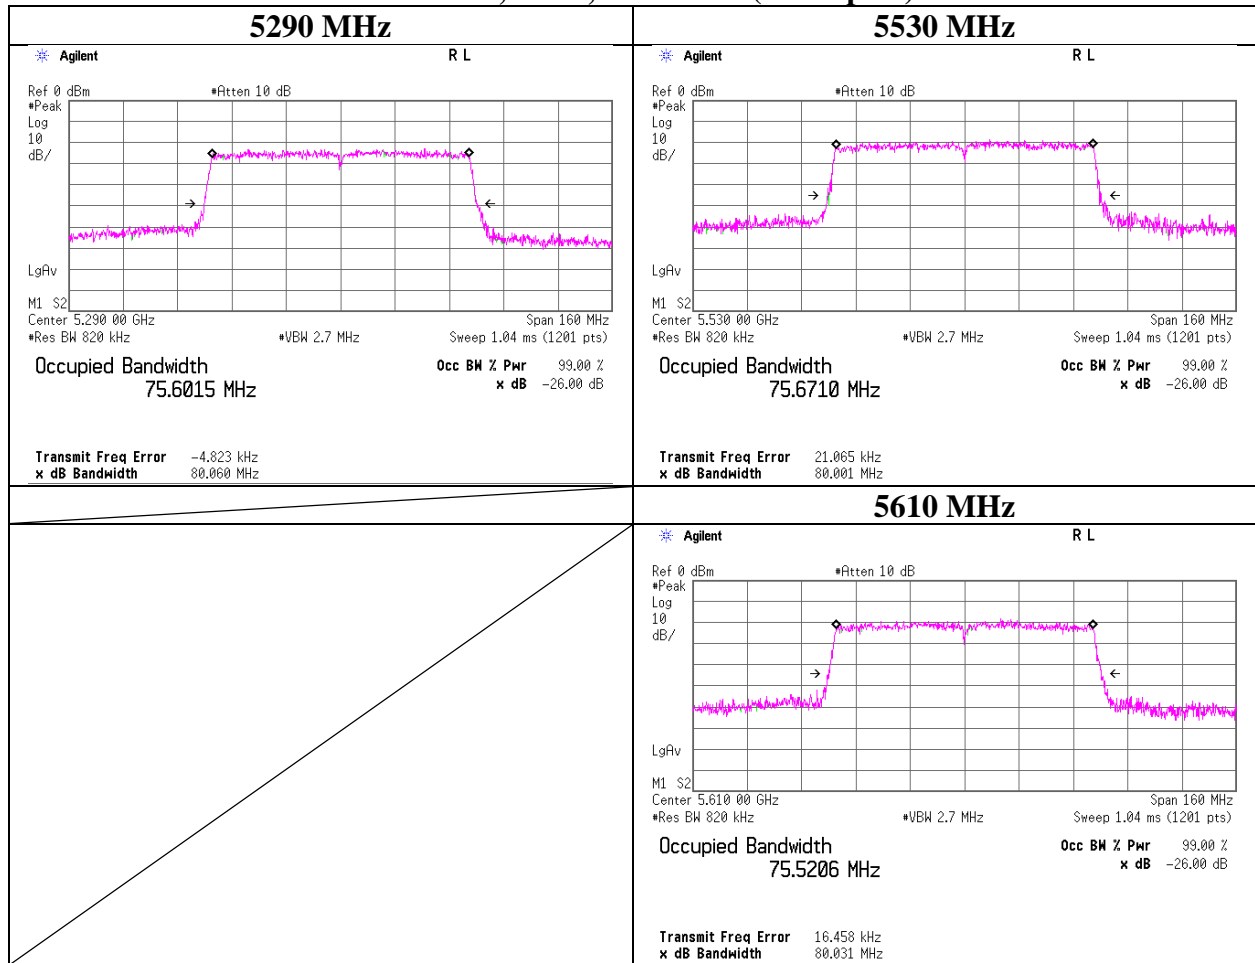

## 99 % Occupied Bandwidth

### Tx 11ac-80, SISO, Antenna 0 (worst port)

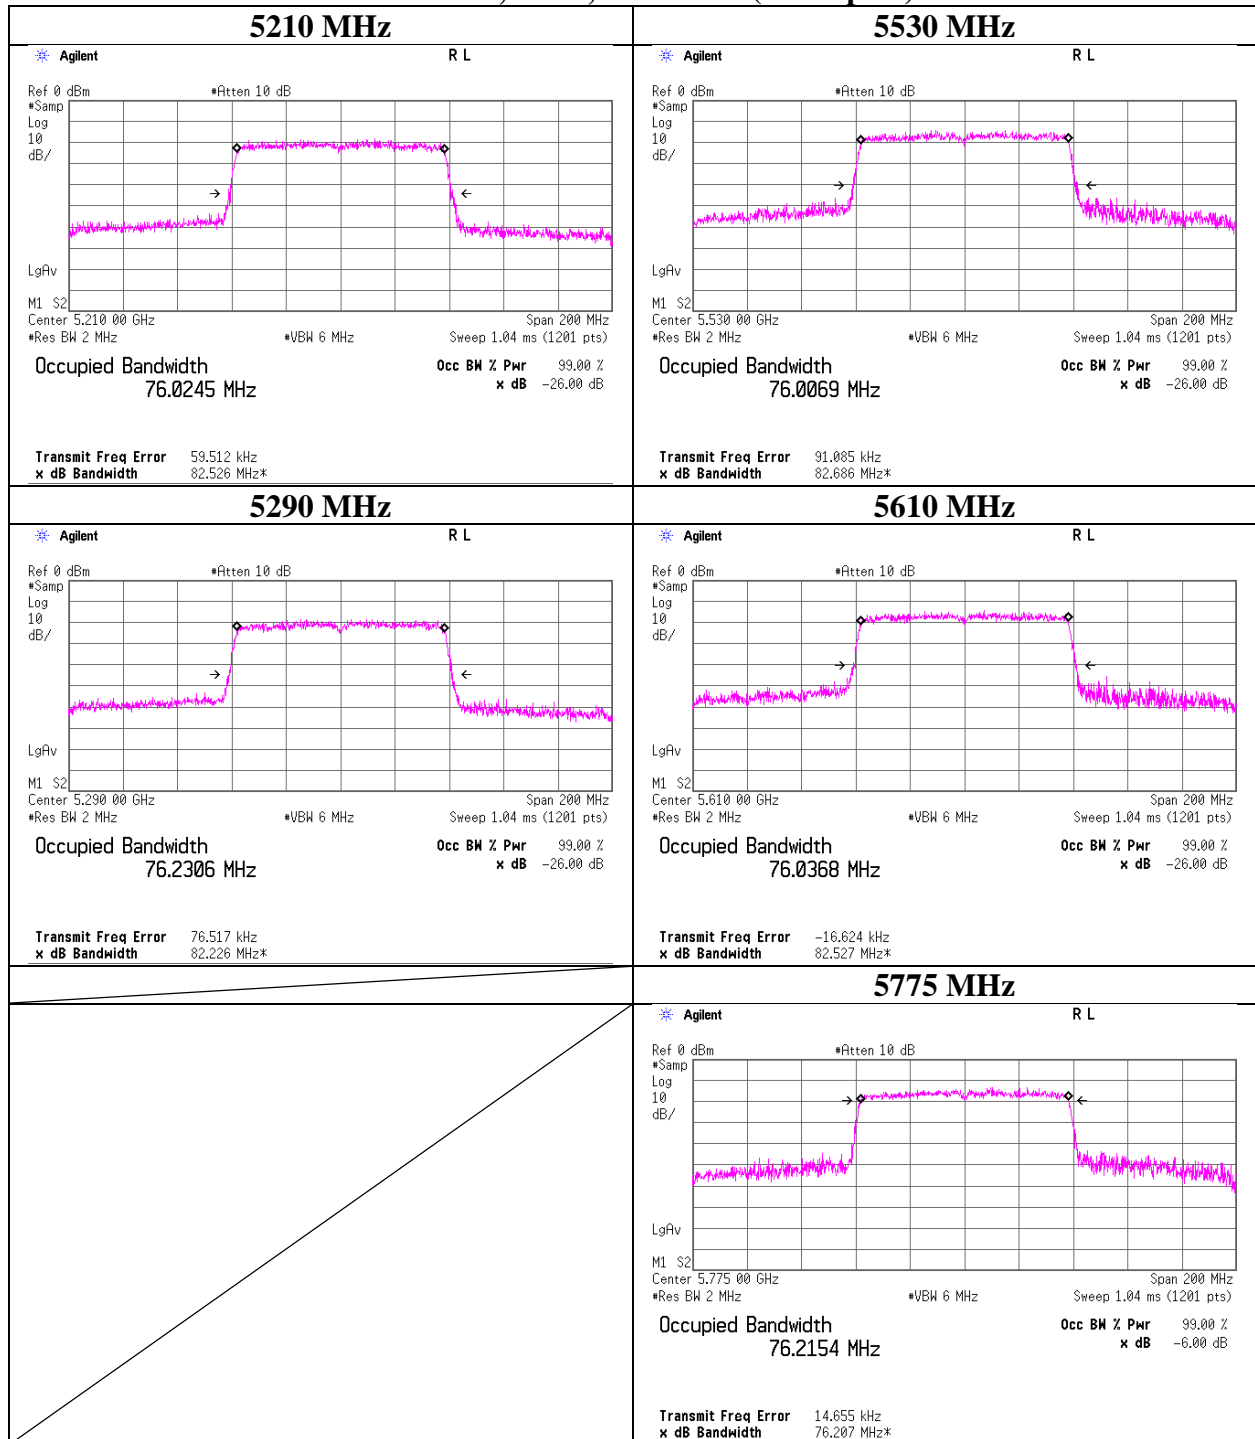

---


## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place Shonan EMC Lab. No.1 Measurement Room  
Report No. 11334871S-E-R1  
Date November 21, 2016 December 2, 2016  
Temperature / Humidity 24 deg. C / 49 % RH 24 deg. C / 38 % RH  
Engineer Kenichi Adachi Shinichi Takano  
Mode Tx 11n-20, MIMO

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5180	-	18.115	-
	5220	-	18.169	-
	5240	-	18.142	-
	5260	20.815	18.187	-
	5300	21.184	18.139	-
	5320	20.858	18.175	-
	5500	21.435	18.204	-
	5580	20.955	18.148	-
	5700	21.179	18.198	-
	5745	-	18.186	-
	5785	-	18.225	-
	5825	-	18.142	-

## 26 dB Emission Bandwidth

### Tx 11n-20, MIMO, Antenna 0 (worst port)

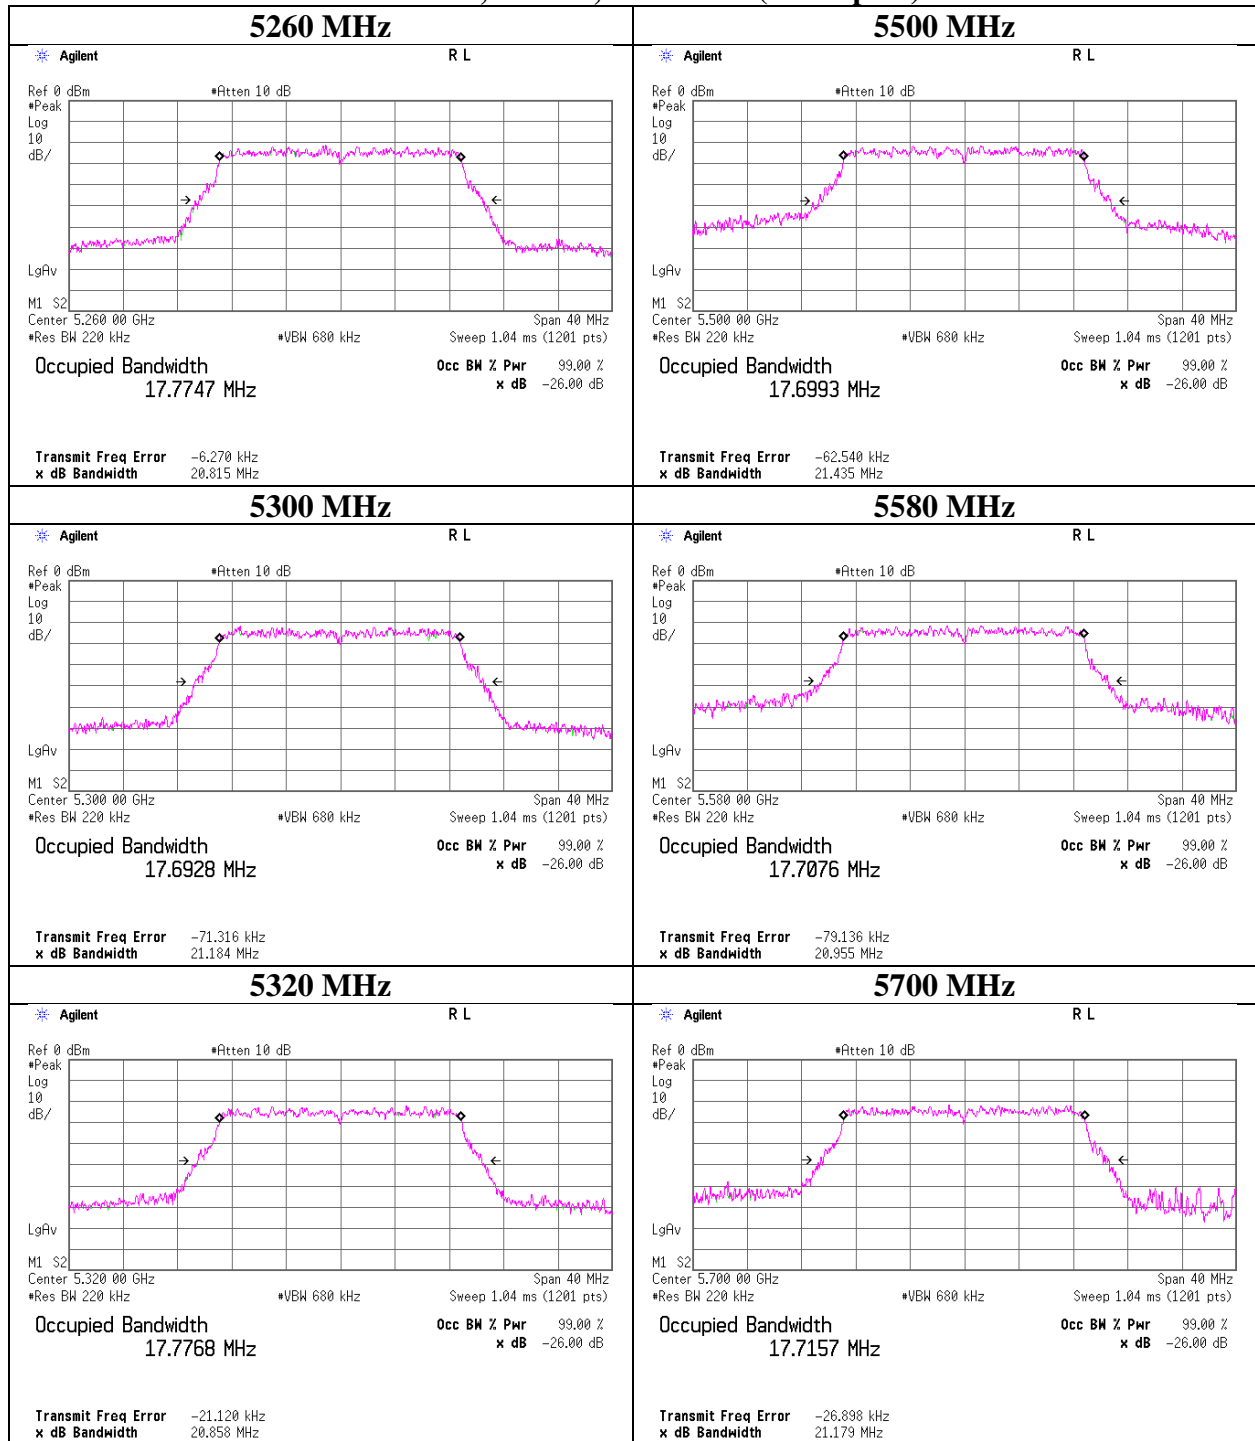

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 99 % Occupied Bandwidth

### Tx 11n-20, MIMO, Antenna 0 (worst port)

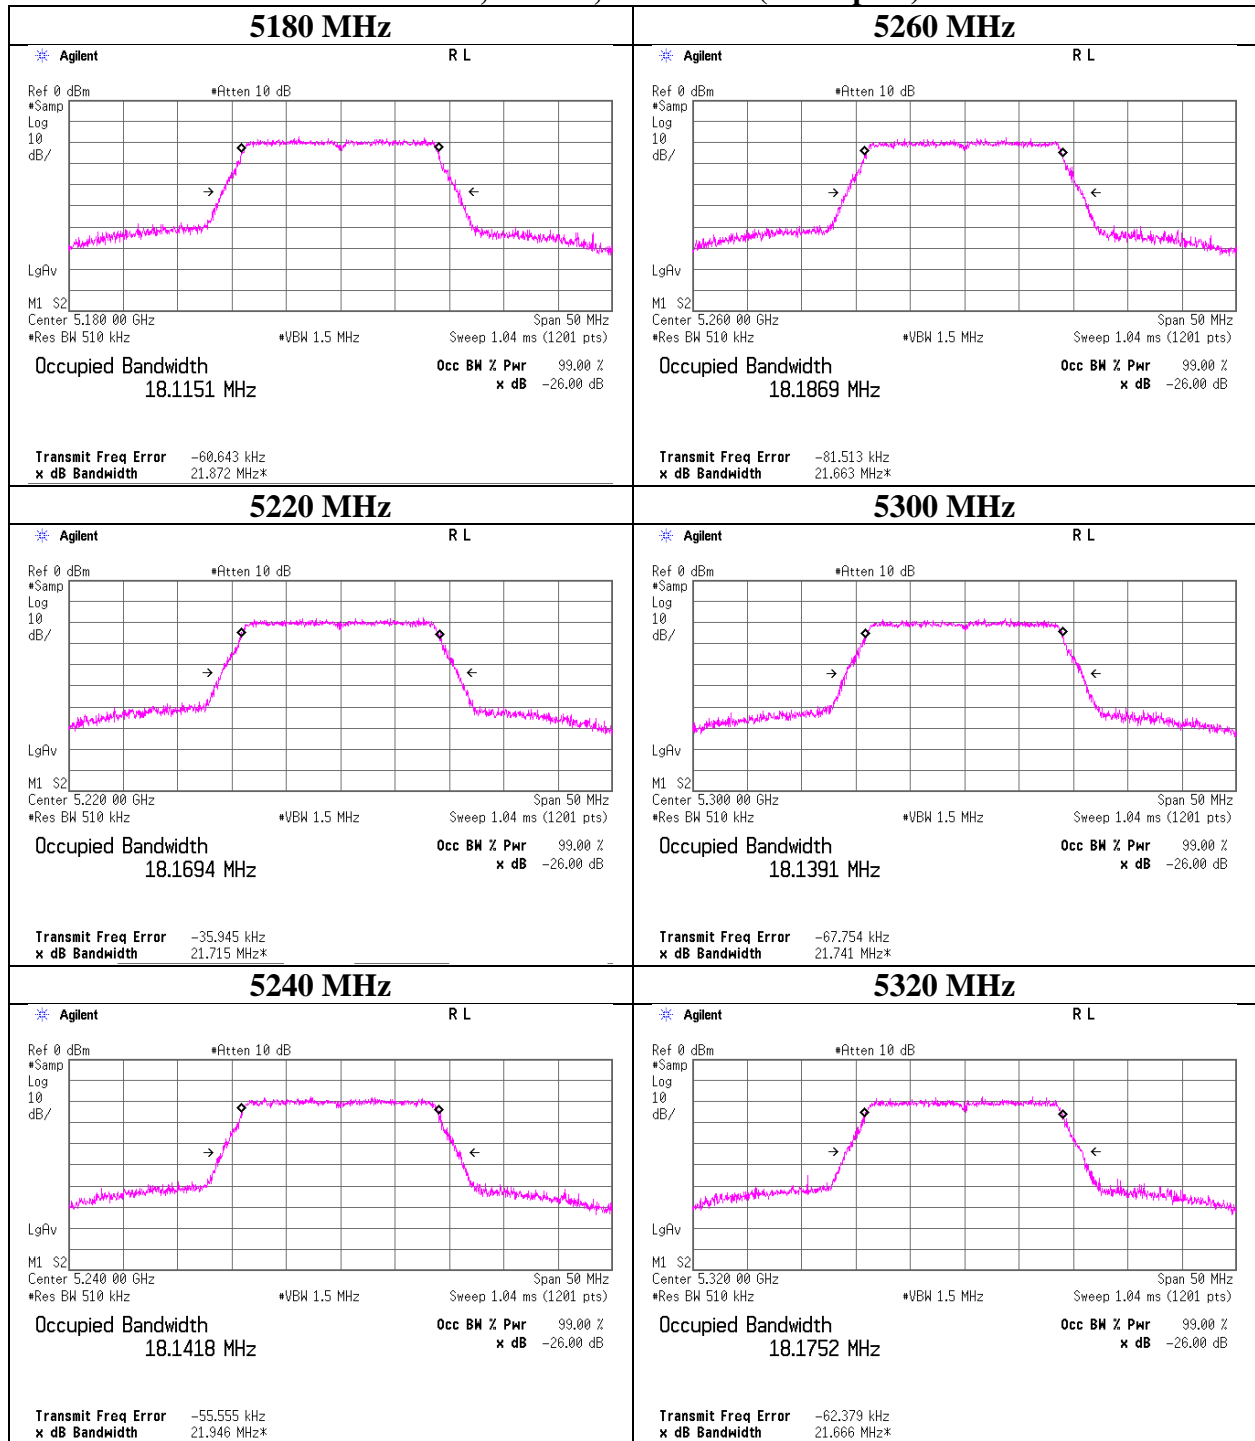

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## 99 % Occupied Bandwidth

### Tx 11n-20, MIMO, Antenna 0 (worst port)

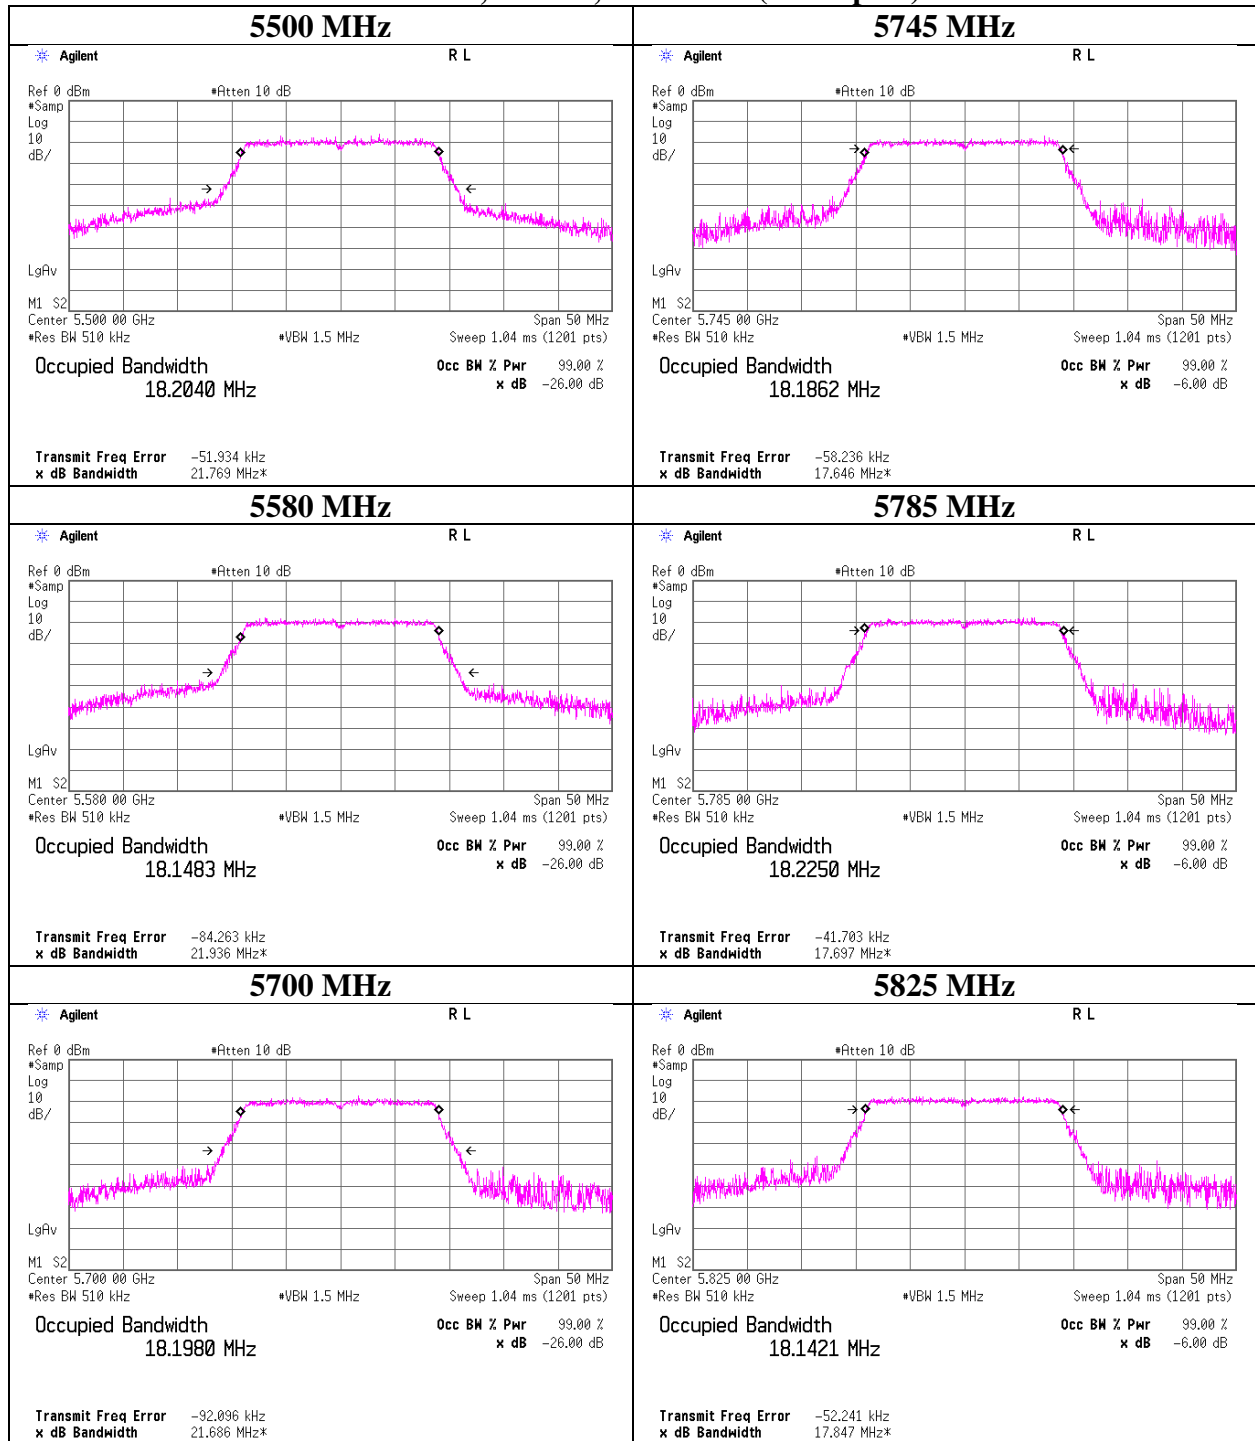

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

---


## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place Shonan EMC Lab. No.1 Measurement Room  
Report No. 11334871S-E-R1  
Date November 21, 2016 December 2, 2016  
Temperature / Humidity 24 deg. C / 49 % RH 24 deg. C / 38 % RH  
Engineer Kenichi Adachi Shinichi Takano  
Mode Tx 11ac-20, MIMO

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5180	-	18.128	-
	5220	-	18.195	-
	5240	-	18.165	-
	5260	21.101	18.157	-
	5300	21.177	18.257	-
	5320	21.202	18.093	-
	5500	20.980	18.133	-
	5580	21.161	18.174	-
	5700	21.305	18.172	-
	5745	-	18.094	-
	5785	-	18.173	-
	5825	-	18.271	-


## 26 dB Emission Bandwidth

### Tx 11ac-20, MIMO, Antenna 0 (worst port)

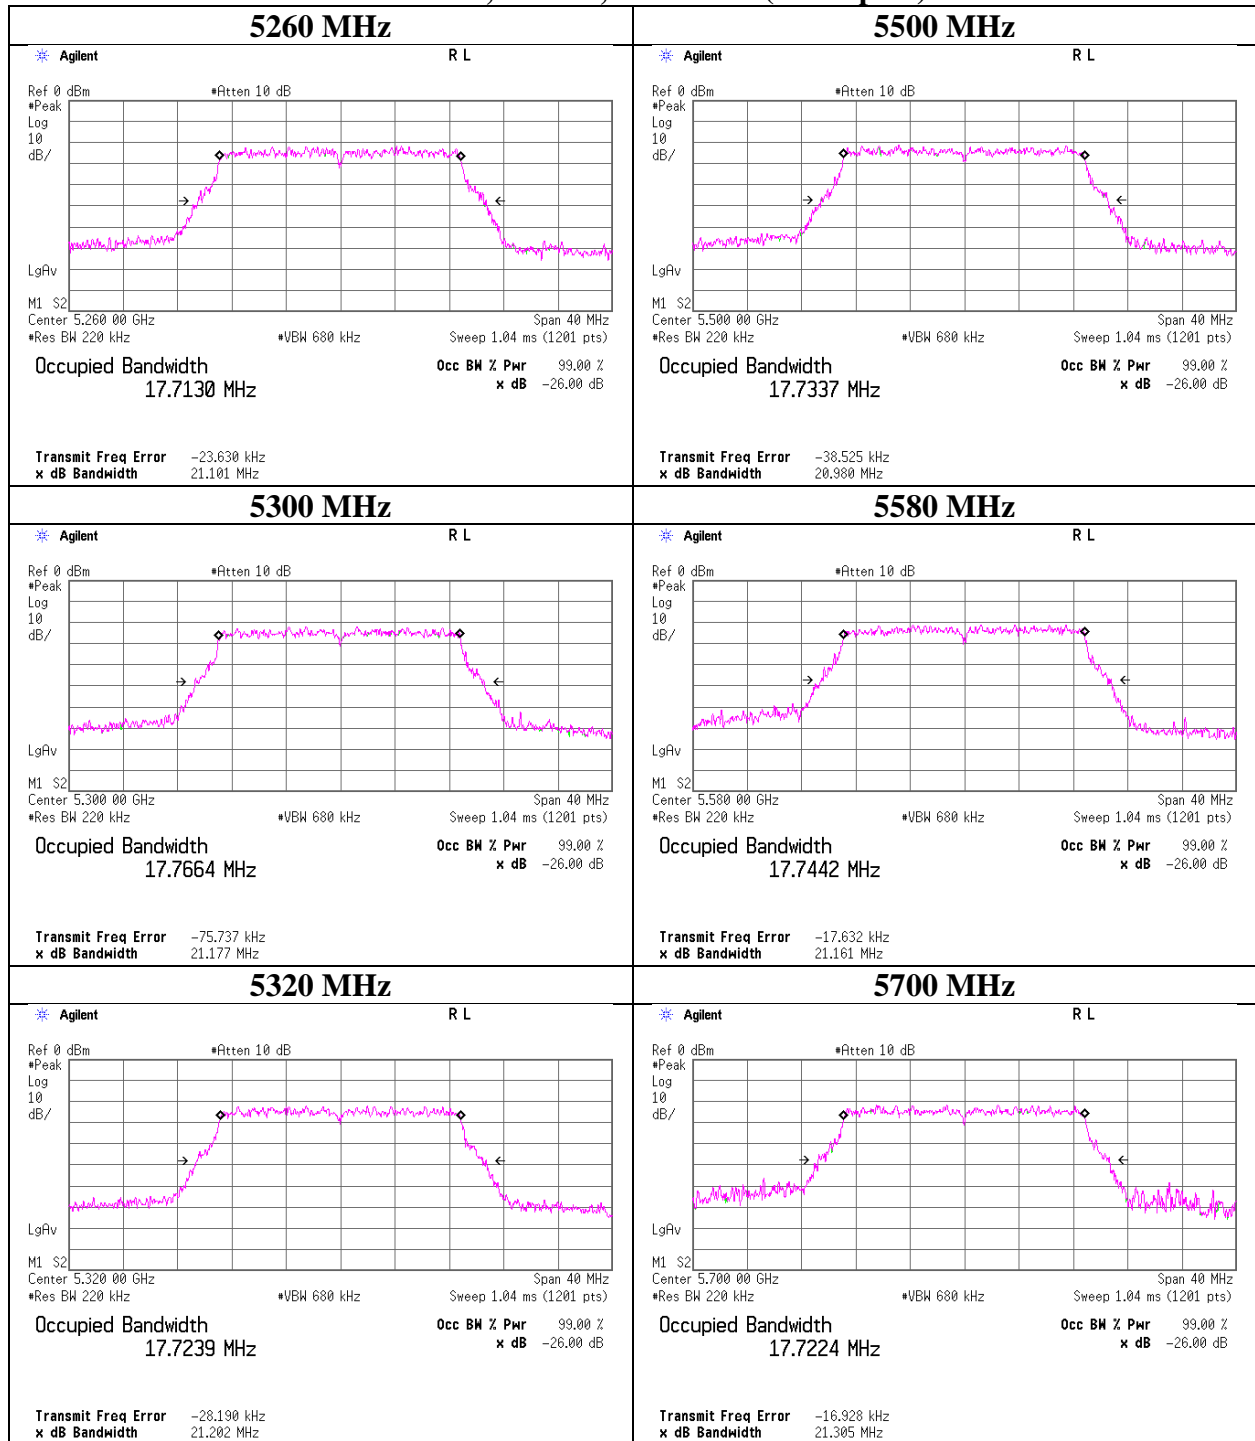


## 99 % Occupied Bandwidth

### Tx 11ac-20, MIMO, Antenna 0 (worst port)

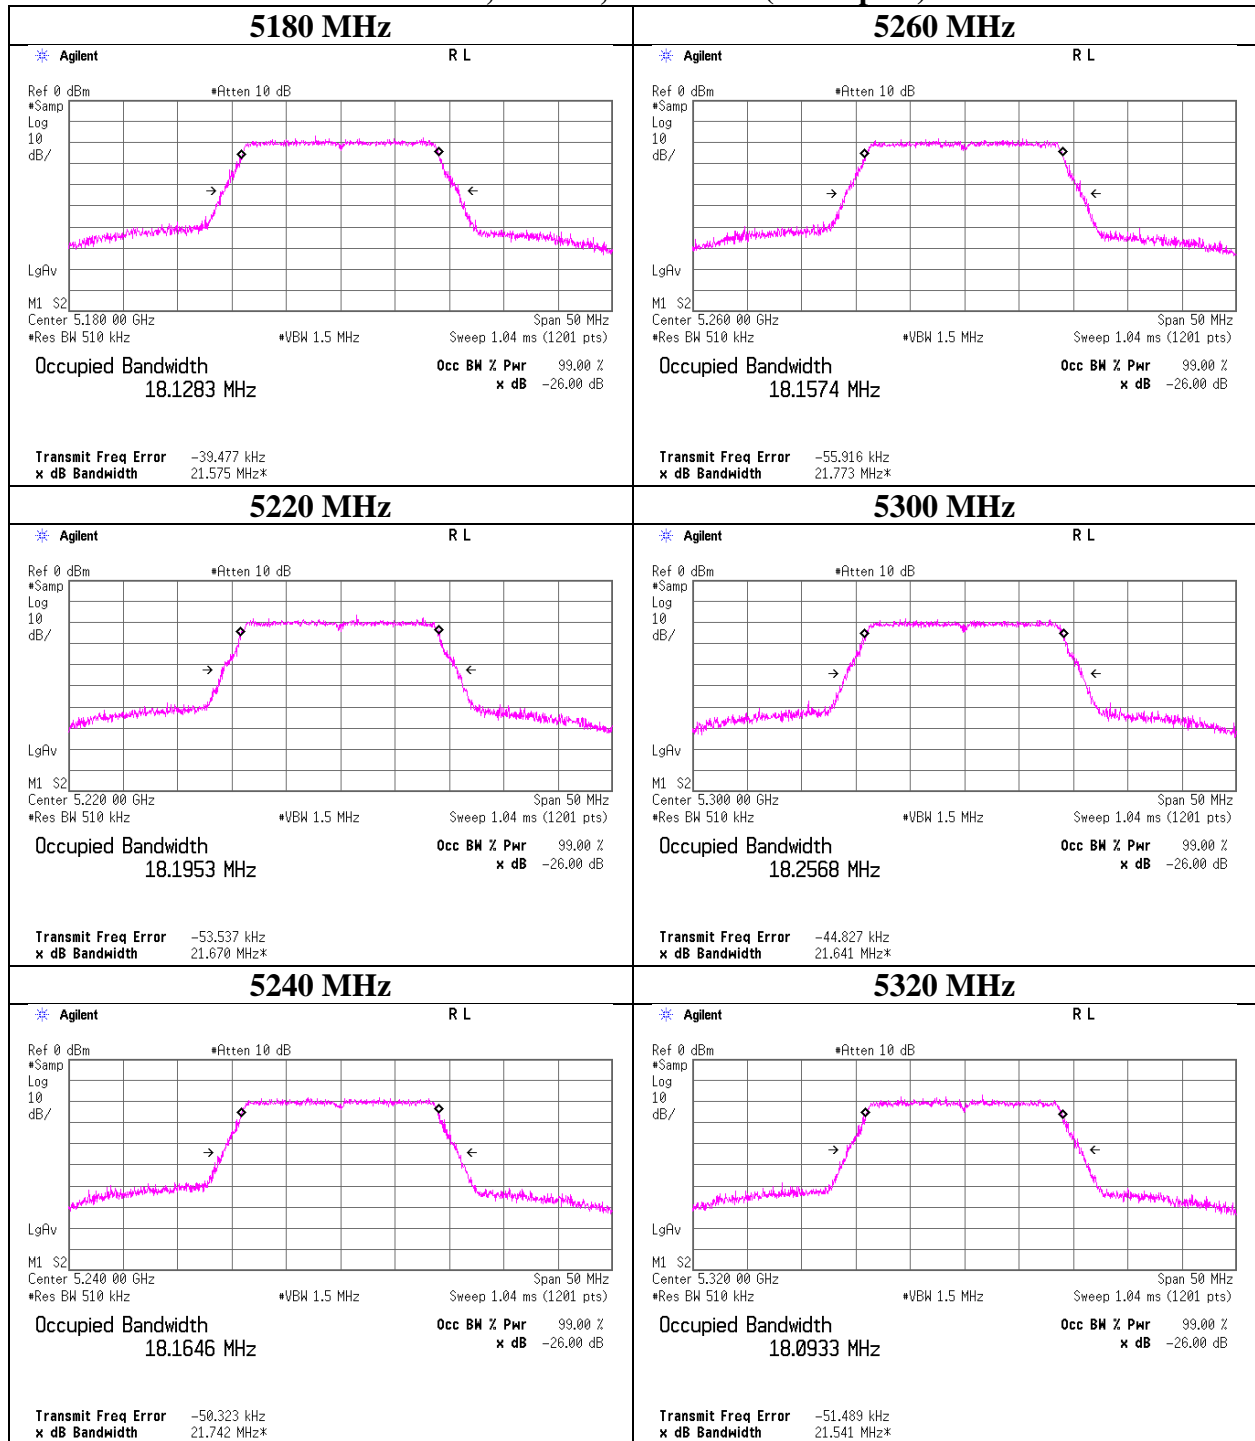

## 99 % Occupied Bandwidth

### Tx 11ac-20, MIMO, Antenna 0 (worst port)

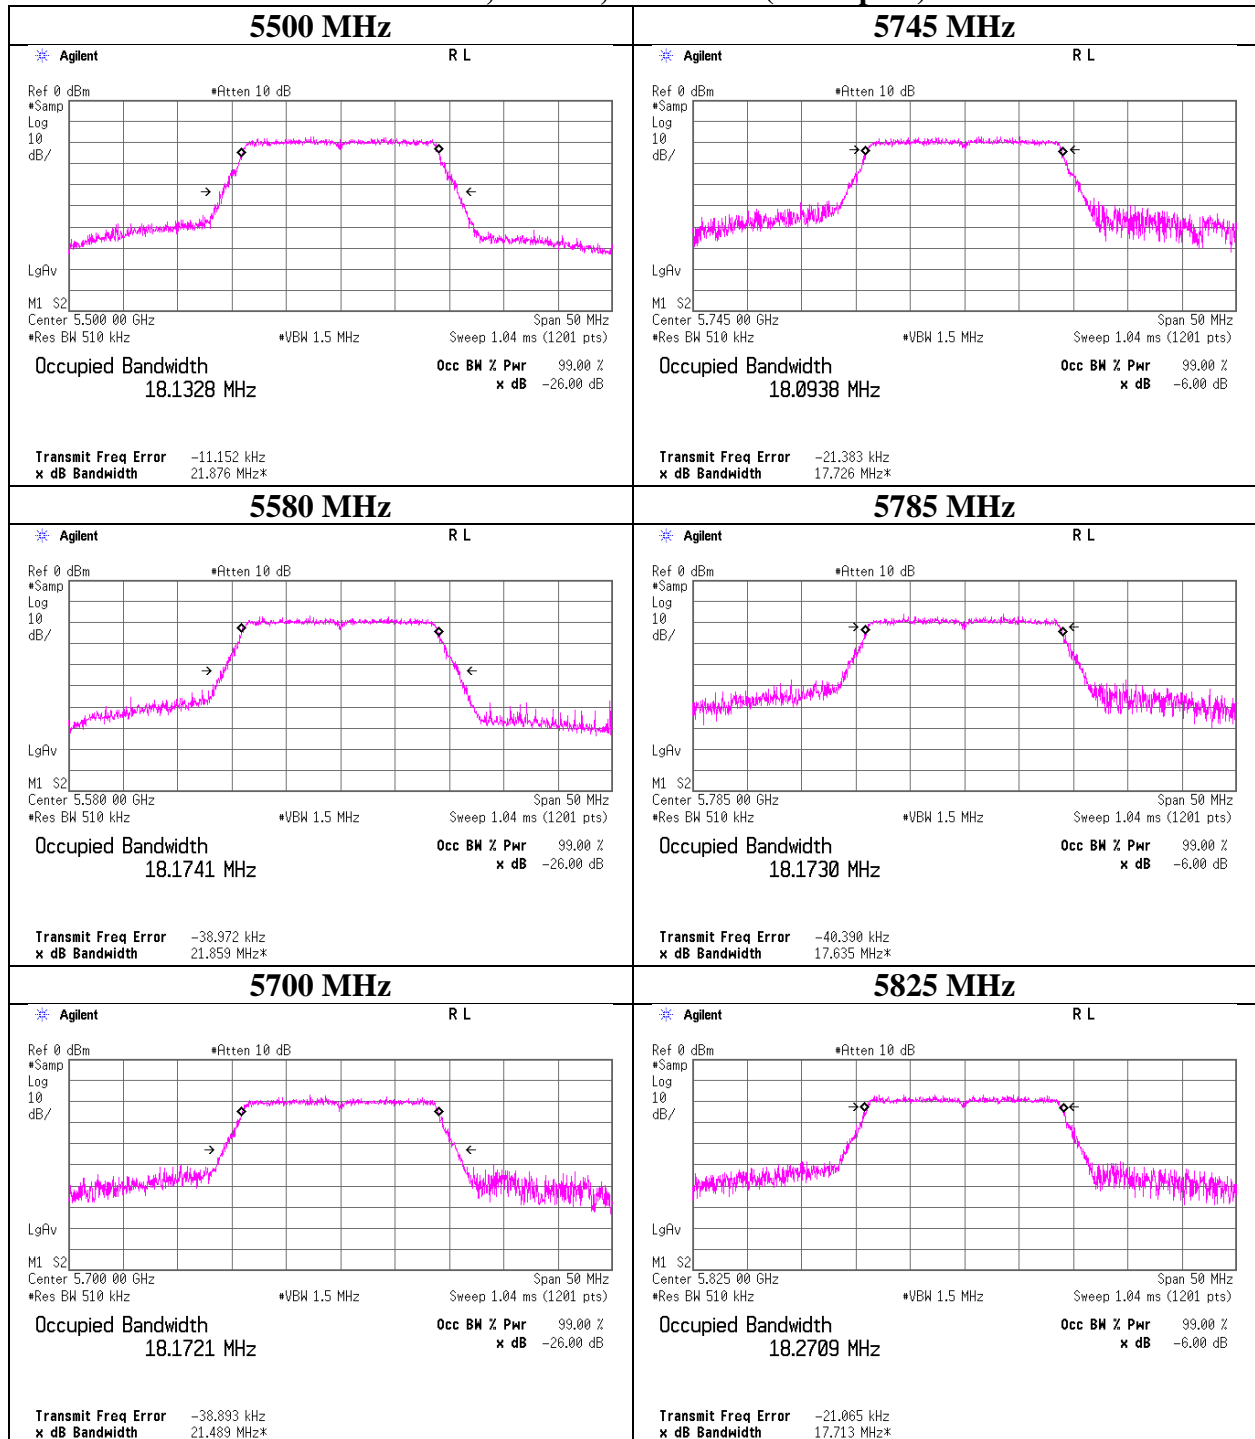

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	24 deg. C / 47 % RH
Engineer	Kenichi Adachi
Mode	Tx 11n-40, MIMO


Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5190	-	36.475	-
	-	-	-	-
	5230	-	36.554	-
	5270	39.337	36.477	-
	-	-	-	-
	5310	39.672	36.477	-

### 26 dB Emission Bandwidth Tx 11n-40, MIMO, Antenna 0 (worst port)

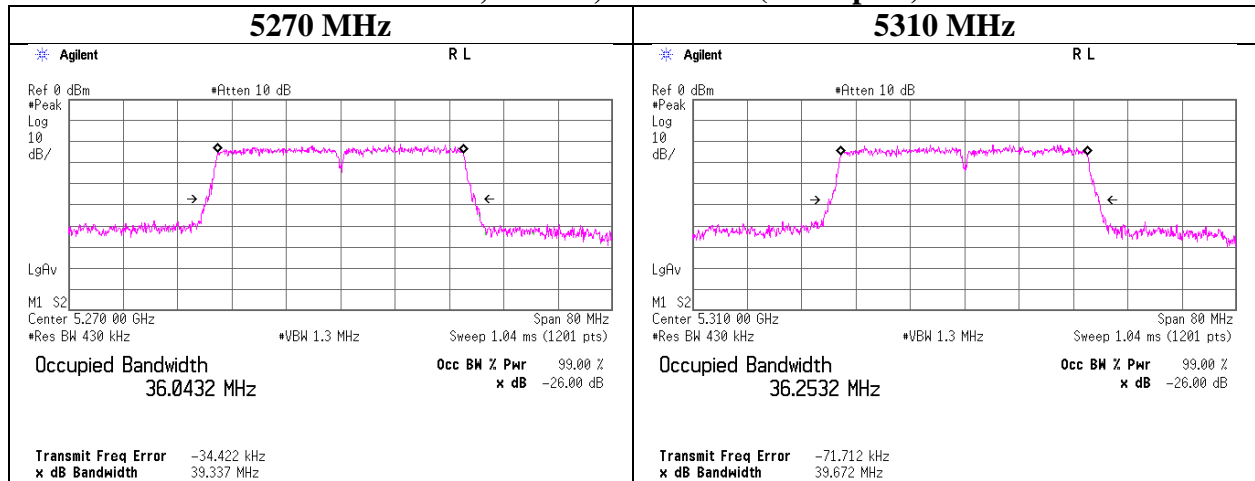

## 99 % Occupied Bandwidth

### Tx 11n-40, MIMO, Antenna 0 (worst port)

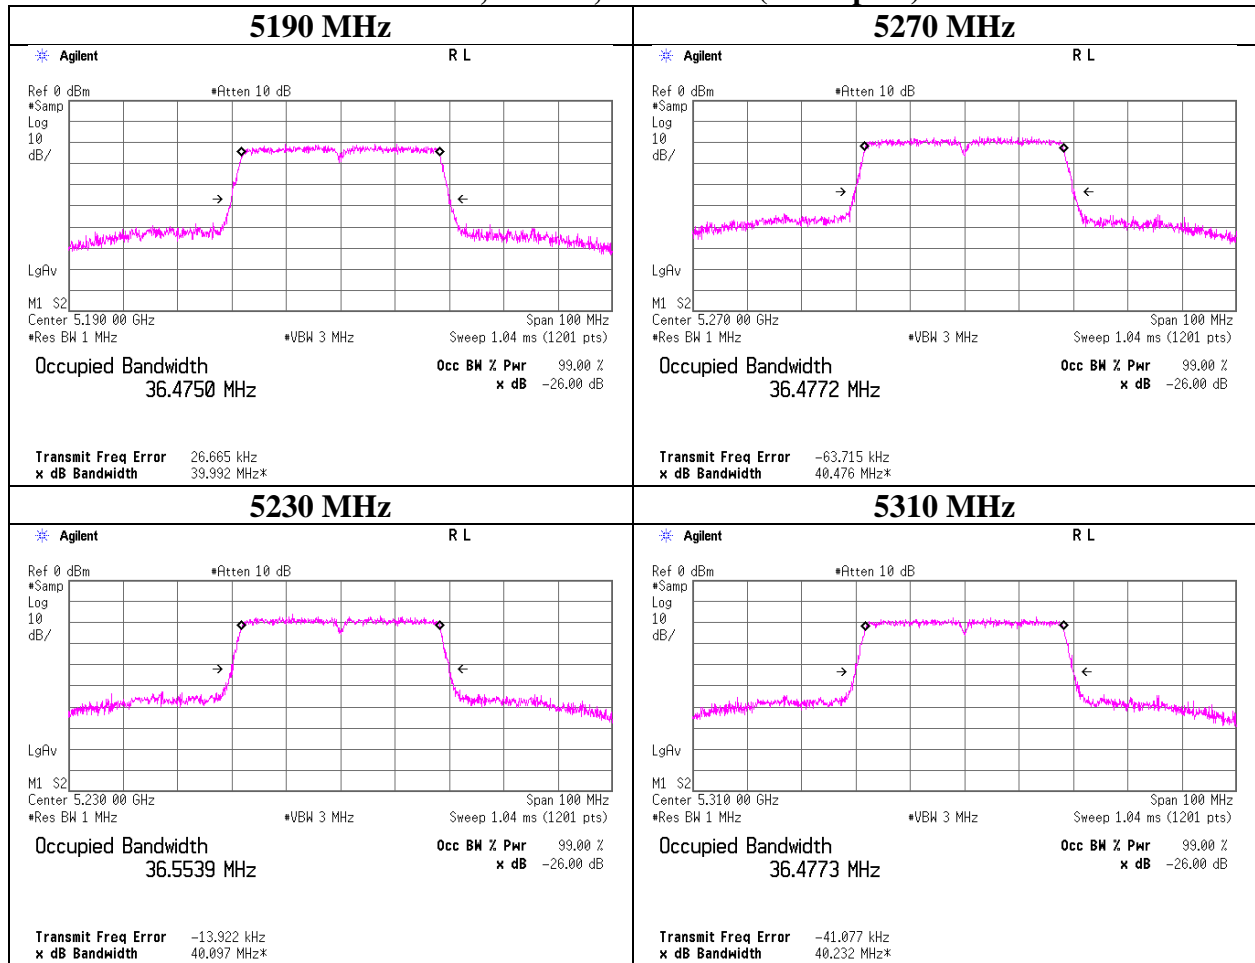

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	24 deg. C / 47 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-40, MIMO

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5190	-	36.450	-
	-	-	-	-
	5230	-	36.511	-
	5270	39.607	36.491	-
	-	-	-	-
	5310	39.159	36.480	-


### 26 dB Emission Bandwidth Tx 11ac-40, MIMO, Antenna 0 (worst port)

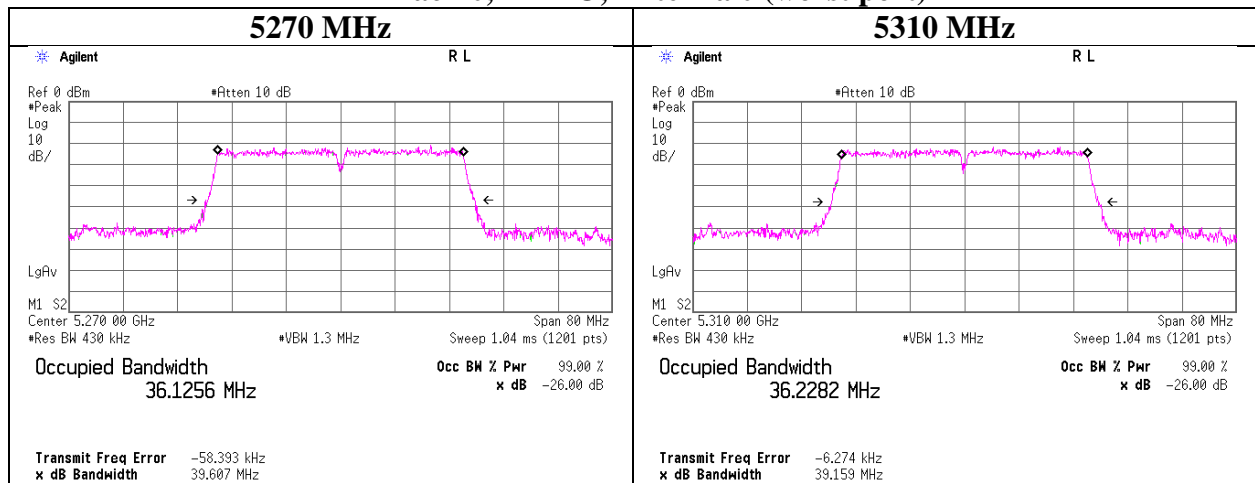



## 99 % Occupied Bandwidth

### Tx 11ac-40, MIMO, Antenna 0 (worst port)

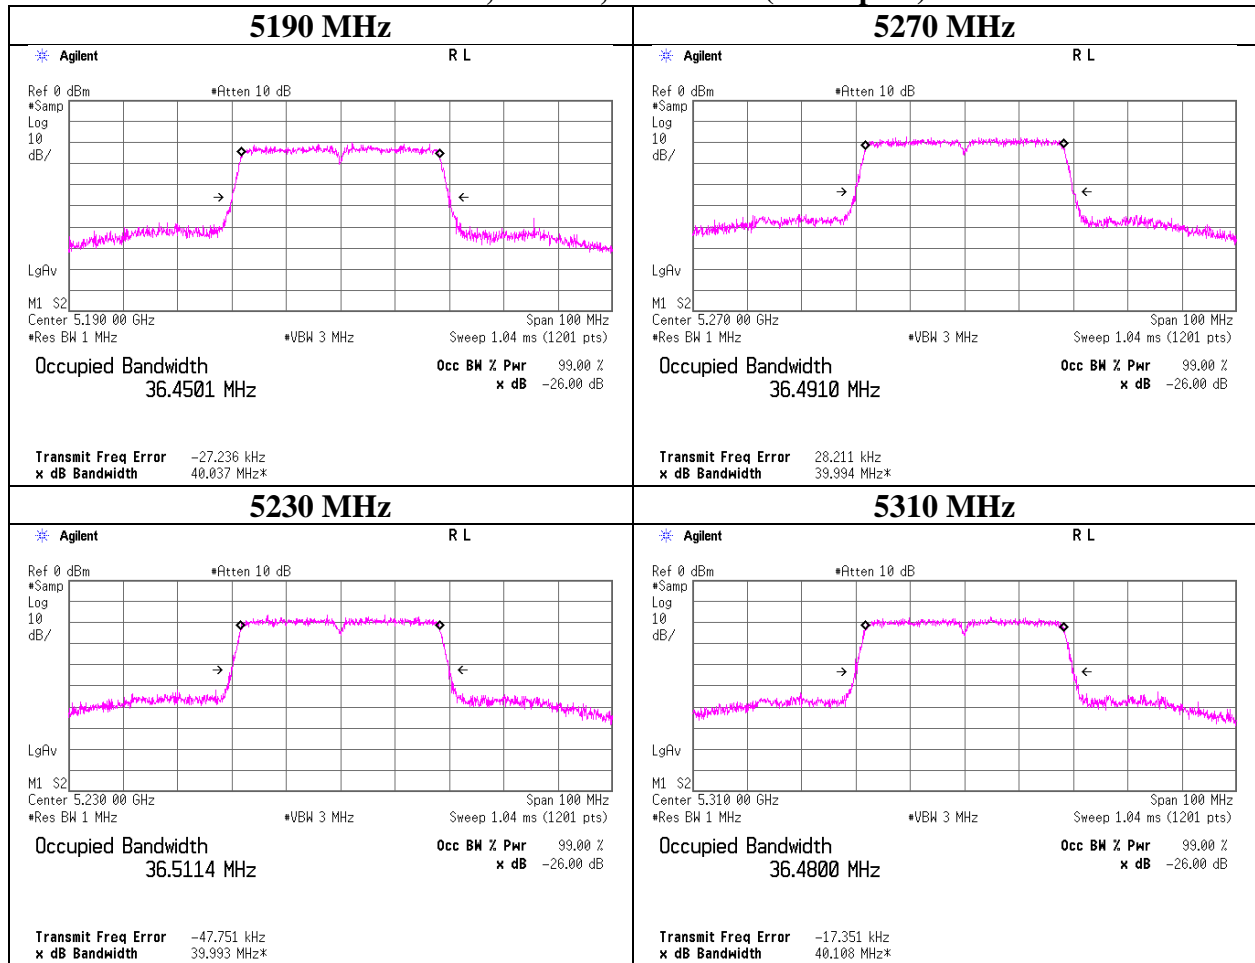

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

---


## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 22, 2016      December 2, 2016  
Temperature / Humidity : 24 deg. C / 47 % RH      24 deg. C / 38 % RH  
Engineer : Kenichi Adachi      Shinichi Takano  
Mode : Tx 11ac-80, MIMO

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [MHz]	Limit [MHz]
Antenna 0 (worst port)	5210	-	76.368	-
	-	-	-	-
	-	-	-	-
	5290	80.369	76.253	-
	-	-	-	-
	-	-	-	-
	5530	81.063	76.253	-
	-	-	-	-
	5610	80.967	76.331	-
	5775	-	76.399	-
	-	-	-	-
	-	-	-	-


## 26 dB Emission Bandwidth

### Tx 11ac-80, MIMO, Antenna 0 (worst port)

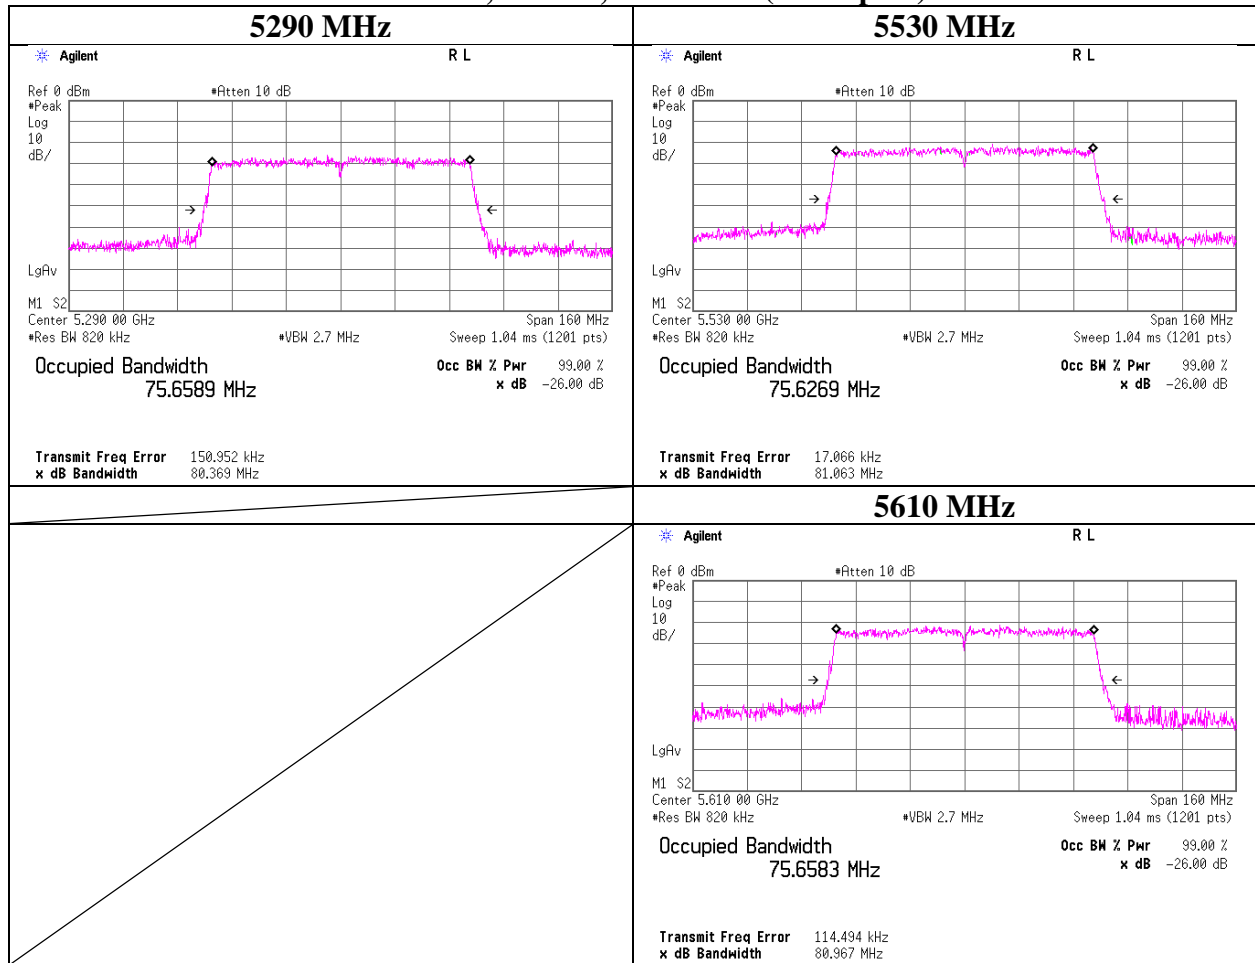

## 99 % Occupied Bandwidth

### Tx 11ac-80, MIMO, Antenna 0 (worst port)

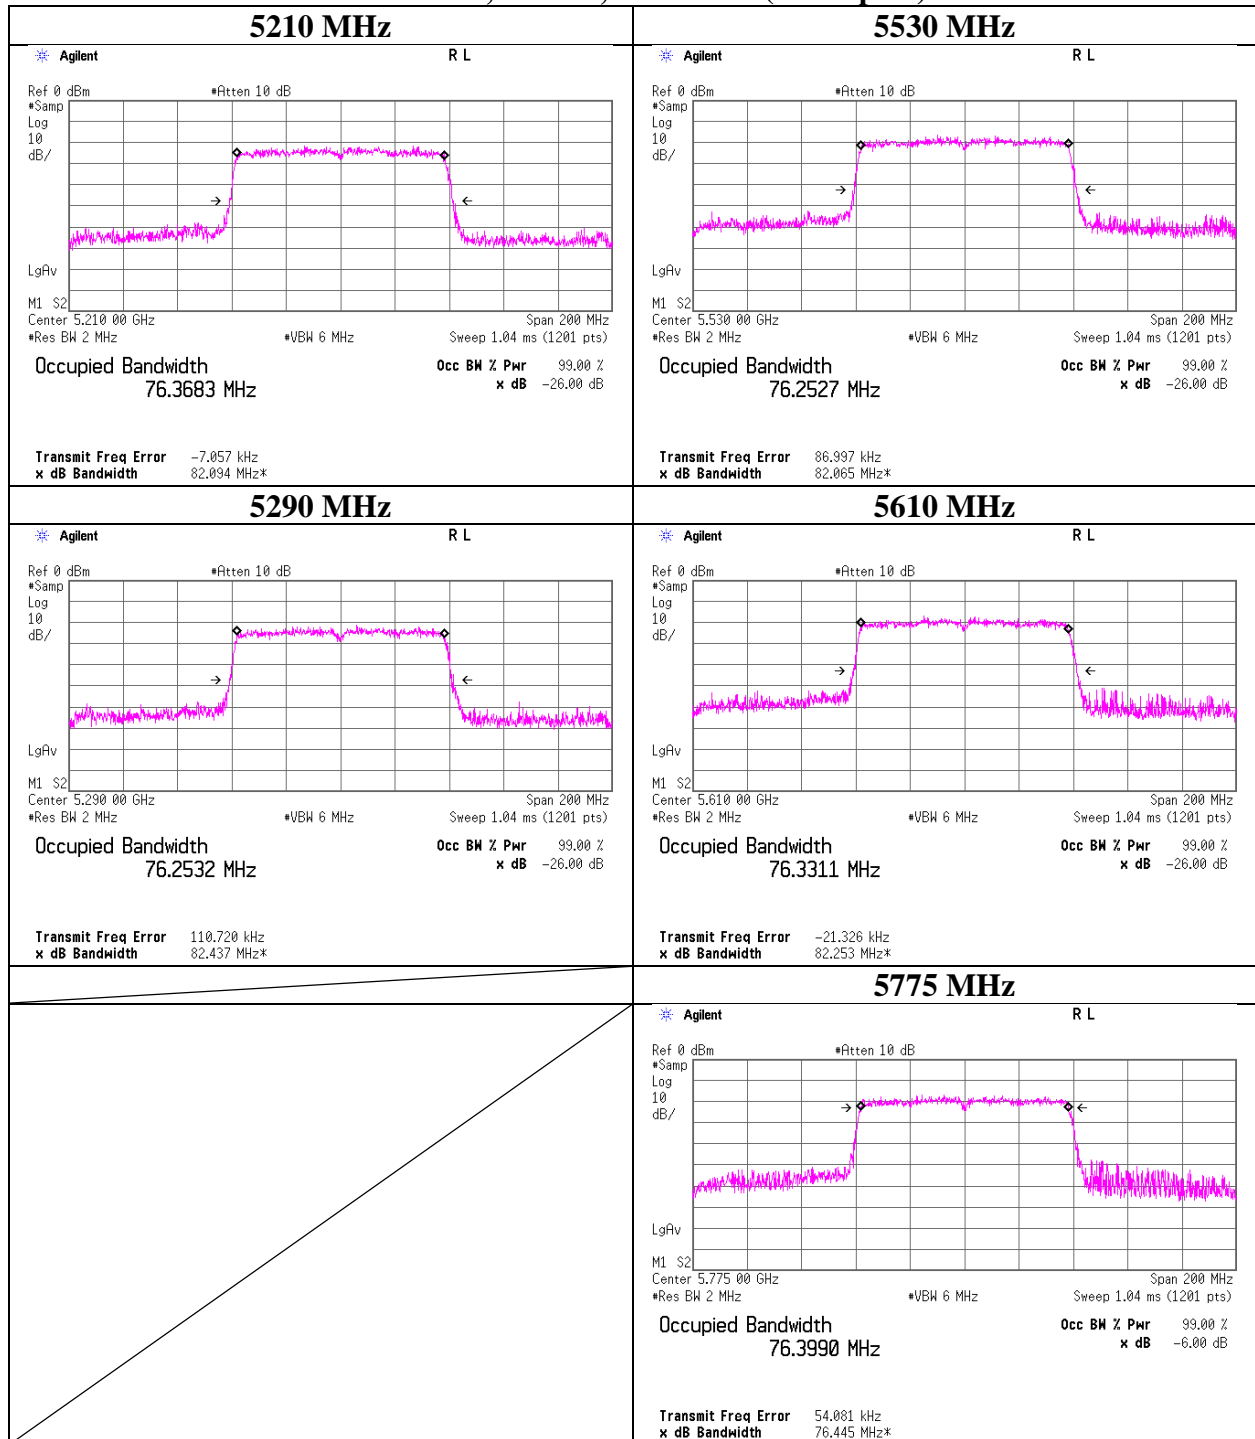


## 20 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	November 22, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 47 % RH
Engineer	Kenichi Adachi	Kenichi Adachi
Mode	Tx	

Antenna	Mode	Tested Frequency [MHz]	20 dB Emission Bandwidth [MHz]
Antenna 0 (worst port)	11a	5240	18.894
	11n-20, SISO	5240	19.873
	11n-20, MIMO	5240	19.499
	11ac-20, SISO	5240	19.775
	11ac-20, MIMO	5240	19.598
	11n-40, SISO	5230	38.433
	11n-40, MIMO	5230	38.323
	11ac-40, SISO	5230	38.486
	11ac-40, MIMO	5230	38.222
	11ac-80, SISO	5210	78.876
	11ac-80, MIMO	5210	78.999


### Antenna 0 (worst port)

#### Tx, 11a, 5240 MHz

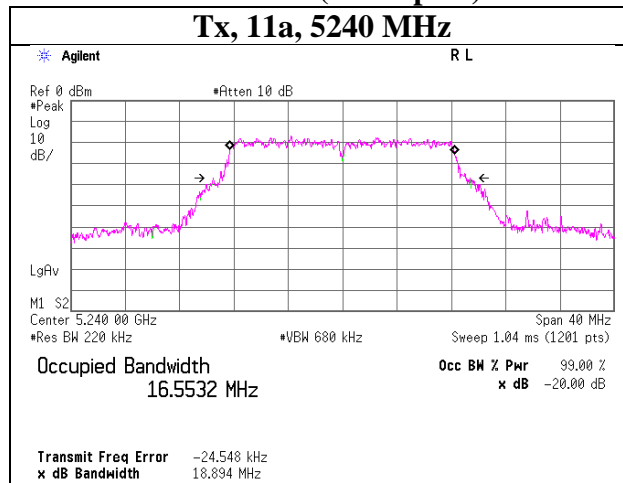


## 20 dB Bandwidth

### Antenna 0 (worst port)

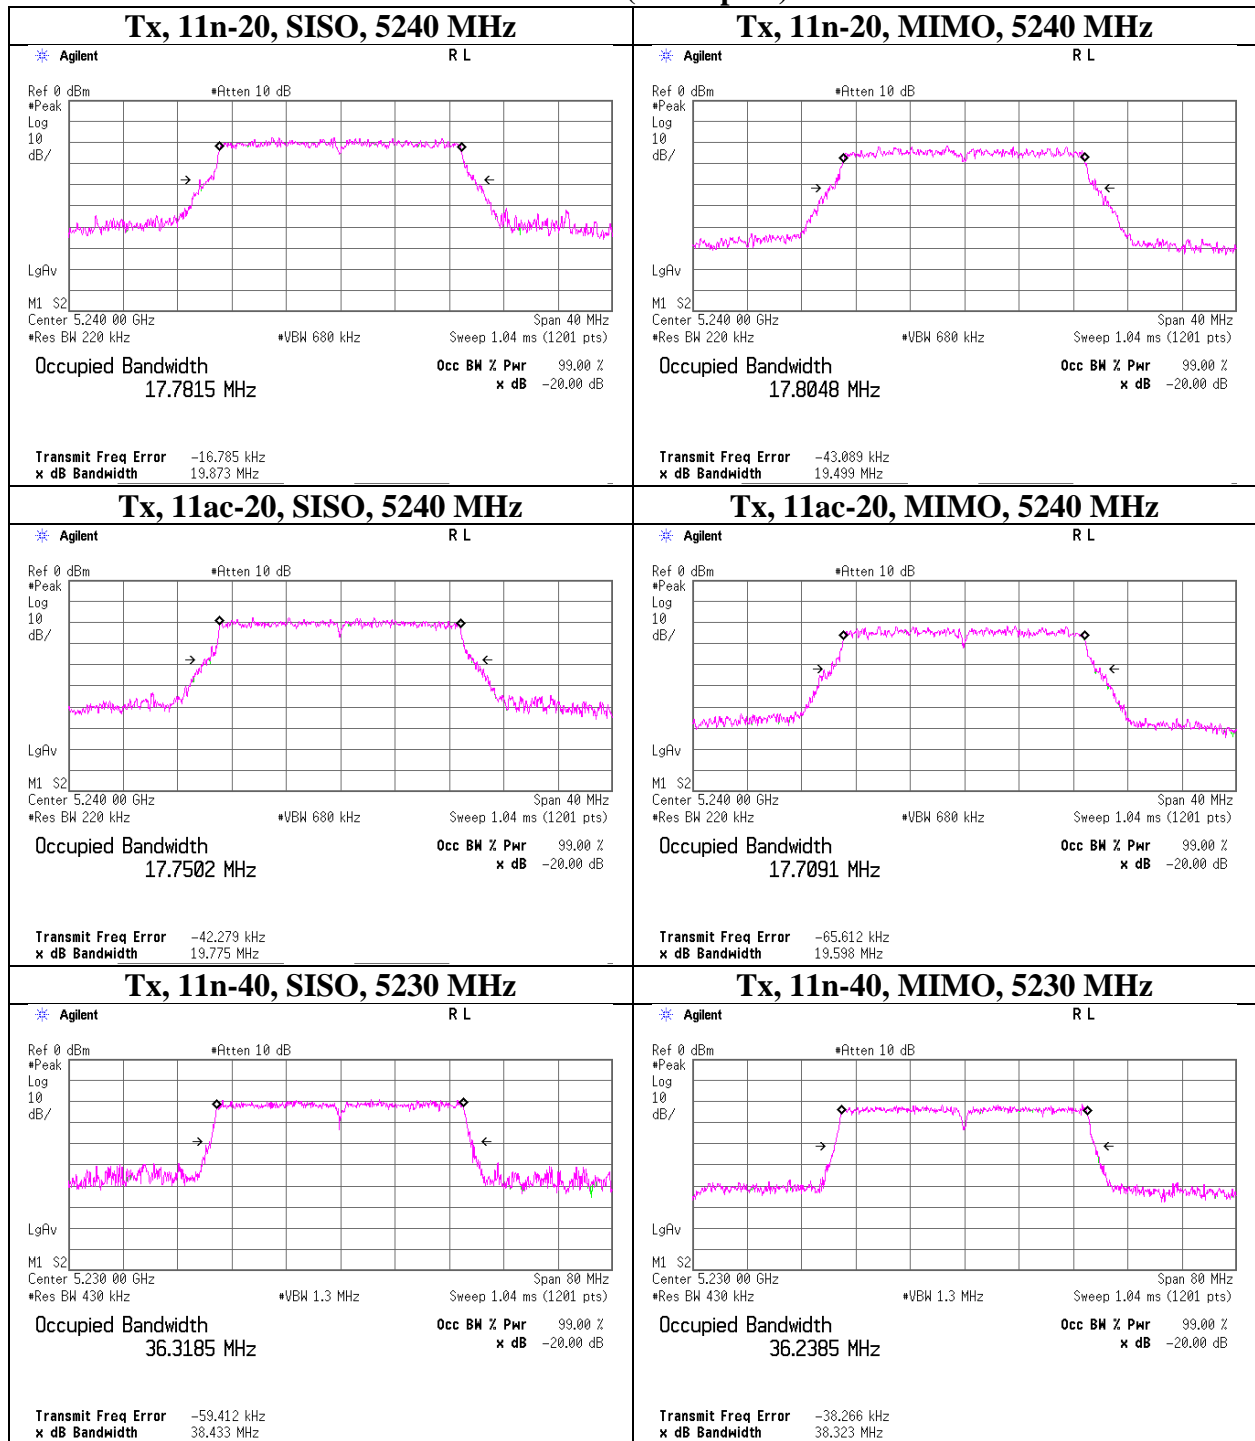

## 20 dB Bandwidth

### Antenna 0 (worst port)

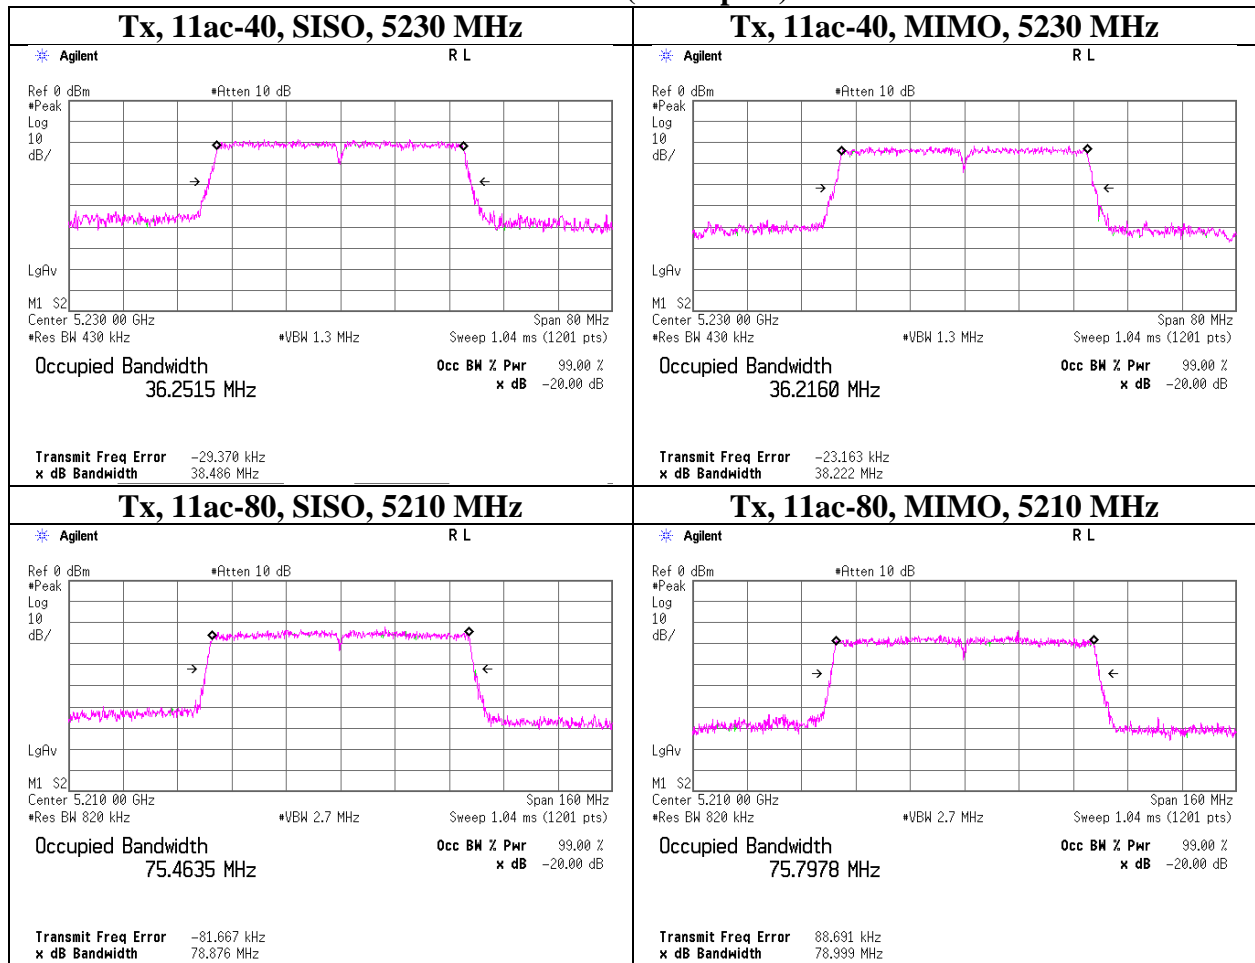

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

## 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11a

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	16.474	> 500
5785	16.433	> 500
5825	16.468	> 500

### Tx 11a, Antenna 0 (worst port)

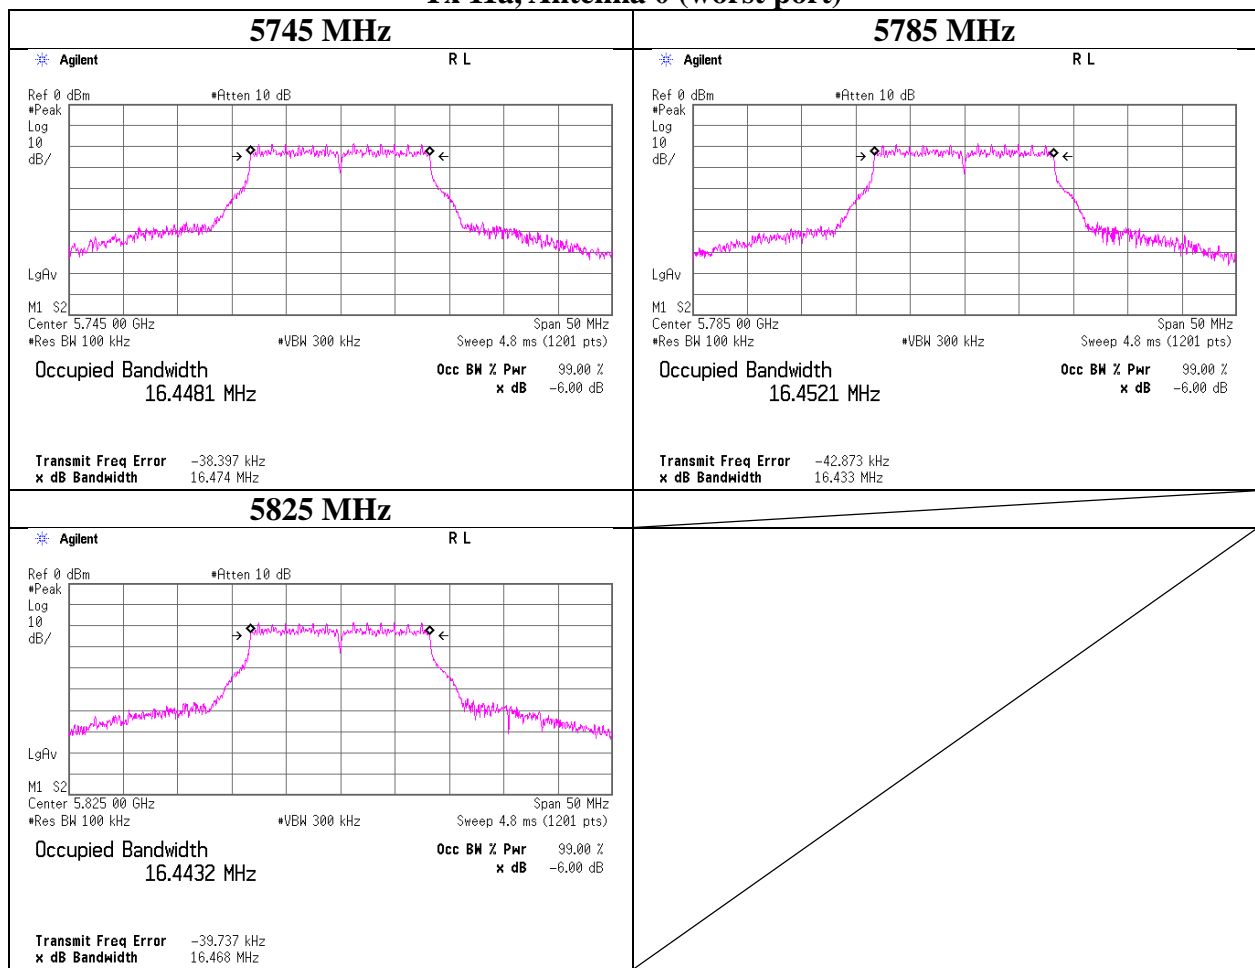




### 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11n-20, SISO

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	17.695	> 500
5785	17.730	> 500
5825	17.762	> 500

### Tx 11n-20, SISO, Antenna 0 (worst port)

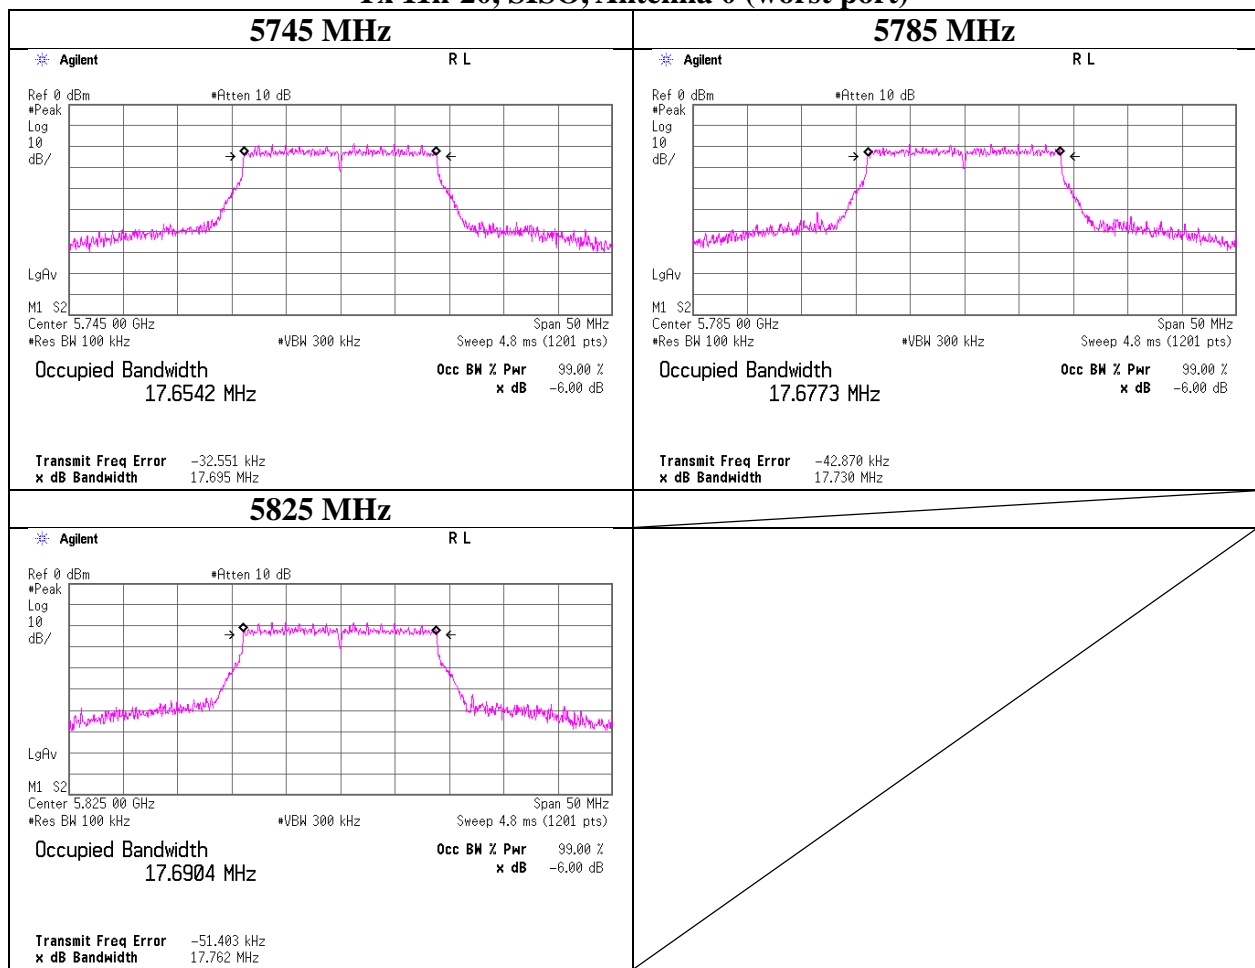


### 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-20, SISO

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	17.718	> 500
5785	17.717	> 500
5825	17.709	> 500

#### Tx 11ac-20, SISO, Antenna 0 (worst port)

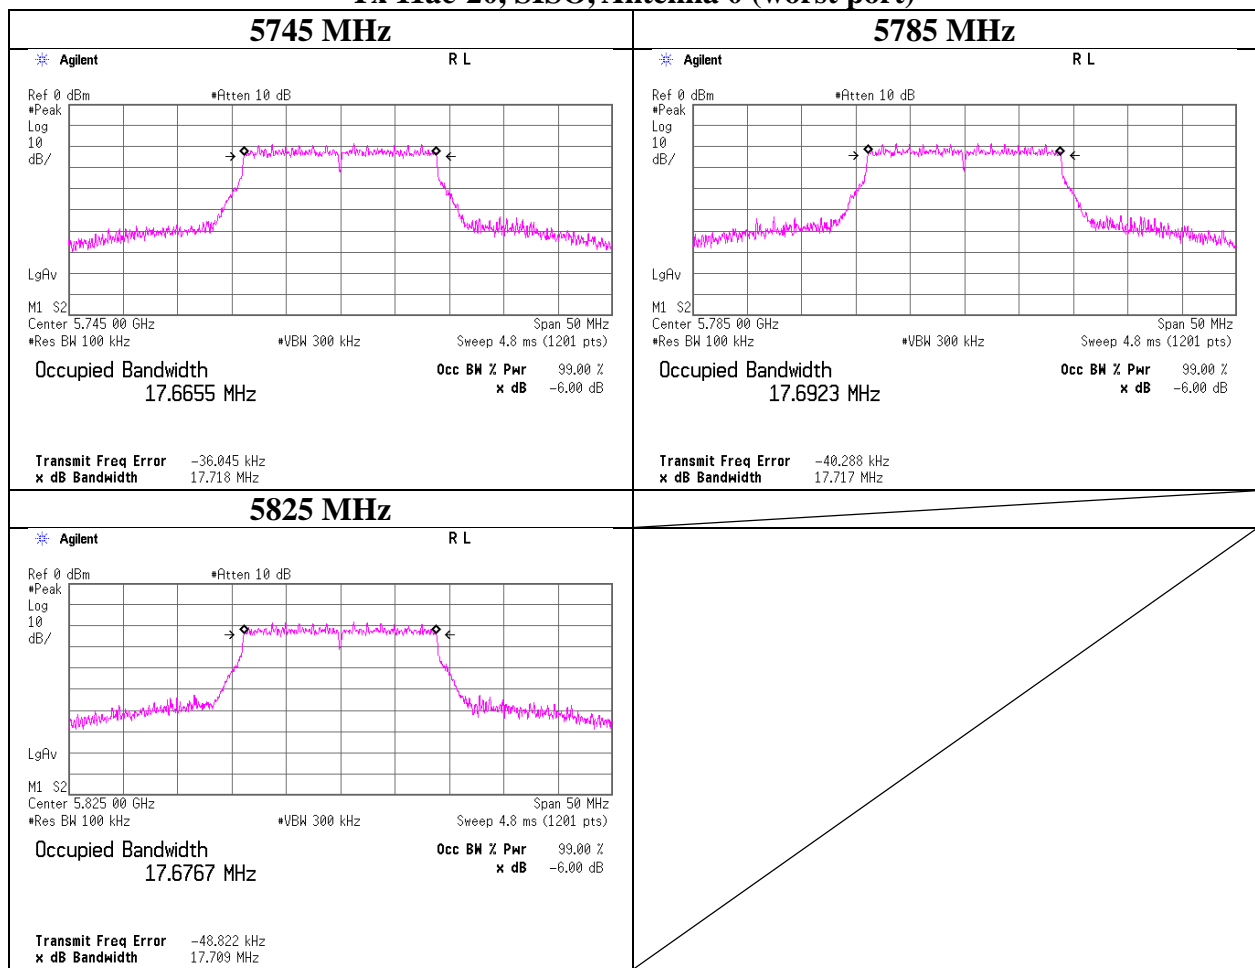


### 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-80, SISO

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5775	75.630	> 500
-	-	-
-	-	-

### Tx 11ac-80, SISO, Antenna 0 (worst port)

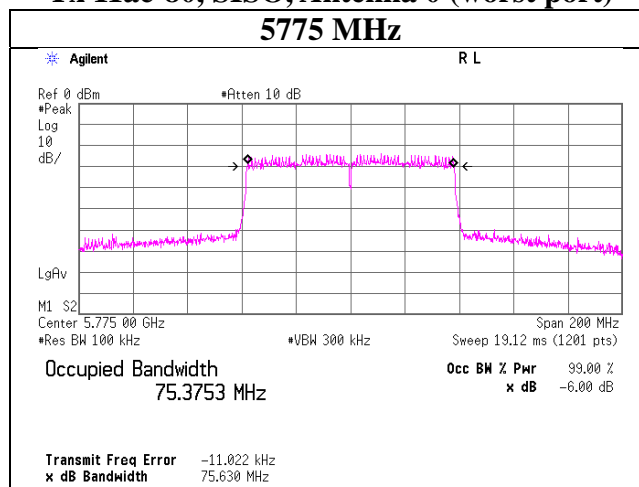


### 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11n-20, MIMO

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	17.635	> 500
5785	17.679	> 500
5825	17.721	> 500

### Tx 11n-20, MIMO, Antenna 0 (worst port)

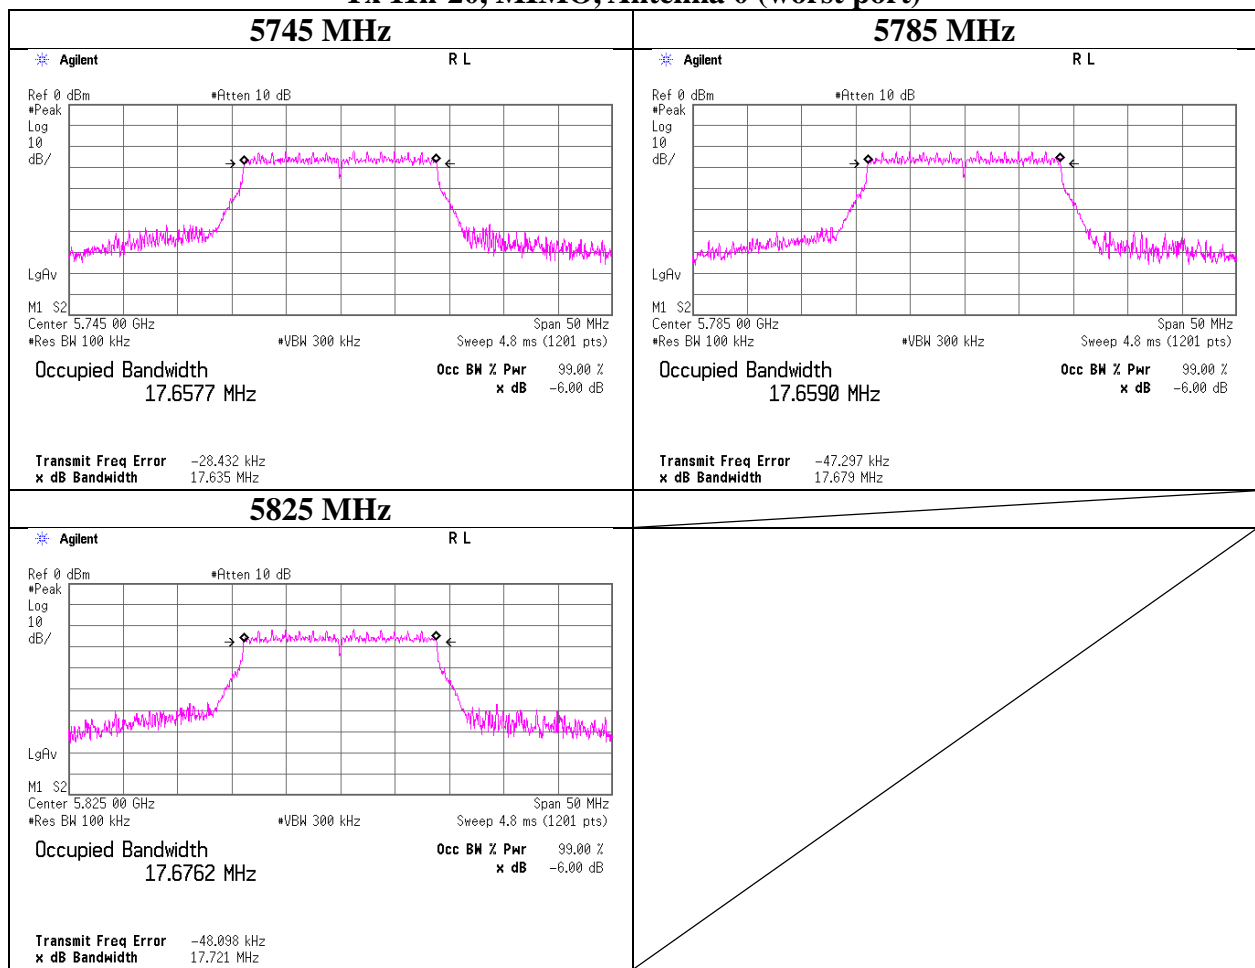


## 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-20, MIMO

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	17.677	> 500
5785	17.674	> 500
5825	17.751	> 500

### Tx 11ac-20, MIMO, Antenna 0 (worst port)

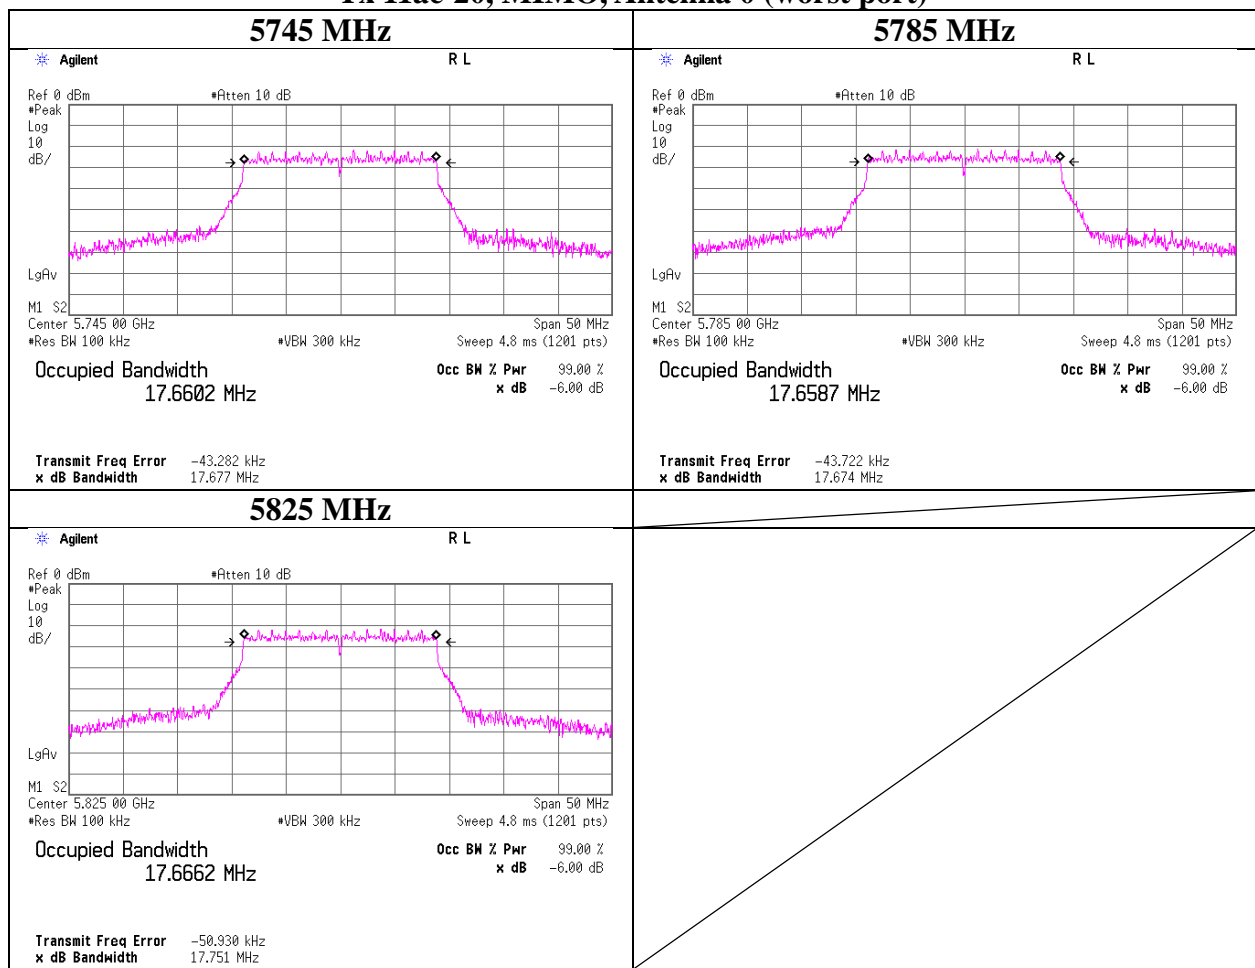

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

### 6 dB Bandwidth

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	December 2, 2016
Temperature / Humidity	24 deg. C / 38 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-80, MIMO

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5775	75.899	> 500
-	-	-
-	-	-

#### Tx 11ac-80, MIMO, Antenna 0 (worst port)

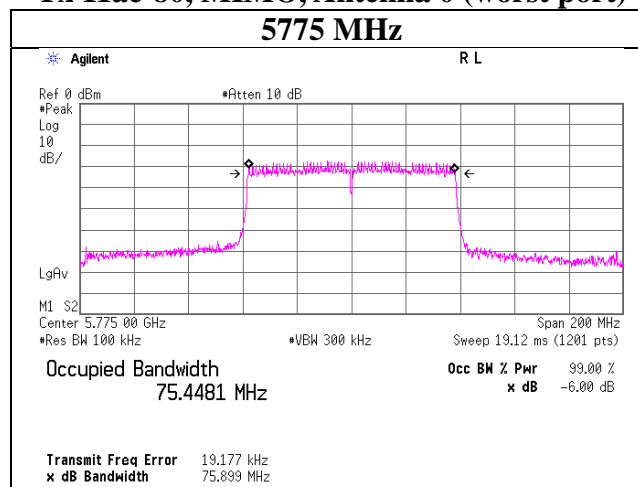

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 16, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi  
Mode : Tx 11a, 48 Mbps

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [mW]	Limit [dBm]	Margin [dB]		
5180	-10.08	2.00	20.06	1.72	3.31	-	17.117	13.70	23.47	23.97	10.27	17.01	50.29	29.97	12.96
5220	-10.16	2.00	20.05	1.72	3.31	-	17.147	13.61	22.98	23.97	10.36	16.92	49.25	29.97	13.05
5240	-10.21	2.00	20.05	1.72	3.31	-	17.133	13.56	22.72	23.97	10.41	16.87	48.69	29.97	13.10
5260	-9.60	2.01	20.05	1.72	3.31	20.782	17.082	14.18	26.21	23.97	9.79	17.49	56.16	29.97	12.48
5300	-9.72	2.01	20.04	1.72	3.31	20.950	17.084	14.05	25.44	23.97	9.92	17.36	54.51	29.97	12.61
5320	-9.74	2.01	20.04	1.72	3.31	20.919	17.053	14.03	25.32	23.97	9.94	17.34	54.25	29.97	12.63
5500	-9.62	2.01	20.02	1.72	3.31	20.601	17.105	14.13	25.91	23.97	9.84	17.44	55.52	29.97	12.53
5580	-9.72	2.03	20.05	1.72	3.31	20.782	17.064	14.08	25.61	23.97	9.89	17.39	54.88	29.97	12.58
5700	-10.14	2.07	20.08	1.72	3.31	20.797	17.134	13.73	23.63	23.97	10.24	17.04	50.63	29.97	12.93
5745	-10.31	2.08	20.10	1.72	3.31	-	-	13.59	22.88	30.00	16.41	16.90	49.03	36.00	19.10
5785	-10.40	2.09	20.11	1.72	3.31	-	-	13.52	22.51	30.00	16.48	16.83	48.24	36.00	19.17
5825	-10.16	2.10	20.12	1.72	3.31	-	-	13.78	23.90	30.00	16.22	17.09	51.22	36.00	18.91

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

**TPC on (Low power mode)**

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [mW]	Limit [dBm]	Margin [dB]		
5260	-13.24	2.01	20.05	1.72	3.31	20.782	17.082	10.54	11.34	23.97	13.43	13.85	24.29	29.97	16.12
5300	-13.26	2.01	20.04	1.72	3.31	20.950	17.084	10.51	11.26	23.97	13.46	13.82	24.12	29.97	16.15
5320	-13.39	2.01	20.04	1.72	3.31	20.919	17.053	10.38	10.93	23.97	13.59	13.69	23.41	29.97	16.28
5500	-13.24	2.01	20.02	1.72	3.31	20.601	17.105	10.51	11.26	23.97	13.46	13.82	24.12	29.97	16.15
5580	-13.26	2.03	20.05	1.72	3.31	20.782	17.064	10.54	11.34	23.97	13.43	13.85	24.29	29.97	16.12
5700	-13.67	2.07	20.08	1.72	3.31	20.797	17.134	10.20	10.48	23.97	13.77	13.51	22.46	29.97	16.46

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 24, 2016      November 28, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 37 % RH      23 deg. C / 38 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Shinichi Takano      Hikaru Shirasawa  
Mode : Tx 11n-20, SISO, MCS 3

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [mW]	Limit [dBm]	Margin [dB]		
5180	-8.94	2.00	20.06	1.02	3.31	-	18.195	14.14	25.94	23.97	9.83	17.45	55.59	29.97	12.52
5220	-8.92	2.00	20.05	1.02	3.31	-	18.182	14.15	26.00	23.97	9.82	17.46	55.72	29.97	12.51
5240	-9.10	2.00	20.05	1.02	3.31	-	18.229	13.97	24.95	23.97	10.00	17.28	53.46	29.97	12.69
5260	-8.94	2.01	20.05	1.02	3.31	20.967	18.234	14.14	25.94	23.97	9.83	17.45	55.59	29.97	12.52
5300	-8.99	2.01	20.04	1.02	3.31	21.112	18.252	14.08	25.59	23.97	9.89	17.39	54.83	29.97	12.58
5320	-8.97	2.01	20.04	1.02	3.31	21.452	18.195	14.10	25.70	23.97	9.87	17.41	55.08	29.97	12.56
5500	-8.84	2.01	20.02	1.02	3.31	21.597	18.322	14.21	26.36	23.97	9.76	17.52	56.49	29.97	12.45
5580	-8.88	2.03	20.05	1.02	3.31	21.279	18.209	14.22	26.42	23.97	9.75	17.53	56.62	29.97	12.44
5700	-9.29	2.07	20.08	1.02	3.31	21.078	18.220	13.88	24.43	23.97	10.09	17.19	52.36	29.97	12.78
5745	-9.44	2.08	20.10	1.02	3.31	-	-	13.76	23.77	30.00	16.24	17.07	50.93	36.00	18.93
5785	-9.62	2.09	20.11	1.02	3.31	-	-	13.60	22.91	30.00	16.40	16.91	49.09	36.00	19.09
5825	-9.21	2.10	20.12	1.02	3.31	-	-	14.03	25.29	30.00	15.97	17.34	54.20	36.00	18.66

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

**TPC on (Low power mode)**

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [mW]	Limit [dBm]	Margin [dB]		
5260	-12.38	2.01	20.05	1.02	3.31	20.967	18.234	10.70	11.74	23.97	13.27	14.01	25.17	29.97	15.96
5300	-12.44	2.01	20.04	1.02	3.31	21.112	18.252	10.63	11.56	23.97	13.34	13.94	24.77	29.97	16.03
5320	-12.42	2.01	20.04	1.02	3.31	21.452	18.195	10.65	11.61	23.97	13.32	13.96	24.88	29.97	16.01
5500	-12.81	2.01	20.02	1.02	3.31	21.597	18.322	10.24	10.57	23.97	13.73	13.55	22.65	29.97	16.42
5580	-12.84	2.03	20.05	1.02	3.31	21.279	18.209	10.26	10.62	23.97	13.71	13.57	22.75	29.97	16.40
5700	-13.18	2.07	20.08	1.02	3.31	21.078	18.220	9.99	9.98	23.97	13.98	13.30	21.38	29.97	16.67

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower



## Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.1 Measurement Room		
Report No.	11334871S-E-R1		
Date	November 9, 2016	November 24, 2016	November 28, 2016
Temperature / Humidity	25 deg. C / 34 % RH	23 deg. C / 37 % RH	23 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano	Hikaru Shirasawa
Mode	Tx 11ac-20, SISO, MCS 3		

### Antenna 0 (worst)

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power			e.i.r.p.				
								Result [dBm]	Limit [mW]	Margin [dB]	Result [dBm]	Limit [mW]	Margin [dB]		
5180	-8.89	2.00	20.06	1.00	3.31	-	18.213	14.17	26.10	23.97	9.80	17.48	55.94	29.97	12.49
5220	-8.91	2.00	20.05	1.00	3.31	-	18.259	14.14	25.92	23.97	9.83	17.45	55.55	29.97	12.52
5240	-9.14	2.00	20.05	1.00	3.31	-	18.309	13.91	24.59	23.97	10.06	17.22	52.69	29.97	12.75
5260	-8.37	2.01	20.05	1.00	3.31	21.190	18.246	14.69	29.42	23.97	9.28	18.00	63.05	29.97	11.97
5300	-8.42	2.01	20.04	1.00	3.31	21.151	18.293	14.63	29.02	23.97	9.34	17.94	62.19	29.97	12.03
5320	-8.48	2.01	20.04	1.00	3.31	21.146	18.231	14.57	28.62	23.97	9.40	17.88	61.33	29.97	12.09
5500	-8.80	2.01	20.02	1.00	3.31	21.159	18.215	14.23	26.47	23.97	9.74	17.54	56.72	29.97	12.43
5580	-8.82	2.03	20.05	1.00	3.31	21.319	18.216	14.26	26.65	23.97	9.71	17.57	57.11	29.97	12.40
5700	-9.25	2.07	20.08	1.00	3.31	21.155	18.197	13.90	24.53	23.97	10.07	17.21	52.57	29.97	12.76
5745	-9.48	2.08	20.10	1.00	3.31	-	-	13.70	23.43	30.00	16.30	17.01	50.20	36.00	18.99
5785	-9.58	2.09	20.11	1.00	3.31	-	-	13.62	23.00	30.00	16.38	16.93	49.28	36.00	19.07
5825	-9.59	2.10	20.12	1.00	3.31	-	-	13.63	23.05	30.00	16.37	16.94	49.40	36.00	19.06

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

### TPC on (Low power mode)

#### Antenna 0 (worst)

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power			e.i.r.p.				
								Result [dBm]	Limit [mW]	Margin [dB]	Result [dBm]	Limit [mW]	Margin [dB]		
5260	-12.49	2.01	20.05	1.00	3.31	21.190	18.246	10.57	11.39	23.97	13.40	13.88	24.42	29.97	16.09
5300	-12.54	2.01	20.04	1.00	3.31	21.151	18.293	10.51	11.24	23.97	13.46	13.82	24.08	29.97	16.15
5320	-12.58	2.01	20.04	1.00	3.31	21.146	18.231	10.47	11.14	23.97	13.50	13.78	23.86	29.97	16.19
5500	-12.76	2.01	20.02	1.00	3.31	21.159	18.215	10.27	10.63	23.97	13.70	13.58	22.79	29.97	16.39
5580	-12.76	2.03	20.05	1.00	3.31	21.319	18.216	10.32	10.76	23.97	13.65	13.63	23.05	29.97	16.34
5700	-13.08	2.07	20.08	1.00	3.31	21.155	18.197	10.07	10.16	23.97	13.90	13.38	21.76	29.97	16.59

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 16, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi  
Mode : Tx 11n-40, SISO, MCS 3

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power			e.i.r.p.				
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5190	-13.67	2.00	20.06	1.70	3.31	-	36.639	10.09	10.22	23.97	13.88	13.40	21.89	29.97	16.57
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-10.67	2.00	20.05	1.70	3.31	-	36.620	13.08	20.34	23.97	10.89	16.39	43.58	29.97	13.58
5270	-9.96	2.01	20.05	1.70	3.31	38.995	36.729	13.80	24.00	23.97	10.17	17.11	51.44	29.97	12.86
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-9.94	2.01	20.04	1.70	3.31	39.558	36.685	13.81	24.06	23.97	10.16	17.12	51.55	29.97	12.85

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

**TPC on (Low power mode)**

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power			e.i.r.p.				
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5270	-13.44	2.01	20.05	1.70	3.31	38.995	36.729	10.32	10.77	23.97	13.65	13.63	23.08	29.97	16.34
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-13.32	2.01	20.04	1.70	3.31	39.558	36.685	10.43	11.05	23.97	13.54	13.74	23.67	29.97	16.23

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 16, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi  
Mode : Tx 11ac-40, SISO, MCS 3

### Antenna 0 (worst)

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	[mW]	Limit [dBm]	Margin [dB]	Result [dBm]	[mW]	Limit [dBm]	Margin [dB]
5190	-13.64	2.00	20.06	1.70	3.31	-	36.494	10.12	10.27	23.97	13.85	13.43	22.01	29.97	16.54
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-10.66	2.00	20.05	1.70	3.31	-	36.632	13.09	20.35	23.97	10.88	16.40	43.61	29.97	13.57
5270	-10.00	2.01	20.05	1.70	3.31	39.881	36.629	13.76	23.75	23.97	10.21	17.07	50.89	29.97	12.90
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-9.90	2.01	20.04	1.70	3.31	39.181	36.578	13.85	24.25	23.97	10.12	17.16	51.95	29.97	12.81

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

### TPC on (Low power mode)

#### Antenna 0 (worst)

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	[mW]	Limit [dBm]	Margin [dB]	Result [dBm]	[mW]	Limit [dBm]	Margin [dB]
5270	-13.36	2.01	20.05	1.70	3.31	39.881	36.629	10.40	10.96	23.97	13.57	13.71	23.48	29.97	16.26
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-13.28	2.01	20.04	1.70	3.31	39.181	36.578	10.47	11.13	23.97	13.50	13.78	23.86	29.97	16.19

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 16, 2016      November 24, 2016      November 29, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      24 deg. C / 40 % RH      23 deg. C / 37 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Shinichi Takano      Hikaru Shirasawa  
Mode : Tx 11ac-80, SISO MCS 3

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	[mW]	Limit [dBm]	Margin [dB]	Result [dBm]	[mW]	Limit [dBm]	Margin [dB]
5210	-15.68	2.00	20.05	2.63	3.31	-	76.025	9.00	7.95	23.97	14.97	12.31	17.03	29.97	17.66
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290	-15.62	2.01	20.05	2.63	3.31	80.060	76.231	9.07	8.08	23.97	14.90	12.38	17.31	29.97	17.59
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	-10.65	2.02	20.03	2.63	3.31	80.001	76.007	14.03	25.31	23.97	9.94	17.34	54.23	29.97	12.63
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	-10.90	2.04	20.06	2.63	3.31	80.031	76.037	13.83	24.17	23.97	10.14	17.14	51.79	29.97	12.83
5775	-11.23	2.09	20.11	2.63	3.31	-	-	13.60	22.92	30.00	16.40	16.91	49.12	36.00	19.09
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

**TPC on (Low power mode)**

**Antenna 0 (worst)**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	[mW]	Limit [dBm]	Margin [dB]	Result [dBm]	[mW]	Limit [dBm]	Margin [dB]
5290	-19.14	2.01	20.05	2.63	3.31	80.060	76.231	5.55	3.59	23.97	18.42	8.86	7.70	29.97	21.11
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	-14.39	2.02	20.03	2.63	3.31	80.001	76.007	10.29	10.70	23.97	13.68	13.60	22.92	29.97	16.37
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	-14.49	2.04	20.06	2.63	3.31	80.031	76.037	10.24	10.57	23.97	13.73	13.55	22.66	29.97	16.42

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 25, 2016      November 29, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Hikaru Shirasawa  
Mode : Tx 11n-20, MIMO, MCS 11

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz] (B for FCC)	99% OBW [MHz] (B for IC)	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5180	-	18.115	13.21	12.81	26.02	14.15	23.97	9.82	28.31	10.27	38.58	15.86	29.97	14.11
5220	-	18.169	12.79	11.76	24.55	13.90	23.97	10.07	27.42	9.43	36.84	15.66	29.97	14.31
5240	-	18.142	12.53	12.20	24.73	13.93	23.97	10.04	26.85	9.78	36.63	15.64	29.97	14.33
5260	20.815	18.187	12.65	13.53	26.18	14.18	23.97	9.79	27.10	10.85	37.95	15.79	29.97	14.18
5300	21.184	18.139	12.94	13.26	26.20	14.18	23.97	9.79	27.73	10.63	38.36	15.84	29.97	14.13
5320	20.858	18.175	12.68	13.01	25.69	14.10	23.97	9.87	27.16	10.43	37.60	15.75	29.97	14.22
5500	21.435	18.204	13.37	12.03	25.40	14.05	23.97	9.92	28.64	9.65	38.29	15.83	29.97	14.14
5580	20.955	18.148	13.06	11.55	24.61	13.91	23.97	10.06	27.99	9.26	37.25	15.71	29.97	14.26
5700	21.179	18.198	12.62	11.08	23.69	13.75	23.97	10.22	27.04	8.88	35.92	15.55	29.97	14.42
5745	-	-	10.12	11.03	21.14	13.25	30.00	16.75	21.68	8.84	30.52	14.85	36.00	21.15
5785	-	-	10.59	10.58	21.17	13.26	30.00	16.74	22.70	8.48	31.18	14.94	36.00	21.06
5825	-	-	10.42	10.36	20.78	13.18	30.00	16.82	22.34	8.31	30.64	14.86	36.00	21.14

Antenna: 0								Antenna: 1					
Tested Frequency [MHz]	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5180	1.65	-12.50	2.00	20.06	3.31	11.21	14.52	-12.52	1.88	20.06	-0.96	11.07	10.11
5220	1.65	-12.63	2.00	20.05	3.31	11.07	14.38	-12.88	1.88	20.05	-0.96	10.70	9.74
5240	1.65	-12.72	2.00	20.05	3.31	10.98	14.29	-12.72	1.88	20.05	-0.96	10.86	9.90
5260	1.65	-12.69	2.01	20.05	3.31	11.02	14.33	-12.28	1.89	20.05	-0.96	11.31	10.35
5300	1.65	-12.58	2.01	20.04	3.31	11.12	14.43	-12.36	1.89	20.04	-0.96	11.22	10.26
5320	1.65	-12.67	2.01	20.04	3.31	11.03	14.34	-12.44	1.89	20.04	-0.96	11.14	10.18
5500	1.65	-12.42	2.01	20.02	3.31	11.26	14.57	-12.76	1.89	20.02	-0.96	10.80	9.84
5580	1.65	-12.57	2.03	20.05	3.31	11.16	14.47	-12.99	1.91	20.05	-0.96	10.62	9.66
5700	1.65	-12.79	2.07	20.08	3.31	11.01	14.32	-13.24	1.95	20.08	-0.96	10.44	9.48
5745	1.65	-13.78	2.08	20.10	3.31	10.05	13.36	-13.29	1.96	20.10	-0.96	10.42	9.46
5785	1.65	-13.60	2.09	20.11	3.31	10.25	13.56	-13.49	1.97	20.11	-0.96	10.24	9.28
5825	1.65	-13.69	2.10	20.12	3.31	10.18	13.49	-13.60	1.98	20.12	-0.96	10.15	9.19

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 25, 2016      November 29, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Hikaru Shirasawa  
Mode : Tx 11n-20, MIMO, MCS 11

**TPC on (Low power mode)**

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz]	99% OBW [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5260	20.815	18.187	6.50	6.37	12.88	11.10	23.97	12.87	13.93	5.11	19.04	12.80	29.97	17.17
5300	21.184	18.139	6.37	6.23	12.60	11.00	23.97	12.97	13.65	4.99	18.64	12.70	29.97	17.27
5320	20.858	18.175	6.08	6.05	12.13	10.84	23.97	13.13	13.03	4.85	17.88	12.52	29.97	17.45
5500	21.435	18.204	4.75	5.15	9.90	9.96	23.97	14.01	10.19	4.12	14.31	11.56	29.97	18.41
5580	20.955	18.148	4.71	4.82	9.53	9.79	23.97	14.18	10.09	3.87	13.96	11.45	29.97	18.52
5700	21.179	18.198	4.47	4.54	9.01	9.55	23.97	14.42	9.57	3.64	13.21	11.21	29.97	18.76

Tested Frequency [MHz]	Duty Factor [dB]	Antenna: 0						Antenna: 1					
		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5260	1.65	-15.58	2.01	20.05	3.31	8.13	11.44	-15.55	1.89	20.05	-0.96	8.04	7.08
5300	1.65	-15.66	2.01	20.04	3.31	8.04	11.35	-15.64	1.89	20.04	-0.96	7.94	6.98
5320	1.65	-15.86	2.01	20.04	3.31	7.84	11.15	-15.77	1.89	20.04	-0.96	7.81	6.85
5500	1.65	-16.91	2.01	20.02	3.31	6.77	10.08	-16.45	1.89	20.02	-0.96	7.11	6.15
5580	1.65	-17.00	2.03	20.05	3.31	6.73	10.04	-16.78	1.91	20.05	-0.96	6.83	5.87
5700	1.65	-17.30	2.07	20.08	3.31	6.50	9.81	-17.11	1.95	20.08	-0.96	6.57	5.61

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 25, 2016      November 29, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Hikaru Shirasawa  
Mode : Tx 11ac-20, MIMO, MCS 3

### Antenna 0+1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5180	-	18.128	13.24	12.66	25.90	14.13	23.97	9.84	28.38	10.15	38.53	15.86	29.97	14.11
5220	-	18.195	13.12	12.54	25.66	14.09	23.97	9.88	28.12	10.06	38.17	15.82	29.97	14.15
5240	-	18.165	13.18	12.72	25.90	14.13	23.97	9.84	28.25	10.20	38.44	15.85	29.97	14.12
5260	21.101	18.157	9.62	13.53	23.15	13.65	23.97	10.32	20.61	10.85	31.46	14.98	29.97	14.99
5300	21.177	18.257	9.35	13.16	22.52	13.53	23.97	10.44	20.04	10.55	30.60	14.86	29.97	15.11
5320	21.202	18.093	9.14	13.04	22.18	13.46	23.97	10.51	19.59	10.46	30.05	14.78	29.97	15.19
5500	20.980	18.133	10.57	11.44	22.01	13.43	23.97	10.54	22.65	9.17	31.82	15.03	29.97	14.94
5580	21.161	18.174	10.05	10.77	20.82	13.18	23.97	10.79	21.53	8.64	30.17	14.80	29.97	15.17
5700	21.305	18.172	10.05	10.20	20.24	13.06	23.97	10.91	21.53	8.17	29.70	14.73	29.97	15.24
5745	-	-	10.19	11.73	21.92	13.41	30.00	16.59	21.83	9.41	31.23	14.95	36.00	21.05
5785	-	-	10.33	10.80	21.13	13.25	30.00	16.75	22.13	8.66	30.79	14.88	36.00	21.12
5825	-	-	10.94	10.80	21.74	13.37	30.00	16.63	23.44	8.66	32.10	15.07	36.00	20.93

Tested Frequency [MHz]	Antenna: 0						Antenna: 1						
	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5180	1.64	-12.48	2.00	20.06	3.31	11.22	14.53	-12.56	1.88	20.06	-0.96	11.02	10.06
5220	1.64	-12.51	2.00	20.05	3.31	11.18	14.49	-12.59	1.88	20.05	-0.96	10.98	10.02
5240	1.64	-12.49	2.00	20.05	3.31	11.20	14.51	-12.53	1.88	20.05	-0.96	11.04	10.08
5260	1.64	-13.87	2.01	20.05	3.31	9.83	13.14	-12.27	1.89	20.05	-0.96	11.31	10.35
5300	1.64	-13.98	2.01	20.04	3.31	9.71	13.02	-12.38	1.89	20.04	-0.96	11.19	10.23
5320	1.64	-14.08	2.01	20.04	3.31	9.61	12.92	-12.42	1.89	20.04	-0.96	11.15	10.19
5500	1.64	-13.43	2.01	20.02	3.31	10.24	13.55	-12.97	1.89	20.02	-0.96	10.58	9.62
5580	1.64	-13.70	2.03	20.05	3.31	10.02	13.33	-13.28	1.91	20.05	-0.96	10.32	9.36
5700	1.64	-13.77	2.07	20.08	3.31	10.02	13.33	-13.59	1.95	20.08	-0.96	10.08	9.12
5745	1.64	-13.74	2.08	20.10	3.31	10.08	13.39	-13.01	1.96	20.10	-0.96	10.69	9.73
5785	1.64	-13.70	2.09	20.11	3.31	10.14	13.45	-13.39	1.97	20.11	-0.96	10.33	9.37
5825	1.64	-13.47	2.10	20.12	3.31	10.39	13.70	-13.41	1.98	20.12	-0.96	10.33	9.37

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 25, 2016      November 29, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Hikaru Shirasawa  
Mode : Tx 11ac-20, MIMO, MCS 3

**TPC on (Low power mode)**

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz]	99% OBW [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5260	21.101	18.157	4.85	6.46	11.32	10.54	23.97	13.43	10.40	5.18	15.58	11.93	29.97	18.04
5300	21.177	18.257	4.71	6.19	10.90	10.37	23.97	13.60	10.09	4.96	15.05	11.78	29.97	18.19
5320	21.202	18.093	4.58	6.12	10.70	10.29	23.97	13.68	9.82	4.90	14.72	11.68	29.97	18.29
5500	20.980	18.133	4.67	4.76	9.42	9.74	23.97	14.23	10.00	3.81	13.81	11.40	29.97	18.57
5580	21.161	18.174	4.49	4.38	8.87	9.48	23.97	14.49	9.62	3.51	13.13	11.18	29.97	18.79
5700	21.305	18.172	4.03	4.02	8.05	9.06	23.97	14.91	8.63	3.22	11.85	10.74	29.97	19.23

Tested Frequency [MHz]	Duty Factor [dB]	Antenna: 0						Antenna: 1					
		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5260	1.64	-16.84	2.01	20.05	3.31	6.86	10.17	-15.48	1.89	20.05	-0.96	8.10	7.14
5300	1.64	-16.96	2.01	20.04	3.31	6.73	10.04	-15.66	1.89	20.04	-0.96	7.91	6.95
5320	1.64	-17.08	2.01	20.04	3.31	6.61	9.92	-15.71	1.89	20.04	-0.96	7.86	6.90
5500	1.64	-16.98	2.01	20.02	3.31	6.69	10.00	-16.78	1.89	20.02	-0.96	6.77	5.81
5580	1.64	-17.20	2.03	20.05	3.31	6.52	9.83	-17.19	1.91	20.05	-0.96	6.41	5.45
5700	1.64	-17.74	2.07	20.08	3.31	6.05	9.36	-17.63	1.95	20.08	-0.96	6.04	5.08



## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 15, 2016      November 16, 2016      November 25, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi  
Mode : Tx 1In-40, MIMO, MCS 11

**Antenna 0+1** Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz]	99% OBW [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5190	-	36.475	4.98	4.79	9.77	9.90	23.97	14.07	10.67	3.84	14.51	11.62	29.97	18.35
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-	36.554	12.25	11.84	24.09	13.82	23.97	10.15	26.24	9.49	35.74	15.53	29.97	14.44
5270	39.337	36.477	12.62	12.92	25.54	14.07	23.97	9.90	27.04	10.36	37.40	15.73	29.97	14.24
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	39.672	36.477	12.11	12.34	24.45	13.88	23.97	10.09	25.94	9.89	35.84	15.54	29.97	14.43

Antenna: 0								Antenna: 1						
Tested Frequency [MHz]	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]	
5190	2.50	-17.59	2.00	20.06	3.31	6.97	10.28	-17.64	1.88	20.06	-0.96	6.80	5.84	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5230	2.50	-13.67	2.00	20.05	3.31	10.88	14.19	-13.70	1.88	20.05	-0.96	10.73	9.77	
5270	2.50	-13.55	2.01	20.05	3.31	11.01	14.32	-13.33	1.89	20.05	-0.96	11.11	10.15	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5310	2.50	-13.72	2.01	20.04	3.31	10.83	14.14	-13.52	1.89	20.04	-0.96	10.91	9.95	

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

### TPC on (Low power mode)

**Antenna 0+1** Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz]	99% OBW [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5270	39.337	36.477	6.05	6.20	12.25	10.88	23.97	13.09	12.97	4.97	17.94	12.54	29.97	17.43
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	39.672	36.477	5.86	6.02	11.88	10.75	23.97	13.22	12.56	4.82	17.38	12.40	29.97	17.57

Antenna: 0								Antenna: 1						
Tested Frequency [MHz]	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]	
5270	2.50	-16.74	2.01	20.05	3.31	7.82	11.13	-16.52	1.89	20.05	-0.96	7.92	6.96	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5310	2.50	-16.87	2.01	20.04	3.31	7.68	10.99	-16.64	1.89	20.04	-0.96	7.79	6.83	

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 15, 2016      November 16, 2016      November 25, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi  
Mode : Tx 11ac-40, MIMO, MCS 3

**Antenna 0+1** Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz]	99% OBW [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5190	-	36.450	5.02	4.77	9.79	9.91	23.97	14.06	10.76	3.82	14.59	11.64	29.97	18.33
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-	36.511	11.35	11.68	23.03	13.62	23.97	10.35	24.32	9.36	33.68	15.27	29.97	14.70
5270	39.607	36.491	11.97	12.86	24.83	13.95	23.97	10.02	25.64	10.31	35.96	15.56	29.97	14.41
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	39.159	36.480	11.48	12.51	24.00	13.80	23.97	10.17	24.60	10.03	34.64	15.40	29.97	14.57

Antenna: 0							Antenna: 1						
Tested Frequency [MHz]	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5190	2.44	-17.49	2.00	20.06	3.31	7.01	10.32	-17.60	1.88	20.06	-0.96	6.78	5.82
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5230	2.44	-13.94	2.00	20.05	3.31	10.55	13.86	-13.70	1.88	20.05	-0.96	10.67	9.71
5270	2.44	-13.72	2.01	20.05	3.31	10.78	14.09	-13.29	1.89	20.05	-0.96	11.09	10.13
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	2.44	-13.89	2.01	20.04	3.31	10.60	13.91	-13.40	1.89	20.04	-0.96	10.97	10.01

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

### TPC on (Low power mode)

**Antenna 0+1** Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW [MHz]	99% OBW [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5270	39.607	36.491	5.45	5.81	11.26	10.51	23.97	13.46	11.67	4.66	16.33	12.13	29.97	17.84
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	39.159	36.480	5.28	5.50	10.78	10.33	23.97	13.64	11.32	4.41	15.73	11.97	29.97	18.00

Antenna: 0							Antenna: 1						
Tested Frequency [MHz]	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5270	2.44	-17.14	2.01	20.05	3.31	7.36	10.67	-16.74	1.89	20.05	-0.96	7.64	6.68
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	2.44	-17.26	2.01	20.04	3.31	7.23	10.54	-16.97	1.89	20.04	-0.96	7.40	6.44

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 16, 2016      November 28, 2016      November 30, 2016  
Temperature / Humidity : 24 deg. C / 40 % RH      23 deg. C / 38 % RH      22 deg. C / 31 % RH  
Engineer : Kenichi Adachi      Hikaru Shirasawa      Shinichi Takano  
Mode : Tx 11ac-80, MIMO, MCS 3

### Antenna 0+1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
1 [mW]	2 [mW]	Sum [mW]	1 [mW]	2 [mW]	Sum [mW]									
5210	-	76.368	3.78	3.73	7.51	8.76	23.97	15.21	8.11	2.99	11.10	10.45	29.97	19.52
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290	80.369	76.253	4.68	4.18	8.86	9.47	23.97	14.50	10.02	3.35	13.38	11.26	29.97	18.71
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	81.063	76.253	10.74	11.87	22.61	13.54	23.97	10.43	23.01	9.51	32.53	15.12	29.97	14.85
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	80.967	76.331	10.84	11.79	22.63	13.55	23.97	10.42	23.23	9.45	32.68	15.14	29.97	14.83
5775	-	-	11.35	11.20	22.55	13.53	30.00	16.47	24.32	8.98	33.30	15.23	36.00	20.77
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Antenna: 0							Antenna: 1						
Tested Frequency [MHz]	Duty Factor [dB]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5210	3.23	-19.50	2.00	20.05	3.31	5.78	9.09	-19.45	1.88	20.05	-0.96	5.71	4.75
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290	3.23	-18.59	2.01	20.05	3.31	6.70	10.01	-18.96	1.89	20.05	-0.96	6.21	5.25
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	3.23	-14.97	2.02	20.03	3.31	10.31	13.62	-14.42	1.90	20.03	-0.96	10.74	9.78
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	3.23	-14.98	2.04	20.06	3.31	10.35	13.66	-14.50	1.92	20.06	-0.96	10.71	9.75
5775	3.23	-14.88	2.09	20.11	3.31	10.55	13.86	-14.82	1.97	20.11	-0.96	10.49	9.53
-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.1 Measurement Room		
Report No.	11334871S-E-R1		
Date	November 16, 2016	November 28, 2016	November 30, 2016
Temperature / Humidity	24 deg. C / 40 % RH	23 deg. C / 38 % RH	22 deg. C / 31 % RH
Engineer	Kenichi Adachi	Hikaru Shirasawa	Shinichi Takano
Mode	Tx 11ac-80, MIMO, MCS 3		

**TPC on (Low power mode)**

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted power						e.i.r.p.					
			Antenna			Result [dBm]	Limit [dBm]	Margin [dB]	Antenna			Result [dBm]	Limit [dBm]	Margin [dB]
			1 [mW]	2 [mW]	Sum [mW]				1 [mW]	2 [mW]	Sum [mW]			
5290	80.369	76.253	2.26	2.12	4.38	6.41	23.97	17.56	4.84	1.70	6.54	8.16	29.97	21.81
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	81.063	76.253	3.73	4.39	8.12	9.10	23.97	14.87	8.00	3.52	11.52	10.61	29.97	19.36
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	80.967	76.331	3.92	4.52	8.44	9.26	23.97	14.71	8.39	3.63	12.02	10.80	29.97	19.17

Tested Frequency [MHz]	Duty Factor [dB]	Antenna: 0						Antenna: 1					
		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result		Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	Result	
						Cond. Power [dBm]	e.i.r.p. [dBm]					Cond. Power [dBm]	e.i.r.p. [dBm]
5290	3.23	-21.75	2.01	20.05	3.31	3.54	6.85	-21.91	1.89	20.05	-0.96	3.26	2.30
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	3.23	-19.56	2.02	20.03	3.31	5.72	9.03	-18.74	1.90	20.03	-0.96	6.42	5.46
-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	3.23	-19.40	2.04	20.06	3.31	5.93	9.24	-18.66	1.92	20.06	-0.96	6.55	5.59

## Maximum Conducted Output Power

Test place Shonan EMC Lab. No.1 Measurement Room  
Report No. 11334871S-E-R1  
Date November 7, 2016 November 9, 2016 November 15, 2016 November 16, 2016  
Temperature / Humidity 26 deg. C / 35 % RH 25 deg. C / 34 % RH 25 deg. C / 34 % RH 24 deg. C / 40 % RH  
Engineer Kenichi Adachi Kenichi Adachi Kenichi Adachi Kenichi Adachi  
Mode Tx

### 5220 MHz

Mode	data rate [Mbps]	Reading (timed average) Antenna						Duty factor [dB]	Burst power Antenna			Remarks
		0	1						0	1		
		[dBm]	[dBm]						[dBm]	[dBm]		
11a	6	<b>-9.05</b>	-10.06	-	-	-	-	0.28	-8.77	-9.78	-	* timed average worst
	9	-9.15	-10.34	-	-	-	-	0.41	-8.74	-9.93	-	
	12	-9.23	-10.35	-	-	-	-	0.54	-8.69	-9.81	-	
	18	-9.45	-10.55	-	-	-	-	0.78	-8.67	-9.77	-	
	24	-9.55	-10.62	-	-	-	-	1.00	-8.55	-9.62	-	
	36	-9.89	-10.66	-	-	-	-	1.38	-8.51	-9.28	-	
	48	-10.16	-10.74	-	-	-	-	1.72	<b>-8.44</b>	-9.02	-	* burst power worst
	54	-10.33	-10.86	-	-	-	-	1.85	-8.48	-9.01	-	

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

### 5220 MHz

Mode	MCS number	Reading (timed average) Antenna						Duty factor [dB]	Burst power Antenna			Remarks
		0	1						0	1		
		[dBm]	[dBm]						[dBm]	[dBm]		
11n-20 SISO	0	<b>-8.74</b>	-9.74	-	-	-	-	0.30	-8.44	-9.44	-	* timed average worst
	1	-8.80	-9.98	-	-	-	-	0.56	-8.24	-9.42	-	
	2	-9.04	-10.23	-	-	-	-	0.81	-8.23	-9.42	-	
	3	-8.92	-10.02	-	-	-	-	1.02	<b>-7.90</b>	-9.00	-	* burst power worst
	4	-9.36	-10.61	-	-	-	-	1.38	-7.98	-9.23	-	
	5	-9.78	-10.74	-	-	-	-	1.70	-8.08	-9.04	-	
	6	-9.88	-10.98	-	-	-	-	1.81	-8.07	-9.17	-	
	7	-10.03	-11.10	-	-	-	-	1.95	-8.08	-9.15	-	

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Conducted Output Power

Test place                      Shonan EMC Lab. No.1 Measurement Room  
Report No.                      11334871S-E-R1  
Date                              November 7, 2016              November 9, 2016              November 15, 2016              November 16, 2016  
Temperature / Humidity      26 deg. C / 35 % RH        25 deg. C / 34 % RH        25 deg. C / 34 % RH        24 deg. C / 40 % RH  
Engineer                        Kenichi Adachi                Kenichi Adachi                Kenichi Adachi                Kenichi Adachi  
Mode                              Tx

**5220 MHz**

Mode	MCS number	Reading (timed average)						Duty factor	Burst power			Remarks
		Antenna							Antenna			
		0	1						0	1		
		[dBm]	[dBm]				[dB]	[dBm]	[dBm]			
11ac-20 SISO	0	<b>-8.52</b>	-9.62	-	-	-	0.30	-8.22	-9.32	-	* timed average worst	
	1	-8.72	-9.88	-	-	-	0.57	-8.15	-9.31	-		
	2	-8.90	-10.05	-	-	-	0.80	-8.10	-9.25	-		
	3	-8.91	-9.97	-	-	-	1.00	<b>-7.91</b>	-8.97	-	* burst power worst	
	4	-9.34	-10.45	-	-	-	1.35	-7.99	-9.10	-		
	5	-9.72	-10.82	-	-	-	1.67	-8.05	-9.15	-		
	6	-9.70	-10.85	-	-	-	1.78	-7.92	-9.07	-		
	7	-9.91	-11.02	-	-	-	1.92	-7.99	-9.10	-		
	8	-10.60	-12.00	-	-	-	2.11	-8.49	-9.89	-		

\* Worst rate  
Sample Calculation:  
Burst power = Reading (timed average) + Duty factor  
All comparison were carried out on same frequency and measurement factors.

**5230 MHz**

Mode	MCS number	Reading (timed average)						Duty factor	Burst power			Remarks
		Antenna							Antenna			
		0	1						0	1		
		[dBm]	[dBm]				[dB]	[dBm]	[dBm]			
11n-40 SISO	0	<b>-9.62</b>	-10.96	-	-	-	0.58	-9.04	-10.38	-	* timed average worst	
	1	-10.16	-11.41	-	-	-	1.03	-9.13	-10.38	-		
	2	-10.55	-11.84	-	-	-	1.42	-9.13	-10.42	-		
	3	-10.67	-11.89	-	-	-	1.70	<b>-8.97</b>	-10.19	-	* burst power worst	
	4	-11.31	-12.59	-	-	-	2.04	-9.27	-10.55	-		
	5	-11.66	-12.95	-	-	-	2.59	-9.07	-10.36	-		
	6	-11.87	-13.05	-	-	-	2.69	-9.18	-10.36	-		
	7	-12.08	-13.16	-	-	-	2.88	-9.20	-10.28	-		

\* Worst rate  
Sample Calculation:  
Burst power = Reading (timed average) + Duty factor  
All comparison were carried out on same frequency and measurement factors.

## Maximum Conducted Output Power

Test place                      Shonan EMC Lab. No.1 Measurement Room  
Report No.                      11334871S-E-R1  
Date                              November 7, 2016      November 9, 2016      November 15, 2016      November 16, 2016  
Temperature / Humidity      26 deg. C / 35 % RH    25 deg. C / 34 % RH    25 deg. C / 34 % RH    24 deg. C / 40 % RH  
Engineer                        Kenichi Adachi          Kenichi Adachi          Kenichi Adachi          Kenichi Adachi  
Mode                              Tx

### 5190 MHz

Mode	MCS number	Reading (timed average)						Duty factor	Burst power			Remarks
		Antenna							Antenna			
		0	1						0	1		
		[dBm]	[dBm]					[dB]	[dBm]	[dBm]		
11ac-40 SISO	0	<b>-12.62</b>	-13.74	-	-	-	-	0.58	-12.04	-13.16	-	* timed average worst
	1	-13.15	-14.40	-	-	-	-	1.04	-12.11	-13.36	-	
	2	-13.61	-14.70	-	-	-	-	1.38	-12.23	-13.32	-	
	3	-13.64	-14.79	-	-	-	-	1.70	<b>-11.94</b>	-13.09	-	* burst power worst
	4	-14.18	-15.53	-	-	-	-	2.15	-12.03	-13.38	-	
	5	-14.65	-15.93	-	-	-	-	2.53	-12.12	-13.40	-	
	6	-14.84	-16.02	-	-	-	-	2.58	-12.26	-13.44	-	
	7	-14.97	-16.16	-	-	-	-	2.80	-12.17	-13.36	-	
	8	-15.05	-16.15	-	-	-	-	2.90	-12.15	-13.25	-	
9	-15.27	-16.44	-	-	-	-	3.15	-12.12	-13.29	-		

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

### 5230 MHz

Mode	MCS number	Reading (timed average)						Duty factor	Burst power			Remarks
		Antenna							Antenna			
		0	1						0	1		
		[dBm]	[dBm]					[dB]	[dBm]	[dBm]		
11ac-40 SISO	0	<b>-9.69</b>	-10.70	-	-	-	-	0.58	-9.11	-10.12	-	* timed average worst
	1	-10.15	-11.40	-	-	-	-	1.04	-9.11	-10.36	-	
	2	-10.61	-11.80	-	-	-	-	1.38	-9.23	-10.42	-	
	3	-10.66	-11.89	-	-	-	-	1.70	<b>-8.96</b>	-10.19	-	* burst power worst
	4	-11.23	-12.53	-	-	-	-	2.15	-9.08	-10.38	-	
	5	-11.65	-12.89	-	-	-	-	2.53	-9.12	-10.36	-	
	6	-11.80	-13.08	-	-	-	-	2.58	-9.22	-10.50	-	
	7	-11.97	-13.16	-	-	-	-	2.80	-9.17	-10.36	-	
	8	-12.55	-13.15	-	-	-	-	2.90	-9.65	-10.25	-	
9	-12.77	-13.14	-	-	-	-	3.15	-9.62	-9.99	-		

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 9, 2016      November 15, 2016      November 16, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      25 deg. C / 34 % RH      25 deg. C / 34 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Kenichi Adachi  
Mode : Tx

### 5210 MHz

Mode	MCS number	Reading (timed average)							Duty factor	Burst power			Remarks
		Antenna								Antenna			
		0	1							0	1		
		[dBm]	[dBm]					[dB]	[dBm]	[dBm]			
11ac-80 SISO	0	<b>-14.69</b>	-15.07	-	-	-	-	1.07	-13.62	-14.00	-	* timed average worst	
	1	-15.35	-15.79	-	-	-	-	1.78	-13.57	-14.01	-		
	2	-15.85	-16.41	-	-	-	-	2.25	-13.60	-14.16	-		
	3	-15.68	-16.31	-	-	-	-	2.63	<b>-13.05</b>	-13.68	-	* burst power worst	
	4	-16.20	-16.70	-	-	-	-	3.06	-13.14	-13.64	-		
	5	-16.59	-17.24	-	-	-	-	3.52	-13.07	-13.72	-		
	6	-16.66	-17.17	-	-	-	-	3.48	-13.18	-13.69	-		
	7	-16.85	-17.45	-	-	-	-	3.58	-13.27	-13.87	-		
	8	-16.91	-17.41	-	-	-	-	3.74	-13.17	-13.67	-		
9	-17.07	-17.76	-	-	-	-	3.67	-13.40	-14.09	-			

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

### 5220 MHz

Mode	MCS Number	Reading (timed average)							Duty factor	Burst power			Remarks
		Antenna								Antenna			
		0	1	0	1	0+1	0+1	0		1	0+1		
		[dBm]	[dBm]	[mW]	[mW]	[mW]	[dBm]	[dB]	[dBm]	[dBm]	[dBm]		
11n-20 MIMO	8	<b>-11.75</b>	-11.89	0.067	0.065	0.132	-8.81	0.56	-	-	-8.25	* timed average worst	
	9	-12.05	-12.44	0.062	0.057	0.119	-9.23	1.01	-	-	-8.22		
	10	-12.67	-12.81	0.054	0.052	0.106	-9.73	1.36	-	-	-8.37		
	11	-12.63	-12.88	0.055	0.052	0.106	-9.74	1.65	-	-	<b>-8.09</b>	* burst power worst	
	12	-13.16	-13.43	0.048	0.045	0.094	-10.28	2.11	-	-	-8.17		
	13	-13.52	-13.73	0.044	0.042	0.087	-10.61	2.46	-	-	-8.15		
	14	-13.61	-13.89	0.044	0.041	0.084	-10.74	2.59	-	-	-8.15		
15	-13.73	-14.02	0.042	0.040	0.082	-10.86	2.69	-	-	-8.17			

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 9, 2016      November 15, 2016      November 16, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      25 deg. C / 34 % RH      25 deg. C / 34 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Kenichi Adachi  
Mode : Tx

### 5220 MHz

Mode	MCS Number	Reading (timed average)						Duty factor [dB]	Burst power			Remarks
		Antenna							Antenna			
		0 [dBm]	1 [dBm]	0 [mW]	1 [mW]	0 + 1 [mW]	0 + 1 [dBm]		0 [dBm]	1 [dBm]	0 + 1 [dBm]	
11ac-20 MIMO	0	-11.91	<b>-11.81</b>	0.064	0.066	0.130	-8.85	0.56	-	-	-8.29	* timed average worst
	1	-11.96	-12.32	0.064	0.059	0.122	-9.13	1.00	-	-	-8.13	
	2	-12.53	-12.68	0.056	0.054	0.110	-9.59	1.35	-	-	-8.25	
	3	-12.51	-12.59	0.056	0.055	0.111	-9.54	1.64	-	-	<b>-7.90</b>	* burst power worst
	4	-12.99	-13.08	0.050	0.049	0.099	-10.02	2.07	-	-	-7.96	
	5	-13.35	-13.41	0.046	0.046	0.092	-10.37	2.43	-	-	-7.94	
	6	-13.43	-13.64	0.045	0.043	0.089	-10.52	2.53	-	-	-8.00	
	7	-13.72	-13.67	0.042	0.043	0.085	-10.68	2.66	-	-	-8.03	
8	-13.79	-14.01	0.042	0.040	0.082	-10.89	2.88	-	-	-8.01		

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

### 5230 MHz

Mode	MCS Number	Reading (timed average)						Duty factor [dB]	Burst power			Remarks
		Antenna							Antenna			
		0 [dBm]	1 [dBm]	0 [mW]	1 [mW]	0 + 1 [mW]	0 + 1 [dBm]		0 [dBm]	1 [dBm]	0 + 1 [dBm]	
11n-40 MIMO	8	-12.27	<b>-12.18</b>	0.059	0.061	0.120	-9.21	1.02	-	-	-8.19	* timed average worst
	9	-13.01	-12.86	0.050	0.052	0.102	-9.92	1.67	-	-	-8.25	
	10	-13.50	-13.63	0.045	0.043	0.088	-10.55	2.10	-	-	-8.45	
	11	-13.67	-13.70	0.043	0.043	0.086	-10.67	2.50	-	-	<b>-8.17</b>	* burst power worst
	12	-14.24	-14.19	0.038	0.038	0.076	-11.20	2.94	-	-	-8.26	
	13	-14.54	-14.51	0.035	0.035	0.071	-11.51	3.33	-	-	-8.18	
	14	-14.68	-14.66	0.034	0.034	0.068	-11.66	3.43	-	-	-8.23	
15	-14.78	-14.74	0.033	0.034	0.067	-11.75	3.57	-	-	-8.18		

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 7, 2016      November 9, 2016      November 15, 2016      November 16, 2016  
Temperature / Humidity : 26 deg. C / 35 % RH      25 deg. C / 34 % RH      25 deg. C / 34 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Kenichi Adachi  
Mode : Tx

### 5230 MHz

Mode	MCS Number	Reading (timed average)						Duty factor [dB]	Burst power			Remarks
		Antenna							Antenna			
		0 [dBm]	1 [dBm]	0 [mW]	1 [mW]	0+1 [mW]	0+1 [dBm]		0 [dBm]	1 [dBm]	0+1 [dBm]	
11ac-40 MIMO	0	<b>-12.55</b>	-12.72	0.056	0.053	0.109	-9.62	1.02	-	-	-8.60	* timed average worst
	1	-13.18	-13.22	0.048	0.048	0.096	-10.19	1.66	-	-	-8.53	
	2	-13.68	-13.82	0.043	0.041	0.084	-10.74	2.09	-	-	-8.65	
	3	-13.94	-13.70	0.040	0.043	0.083	-10.81	2.44	-	-	<b>-8.37</b>	* burst power worst
	4	-14.40	-14.39	0.036	0.036	0.073	-11.38	2.85	-	-	-8.53	
	5	-14.84	-14.69	0.033	0.034	0.067	-11.75	3.22	-	-	-8.53	
	6	-14.97	-14.79	0.032	0.033	0.065	-11.87	3.35	-	-	-8.52	
	7	-15.01	-15.08	0.032	0.031	0.063	-12.03	3.46	-	-	-8.57	
	8	-15.19	-15.01	0.030	0.032	0.062	-12.09	3.55	-	-	-8.54	
9	-15.24	-15.41	0.030	0.029	0.059	-12.31	3.71	-	-	-8.60		

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

### 5210 MHz

Mode	MCS Number	Reading (timed average)						Duty factor [dB]	Burst power			Remarks
		Antenna							Antenna			
		0 [dBm]	1 [dBm]	0 [mW]	1 [mW]	0+1 [mW]	0+1 [dBm]		0 [dBm]	1 [dBm]	0+1 [dBm]	
11ac-80 MIMO	0	<b>-18.05</b>	-18.23	0.016	0.015	0.031	-15.13	1.75	-	-	-13.38	* timed average worst
	1	-19.11	-18.98	0.012	0.013	0.025	-16.03	2.51	-	-	-13.52	
	2	-19.52	-19.50	0.011	0.011	0.022	-16.50	2.94	-	-	-13.56	
	3	-19.50	-19.45	0.011	0.011	0.023	-16.46	3.23	-	-	<b>-13.23</b>	* burst power worst
	4	-19.85	-19.86	0.010	0.010	0.021	-16.84	3.59	-	-	-13.25	
	5	-20.13	-20.11	0.010	0.010	0.019	-17.11	3.86	-	-	-13.25	
	6	-20.16	-20.36	0.010	0.009	0.019	-17.25	3.87	-	-	-13.38	
	7	-20.28	-20.54	0.009	0.009	0.018	-17.40	4.01	-	-	-13.39	
	8	-20.29	-20.57	0.009	0.009	0.018	-17.42	4.02	-	-	-13.40	
9	-20.47	-20.55	0.009	0.009	0.018	-17.50	4.19	-	-	-13.31		

\* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place	Shonan EMC Lab. No.1 Measurement Room		
Report No.	11334871S-E-R1		
Date	November 7, 2016	November 16, 2016	November 28, 2016
Temperature / Humidity	26 deg. C / 35 % RH	24 deg. C / 40 % RH	23 deg. C / 38 % RH
Engineer	Kenichi Adachi	Kenichi Adachi	Hikaru Shirasawa
Mode	Tx		

(Tx, 11a, 6 Mbps)

**Antenna: 0**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5180	-8.96	2.00	20.06	13.10	20.42
5220	-9.05	2.00	20.05	13.00	19.95
5240	-9.19	2.00	20.05	12.86	19.32
5260	-8.46	2.01	20.05	13.60	22.91
5300	-8.44	2.01	20.04	13.61	22.96
5320	-8.55	2.01	20.04	13.50	22.39
5500	-8.34	2.01	20.02	13.69	23.39
5580	-8.48	2.03	20.05	13.60	22.91
5700	-8.91	2.07	20.08	13.24	21.09
5745	-8.84	2.08	20.10	13.34	21.58
5785	-8.97	2.09	20.11	13.23	21.04
5825	-9.05	2.10	20.12	13.17	20.75

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

The test was performed with condition that obtained the maximum Timed average power in pre-check.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place	Shonan EMC Lab. No.1 Measurement Room			
Report No.	11334871S-E-R1			
Date	November 9, 2016	November 16, 2016	November 24, 2016	November 28, 2016
Temperature / Humidity	25 deg. C / 34 % RH	24 deg. C / 40 % RH	23 deg. C / 37 % RH	23 deg. C / 38 % RH
Engineer	Kenichi Adachi	Kenichi Adachi	Shinichi Takano	Hikaru Shirasawa
Mode	Tx			

(Tx, 11n-20, MCS 0)

**Antenna: 0**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5180	-9.12	2.00	20.06	12.94	19.68
5220	-8.74	2.00	20.05	13.31	21.43
5240	-8.61	2.00	20.05	13.44	22.08
5260	-8.44	2.01	20.05	13.62	23.01
5300	-8.41	2.01	20.04	13.64	23.12
5320	-8.56	2.01	20.04	13.49	22.34
5500	-9.22	2.01	20.02	12.81	19.10
5580	-9.26	2.03	20.05	12.82	19.14
5700	-9.80	2.07	20.08	12.35	17.18
5745	-9.03	2.08	20.10	13.15	20.65
5785	-9.17	2.09	20.11	13.03	20.09
5825	-8.85	2.10	20.12	13.37	21.73

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

The test was performed with condition that obtained the maximum Timed average power in pre-check.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 24, 2016      November 28, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      23 deg. C / 37 % RH      23 deg. C / 38 % RH  
Engineer : Kenichi Adachi      Shinichi Takano      Hikaru Shirasawa  
Mode : Tx

(Tx, 11ac-20, MCS 0)

**Antenna: 0**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5180	-8.36	2.00	20.06	13.70	23.44
5220	-8.52	2.00	20.05	13.53	22.54
5240	-8.56	2.00	20.05	13.49	22.34
5260	-7.92	2.01	20.05	14.14	25.94
5300	-7.98	2.01	20.04	14.07	25.53
5320	-8.02	2.01	20.04	14.03	25.29
5500	-9.15	2.01	20.02	12.88	19.41
5580	-9.24	2.03	20.05	12.84	19.23
5700	-9.73	2.07	20.08	12.42	17.46
5745	-9.04	2.08	20.10	13.14	20.61
5785	-9.12	2.09	20.11	13.08	20.32
5825	-8.83	2.10	20.12	13.39	21.83

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

The test was performed with condition that obtained the maximum Timed average power in pre-check.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place                   Shonan EMC Lab. No.1 Measurement Room  
Report No.                   11334871S-E-R1  
Date                         November 7, 2016           November 16, 2016  
Temperature / Humidity   26 deg. C / 35 % RH      24 deg. C / 40 % RH  
Engineer                   Kenichi Adachi             Kenichi Adachi  
Mode                         Tx

(Tx, 11n-40, MCS 0)

**Antenna: 0**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5190	-12.67	2.00	20.06	9.39	8.69
-	-	-	-	-	-
5230	-9.62	2.00	20.05	12.43	17.50
5270	-8.88	2.01	20.05	13.18	20.80
-	-	-	-	-	-
5310	-8.82	2.01	20.04	13.23	21.04

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

The test was performed with condition that obtained the maximum Timed average power in pre-check.

(Tx, 11ac-40, MCS 0)

**Antenna: 0**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5190	-12.62	2.00	20.06	9.44	8.79
-	-	-	-	-	-
5230	-9.69	2.00	20.05	12.36	17.22
5270	-8.90	2.01	20.05	13.16	20.70
-	-	-	-	-	-
5310	-8.81	2.01	20.04	13.24	21.09

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

The test was performed with condition that obtained the maximum Timed average power in pre-check.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place	Shonan EMC Lab. No.1 Measurement Room			
Report No.	11334871S-E-R1			
Date	November 7, 2016	November 16, 2016	November 24, 2016	November 29, 2016
Temperature / Humidity	26 deg. C / 35 % RH	24 deg. C / 40 % RH	23 deg. C / 37 % RH	21 deg. C / 32 % RH
Engineer	Kenichi Adachi	Kenichi Adachi	Shinichi Takano	Hikaru Shirasawa
Mode	Tx			

(Tx, 11ac-80, MCS 0)

**Antenna: 0**

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average)	
				[dBm]	[mW]
5210	-14.69	2.00	20.05	7.36	5.45
-	-	-	-	-	-
-	-	-	-	-	-
5290	-14.54	2.01	20.05	7.52	5.65
-	-	-	-	-	-
-	-	-	-	-	-
5530	-11.11	2.02	20.03	10.94	12.42
-	-	-	-	-	-
5610	-11.19	2.04	20.06	10.91	12.33
5775	-9.81	2.09	20.11	12.39	17.34
-	-	-	-	-	-
-	-	-	-	-	-

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

The test was performed with condition that obtained the maximum Timed average power in pre-check.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 25, 2016      November 29, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Hikaru Shirasawa  
Mode : Tx

(Tx, 11n-20, MIMO, MCS 8)

Tested Frequency [MHz]	Antenna: 0				Antenna: 1				Antenna: 0 + 1			
	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Result (Timed average)			
									Antenna 1 [mW]	Antenna 2 [mW]	Sum 1+2 [dBm]	
5180	-11.68	2.00	20.06	10.38	-11.77	1.88	20.06	10.17	10.91	10.41	21.32	13.29
5220	-11.55	2.00	20.05	10.50	-11.69	1.88	20.05	10.24	11.22	10.58	21.80	13.38
5240	-11.66	2.00	20.05	10.39	-11.75	1.88	20.05	10.18	10.94	10.43	21.37	13.30
5260	-11.54	2.01	20.05	10.52	-11.37	1.89	20.05	10.57	11.27	11.41	22.68	13.56
5300	-11.58	2.01	20.04	10.47	-11.40	1.89	20.04	10.53	11.14	11.31	22.45	13.51
5320	-11.64	2.01	20.04	10.41	-11.52	1.89	20.04	10.41	10.99	11.00	21.99	13.42
5500	-11.53	2.01	20.02	10.50	-11.87	1.89	20.02	10.04	11.22	10.10	21.32	13.29
5580	-11.68	2.03	20.05	10.40	-12.10	1.91	20.05	9.86	10.96	9.69	20.66	13.15
5700	-11.90	2.07	20.08	10.25	-12.35	1.95	20.08	9.68	10.59	9.30	19.89	12.99
5745	-12.89	2.08	20.10	9.29	-12.52	1.96	20.10	9.54	8.49	9.00	17.50	12.43
5785	-12.73	2.09	20.11	9.47	-12.72	1.97	20.11	9.36	8.85	8.64	17.49	12.43
5825	-12.63	2.10	20.12	9.59	-12.97	1.98	20.12	9.13	9.10	8.19	17.29	12.38

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.



**Average Output Power**  
**(Reference data for RF Exposure)**

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 9, 2016      November 16, 2016      November 25, 2016      November 29, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH      23 deg. C / 28 % RH      21 deg. C / 32 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi      Kenichi Adachi      Hikaru Shirasawa  
Mode : Tx

(Tx, 11ac-20, MIMO, MCS 0)

Tested Frequency [MHz]	Antenna: 0				Antenna: 1				Antenna: 0 + 1			
	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Result (Timed average)			
									Antenna 1 [mW]	Antenna 2 [mW]	Sum 1+2 [dBm]	
5180	-11.71	2.00	20.06	10.35	-11.62	1.88	20.06	10.32	10.84	10.77	21.61	13.35
5220	-11.91	2.00	20.05	10.14	-11.81	1.88	20.05	10.12	10.33	10.29	20.62	13.14
5240	-11.93	2.00	20.05	10.12	-11.83	1.88	20.05	10.10	10.28	10.24	20.52	13.12
5260	-13.01	2.01	20.05	9.05	-11.54	1.89	20.05	10.40	8.04	10.97	19.01	12.79
5300	-13.12	2.01	20.04	8.93	-11.64	1.89	20.04	10.29	7.82	10.70	18.52	12.68
5320	-13.24	2.01	20.04	8.81	-11.78	1.89	20.04	10.15	7.60	10.36	17.96	12.54
5500	-12.62	2.01	20.02	9.41	-12.16	1.89	20.02	9.75	8.73	9.45	18.18	12.60
5580	-12.89	2.03	20.05	9.19	-12.47	1.91	20.05	9.49	8.30	8.90	17.20	12.35
5700	-12.96	2.07	20.08	9.19	-12.78	1.95	20.08	9.25	8.30	8.42	16.72	12.23
5745	-12.87	2.08	20.10	9.31	-13.34	1.96	20.10	8.72	8.53	7.45	15.99	12.04
5785	-12.79	2.09	20.11	9.41	-13.79	1.97	20.11	8.29	8.73	6.75	15.48	11.90
5825	-12.66	2.10	20.12	9.56	-14.10	1.98	20.12	8.00	9.04	6.32	15.35	11.86

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 15, 2016      November 16, 2016  
Temperature / Humidity : 25 deg. C / 34 % RH      24 deg. C / 40 % RH  
Engineer : Kenichi Adachi      Kenichi Adachi  
Mode : Tx

(Tx, 11n-40, MIMO, MCS 8)

Tested Frequency [MHz]	Antenna: 0				Antenna: 1				Antenna: 0 + 1			
	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Result (Timed average)			
									Antenna 1 [mW]	Antenna 2 [mW]	Sum 1+2 [dBm]	
5190	-16.35	2.00	20.06	5.71	-16.44	1.88	20.06	5.50	3.72	3.55	7.28	8.62
-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-12.27	2.00	20.05	9.78	-12.18	1.88	20.05	9.75	9.51	9.45	18.96	12.78
5270	-12.11	2.01	20.05	9.95	-11.94	1.89	20.05	10.00	9.89	10.01	19.89	12.99
-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-12.34	2.01	20.04	9.71	-12.12	1.89	20.04	9.81	9.35	9.58	18.93	12.77

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

(Tx, 11ac-40, MIMO, MCS 0)

Tested Frequency [MHz]	Antenna: 0				Antenna: 1				Antenna: 0 + 1			
	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Result (Timed average)			
									Antenna 1 [mW]	Antenna 2 [mW]	Sum 1+2 [dBm]	
5190	-16.25	2.00	20.06	5.81	-16.28	1.88	20.06	5.66	3.81	3.68	7.50	8.75
-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-12.55	2.00	20.05	9.50	-12.72	1.88	20.05	9.21	8.91	8.34	17.26	12.37
5270	-12.68	2.01	20.05	9.38	-12.06	1.89	20.05	9.88	8.67	9.74	18.41	12.65
-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-12.77	2.01	20.04	9.28	-12.15	1.89	20.04	9.78	8.47	9.51	17.99	12.55

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 16, 2016      November 28, 2016      November 30, 2016  
Temperature / Humidity : 24 deg. C / 40 % RH      23 deg. C / 38 % RH      22 deg. C / 31 % RH  
Engineer : Kenichi Adachi      Hikaru Shirasawa      Shinichi Takano  
Mode : Tx

(Tx, 11ac-80, MIMO, MCS 0)

Tested Frequency [MHz]	Antenna: 0				Antenna: 1				Antenna: 0 + 1			
	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Timed average) [dBm]	Result (Timed average)			
									Antenna 1 [mW]	Antenna 2 [mW]	Sum 1+2 [dBm]	
5210	-18.05	2.00	20.05	4.00	-18.23	1.88	20.05	3.70	2.51	2.35	4.86	6.86
-	-	-	-	-	-	-	-	-	-	-	-	-
5290	-17.54	2.01	20.05	4.52	-17.86	1.89	20.05	4.08	2.83	2.56	5.39	7.32
-	-	-	-	-	-	-	-	-	-	-	-	-
5530	-13.93	2.02	20.03	8.12	-13.62	1.90	20.03	8.31	6.49	6.78	13.27	11.23
-	-	-	-	-	-	-	-	-	-	-	-	-
5610	-13.90	2.04	20.06	8.20	-13.55	1.92	20.06	8.43	6.61	6.97	13.58	11.33
5775	-13.65	2.09	20.11	8.55	-13.56	1.97	20.11	8.52	7.16	7.12	14.28	11.55
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss


\*The equipment and cables were not used for factor 0 dB of the data sheets.

### Burst rate confirmation


(for Maximum Conducted Output Power)

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	26 deg. C / 36 % RH
Engineer	Shinichi Takano
Mode	Tx


#### 11a, 48 Mbps

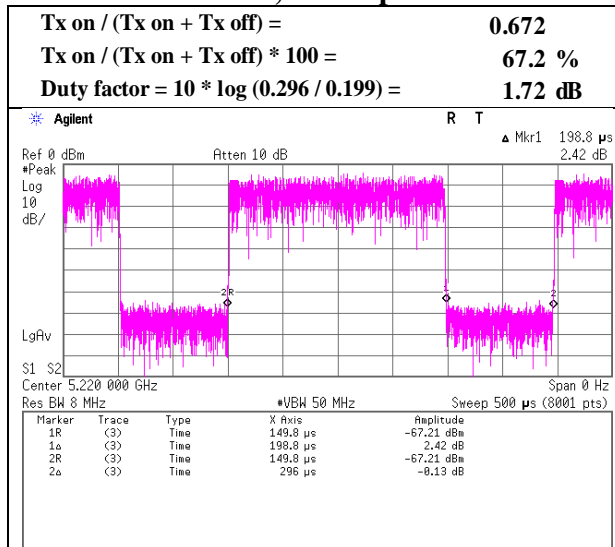

#### 11n-20, SISO, MCS 3

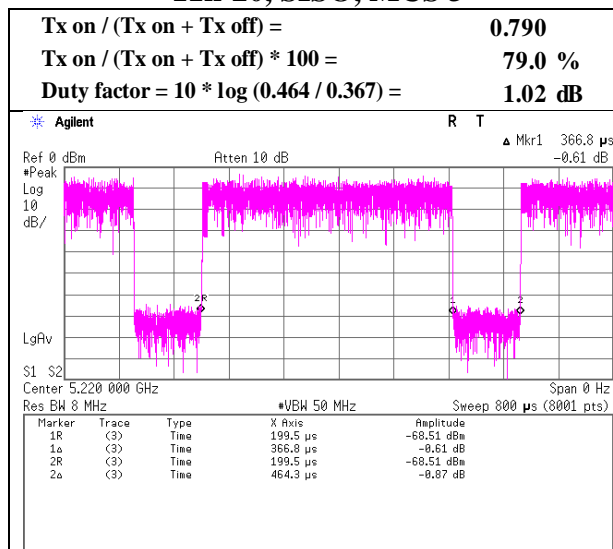

#### 11n-20, MIMO MCS 11

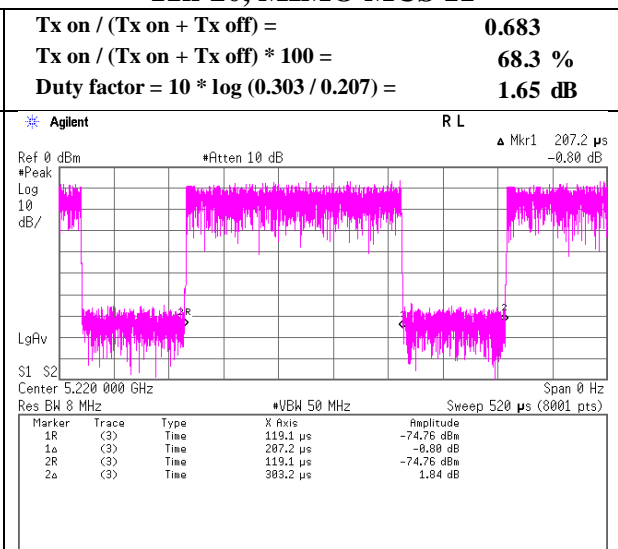


### Burst rate confirmation


(for Maximum Conducted Output Power)

Test place : Shonan EMC Lab. No.1 Measurement Room  
 Report No. : 11334871S-E-R1  
 Date : August 24, 2016  
 Temperature / Humidity : 26 deg. C / 36 % RH  
 Engineer : Shinichi Takano  
 Mode : Tx


#### 11ac-20, SISO, MCS 3

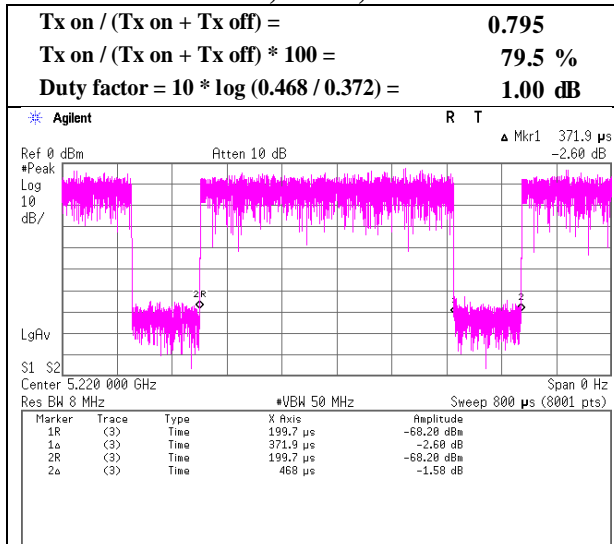


#### 11ac-20, MIMO, MCS 3

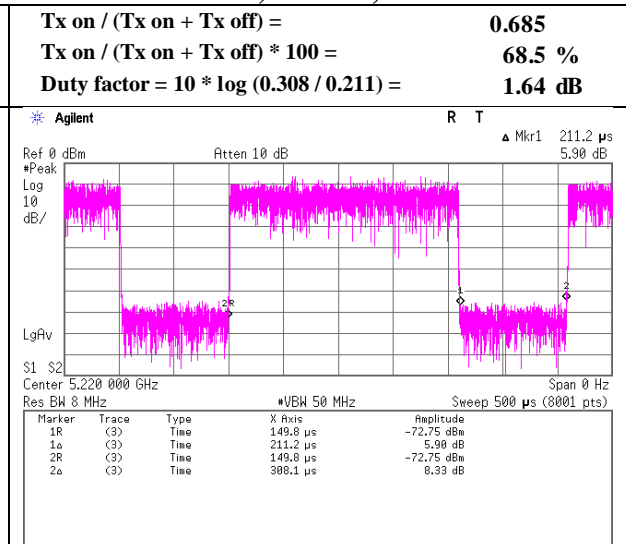

#### 11n-40, SISO, MCS 3

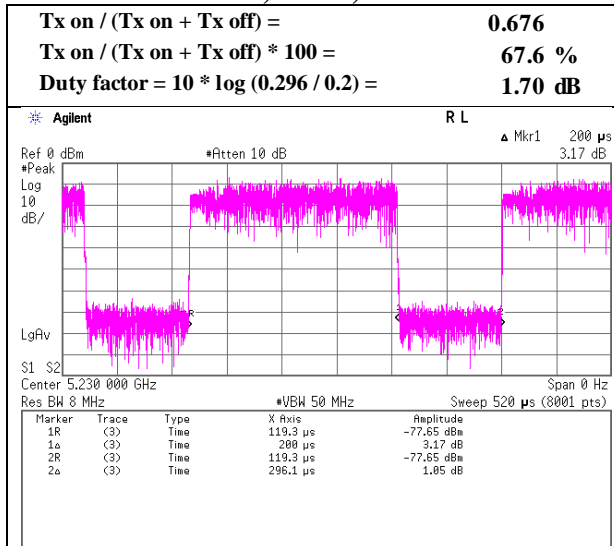

#### 11n-40, MIMO, MCS 11

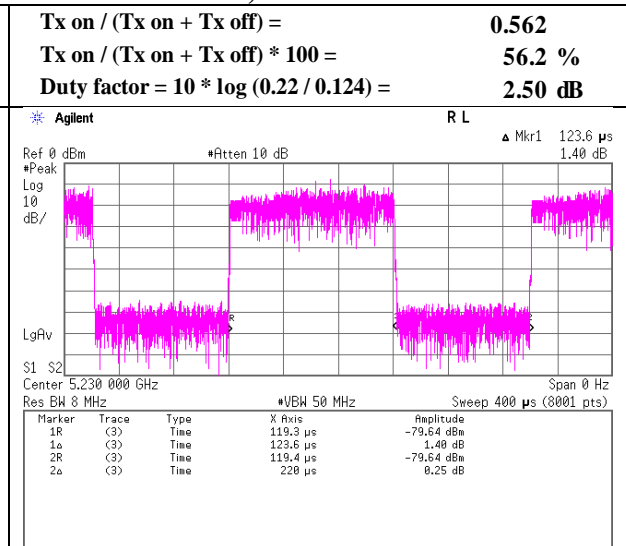


### Burst rate confirmation


(for Maximum Conducted Output Power)

Test place : Shonan EMC Lab. No.1 Measurement Room  
 Report No. : 11334871S-E-R1  
 Date : August 24, 2016  
 Temperature / Humidity : 26 deg. C / 36 % RH  
 Engineer : Shinichi Takano  
 Mode : Tx


#### 11ac-40, SISO, MCS 3

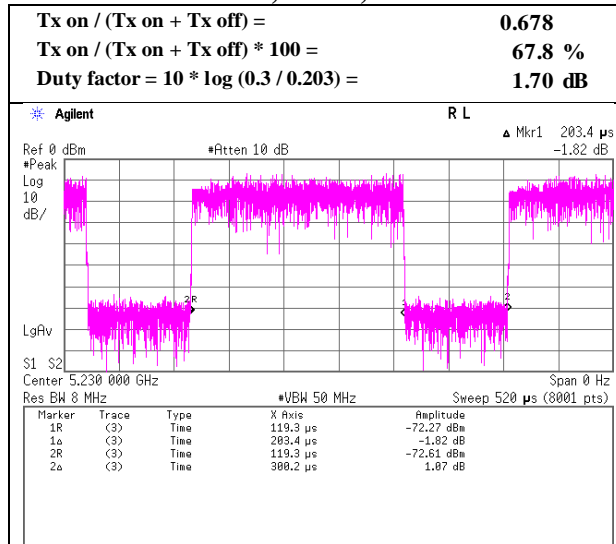


#### 11ac-40, MIMO, MCS 3

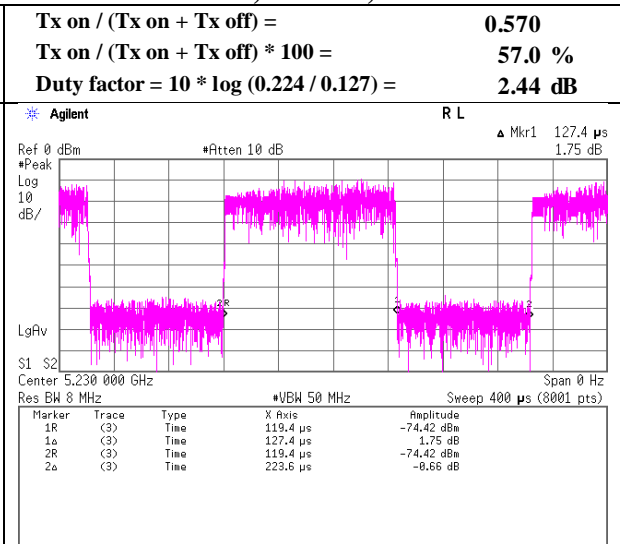

#### 11ac-80, SISO, MCS 3

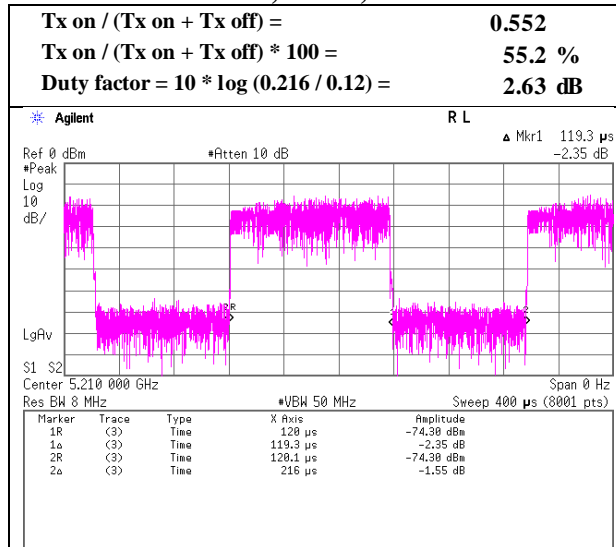

#### 11ac-80, MIMO, MCS 3

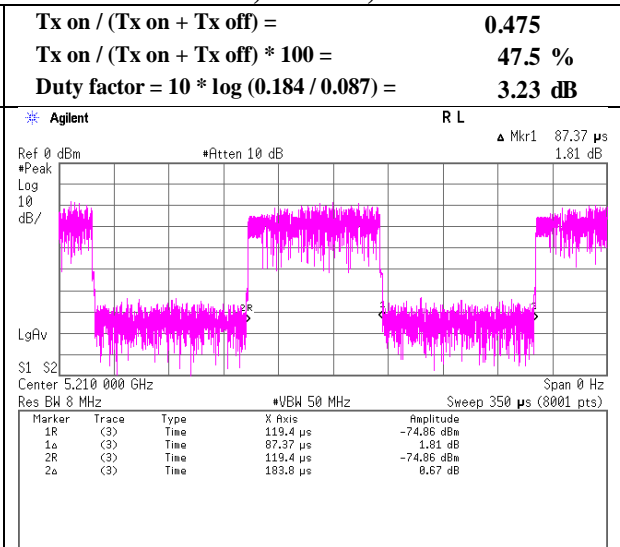


## Burst rate confirmation


(for Spurious emissions)

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : August 24, 2016  
Temperature / Humidity : 26 deg. C / 36 % RH  
Engineer : Shinichi Takano  
Mode : Tx


### 11ac-20, SISO, MCS 3

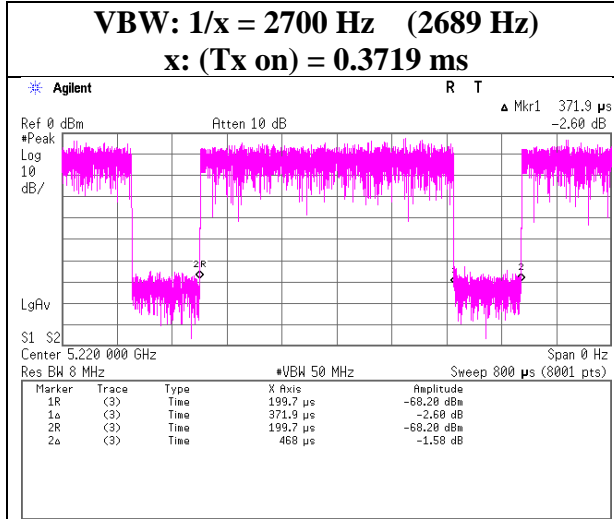


### 11n-20, MIMO MCS 11

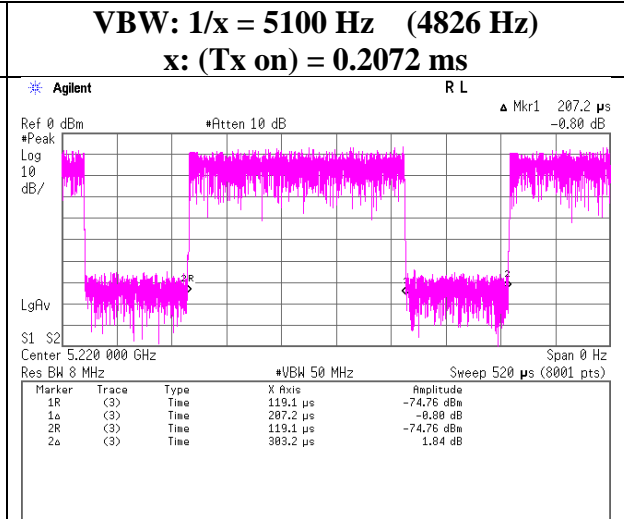

### 11n-40, SISO, MCS 3

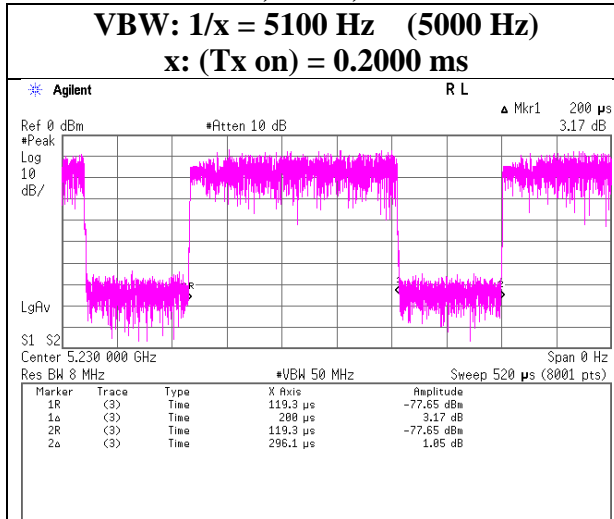

### 11n-40, MIMO MCS 11

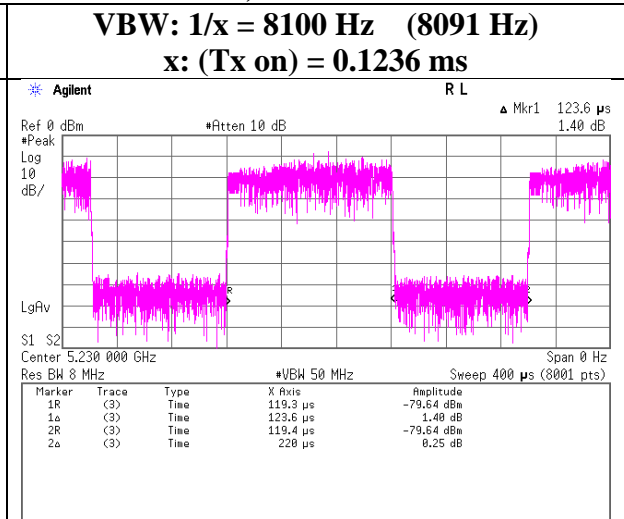


## Burst rate confirmation

(for Spurious emissions)

Test place : Shonan EMC Lab. No.1 Measurement Room  
 Report No. : 11334871S-E-R1  
 Date : August 24, 2016  
 Temperature / Humidity : 26 deg. C / 36 % RH  
 Engineer : Shinichi Takano  
 Mode : Tx


### 11ac-80, SISO, MCS 3

**VBW: 1/x = 8400 Hz (8382 Hz)**  
**x: (Tx on) = 0.1193 ms**

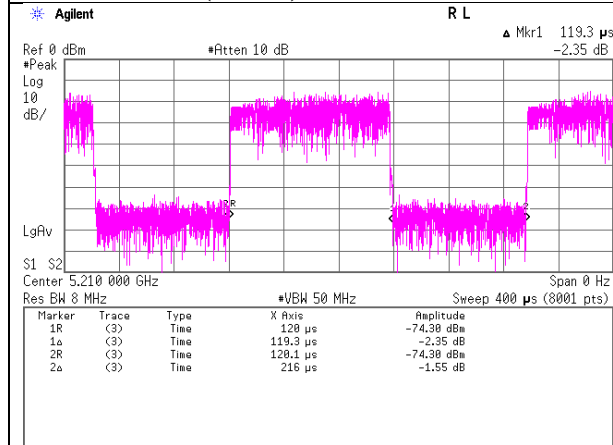

### 11ac-80, MIMO, MCS 3

**VBW: 1/x = 12000 Hz (11442 Hz)**  
**x: (Tx on) = 0.0874 ms**

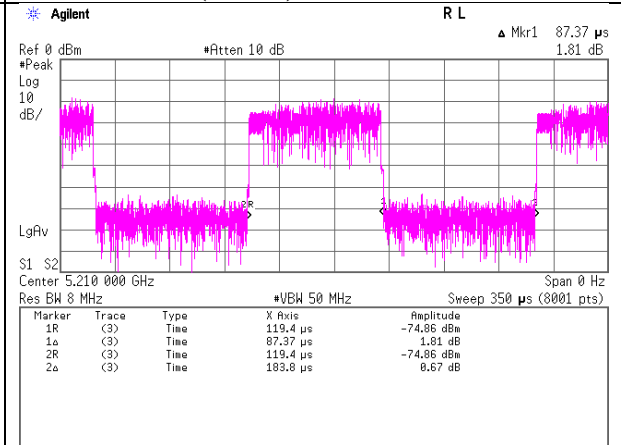

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11a	

Antenna: 0

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-19.12	2.00	20.06	1.72	3.31	0.00	4.66	11.00	6.34	7.97	17.00	9.03
5220	-19.50	2.00	20.05	1.72	3.31	0.00	4.28	11.00	6.72	7.59	17.00	9.41
5240	-19.62	2.00	20.05	1.72	3.31	0.00	4.16	11.00	6.84	7.47	17.00	9.53
5260	-19.28	2.01	20.05	1.72	3.31	0.00	4.50	11.00	6.50	7.81	17.00	9.19
5300	-19.06	2.01	20.04	1.72	3.31	0.00	4.72	11.00	6.28	8.03	17.00	8.97
5320	-18.75	2.01	20.04	1.72	3.31	0.00	5.03	11.00	5.97	8.34	17.00	8.66
5500	-19.90	2.01	20.02	1.72	3.31	0.00	3.85	11.00	7.15	7.16	17.00	9.84
5580	-19.93	2.03	20.05	1.72	3.31	0.00	3.88	11.00	7.12	7.19	17.00	9.81
5700	-20.54	2.07	20.08	1.72	3.31	0.00	3.34	11.00	7.66	6.65	17.00	10.35
5745	-27.48	2.08	20.10	1.72	3.31	6.99	3.41	30.00	26.59	6.72	17.00	10.28
5785	-28.10	2.09	20.11	1.72	3.31	6.99	2.81	30.00	27.19	6.12	17.00	10.88
5825	-27.10	2.10	20.12	1.72	3.31	6.99	3.84	30.00	26.16	7.15	17.00	9.85

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11a	


### Antenna 0 (worst)

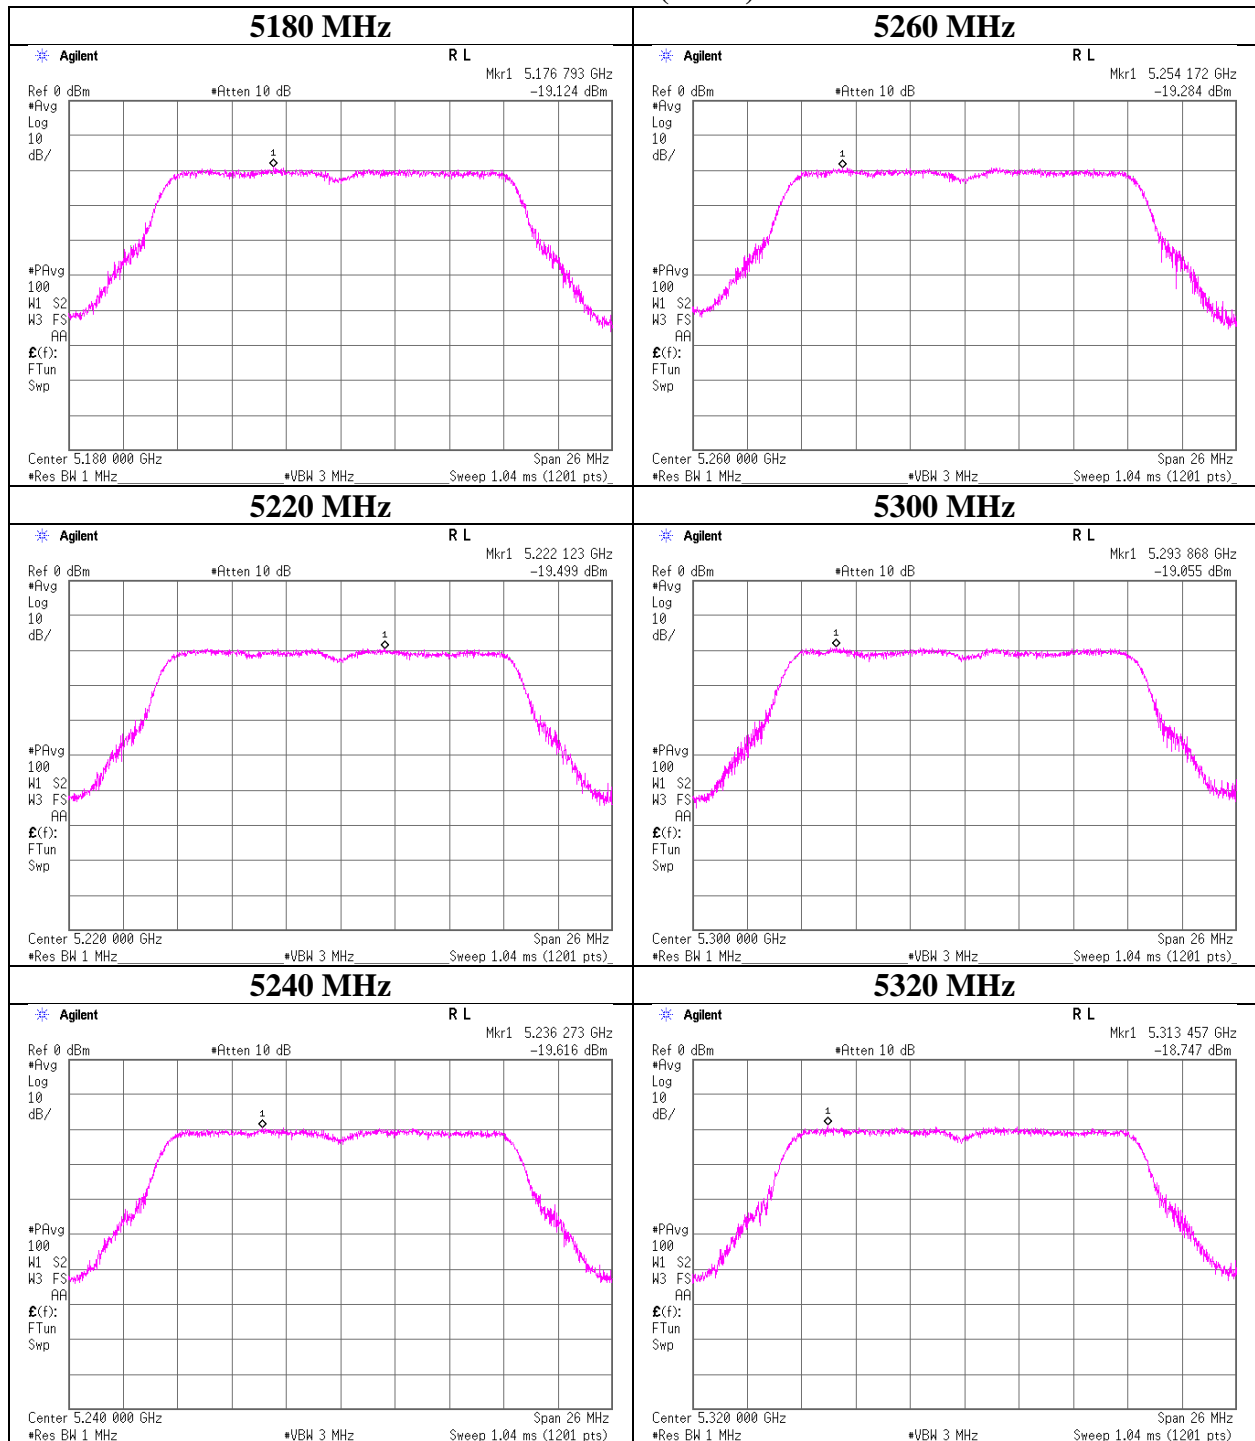

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11a	

### Antenna 0 (worst)

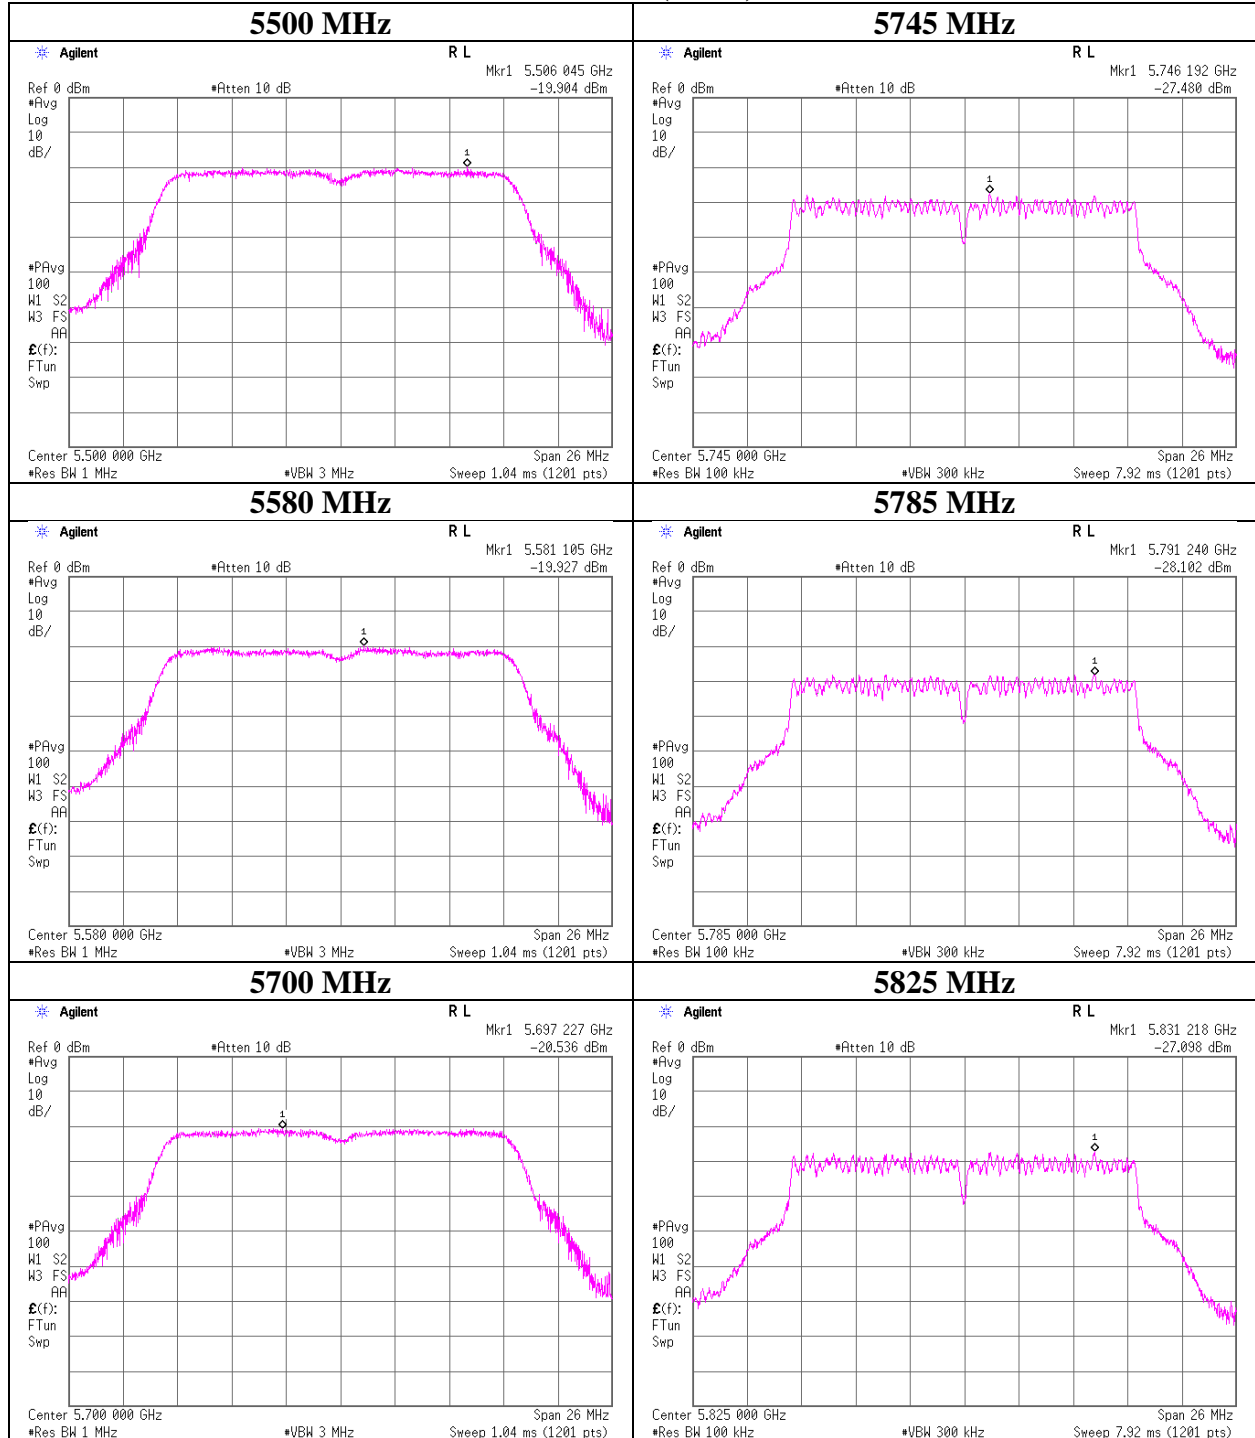

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, SISO	

**Antenna: 0**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-19.15	2.00	20.06	1.02	3.31	0.00	3.93	11.00	7.07	7.24	17.00	9.76
5220	-19.11	2.00	20.05	1.02	3.31	0.00	3.96	11.00	7.04	7.27	17.00	9.73
5240	-19.15	2.00	20.05	1.02	3.31	0.00	3.92	11.00	7.08	7.23	17.00	9.77
5260	-18.90	2.01	20.05	1.02	3.31	0.00	4.18	11.00	6.82	7.49	17.00	9.51
5300	-18.92	2.01	20.04	1.02	3.31	0.00	4.15	11.00	6.85	7.46	17.00	9.54
5320	-19.13	2.01	20.04	1.02	3.31	0.00	3.93	11.00	7.07	7.24	17.00	9.76
5500	-19.87	2.01	20.02	1.02	3.31	0.00	3.18	11.00	7.82	6.49	17.00	10.51
5580	-19.98	2.03	20.05	1.02	3.31	0.00	3.12	11.00	7.88	6.43	17.00	10.57
5700	-20.31	2.07	20.08	1.02	3.31	0.00	2.85	11.00	8.15	6.16	17.00	10.84
5745	-28.11	2.08	20.10	1.02	3.31	6.99	2.08	30.00	27.92	5.39	17.00	11.61
5785	-27.43	2.09	20.11	1.02	3.31	6.99	2.78	30.00	27.22	6.09	17.00	10.91
5825	-27.28	2.10	20.12	1.02	3.31	6.99	2.95	30.00	27.05	6.26	17.00	10.74

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor


PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain



## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, SISO	


### Antenna 0 (worst)

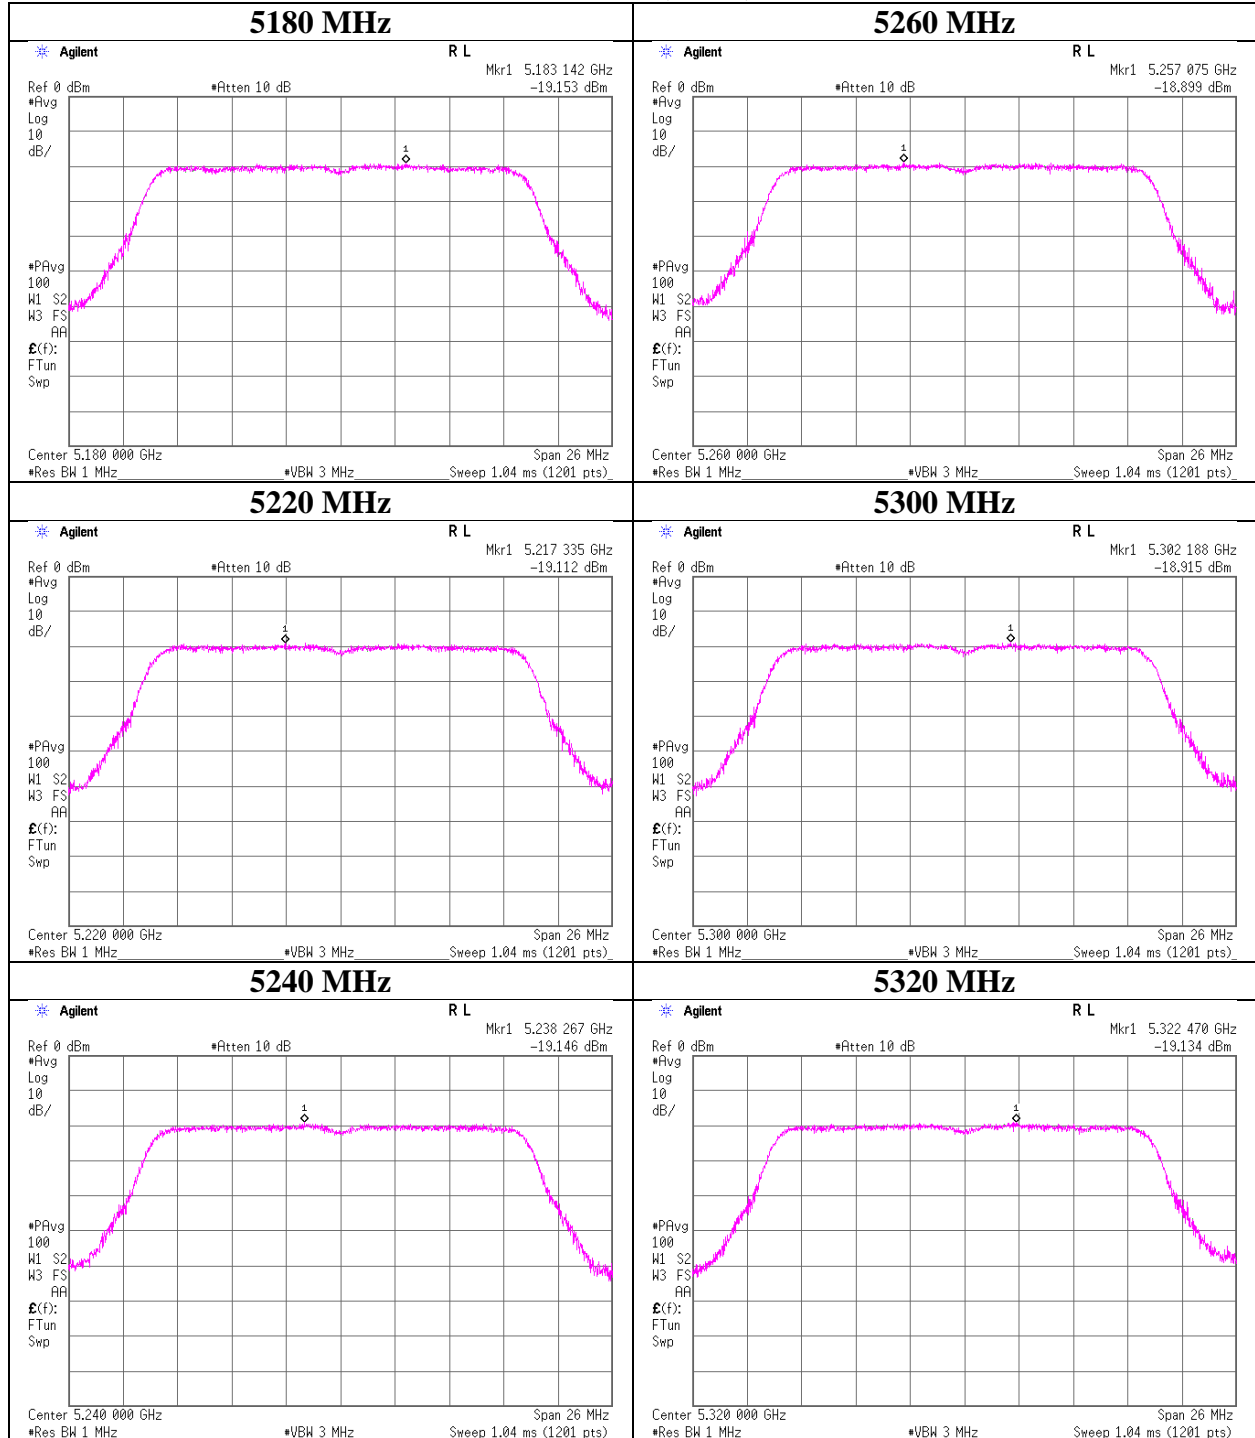

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, SISO	

### Antenna 0 (worst)

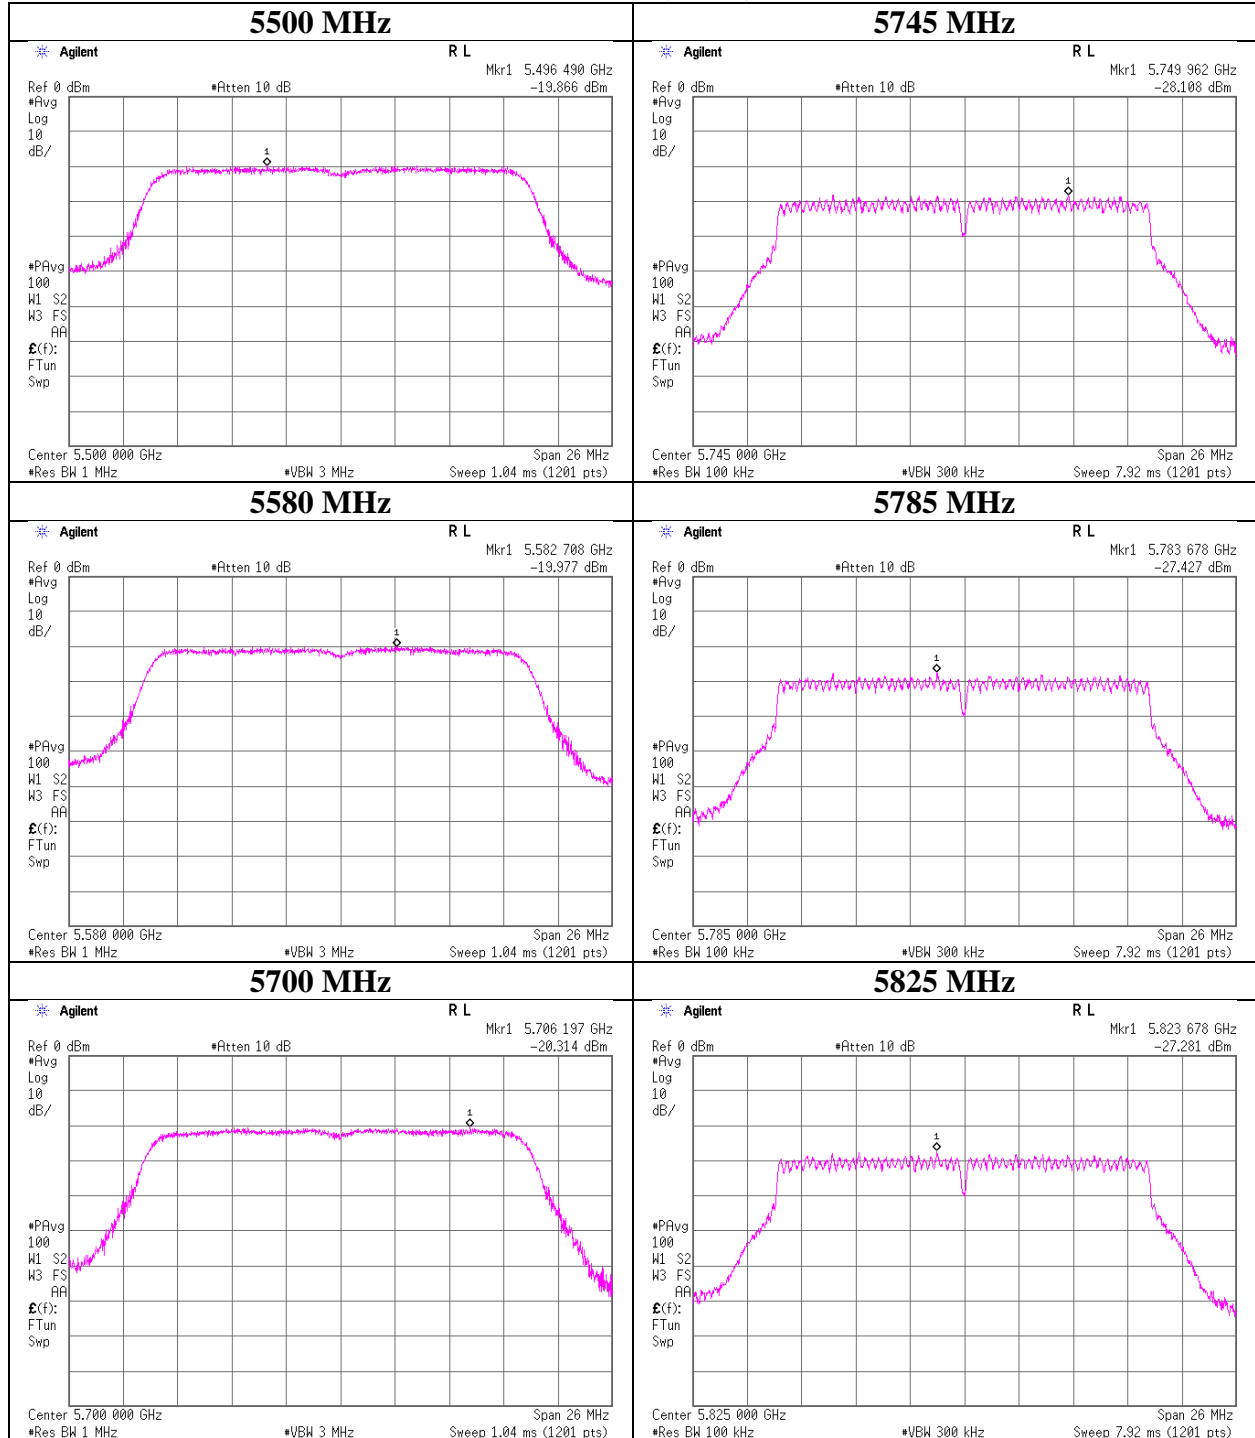

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, SISO	

**Antenna: 0**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-19.00	2.00	20.06	1.00	3.31	0.00	4.06	11.00	6.94	7.37	17.00	9.63
5220	-19.01	2.00	20.05	1.00	3.31	0.00	4.04	11.00	6.96	7.35	17.00	9.65
5240	-19.25	2.00	20.05	1.00	3.31	0.00	3.80	11.00	7.20	7.11	17.00	9.89
5260	-18.22	2.01	20.05	1.00	3.31	0.00	4.84	11.00	6.16	8.15	17.00	8.85
5300	-18.35	2.01	20.04	1.00	3.31	0.00	4.70	11.00	6.30	8.01	17.00	8.99
5320	-18.32	2.01	20.04	1.00	3.31	0.00	4.73	11.00	6.27	8.04	17.00	8.96
5500	-20.06	2.01	20.02	1.00	3.31	0.00	2.97	11.00	8.03	6.28	17.00	10.72
5580	-19.70	2.03	20.05	1.00	3.31	0.00	3.38	11.00	7.62	6.69	17.00	10.31
5700	-20.60	2.07	20.08	1.00	3.31	0.00	2.55	11.00	8.45	5.86	17.00	11.14
5745	-27.56	2.08	20.10	1.00	3.31	6.99	2.61	30.00	27.39	5.92	17.00	11.08
5785	-27.85	2.09	20.11	1.00	3.31	6.99	2.34	30.00	27.66	5.65	17.00	11.35
5825	-27.07	2.10	20.12	1.00	3.31	6.99	3.14	30.00	26.86	6.45	17.00	10.55

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, SISO	

### Antenna 0 (worst)

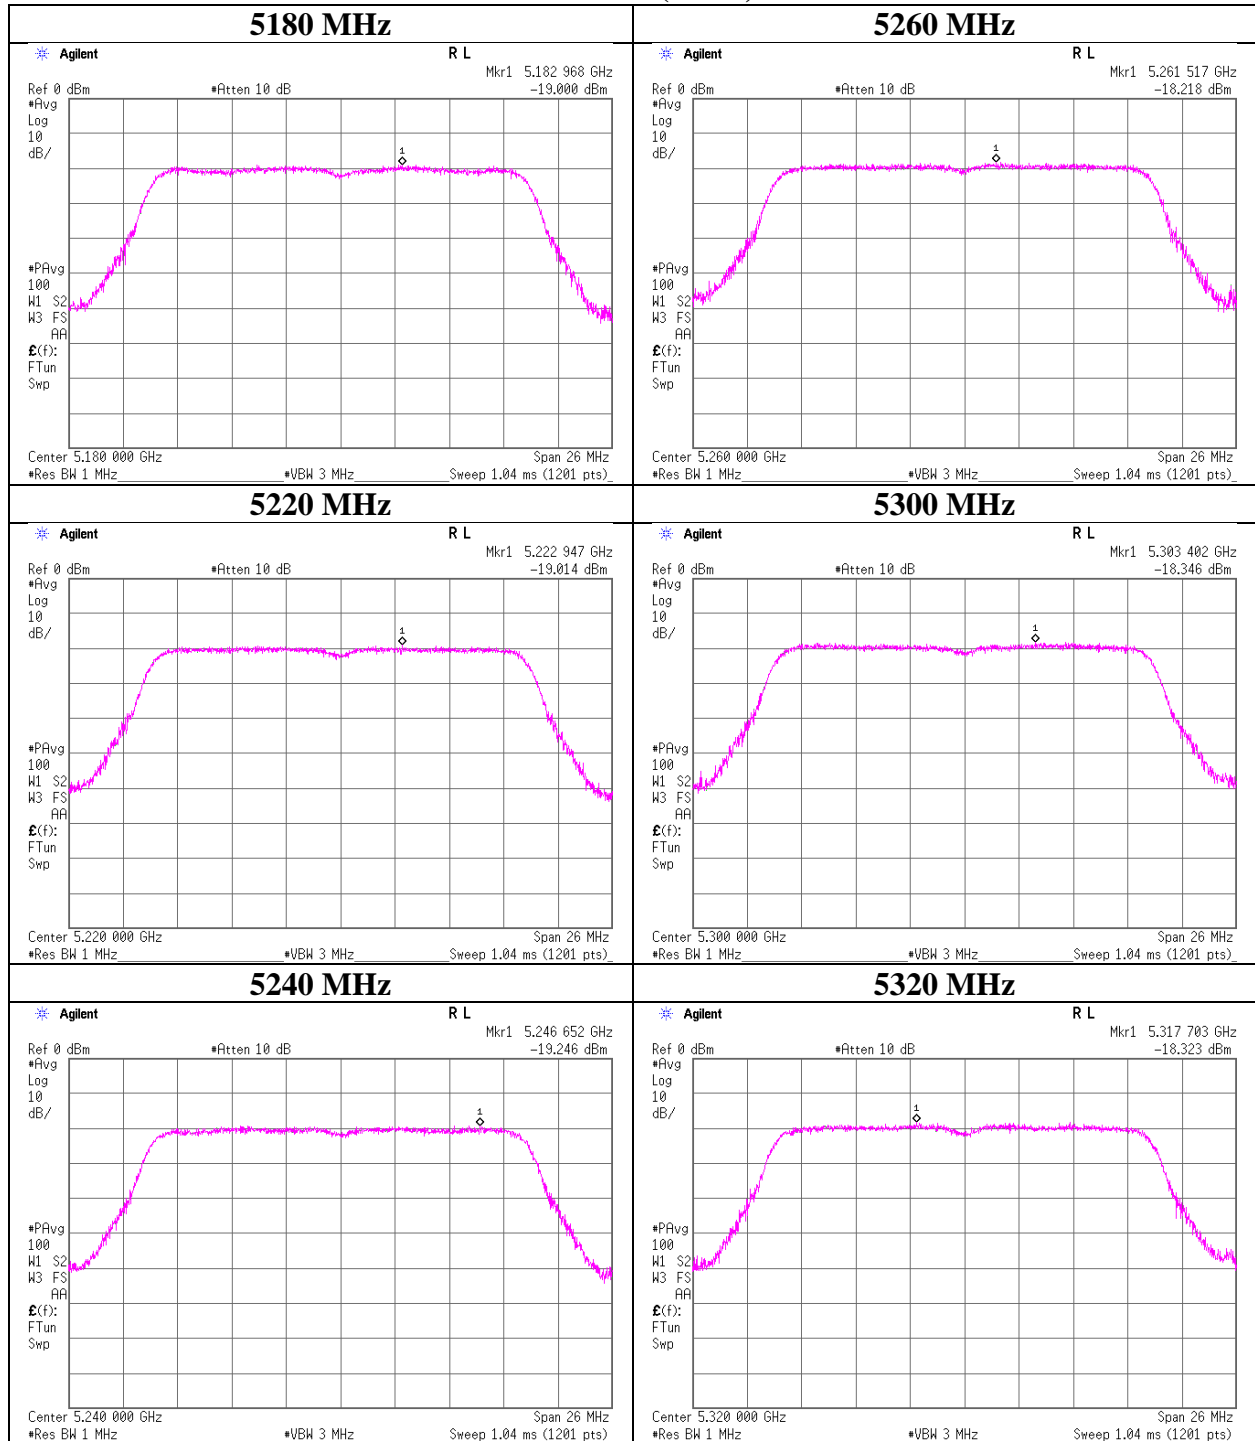




## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, SISO	

### Antenna 0 (worst)

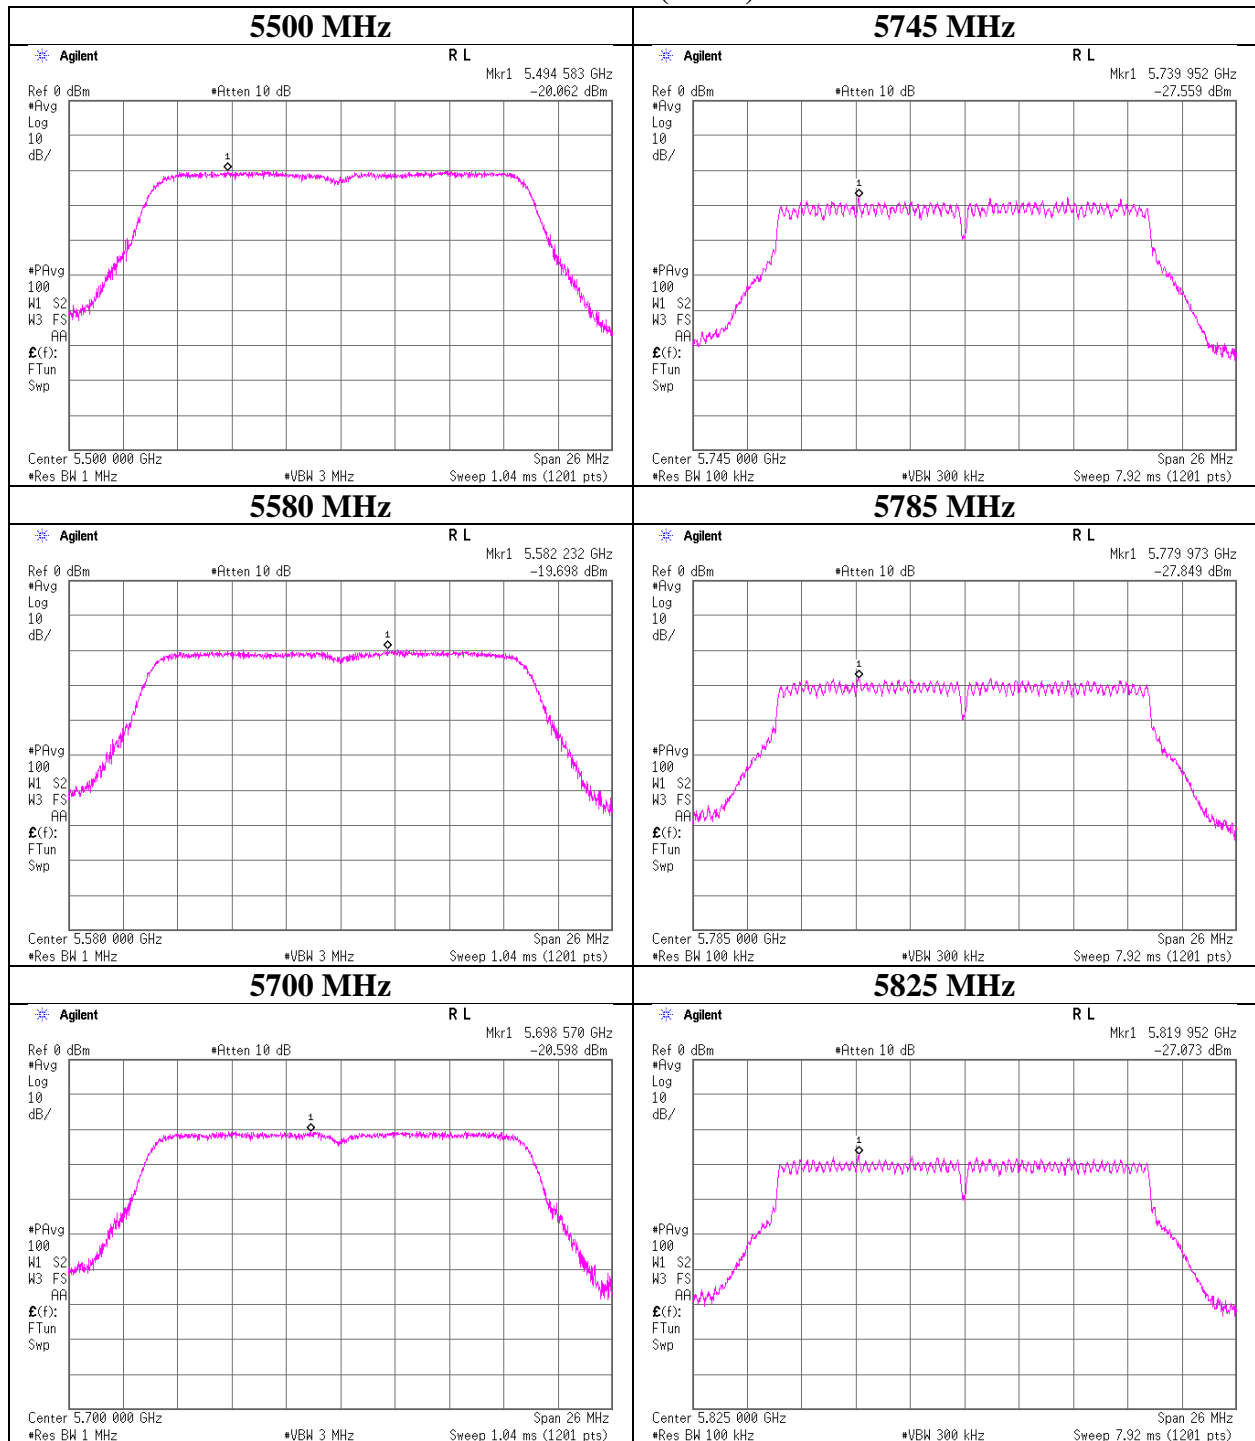

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-40, SISO	

**Antenna: 0**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-26.52	2.00	20.06	1.70	3.31	0.00	-2.76	11.00	13.76	0.55	17.00	16.45
-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-23.38	2.00	20.05	1.70	3.31	0.00	0.37	11.00	10.63	3.68	17.00	13.32
5270	-22.77	2.01	20.05	1.70	3.31	0.00	0.99	11.00	10.01	4.30	17.00	12.70
-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-22.97	2.01	20.04	1.70	3.31	0.00	0.78	11.00	10.22	4.09	17.00	12.91

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-40, SISO	

### Antenna 0 (worst)

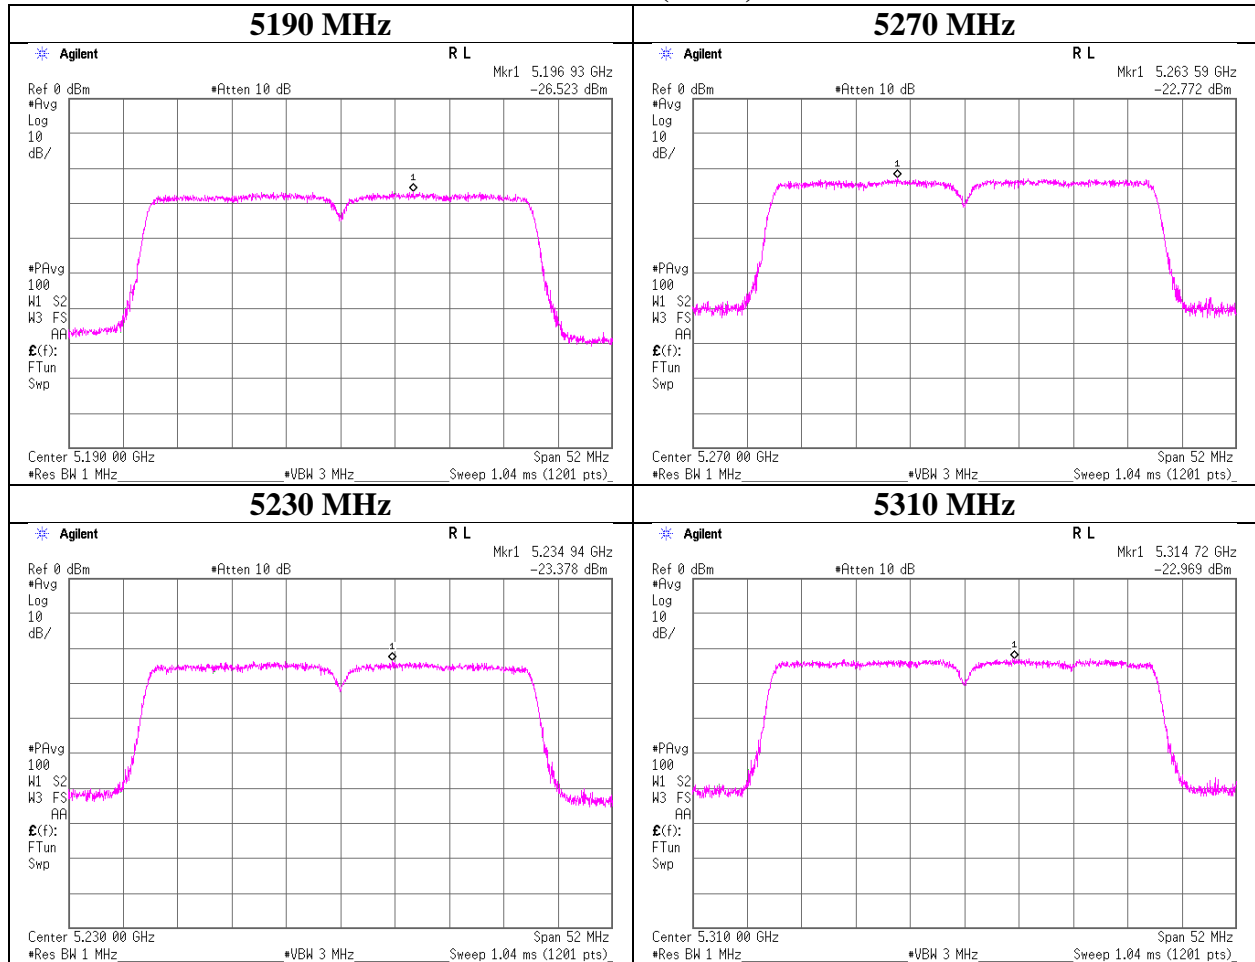

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 21, 2016      December 2, 2016  
Temperature / Humidity : 24 deg. C / 49 % RH      24 deg. C / 38 % RH  
Engineer : Kenichi Adachi      Shinichi Takano  
Mode : Tx

(Tx, 11ac-40, SISO)

Antenna: 0

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-25.93	2.00	20.06	1.70	3.31	0.00	-2.17	11.00	13.17	1.14	17.00	15.86
-	-	-	-	-	-	-	-	-	-	-	-	-
5230	-23.44	2.00	20.05	1.70	3.31	0.00	0.31	11.00	10.69	3.62	17.00	13.38
5270	-22.36	2.01	20.05	1.70	3.31	0.00	1.40	11.00	9.60	4.71	17.00	12.29
-	-	-	-	-	-	-	-	-	-	-	-	-
5310	-22.51	2.01	20.04	1.70	3.31	0.00	1.24	11.00	9.76	4.55	17.00	12.45

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

(Tx, 11ac-80, SISO)

Antenna: 0

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5210	-31.41	2.00	20.05	2.63	3.31	0.00	-6.73	11.00	17.73	-3.42	17.00	20.42
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
5290	-31.60	2.01	20.05	2.63	3.31	0.00	-6.91	11.00	17.91	-3.60	17.00	20.60
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
5530	-27.71	2.02	20.03	2.63	3.31	0.00	-3.03	11.00	14.03	0.28	17.00	16.72
-	-	-	-	-	-	-	-	-	-	-	-	-
5610	-27.56	2.04	20.06	2.63	3.31	0.00	-2.83	11.00	13.83	0.48	-	-
5775	-34.41	2.09	20.11	2.63	3.31	6.99	-2.59	30.00	32.59	0.72	17.00	16.28
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-40, SISO	


### Antenna 0 (worst)

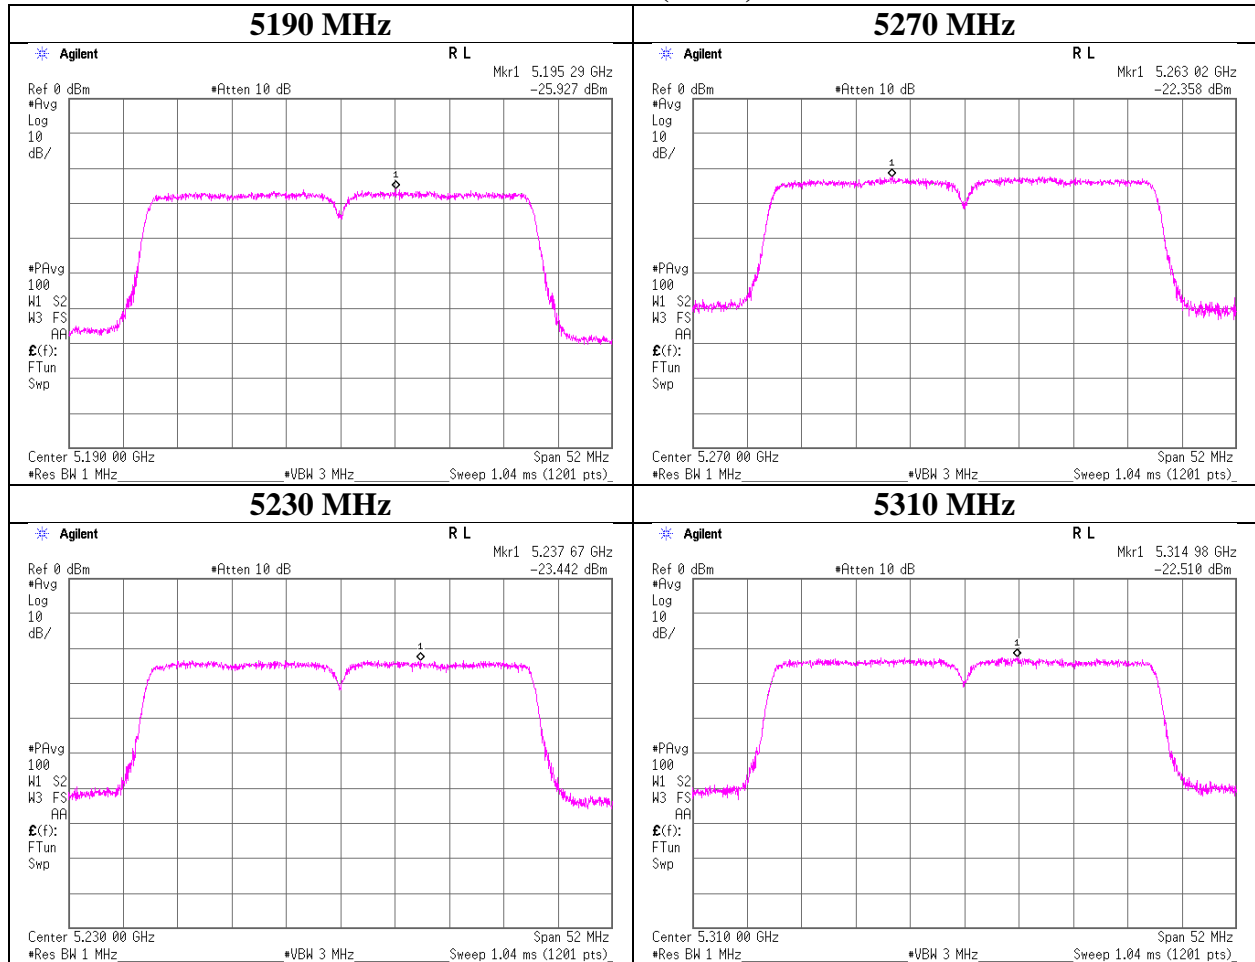

### Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-80, SISO	

### Antenna 0 (worst)

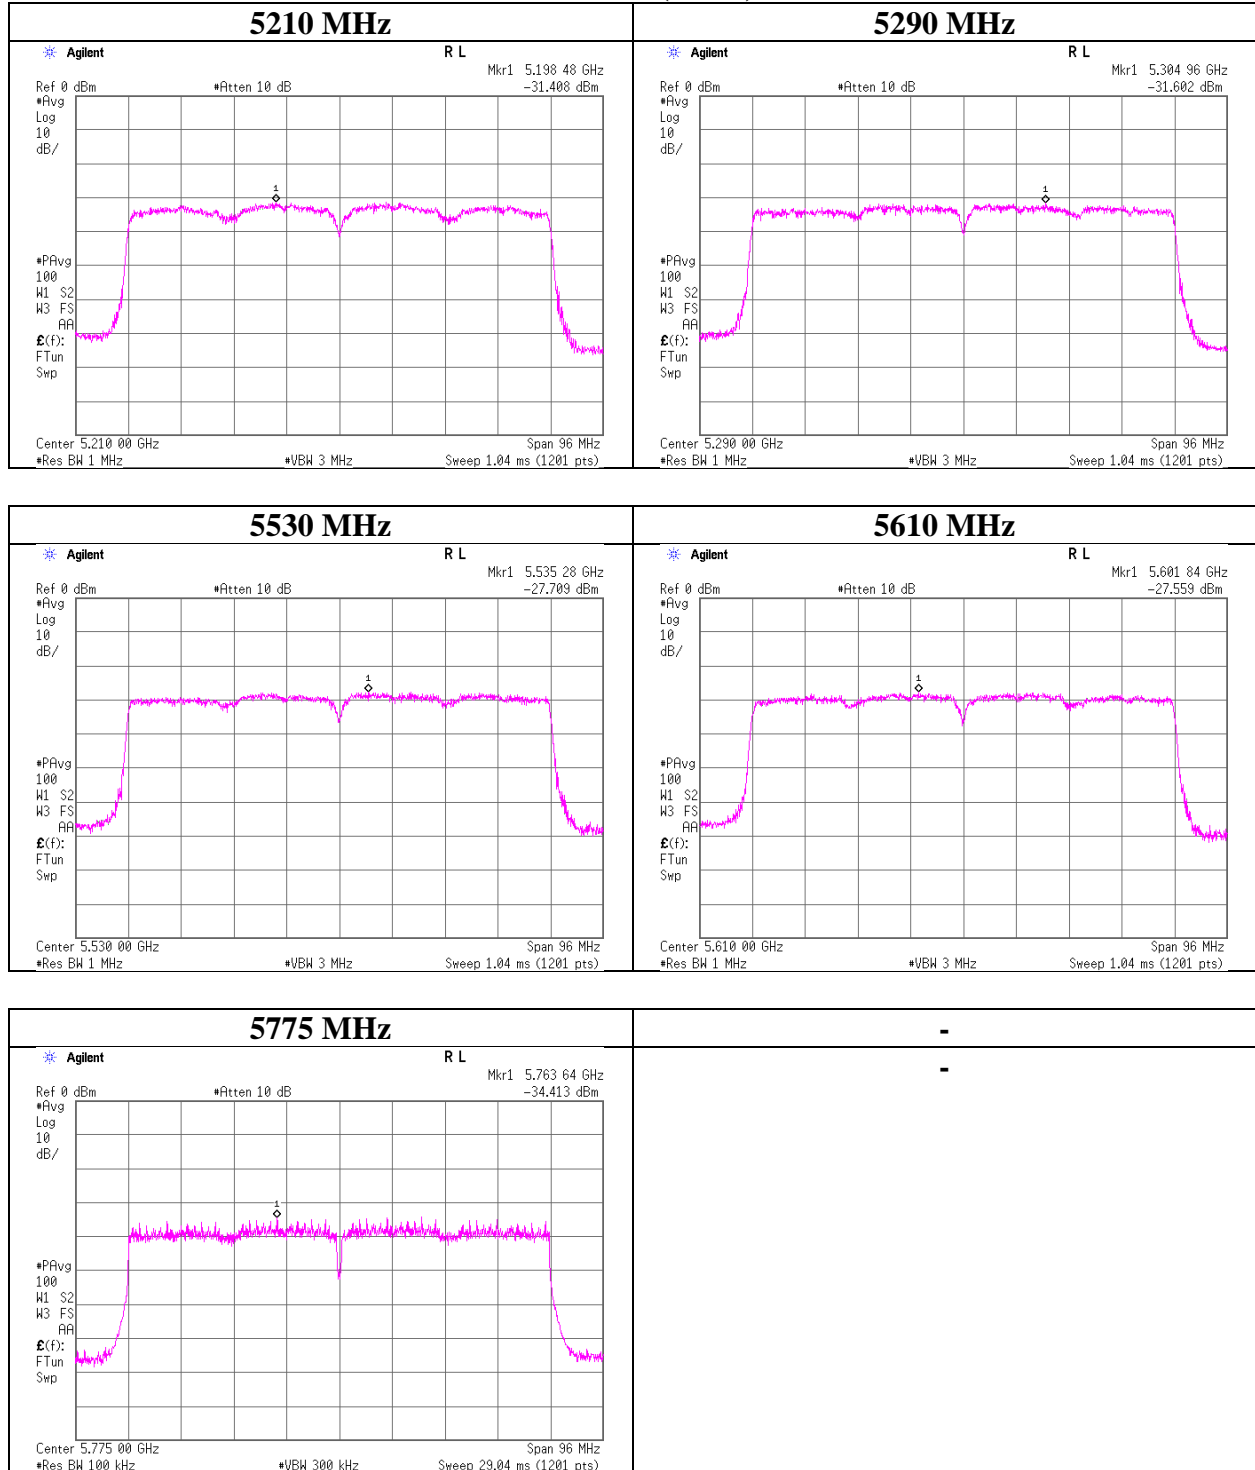

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 21, 2016      December 2, 2016  
Temperature / Humidity : 24 deg. C / 49 % RH      24 deg. C / 38 % RH  
Engineer : Kenichi Adachi      Shinichi Takano  
Mode : Tx 11n-20, MIMO

Antenna: 0 + 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
	1	2	Sum				1	2	Sum			
[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5180	1.00	0.94	1.95	2.90	11.00	8.10	2.15	0.76	2.91	4.64	17.00	12.36
5220	1.04	0.98	2.02	3.06	11.00	7.94	2.23	0.79	3.02	4.79	17.00	12.21
5240	1.02	0.97	1.98	2.98	11.00	8.02	2.18	0.78	2.95	4.70	17.00	12.30
5260	0.98	0.98	1.96	2.91	11.00	8.09	2.10	0.78	2.88	4.60	17.00	12.40
5300	0.97	0.94	1.91	2.81	11.00	8.19	2.07	0.75	2.83	4.52	17.00	12.48
5320	0.85	0.89	1.74	2.41	11.00	8.59	1.82	0.71	2.54	4.04	17.00	12.96
5550	1.11	1.11	2.22	3.46	11.00	7.54	2.39	0.89	3.27	5.15	17.00	11.85
5580	1.05	1.17	2.22	3.46	11.00	7.54	2.25	0.94	3.18	5.03	17.00	11.97
5700	1.03	1.09	2.12	3.26	11.00	7.74	2.20	0.87	3.08	4.88	17.00	12.12
5745	0.95	1.05	2.01	3.02	30.00	26.98	2.05	0.84	2.89	4.61	17.00	12.39
5785	0.95	0.95	1.90	2.79	30.00	27.21	2.04	0.76	2.80	4.47	17.00	12.53
5825	0.94	0.85	1.79	2.53	30.00	27.47	2.02	0.68	2.70	4.32	17.00	12.68

Tested Frequency [MHz]	Antenna: 0							Antenna: 1							
	Duty Factor [dB]	RBW Correction Factor [dB]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result		PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result		
							Cond. [dBm/MHz]	e.i.r.p. [dBm/MHz]					Cond. [dBm/MHz]	e.i.r.p. [dBm/MHz]	
5180	1.65	0.00	-23.69	2.00	20.06	3.31	0.02	3.33	-23.84	1.88	20.06	-0.96	-0.25	-1.21	
5220	1.65	0.00	-23.53	2.00	20.05	3.31	0.17	3.48	-23.67	1.88	20.05	-0.96	-0.08	-1.04	
5240	1.65	0.00	-23.63	2.00	20.05	3.31	0.07	3.38	-23.73	1.88	20.05	-0.96	-0.14	-1.10	
5260	1.65	0.00	-23.80	2.01	20.05	3.31	-0.09	3.22	-23.70	1.89	20.05	-0.96	-0.11	-1.07	
5300	1.65	0.00	-23.84	2.01	20.04	3.31	-0.14	3.17	-23.85	1.89	20.04	-0.96	-0.27	-1.23	
5320	1.65	0.00	-24.40	2.01	20.04	3.31	-0.70	2.61	-24.09	1.89	20.04	-0.96	-0.51	-1.47	
5550	1.65	0.00	-23.21	2.01	20.02	3.31	0.47	3.78	-23.13	1.89	20.02	-0.96	0.44	-0.53	
5580	1.65	0.00	-23.53	2.03	20.05	3.31	0.21	3.52	-22.93	1.91	20.05	-0.96	0.68	-0.28	
5700	1.65	0.00	-23.68	2.07	20.08	3.31	0.12	3.43	-23.31	1.95	20.08	-0.96	0.38	-0.58	
5745	1.65	6.99	-31.02	2.08	20.10	3.31	-0.20	3.11	-30.49	1.96	20.10	-0.96	0.21	-0.75	
5785	1.65	6.99	-31.05	2.09	20.11	3.31	-0.21	3.10	-30.96	1.97	20.11	-0.96	-0.24	-1.20	
5825	1.65	6.99	-31.11	2.10	20.12	3.31	-0.25	3.06	-31.47	1.98	20.12	-0.96	-0.73	-1.69	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, MIMO	

### Antenna 0

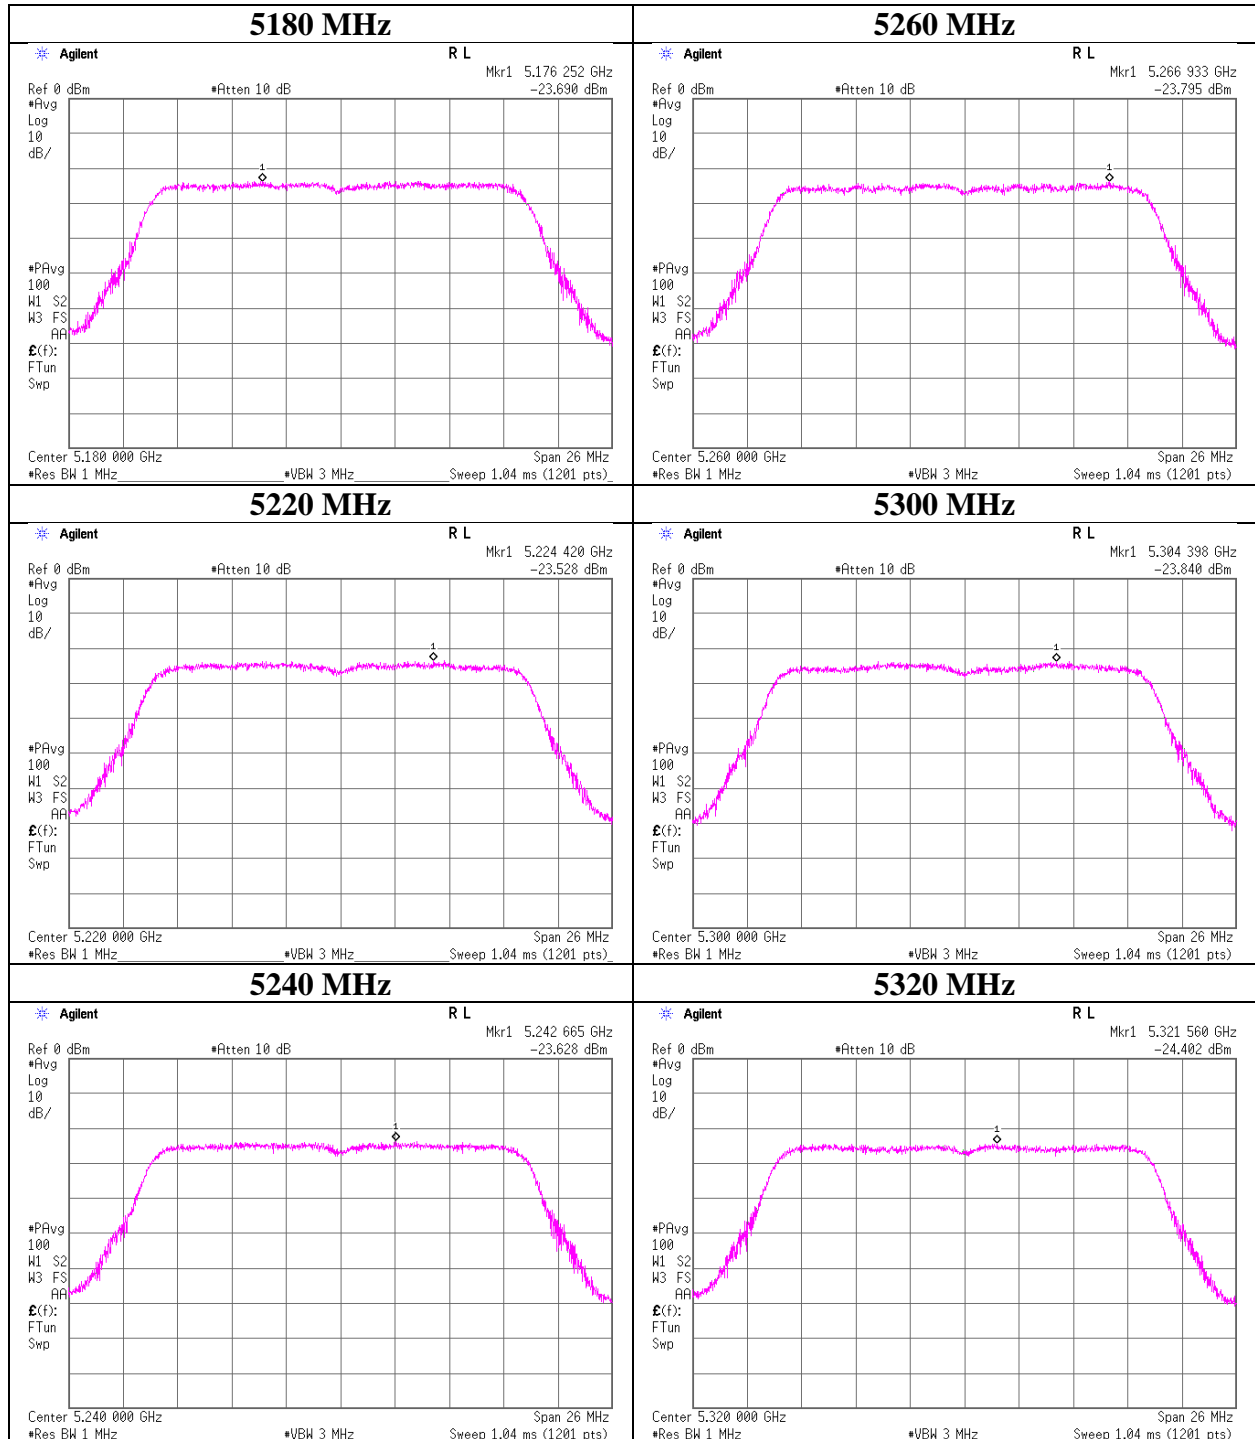




## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, MIMO	


### Antenna 1

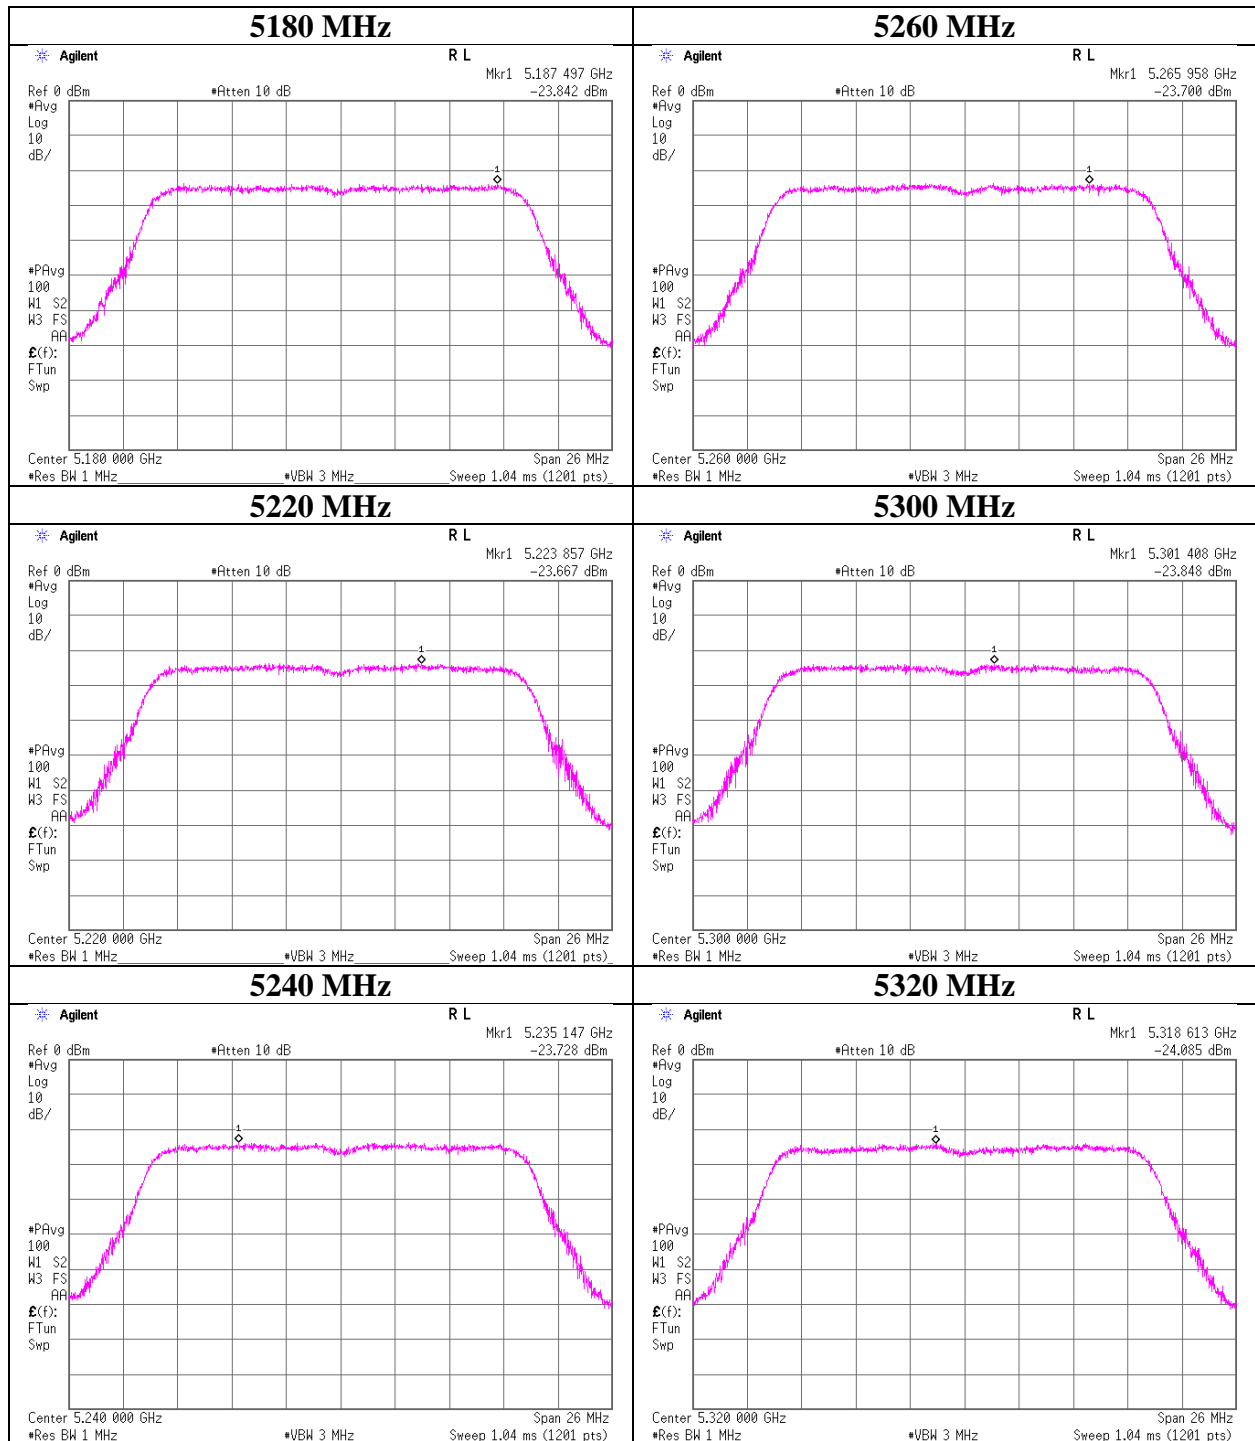

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, MIMO	

### Antenna 0

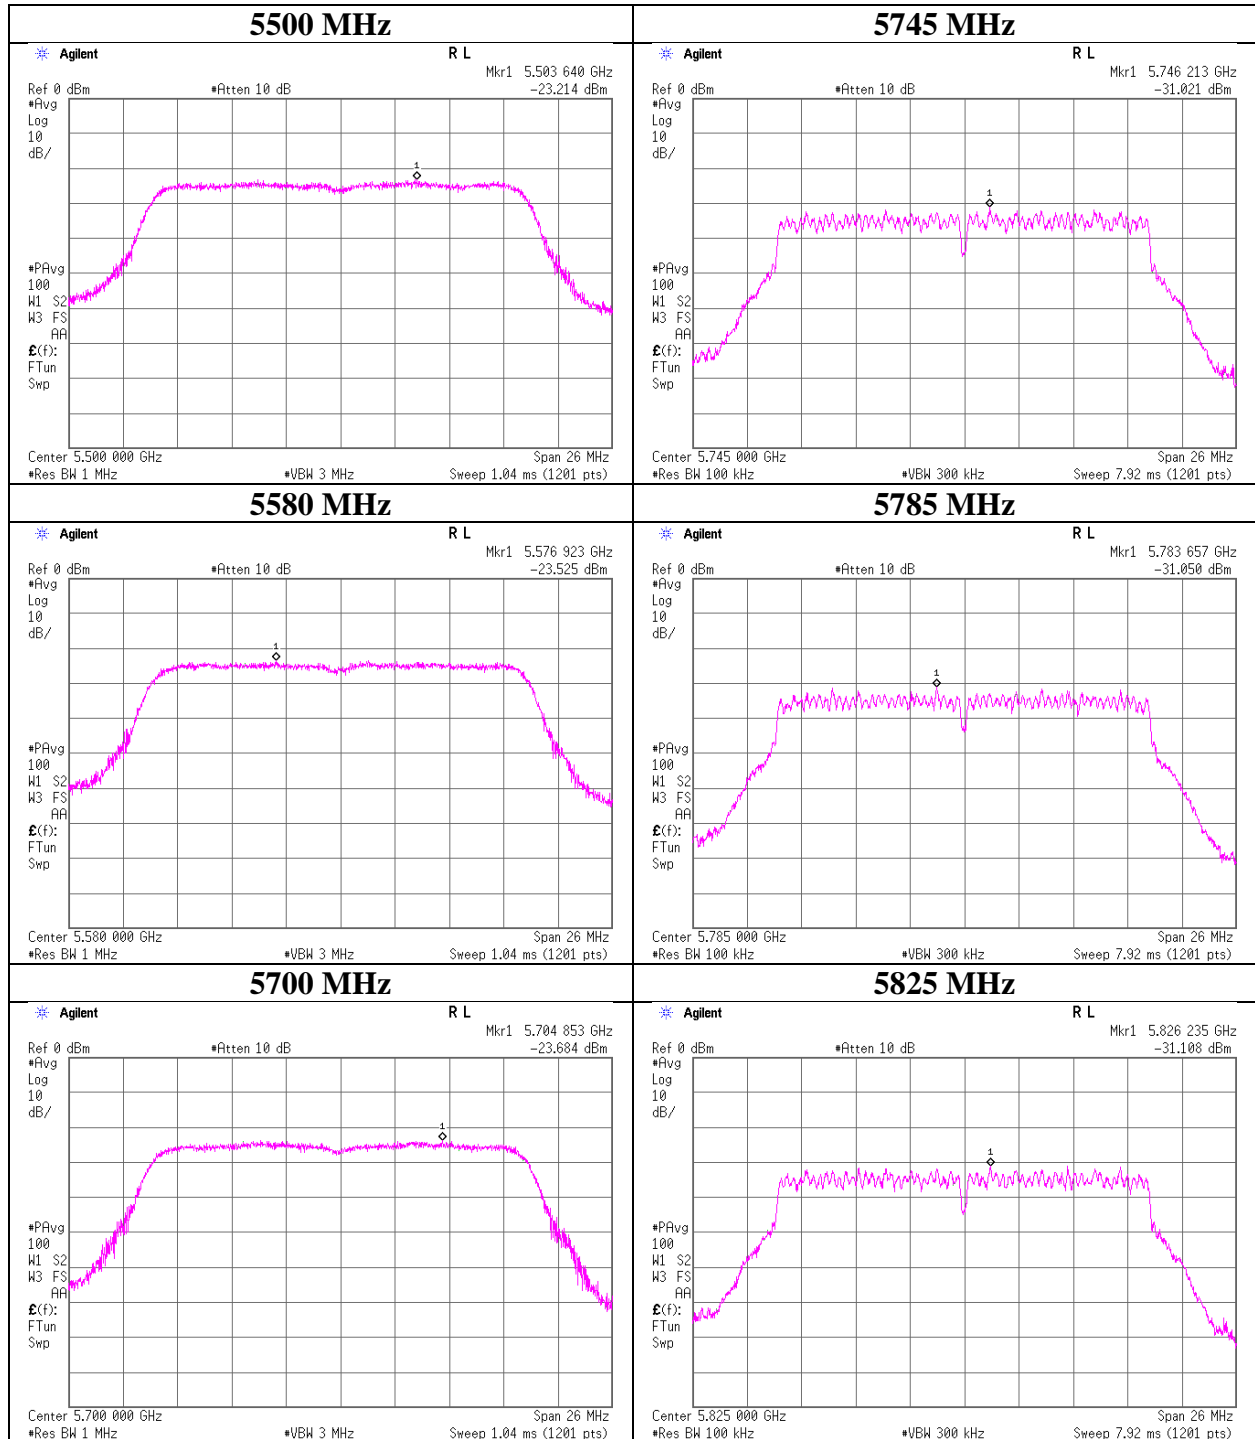

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11n-20, MIMO	

### Antenna 1

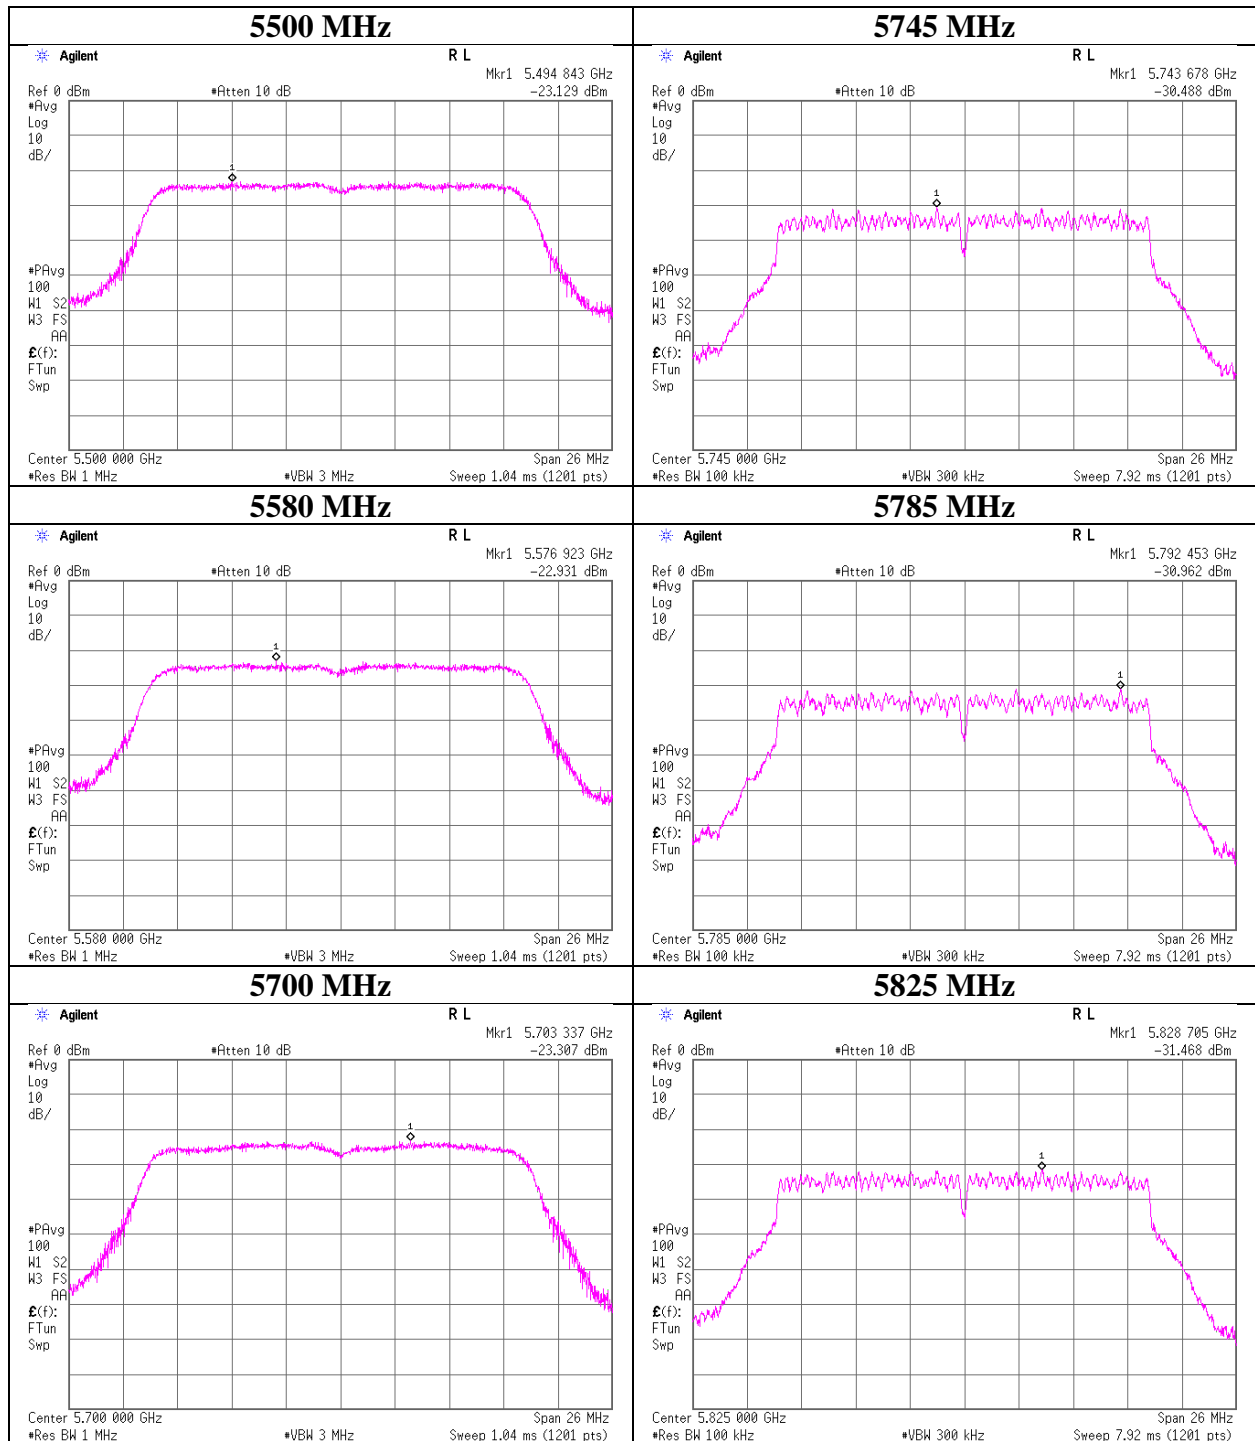

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 21, 2016      December 2, 2016  
Temperature / Humidity : 24 deg. C / 49 % RH      24 deg. C / 38 % RH  
Engineer : Kenichi Adachi      Shinichi Takano  
Mode : Tx 11ac-20, MIMO

Antenna: 0 + 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna		Sum	Result	Limit	Margin	Antenna		Sum	Result	Limit	Margin
1	2	1					2					
[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5180	1.02	0.92	1.95	2.90	11.00	8.10	2.19	0.74	2.94	4.68	17.00	12.32
5220	1.02	0.93	1.96	2.91	11.00	8.09	2.19	0.75	2.94	4.68	17.00	12.32
5240	1.02	0.96	1.98	2.96	11.00	8.04	2.18	0.77	2.95	4.69	17.00	12.31
5260	0.95	0.98	1.93	2.85	11.00	8.15	2.03	0.79	2.82	4.50	17.00	12.50
5300	0.93	0.96	1.89	2.77	11.00	8.23	1.99	0.77	2.76	4.41	17.00	12.59
5320	0.86	0.96	1.82	2.61	11.00	8.39	1.84	0.77	2.61	4.17	17.00	12.83
5500	1.08	1.34	2.41	3.83	11.00	7.17	2.31	1.07	3.38	5.29	17.00	11.71
5580	1.16	1.19	2.35	3.71	11.00	7.29	2.48	0.96	3.43	5.36	17.00	11.64
5700	1.15	1.22	2.37	3.75	11.00	7.25	2.47	0.97	3.45	5.38	17.00	11.62
5745	1.05	1.26	2.31	3.63	30.00	26.37	2.25	1.01	3.26	5.13	17.00	11.87
5785	0.93	1.09	2.02	3.05	30.00	26.95	2.00	0.87	2.87	4.58	17.00	12.42
5825	1.00	1.04	2.04	3.10	30.00	26.90	2.15	0.83	2.98	4.75	17.00	12.25

Tested Frequency [MHz]	Duty Factor [dB]	RBW Correction Factor [dB]	Antenna: 0						Antenna: 1					
			PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	PSD Result e.i.r.p.
[dBm/MHz]	[dB]	[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5180	1.64	0.00	-23.60	2.00	20.06	3.31	0.10	3.41	-23.93	1.88	20.06	-0.96	-0.34	-1.30
5220	1.64	0.00	-23.60	2.00	20.05	3.31	0.09	3.40	-23.87	1.88	20.05	-0.96	-0.29	-1.25
5240	1.64	0.00	-23.62	2.00	20.05	3.31	0.07	3.38	-23.75	1.88	20.05	-0.96	-0.18	-1.14
5260	1.64	0.00	-23.93	2.01	20.05	3.31	-0.23	3.08	-23.67	1.89	20.05	-0.96	-0.09	-1.05
5300	1.64	0.00	-24.02	2.01	20.04	3.31	-0.33	2.98	-23.74	1.89	20.04	-0.96	-0.16	-1.12
5320	1.64	0.00	-24.34	2.01	20.04	3.31	-0.65	2.66	-23.74	1.89	20.04	-0.96	-0.17	-1.13
5500	1.64	0.00	-23.35	2.01	20.02	3.31	0.32	3.63	-22.29	1.89	20.02	-0.96	1.26	0.30
5580	1.64	0.00	-23.09	2.03	20.05	3.31	0.63	3.94	-22.84	1.91	20.05	-0.96	0.76	-0.20
5700	1.64	0.00	-23.17	2.07	20.08	3.31	0.62	3.93	-22.83	1.95	20.08	-0.96	0.85	-0.11
5745	1.64	6.99	-30.60	2.08	20.10	3.31	0.21	3.52	-29.70	1.96	20.10	-0.96	0.99	0.03
5785	1.64	6.99	-31.13	2.09	20.11	3.31	-0.30	3.01	-30.35	1.97	20.11	-0.96	0.36	-0.60
5825	1.64	6.99	-30.83	2.10	20.12	3.31	0.02	3.33	-30.58	1.98	20.12	-0.96	0.15	-0.81

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, MIMO	


### Antenna 0

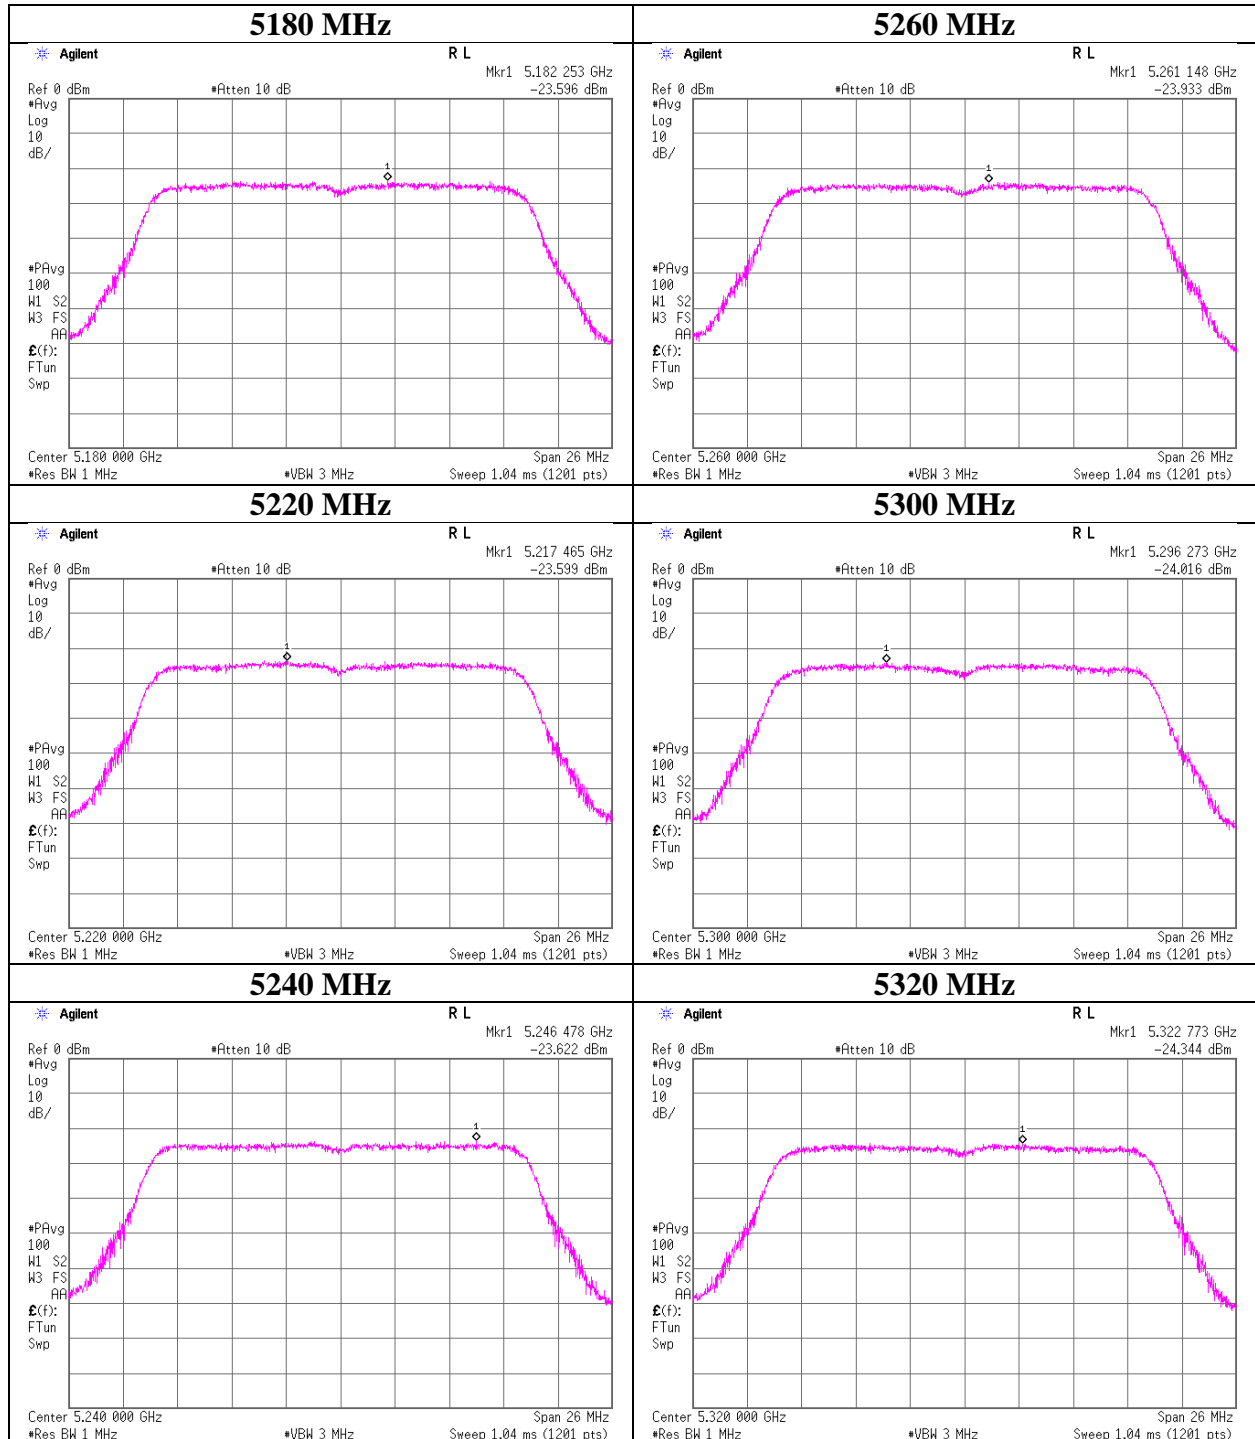

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, MIMO	


### Antenna 1

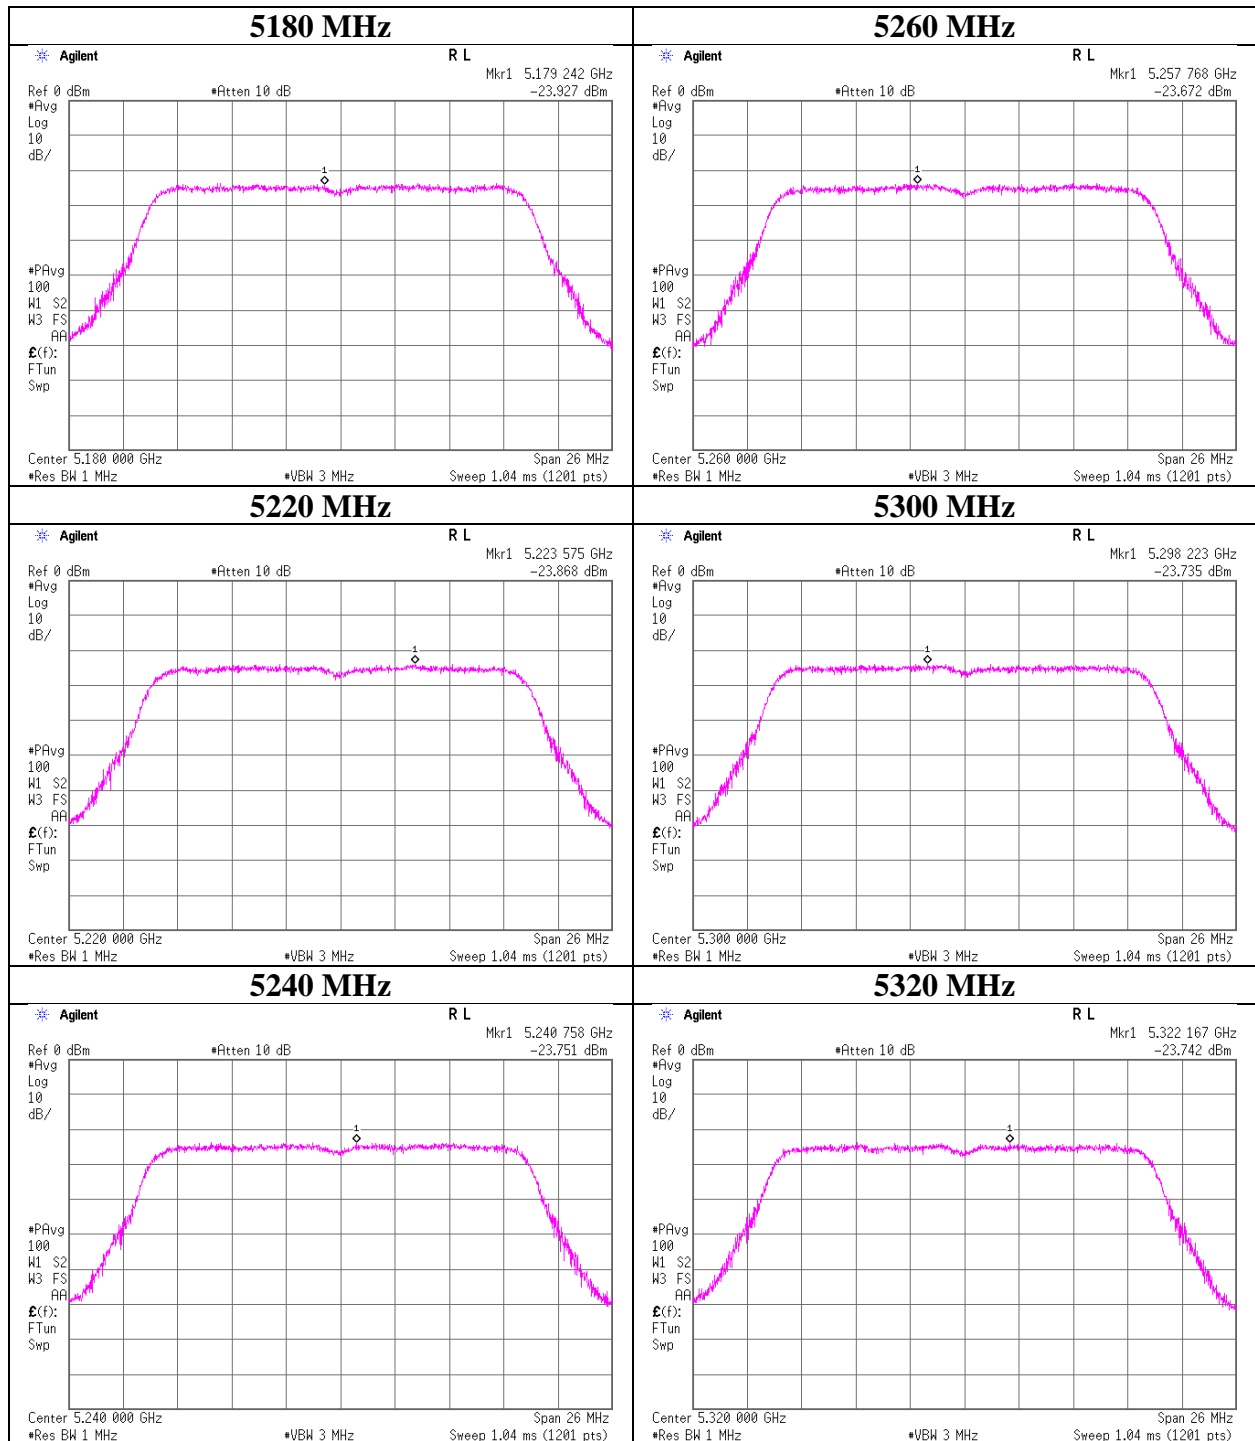

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, MIMO	


### Antenna 0

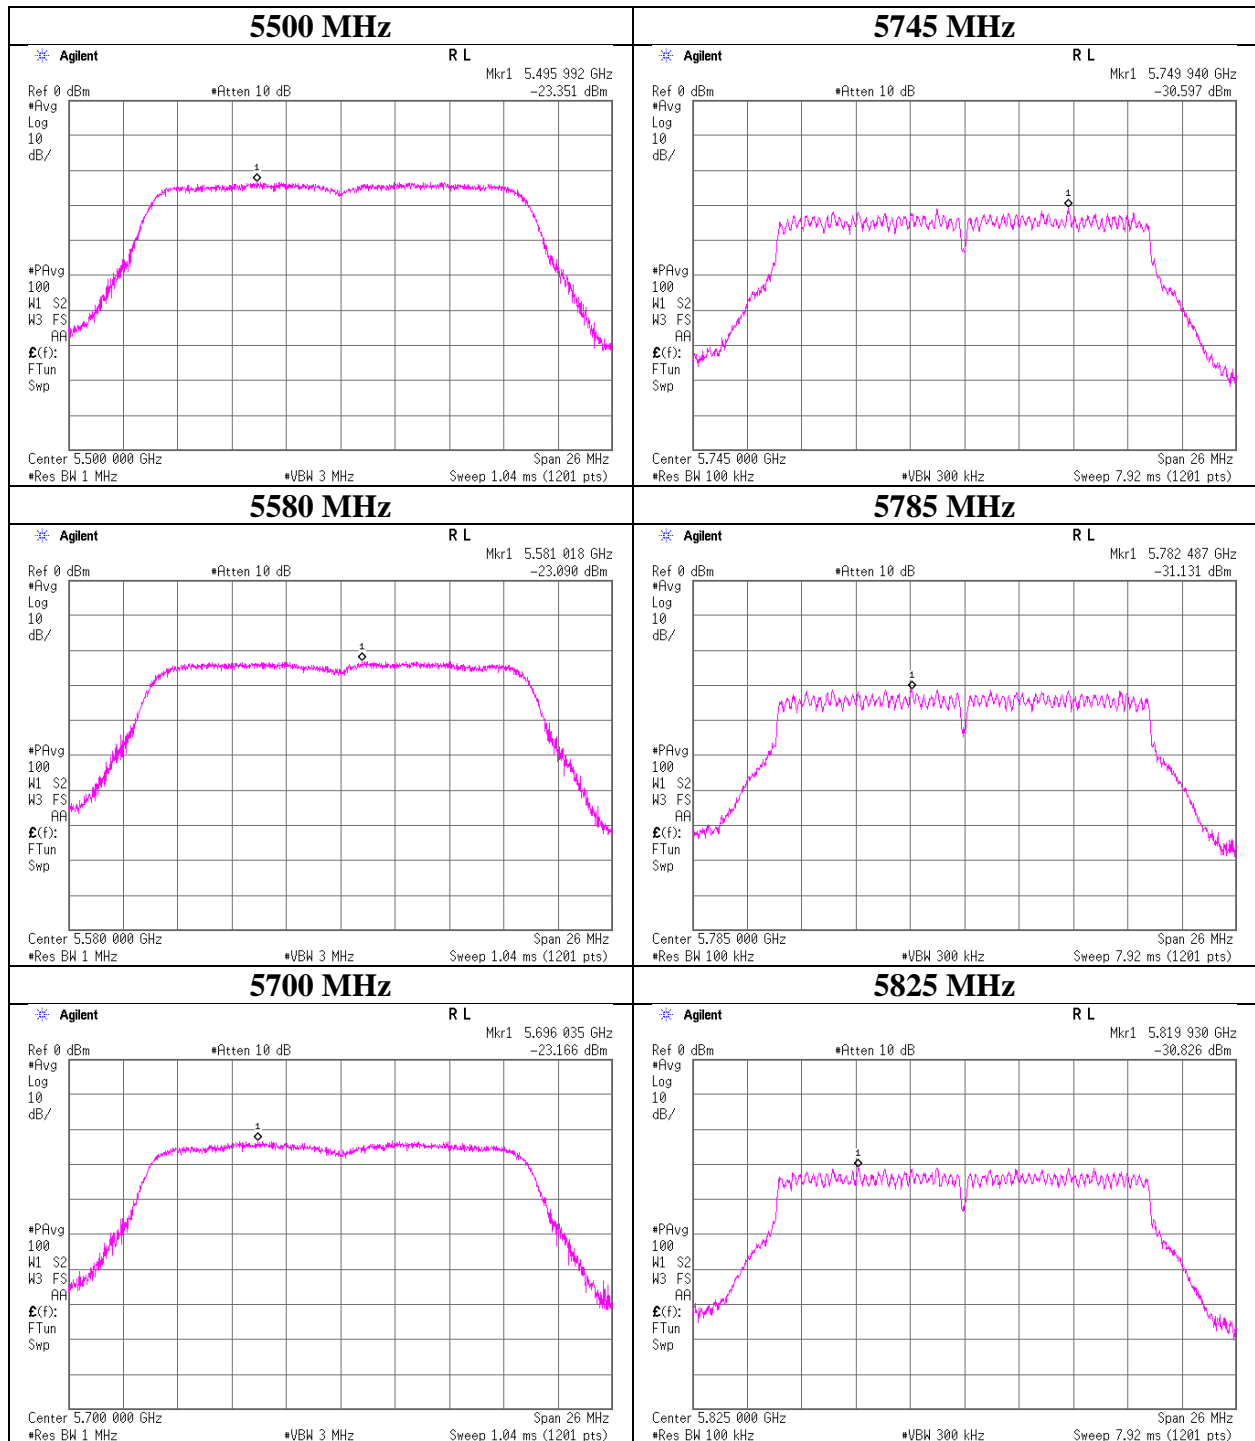

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 21, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 49 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-20, MIMO	

### Antenna 1

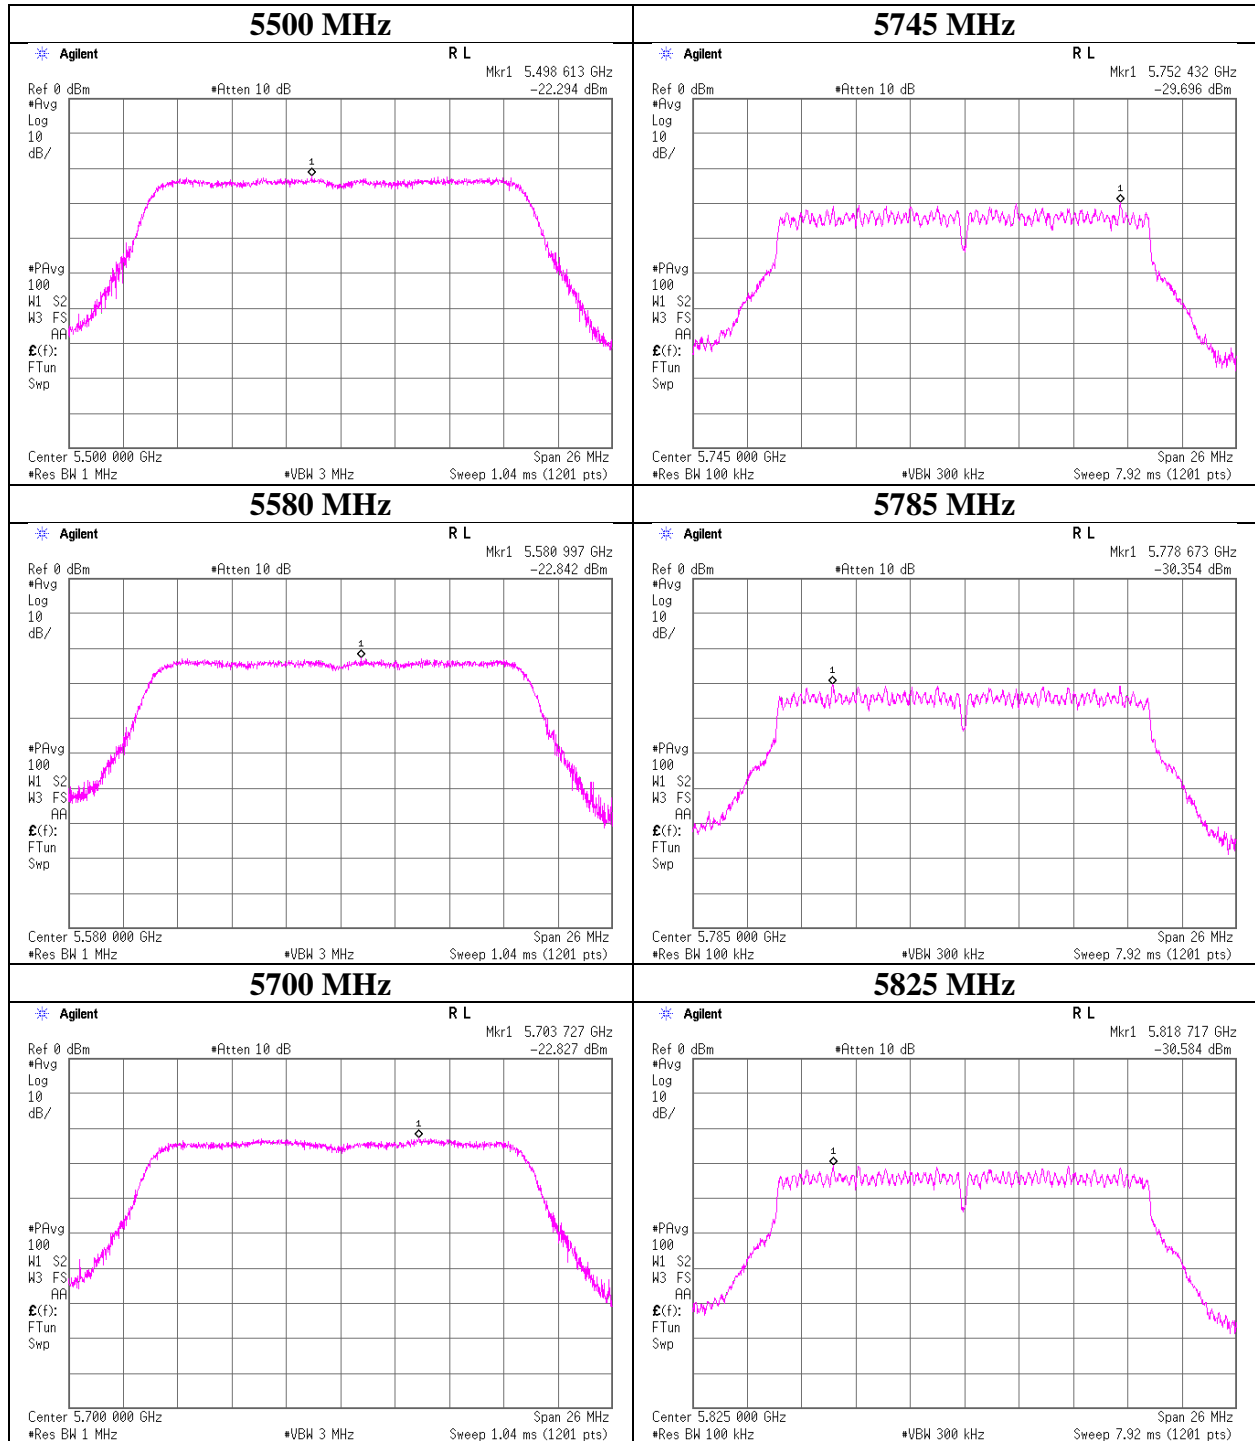



## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 22, 2016  
Temperature / Humidity : 24 deg. C / 47 % RH  
Engineer : Kenichi Adachi  
Mode : Tx 11n-40, MIMO

Antenna: 0 + 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
	1	2	Sum				1	2	Sum			
[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5190	0.27	0.24	0.51	-2.96	11.00	13.96	0.57	0.19	0.76	-1.18	17.00	18.18
-	-	-	-	-	-	-	-	-	-	-	-	-
5230	0.62	0.62	1.24	0.93	11.00	10.07	1.33	0.50	1.83	2.62	17.00	14.38
5270	0.57	0.65	1.23	0.88	11.00	10.12	1.23	0.52	1.75	2.43	17.00	14.57
-	-	-	-	-	-	-	-	-	-	-	-	-
5310	0.58	0.54	1.12	0.48	11.00	10.52	1.24	0.43	1.67	2.22	17.00	14.78

Tested Frequency [MHz]	Duty Factor [dB]	RBW Correction Factor [dB]	Antenna: 0					Antenna: 1							
			PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result		PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result		
							Cond.	e.i.r.p.					Cond.	e.i.r.p.	
5190	2.50	0.00	-30.31	2.00	20.06	3.31	-5.75	-2.44	-30.65	1.88	20.06	-0.96	-6.21	-7.17	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5230	2.50	0.00	-26.61	2.00	20.05	3.31	-2.06	1.25	-26.52	1.88	20.05	-0.96	-2.09	-3.05	
5270	2.50	0.00	-26.99	2.01	20.05	3.31	-2.43	0.88	-26.29	1.89	20.05	-0.96	-1.85	-2.81	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5310	2.50	0.00	-26.94	2.01	20.04	3.31	-2.39	0.92	-27.11	1.89	20.04	-0.96	-2.68	-3.64	

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	24 deg. C / 47 % RH
Engineer	Kenichi Adachi
Mode	Tx 11n-40, MIMO

### Antenna 0

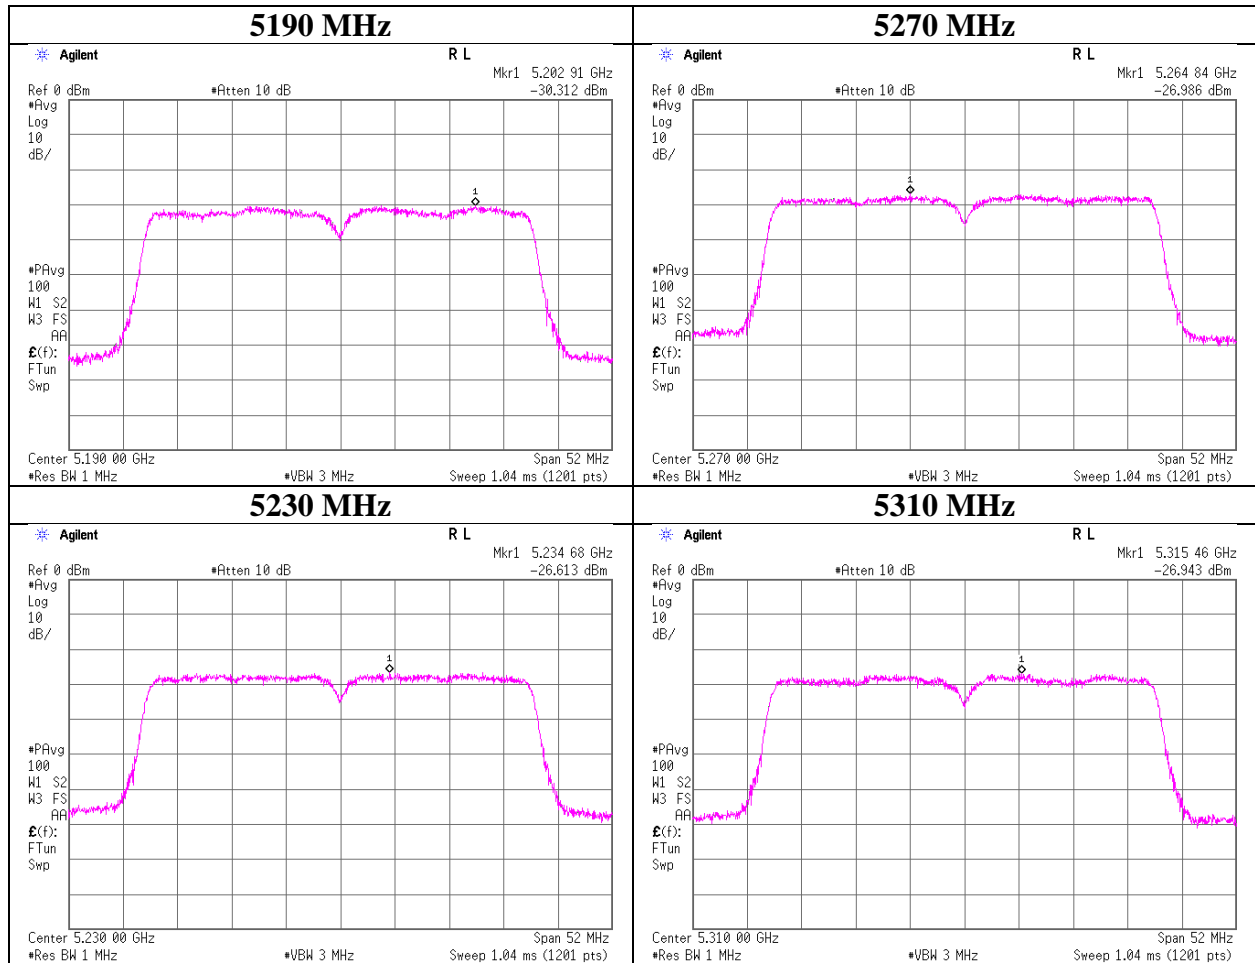

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	24 deg. C / 47 % RH
Engineer	Kenichi Adachi
Mode	Tx 11n-40, MIMO

### Antenna 1

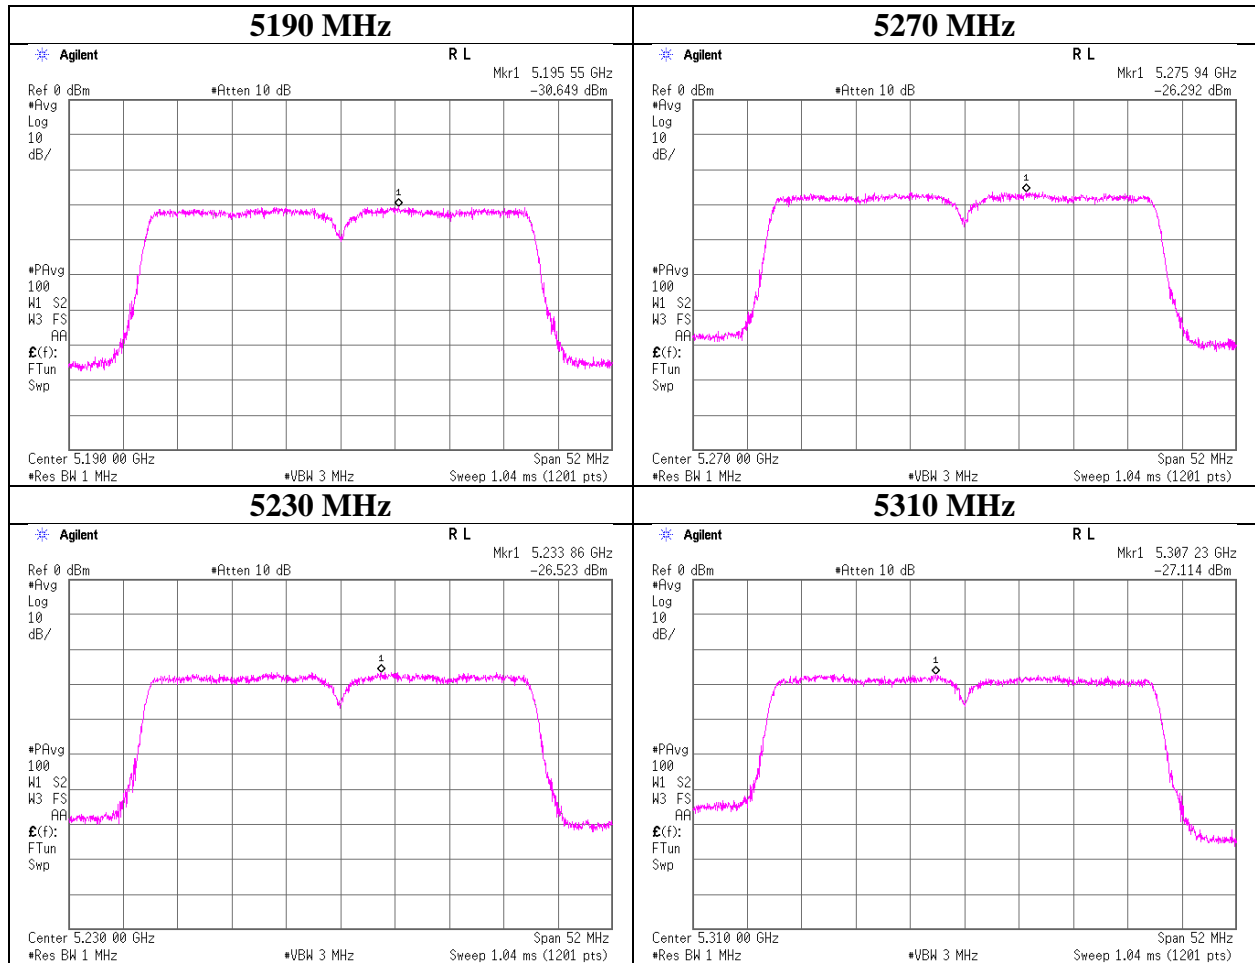

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 22, 2016  
Temperature / Humidity : 24 deg. C / 47 % RH  
Engineer : Kenichi Adachi  
Mode : Tx 11ac-40, MIMO

**Antenna: 0 + 1**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
	1	2	Sum				1	2	Sum			
[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	
5190	0.26	0.25	0.51	-2.91	11.00	13.91	0.56	0.20	0.76	-1.19	17.00	18.19
-	-	-	-	-	-	-	-	-	-	-	-	-
5230	0.62	0.68	1.30	1.14	11.00	9.86	1.34	0.54	1.88	2.74	17.00	14.26
5270	0.58	0.60	1.17	0.69	11.00	10.31	1.23	0.48	1.71	2.34	17.00	14.66
-	-	-	-	-	-	-	-	-	-	-	-	-
5310	0.62	0.56	1.17	0.70	11.00	10.30	1.32	0.45	1.77	2.47	17.00	14.53

Tested Frequency [MHz]	Duty Factor [dB]	RBW Correction Factor [dB]	Antenna: 0				Antenna: 1				PSD Result Cond.	PSD Result e.i.r.p.		
			PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain				
			[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dB]	[dB]	[dBi]				
5190	2.44	0.00	-30.34	2.00	20.06	3.31	-5.84	-2.53	-30.38	1.88	20.06	-0.96	-6.00	-6.96
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5230	2.44	0.00	-26.54	2.00	20.05	3.31	-2.05	1.26	-26.07	1.88	20.05	-0.96	-1.69	-2.65
5270	2.44	0.00	-26.90	2.01	20.05	3.31	-2.40	0.91	-26.62	1.89	20.05	-0.96	-2.23	-3.19
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5310	2.44	0.00	-26.60	2.01	20.04	3.31	-2.11	1.20	-26.90	1.89	20.04	-0.96	-2.53	-3.49

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	24 deg. C / 47 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-40, MIMO

### Antenna 0

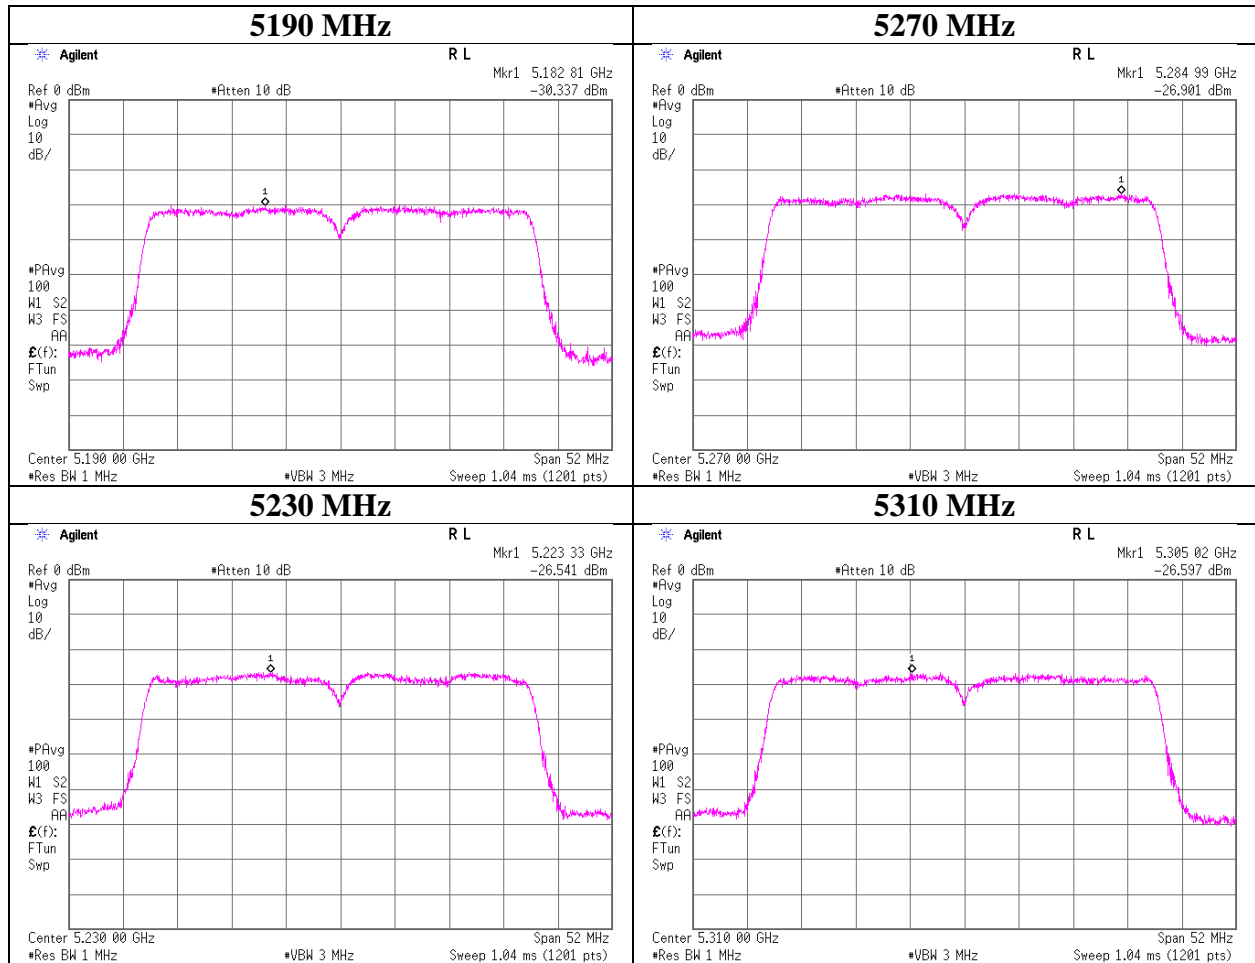

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	24 deg. C / 47 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-40, MIMO

### Antenna 1

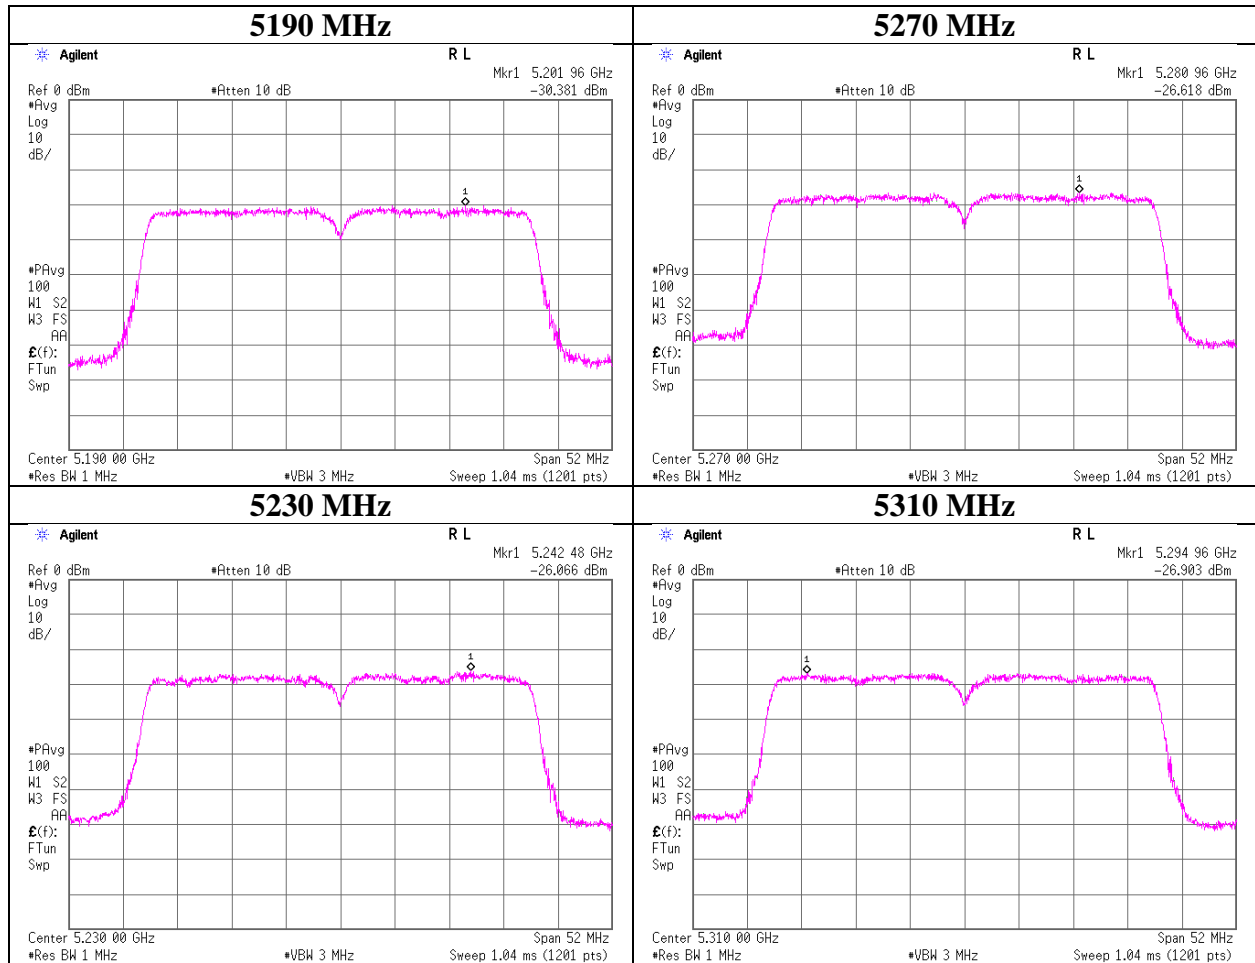

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

Test place : Shonan EMC Lab. No.1 Measurement Room  
Report No. : 11334871S-E-R1  
Date : November 22, 2016  
Temperature / Humidity : 24 deg. C / 47 % RH  
Engineer : Kenichi Adachi  
Mode : Tx 11ac-80, MIMO  
December 2, 2016  
24 deg. C / 38 % RH  
Shinichi Takano

Antenna: 0 + 1

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD (Conducted)						PSD (e.i.r.p.)					
	Antenna			Result [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	Antenna			Result [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
1 [mW/MHz]	2 [mW/MHz]	Sum [mW/MHz]	1 [mW/MHz]				2 [mW/MHz]	Sum [mW/MHz]				
5210	0.10	0.10	0.21	-6.88	11.00	17.88	0.22	0.08	0.30	-5.16	17.00	22.16
-	-	-	-	-	-	-	-	-	-	-	-	-
5290	0.10	0.10	0.20	-6.97	11.00	17.97	0.22	0.08	0.30	-5.25	17.00	22.25
-	-	-	-	-	-	-	-	-	-	-	-	-
5530	0.29	0.39	0.68	-1.69	11.00	12.69	0.62	0.31	0.93	-0.30	17.00	17.30
-	-	-	-	-	-	-	-	-	-	-	-	-
5610	0.32	0.36	0.68	-1.66	11.00	12.66	0.70	0.29	0.98	-0.08	17.00	17.08
5775	0.30	0.32	0.62	-2.06	30.00	32.06	0.64	0.26	0.90	-0.46	17.00	17.46
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

Tested Frequency [MHz]	Antenna: 0							Antenna: 1						
	Duty Factor [dB]	RBW Correction Factor [dB]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz]	PSD Result e.i.r.p. [dBm/MHz]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz]	PSD Result e.i.r.p. [dBm/MHz]
5210	3.23	0.00	-35.08	2.00	20.05	3.31	-9.80	-6.49	-35.14	1.88	20.05	-0.96	-9.98	-10.94
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290	3.23	0.00	-35.18	2.01	20.05	3.31	-9.89	-6.58	-35.25	1.89	20.05	-0.96	-10.08	-11.04
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5530	3.23	0.00	-30.65	2.02	20.03	3.31	-5.37	-2.06	-29.28	1.90	20.03	-0.96	-4.12	-5.08
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5610	3.23	0.00	-30.22	2.04	20.06	3.31	-4.89	-1.58	-29.69	1.92	20.06	-0.96	-4.47	-5.43
5775	3.23	6.99	-37.66	2.09	20.11	3.31	-5.24	-1.93	-37.21	1.97	20.11	-0.96	-4.91	-5.87
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 22, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 47 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-80, MIMO	

### Antenna 0

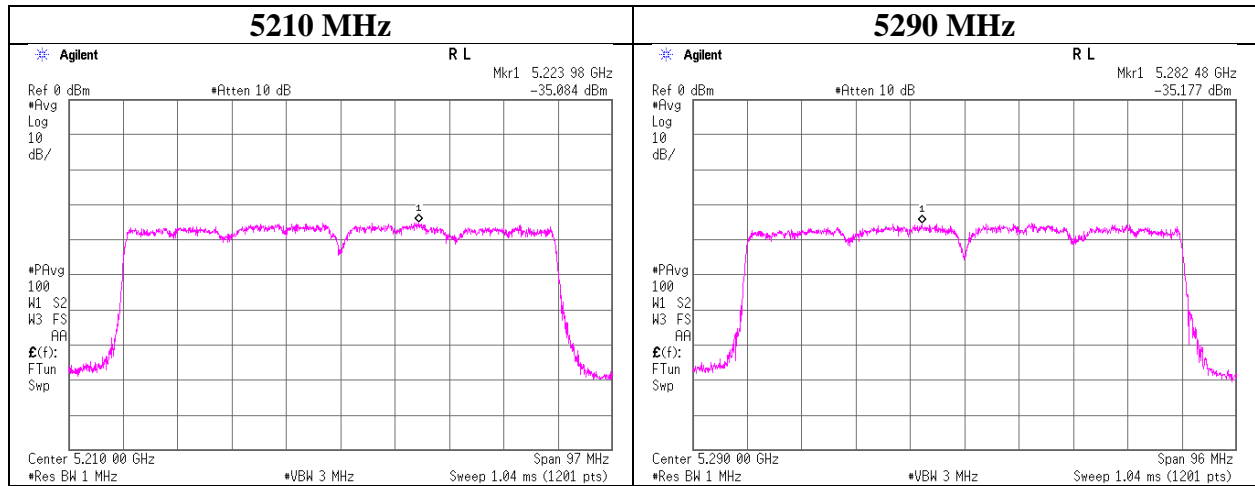

### Antenna 1

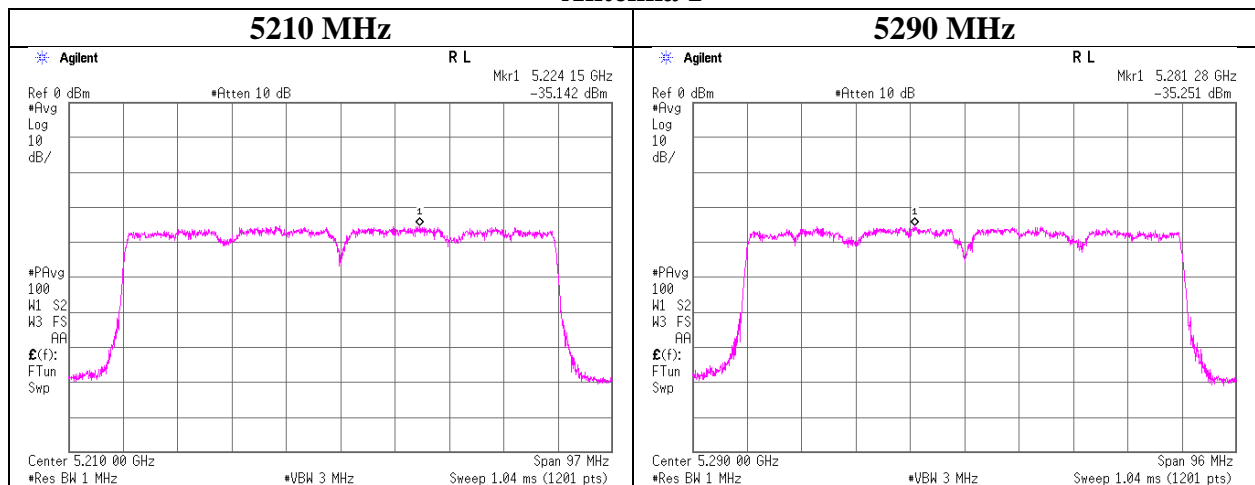

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401




## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 22, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 47 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-80, MIMO	

### Antenna 0

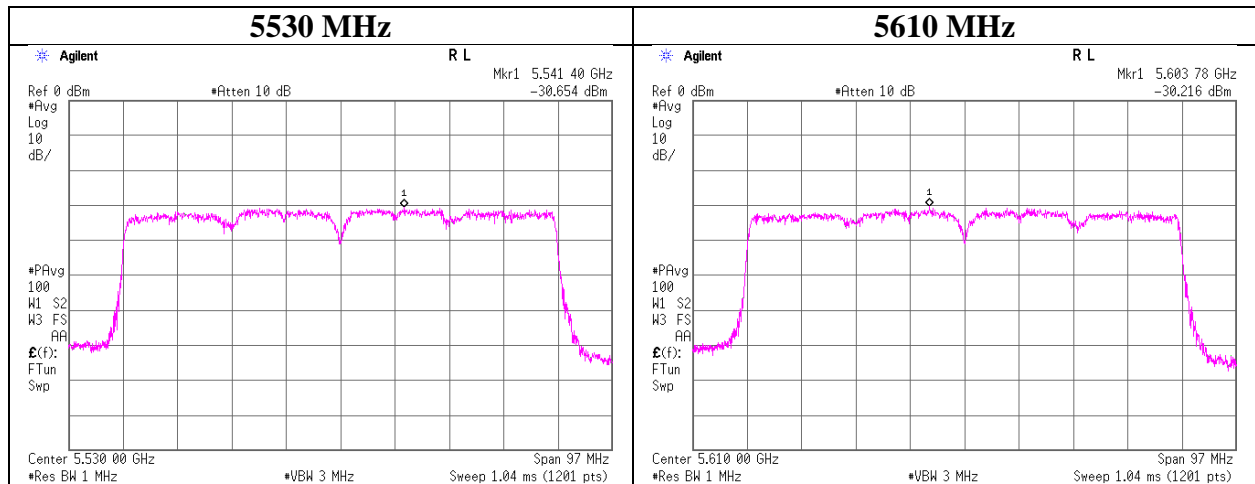

### Antenna 1

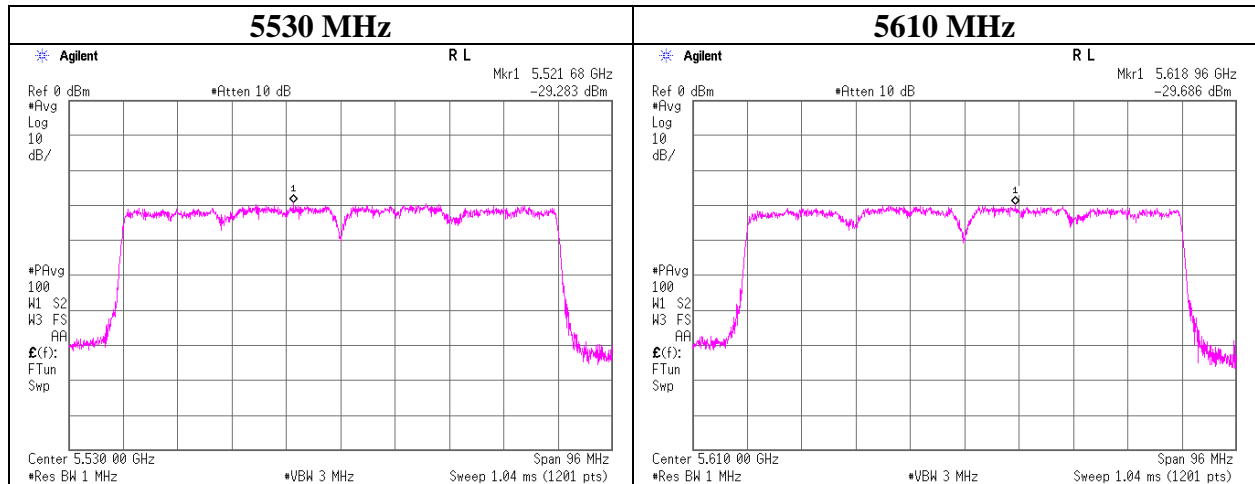

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.1 Measurement Room	
Report No.	11334871S-E-R1	
Date	November 22, 2016	December 2, 2016
Temperature / Humidity	24 deg. C / 47 % RH	24 deg. C / 38 % RH
Engineer	Kenichi Adachi	Shinichi Takano
Mode	Tx 11ac-80, MIMO	

### Antenna 0

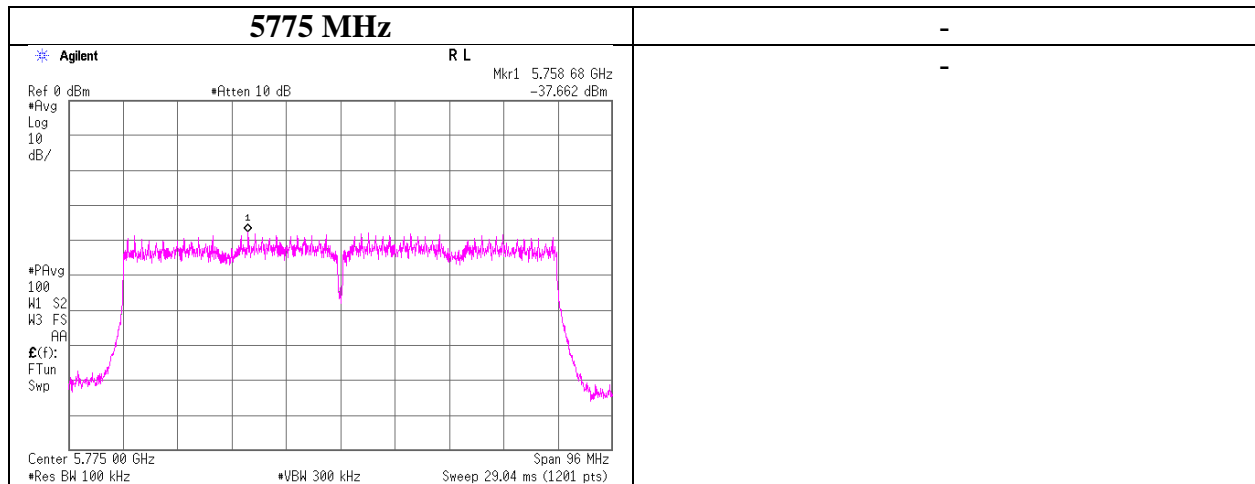

### Antenna 1

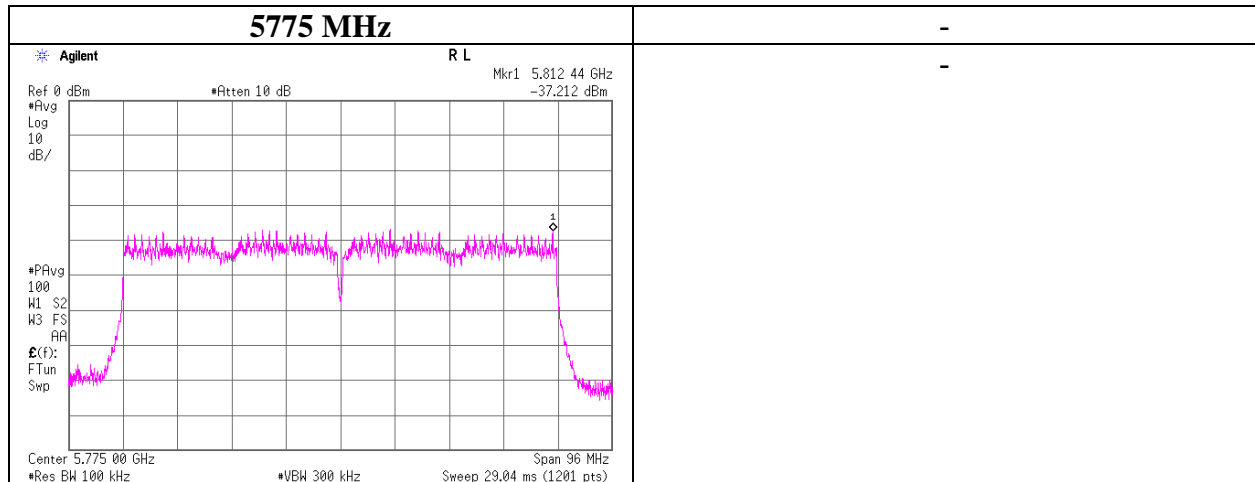

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 30, 2016      October 28, 2016      November 11, 2016  
Temperature / Humidity : 22 deg. C / 70 % RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Makoto Hosaka      Shinichi Takano      Shinichi Takano  
            (1 GHz-6.5 GHz)      (6.5 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11ac-20 , SISO,5180 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	53.60	31.70	15.67	41.02	2.28	62.23	73.90	11.6	172	166	
Hori.	15540.000	PK	48.34	39.24	10.64	40.23	-9.54	48.45	73.90	25.4	155	217	
Hori.	5150.000	AV	40.16	31.70	15.67	41.02	2.28	48.79	53.90	5.1	172	166	AV:VBW2.7kHz
Hori.	15540.000	AV	38.77	39.24	10.64	40.23	-9.54	38.88	53.90	15.0	155	217	AV:VBW2.7kHz
Vert.	5150.000	PK	53.15	31.70	15.67	41.02	2.28	61.78	73.90	12.1	138	155	
Vert.	15540.000	PK	48.15	39.24	10.64	40.23	-9.54	48.26	73.90	25.6	157	226	
Vert.	5150.000	AV	39.07	31.70	15.67	41.02	2.28	47.70	53.90	6.2	138	155	AV:VBW2.7kHz
Vert.	15540.000	AV	38.36	39.24	10.64	40.23	-9.54	38.47	53.90	15.4	157	226	AV:VBW2.7kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10360.000	PK	46.18	39.61	8.21	40.37	2.28	55.91	-39.29	-27.00	12.3	150	0	
Vert.	10360.000	PK	46.20	39.61	8.21	40.37	2.28	55.93	-39.27	-27.00	12.3	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 30, 2016
Temperature / Humidity	22deg. C / 70 % RH
Engineer	Makoto Hosaka
Mode	Tx 11ac-20 , SISO, 5180 MHz

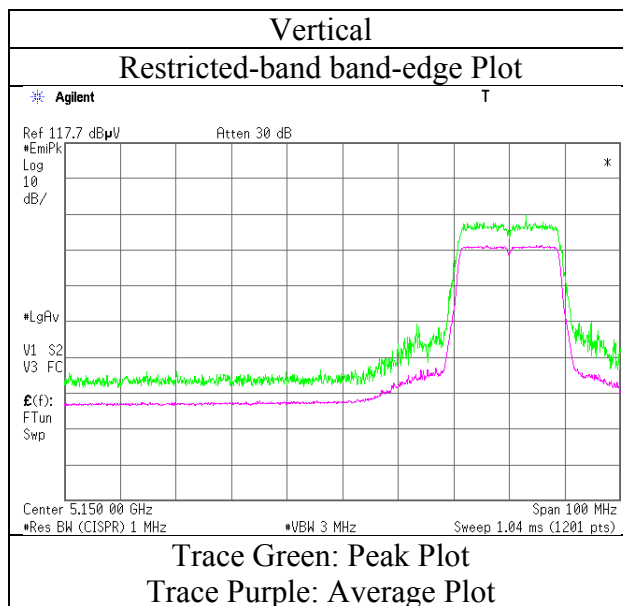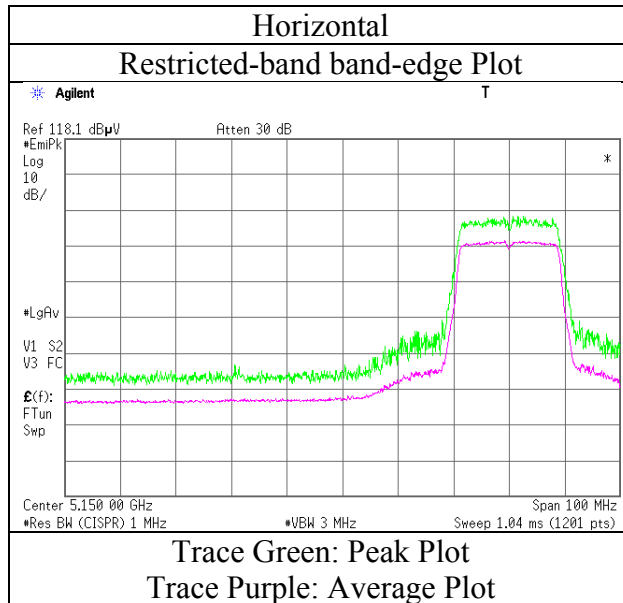

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 30, 2016      October 28, 2016      November 11, 2016  
Temperature / Humidity : 22 deg. C / 70 % RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Makoto Hosaka      Shinichi Takano      Shinichi Takano  
              (1 GHz-6.5 GHz)      (6.5 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11ac-20 , SISO,5240 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	15720.000	PK	48.07	38.58	10.73	40.09	-9.54	47.75	73.90	26.1	156	218	
Hori.	15720.000	AV	37.74	38.58	10.73	40.09	-9.54	37.42	53.90	16.4	156	218	VBW:2.7kHz
Vert.	15720.000	PK	47.85	38.58	10.73	40.09	-9.54	47.53	73.90	26.3	158	229	
Vert.	15720.000	AV	37.81	38.58	10.73	40.09	-9.54	37.49	53.90	16.4	158	229	VBW:2.7kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10480.000	PK	45.94	39.84	8.19	40.40	2.28	55.85	-39.35	-27.00	12.4	150	0	
Vert.	10480.000	PK	45.56	39.84	8.19	40.40	2.28	55.47	-39.73	-27.00	12.7	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 30, 2016      October 28, 2016      November 11, 2016      November 10, 2016  
Temperature / Humidity : 22 deg. C / 70 % RH      26deg. C / 32 % RH      23deg. C / 40 % RH      23deg. C / 35 % RH  
Engineer : Makoto Hosaka      Shinichi Takano      Shinichi Takano      Shinichi Takano  
            (1 GHz-6.5 GHz)      (6.5 GHz-18 GHz)      (18 GHz-40 GHz)      (30 MHz-1 GHz)  
Mode : Tx 11ac-20 , SISO,5260 MHz

### (below 1GHz and above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	98.415	QP	47.19	9.70	7.54	32.14	0.00	32.29	43.50	11.2	302	45	
Hori.	125.001	QP	50.17	13.21	7.45	32.12	0.00	38.71	43.50	4.7	146	337	
Hori.	215.998	QP	48.76	11.72	8.22	32.03	0.00	36.67	43.50	6.8	149	262	
Hori.	412.016	QP	48.42	15.82	9.22	31.95	0.00	41.51	46.00	4.4	224	64	
Hori.	596.395	QP	43.22	18.92	9.98	31.92	0.00	40.20	46.00	5.8	137	16	
Hori.	625.096	QP	44.28	19.15	10.09	31.93	0.00	41.59	46.00	4.4	137	274	
Hori.	15780.000	PK	47.97	38.37	10.77	40.05	-9.54	47.52	73.90	26.3	153	216	
Hori.	15780.000	AV	37.54	38.37	10.77	40.05	-9.54	37.09	53.90	16.8	153	216	A V:VBW2.7kHz
Vert.	36.143	QP	41.52	15.55	6.74	32.18	0.00	31.63	40.00	8.3	100	118	
Vert.	419.794	QP	48.53	15.97	9.25	31.95	0.00	41.80	46.00	4.2	127	159	
Vert.	600.307	QP	39.43	18.97	10.00	31.91	0.00	36.49	46.00	9.5	100	174	
Vert.	625.102	QP	42.71	19.15	10.09	31.93	0.00	40.02	46.00	5.9	100	185	
Vert.	15780.000	PK	47.96	38.37	10.77	40.05	-9.54	47.51	73.90	26.3	150	230	
Vert.	15780.000	AV	37.48	38.37	10.77	40.05	-9.54	37.03	53.90	16.8	150	230	A V:VBW2.7kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10520.000	PK	46.37	39.89	8.20	40.41	2.28	56.33	-38.87	-27.00	11.9	150	0	
Vert.	10520.000	PK	45.43	39.89	8.20	40.41	2.28	55.39	-39.81	-27.00	12.8	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30 ) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 30, 2016      October 28, 2016      November 11, 2016  
Temperature / Humidity : 22 deg. C / 70 % RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Makoto Hosaka      Shinichi Takano      Shinichi Takano  
              (1 GHz-6.5 GHz)      (6.5 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11ac-20 , SISO,5320 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	51.83	31.94	15.89	40.84	2.28	61.10	73.90	12.8	163	168	
Hori.	10640.000	PK	45.81	39.93	8.34	40.50	2.28	55.86	73.90	18.0	150	0	
Hori.	15960.000	PK	47.39	37.71	10.86	39.91	-9.54	46.51	73.90	27.3	156	145	
Hori.	5350.000	AV	39.03	31.94	15.89	40.84	2.28	48.30	53.90	<b>5.6</b>	163	168	VBW:2.7kHz
Hori.	10640.000	AV	35.74	39.93	8.34	40.50	2.28	45.79	53.90	8.1	150	0	VBW:2.7kHz
Hori.	15960.000	AV	36.82	37.71	10.86	39.91	-9.54	35.94	53.90	17.9	156	145	VBW:2.7kHz
Vert.	5350.000	PK	50.91	31.94	15.89	40.84	2.28	60.18	73.90	13.7	123	151	
Vert.	10640.000	PK	46.22	39.93	8.34	40.50	2.28	56.27	73.90	17.6	159	133	
Vert.	15960.000	PK	49.82	37.71	10.86	39.91	-9.54	48.94	73.90	24.9	152	232	
Vert.	5350.000	AV	38.23	31.94	15.89	40.84	2.28	47.50	53.90	6.4	123	151	VBW:2.7kHz
Vert.	10640.000	AV	36.09	39.93	8.34	40.50	2.28	46.14	53.90	7.7	159	133	VBW:2.7kHz
Vert.	15960.000	AV	37.75	37.71	10.86	39.91	-9.54	36.87	53.90	17.0	152	232	VBW:2.7kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 30, 2016
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Makoto Hosaka
Mode	Tx 11ac-20 , SISO,5320 MHz

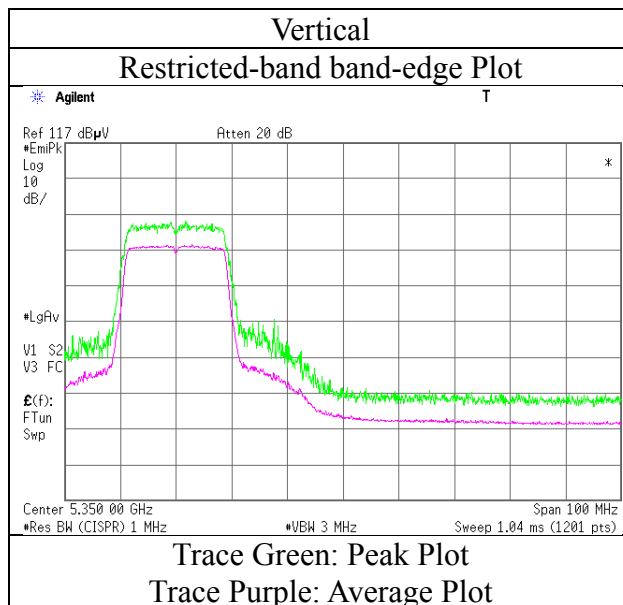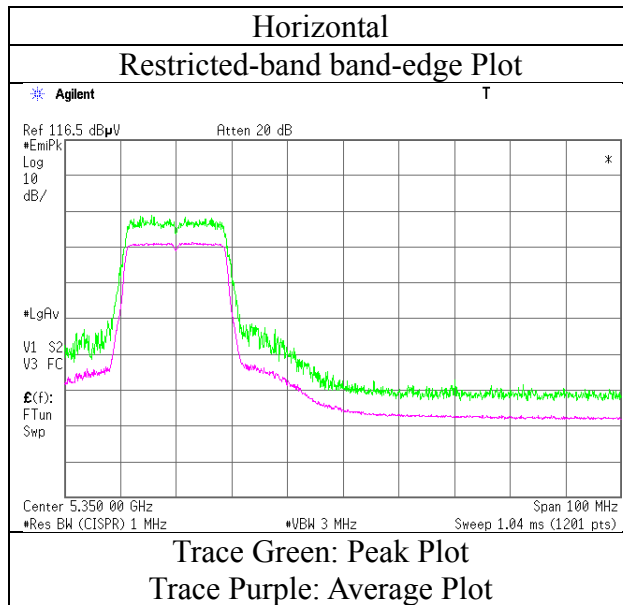

\* Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Test place                      Shonan EMC Lab. No.1 and 3 Semi Anechoic Chamber  
Report No.                      11334871S-E-R1  
Date                              November 18, 2016      November 23, 2016      November 24, 2016      November 25, 2016  
Temperature / Humidity      21 deg. C / 38 % RH    24 deg. C / 47 % RH    22 deg. C / 42 % RH    23deg. C / 28 % RH  
Engineer                        Hikaru Shirasawa        Kazutaka Takeyama      Kazutaka Takeyama      Hikaru Shirasawa  
    (1 GHz-6.5 GHz)        (6.5 GHz-13 GHz)        (13 GHz-18 GHz)        (18 GHz-40 GHz)  
Mode                              Tx 11ac-20 , SISO,5500 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.62	31.84	15.71	40.74	2.28	57.71	73.90	16.2	142	186	
Hori.	11000.000	PK	45.00	40.06	8.72	39.57	2.28	56.49	73.90	17.4	150	0	
Hori.	5460.000	AV	36.18	31.84	15.71	40.74	2.28	45.27	53.90	8.6	142	186	VBW:2.7Hz
Hori.	11000.000	AV	35.10	40.06	8.72	39.57	2.28	46.59	53.90	7.3	150	0	VBW:2.7Hz
Vert.	5460.000	PK	48.97	31.84	15.71	40.74	2.28	58.06	73.90	15.8	122	127	
Vert.	11000.000	PK	44.80	40.06	8.72	39.57	2.28	56.29	73.90	17.6	150	0	
Vert.	5460.000	AV	37.71	31.84	15.71	40.74	2.28	46.80	53.90	7.1	122	127	VBW:2.7Hz
Vert.	11000.000	AV	35.60	40.06	8.72	39.57	2.28	47.09	53.90	6.8	150	0	VBW:2.7Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	51.64	31.85	15.72	40.73	2.28	60.76	-34.47	-27.00	7.5	142	186	
Hori.	16500.000	PK	45.00	38.79	11.18	38.30	-9.54	47.13	-48.07	-27.00	21.1	150	0	
Hori.	22000.000	PK	44.00	40.17	14.34	47.47	-9.54	41.50	-53.70	-27.00	26.7	150	0	
Vert.	5470.000	PK	53.36	31.85	15.72	40.73	2.28	62.48	-32.75	-27.00	5.7	122	127	
Vert.	16500.000	PK	45.68	38.79	11.18	38.30	-9.54	47.81	-47.39	-27.00	20.4	150	0	
Vert.	22000.000	PK	44.03	40.17	14.34	47.47	-9.54	41.53	-53.67	-27.00	26.7	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG}(\{10^{(Electric\ Field\ Strength\ [dBuV/m] / 20)} * 10^{(-6)} * Distance:3[m]^2\} / 30) * 10^3$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 18, 2016
Temperature / Humidity	21 deg. C / 38 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-20 , SISO, 5500 MHz

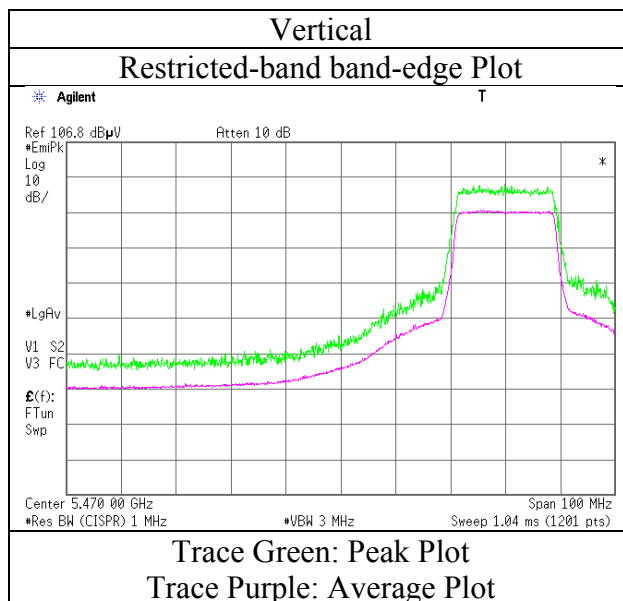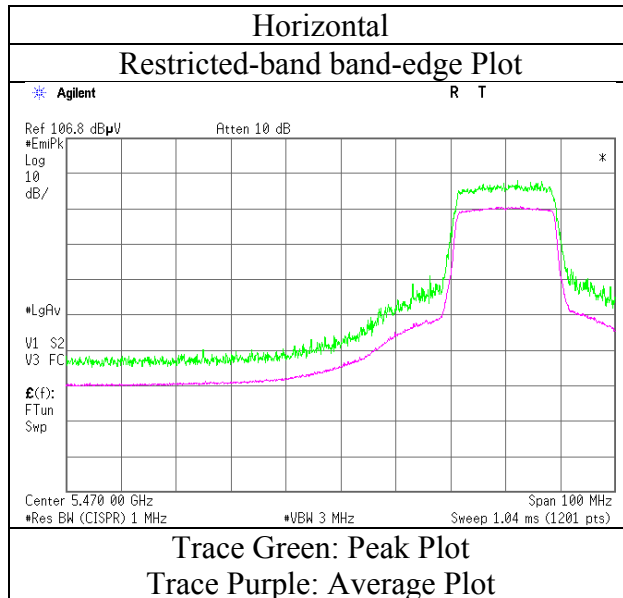

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 18, 2016      November 23, 2016      November 24, 2016      November 25, 2016  
Temperature / Humidity : 21 deg. C / 38 % RH      24 deg. C / 47 % RH      22 deg. C / 42 % RH      23deg. C / 28 % RH  
Engineer : Hikaru Shirasawa      Kazutaka Takeyama      Kazutaka Takeyama      Hikaru Shirasawa  
            (1 GHz-6.5 GHz)      (6.5 GHz-13 GHz)      (13 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11ac-20 , SISO,5580 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11160.000	PK	45.40	40.02	8.72	39.54	2.28	56.88	73.90	17.0	150	0	
Hori.	22320.000	PK	43.27	40.21	14.50	47.50	-9.54	40.94	73.90	32.9	150	0	
Hori.	11160.000	AV	35.80	40.02	8.72	39.54	2.28	47.28	53.90	<b>6.6</b>	150	0	VBW:2.7Hz
Hori.	22320.000	AV	32.80	40.21	14.50	47.50	-9.54	30.47	53.90	23.4	150	0	VBW:2.7Hz
Vert.	11160.000	PK	45.30	40.02	8.72	39.54	2.28	56.78	73.90	17.1	150	0	
Vert.	22320.000	PK	43.33	40.21	14.50	47.50	-9.54	41.00	73.90	32.9	150	0	
Vert.	11160.000	AV	35.60	40.02	8.72	39.54	2.28	47.08	53.90	6.8	150	0	VBW:2.7Hz
Vert.	22320.000	AV	32.50	40.21	14.50	47.50	-9.54	30.17	53.90	23.7	150	0	VBW:2.7Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	16740.000	PK	45.10	39.37	11.22	38.25	-9.54	47.90	-47.30	-27.00	20.3	150	0	
Vert.	16740.000	PK	45.40	39.37	11.22	38.25	-9.54	48.20	-47.00	-27.00	<b>20.0</b>	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place                                  Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No.                                    11334871S-E-R1  
Date    November 18, 2016                  November 23, 2016                  November 24, 2016                  November 25, 2016  
Temperature / Humidity                  21 deg. C / 38 % RH                  24 deg. C / 47 % RH                  22 deg. C / 42 % RH                  23deg. C / 28 % RH  
Engineer                                        Hikaru Shirasawa                        Kazutaka Takeyama                    Kazutaka Takeyama                    Hikaru Shirasawa  
    (1 GHz-6.5 GHz)                            (6.5 GHz-13 GHz)                        (13 GHz-18 GHz)                        (18 GHz-40 GHz)  
Mode    Tx 11ac-20 , SISO,5700 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11400.000	PK	45.00	39.96	8.73	39.50	2.28	56.47	73.90	17.4	150	0	
Hori.	22800.000	PK	42.80	40.26	14.58	47.11	-9.54	40.99	73.90	32.9	150	0	
Hori.	11400.000	AV	35.00	39.96	8.73	39.50	2.28	46.47	53.90	7.4	150	0	VBW:2.7Hz
Hori.	22800.000	AV	30.73	40.26	14.58	47.11	-9.54	28.92	53.90	24.9	150	0	VBW:2.7Hz
Vert.	11400.000	PK	45.47	39.96	8.73	39.50	2.28	56.94	73.90	16.9	150	0	
Vert.	22800.000	PK	43.25	40.26	14.58	47.11	-9.54	41.44	73.90	32.4	150	0	
Vert.	11400.000	AV	34.88	39.96	8.73	39.50	2.28	46.35	53.90	7.5	150	0	VBW:2.7Hz
Vert.	22800.000	AV	30.65	40.26	14.58	47.11	-9.54	28.84	53.90	25.0	150	0	VBW:2.7Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	49.98	32.43	15.98	36.39	2.28	64.28	-30.92	-27.00	3.9	191	162	
Hori.	17100.000	PK	44.90	40.88	11.31	38.17	-9.54	49.38	-45.82	-27.00	18.8	150	0	
Vert.	5725.000	PK	52.52	32.43	15.98	36.39	2.28	66.82	-28.38	-27.00	1.4	120	171	
Vert.	17100.000	PK	45.69	40.88	11.31	38.17	-9.54	50.17	-45.03	-27.00	18.0	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 18, 2016
Temperature / Humidity	21 deg. C / 38 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-20 , SISO,5700 MHz

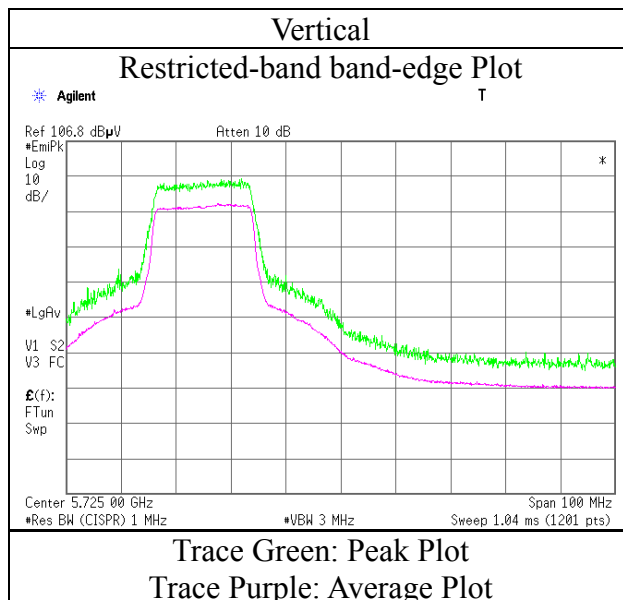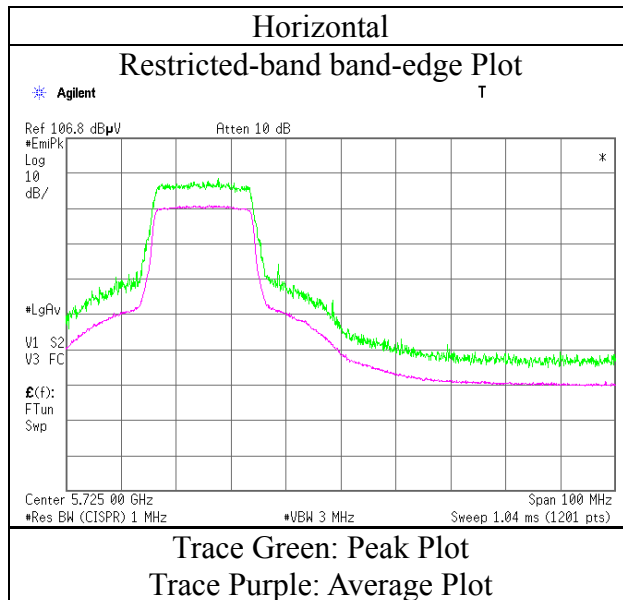

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No. 3 Semi Anechoic Chamber			
Report No.	11334871S-E-R1			
Date	November 22, 2016	November 23, 2016	November 25, 2016	November 25, 2016
Temperature / Humidity	22 deg. C / 48 % RH	24 deg. C / 47 % RH	23 deg. C / 28 % RH	23deg. C / 28 % RH
Engineer	Shinichi Takano	Kazutaka Takeyama	Kazutaka Takeyama	Hikaru Shirasawa
	(1 GHz-6.5 GHz)	(6.5 GHz-18 GHz)	(26.5 GHz-40 GHz)	(18 GHz-26.5 GHz)
Mode	Tx 11ac-20 , SISO,5745 MHz			

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11490.000	PK	45.40	39.94	8.73	39.48	2.28	56.87	73.90	17.0	150	0	
Hori.	22980.000	PK	44.17	40.28	14.58	46.86	-9.54	42.63	73.90	31.2	150	0	
Hori.	11490.000	AV	34.60	39.94	8.73	39.48	2.28	46.07	53.90	7.8	150	0	VBW:2.7Hz
Hori.	22980.000	AV	32.67	40.28	14.58	46.86	-9.54	31.13	53.90	22.7	150	0	VBW:2.7Hz
Vert.	11490.000	PK	45.00	39.94	8.73	39.48	2.28	56.47	73.90	17.4	150	0	
Vert.	22980.000	PK	43.93	40.28	14.58	46.86	-9.54	42.39	73.90	31.5	150	0	
Vert.	11490.000	AV	35.20	39.94	8.73	39.48	2.28	46.67	53.90	7.2	150	0	VBW:2.7Hz
Vert.	22980.000	AV	32.77	40.28	14.58	46.86	-9.54	31.23	53.90	22.6	150	0	VBW:2.7Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	45.38	32.32	15.94	36.41	2.28	59.51	-35.69	-27.00	8.7	186	181	
Hori.	5700.000	PK	46.71	32.39	15.97	36.40	2.28	60.95	-34.25	10.00	44.3	186	181	
Hori.	5720.000	PK	51.65	32.42	15.98	36.39	2.28	65.94	-29.26	15.60	44.9	186	181	
Hori.	5725.000	PK	58.94	32.43	15.98	36.39	2.28	73.24	-21.96	27.00	49.0	186	181	
Hori.	17235.000	PK	45.50	42.06	11.34	38.13	-9.54	51.23	-43.97	-27.00	17.0	150	0	
Vert.	5650.000	PK	44.39	32.32	15.94	36.41	2.28	58.52	-36.68	-27.00	9.7	122	154	
Vert.	5700.000	PK	45.96	32.39	15.97	36.40	2.28	60.20	-35.00	10.00	45.0	122	154	
Vert.	5720.000	PK	53.31	32.42	15.98	36.39	2.28	67.60	-27.60	15.60	43.2	122	154	
Vert.	5725.000	PK	59.30	32.43	15.98	36.39	2.28	73.60	-21.60	27.00	48.6	122	154	
Vert.	17235.000	PK	46.00	42.06	11.34	38.13	-9.54	51.73	-43.47	-27.00	16.5	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-20 , SISO, 5745 MHz

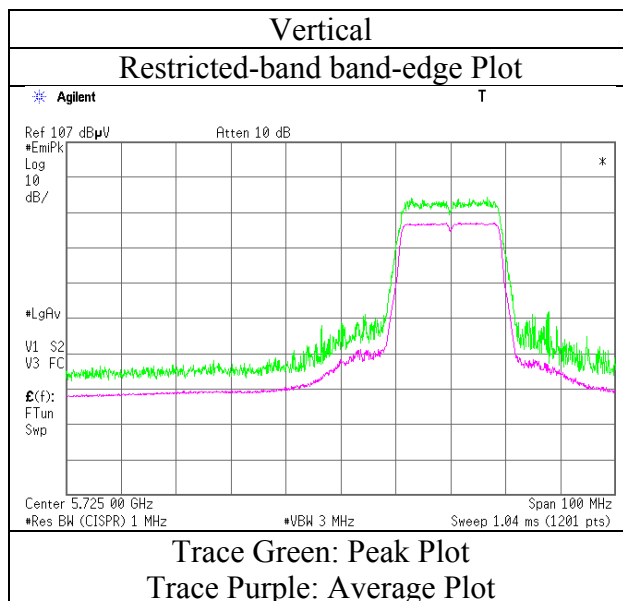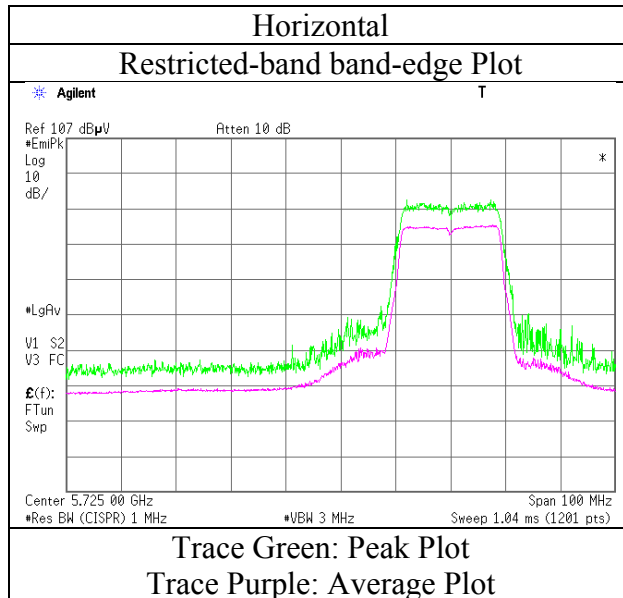

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 22, 2016      November 23, 2016      November 25, 2016      November 25, 2016  
Temperature / Humidity : 22 deg. C / 48 % RH      24 deg. C / 47 % RH      23 deg. C / 28 % RH      23deg. C / 28 % RH  
Engineer : Shinichi Takano      Kazutaka Takeyama      Kazutaka Takeyama      Hikaru Shirasawa  
              (1 GHz-6.5 GHz)      (6.5 GHz-18 GHz)      (26.5 GHz-40 GHz)      (18 GHz-26.5 GHz)  
Mode : Tx 11ac-20 , SISO,5785 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11570.000	PK	46.60	39.85	8.79	39.47	2.28	58.05	73.90	15.8	150	357	VBW:2.7Hz
Hori.	11570.000	AV	35.60	39.85	8.79	39.47	2.28	47.05	53.90	6.8	150	357	
Vert.	11570.000	PK	47.40	39.85	8.79	39.47	2.28	58.85	73.90	15.0	150	228	
Vert.	11570.000	AV	36.00	39.85	8.79	39.47	2.28	47.45	53.90	<b>6.4</b>	150	228	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	17355.000	PK	45.40	43.10	11.37	38.09	-9.54	52.24	-42.96	-27.00	16.0	150	0	
Hori.	23140.000	PK	42.63	40.25	14.65	46.74	-9.54	41.25	-53.95	-27.00	27.0	150	0	
Vert.	17355.000	PK	45.77	43.10	11.37	38.09	-9.54	52.61	-42.59	-27.00	<b>15.6</b>	150	0	
Vert.	23140.000	PK	43.42	40.25	14.65	46.74	-9.54	42.04	-53.16	-27.00	26.2	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB



## Radiated Spurious Emission

Test place Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 11334871S-E-R1  
Date November 22, 2016 November 23, 2016 November 25, 2016 November 25, 2016  
Temperature / Humidity 22 deg. C / 48 % RH 24 deg. C / 47 % RH 23 deg. C / 28 % RH 23deg. C / 28 % RH  
Engineer Shinichi Takano Kazutaka Takeyama Kazutaka Takeyama Hikaru Shirasawa  
(1 GHz-6.5 GHz) (6.5 GHz-18 GHz) (26.5 GHz-40 GHz) (18 GHz-26.5 GHz)  
Mode Tx 11ac-20 , SISO,5825 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11650.000	PK	45.25	39.74	8.86	39.45	2.28	56.68	73.90	17.2	150	0	
Hori.	11650.000	AV	34.60	39.74	8.86	39.45	2.28	46.03	53.90	7.8	150	0	VBW:2.7Hz
Vert.	11650.000	PK	45.30	39.74	8.86	39.45	2.28	56.73	73.90	17.1	150	0	
Vert.	11650.000	AV	34.50	39.74	8.86	39.45	2.28	45.93	53.90	7.9	150	0	VBW:2.7Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	49.92	32.61	16.06	36.35	2.28	64.52	-30.68	27.00	57.7	202	177	
Hori.	5855.000	PK	46.90	32.61	16.06	36.35	2.28	61.50	-33.70	15.60	49.3	202	177	
Hori.	5875.000	PK	44.16	32.64	16.08	36.34	2.28	58.82	-36.38	10.00	46.4	202	177	
Hori.	5925.000	PK	44.43	32.71	16.12	36.32	2.28	59.22	-35.98	-27.00	9.0	202	177	
Hori.	17475.000	PK	45.32	44.15	11.40	38.06	-9.54	53.27	-41.93	-27.00	14.9	150	0	
Hori.	23300.000	PK	43.16	40.22	14.74	46.64	-9.54	41.94	-53.26	-27.00	26.3	150	0	
Vert.	5850.000	PK	51.89	32.61	16.06	36.35	2.28	66.49	-28.71	27.00	55.7	126	157	
Vert.	5855.000	PK	49.11	32.61	16.06	36.35	2.28	63.71	-31.49	15.60	47.1	126	157	
Vert.	5875.000	PK	43.81	32.64	16.08	36.34	2.28	58.47	-36.73	10.00	46.7	126	157	
Vert.	5925.000	PK	45.21	32.71	16.12	36.32	2.28	60.00	-35.20	-27.00	8.2	126	157	
Vert.	17475.000	PK	45.10	44.15	11.40	38.06	-9.54	53.05	-42.15	-27.00	15.2	150	0	
Vert.	23300.000	PK	43.50	40.22	14.74	46.64	-9.54	42.28	-52.92	-27.00	25.9	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-20 , SISO,5825 MHz

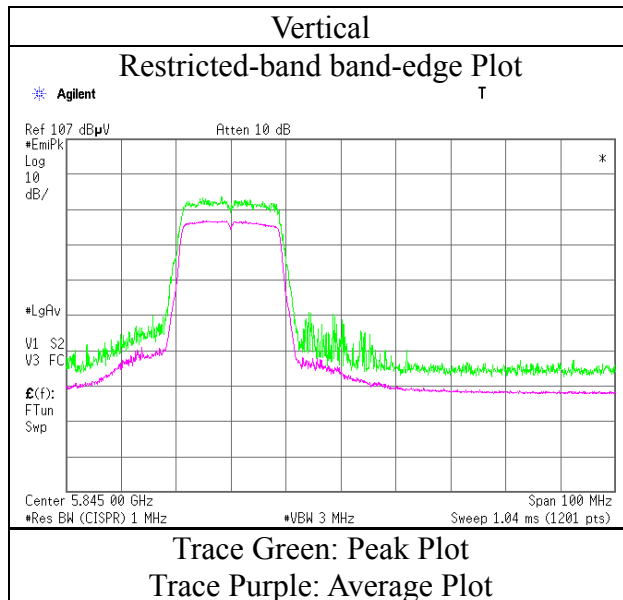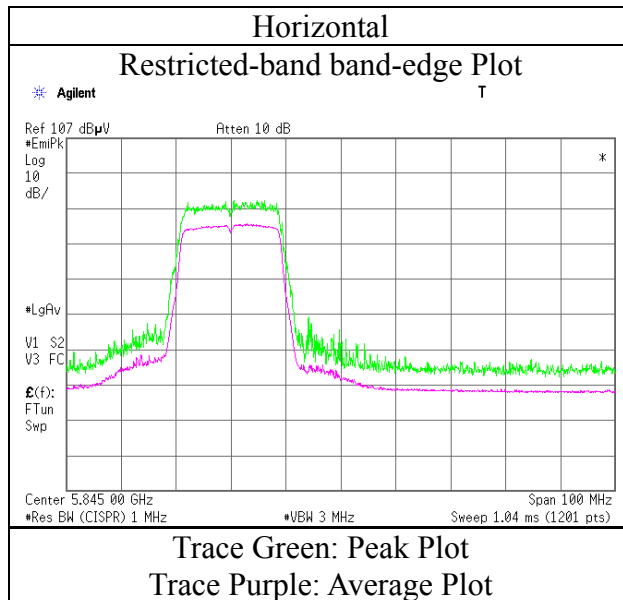

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 30, 2016  
Temperature / Humidity : 22 deg. C / 70 % RH  
Engineer : Makoto Hosaka  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-20 , MIMO,5180 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	50.52	31.70	15.67	41.02	2.28	59.15	73.90	14.7	159	163	
Hori.	5150.000	AV	38.91	31.70	15.67	41.02	2.28	47.54	53.90	<b>6.3</b>	159	163	VBW:5.1kHz
Vert.	5150.000	PK	49.04	31.70	15.67	41.02	2.28	57.67	73.90	16.2	148	155	
Vert.	5150.000	AV	38.52	31.70	15.67	41.02	2.28	47.15	53.90	6.7	148	155	VBW:5.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 30, 2016
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Makoto Hosaka
Mode	Tx 11n-20 , MIMO,5180 MHz

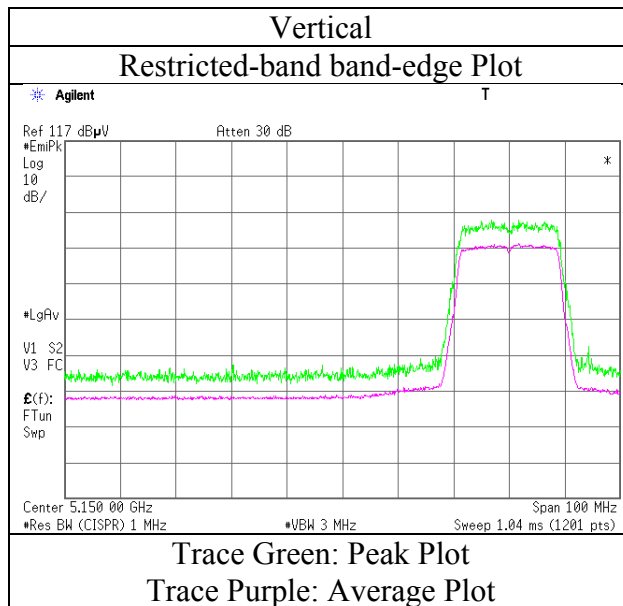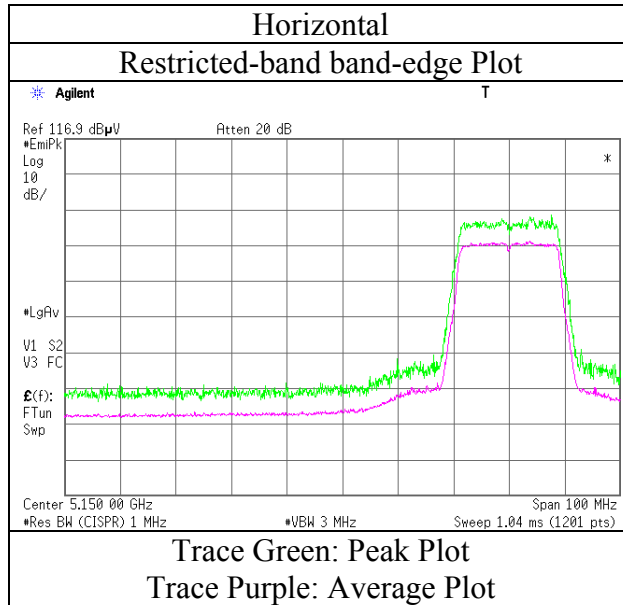

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 30, 2016  
Temperature / Humidity : 22 deg. C / 70 % RH  
Engineer : Makoto Hosaka  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-20 , MIMO,5320 MHz

**(above 1GHz Inside of the restricted band)**

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	49.20	31.94	15.89	40.84	2.28	58.47	73.90	15.4	166	167	
Hori.	5350.000	AV	38.06	31.94	15.89	40.84	2.28	47.33	53.90	<b>6.5</b>	166	167	VBW:5.1kHz
Vert.	5350.000	PK	49.29	31.94	15.89	40.84	2.28	58.56	73.90	15.3	123	156	
Vert.	5350.000	AV	38.00	31.94	15.89	40.84	2.28	47.27	53.90	6.6	123	156	VBW:5.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 30, 2016
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Makoto Hosaka
Mode	Tx 11n-20 , MIMO,5320 MHz

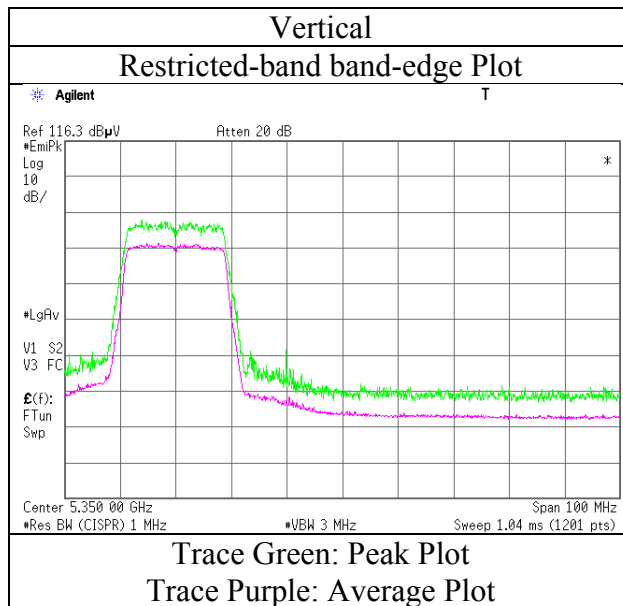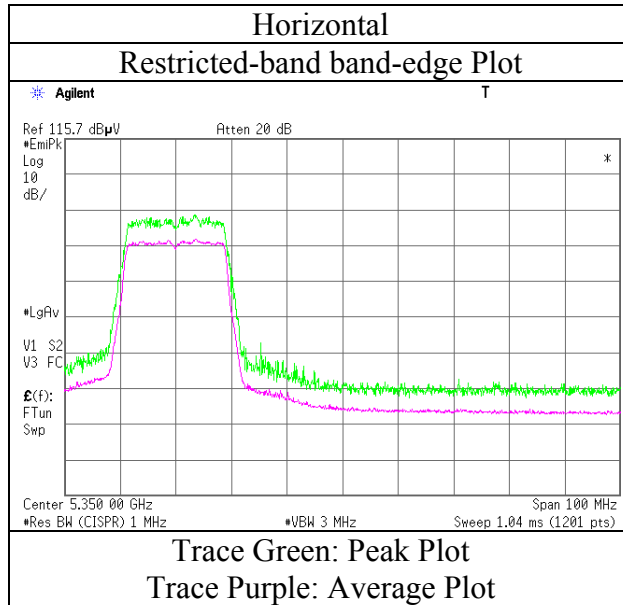

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.1 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 18, 2016  
Temperature / Humidity : 21 deg. C / 38 % RH  
Engineer : Hikaru Shirasawa  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-20 , MIMO,5500 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	47.15	31.84	15.71	40.74	2.28	56.24	73.90	17.7	140	169	
Hori.	5460.000	AV	37.33	31.84	15.71	40.74	2.28	46.42	53.90	7.5	140	169	VBW:5.1kHz
Vert.	5460.000	PK	47.40	31.84	15.71	40.74	2.28	56.49	73.90	17.4	107	146	
Vert.	5460.000	AV	37.09	31.84	15.71	40.74	2.28	46.18	53.90	7.7	107	146	VBW:5.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	49.60	31.85	15.72	40.73	2.28	58.72	-36.51	-27.00	9.5	140	169	
Vert.	5470.000	PK	50.33	31.85	15.72	40.73	2.28	59.45	-35.78	-27.00	8.8	107	146	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 18, 2016
Temperature / Humidity	21 deg. C / 38 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-20 , MIMO, 5500 MHz

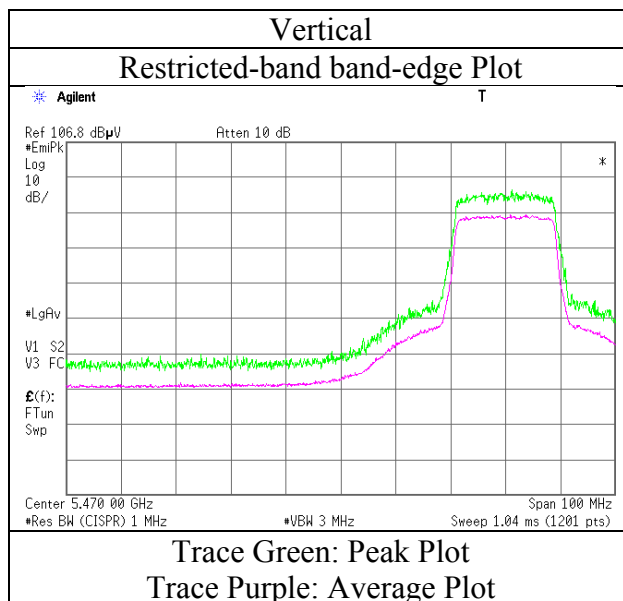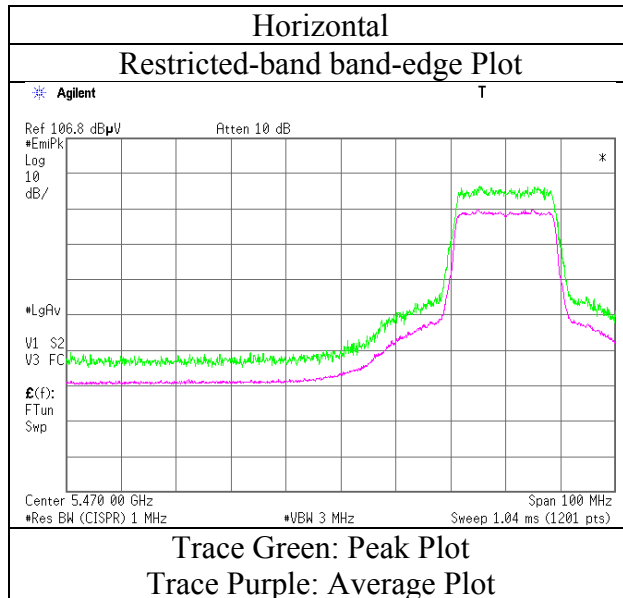

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 18, 2016  
Temperature / Humidity : 21 deg. C / 38 % RH  
Engineer : Hikaru Shirasawa  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-20 , MIMO,5700 MHz

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	55.48	32.26	15.86	40.62	2.28	65.26	-29.97	-27.00	3.0	143		
Vert.	5725.000	PK	53.83	32.26	15.86	40.62	2.28	63.61	-31.62	-27.00	4.6	116		

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 ) / 30 \* 10 ^ 3 )

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 18, 2016
Temperature / Humidity	21 deg. C / 38 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-20 , MIMO,5700 MHz

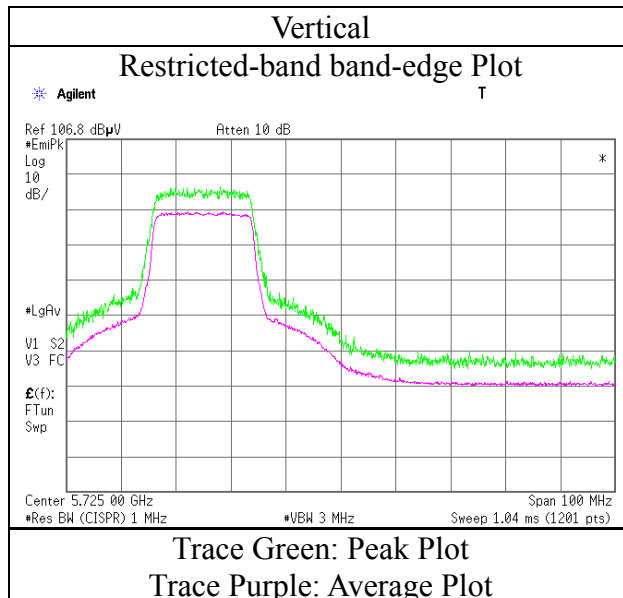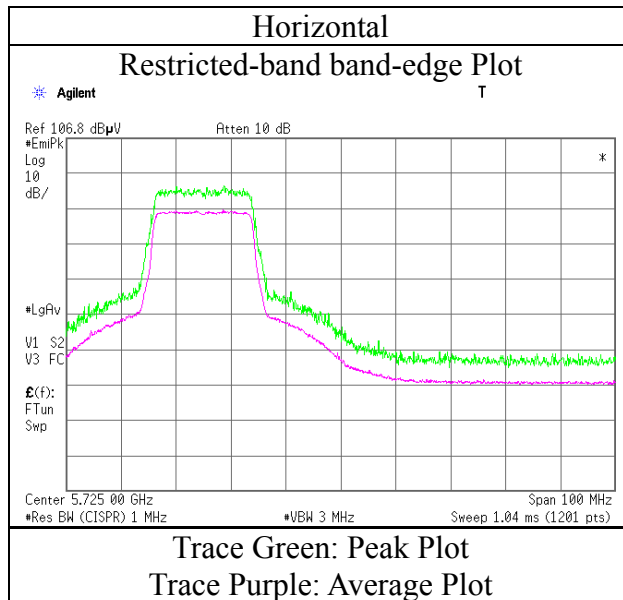

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 22, 2016  
Temperature / Humidity : 22 deg. C / 48 % RH  
Engineer : Shinichi Takano  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-20 , MIMO,5745 MHz

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	44.99	32.32	15.94	36.41	2.28	59.12	-36.08	-27.00	<b>9.1</b>	184	179	
Hori.	5700.000	PK	44.87	32.39	15.97	36.40	2.28	59.11	-36.09	10.00	46.1	184	179	
Hori.	5720.000	PK	51.72	32.42	15.98	36.39	2.28	66.01	-29.19	15.60	44.8	184	179	
Hori.	5725.000	PK	55.34	32.43	15.98	36.39	2.28	69.64	-25.56	27.00	52.6	184	179	
Vert.	5650.000	PK	44.37	32.32	15.94	36.41	2.28	58.50	-36.70	-27.00	9.7	121	154	
Vert.	5700.000	PK	44.09	32.39	15.97	36.40	2.28	58.33	-36.87	10.00	46.9	121	154	
Vert.	5720.000	PK	50.57	32.42	15.98	36.39	2.28	64.86	-30.34	15.60	45.9	121	154	
Vert.	5725.000	PK	54.86	32.43	15.98	36.39	2.28	69.16	-26.04	27.00	53.0	121	154	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Shinichi Takano
Mode	Tx 11n-20 , MIMO, 5745 MHz

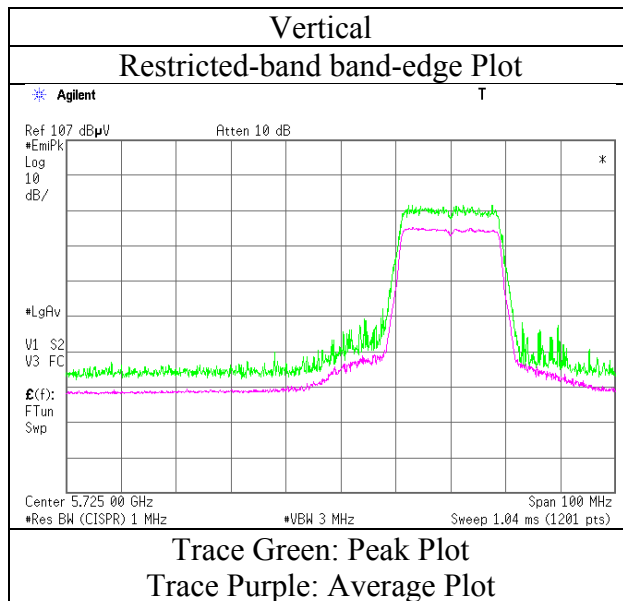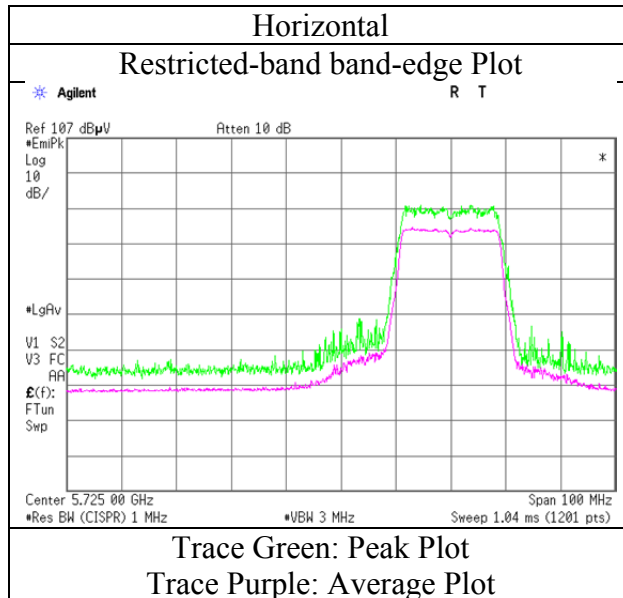

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 22, 2016  
Temperature / Humidity : 22 deg. C / 48 % RH  
Engineer : Shinichi Takano  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-20 , MIMO,5825 MHz

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	49.36	32.61	16.06	36.35	2.28	63.96	-31.24	27.00	58.2	154	173	
Hori.	5855.000	PK	46.62	32.61	16.06	36.35	2.28	61.22	-33.98	15.60	49.6	154	173	
Hori.	5875.000	PK	46.26	32.64	16.08	36.34	2.28	60.92	-34.28	10.00	44.3	154	173	
Hori.	5925.000	PK	45.51	32.71	16.12	36.32	2.28	60.30	-34.90	-27.00	<b>7.9</b>	154	173	
Vert.	5850.000	PK	48.79	32.61	16.06	36.35	2.28	63.39	-31.81	27.00	58.8	121	156	
Vert.	5855.000	PK	46.42	32.61	16.06	36.35	2.28	61.02	-34.18	15.60	49.8	121	156	
Vert.	5875.000	PK	44.18	32.64	16.08	36.34	2.28	58.84	-36.36	10.00	46.4	121	156	
Vert.	5925.000	PK	43.64	32.71	16.12	36.32	2.28	58.43	-36.77	-27.00	9.8	121	156	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30 ) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Shinichi Takano
Mode	Tx 11n-20 , MIMO,5825 MHz

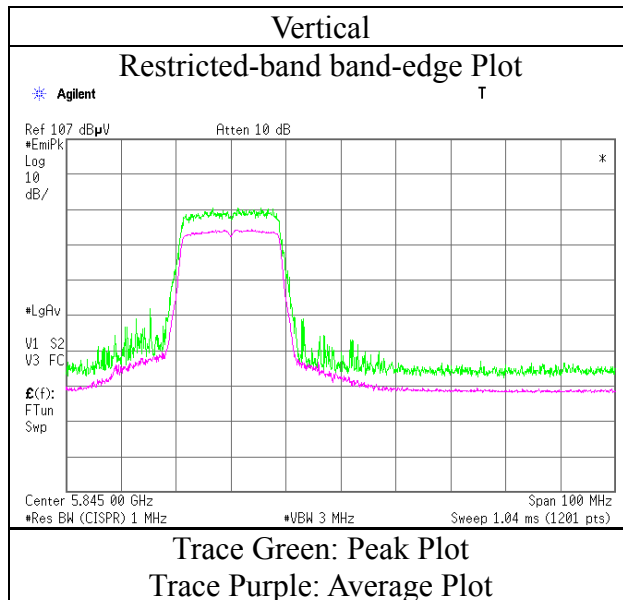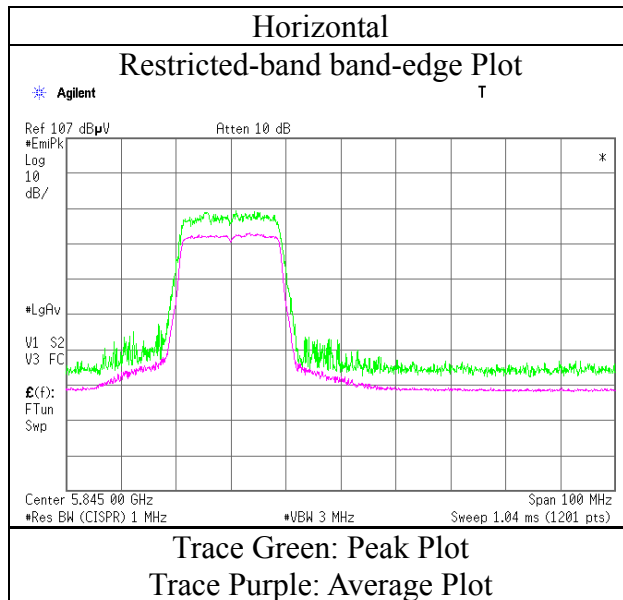

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
 Report No. : 11334871S-E-R1  
 Date : August 24, 2016      October 28, 2016      November 11, 2016  
 Temperature / Humidity : 23 deg. C / 53% RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
 Engineer : Hikaru Shirasawa      Shinichi Takano      Shinichi Takano  
             (1 GHz-13 GHz)      (13GHz-18 GHz)      (18GHz-40 GHz)  
 Mode : Tx 11n-40 , SISO,5190 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	52.47	32.29	15.67	41.02	2.28	61.69	73.90	12.2	146	175	
Hori.	15570.000	PK	47.04	39.13	10.65	40.21	-9.54	47.07	73.90	26.8	150	0	
Hori.	5150.000	AV	40.63	32.29	15.67	41.02	2.28	49.85	53.90	4.0	146	175	VBW:5.1kHz
Hori.	15570.000	AV	37.60	39.13	10.65	40.21	-9.54	37.63	53.90	16.2	150	0	VBW:5.1kHz
Vert.	5150.000	PK	54.96	32.29	15.67	41.02	2.28	64.18	73.90	9.7	103	130	
Vert.	15570.000	PK	46.39	39.13	10.65	40.21	-9.54	46.42	73.90	27.4	150	0	
Vert.	5150.000	AV	42.56	32.29	15.67	41.02	2.28	51.78	53.90	2.1	103	130	VBW:5.1kHz
Vert.	15570.000	AV	37.05	39.13	10.65	40.21	-9.54	37.08	53.90	16.8	150	0	VBW:5.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10380.000	PK	47.06	39.10	8.21	40.37	2.28	56.28	-38.92	-27.00	11.9	150	359	
Vert.	10380.000	PK	46.87	39.10	8.21	40.37	2.28	56.09	-39.11	-27.00	12.1	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( ( 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 ) / 30 ) \* 10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-40 , SISO,5190 MHz

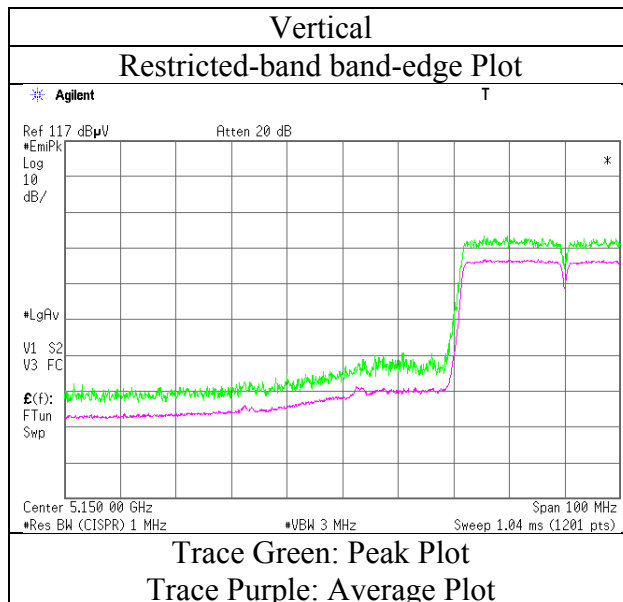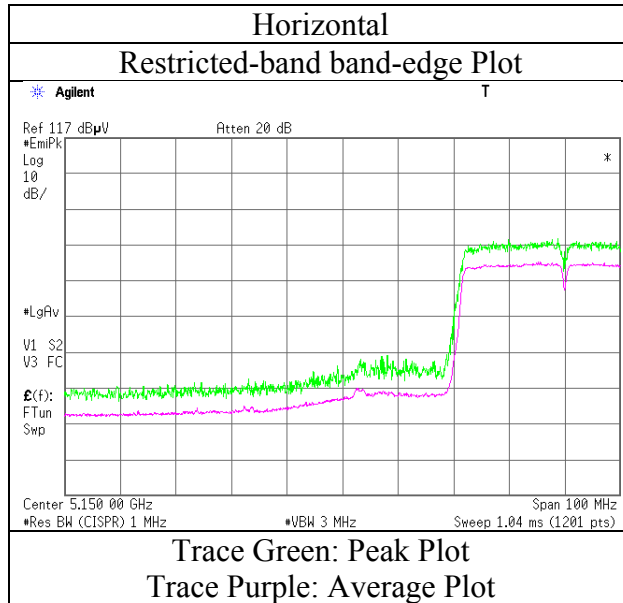

\* Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : October 28, 2016      November 11, 2016  
Temperature / Humidity : 26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Shinichi Takano      Shinichi Takano  
            ( 1 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11n-40 , SISO,5230 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	15690.000	PK	46.70	38.69	10.72	40.12	-9.54	46.45	73.90	27.4	150	0	
Hori.	15690.000	AV	37.23	38.69	10.72	40.12	-9.54	36.98	53.90	16.9	150	0	VBW:5.1kHz
Vert.	15690.000	PK	46.19	38.69	10.72	40.12	-9.54	45.94	73.90	27.9	150	0	
Vert.	15690.000	AV	37.35	38.69	10.72	40.12	-9.54	37.10	53.90	<b>16.8</b>	150	0	VBW:5.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10460.000	PK	45.38	39.80	8.20	40.39	2.28	55.27	-39.93	-27.00	12.9	150	0	
Vert.	10460.000	PK	45.82	39.80	8.20	40.39	2.28	55.71	-39.49	-27.00	<b>12.5</b>	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016      October 28, 2016      November 11, 2016  
Temperature / Humidity : 23 deg. C / 53% RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Hikaru Shirasawa      Shinichi Takano      Shinichi Takano  
            (1 GHz-13 GHz)      (13 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11n-40 , SISO,5310 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	58.53	32.25	15.89	40.84	2.28	68.11	73.90	5.7	110	163	
Hori.	10620.000	PK	46.57	39.60	8.32	40.48	2.28	56.29	73.90	17.6	150	359	
Hori.	15930.000	PK	46.74	37.82	10.85	39.93	-9.54	45.94	73.90	27.9	155	147	
Hori.	5350.000	AV	41.07	32.25	15.89	40.84	2.28	50.65	53.90	3.2	110	163	VBW:5.1kHz
Hori.	10620.000	AV	35.48	39.60	8.32	40.48	2.28	45.20	53.90	8.7	150	359	VBW:5.1kHz
Hori.	15930.000	AV	36.68	37.82	10.85	39.93	-9.54	35.88	53.90	18.0	155	147	VBW:5.1kHz
Vert.	5350.000	PK	60.32	32.25	15.89	40.84	2.28	69.90	73.90	4.0	152	123	
Vert.	10620.000	PK	47.01	39.60	8.32	40.48	2.28	56.73	73.90	17.1	150	0	
Vert.	15930.000	PK	46.60	37.82	10.85	39.93	-9.54	45.80	73.90	28.1	152	233	
Vert.	5350.000	AV	42.00	32.25	15.89	40.84	2.28	51.58	53.90	2.3	152	123	VBW:5.1kHz
Vert.	10620.000	AV	35.19	39.60	8.32	40.48	2.28	44.91	53.90	8.9	150	0	VBW:5.1kHz
Vert.	15930.000	AV	36.99	37.82	10.85	39.93	-9.54	36.19	53.90	17.7	152	233	VBW:5.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-40 , SISO,5310 MHz

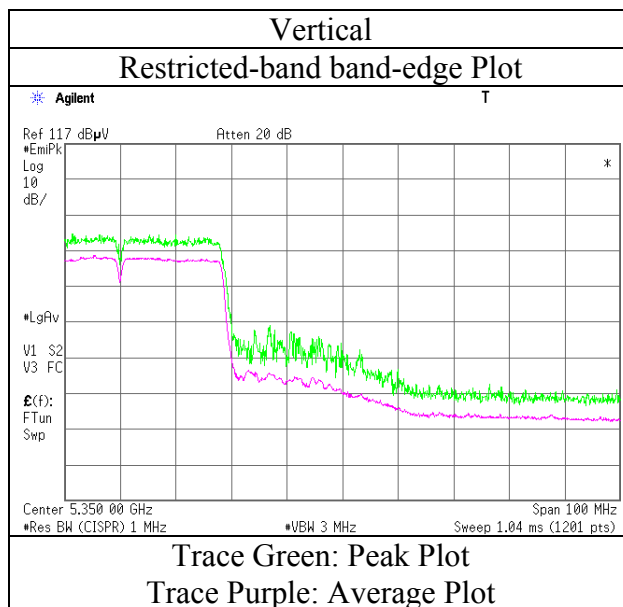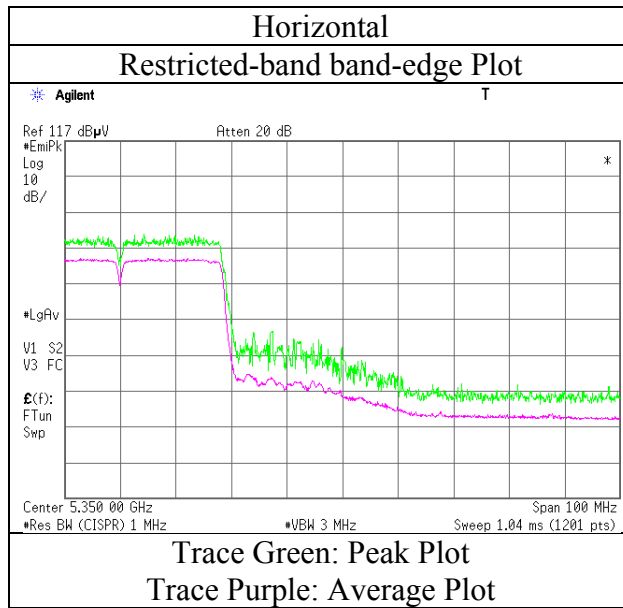

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016  
Temperature / Humidity : 23 deg. C / 53% RH  
Engineer : Hikaru Shirasawa  
(1 GHz-6.5 GHz.)  
Mode : Tx 11n-40, MIMO, 5190 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	51.06	32.29	15.67	41.02	2.28	60.28	73.90	13.6	166	172	
Hori.	5150.000	AV	38.93	32.29	15.67	41.02	2.28	48.15	53.90	5.7	166	172	VBW:8.1kHz
Vert.	5150.000	PK	49.62	32.29	15.67	41.02	2.28	58.84	73.90	15.0	125	148	
Vert.	5150.000	AV	37.33	32.29	15.67	41.02	2.28	46.55	53.90	7.3	125	148	VBW:8.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-40, MIMO, 5190 MHz

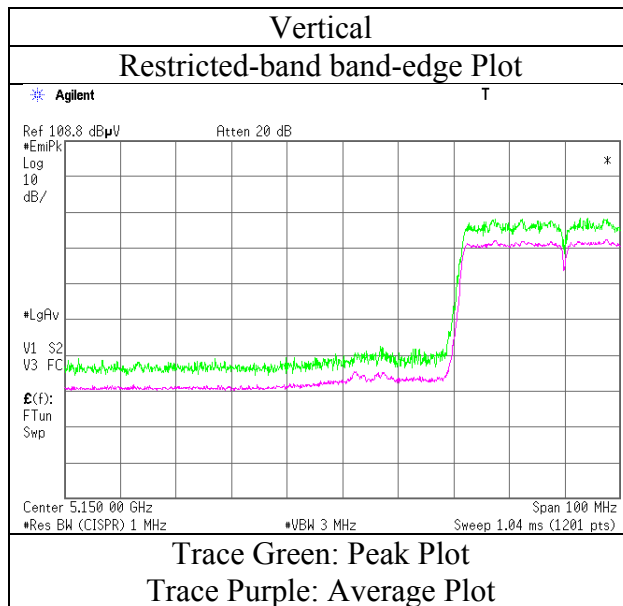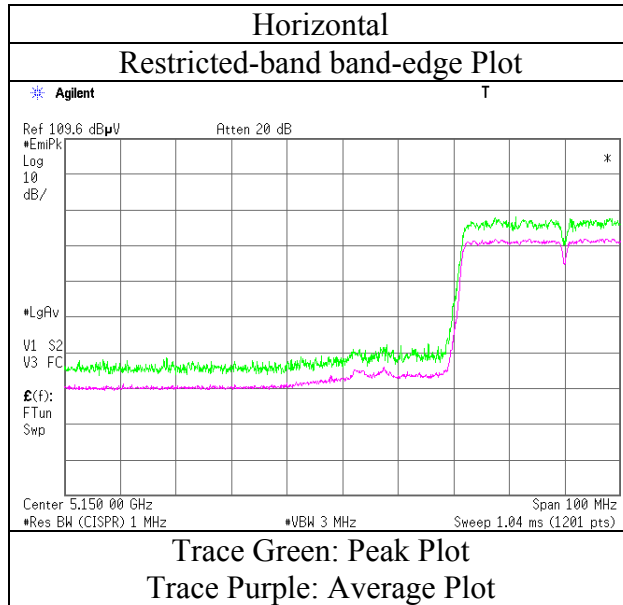

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016  
Temperature / Humidity : 23 deg. C / 53% RH  
Engineer : Hikaru Shirasawa  
(1 GHz-6.5 GHz)  
Mode : Tx 11n-40, MIMO, 5310 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	51.74	32.25	15.89	40.84	2.28	61.32	73.90	12.5	172	171	
Hori.	5350.000	AV	37.47	32.25	15.89	40.84	2.28	47.05	53.90	6.8	172	171	VBW:8.1kHz
Vert.	5350.000	PK	54.07	32.25	15.89	40.84	2.28	63.65	73.90	10.2	144	121	
Vert.	5350.000	AV	38.13	32.25	15.89	40.84	2.28	47.71	53.90	<b>6.1</b>	144	121	VBW:8.1kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11n-40, MIMO, 5310 MHz

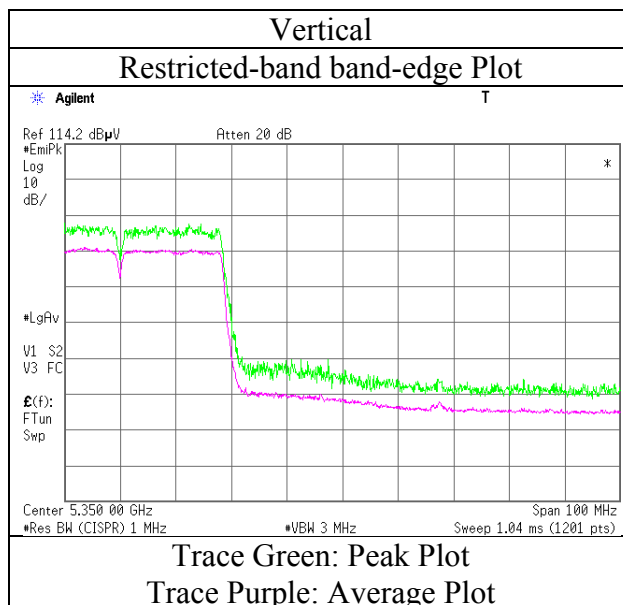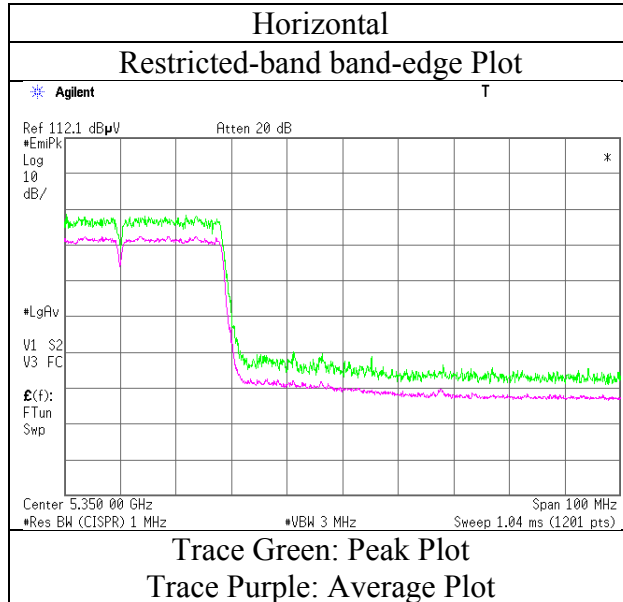

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016      October 28, 2016      November 11, 2016  
Temperature / Humidity : 23 deg. C / 53% RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Hikaru Shirasawa      Shinichi Takano      Shinichi Takano  
            (1 GHz-13GHz)      (13GHz-18GHz)      (18GHz-40GHz)  
Mode : Tx 11ac-80, SISO, 5210 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	53.28	32.29	15.67	41.02	2.28	62.50	73.90	11.4	156	172	
Hori.	15630.000	PK	47.17	38.91	10.69	40.16	-9.54	47.07	73.90	26.8	150	0	
Hori.	5150.000	AV	42.41	32.29	15.67	41.02	2.28	51.63	53.90	2.2	156	172	VBW:8.4kHz
Hori.	15630.000	AV	38.40	38.91	10.69	40.16	-9.54	38.30	53.90	15.6	150	0	VBW:8.4kHz
Vert.	5150.000	PK	52.08	32.29	15.67	41.02	2.28	61.30	73.90	12.6	102	129	
Vert.	15630.000	PK	46.52	38.91	10.69	40.16	-9.54	46.42	73.90	27.4	150	0	
Vert.	5150.000	AV	42.19	32.29	15.67	41.02	2.28	51.41	53.90	2.4	102	129	VBW:8.4kHz
Vert.	15630.000	AV	37.88	38.91	10.69	40.16	-9.54	37.78	53.90	16.1	150	0	VBW:8.4kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10420.000	PK	45.97	39.18	8.20	40.38	2.28	55.25	-39.95	-27.00	13.0	150	359	
Vert.	10420.000	PK	45.51	39.18	8.20	40.38	2.28	54.79	-40.41	-27.00	13.4	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.



Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB



## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-80, SISO, 5210 MHz

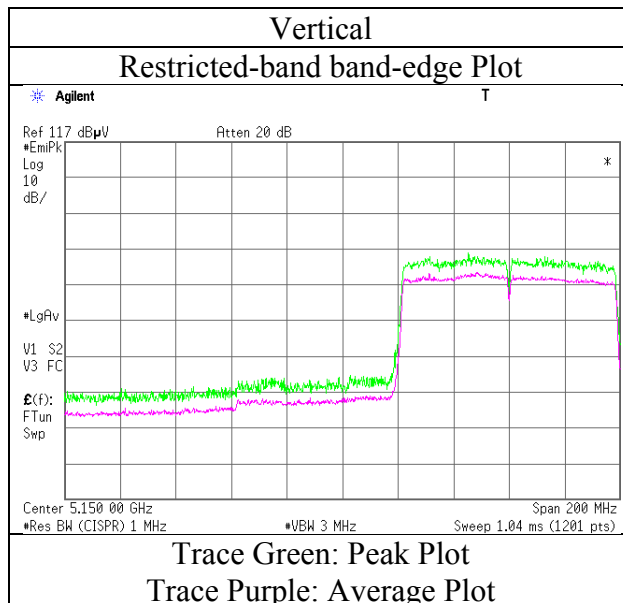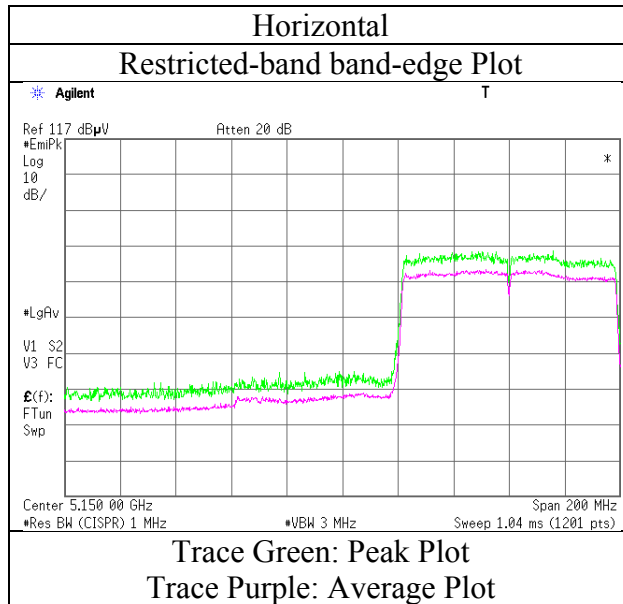

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016      October 28, 2016      November 11, 2016  
Temperature / Humidity : 23 deg. C / 53% RH      26deg. C / 32 % RH      23deg. C / 40 % RH  
Engineer : Hikaru Shirasawa      Shinichi Takano      Shinichi Takano  
              (1 GHz-13 GHz)      (13 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11ac-80, SISO, 5290 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.25	32.25	15.89	40.84	2.28	57.83	73.90	16.0	162	172	
Hori.	15870.000	PK	45.60	38.04	10.81	39.98	-9.54	44.93	73.90	28.9	150	150	0
Hori.	5350.000	AV	37.71	32.25	15.89	40.84	2.28	47.29	53.90	<b>6.6</b>	162	172	VBW:8.4kHz
Hori.	15870.000	AV	36.88	38.04	10.81	39.98	-9.54	36.21	53.90	17.6	150	150	0
Vert.	5350.000	PK	47.60	32.25	15.89	40.84	2.28	57.18	73.90	16.7	106	130	
Vert.	15870.000	PK	46.17	38.04	10.81	39.98	-9.54	45.50	73.90	28.4	150	150	0
Vert.	5350.000	AV	37.65	32.25	15.89	40.84	2.28	47.23	53.90	<b>6.6</b>	106	130	VBW:8.4kHz
Vert.	15870.000	AV	36.84	38.04	10.81	39.98	-9.54	36.17	53.90	17.7	150	150	0

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	10580.000	PK	47.32	39.51	8.27	40.45	2.28	56.93	-38.27	-27.00	<b>11.3</b>	150	359	
Vert.	10580.000	PK	46.54	39.51	8.27	40.45	2.28	56.15	-39.05	-27.00	12.1	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-80, SISO, 5290 MHz

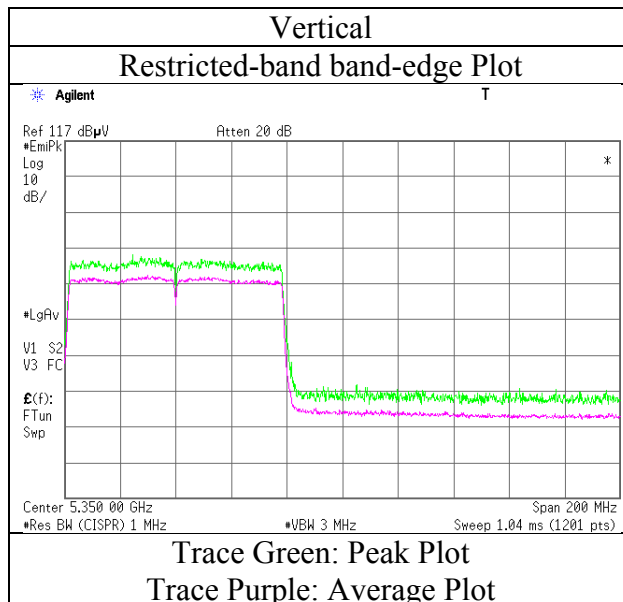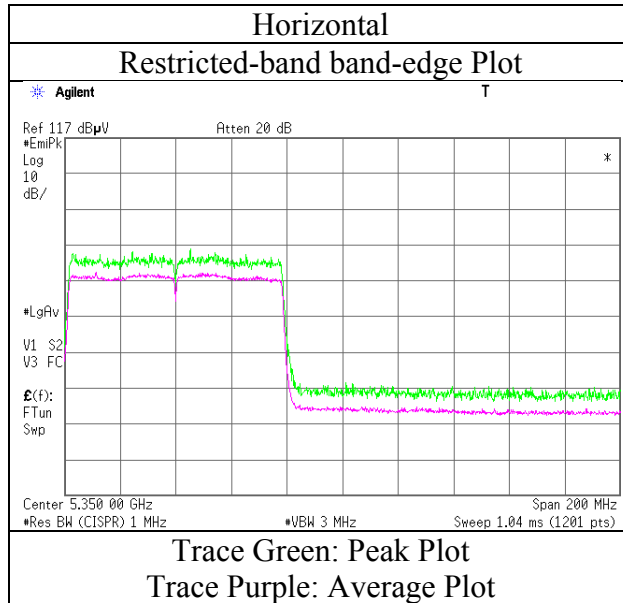

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 23, 2016      November 23, 2016      November 24, 2016      November 25, 2016  
Temperature / Humidity : 24 deg. C / 37 % RH      24 deg. C / 47 % RH      22 deg. C / 42 % RH      23deg. C / 28 % RH  
Engineer : Kenichi Adachi      Kazutaka Takeyama      Kazutaka Takeyama      Hikaru Shirasawa  
            (1 GHz-6.5 GHz)      (6.5 GHz-13 GHz)      (13 GHz-18 GHz)      (18 GHz-40 GHz)  
Mode : Tx 11ac-80 , SISO,5530 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	46.51	32.06	15.79	36.46	2.28	60.18	73.90	13.7	189	179	
Hori.	11060.000	PK	46.00	40.05	8.73	39.56	2.28	57.50	73.90	16.4	150	0	
Hori.	22120.000	PK	43.74	40.18	14.40	47.48	-9.54	41.30	73.90	32.6	150	0	
Hori.	5460.000	AV	39.68	32.06	15.79	36.46	2.28	53.35	53.90	0.5	189	179	VBW:8.4kHz
Hori.	11060.000	AV	35.80	40.05	8.73	39.56	2.28	47.30	53.90	6.6	150	0	VBW:8.4kHz
Hori.	22120.000	AV	34.18	40.18	14.40	47.48	-9.54	31.74	53.90	22.1	150	0	VBW:8.4kHz
Vert.	5460.000	PK	46.69	32.06	15.79	36.46	2.28	60.36	73.90	13.5	119	169	
Vert.	11060.000	PK	45.28	40.05	8.73	39.56	2.28	56.78	73.90	17.1	150	0	
Vert.	22120.000	PK	43.71	40.18	14.40	47.48	-9.54	41.27	73.90	32.6	150	0	
Vert.	5460.000	AV	39.76	32.06	15.79	36.46	2.28	53.43	53.90	<b>0.4</b>	119	169	VBW:8.4kHz
Vert.	11060.000	AV	35.35	40.05	8.73	39.56	2.28	46.85	53.90	7.0	150	0	VBW:8.4kHz
Vert.	22120.000	AV	35.03	40.18	14.40	47.48	-9.54	32.59	53.90	21.3	150	0	VBW:8.4kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	47.33	32.08	15.80	36.46	2.28	61.03	-34.17	-27.00	7.2	189	179	
Hori.	16590.000	PK	46.40	39.01	11.21	38.28	-9.54	48.80	-46.40	-27.00	19.4	150	0	
Vert.	5470.000	PK	47.48	32.08	15.80	36.46	2.28	61.18	-34.02	-27.00	<b>7.0</b>	119	169	
Vert.	16590.000	PK	45.62	39.01	11.21	38.28	-9.54	48.02	-47.18	-27.00	20.2	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 23, 2016
Temperature / Humidity	24 deg. C / 37 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-80 , SISO, 5530 MHz

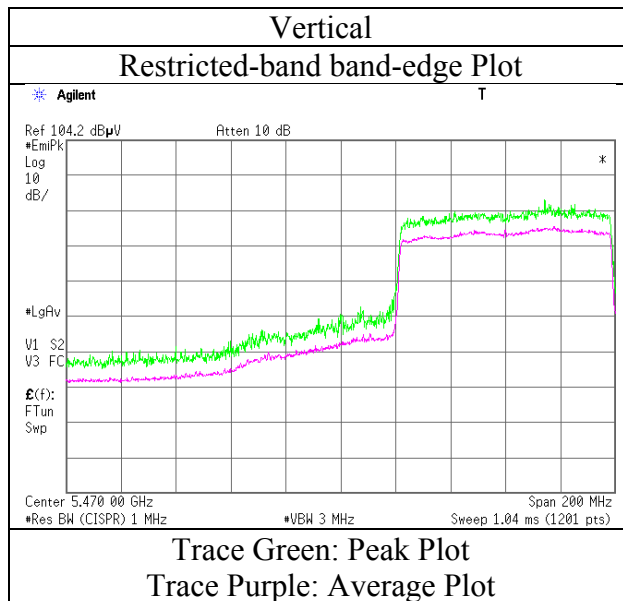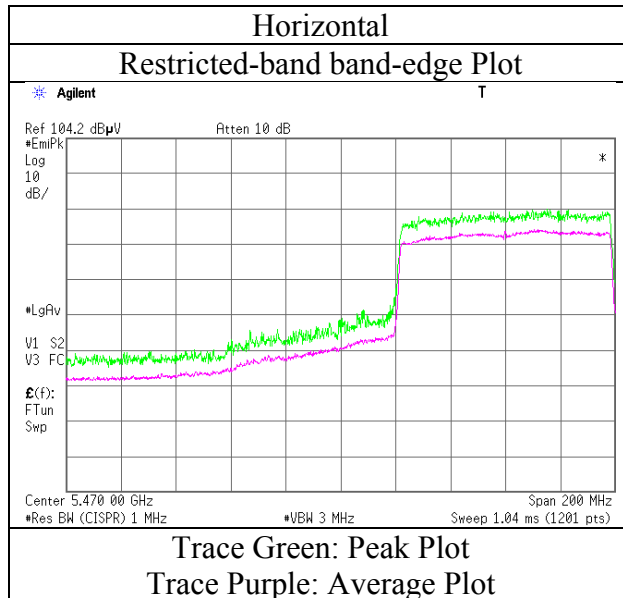

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place                   Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No.                   11334871S-E-R1  
Date                         November 21, 2016       November 23, 2016       November 24, 2016       November 25, 2016  
Temperature / Humidity    22 deg. C / 49 % RH    24 deg. C / 47 % RH    22 deg. C / 42 % RH    23deg. C / 28 % RH  
Engineer                  Hikaru Shirasawa       Kazutaka Takeyama     Kazutaka Takeyama     Hikaru Shirasawa  
                                (1 GHz-6.5 GHz)       (6.5 GHz-13 GHz)      (13 GHz-18 GHz)       (18 GHz-40 GHz)  
Mode                        Tx 11ac-80 , SISO,5610 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11220.000	PK	46.30	40.01	8.73	39.53	2.28	57.79	73.90	16.1	150	0	
Hori.	22440.000	PK	43.18	40.22	14.56	47.51	-9.54	40.91	73.90	32.9	150	0	
Hori.	11220.000	AV	36.00	40.01	8.73	39.53	2.28	47.49	53.90	6.4	150	0	VBW:8.4kHz
Hori.	22440.000	AV	33.27	40.22	14.56	47.51	-9.54	31.00	53.90	22.9	150	0	VBW:8.4kHz
Vert.	11220.000	PK	45.87	40.01	8.73	39.53	2.28	57.36	73.90	16.5	150	0	
Vert.	22440.000	PK	43.03	40.22	14.56	47.51	-9.54	40.76	73.90	33.1	150	0	
Vert.	11220.000	AV	36.10	40.01	8.73	39.53	2.28	47.59	53.90	<b>6.3</b>	150	0	VBW:8.4kHz
Vert.	22440.000	AV	33.35	40.22	14.56	47.51	-9.54	31.08	53.90	22.8	150	0	VBW:8.4kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	46.13	32.43	15.98	36.39	2.28	60.43	-34.77	-27.00	<b>7.8</b>	149	174	
Hori.	16830.000	PK	45.00	39.59	11.24	38.23	-9.54	48.06	-47.14	-27.00	20.1	150	0	
Vert.	5725.000	PK	45.98	32.43	15.98	36.39	2.28	60.28	-34.92	-27.00	7.9	143	127	
Vert.	16830.000	PK	44.49	39.59	11.24	38.23	-9.54	47.55	-47.65	-27.00	20.7	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \* 10 ^ 3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 21, 2016
Temperature / Humidity	22 deg. C / 49 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-80 , SISO,5610 MHz

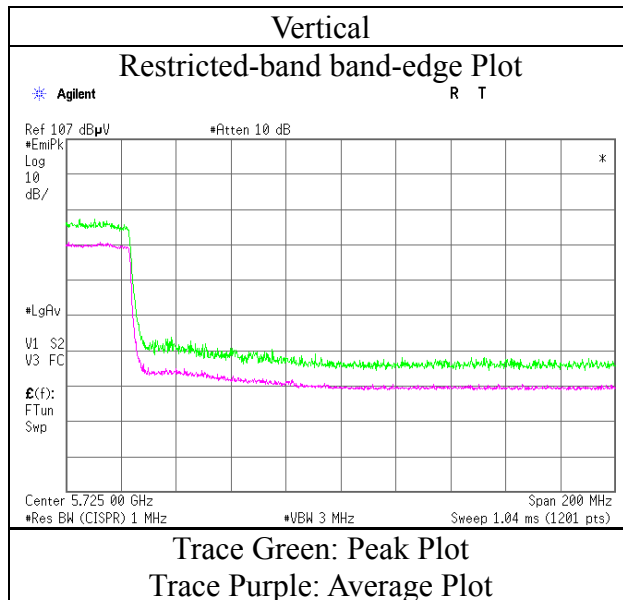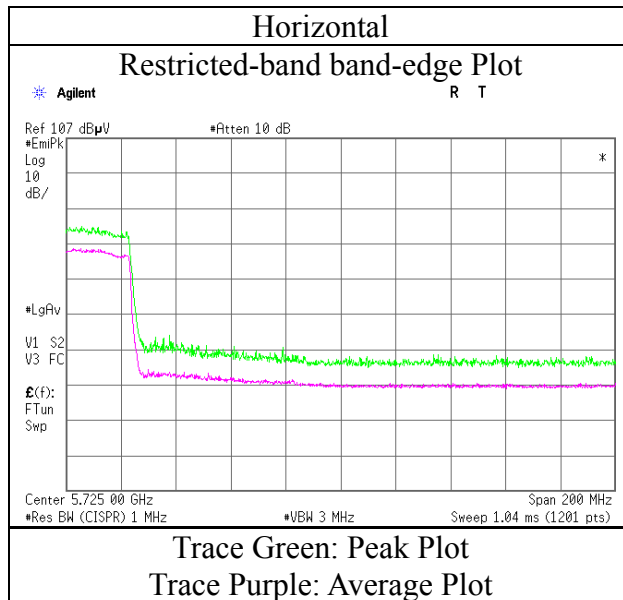

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No. 11334871S-E-R1  
Date November 22, 2016      November 23, 2016      November 25, 2016      November 25, 2016  
Temperature / Humidity 22 deg. C / 48 % RH      24 deg. C / 47 % RH      23 deg. C / 28 % RH      23deg. C / 28 % RH  
Engineer Kenichi Adachi      Kazutaka Takeyama      Kazutaka Takeyama      Hikaru Shirasawa  
(1 GHz-6.5 GHz)      (6.5 GHz-18 GHz)      (26.5 GHz-40 GHz)      (18 GHz-26.5 GHz)  
Mode Tx 11ac-80 , SISO,5775 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	11550.000	PK	46.00	39.87	8.77	39.47	2.28	57.45	73.90	16.4	150	0	
Hori.	23100.000	PK	43.31	40.26	14.63	46.77	-9.54	41.89	73.90	32.0	150	0	
Hori.	11550.000	AV	35.50	39.87	8.77	39.47	2.28	46.95	53.90	<b>6.9</b>	150	0	VBW:8.4Hz
Hori.	23100.000	AV	33.86	40.26	14.63	46.77	-9.54	32.44	53.90	21.4	150	0	VBW:8.4Hz
Vert.	11550.000	PK	45.90	39.87	8.77	39.47	2.28	57.35	73.90	16.5	150	357	
Vert.	23100.000	PK	43.25	40.26	14.63	46.77	-9.54	41.83	73.90	32.0	150	0	
Vert.	11550.000	AV	35.30	39.87	8.77	39.47	2.28	46.75	53.90	7.1	150	357	VBW:8.4Hz
Vert.	23100.000	AV	33.66	40.26	14.63	46.77	-9.54	32.24	53.90	21.6	150	0	VBW:8.4Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	45.76	32.32	15.94	36.41	2.28	59.89	-35.31	-27.00	8.3	184	179	
Hori.	5700.000	PK	53.01	32.39	15.97	36.40	2.28	67.25	-27.95	10.00	38.0	184	179	
Hori.	5720.000	PK	54.01	32.42	15.98	36.39	2.28	68.30	-26.90	15.60	42.5	184	179	
Hori.	5725.000	PK	54.31	32.43	15.98	36.39	2.28	68.61	-26.59	27.00	53.6	184	179	
Hori.	5850.000	PK	48.92	32.61	16.06	36.35	2.28	63.52	-31.68	27.00	58.7	184	179	
Hori.	5855.000	PK	48.86	32.61	16.06	36.35	2.28	63.46	-31.74	15.60	47.3	184	179	
Hori.	5860.000	PK	47.47	32.62	16.06	36.34	2.28	62.09	-33.11	-27.00	<b>6.1</b>	184	179	
Hori.	5875.000	PK	45.83	32.64	16.08	36.34	2.28	60.49	-34.71	10.00	44.7	184	179	
Hori.	5925.000	PK	44.86	32.71	16.12	36.32	2.28	59.65	-35.55	-27.00	8.6	184	179	
Hori.	17325.000	PK	45.00	42.84	11.36	38.10	-9.54	51.56	-43.64	-27.00	16.6	150	0	
Vert.	5650.000	PK	47.02	32.32	15.94	36.41	2.28	61.15	-34.05	-27.00	7.1	122	154	
Vert.	5700.000	PK	52.94	32.39	15.97	36.40	2.28	67.18	-28.02	10.00	38.0	122	154	
Vert.	5720.000	PK	54.01	32.42	15.98	36.39	2.28	68.30	-26.90	15.60	42.5	122	154	
Vert.	5725.000	PK	54.77	32.43	15.98	36.39	2.28	69.07	-26.13	27.00	53.1	122	154	
Vert.	5850.000	PK	48.38	32.61	16.06	36.35	2.28	62.98	-32.22	27.00	59.2	122	154	
Vert.	5855.000	PK	49.17	32.61	16.06	36.35	2.28	63.77	-31.43	15.60	47.0	122	154	
Vert.	5875.000	PK	46.33	32.64	16.08	36.34	2.28	60.99	-34.21	10.00	44.2	122	154	
Vert.	5925.000	PK	44.43	32.71	16.12	36.32	2.28	59.22	-35.98	-27.00	9.0	122	154	
Vert.	17325.000	PK	42.85	42.84	11.36	38.10	-9.54	49.41	-45.79	-27.00	18.8	150	0	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] } ^ 2 ) / 30 ) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Radiated Spurious Emission



Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 23, 2016
Temperature / Humidity	24 deg. C / 37 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-80 , SISO, 5775 MHz

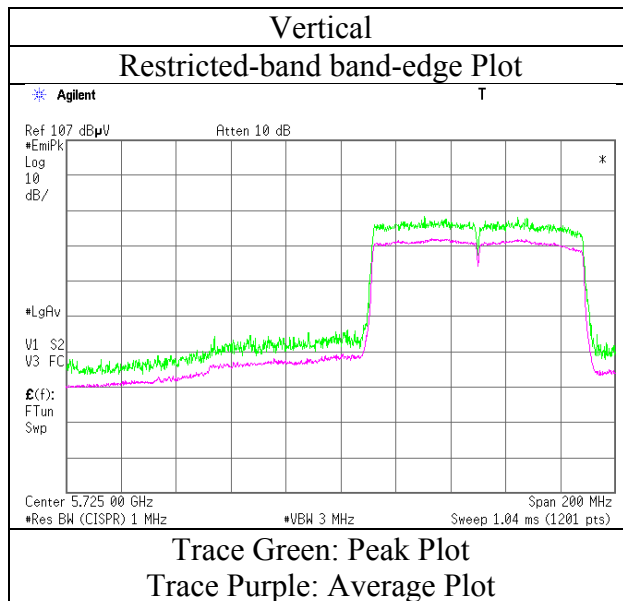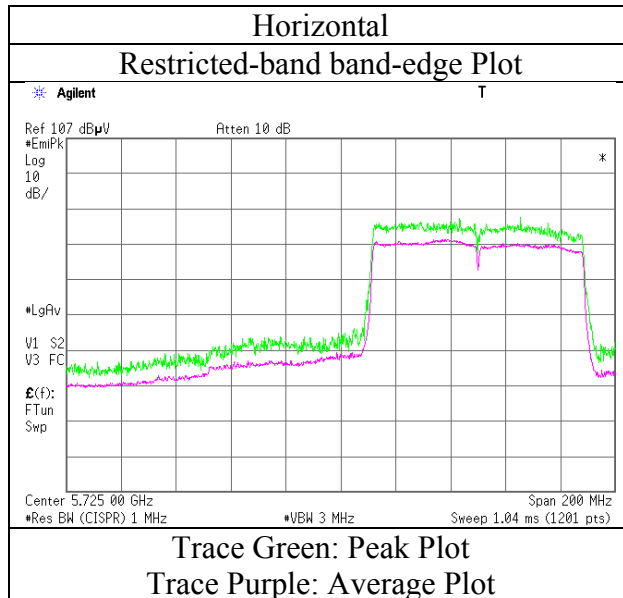

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 23, 2016
Temperature / Humidity	24 deg. C / 37 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-80 , SISO,5775 MHz

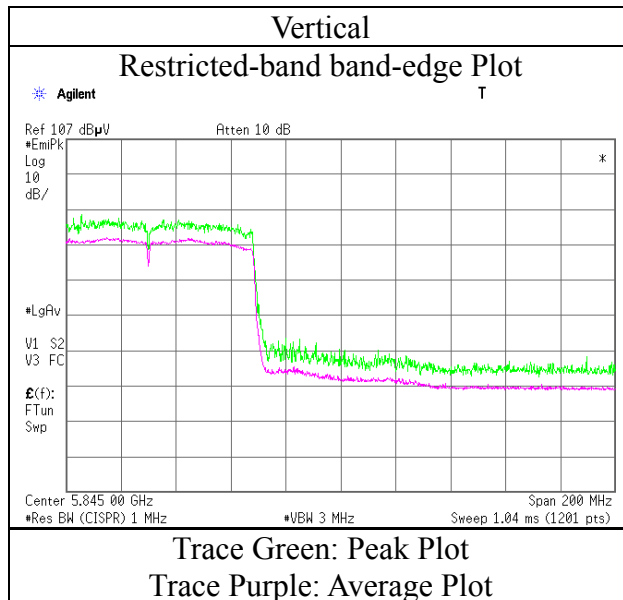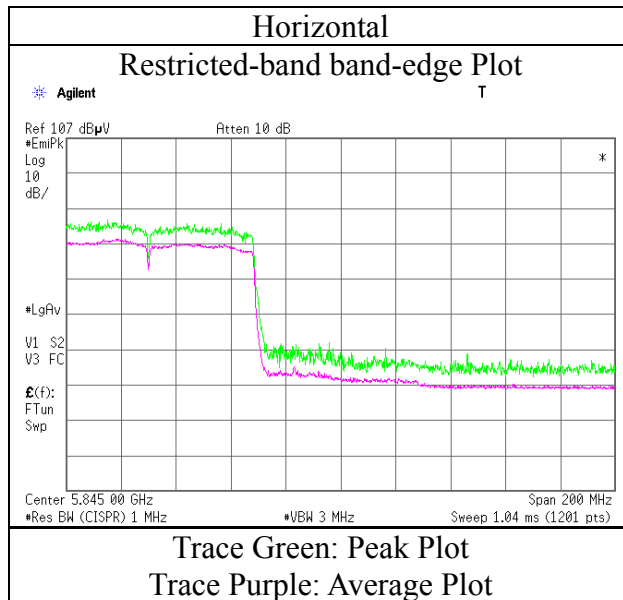

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016  
Temperature / Humidity : 23 deg. C / 53% RH  
Engineer : Hikaru Shirasawa  
(1 GHz-6.5 GHz)  
Mode : Tx 11ac-80, MIMO, 5210 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	49.73	32.29	15.67	41.02	2.28	58.95	73.90	14.9	169	172	
Hori.	5150.000	AV	39.37	32.29	15.67	41.02	2.28	48.59	53.90	5.3	169	172	VBW:12kHz
Vert.	5150.000	PK	49.58	32.29	15.67	41.02	2.28	58.80	73.90	15.1	106	131	
Vert.	5150.000	AV	39.25	32.29	15.67	41.02	2.28	48.47	53.90	5.4	106	131	VBW:12kHz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-80, MIMO, 5210 MHz

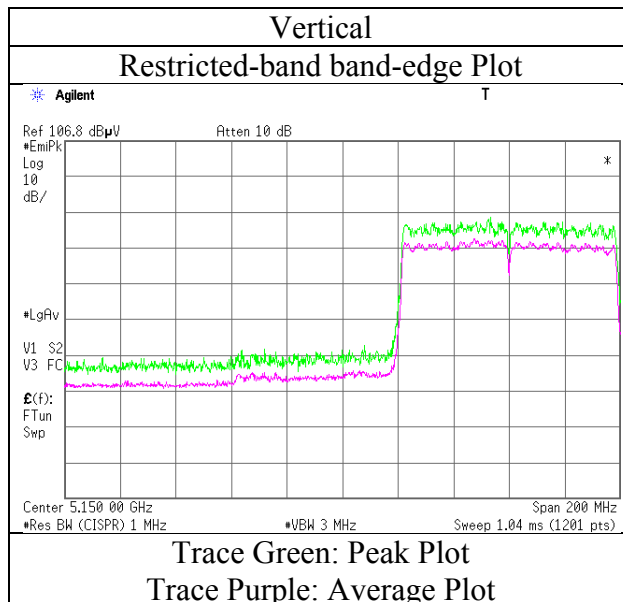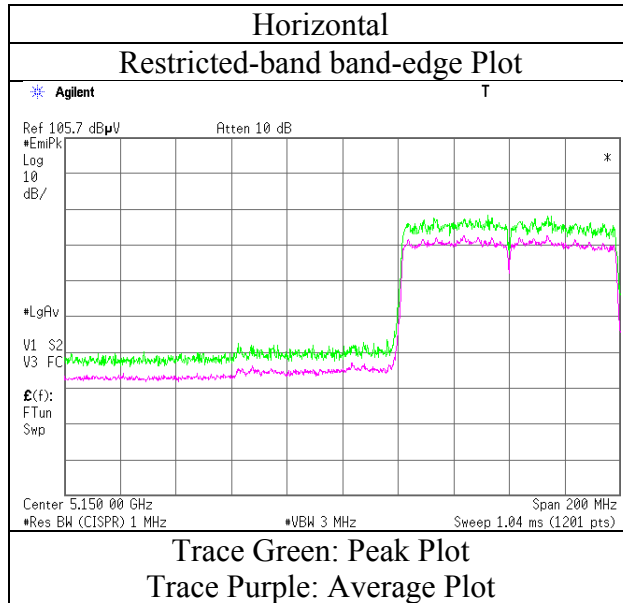

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : August 24, 2016  
Temperature / Humidity : 23 deg. C / 53% RH  
Engineer : Hikaru Shirasawa  
(1 GHz-6.5 GHz)  
Mode : Tx 11ac-80, MIMO, 5290 MHz

**(above 1GHz Inside of the restricted band)**

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	47.70	32.25	15.89	40.84	2.28	57.28	73.90	16.6	162	172	VBW:12kHz
Hori.	5350.000	AV	36.68	32.25	15.89	40.84	2.28	46.26	53.90	7.6	162	172	
Vert.	5350.000	PK	46.79	32.25	15.89	40.84	2.28	56.37	73.90	17.5	104	131	VBW:12kHz
Vert.	5350.000	AV	36.75	32.25	15.89	40.84	2.28	46.33	53.90	7.5	104	131	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	August 24, 2016
Temperature / Humidity	23 deg. C / 53% RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-80, MIMO, 5290 MHz

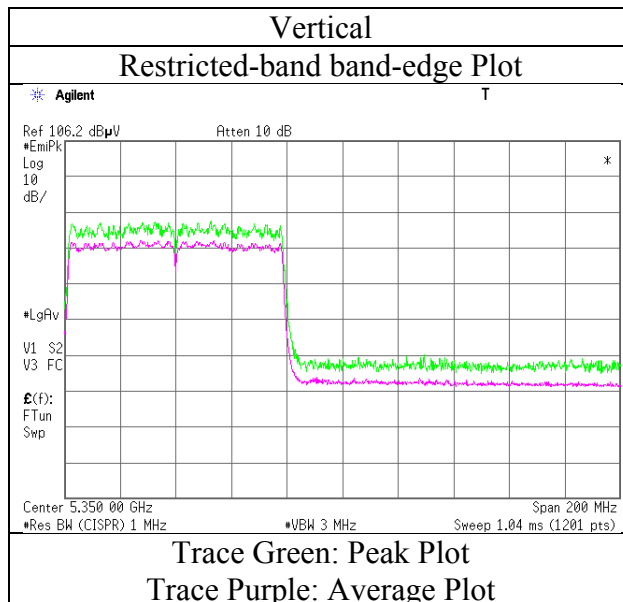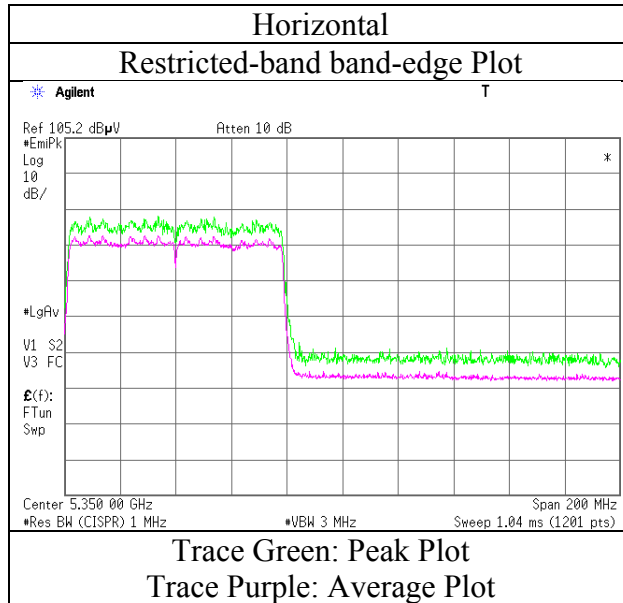

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 23, 2016  
Temperature / Humidity : 24 deg. C / 37 % RH  
Engineer : Kenichi Adachi  
(1 GHz-6.5 GHz)  
Mode : Tx 11ac-80 , MIMO,5530 MHz

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	47.58	32.06	15.79	36.46	2.28	61.25	73.90	12.6	180	175	VBW:12kHz
Hori.	5460.000	AV	39.88	32.06	15.79	36.46	2.28	53.55	53.90	0.3	180	175	
Vert.	5460.000	PK	47.65	32.06	15.79	36.46	2.28	61.32	73.90	12.5	131	170	
Vert.	5460.000	AV	39.96	32.06	15.79	36.46	2.28	53.63	53.90	<b>0.2</b>	131	170	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	48.17	32.08	15.80	36.46	2.28	61.87	-33.33	-27.00	6.3	180	175	
Vert.	5470.000	PK	48.38	32.08	15.80	36.46	2.28	62.08	-33.12	-27.00	<b>6.1</b>	131	170	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG}(\{10^{\wedge}(\text{Electric Field Strength [dBuV/m] / 20) * 10^{\wedge}(-6) * \text{Distance:3[m]}^{\wedge}2\} / 30) * 10^{\wedge}3)$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 23, 2016
Temperature / Humidity	24 deg. C / 37 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-80 , MIMO, 5530 MHz

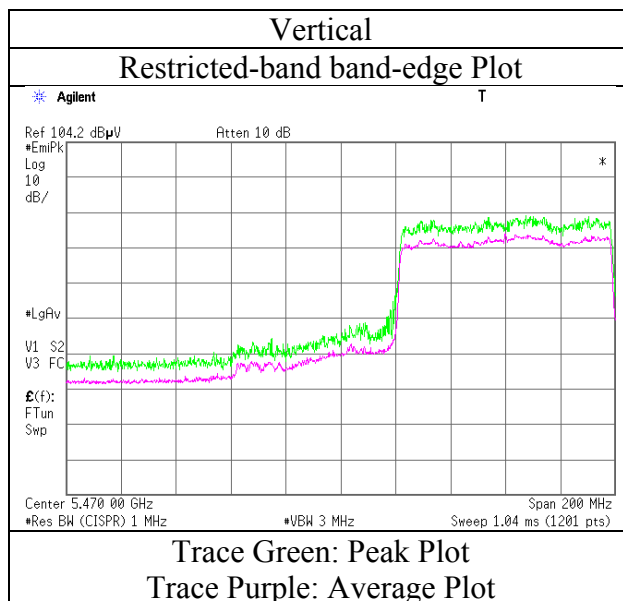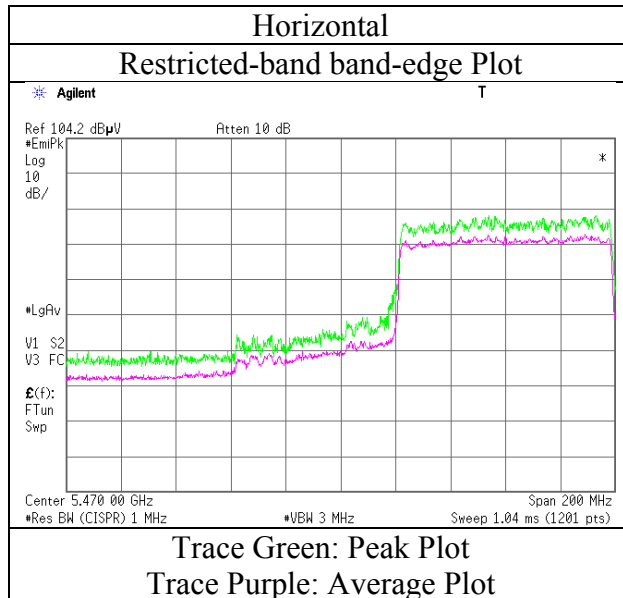

\* Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Test place : Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 21, 2016  
Temperature / Humidity : 22 deg. C / 49 % RH  
Engineer : Hikaru SHirasawa  
(1 GHz-6.5 GHz)  
Mode : Tx 11ac-80 , MIMO,5610 MHz

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	44.81	32.43	15.98	36.39	2.28	59.11	-36.09	-27.00	9.1	138	177	
Vert.	5725.000	PK	44.73	32.43	15.98	36.39	2.28	59.03	-36.17	-27.00	9.2	143	130	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30 ) \* 10 ^ 3 )

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 21, 2016
Temperature / Humidity	22 deg. C / 49 % RH
Engineer	Hikaru Shirasawa
Mode	Tx 11ac-80 , MIMO,5610 MHz

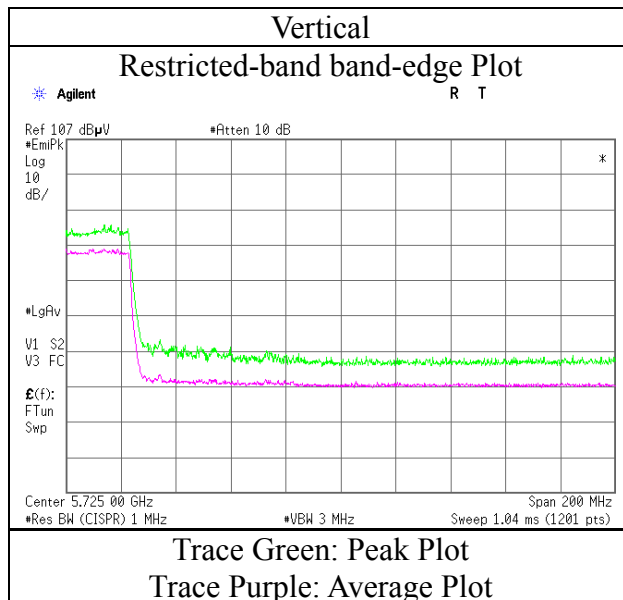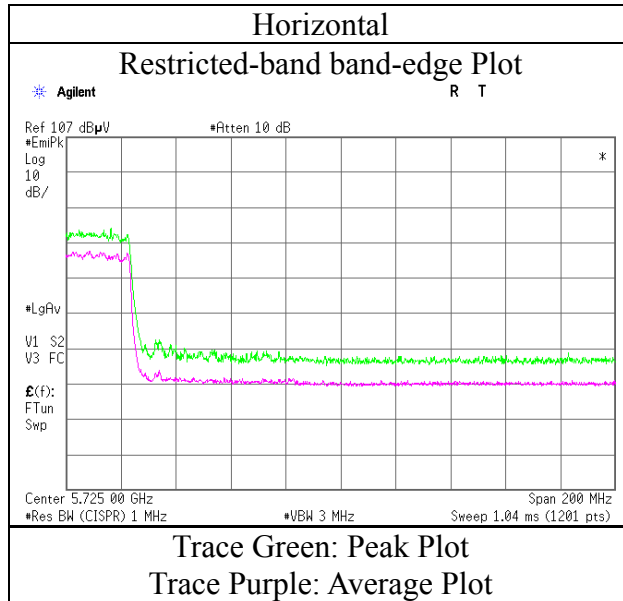

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Shonan EMC Lab. No. 3 Semi Anechoic Chamber  
Report No. : 11334871S-E-R1  
Date : November 22, 2016  
Temperature / Humidity : 22 deg. C / 48 % RH  
Engineer : Shinichi Takano  
(1 GHz-6.5 GHz)  
Mode : Tx 11ac-80 , MIMO,5775 MHz

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	44.41	32.32	15.94	36.41	2.28	58.54	-36.66	-27.00	9.7	177	176	
Hori.	5700.000	PK	48.30	32.39	15.97	36.40	2.28	62.54	-32.66	10.00	42.7	177	176	
Hori.	5720.000	PK	49.55	32.42	15.98	36.39	2.28	63.84	-31.36	15.60	47.0	177	176	
Hori.	5725.000	PK	50.39	32.43	15.98	36.39	2.28	64.69	-30.51	27.00	57.5	177	176	
Hori.	5850.000	PK	46.59	32.61	16.06	36.35	2.28	61.19	-34.01	27.00	61.0	177	176	
Hori.	5855.000	PK	46.07	32.61	16.06	36.35	2.28	60.67	-34.53	15.60	50.1	177	176	
Hori.	5875.000	PK	44.65	32.64	16.08	36.34	2.28	59.31	-35.89	10.00	45.9	177	176	
Hori.	5925.000	PK	44.53	32.71	16.12	36.32	2.28	59.32	-35.88	-27.00	8.9	177	176	
Vert.	5650.000	PK	46.42	32.32	15.94	36.41	2.28	60.55	-34.65	-27.00	7.7	121	153	
Vert.	5700.000	PK	49.53	32.39	15.97	36.40	2.28	63.77	-31.43	10.00	41.4	121	153	
Vert.	5709.920	PK	51.05	32.41	15.97	36.39	2.28	65.32	-29.88	12.78	42.7	121	153	
Vert.	5720.000	PK	50.28	32.42	15.98	36.39	2.28	64.57	-30.63	15.60	46.2	121	153	
Vert.	5725.000	PK	50.45	32.43	15.98	36.39	2.28	64.75	-30.45	27.00	57.5	121	153	
Vert.	5850.000	PK	46.30	32.61	16.06	36.35	2.28	60.90	-34.30	27.00	61.3	121	153	
Vert.	5855.000	PK	46.14	32.61	16.06	36.35	2.28	60.74	-34.46	15.60	50.1	121	153	
Vert.	5875.000	PK	45.29	32.64	16.08	36.34	2.28	59.95	-35.25	10.00	45.3	121	153	
Vert.	5925.000	PK	45.10	32.71	16.12	36.32	2.28	59.89	-35.31	-27.00	8.3	121	153	

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG ( ( { 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ^ 2 } / 30 ) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.90 m/ 3.0 m) = 2.28 dB

13 GHz - 40 GHz : 20log (1.0 m/ 3.0 m) = -9.54 dB

## Radiated Spurious Emission



Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-80 , MIMO,5775 MHz

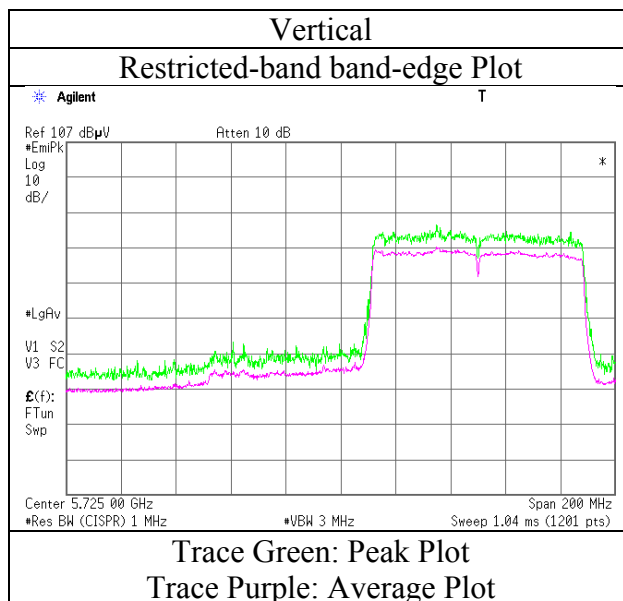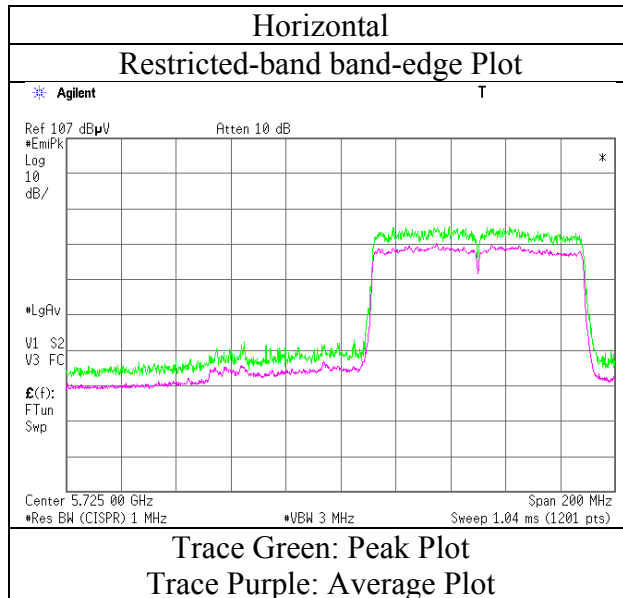

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission


Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11334871S-E-R1
Date	November 22, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Shinichi Takano
Mode	Tx 11ac-80 , MIMO,5775 MHz

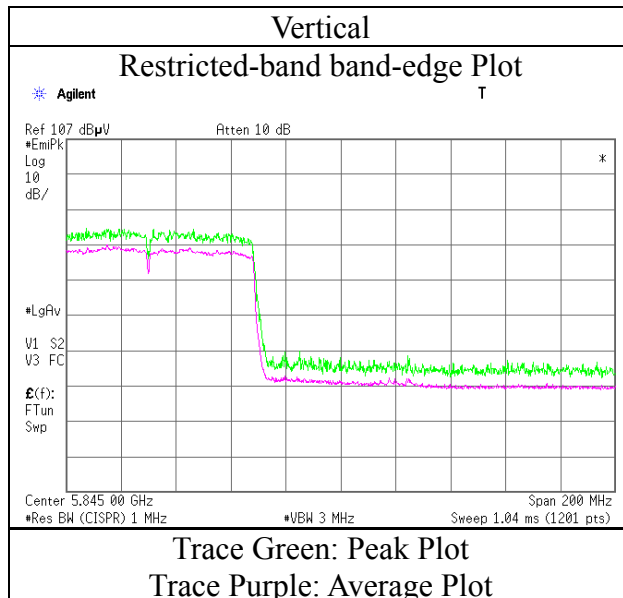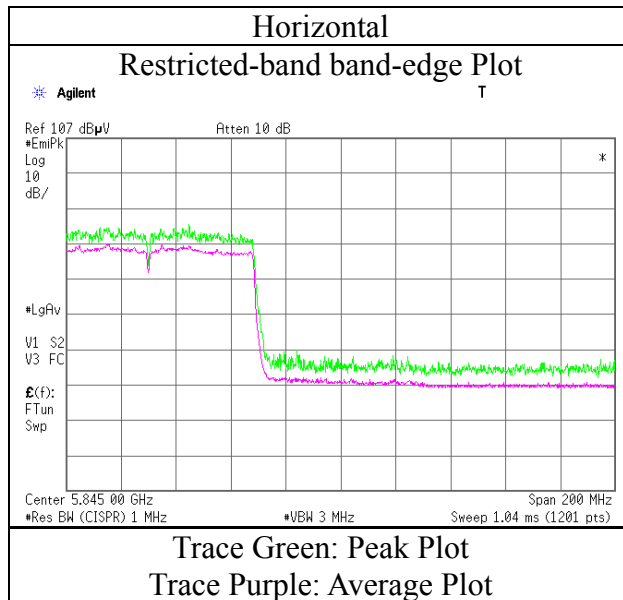

\* Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case)**


Test place	Shonan EMC Lab. No.3 Semi Anechoic Chamber			
Report No.	11334871S-E-R1			
Date	August 30, 2016	October 28, 2016	November 11, 2016	November 10, 2016
Temperature / Humidity	22 deg. C / 70 % RH	26deg. C / 32 % RH	23deg. C / 40 % RH	23deg. C / 35 % RH
Engineer	Makoto Hosaka	Shinichi Takano	Shinichi Takano	Shinichi Takano
	(1 GHz-6.5 GHz)	(6.5 GHz-18 GHz)	(18 GHz-40 GHz)	(30 MHz-1 GHz)
Mode	Tx 11ac-20 , SISO,5260 MHz			

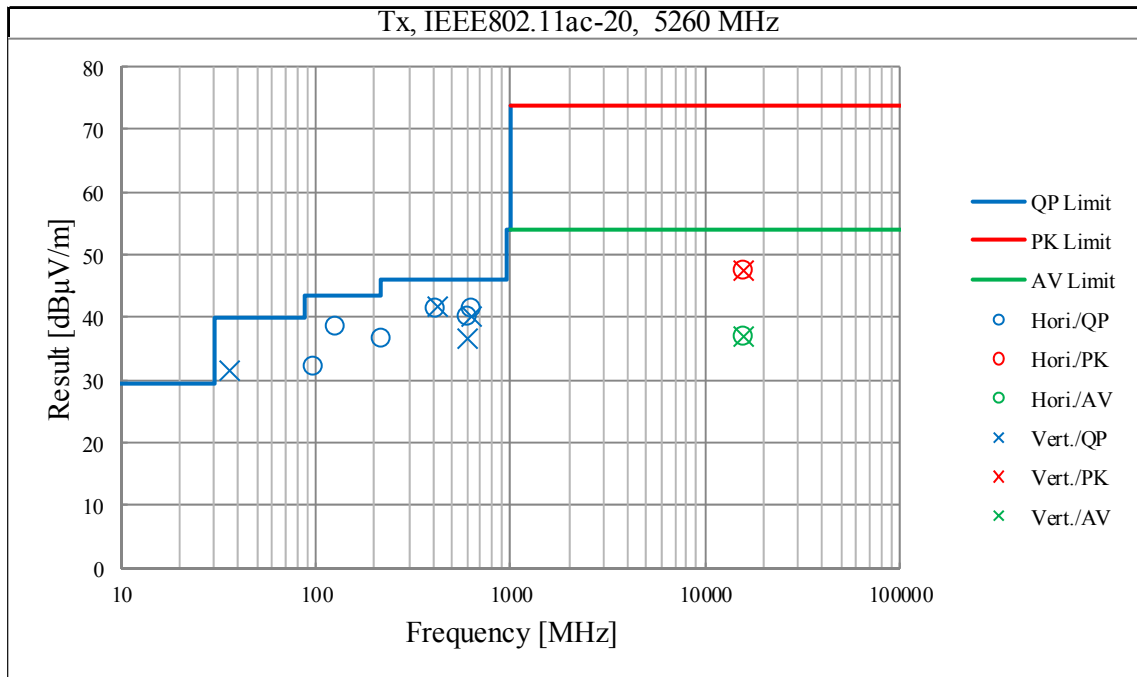

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Conducted Spurious Emission

Test place	Shonan EMC Lab. No.1 Measurement Room
Report No.	11334871S-E-R1
Date	November 21, 2016
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Kenichi Adachi
Mode	Tx 11ac-20, SISO, 5260 MHz

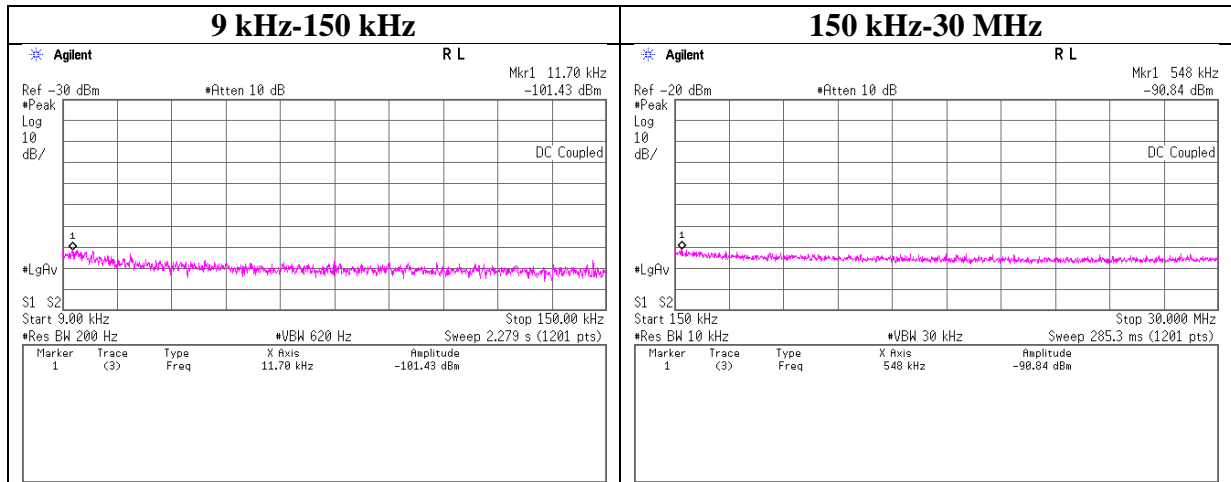

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.700	-101.4	2.01	20.04	3.31	2	-73.06	300	6.00	-11.80	46.20	58.00	
548.000	-90.8	2.01	20.04	3.31	2	-62.47	30	6.00	18.79	32.80	14.01	

$E = \text{EIRP} - 20 \cdot \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator} + \text{Antenna Gain} + 10 \cdot \log(N)$

\* No detect noise signal was in frequency range from 9 kHz to 30 MHz.

## **APPENDIX 2: Test instruments**

### **Test equipment (1/2)**

<b>Control No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Serial No</b>	<b>Test Item</b>	<b>Calibration Date * Interval(month)</b>
SOS-05	Humidity Indicator	A&D	AD-5681	4062518	RE	2016/10/12 * 12
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE, RFL,MF)	-	RE,CE	-
STS-03	Digital Hitester	Hioki	3805-50	080997823	RE	2016/10/17 * 12
SJM-02	Measure	KOMELON	KMC-36	-	RE	-
SAEC-03(NSA)	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	RE	2016/07/15 * 12
SRENT-08	Spectrum Analyzer	Agilent	E4448A	MY50180019	RE	2016/10/24 * 12
SHA-04	Horn Antenna	ETS LINDGREN	3160-09	LM3640	RE	2016/03/15 * 12
SAF-08	Pre Amplifier	TOYO Corporation	HAP18-26W	00000019	RE	2016/03/23 * 12
SCC-G15	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	RE	2016/03/08 * 12
SHA-06	Horn Antenna	ETS LINDGREN	3160-10	LM3459	RE	2016/03/24 * 12
SAF-10	Pre Amplifier	TOYO Corporation	HAP26-40W	00000010	RE	2016/03/23 * 12
SCC-G19	Coaxial Cable	Suhner	SUCOFLEX 102A	1188/2A	RE	2016/03/08 * 12
SCC-G33	Coaxial Cable	Junkosha	MWX241-01000KM SKMS	-	RE	2016/04/18 * 12
SCC-C9/C10/SRS E-03	Coaxial Cable&RF Selector	Suhner/Suhner/TOYO	RG223U/141PE/NS4 906	/-0901-271(RF Selector)	CE	2016/04/22 * 12
SLS-05	LISN	Rohde & Schwarz	ENV216	100516	CE	2016/02/09 * 12
SAT3-07	Attenuator	JFW	50HF-003N	-	CE	2016/09/23 * 12
SOS-06	Humidity Indicator	A&D	AD-5681	4062118	CE	2015/12/07 * 12
STM-05	Terminator	TME	CT-01 BP	-	CE	2015/12/18 * 12
STR-06	Test Receiver	Rohde & Schwarz	ESCI	101259	CE	2016/03/28 * 12
SFL-03	Highpass Filter	MICRO-TRONICS	HPM50112	028	RE	2016/11/29 * 12
SCC-G04	Coaxial Cable	Junkosha	J12J102207-00	JUN-12-14-018	RE	2016/06/23 * 12
SCC-G23	Coaxial Cable	Suhner	SUCOFLEX 104	297342/4	RE	2016/05/11 * 12
SHA-03	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-739	RE	2016/08/22 * 12
SOS-05	Humidity Indicator	A&D	AD-5681	4062518	RE	2016/10/12 * 12
SRENT-09	Spectrum Analyzer	Agilent	E4440A	MY46186392	RE	2016/11/01 * 12
SJM-02	Measure	KOMELON	KMC-36	-	RE,CE	-
SAEC-03(SVSWR)	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	RE	2016/07/25 * 12
STS-03	Digital Hitester	Hioki	3805-50	080997823	RE	2016/10/17 * 12
KAT10-S2	Attenuator	Agilent	8490D 010	06036	RE	2016/11/07 * 12
SAF-05	Pre Amplifier	TOYO Corporation	TPA0118-36	1440490	RE	2016/02/10 * 12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item:** CE: Conducted Emission  
RE: Radiated Emission  
AT: Antenna Terminal Conducted test

**Tested date:**  
- Conducted emission test : November 14, 2016  
- Radiated emissions test : August 24 to December 2, 2016  
- Antenna Terminal Conducted test : August 24 to November 25, 2016

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401



**Test equipment (2/2)**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SRENT-05	Spectrum Analyzer	KEYSIGHT	E4440A	MY46187752	AT	2016/11/04 * 12
SCC-G32	Coaxial Cable	Junkosha	MWX241-02000KM SKMS	OCT-09-13-005	AT	2016/11/07 * 12
SAT20-07	Attenuator	Weinschel Corp.	54A-20	31484	AT	2016/04/18 * 12
SOS-13	Humidity Indicator	Custom	CTH-202	Q.C.17	AT	2015/12/07 * 12
KTS-08	Digital Tester	SANWA	PC500	7019224	AT	2016/03/15 * 12
SPM-07	Power Meter	Agilent	8990B	MY5100272	AT	2016/04/04 * 12
SPSS-04	Power sensor	Agilent	N1923A	MY5326009	AT	2016/04/04 * 12
STM-G5	Terminator	Weinschel	M1459A	U6594	AT	2016/07/27 * 12
SCC-G31	Coaxial Cable	Junkosha	MWX241-01000KM SKMS	OCT-08-13-046	AT	2016/04/18 * 12
SAF-04	Pre Amplifier	TOYO Corporation	TPA0118-36	1440489	RE	2016/03/22 * 12
SCC-G06	Coaxial Cable	Junkosha	J12J102207-00	MAY-23-16-091	RE	2016/06/14 * 12
SCC-G21	Coaxial Cable	Suhner	SUCOFLEX 104	296169/4	RE	2016/05/11 * 12
SHA-01	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-725	RE	2016/08/09 * 12
SOS-01	Humidity Indicator	A&D	AD-5681	4062555	RE	2016/10/12 * 12
SSA-02	Spectrum Analyzer	Agilent	E4448A	MY48250106	RE	2016/03/23 * 12
KJM-09	Measure	KOMELON	KMC-36	-	RE	-
SAEC-01(SVS WR)	Semi-Anechoic Chamber	TDK	SAEC-01(SVSWR)	1	RE	2016/07/24 * 12
STS-01	Digital Hitester	Hioki	3805-50	080997812	RE	2016/10/17 * 12
SAT10-06	Attenuator	Agilent	8493C-010	74865	RE	2016/11/07 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	3008A01268	RE	2016/04/22 * 12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item:** CE: Conducted Emission  
RE: Radiated Emission  
AT: Antenna Terminal Conducted test

**Tested date:**  
- Conducted emission test : November 14, 2016  
- Radiated emissions test : August 24 to December 2, 2016  
- Antenna Terminal Conducted test : August 24 to November 25, 2016

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401