

## Maximum Conducted Output Power

|                        |  |                     |                     |
|------------------------|--|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room      |                     |                     |
| Date                   | January 8, 2019                            | January 8, 2019     | February 16, 2019   |
| Temperature / Humidity | 24 deg. C / 54 % RH                        | 22 deg. C / 50 % RH | 23 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa                            | Kazutaka Takeyama   | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11a, PN9, worst antenna port 0 |                     |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted Power |       |                |                | e.i.r.p. |       |                |                |
|---------------------------|------------------------------|--------------------|---------------------|---------------------|-----------------------|-----------------------------------|---------------------------------|-----------------|-------|----------------|----------------|----------|-------|----------------|----------------|
|                           |                              |                    |                     |                     |                       |                                   |                                 | Result          |       | Limit<br>[dBm] | Margin<br>[dB] | Result   |       | Limit<br>[dBm] | Margin<br>[dB] |
|                           |                              |                    |                     |                     |                       |                                   |                                 | [dBm]           | [mW]  |                |                | [dBm]    | [mW]  |                |                |
| 5180                      | -2.25                        | 3.89               | 10.21               | 1.72                | 2.95                  | -                                 | 17.350                          | 13.57           | 22.75 | 23.97          | 10.40          | 16.52    | 44.87 | 29.97          | 13.45          |
| 5220                      | -2.20                        | 3.90               | 10.21               | 1.72                | 2.95                  | -                                 | 17.347                          | 13.63           | 23.07 | 23.97          | 10.34          | 16.58    | 45.50 | 29.97          | 13.39          |
| 5240                      | -2.09                        | 3.90               | 10.21               | 1.72                | 2.95                  | -                                 | 17.347                          | 13.74           | 23.66 | 23.97          | 10.23          | 16.69    | 46.67 | 29.97          | 13.28          |
| 5260                      | -2.14                        | 3.91               | 10.21               | 1.72                | 2.95                  | 20.945                            | 17.366                          | 13.70           | 23.44 | 23.97          | 10.27          | 16.65    | 46.24 | 29.97          | 13.32          |
| 5300                      | -2.09                        | 3.92               | 10.21               | 1.72                | 2.95                  | 20.907                            | 17.360                          | 13.76           | 23.77 | 23.97          | 10.21          | 16.71    | 46.88 | 29.97          | 13.26          |
| 5320                      | -1.99                        | 3.92               | 10.21               | 1.72                | 2.95                  | 20.931                            | 17.365                          | 13.86           | 24.32 | 23.97          | 10.11          | 16.81    | 47.97 | 29.97          | 13.16          |
| 5500                      | -2.07                        | 3.97               | 10.22               | 1.72                | 2.95                  | 20.917                            | 17.356                          | 13.84           | 24.21 | 23.97          | 10.13          | 16.79    | 47.75 | 29.97          | 13.18          |
| 5580                      | -2.54                        | 3.98               | 10.22               | 1.72                | 2.95                  | 20.933                            | 17.356                          | 13.38           | 21.78 | 23.97          | 10.59          | 16.33    | 42.95 | 29.97          | 13.64          |
| 5700                      | -2.18                        | 3.99               | 10.23               | 1.72                | 2.95                  | 20.911                            | 17.356                          | 13.76           | 23.77 | 23.97          | 10.21          | 16.71    | 46.88 | 29.97          | 13.26          |
| 5745                      | -3.30                        | 4.00               | 10.23               | 1.72                | 2.95                  | -                                 | 17.311                          | 12.65           | 18.41 | 30.00          | 17.35          | 15.60    | 36.31 | 36.00          | 20.40          |
| 5785                      | -3.13                        | 4.00               | 10.24               | 1.72                | 2.95                  | -                                 | 17.312                          | 12.83           | 19.19 | 30.00          | 17.17          | 15.78    | 37.84 | 36.00          | 20.22          |
| 5825                      | -3.38                        | 4.01               | 10.24               | 1.72                | 2.95                  | -                                 | 17.339                          | 12.59           | 18.16 | 30.00          | 17.41          | 15.54    | 35.81 | 36.00          | 20.46          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

## Maximum Conducted Output Power

|                        |  |                     |                     |
|------------------------|--|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room                  |                     |                     |
| Date                   | January 8, 2019  | January 8, 2019     | February 16, 2019   |
| Temperature / Humidity | 24 deg. C / 54 % RH                                    | 22 deg. C / 50 % RH | 23 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa  | Kazutaka Takeyama   | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT20 (SISO), PN9, worst antenna port 0 |                     |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted Power |       |       |        | e.i.r.p. |       |       |        |
|---------------------------|------------------------------|--------------------|---------------------|---------------------|-----------------------|-----------------------------------|---------------------------------|-----------------|-------|-------|--------|----------|-------|-------|--------|
|                           |                              |                    |                     |                     |                       |                                   |                                 | Result          |       | Limit | Margin | Result   |       | Limit | Margin |
|                           |                              |                    |                     |                     |                       |                                   |                                 | [dBm]           | [mW]  | [dBm] | [dB]   | [dBm]    | [mW]  | [dBm] | [dB]   |
| 5180                      | -2.54                        | 3.89               | 10.21               | 1.81                | 2.95                  | -                                 | 18.351                          | 13.37           | 21.73 | 23.97 | 10.60  | 16.32    | 42.85 | 29.97 | 13.65  |
| 5220                      | -2.41                        | 3.90               | 10.21               | 1.81                | 2.95                  | -                                 | 18.372                          | 13.51           | 22.44 | 23.97 | 10.46  | 16.46    | 44.26 | 29.97 | 13.51  |
| 5240                      | -2.33                        | 3.90               | 10.21               | 1.81                | 2.95                  | -                                 | 18.388                          | 13.59           | 22.86 | 23.97 | 10.38  | 16.54    | 45.08 | 29.97 | 13.43  |
| 5260                      | -2.19                        | 3.91               | 10.21               | 1.81                | 2.95                  | 21.289                            | 18.388                          | 13.74           | 23.66 | 23.97 | 10.23  | 16.69    | 46.67 | 29.97 | 13.28  |
| 5300                      | -2.21                        | 3.92               | 10.21               | 1.81                | 2.95                  | 21.332                            | 18.238                          | 13.73           | 23.60 | 23.97 | 10.24  | 16.68    | 46.56 | 29.97 | 13.29  |
| 5320                      | -2.05                        | 3.92               | 10.21               | 1.81                | 2.95                  | 21.284                            | 18.380                          | 13.89           | 24.49 | 23.97 | 10.08  | 16.84    | 48.31 | 29.97 | 13.13  |
| 5500                      | -2.34                        | 3.97               | 10.22               | 1.81                | 2.95                  | 21.489                            | 18.348                          | 13.66           | 23.23 | 23.97 | 10.31  | 16.61    | 45.81 | 29.97 | 13.36  |
| 5580                      | -2.54                        | 3.98               | 10.22               | 1.81                | 2.95                  | 21.137                            | 18.408                          | 13.47           | 22.23 | 23.97 | 10.50  | 16.42    | 43.85 | 29.97 | 13.55  |
| 5700                      | -2.41                        | 3.99               | 10.23               | 1.81                | 2.95                  | 21.247                            | 18.330                          | 13.62           | 23.01 | 23.97 | 10.35  | 16.57    | 45.39 | 29.97 | 13.40  |
| 5745                      | -3.08                        | 4.00               | 10.23               | 1.81                | 2.95                  | -                                 | 18.322                          | 12.96           | 19.77 | 30.00 | 17.04  | 15.91    | 38.99 | 36.00 | 20.09  |
| 5785                      | -3.16                        | 4.00               | 10.24               | 1.81                | 2.95                  | -                                 | 18.315                          | 12.89           | 19.45 | 30.00 | 17.11  | 15.84    | 38.37 | 36.00 | 20.16  |
| 5825                      | -3.29                        | 4.01               | 10.24               | 1.81                | 2.95                  | -                                 | 18.331                          | 12.77           | 18.92 | 30.00 | 17.23  | 15.72    | 37.33 | 36.00 | 20.28  |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

---

**UL Japan, Inc.**
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |  |                     |                     |
|------------------------|--|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room                    |                     |                     |
| Date                   | January 8, 2019  | January 8, 2019     | February 16, 2019   |
| Temperature / Humidity | 24 deg. C / 54 % RH                                      | 22 deg. C / 50 % RH | 23 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa  | Kazutaka Takeyama   | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11ac VHT20 (SISO), PN9, worst antenna port 0 |                     |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted Power |       |       |        | e.i.r.p. |       |       |        |
|---------------------------|------------------------------|--------------------|---------------------|---------------------|-----------------------|-----------------------------------|---------------------------------|-----------------|-------|-------|--------|----------|-------|-------|--------|
|                           |                              |                    |                     |                     |                       |                                   |                                 | Result          |       | Limit | Margin | Result   |       | Limit | Margin |
|                           |                              |                    |                     |                     |                       |                                   |                                 | [dBm]           | [mW]  | [dBm] | [dB]   | [dBm]    | [mW]  | [dBm] | [dB]   |
| 5180                      | -1.69                        | 3.89               | 10.21               | 1.01                | 2.95                  | -                                 | 18.257                          | 13.42           | 21.98 | 23.97 | 10.55  | 16.37    | 43.35 | 29.97 | 13.60  |
| 5220                      | -1.38                        | 3.90               | 10.21               | 1.01                | 2.95                  | -                                 | 18.298                          | 13.74           | 23.66 | 23.97 | 10.23  | 16.69    | 46.67 | 29.97 | 13.28  |
| 5240                      | -1.52                        | 3.90               | 10.21               | 1.01                | 2.95                  | -                                 | 18.341                          | 13.60           | 22.91 | 23.97 | 10.37  | 16.55    | 45.19 | 29.97 | 13.42  |
| 5260                      | -1.41                        | 3.91               | 10.21               | 1.01                | 2.95                  | 21.240                            | 18.299                          | 13.72           | 23.55 | 23.97 | 10.25  | 16.67    | 46.45 | 29.97 | 13.30  |
| 5300                      | -1.30                        | 3.92               | 10.21               | 1.01                | 2.95                  | 21.171                            | 18.332                          | 13.84           | 24.21 | 23.97 | 10.13  | 16.79    | 47.75 | 29.97 | 13.18  |
| 5320                      | -0.96                        | 3.92               | 10.21               | 1.01                | 2.95                  | 21.003                            | 18.268                          | 14.18           | 26.18 | 23.97 | 9.79   | 17.13    | 51.64 | 29.97 | 12.84  |
| 5500                      | -1.55                        | 3.97               | 10.22               | 1.01                | 2.95                  | 20.997                            | 18.341                          | 13.65           | 23.17 | 23.97 | 10.32  | 16.60    | 45.71 | 29.97 | 13.37  |
| 5580                      | -1.77                        | 3.98               | 10.22               | 1.01                | 2.95                  | 20.905                            | 18.329                          | 13.44           | 22.08 | 23.97 | 10.53  | 16.39    | 43.55 | 29.97 | 13.58  |
| 5700                      | -1.73                        | 3.99               | 10.23               | 1.01                | 2.95                  | 21.069                            | 18.310                          | 13.50           | 22.39 | 23.97 | 10.47  | 16.45    | 44.16 | 29.97 | 13.52  |
| 5745                      | -2.41                        | 4.00               | 10.23               | 1.01                | 2.95                  | -                                 | 18.302                          | 12.83           | 19.19 | 30.00 | 17.17  | 15.78    | 37.84 | 36.00 | 20.22  |
| 5785                      | -2.47                        | 4.00               | 10.24               | 1.01                | 2.95                  | -                                 | 18.319                          | 12.78           | 18.97 | 30.00 | 17.22  | 15.73    | 37.41 | 36.00 | 20.27  |
| 5825                      | -2.49                        | 4.01               | 10.24               | 1.01                | 2.95                  | -                                 | 18.235                          | 12.77           | 18.92 | 30.00 | 17.23  | 15.72    | 37.33 | 36.00 | 20.28  |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

### Maximum Conducted Output Power

|                        |                                       |                     |
|------------------------|---------------------------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |
| Date                   | January 10, 2019                      | January 16, 2019    |
| Temperature / Humidity | 23 deg. C / 51 % RH                   | 23 deg. C / 52 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO), PN9      |                     |

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW [MHz] | 99 % OBW [MHz] | Conducted power |        |          |              |             |             | e.i.r.p. |       |       |              |             |             |
|------------------------|-----------------|----------------|-----------------|--------|----------|--------------|-------------|-------------|----------|-------|-------|--------------|-------------|-------------|
|                        |                 |                | Antenna         |        |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna  |       |       | Result [dBm] | Limit [dBm] | Margin [dB] |
| 0 [mW]                 | 1 [mW]          | Sum [mW]       | 0 [mW]          | 1 [mW] | Sum [mW] |              |             |             |          |       |       |              |             |             |
| 5180                   | -               | 18.382         | 10.16           | 11.27  | 21.43    | 13.31        | 23.97       | 10.66       | 20.04    | 17.82 | 37.86 | 15.78        | 29.97       | 14.19       |
| 5220                   | -               | 18.332         | 11.56           | 11.43  | 22.99    | 13.62        | 23.97       | 10.35       | 22.80    | 18.07 | 40.87 | 16.11        | 29.97       | 13.86       |
| 5240                   | -               | 18.336         | 10.54           | 10.79  | 21.33    | 13.29        | 23.97       | 10.68       | 20.79    | 17.06 | 37.85 | 15.78        | 29.97       | 14.19       |
| 5260                   | 21.179          | 18.470         | 10.69           | 11.46  | 22.15    | 13.45        | 23.97       | 10.52       | 21.08    | 18.11 | 39.19 | 15.93        | 29.97       | 14.04       |
| 5300                   | 21.381          | 18.362         | 10.96           | 11.27  | 22.24    | 13.47        | 23.97       | 10.50       | 21.62    | 17.82 | 39.45 | 15.96        | 29.97       | 14.01       |
| 5320                   | 21.238          | 18.391         | 11.17           | 11.78  | 22.94    | 13.61        | 23.97       | 10.36       | 22.02    | 18.62 | 40.65 | 16.09        | 29.97       | 13.88       |
| 5500                   | 21.289          | 18.278         | 10.91           | 12.42  | 23.33    | 13.68        | 23.97       | 10.29       | 21.52    | 19.63 | 41.16 | 16.14        | 29.97       | 13.83       |
| 5580                   | 21.485          | 18.395         | 10.54           | 11.32  | 21.87    | 13.40        | 23.97       | 10.57       | 20.79    | 17.91 | 38.70 | 15.88        | 29.97       | 14.09       |
| 5700                   | 21.527          | 18.282         | 10.96           | 10.72  | 21.68    | 13.36        | 23.97       | 10.61       | 21.62    | 16.94 | 38.57 | 15.86        | 29.97       | 14.11       |
| 5745                   | -               | 18.027         | 11.38           | 10.57  | 21.94    | 13.41        | 30.00       | 16.59       | 22.43    | 16.71 | 39.14 | 15.93        | 36.00       | 20.07       |
| 5785                   | -               | 18.028         | 11.38           | 11.27  | 22.65    | 13.55        | 30.00       | 16.45       | 22.43    | 17.82 | 40.26 | 16.05        | 36.00       | 19.95       |
| 5825                   | -               | 17.994         | 11.22           | 11.78  | 23.00    | 13.62        | 30.00       | 16.38       | 22.13    | 18.62 | 40.75 | 16.10        | 36.00       | 19.90       |

| Tested Frequency [MHz] | Duty Factor [dB] | Antenna 0                 |                 |                  |                    |                          |                | Antenna 1                 |                 |                  |                    |                          |                |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|----------------|---------------------------|-----------------|------------------|--------------------|--------------------------|----------------|
|                        |                  | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | e.i.r.p. [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | e.i.r.p. [dBm] |
| 5180                   | 2.76             | -6.79                     | 3.89            | 10.21            | 2.95               | 10.07                    | 13.02          | -6.34                     | 3.89            | 10.21            | 1.99               | 10.52                    | 12.51          |
| 5220                   | 2.76             | -6.24                     | 3.90            | 10.21            | 2.95               | 10.63                    | 13.58          | -6.29                     | 3.90            | 10.21            | 1.99               | 10.58                    | 12.57          |
| 5240                   | 2.76             | -6.64                     | 3.90            | 10.21            | 2.95               | 10.23                    | 13.18          | -6.54                     | 3.90            | 10.21            | 1.99               | 10.33                    | 12.32          |
| 5260                   | 2.76             | -6.59                     | 3.91            | 10.21            | 2.95               | 10.29                    | 13.24          | -6.29                     | 3.91            | 10.21            | 1.99               | 10.59                    | 12.58          |
| 5300                   | 2.76             | -6.49                     | 3.92            | 10.21            | 2.95               | 10.40                    | 13.35          | -6.37                     | 3.92            | 10.21            | 1.99               | 10.52                    | 12.51          |
| 5320                   | 2.76             | -6.41                     | 3.92            | 10.21            | 2.95               | 10.48                    | 13.43          | -6.18                     | 3.92            | 10.21            | 1.99               | 10.71                    | 12.70          |
| 5500                   | 2.76             | -6.57                     | 3.97            | 10.22            | 2.95               | 10.38                    | 13.33          | -6.01                     | 3.97            | 10.22            | 1.99               | 10.94                    | 12.93          |
| 5580                   | 2.76             | -6.73                     | 3.98            | 10.22            | 2.95               | 10.23                    | 13.18          | -6.42                     | 3.98            | 10.22            | 1.99               | 10.54                    | 12.53          |
| 5700                   | 2.76             | -6.58                     | 3.99            | 10.23            | 2.95               | 10.40                    | 13.35          | -6.68                     | 3.99            | 10.23            | 1.99               | 10.30                    | 12.29          |
| 5745                   | 2.76             | -6.43                     | 4.00            | 10.23            | 2.95               | 10.56                    | 13.51          | -6.75                     | 4.00            | 10.23            | 1.99               | 10.24                    | 12.23          |
| 5785                   | 2.76             | -6.44                     | 4.00            | 10.24            | 2.95               | 10.56                    | 13.51          | -6.48                     | 4.00            | 10.24            | 1.99               | 10.52                    | 12.51          |
| 5825                   | 2.76             | -6.51                     | 4.01            | 10.24            | 2.95               | 10.50                    | 13.45          | -6.30                     | 4.01            | 10.24            | 1.99               | 10.71                    | 12.70          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Conducted Output Power

|                        |                                       |                     |
|------------------------|---------------------------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |
| Date                   | January 10, 2019                      | January 16, 2019    |
| Temperature / Humidity | 23 deg. C / 51 % RH                   | 23 deg. C / 52 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11ac VHT20 (MIMO), PN9    |                     |

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW [MHz] | 99 % OBW [MHz] | Conducted power |       |       |        |       |        | e.i.r.p. |       |       |        |       |        |
|------------------------|-----------------|----------------|-----------------|-------|-------|--------|-------|--------|----------|-------|-------|--------|-------|--------|
|                        |                 |                | Antenna         |       | Sum   | Result | Limit | Margin | Antenna  |       | Sum   | Result | Limit | Margin |
| 0                      | 1               | 0              | 1               | 0     |       |        |       |        | 1        | 0     |       |        |       |        |
| [mW]                   | [mW]            | [mW]           | [dBm]           | [dBm] | [dBm] | [dBm]  | [dBm] | [dBm]  | [dBm]    | [dBm] | [dBm] | [dBm]  | [dBm] | [dBm]  |
| 5180                   | -               | 18.211         | 10.74           | 11.40 | 22.14 | 13.45  | 23.97 | 10.52  | 21.18    | 18.03 | 39.21 | 15.93  | 29.97 | 14.04  |
| 5220                   | -               | 18.269         | 11.04           | 11.48 | 22.52 | 13.53  | 23.97 | 10.44  | 21.77    | 18.16 | 39.93 | 16.01  | 29.97 | 13.96  |
| 5240                   | -               | 18.256         | 11.12           | 10.57 | 21.69 | 13.36  | 23.97 | 10.61  | 21.92    | 16.71 | 38.63 | 15.87  | 29.97 | 14.10  |
| 5260                   | 21.487          | 18.304         | 10.84           | 11.61 | 22.45 | 13.51  | 23.97 | 10.46  | 21.37    | 18.37 | 39.74 | 15.99  | 29.97 | 13.98  |
| 5300                   | 21.001          | 18.322         | 11.22           | 11.91 | 23.13 | 13.64  | 23.97 | 10.33  | 22.13    | 18.84 | 40.96 | 16.12  | 29.97 | 13.85  |
| 5320                   | 21.053          | 18.276         | 11.30           | 11.97 | 23.27 | 13.67  | 23.97 | 10.30  | 22.28    | 18.92 | 41.20 | 16.15  | 29.97 | 13.82  |
| 5500                   | 21.445          | 18.404         | 10.94           | 12.47 | 23.41 | 13.69  | 23.97 | 10.28  | 21.57    | 19.72 | 41.30 | 16.16  | 29.97 | 13.81  |
| 5580                   | 21.240          | 18.353         | 10.21           | 10.94 | 21.15 | 13.25  | 23.97 | 10.72  | 20.13    | 17.30 | 37.43 | 15.73  | 29.97 | 14.24  |
| 5700                   | 21.325          | 18.341         | 10.86           | 10.62 | 21.48 | 13.32  | 23.97 | 10.65  | 21.42    | 16.79 | 38.21 | 15.82  | 29.97 | 14.15  |
| 5745                   | -               | 18.012         | 11.59           | 10.47 | 22.06 | 13.44  | 30.00 | 16.56  | 22.85    | 16.56 | 39.41 | 15.96  | 36.00 | 20.04  |
| 5785                   | -               | 18.001         | 11.56           | 11.40 | 22.96 | 13.61  | 30.00 | 16.39  | 22.80    | 18.03 | 40.83 | 16.11  | 36.00 | 19.89  |
| 5825                   | -               | 18.016         | 11.07           | 12.02 | 23.09 | 13.63  | 30.00 | 16.37  | 21.82    | 19.01 | 40.83 | 16.11  | 36.00 | 19.89  |

| Tested Frequency [MHz] | Duty Factor [dB] | Antenna 0                 |                 |                  |                    |                          |                       | Antenna 1                 |                 |                  |                    |                          |                       |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|
|                        |                  | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] |
| 5180                   | 2.08             | -5.87                     | 3.89            | 10.21            | 2.95               | 10.31                    | 13.26                 | -5.61                     | 3.89            | 10.21            | 1.99               | 10.57                    | 12.56                 |
| 5220                   | 2.08             | -5.76                     | 3.90            | 10.21            | 2.95               | 10.43                    | 13.38                 | -5.59                     | 3.90            | 10.21            | 1.99               | 10.60                    | 12.59                 |
| 5240                   | 2.08             | -5.73                     | 3.90            | 10.21            | 2.95               | 10.46                    | 13.41                 | -5.95                     | 3.90            | 10.21            | 1.99               | 10.24                    | 12.23                 |
| 5260                   | 2.08             | -5.85                     | 3.91            | 10.21            | 2.95               | 10.35                    | 13.30                 | -5.55                     | 3.91            | 10.21            | 1.99               | 10.65                    | 12.64                 |
| 5300                   | 2.08             | -5.71                     | 3.92            | 10.21            | 2.95               | 10.50                    | 13.45                 | -5.45                     | 3.92            | 10.21            | 1.99               | 10.76                    | 12.75                 |
| 5320                   | 2.08             | -5.68                     | 3.92            | 10.21            | 2.95               | 10.53                    | 13.48                 | -5.43                     | 3.92            | 10.21            | 1.99               | 10.78                    | 12.77                 |
| 5500                   | 2.08             | -5.88                     | 3.97            | 10.22            | 2.95               | 10.39                    | 13.34                 | -5.31                     | 3.97            | 10.22            | 1.99               | 10.96                    | 12.95                 |
| 5580                   | 2.08             | -6.19                     | 3.98            | 10.22            | 2.95               | 10.09                    | 13.04                 | -5.89                     | 3.98            | 10.22            | 1.99               | 10.39                    | 12.38                 |
| 5700                   | 2.08             | -5.94                     | 3.99            | 10.23            | 2.95               | 10.36                    | 13.31                 | -6.04                     | 3.99            | 10.23            | 1.99               | 10.26                    | 12.25                 |
| 5745                   | 2.08             | -5.67                     | 4.00            | 10.23            | 2.95               | 10.64                    | 13.59                 | -6.11                     | 4.00            | 10.23            | 1.99               | 10.20                    | 12.19                 |
| 5785                   | 2.08             | -5.69                     | 4.00            | 10.24            | 2.95               | 10.63                    | 13.58                 | -5.75                     | 4.00            | 10.24            | 1.99               | 10.57                    | 12.56                 |
| 5825                   | 2.08             | -5.89                     | 4.01            | 10.24            | 2.95               | 10.44                    | 13.39                 | -5.53                     | 4.01            | 10.24            | 1.99               | 10.80                    | 12.79                 |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

## Maximum Conducted Output Power

|                        |   |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room   |                     |                     |                     |
| Date                   | January 8, 2019   | January 9, 2019     | January 11, 2019    | February 16, 2019   |
| Temperature / Humidity | 24 deg. C / 54 % RH   | 26 deg. C / 42 % RH | 24 deg. C / 51 % RH | 23 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa   | Yosuke Ishikawa     | Yosuke Ishikawa     | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO), PN9,<br>worst antenna port 1 (5190 MHz), 0 (other channel frequency) |                     |                     |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted Power |       |       |        | e.i.r.p. |       |       |        |
|---------------------------|------------------------------|--------------------|---------------------|---------------------|-----------------------|-----------------------------------|---------------------------------|-----------------|-------|-------|--------|----------|-------|-------|--------|
|                           |                              |                    |                     |                     |                       |                                   |                                 | Result          |       | Limit | Margin | Result   |       | Limit | Margin |
|                           |                              |                    |                     |                     |                       |                                   |                                 | [dBm]           | [mW]  |       |        | [dBm]    | [mW]  |       |        |
| 5190                      | -7.00                        | 3.89               | 10.21               | 2.63                | 1.99                  | -                                 | 36.572                          | 9.73            | 9.40  | 23.97 | 14.24  | 11.72    | 14.87 | 29.97 | 18.25  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| 5230                      | -2.59                        | 3.90               | 10.21               | 1.76                | 2.95                  | -                                 | 36.784                          | 13.28           | 21.28 | 23.97 | 10.69  | 16.23    | 41.98 | 29.97 | 13.74  |
| 5270                      | -2.68                        | 3.91               | 10.21               | 1.76                | 2.95                  | 39.851                            | 36.728                          | 13.20           | 20.89 | 23.97 | 10.77  | 16.15    | 41.21 | 29.97 | 13.82  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| 5310                      | -2.41                        | 3.92               | 10.21               | 1.76                | 2.95                  | 39.992                            | 36.722                          | 13.48           | 22.28 | 23.97 | 10.49  | 16.43    | 43.95 | 29.97 | 13.54  |
| 5510                      | -2.53                        | 3.97               | 10.22               | 1.76                | 2.95                  | 39.960                            | 36.764                          | 13.42           | 21.98 | 23.97 | 10.55  | 16.37    | 43.35 | 29.97 | 13.60  |
| 5550                      | -2.74                        | 3.98               | 10.22               | 1.76                | 2.95                  | 39.925                            | 36.726                          | 13.22           | 20.99 | 23.97 | 10.75  | 16.17    | 41.40 | 29.97 | 13.80  |
| 5670                      | -2.57                        | 3.99               | 10.23               | 1.76                | 2.95                  | 39.870                            | 36.820                          | 13.41           | 21.93 | 23.97 | 10.56  | 16.36    | 43.25 | 29.97 | 13.61  |
| 5755                      | -3.75                        | 4.00               | 10.24               | 1.76                | 2.95                  | -                                 | 36.504                          | 12.25           | 16.79 | 30.00 | 17.75  | 15.20    | 33.11 | 36.00 | 20.80  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| 5795                      | -3.62                        | 4.01               | 10.24               | 1.76                | 2.95                  | -                                 | 36.542                          | 12.39           | 17.34 | 30.00 | 17.61  | 15.34    | 34.20 | 36.00 | 20.66  |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

---

**UL Japan, Inc.**
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |   |                     |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room   |                     |                     |                     |                     |
| Date                   | January 8, 2019   | January 9, 2019     | January 11, 2019    | February 16, 2019   | March 11, 2019      |
| Temperature / Humidity | 24 deg. C / 54 % RH   | 26 deg. C / 42 % RH | 24 deg. C / 51 % RH | 23 deg. C / 44 % RH | 22 deg. C / 55 % RH |
| Engineer               | Yosuke Ishikawa   | Yosuke Ishikawa     | Yosuke Ishikawa     | Yosuke Ishikawa     | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11ac VHT40 (SISO), PN9,<br>worst antenna port 1 (5190 MHz), 0 (other channel frequency) |                     |                     |                     |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted Power |       |                |                | e.i.r.p.        |       |                |                |
|---------------------------|------------------------------|--------------------|---------------------|---------------------|-----------------------|-----------------------------------|---------------------------------|-----------------|-------|----------------|----------------|-----------------|-------|----------------|----------------|
|                           |                              |                    |                     |                     |                       |                                   |                                 | Result<br>[dBm] | [mW]  | Limit<br>[dBm] | Margin<br>[dB] | Result<br>[dBm] | [mW]  | Limit<br>[dBm] | Margin<br>[dB] |
| 5190                      | -6.56                        | 3.89               | 10.21               | 2.15                | 1.99                  | -                                 | 36.683                          | 9.69            | 9.31  | 23.97          | 14.28          | 11.68           | 14.72 | 29.97          | 18.29          |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -              | -              | -               | -     | -              | -              |
| 5230                      | -2.43                        | 3.90               | 10.21               | 1.39                | 2.95                  | -                                 | 36.603                          | 13.07           | 20.28 | 23.97          | 10.90          | 16.02           | 39.99 | 29.97          | 13.95          |
| 5270                      | -2.36                        | 3.91               | 10.21               | 1.39                | 2.95                  | 39.602                            | 36.708                          | 13.15           | 20.65 | 23.97          | 10.82          | 16.10           | 40.74 | 29.97          | 13.87          |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -              | -              | -               | -     | -              | -              |
| 5310                      | -2.40                        | 3.92               | 10.21               | 1.39                | 2.95                  | 39.685                            | 36.530                          | 13.12           | 20.51 | 23.97          | 10.85          | 16.07           | 40.46 | 29.97          | 13.90          |
| 5510                      | -2.29                        | 3.97               | 10.22               | 1.39                | 2.95                  | 39.408                            | 36.749                          | 13.29           | 21.33 | 23.97          | 10.68          | 16.24           | 42.07 | 29.97          | 13.73          |
| 5550                      | -2.46                        | 3.98               | 10.22               | 1.39                | 2.95                  | 39.712                            | 36.727                          | 13.13           | 20.56 | 23.97          | 10.84          | 16.08           | 40.55 | 29.97          | 13.89          |
| 5670                      | -2.50                        | 3.99               | 10.23               | 1.39                | 2.95                  | 39.520                            | 36.619                          | 13.11           | 20.46 | 23.97          | 10.86          | 16.06           | 40.36 | 29.97          | 13.91          |
| 5755                      | -3.44                        | 4.00               | 10.24               | 1.39                | 2.95                  | -                                 | 36.389                          | 12.19           | 16.56 | 30.00          | 17.81          | 15.14           | 32.66 | 36.00          | 20.86          |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -              | -              | -               | -     | -              | -              |
| 5795                      | -3.51                        | 4.01               | 10.24               | 1.39                | 2.95                  | -                                 | 36.522                          | 12.13           | 16.33 | 30.00          | 17.87          | 15.08           | 32.21 | 36.00          | 20.92          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

---

**UL Japan, Inc.**
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Conducted Output Power

|                        |                                       |                     |                     |
|------------------------|---------------------------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |                     |
| Date                   | January 9, 2019                       | January 16, 2019    | March 14, 2019      |
| Temperature / Humidity | 26 deg. C / 42 % RH                   | 23 deg. C / 52 % RH | 25 deg. C / 45 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     | Kazutaka Takeyama   |
| Mode                   | Tx, IEEE802.11n HT40 (MIMO), PN9      |                     |                     |

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted power |           |             |                 |                |                | e.i.r.p.  |           |             |                 |                |                |
|---------------------------|-----------------------------------|---------------------------------|-----------------|-----------|-------------|-----------------|----------------|----------------|-----------|-----------|-------------|-----------------|----------------|----------------|
|                           |                                   |                                 | Antenna         |           |             | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] | Antenna   |           |             | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|                           |                                   |                                 | 0<br>[mW]       | 1<br>[mW] | Sum<br>[mW] |                 |                |                | 0<br>[mW] | 1<br>[mW] | Sum<br>[mW] |                 |                |                |
| 5190                      | -                                 | 36.671                          | 4.33            | 4.62      | 8.95        | 9.52            | 23.97          | 14.45          | 8.53      | 7.31      | 15.84       | 12.00           | 29.97          | 17.97          |
| -                         | -                                 | -                               | -               | -         | -           | -               | -              | -              | -         | -         | -           | -               | -              | -              |
| 5230                      | -                                 | 36.517                          | 10.19           | 10.74     | 20.93       | 13.21           | 23.97          | 10.76          | 20.09     | 16.98     | 37.07       | 15.69           | 29.97          | 14.28          |
| 5270                      | 39.781                            | 36.644                          | 10.42           | 11.27     | 21.70       | 13.36           | 23.97          | 10.61          | 20.55     | 17.82     | 38.38       | 15.84           | 29.97          | 14.13          |
| -                         | -                                 | -                               | -               | -         | -           | -               | -              | -              | -         | -         | -           | -               | -              | -              |
| 5310                      | 39.736                            | 36.585                          | 10.79           | 11.43     | 22.22       | 13.47           | 23.97          | 10.50          | 21.28     | 18.07     | 39.35       | 15.95           | 29.97          | 14.02          |
| 5510                      | 39.524                            | 36.767                          | 10.52           | 12.79     | 23.31       | 13.68           | 23.97          | 10.29          | 20.74     | 20.23     | 40.97       | 16.13           | 29.97          | 13.84          |
| 5550                      | 39.283                            | 36.663                          | 10.42           | 12.30     | 22.73       | 13.57           | 23.97          | 10.40          | 20.55     | 19.45     | 40.01       | 16.02           | 29.97          | 13.95          |
| 5670                      | 39.807                            | 36.742                          | 10.33           | 10.99     | 21.32       | 13.29           | 23.97          | 10.68          | 20.37     | 17.38     | 37.74       | 15.77           | 29.97          | 14.20          |
| 5755                      | -                                 | 36.536                          | 11.32           | 11.30     | 22.62       | 13.55           | 30.00          | 16.45          | 22.33     | 17.86     | 40.20       | 16.04           | 36.00          | 19.96          |
| -                         | -                                 | -                               | -               | -         | -           | -               | -              | -              | -         | -         | -           | -               | -              | -              |
| 5795                      | -                                 | 36.565                          | 11.30           | 11.17     | 22.47       | 13.52           | 30.00          | 16.48          | 22.28     | 17.66     | 39.94       | 16.01           | 36.00          | 19.99          |

| Antenna 0                 |                     |                              |                    |                     |                       |                      | Antenna 1         |                              |                    |                     |                       |                      |                   |
|---------------------------|---------------------|------------------------------|--------------------|---------------------|-----------------------|----------------------|-------------------|------------------------------|--------------------|---------------------|-----------------------|----------------------|-------------------|
| Tested Frequency<br>[MHz] | Duty Factor<br>[dB] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Antenna Gain<br>[dBi] | Result               |                   | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Antenna Gain<br>[dBi] | Result               |                   |
|                           |                     |                              |                    |                     |                       | Cond. Power<br>[dBm] | e.i.r.p.<br>[dBm] |                              |                    |                     |                       | Cond. Power<br>[dBm] | e.i.r.p.<br>[dBm] |
| 5190                      | 3.59                | -11.10                       | 3.93               | 9.94                | 2.95                  | 6.36                 | 9.31              | -10.81                       | 3.93               | 9.94                | 1.99                  | 6.65                 | 8.64              |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |
| 5230                      | 2.51                | -6.54                        | 3.90               | 10.21               | 2.95                  | 10.08                | 13.03             | -6.31                        | 3.90               | 10.21               | 1.99                  | 10.31                | 12.30             |
| 5270                      | 2.51                | -6.45                        | 3.91               | 10.21               | 2.95                  | 10.18                | 13.13             | -6.11                        | 3.91               | 10.21               | 1.99                  | 10.52                | 12.51             |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |
| 5310                      | 2.51                | -6.31                        | 3.92               | 10.21               | 2.95                  | 10.33                | 13.28             | -6.06                        | 3.92               | 10.21               | 1.99                  | 10.58                | 12.57             |
| 5510                      | 2.51                | -6.48                        | 3.97               | 10.22               | 2.95                  | 10.22                | 13.17             | -5.63                        | 3.97               | 10.22               | 1.99                  | 11.07                | 13.06             |
| 5550                      | 2.51                | -6.53                        | 3.98               | 10.22               | 2.95                  | 10.18                | 13.13             | -5.81                        | 3.98               | 10.22               | 1.99                  | 10.90                | 12.89             |
| 5670                      | 2.51                | -6.59                        | 3.99               | 10.23               | 2.95                  | 10.14                | 13.09             | -6.32                        | 3.99               | 10.23               | 1.99                  | 10.41                | 12.40             |
| 5755                      | 2.51                | -6.20                        | 4.00               | 10.23               | 2.95                  | 10.54                | 13.49             | -6.21                        | 4.00               | 10.23               | 1.99                  | 10.53                | 12.52             |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |
| 5795                      | 2.51                | -6.23                        | 4.01               | 10.24               | 2.95                  | 10.53                | 13.48             | -6.28                        | 4.01               | 10.24               | 1.99                  | 10.48                | 12.47             |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

\*In the measurement of 5190MHz, a EUT of serial number different from the worst rate check is used.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



### Maximum Conducted Output Power

|                        |                                       |                     |                     |
|------------------------|---------------------------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |                     |
| Date                   | January 9, 2019                       | January 16, 2019    | March 14, 2019      |
| Temperature / Humidity | 26 deg. C / 42 % RH                   | 23 deg. C / 52 % RH | 25 deg. C / 45 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     | Kazutaka Takeyama   |
| Mode                   | Tx, IEEE802.11ac VHT40 (MIMO), PN9    |                     |                     |

**Antenna 0+1** Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW [MHz] | 99 % OBW [MHz] | Conducted power |       |          |              |             |             | e.i.r.p. |       |          |              |             |             |
|------------------------|-----------------|----------------|-----------------|-------|----------|--------------|-------------|-------------|----------|-------|----------|--------------|-------------|-------------|
|                        |                 |                | Antenna         |       | Sum [mW] | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna  |       | Sum [mW] | Result [dBm] | Limit [dBm] | Margin [dB] |
| 0 [mW]                 | 1 [mW]          | 0 [mW]         | 1 [mW]          |       |          |              |             |             |          |       |          |              |             |             |
| 5190                   | -               | 36.553         | 4.41            | 4.76  | 9.17     | 9.62         | 23.97       | 14.35       | 8.69     | 7.53  | 16.22    | 12.10        | 29.97       | 17.87       |
| -                      | -               | -              | -               | -     | -        | -            | -           | -           | -        | -     | -        | -            | -           | -           |
| 5230                   | -               | 36.550         | 10.09           | 13.40 | 23.49    | 13.71        | 23.97       | 10.26       | 19.90    | 21.18 | 41.09    | 16.14        | 29.97       | 13.83       |
| 5270                   | 39.794          | 36.585         | 10.28           | 11.35 | 21.63    | 13.35        | 23.97       | 10.62       | 20.27    | 17.95 | 38.22    | 15.82        | 29.97       | 14.15       |
| -                      | -               | -              | -               | -     | -        | -            | -           | -           | -        | -     | -        | -            | -           | -           |
| 5310                   | 39.545          | 36.661         | 10.74           | 11.27 | 22.01    | 13.43        | 23.97       | 10.54       | 21.18    | 17.82 | 39.00    | 15.91        | 29.97       | 14.06       |
| 5510                   | 39.650          | 36.637         | 10.52           | 12.79 | 23.31    | 13.68        | 23.97       | 10.29       | 20.74    | 20.23 | 40.97    | 16.13        | 29.97       | 13.84       |
| 5550                   | 39.482          | 36.558         | 10.14           | 12.27 | 22.41    | 13.51        | 23.97       | 10.46       | 19.99    | 19.41 | 39.40    | 15.96        | 29.97       | 14.01       |
| 5670                   | 39.637          | 36.536         | 10.52           | 10.99 | 21.51    | 13.33        | 23.97       | 10.64       | 20.74    | 17.38 | 38.12    | 15.81        | 29.97       | 14.16       |
| 5755                   | -               | 36.661         | 11.46           | 10.96 | 22.42    | 13.51        | 30.00       | 16.49       | 22.59    | 17.34 | 39.93    | 16.01        | 36.00       | 19.99       |
| -                      | -               | -              | -               | -     | -        | -            | -           | -           | -        | -     | -        | -            | -           | -           |
| 5795                   | -               | 36.601         | 10.96           | 11.38 | 22.34    | 13.49        | 30.00       | 16.51       | 21.62    | 17.99 | 39.61    | 15.98        | 36.00       | 20.02       |

| Antenna 0              |                  |                           |                 |                  |                    |                   | Antenna 1      |                           |                 |                  |                    |                   |                |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|-------------------|----------------|---------------------------|-----------------|------------------|--------------------|-------------------|----------------|
| Tested Frequency [MHz] | Duty Factor [dB] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result            |                | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result            |                |
|                        |                  |                           |                 |                  |                    | Cond. Power [dBm] | e.i.r.p. [dBm] |                           |                 |                  |                    | Cond. Power [dBm] | e.i.r.p. [dBm] |
| 5190                   | 2.87             | -10.30                    | 3.93            | 9.94             | 2.95               | 6.44              | 9.39           | -9.96                     | 3.93            | 9.94             | 1.99               | 6.78              | 8.77           |
| -                      | -                | -                         | -               | -                | -                  | -                 | -              | -                         | -               | -                | -                  | -                 | -              |
| 5230                   | 3.39             | -7.46                     | 3.90            | 10.21            | 2.95               | 10.04             | 12.99          | -6.23                     | 3.90            | 10.21            | 1.99               | 11.27             | 13.26          |
| 5270                   | 3.39             | -7.39                     | 3.91            | 10.21            | 2.95               | 10.12             | 13.07          | -6.96                     | 3.91            | 10.21            | 1.99               | 10.55             | 12.54          |
| -                      | -                | -                         | -               | -                | -                  | -                 | -              | -                         | -               | -                | -                  | -                 | -              |
| 5310                   | 3.39             | -7.21                     | 3.92            | 10.21            | 2.95               | 10.31             | 13.26          | -7.00                     | 3.92            | 10.21            | 1.99               | 10.52             | 12.51          |
| 5510                   | 3.39             | -7.36                     | 3.97            | 10.22            | 2.95               | 10.22             | 13.17          | -6.51                     | 3.97            | 10.22            | 1.99               | 11.07             | 13.06          |
| 5550                   | 3.39             | -7.53                     | 3.98            | 10.22            | 2.95               | 10.06             | 13.01          | -6.70                     | 3.98            | 10.22            | 1.99               | 10.89             | 12.88          |
| 5670                   | 3.39             | -7.39                     | 3.99            | 10.23            | 2.95               | 10.22             | 13.17          | -7.20                     | 3.99            | 10.23            | 1.99               | 10.41             | 12.40          |
| 5755                   | 3.39             | -7.04                     | 4.00            | 10.24            | 2.95               | 10.59             | 13.54          | -7.23                     | 4.00            | 10.24            | 1.99               | 10.40             | 12.39          |
| -                      | -                | -                         | -               | -                | -                  | -                 | -              | -                         | -               | -                | -                  | -                 | -              |
| 5795                   | 3.39             | -7.24                     | 4.01            | 10.24            | 2.95               | 10.40             | 13.35          | -7.08                     | 4.01            | 10.24            | 1.99               | 10.56             | 12.55          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

\*In the measurement of 5190MHz, a EUT of serial number different from the worst rate check is used.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |   |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room   |                     |                     |                     |
| Date                   | January 8, 2019   | January 11, 2019    | February 16, 2019   | March 18, 2019      |
| Temperature / Humidity | 24 deg. C / 54 % RH   | 24 deg. C / 51 % RH | 23 deg. C / 44 % RH | 22 deg. C / 54 % RH |
| Engineer               | Yosuke Ishikawa   | Yosuke Ishikawa     | Yosuke Ishikawa     | Kenichi Adachi      |
| Mode                   | Tx, IEEE802.11ac VHT80 (SISO), PN9,<br>worst antenna port : 0 (5775 MHz), 1 (other channel frequency) |                     |                     |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted Power |       |       |        | e.i.r.p. |       |       |        |
|---------------------------|------------------------------|--------------------|---------------------|---------------------|-----------------------|-----------------------------------|---------------------------------|-----------------|-------|-------|--------|----------|-------|-------|--------|
|                           |                              |                    |                     |                     |                       |                                   |                                 | Result          |       | Limit | Margin | Result   |       | Limit | Margin |
|                           |                              |                    |                     |                     |                       |                                   |                                 | [dBm]           | [mW]  |       |        | [dBm]    | [mW]  |       |        |
| 5210                      | -8.67                        | 3.94               | 9.94                | 3.33                | 1.99                  | -                                 | 76.076                          | 8.54            | 7.14  | 23.97 | 15.43  | 10.53    | 11.30 | 29.97 | 19.44  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| 5290                      | -8.64                        | 3.96               | 9.93                | 3.33                | 1.99                  | 80.981                            | 76.058                          | 8.58            | 7.21  | 23.97 | 15.39  | 10.57    | 11.40 | 29.97 | 19.40  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| 5530                      | -6.45                        | 3.97               | 10.22               | 3.33                | 1.99                  | 81.227                            | 76.052                          | 11.07           | 12.79 | 23.97 | 12.90  | 13.06    | 20.23 | 29.97 | 16.91  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| 5775                      | -5.02                        | 4.00               | 10.24               | 3.33                | 2.95                  | -                                 | 76.159                          | 12.55           | 17.99 | 30.00 | 17.45  | 15.50    | 35.48 | 36.00 | 20.50  |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |
| -                         | -                            | -                  | -                   | -                   | -                     | -                                 | -                               | -               | -     | -     | -      | -        | -     | -     | -      |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

\*In the measurement of 5210MHz, a EUT of serial number different from the worst rate check is used.

---

**UL Japan, Inc.**
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Conducted Output Power

|                        |                                       |                     |                     |                     |
|------------------------|---------------------------------------|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |                     |                     |
| Date                   | January 9, 2019                       | January 16, 2019    | February 16, 2019   | March 18, 2019      |
| Temperature / Humidity | 26 deg. C / 42 % RH                   | 23 deg. C / 52 % RH | 23 deg. C / 44 % RH | 22 deg. C / 54 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     | Yosuke Ishikawa     | Kenichi Adachi      |
| Mode                   | Tx, IEEE802.11ac VHT80 (MIMO), PN9    |                     |                     |                     |

**Antenna 0+1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | 26 dB EBW<br>(B for FCC)<br>[MHz] | 99 % OBW<br>(B for IC)<br>[MHz] | Conducted power |       |       |        |       |        | e.i.r.p. |       |       |        |       |        |
|---------------------------|-----------------------------------|---------------------------------|-----------------|-------|-------|--------|-------|--------|----------|-------|-------|--------|-------|--------|
|                           |                                   |                                 | Antenna         |       |       | Result | Limit | Margin | Antenna  |       |       | Result | Limit | Margin |
|                           |                                   |                                 | 1               | 2     | Sum   |        |       |        | 1        | 2     | Sum   |        |       |        |
|                           |                                   |                                 | [mW]            | [mW]  | [mW]  | [dBm]  | [dBm] | [dB]   | [mW]     | [mW]  | [mW]  | [dBm]  | [dBm] | [dB]   |
| 5210                      | -                                 | 76.100                          | 3.53            | 3.56  | 7.10  | 8.51   | 23.97 | 15.46  | 6.96     | 5.64  | 12.60 | 11.00  | 29.97 | 18.97  |
| -                         | -                                 | -                               | -               | -     | -     | -      | -     | -      | -        | -     | -     | -      | -     | -      |
| 5290                      | 81.150                            | 76.222                          | 3.88            | 3.72  | 7.61  | 8.81   | 23.97 | 15.16  | 7.65     | 5.89  | 13.54 | 11.32  | 29.97 | 18.65  |
| -                         | -                                 | -                               | -               | -     | -     | -      | -     | -      | -        | -     | -     | -      | -     | -      |
| 5530                      | 81.130                            | 76.260                          | 4.86            | 5.46  | 10.32 | 10.14  | 23.97 | 13.83  | 9.59     | 8.63  | 18.22 | 12.61  | 29.97 | 17.36  |
| -                         | -                                 | -                               | -               | -     | -     | -      | -     | -      | -        | -     | -     | -      | -     | -      |
| 5775                      | -                                 | 76.210                          | 10.33           | 11.59 | 21.92 | 13.41  | 30.00 | 16.59  | 20.37    | 18.32 | 38.69 | 15.88  | 36.00 | 20.12  |
| -                         | -                                 | -                               | -               | -     | -     | -      | -     | -      | -        | -     | -     | -      | -     | -      |

| Antenna 0                 |                     |                              |                    |                     |                       |                      | Antenna 1         |                              |                    |                     |                       |                      |                   |
|---------------------------|---------------------|------------------------------|--------------------|---------------------|-----------------------|----------------------|-------------------|------------------------------|--------------------|---------------------|-----------------------|----------------------|-------------------|
| Tested Frequency<br>[MHz] | Duty Factor<br>[dB] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Antenna Gain<br>[dBi] | Result               |                   | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Antenna Gain<br>[dBi] | Result               |                   |
|                           |                     |                              |                    |                     |                       | Cond. Power<br>[dBm] | e.i.r.p.<br>[dBm] |                              |                    |                     |                       | Cond. Power<br>[dBm] | e.i.r.p.<br>[dBm] |
| 5210                      | 3.84                | -12.46                       | 3.89               | 10.21               | 2.95                  | 5.48                 | 8.43              | -12.42                       | 3.89               | 10.21               | 1.99                  | 5.52                 | 7.51              |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |
| 5290                      | 3.84                | -12.08                       | 3.92               | 10.21               | 2.95                  | 5.89                 | 8.84              | -12.26                       | 3.92               | 10.21               | 1.99                  | 5.71                 | 7.70              |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |
| 5530                      | 3.89                | -11.21                       | 3.97               | 10.22               | 2.95                  | 6.87                 | 9.82              | -10.71                       | 3.97               | 10.22               | 1.99                  | 7.37                 | 9.36              |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |
| 5775                      | 3.89                | -7.99                        | 4.00               | 10.24               | 2.95                  | 10.14                | 13.09             | -7.49                        | 4.00               | 10.24               | 1.99                  | 10.64                | 12.63             |
| -                         | -                   | -                            | -                  | -                   | -                     | -                    | -                 | -                            | -                  | -                   | -                     | -                    | -                 |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

\*In the measurement of 5210MHz, a EUT of serial number different from the worst rate check is used.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | January 8, 2019                       |
| Temperature / Humidity | 24 deg. C / 54 % RH                   |
| Engineer               | Yosuke Ishikawa                       |
| Mode                   | Tx, IEEE802.11a, PN9                  |

### [Pre check]

#### Antenna 0

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 6                   | 5220.0         | -1.16                        | 3.90                  | 10.21                  | 0.28                   | 13.23           | 2.95                     | 16.18                         |         |
| 9                   | 5220.0         | -1.29                        | 3.90                  | 10.21                  | 0.42                   | 13.24           | 2.95                     | 16.19                         |         |
| 12                  | 5220.0         | -1.42                        | 3.90                  | 10.21                  | 0.54                   | 13.23           | 2.95                     | 16.18                         |         |
| 18                  | 5220.0         | -1.60                        | 3.90                  | 10.21                  | 0.77                   | 13.28           | 2.95                     | 16.23                         |         |
| 24                  | 5220.0         | -1.69                        | 3.90                  | 10.21                  | 1.00                   | 13.42           | 2.95                     | 16.37                         |         |
| 36                  | 5220.0         | -2.01                        | 3.90                  | 10.21                  | 1.38                   | 13.48           | 2.95                     | 16.43                         |         |
| 48                  | 5220.0         | -2.20                        | 3.90                  | 10.21                  | 1.72                   | <b>13.63</b>    | 2.95                     | <b>16.58</b>                  | *       |
| 54                  | 5220.0         | -2.55                        | 3.90                  | 10.21                  | 1.84                   | 13.40           | 2.95                     | 16.35                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

#### Antenna 1

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 6                   | 5220.0         | -1.50                        | 3.90                  | 10.21                  | 0.28                   | 12.89           | 1.99                     | 14.88                         |         |
| 9                   | 5220.0         | -1.76                        | 3.90                  | 10.21                  | 0.42                   | 12.77           | 1.99                     | 14.76                         |         |
| 12                  | 5220.0         | -1.84                        | 3.90                  | 10.21                  | 0.54                   | 12.81           | 1.99                     | 14.80                         |         |
| 18                  | 5220.0         | -2.03                        | 3.90                  | 10.21                  | 0.77                   | 12.85           | 1.99                     | 14.84                         |         |
| 24                  | 5220.0         | -2.02                        | 3.90                  | 10.21                  | 1.00                   | 13.09           | 1.99                     | 15.08                         |         |
| 36                  | 5220.0         | -2.49                        | 3.90                  | 10.21                  | 1.38                   | 13.00           | 1.99                     | 14.99                         |         |
| 48                  | 5220.0         | -2.82                        | 3.90                  | 10.21                  | 1.72                   | 13.01           | 1.99                     | 15.00                         |         |
| 54                  | 5220.0         | -2.97                        | 3.90                  | 10.21                  | 1.84                   | 12.98           | 1.99                     | 14.97                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

---

**UL Japan, Inc.**
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place                      Shonan EMC Lab. No.1 Measurement Room  
Date                                January 8, 2019  
Temperature / Humidity        24 deg. C / 54 % RH  
Engineer                         Yosuke Ishikawa  
Mode                                Tx, IEEE802.11n HT20 (SISO), PN9

**[Pre check]**

**Antenna 0**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5220.0         | -1.26                        | 3.90                  | 10.21                  | 0.30                   | 13.15           | 2.95                     | 16.10                         |         |
| 1                   | 5220.0         | -1.29                        | 3.90                  | 10.21                  | 0.57                   | 13.39           | 2.95                     | 16.34                         |         |
| 2                   | 5220.0         | -1.77                        | 3.90                  | 10.21                  | 0.81                   | 13.15           | 2.95                     | 16.10                         |         |
| 3                   | 5220.0         | -1.64                        | 3.90                  | 10.21                  | 1.01                   | 13.48           | 2.95                     | 16.43                         |         |
| 4                   | 5220.0         | -2.00                        | 3.90                  | 10.21                  | 1.37                   | 13.48           | 2.95                     | 16.43                         |         |
| 5                   | 5220.0         | -2.33                        | 3.90                  | 10.21                  | 1.70                   | 13.48           | 2.95                     | 16.43                         |         |
| 6                   | 5220.0         | -2.41                        | 3.90                  | 10.21                  | 1.81                   | <b>13.51</b>    | 2.95                     | <b>16.46</b>                  | *       |
| 7                   | 5220.0         | -2.56                        | 3.90                  | 10.21                  | 1.95                   | 13.50           | 2.95                     | 16.45                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

**Antenna 1**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5220.0         | -1.50                        | 3.90                  | 10.21                  | 0.30                   | 12.91           | 1.99                     | 14.90                         |         |
| 1                   | 5220.0         | -1.73                        | 3.90                  | 10.21                  | 0.57                   | 12.95           | 1.99                     | 14.94                         |         |
| 2                   | 5220.0         | -2.17                        | 3.90                  | 10.21                  | 0.81                   | 12.75           | 1.99                     | 14.74                         |         |
| 3                   | 5220.0         | -1.76                        | 3.90                  | 10.21                  | 1.01                   | 13.36           | 1.99                     | 15.35                         |         |
| 4                   | 5220.0         | -2.12                        | 3.90                  | 10.21                  | 1.37                   | 13.36           | 1.99                     | 15.35                         |         |
| 5                   | 5220.0         | -2.40                        | 3.90                  | 10.21                  | 1.70                   | 13.41           | 1.99                     | 15.40                         |         |
| 6                   | 5220.0         | -2.54                        | 3.90                  | 10.21                  | 1.81                   | 13.38           | 1.99                     | 15.37                         |         |
| 7                   | 5220.0         | -2.82                        | 3.90                  | 10.21                  | 1.95                   | 13.24           | 1.99                     | 15.23                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

Test place                      Shonan EMC Lab. No.1 Measurement Room  
Date                                January 8, 2019  
Temperature / Humidity        24 deg. C / 54 % RH  
Engineer                         Yosuke Ishikawa  
Mode                                Tx, IEEE802.11ac VHT20 (SISO), PN9

**[Pre check]**

**Antenna 0**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5220.0         | -1.26                        | 3.90                  | 10.21                  | 0.30                   | 13.15           | 2.95                     | 16.10                         |         |
| 1                   | 5220.0         | -1.23                        | 3.90                  | 10.21                  | 0.57                   | 13.45           | 2.95                     | 16.40                         |         |
| 2                   | 5220.0         | -1.75                        | 3.90                  | 10.21                  | 0.79                   | 13.15           | 2.95                     | 16.10                         |         |
| 3                   | 5220.0         | -1.38                        | 3.90                  | 10.21                  | 1.01                   | <b>13.74</b>    | 2.95                     | <b>16.69</b>                  | *       |
| 4                   | 5220.0         | -1.93                        | 3.90                  | 10.21                  | 1.35                   | 13.53           | 2.95                     | 16.48                         |         |
| 5                   | 5220.0         | -2.33                        | 3.90                  | 10.21                  | 1.67                   | 13.45           | 2.95                     | 16.40                         |         |
| 6                   | 5220.0         | -2.33                        | 3.90                  | 10.21                  | 1.80                   | 13.58           | 2.95                     | 16.53                         |         |
| 7                   | 5220.0         | -2.61                        | 3.90                  | 10.21                  | 1.92                   | 13.42           | 2.95                     | 16.37                         |         |
| 8                   | 5220.0         | -3.20                        | 3.90                  | 10.21                  | 2.11                   | 13.02           | 2.95                     | 15.97                         |         |

**Antenna 1**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5220.0         | -1.41                        | 3.90                  | 10.21                  | 0.30                   | 13.00           | 1.99                     | 14.99                         |         |
| 1                   | 5220.0         | -1.78                        | 3.90                  | 10.21                  | 0.57                   | 12.90           | 1.99                     | 14.89                         |         |
| 2                   | 5220.0         | -1.98                        | 3.90                  | 10.21                  | 0.79                   | 12.92           | 1.99                     | 14.91                         |         |
| 3                   | 5220.0         | -1.76                        | 3.90                  | 10.21                  | 1.01                   | 13.36           | 1.99                     | 15.35                         |         |
| 4                   | 5220.0         | -2.13                        | 3.90                  | 10.21                  | 1.35                   | 13.33           | 1.99                     | 15.32                         |         |
| 5                   | 5220.0         | -2.71                        | 3.90                  | 10.21                  | 1.67                   | 13.07           | 1.99                     | 15.06                         |         |
| 6                   | 5220.0         | -2.68                        | 3.90                  | 10.21                  | 1.80                   | 13.23           | 1.99                     | 15.22                         |         |
| 7                   | 5220.0         | -2.86                        | 3.90                  | 10.21                  | 1.92                   | 13.17           | 1.99                     | 15.16                         |         |
| 8                   | 5220.0         | -3.41                        | 3.90                  | 10.21                  | 2.11                   | 12.81           | 1.99                     | 14.80                         |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
 Date                         January 10, 2019  
 Temperature / Humidity   23 deg. C / 51 % RH  
 Engineer                  Yosuke Ishikawa  
 Mode                        Tx, IEEE802.11n HT20 (MIMO), PN9

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Reading<br>[dBm] | Antenna 0       |                          |                               | Reading<br>[dBm] | Antenna 1       |                          |                               | Antenna 0+1           |                                     | Remarks |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-----------------------|-------------------------------------|---------|
|               |                |                       |                        |                        |                  | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] |                  | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |         |
| 8             | 5220.0         | 3.90                  | 10.21                  | 0.57                   | -4.66            | 10.02           | 2.95                     | 12.97                         | -4.37            | 10.31           | 1.99                     | 12.30                         | 13.18                 | 15.66                               |         |
| 9             | 5220.0         | 3.90                  | 10.21                  | 1.01                   | -5.17            | 9.95            | 2.95                     | 12.90                         | -4.82            | 10.30           | 1.99                     | 12.29                         | 13.14                 | 15.62                               |         |
| 10            | 5220.0         | 3.90                  | 10.21                  | 1.36                   | -5.40            | 10.07           | 2.95                     | 13.02                         | -5.19            | 10.28           | 1.99                     | 12.27                         | 13.19                 | 15.67                               |         |
| 11            | 5220.0         | 3.90                  | 10.21                  | 1.68                   | -5.45            | 10.34           | 2.95                     | 13.29                         | -5.27            | 10.52           | 1.99                     | 12.51                         | 13.44                 | 15.93                               |         |
| 12            | 5220.0         | 3.90                  | 10.21                  | 2.11                   | -5.86            | 10.36           | 2.95                     | 13.31                         | -5.70            | 10.52           | 1.99                     | 12.51                         | 13.45                 | 15.94                               |         |
| 13            | 5220.0         | 3.90                  | 10.21                  | 2.48                   | -6.20            | 10.39           | 2.95                     | 13.34                         | -6.06            | 10.53           | 1.99                     | 12.52                         | 13.47                 | 15.96                               |         |
| 14            | 5220.0         | 3.90                  | 10.21                  | 2.60                   | -6.31            | 10.40           | 2.95                     | 13.35                         | -6.22            | 10.49           | 1.99                     | 12.48                         | 13.46                 | 15.95                               |         |
| 15            | 5220.0         | 3.90                  | 10.21                  | 2.76                   | -6.24            | 10.63           | 2.95                     | 13.58                         | -6.29            | 10.58           | 1.99                     | 12.57                         | <b>13.62</b>          | <b>16.12</b>                        | *       |
|               |                |                       |                        |                        |                  |                 |                          |                               |                  |                 |                          |                               |                       |                                     |         |

\*: Worst rate

Sample Calculation:   Result = Duty factor + Reading  
 Result (e.i.r.p.) = Result + Antenna Gain  
 Total Result =  $10 * \log (10 ^ { \text{Result (Antenna 0)} / 10} + 10 ^ { \text{Result (Antenna 1)} / 10} )$

Test place                   Shonan EMC Lab. No.1 Measurement Room  
 Date                         January 10, 2019  
 Temperature / Humidity   23 deg. C / 51 % RH  
 Engineer                  Yosuke Ishikawa  
 Mode                        Tx, IEEE802.11ac VHT20 (MIMO), PN9

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Reading<br>[dBm] | Antenna 0       |                          |                               | Reading<br>[dBm] | Antenna 1       |                          |                               | Antenna 0+1           |                                     | Remarks |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-----------------------|-------------------------------------|---------|
|               |                |                       |                        |                        |                  | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] |                  | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |         |
| 0             | 5220.0         | 3.90                  | 10.21                  | 0.56                   | -4.61            | 10.06           | 2.95                     | 13.01                         | -4.44            | 10.23           | 1.99                     | 12.22                         | 13.16                 | 15.64                               |         |
| 1             | 5220.0         | 3.90                  | 10.21                  | 1.01                   | -5.10            | 10.02           | 2.95                     | 12.97                         | -4.96            | 10.16           | 1.99                     | 12.15                         | 13.10                 | 15.59                               |         |
| 2             | 5220.0         | 3.90                  | 10.21                  | 1.35                   | -5.43            | 10.03           | 2.95                     | 12.98                         | -5.31            | 10.15           | 1.99                     | 12.14                         | 13.10                 | 15.59                               |         |
| 3             | 5220.0         | 3.90                  | 10.21                  | 1.67                   | -5.46            | 10.32           | 2.95                     | 13.27                         | -5.31            | 10.47           | 1.99                     | 12.46                         | 13.41                 | 15.89                               |         |
| 4             | 5220.0         | 3.90                  | 10.21                  | 2.08                   | -5.76            | 10.43           | 2.95                     | 13.38                         | -5.59            | 10.60           | 1.99                     | 12.59                         | <b>13.53</b>          | <b>16.01</b>                        | *       |
| 5             | 5220.0         | 3.90                  | 10.21                  | 2.43                   | -6.13            | 10.41           | 2.95                     | 13.36                         | -6.03            | 10.51           | 1.99                     | 12.50                         | 13.47                 | 15.96                               |         |
| 6             | 5220.0         | 3.90                  | 10.21                  | 2.56                   | -6.27            | 10.40           | 2.95                     | 13.35                         | -6.17            | 10.50           | 1.99                     | 12.49                         | 13.46                 | 15.95                               |         |
| 7             | 5220.0         | 3.90                  | 10.21                  | 2.66                   | -6.32            | 10.45           | 2.95                     | 13.40                         | -6.23            | 10.54           | 1.99                     | 12.53                         | 13.51                 | 16.00                               |         |
| 8             | 5220.0         | 3.90                  | 10.21                  | 2.92                   | -6.77            | 10.26           | 2.95                     | 13.21                         | -6.48            | 10.55           | 1.99                     | 12.54                         | 13.42                 | 15.90                               |         |
|               |                |                       |                        |                        |                  |                 |                          |                               |                  |                 |                          |                               |                       |                                     |         |

\*: Worst rate

Sample Calculation:   Result = Duty factor + Reading  
 Result (e.i.r.p.) = Result + Antenna Gain  
 Total Result =  $10 * \log (10 ^ { \text{Result (Antenna 0)} / 10} + 10 ^ { \text{Result (Antenna 1)} / 10} )$

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab. No.1 Measurement Room      |
| Date                   | January 8, 2019                            |
| Temperature / Humidity | 24 deg. C / 54 % RH                        |
| Engineer               | Yosuke Ishikawa                            |
| Mode                   | Tx, IEEE802.11n HT40 (SISO), PN9, 5190 MHz |

**[Pre check]**

**Antenna 0**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5190.0         | -5.31                        | 3.89                  | 10.21                  | 0.59                   | 9.38            | 2.95                     | 12.33                         |         |
| 1                   | 5190.0         | -5.90                        | 3.89                  | 10.21                  | 0.97                   | 9.17            | 2.95                     | 12.12                         |         |
| 2                   | 5190.0         | -6.37                        | 3.89                  | 10.21                  | 1.46                   | 9.19            | 2.95                     | 12.14                         |         |
| 3                   | 5190.0         | -6.31                        | 3.89                  | 10.21                  | 1.76                   | 9.55            | 2.95                     | <b>12.50</b>                  |         |
| 4                   | 5190.0         | -7.00                        | 3.89                  | 10.21                  | 2.19                   | 9.29            | 2.95                     | 12.24                         |         |
| 5                   | 5190.0         | -7.23                        | 3.89                  | 10.21                  | 2.63                   | 9.50            | 2.95                     | 12.45                         |         |
| 6                   | 5190.0         | -7.53                        | 3.89                  | 10.21                  | 2.71                   | 9.28            | 2.95                     | 12.23                         |         |
| 7                   | 5190.0         | -7.70                        | 3.89                  | 10.21                  | 2.87                   | 9.27            | 2.95                     | 12.22                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

**Antenna 1**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5190.0         | -5.13                        | 3.89                  | 10.21                  | 0.59                   | 9.56            | 1.99                     | 11.55                         |         |
| 1                   | 5190.0         | -5.55                        | 3.89                  | 10.21                  | 0.97                   | 9.52            | 1.99                     | 11.51                         |         |
| 2                   | 5190.0         | -5.96                        | 3.89                  | 10.21                  | 1.46                   | 9.60            | 1.99                     | 11.59                         |         |
| 3                   | 5190.0         | -6.17                        | 3.89                  | 10.21                  | 1.76                   | 9.69            | 1.99                     | 11.68                         |         |
| 4                   | 5190.0         | -6.59                        | 3.89                  | 10.21                  | 2.19                   | 9.70            | 1.99                     | 11.69                         |         |
| 5                   | 5190.0         | -7.00                        | 3.89                  | 10.21                  | 2.63                   | <b>9.73</b>     | 1.99                     | 11.72                         | *       |
| 6                   | 5190.0         | -7.09                        | 3.89                  | 10.21                  | 2.71                   | 9.72            | 1.99                     | 11.71                         |         |
| 7                   | 5190.0         | -7.30                        | 3.89                  | 10.21                  | 2.87                   | 9.67            | 1.99                     | 11.66                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain



## Maximum Conducted Output Power

|                        |   |
|------------------------|---|
| Test place             | Shonan EMC Lab. No.1 Measurement Room             |
| Date                   | January 9, 2019                                   |
| Temperature / Humidity | 26 deg. C / 42 % RH                               |
| Engineer               | Yosuke Ishikawa                                   |
| Mode                   | Tx, IEEE802.11n HT40 (SISO), PN9, 5230 - 5795 MHz |

### [Pre check]

#### Antenna 0

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5230.0         | -1.74                        | 3.90                  | 10.21                  | 0.59                   | 12.96           | 2.95                     | 15.91                         |         |
| 1                   | 5230.0         | -2.19                        | 3.90                  | 10.21                  | 0.97                   | 12.89           | 2.95                     | 15.84                         |         |
| 2                   | 5230.0         | -2.69                        | 3.90                  | 10.21                  | 1.46                   | 12.88           | 2.95                     | 15.83                         |         |
| 3                   | 5230.0         | -2.59                        | 3.90                  | 10.21                  | 1.76                   | <b>13.28</b>    | 2.95                     | <b>16.23</b>                  | *       |
| 4                   | 5230.0         | -3.12                        | 3.90                  | 10.21                  | 2.19                   | 13.18           | 2.95                     | 16.13                         |         |
| 5                   | 5230.0         | -3.48                        | 3.90                  | 10.21                  | 2.63                   | 13.26           | 2.95                     | 16.21                         |         |
| 6                   | 5230.0         | -3.60                        | 3.90                  | 10.21                  | 2.71                   | 13.22           | 2.95                     | 16.17                         |         |
| 7                   | 5230.0         | -3.89                        | 3.90                  | 10.21                  | 2.87                   | 13.09           | 2.95                     | 16.04                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

#### Antenna 1

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5230.0         | -2.12                        | 3.90                  | 10.21                  | 0.59                   | 12.58           | 1.99                     | 14.57                         |         |
| 1                   | 5230.0         | -2.57                        | 3.90                  | 10.21                  | 0.97                   | 12.51           | 1.99                     | 14.50                         |         |
| 2                   | 5230.0         | -2.90                        | 3.90                  | 10.21                  | 1.46                   | 12.67           | 1.99                     | 14.66                         |         |
| 3                   | 5230.0         | -3.23                        | 3.90                  | 10.21                  | 1.76                   | 12.64           | 1.99                     | 14.63                         |         |
| 4                   | 5230.0         | -3.73                        | 3.90                  | 10.21                  | 2.19                   | 12.57           | 1.99                     | 14.56                         |         |
| 5                   | 5230.0         | -4.11                        | 3.90                  | 10.21                  | 2.63                   | 12.63           | 1.99                     | 14.62                         |         |
| 6                   | 5230.0         | -4.15                        | 3.90                  | 10.21                  | 2.71                   | 12.67           | 1.99                     | 14.66                         |         |
| 7                   | 5230.0         | -4.46                        | 3.90                  | 10.21                  | 2.87                   | 12.52           | 1.99                     | 14.51                         |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |
|                     |                |                              |                       |                        |                        |                 |                          |                               |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

---

**UL Japan, Inc.**
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab. No.1 Measurement Room        |
| Date                   | January 8, 2019                              |
| Temperature / Humidity | 24 deg. C / 54 % RH                          |
| Engineer               | Yosuke Ishikawa                              |
| Mode                   | Tx, IEEE802.11ac VHT40 (SISO), PN9, 5190 MHz |

**[Pre check]**

**Antenna 0**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5190.0         | -5.44                        | 3.89                  | 10.21                  | 0.57                   | 9.23            | 2.95                     | 12.18                         |         |
| 1                   | 5190.0         | -5.75                        | 3.89                  | 10.21                  | 1.04                   | 9.39            | 2.95                     | 12.34                         |         |
| 2                   | 5190.0         | -6.35                        | 3.89                  | 10.21                  | 1.39                   | 9.14            | 2.95                     | 12.09                         |         |
| 3                   | 5190.0         | -6.31                        | 3.89                  | 10.21                  | 1.67                   | 9.46            | 2.95                     | 12.41                         |         |
| 4                   | 5190.0         | -6.79                        | 3.89                  | 10.21                  | 2.15                   | 9.46            | 2.95                     | 12.41                         |         |
| 5                   | 5190.0         | -7.20                        | 3.89                  | 10.21                  | 2.53                   | 9.43            | 2.95                     | 12.38                         |         |
| 6                   | 5190.0         | -7.25                        | 3.89                  | 10.21                  | 2.62                   | 9.47            | 2.95                     | 12.42                         |         |
| 7                   | 5190.0         | -7.41                        | 3.89                  | 10.21                  | 2.80                   | 9.49            | 2.95                     | 12.44                         |         |
| 8                   | 5190.0         | -7.59                        | 3.89                  | 10.21                  | 2.97                   | 9.48            | 2.95                     | 12.43                         |         |
| 9                   | 5190.0         | -7.73                        | 3.89                  | 10.21                  | 3.15                   | 9.52            | 2.95                     | <b>12.47</b>                  |         |

**Antenna 1**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5190.0         | -5.01                        | 3.89                  | 10.21                  | 0.57                   | 9.66            | 1.99                     | 11.65                         |         |
| 1                   | 5190.0         | -5.61                        | 3.89                  | 10.21                  | 1.04                   | 9.53            | 1.99                     | 11.52                         |         |
| 2                   | 5190.0         | -5.93                        | 3.89                  | 10.21                  | 1.39                   | 9.56            | 1.99                     | 11.55                         |         |
| 3                   | 5190.0         | -6.15                        | 3.89                  | 10.21                  | 1.67                   | 9.62            | 1.99                     | 11.61                         |         |
| 4                   | 5190.0         | -6.56                        | 3.89                  | 10.21                  | 2.15                   | <b>9.69</b>     | 1.99                     | 11.68                         | *       |
| 5                   | 5190.0         | -6.99                        | 3.89                  | 10.21                  | 2.53                   | 9.64            | 1.99                     | 11.63                         |         |
| 6                   | 5190.0         | -7.11                        | 3.89                  | 10.21                  | 2.62                   | 9.61            | 1.99                     | 11.60                         |         |
| 7                   | 5190.0         | -7.33                        | 3.89                  | 10.21                  | 2.80                   | 9.57            | 1.99                     | 11.56                         |         |
| 8                   | 5190.0         | -7.43                        | 3.89                  | 10.21                  | 2.97                   | 9.64            | 1.99                     | 11.63                         |         |
| 9                   | 5190.0         | -7.60                        | 3.89                  | 10.21                  | 3.15                   | 9.65            | 1.99                     | 11.64                         |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

|                        |   |
|------------------------|---|
| Test place             | Shonan EMC Lab. No.1 Measurement Room               |
| Date                   | January 8, 2019                                     |
| Temperature / Humidity | 24 deg. C / 54 % RH                                 |
| Engineer               | Yosuke Ishikawa                                     |
| Mode                   | Tx, IEEE802.11ac VHT40 (SISO), PN9, 5230 - 5795 MHz |

**[Pre check]**

**Antenna 0**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5230.0         | -1.64                        | 3.90                  | 10.21                  | 0.57                   | 13.04           | 2.95                     | 15.99                         |         |
| 1                   | 5230.0         | -2.15                        | 3.90                  | 10.21                  | 1.04                   | 13.00           | 2.95                     | 15.95                         |         |
| 2                   | 5230.0         | -2.43                        | 3.90                  | 10.21                  | 1.39                   | <b>13.07</b>    | 2.95                     | <b>16.02</b>                  | *       |
| 3                   | 5230.0         | -2.74                        | 3.90                  | 10.21                  | 1.67                   | 13.04           | 2.95                     | 15.99                         |         |
| 4                   | 5230.0         | -3.27                        | 3.90                  | 10.21                  | 2.15                   | 12.99           | 2.95                     | 15.94                         |         |
| 5                   | 5230.0         | -3.60                        | 3.90                  | 10.21                  | 2.53                   | 13.04           | 2.95                     | 15.99                         |         |
| 6                   | 5230.0         | -3.70                        | 3.90                  | 10.21                  | 2.62                   | 13.03           | 2.95                     | 15.98                         |         |
| 7                   | 5230.0         | -3.86                        | 3.90                  | 10.21                  | 2.80                   | 13.05           | 2.95                     | 16.00                         |         |
| 8                   | 5230.0         | -4.69                        | 3.90                  | 10.21                  | 2.97                   | 12.39           | 2.95                     | 15.34                         |         |
| 9                   | 5230.0         | -4.63                        | 3.90                  | 10.21                  | 3.15                   | 12.63           | 2.95                     | 15.58                         |         |

**Antenna 1**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5230.0         | -2.15                        | 3.90                  | 10.21                  | 0.57                   | 12.53           | 1.99                     | 14.52                         |         |
| 1                   | 5230.0         | -2.70                        | 3.90                  | 10.21                  | 1.04                   | 12.45           | 1.99                     | 14.44                         |         |
| 2                   | 5230.0         | -2.83                        | 3.90                  | 10.21                  | 1.39                   | 12.67           | 1.99                     | 14.66                         |         |
| 3                   | 5230.0         | -3.30                        | 3.90                  | 10.21                  | 1.67                   | 12.48           | 1.99                     | 14.47                         |         |
| 4                   | 5230.0         | -3.78                        | 3.90                  | 10.21                  | 2.15                   | 12.48           | 1.99                     | 14.47                         |         |
| 5                   | 5230.0         | -4.14                        | 3.90                  | 10.21                  | 2.53                   | 12.50           | 1.99                     | 14.49                         |         |
| 6                   | 5230.0         | -4.23                        | 3.90                  | 10.21                  | 2.62                   | 12.50           | 1.99                     | 14.49                         |         |
| 7                   | 5230.0         | -4.39                        | 3.90                  | 10.21                  | 2.80                   | 12.52           | 1.99                     | 14.51                         |         |
| 8                   | 5230.0         | -4.94                        | 3.90                  | 10.21                  | 2.97                   | 12.14           | 1.99                     | 14.13                         |         |
| 9                   | 5230.0         | -4.91                        | 3.90                  | 10.21                  | 3.15                   | 12.35           | 1.99                     | 14.34                         |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
 Date                         January 9, 2019  
 Temperature / Humidity   26 deg. C / 42 % RH  
 Engineer                  Yosuke Ishikawa  
 Mode                        Tx, IEEE802.11n HT40 (MIMO), PN9, 5190 MHz

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Antenna 0        |                 |                          |                               | Antenna 1        |                 |                          |                               | Antenna 0+1           |                                     | Remarks |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-----------------------|-------------------------------------|---------|
|               |                |                       |                        |                        | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |         |
| 8             | 5190.0         | 3.89                  | 10.21                  | 1.03                   | -9.16            | 5.97            | 2.95                     | 8.92                          | -8.72            | 6.41            | 1.99                     | 8.40                          | 9.21                  | 11.68                               |         |
| 9             | 5190.0         | 3.89                  | 10.21                  | 1.69                   | -9.87            | 5.92            | 2.95                     | 8.87                          | -9.38            | 6.41            | 1.99                     | 8.40                          | 9.18                  | 11.65                               |         |
| 10            | 5190.0         | 3.89                  | 10.21                  | 2.14                   | -10.49           | 5.75            | 2.95                     | 8.70                          | -10.03           | 6.21            | 1.99                     | 8.20                          | 9.00                  | 11.47                               |         |
| 11            | 5190.0         | 3.89                  | 10.21                  | 2.51                   | -10.61           | 6.00            | 2.95                     | 8.95                          | -10.36           | 6.25            | 1.99                     | 8.24                          | 9.14                  | 11.62                               |         |
| 12            | 5190.0         | 3.89                  | 10.21                  | 2.95                   | -11.03           | 6.02            | 2.95                     | 8.97                          | -10.75           | 6.30            | 1.99                     | 8.29                          | 9.18                  | 11.65                               |         |
| 13            | 5190.0         | 3.89                  | 10.21                  | 3.34                   | -11.47           | 5.97            | 2.95                     | 8.92                          | -11.11           | 6.33            | 1.99                     | 8.32                          | 9.16                  | 11.64                               |         |
| 14            | 5190.0         | 3.89                  | 10.21                  | 3.46                   | -11.50           | 6.06            | 2.95                     | 9.01                          | -11.26           | 6.30            | 1.99                     | 8.29                          | 9.19                  | 11.68                               |         |
| 15            | 5190.0         | 3.89                  | 10.21                  | 3.59                   | -11.60           | 6.09            | 2.95                     | 9.04                          | -11.37           | 6.32            | 1.99                     | 8.31                          | <b>9.22</b>           | <b>11.70</b>                        | *       |

\*: Worst rate

Sample Calculation:    Result = Duty factor + Reading

Result (e.i.r.p.) = Result + Antenna Gain

Total Result = 10 \* log (10 ^ (Result (Antenna 0) / 10) + 10 ^ (Result (Antenna 1) / 10))

Test place                   Shonan EMC Lab. No.1 Measurement Room  
 Date                         January 9, 2019  
 Temperature / Humidity   26 deg. C / 42 % RH  
 Engineer                  Yosuke Ishikawa  
 Mode                        Tx, IEEE802.11n HT40 (MIMO), PN9, 5230 - 5795 MHz

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Antenna 0        |                 |                          |                               | Antenna 1        |                 |                          |                               | Antenna 0+1           |                                     | Remarks |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-----------------------|-------------------------------------|---------|
|               |                |                       |                        |                        | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |         |
| 8             | 5230.0         | 3.90                  | 10.21                  | 1.03                   | -5.13            | 10.01           | 2.95                     | 12.96                         | -4.87            | 10.27           | 1.99                     | 12.26                         | 13.15                 | 15.63                               |         |
| 9             | 5230.0         | 3.90                  | 10.21                  | 1.69                   | -5.85            | 9.95            | 2.95                     | 12.90                         | -5.75            | 10.05           | 1.99                     | 12.04                         | 13.01                 | 15.50                               |         |
| 10            | 5230.0         | 3.90                  | 10.21                  | 2.14                   | -6.28            | 9.97            | 2.95                     | 12.92                         | -6.20            | 10.05           | 1.99                     | 12.04                         | 13.02                 | 15.51                               |         |
| 11            | 5230.0         | 3.90                  | 10.21                  | 2.51                   | -6.54            | 10.08           | 2.95                     | 13.03                         | -6.31            | 10.31           | 1.99                     | 12.30                         | <b>13.21</b>          | <b>15.69</b>                        | *       |
| 12            | 5230.0         | 3.90                  | 10.21                  | 2.95                   | -6.96            | 10.10           | 2.95                     | 13.05                         | -6.84            | 10.22           | 1.99                     | 12.21                         | 13.17                 | 15.66                               |         |
| 13            | 5230.0         | 3.90                  | 10.21                  | 3.34                   | -7.33            | 10.12           | 2.95                     | 13.07                         | -7.28            | 10.17           | 1.99                     | 12.16                         | 13.16                 | 15.65                               |         |
| 14            | 5230.0         | 3.90                  | 10.21                  | 3.46                   | -7.68            | 9.89            | 2.95                     | 12.84                         | -7.24            | 10.33           | 1.99                     | 12.32                         | 13.13                 | 15.60                               |         |
| 15            | 5230.0         | 3.90                  | 10.21                  | 3.59                   | -7.84            | 9.86            | 2.95                     | 12.81                         | -7.32            | 10.38           | 1.99                     | 12.37                         | 13.14                 | 15.61                               |         |

\*: Worst rate

Sample Calculation:    Result = Duty factor + Reading

Result (e.i.r.p.) = Result + Antenna Gain

Total Result = 10 \* log (10 ^ (Result (Antenna 0) / 10) + 10 ^ (Result (Antenna 1) / 10))

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
 Date                         January 9, 2019  
 Temperature / Humidity   26 deg. C / 42 % RH  
 Engineer                  Yosuke Ishikawa  
 Mode                        Tx, IEEE802.11ac VHT40 (MIMO), PN9, 5190 MHz

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Antenna 0        |                 |                          |                               | Antenna 1        |                 |                          |                               | Antenna 0 + 1         |                                     | Remarks |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-----------------------|-------------------------------------|---------|
|               |                |                       |                        |                        | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |         |
| 0             | 5190.0         | 3.89                  | 10.21                  | 1.02                   | -9.14            | 5.98            | 2.95                     | 8.93                          | -8.88            | 6.24            | 1.99                     | 8.23                          | 9.12                  | 11.60                               |         |
| 1             | 5190.0         | 3.89                  | 10.21                  | 1.66                   | -9.85            | 5.91            | 2.95                     | 8.86                          | -9.64            | 6.12            | 1.99                     | 8.11                          | 9.03                  | 11.51                               |         |
| 2             | 5190.0         | 3.89                  | 10.21                  | 2.10                   | -10.28           | 5.92            | 2.95                     | 8.87                          | -10.00           | 6.20            | 1.99                     | 8.19                          | 9.07                  | 11.55                               |         |
| 3             | 5190.0         | 3.89                  | 10.21                  | 2.45                   | -10.45           | 6.10            | 2.95                     | 9.05                          | -10.17           | 6.38            | 1.99                     | 8.37                          | 9.25                  | 11.73                               |         |
| 4             | 5190.0         | 3.89                  | 10.21                  | 2.87                   | -10.92           | 6.05            | 2.95                     | 9.00                          | -10.51           | 6.46            | 1.99                     | 8.45                          | <b>9.27</b>           | <b>11.74</b>                        | *       |
| 5             | 5190.0         | 3.89                  | 10.21                  | 3.24                   | -11.30           | 6.04            | 2.95                     | 8.99                          | -10.99           | 6.35            | 1.99                     | 8.34                          | 9.21                  | 11.69                               |         |
| 6             | 5190.0         | 3.89                  | 10.21                  | 3.39                   | -11.61           | 5.88            | 2.95                     | 8.83                          | -11.07           | 6.42            | 1.99                     | 8.41                          | 9.17                  | 11.63                               |         |
| 7             | 5190.0         | 3.89                  | 10.21                  | 3.46                   | -11.73           | 5.83            | 2.95                     | 8.78                          | -11.14           | 6.42            | 1.99                     | 8.41                          | 9.14                  | 11.61                               |         |
| 8             | 5190.0         | 3.89                  | 10.21                  | 3.58                   | -11.88           | 5.80            | 2.95                     | 8.75                          | -11.25           | 6.43            | 1.99                     | 8.42                          | 9.14                  | 11.60                               |         |
| 9             | 5190.0         | 3.89                  | 10.21                  | 3.74                   | -11.98           | 5.86            | 2.95                     | 8.81                          | -11.42           | 6.42            | 1.99                     | 8.41                          | 9.16                  | 11.63                               |         |

\*: Worst rate

Sample Calculation:    Result = Duty factor + Reading  
                           Result (e.i.r.p.) = Result + Antenna Gain  
                           Total Result = 10 \* log (10 ^ (Result (Antenna 0) / 10) + 10 ^ (Result (Antenna 1) / 10))

Test place                   Shonan EMC Lab. No.1 Measurement Room  
 Date                         January 9, 2019  
 Temperature / Humidity   26 deg. C / 42 % RH  
 Engineer                  Yosuke Ishikawa  
 Mode                        Tx, IEEE802.11ac VHT40 (MIMO), PN9, 5230 - 5795 MHz

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Antenna 0        |                 |                          |                               | Antenna 1        |                 |                          |                               | Antenna 0 + 1         |                                     | Remarks |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-----------------------|-------------------------------------|---------|
|               |                |                       |                        |                        | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |         |
| 0             | 5230.0         | 3.90                  | 10.21                  | 1.02                   | -5.15            | 9.98            | 2.95                     | 12.93                         | -4.94            | 10.19           | 1.99                     | 12.18                         | 13.10                 | 15.58                               |         |
| 1             | 5230.0         | 3.90                  | 10.21                  | 1.66                   | -5.88            | 9.89            | 2.95                     | 12.84                         | -5.61            | 10.16           | 1.99                     | 12.15                         | 13.04                 | 15.52                               |         |
| 2             | 5230.0         | 3.90                  | 10.21                  | 2.10                   | -6.27            | 9.94            | 2.95                     | 12.89                         | -6.11            | 10.10           | 1.99                     | 12.09                         | 13.03                 | 15.52                               |         |
| 3             | 5230.0         | 3.90                  | 10.21                  | 2.45                   | -6.47            | 10.09           | 2.95                     | 13.04                         | -6.28            | 10.28           | 1.99                     | 12.27                         | 13.20                 | 15.68                               |         |
| 4             | 5230.0         | 3.90                  | 10.21                  | 2.87                   | -6.88            | 10.10           | 2.95                     | 13.05                         | -6.55            | 10.43           | 1.99                     | 12.42                         | 13.28                 | 15.76                               |         |
| 5             | 5230.0         | 3.90                  | 10.21                  | 3.24                   | -7.31            | 10.04           | 2.95                     | 12.99                         | -6.91            | 10.44           | 1.99                     | 12.43                         | 13.26                 | 15.73                               |         |
| 6             | 5230.0         | 3.90                  | 10.21                  | 3.39                   | -7.46            | 10.04           | 2.95                     | 12.99                         | -6.23            | 11.27           | 1.99                     | 13.26                         | <b>13.71</b>          | <b>16.14</b>                        | *       |
| 7             | 5230.0         | 3.90                  | 10.21                  | 3.46                   | -7.75            | 9.82            | 2.95                     | 12.77                         | -7.20            | 10.37           | 1.99                     | 12.36                         | 13.11                 | 15.58                               |         |
| 8             | 5230.0         | 3.90                  | 10.21                  | 3.58                   | -7.58            | 10.11           | 2.95                     | 13.06                         | -7.36            | 10.33           | 1.99                     | 12.32                         | 13.23                 | 15.72                               |         |
| 9             | 5230.0         | 3.90                  | 10.21                  | 3.74                   | -8.01            | 9.84            | 2.95                     | 12.79                         | -7.44            | 10.41           | 1.99                     | 12.40                         | 13.14                 | 15.61                               |         |

\*: Worst rate

Sample Calculation:    Result = Duty factor + Reading  
                           Result (e.i.r.p.) = Result + Antenna Gain  
                           Total Result = 10 \* log (10 ^ (Result (Antenna 0) / 10) + 10 ^ (Result (Antenna 1) / 10))

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

|                        |   |
|------------------------|---|
| Test place             | Shonan EMC Lab. No.1 Measurement Room               |
| Date                   | January 8, 2019                                     |
| Temperature / Humidity | 24 deg. C / 54 % RH                                 |
| Engineer               | Yosuke Ishikawa                                     |
| Mode                   | Tx, IEEE802.11ac VHT80 (SISO), PN9, 5210 - 5290 MHz |

### [Pre check]

#### Antenna 0

| Data rate | Freq.  | P/M (AV)<br>Reading | Cable<br>Loss | Atten.<br>Loss | Duty<br>factor | Result | Antenna<br>Gain | Result<br>(e.i.r.p.) | Remarks |
|-----------|--------|---------------------|---------------|----------------|----------------|--------|-----------------|----------------------|---------|
| [Mbps]    | [MHz]  | [dBm]               | [dB]          | [dB]           | [dB]           | [dBm]  | [dBi]           | [dBm]                |         |
| 0         | 5210.0 | -7.43               | 3.89          | 10.21          | 1.09           | 7.76   | 2.95            | 10.71                |         |
| 1         | 5210.0 | -8.15               | 3.89          | 10.21          | 1.76           | 7.71   | 2.95            | 10.66                |         |
| 2         | 5210.0 | -8.58               | 3.89          | 10.21          | 2.22           | 7.74   | 2.95            | 10.69                |         |
| 3         | 5210.0 | -8.68               | 3.89          | 10.21          | 2.55           | 7.97   | 2.95            | 10.92                |         |
| 4         | 5210.0 | -9.06               | 3.89          | 10.21          | 3.01           | 8.05   | 2.95            | 11.00                |         |
| 5         | 5210.0 | -9.33               | 3.89          | 10.21          | 3.33           | 8.10   | 2.95            | <b>11.05</b>         |         |
| 6         | 5210.0 | -9.55               | 3.89          | 10.21          | 3.45           | 8.00   | 2.95            | 10.95                |         |
| 7         | 5210.0 | -9.60               | 3.89          | 10.21          | 3.55           | 8.05   | 2.95            | 11.00                |         |
| 8         | 5210.0 | -9.88               | 3.89          | 10.21          | 3.68           | 7.90   | 2.95            | 10.85                |         |
| 9         | 5210.0 | -9.97               | 3.89          | 10.21          | 3.82           | 7.95   | 2.95            | 10.90                |         |

#### Antenna 1

| Data rate | Freq.  | P/M (AV)<br>Reading | Cable<br>Loss | Atten.<br>Loss | Duty<br>factor | Result      | Antenna<br>Gain | Result<br>(e.i.r.p.) | Remarks |
|-----------|--------|---------------------|---------------|----------------|----------------|-------------|-----------------|----------------------|---------|
| [Mbps]    | [MHz]  | [dBm]               | [dB]          | [dB]           | [dB]           | [dBm]       | [dBi]           | [dBm]                |         |
| 0         | 5210.0 | -7.18               | 3.89          | 10.21          | 1.09           | 8.01        | 1.99            | 10.00                |         |
| 1         | 5210.0 | -7.90               | 3.89          | 10.21          | 1.76           | 7.96        | 1.99            | 9.95                 |         |
| 2         | 5210.0 | -8.58               | 3.89          | 10.21          | 2.22           | 7.74        | 1.99            | 9.73                 |         |
| 3         | 5210.0 | -8.51               | 3.89          | 10.21          | 2.55           | 8.14        | 1.99            | 10.13                |         |
| 4         | 5210.0 | -9.05               | 3.89          | 10.21          | 3.01           | 8.06        | 1.99            | 10.05                |         |
| 5         | 5210.0 | -9.18               | 3.89          | 10.21          | 3.33           | <b>8.25</b> | 1.99            | 10.24                | *       |
| 6         | 5210.0 | -9.31               | 3.89          | 10.21          | 3.45           | 8.24        | 1.99            | 10.23                |         |
| 7         | 5210.0 | -9.58               | 3.89          | 10.21          | 3.55           | 8.07        | 1.99            | 10.06                |         |
| 8         | 5210.0 | -9.61               | 3.89          | 10.21          | 3.68           | 8.17        | 1.99            | 10.16                |         |
| 9         | 5210.0 | -9.82               | 3.89          | 10.21          | 3.82           | 8.10        | 1.99            | 10.09                |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power

Test place                      Shonan EMC Lab. No.1 Measurement Room  
Date                                February 16, 2019  
Temperature / Humidity        23 deg. C / 44 % RH  
Engineer                         Yosuke Ishikawa  
Mode                                Tx, IEEE802.11ac VHT80 (SISO), PN9, 5530 MHz

**[Pre check]**

**Antenna 0**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5530.0         | -5.05                        | 3.97                  | 10.22                  | 1.09                   | 10.23           | 2.95                     | 13.18                         |         |
| 1                   | 5530.0         | -5.78                        | 3.97                  | 10.22                  | 1.76                   | 10.17           | 2.95                     | 13.12                         |         |
| 2                   | 5530.0         | -6.47                        | 3.97                  | 10.22                  | 2.22                   | 9.94            | 2.95                     | 12.89                         |         |
| 3                   | 5530.0         | -6.44                        | 3.97                  | 10.22                  | 2.55                   | 10.30           | 2.95                     | 13.25                         |         |
| 4                   | 5530.0         | -6.88                        | 3.97                  | 10.22                  | 3.01                   | 10.32           | 2.95                     | 13.27                         |         |
| 5                   | 5530.0         | -7.18                        | 3.97                  | 10.22                  | 3.33                   | 10.34           | 2.95                     | <b>13.29</b>                  |         |
| 6                   | 5530.0         | -7.36                        | 3.97                  | 10.22                  | 3.45                   | 10.28           | 2.95                     | 13.23                         |         |
| 7                   | 5530.0         | -7.44                        | 3.97                  | 10.22                  | 3.55                   | 10.30           | 2.95                     | 13.25                         |         |
| 8                   | 5530.0         | -7.55                        | 3.97                  | 10.22                  | 3.68                   | 10.32           | 2.95                     | 13.27                         |         |
| 9                   | 5530.0         | -7.71                        | 3.97                  | 10.22                  | 3.82                   | 10.30           | 2.95                     | 13.25                         |         |

**Antenna 1**

| Data rate<br>[Mbps] | Freq.<br>[MHz] | P/M (AV)<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Remarks |
|---------------------|----------------|------------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------|-------------------------------|---------|
| 0                   | 5530.0         | -4.58                        | 3.97                  | 10.22                  | 1.09                   | 10.70           | 1.99                     | 12.69                         |         |
| 1                   | 5530.0         | -5.41                        | 3.97                  | 10.22                  | 1.76                   | 10.54           | 1.99                     | 12.53                         |         |
| 2                   | 5530.0         | -5.86                        | 3.97                  | 10.22                  | 2.22                   | 10.55           | 1.99                     | 12.54                         |         |
| 3                   | 5530.0         | -5.75                        | 3.97                  | 10.22                  | 2.55                   | 10.99           | 1.99                     | 12.98                         |         |
| 4                   | 5530.0         | -6.27                        | 3.97                  | 10.22                  | 3.01                   | 10.93           | 1.99                     | 12.92                         |         |
| 5                   | 5530.0         | -6.45                        | 3.97                  | 10.22                  | 3.33                   | <b>11.07</b>    | 1.99                     | 13.06                         | *       |
| 6                   | 5530.0         | -6.65                        | 3.97                  | 10.22                  | 3.45                   | 10.99           | 1.99                     | 12.98                         |         |
| 7                   | 5530.0         | -6.73                        | 3.97                  | 10.22                  | 3.55                   | 11.01           | 1.99                     | 13.00                         |         |
| 8                   | 5530.0         | -6.90                        | 3.97                  | 10.22                  | 3.68                   | 10.97           | 1.99                     | 12.96                         |         |
| 9                   | 5530.0         | -7.04                        | 3.97                  | 10.22                  | 3.82                   | 10.97           | 1.99                     | 12.96                         |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

## Maximum Conducted Output Power

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab. No.1 Measurement Room        |
| Date                   | February 16, 2019                            |
| Temperature / Humidity | 23 deg. C / 44 % RH                          |
| Engineer               | Yosuke Ishikawa                              |
| Mode                   | Tx, IEEE802.11ac VHT80 (SISO), PN9, 5775 MHz |

### [Pre check]

#### Antenna 0

| Data rate | Freq.  | P/M (AV)<br>Reading | Cable<br>Loss | Atten.<br>Loss | Duty<br>factor | Result       | Antenna<br>Gain | Result<br>(e.i.r.p.) | Remarks |
|-----------|--------|---------------------|---------------|----------------|----------------|--------------|-----------------|----------------------|---------|
| [Mbps]    | [MHz]  | [dBm]               | [dB]          | [dB]           | [dB]           | [dBm]        | [dBi]           | [dBm]                |         |
| 0         | 5775.0 | -3.21               | 4.00          | 10.24          | 1.09           | 12.12        | 2.95            | 15.07                |         |
| 1         | 5775.0 | -3.93               | 4.00          | 10.24          | 1.76           | 12.07        | 2.95            | 15.02                |         |
| 2         | 5775.0 | -4.36               | 4.00          | 10.24          | 2.22           | 12.10        | 2.95            | 15.05                |         |
| 3         | 5775.0 | -4.34               | 4.00          | 10.24          | 2.55           | 12.45        | 2.95            | 15.40                |         |
| 4         | 5775.0 | -4.71               | 4.00          | 10.24          | 3.01           | 12.54        | 2.95            | 15.49                |         |
| 5         | 5775.0 | -5.02               | 4.00          | 10.24          | 3.33           | <b>12.55</b> | 2.95            | <b>15.50</b>         | *       |
| 6         | 5775.0 | -5.18               | 4.00          | 10.24          | 3.45           | 12.51        | 2.95            | 15.46                |         |
| 7         | 5775.0 | -5.34               | 4.00          | 10.24          | 3.55           | 12.45        | 2.95            | 15.40                |         |
| 8         | 5775.0 | -7.25               | 4.00          | 10.24          | 3.68           | 10.67        | 2.95            | 13.62                |         |
| 9         | 5775.0 | -7.44               | 4.00          | 10.24          | 3.82           | 10.62        | 2.95            | 13.57                |         |

#### Antenna 1

| Data rate | Freq.  | P/M (AV)<br>Reading | Cable<br>Loss | Atten.<br>Loss | Duty<br>factor | Result | Antenna<br>Gain | Result<br>(e.i.r.p.) | Remarks |
|-----------|--------|---------------------|---------------|----------------|----------------|--------|-----------------|----------------------|---------|
| [Mbps]    | [MHz]  | [dBm]               | [dB]          | [dB]           | [dB]           | [dBm]  | [dBi]           | [dBm]                |         |
| 0         | 5775.0 | -3.54               | 4.00          | 10.24          | 1.09           | 11.79  | 1.99            | 13.78                |         |
| 1         | 5775.0 | -4.21               | 4.00          | 10.24          | 1.76           | 11.79  | 1.99            | 13.78                |         |
| 2         | 5775.0 | -4.63               | 4.00          | 10.24          | 2.22           | 11.83  | 1.99            | 13.82                |         |
| 3         | 5775.0 | -4.68               | 4.00          | 10.24          | 2.55           | 12.11  | 1.99            | 14.10                |         |
| 4         | 5775.0 | -5.11               | 4.00          | 10.24          | 3.01           | 12.14  | 1.99            | 14.13                |         |
| 5         | 5775.0 | -5.41               | 4.00          | 10.24          | 3.33           | 12.16  | 1.99            | 14.15                |         |
| 6         | 5775.0 | -5.54               | 4.00          | 10.24          | 3.45           | 12.15  | 1.99            | 14.14                |         |
| 7         | 5775.0 | -5.69               | 4.00          | 10.24          | 3.55           | 12.10  | 1.99            | 14.09                |         |
| 8         | 5775.0 | -7.62               | 4.00          | 10.24          | 3.68           | 10.30  | 1.99            | 12.29                |         |
| 9         | 5775.0 | -7.74               | 4.00          | 10.24          | 3.82           | 10.32  | 1.99            | 12.31                |         |

\*: Worst rate

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Maximum Conducted Output Power

Test place                   Shonan EMC Lab. No.1 Measurement Room  
Date                            January 9, 2019  
Temperature / Humidity    26 deg. C / 42 % RH  
Engineer                    Yosuke Ishikawa  
Mode                         Tx, IEEE802.11ac VHT80 (MIMO), PN9, 5210 - 5290 MHz

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Antenna 0        |                 |                          | Antenna 1                     |                  |                 | Antenna 0 + 1            |                               | Remarks     |                       |                                     |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|-------------|-----------------------|-------------------------------------|
|               |                |                       |                        |                        | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] |             | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |
| 0             | 5210.0         | 3.89                  | 10.21                  | 1.73                   | -11.19           | 4.64            | 2.95                     | 7.59                          | -10.88           | 4.95            | 1.99                     | 6.94                          | 7.81        | 10.29                 |                                     |
| 1             | 5210.0         | 3.89                  | 10.21                  | 2.50                   | -12.04           | 4.56            | 2.95                     | 7.51                          | -11.78           | 4.82            | 1.99                     | 6.81                          | 7.70        | 10.18                 |                                     |
| 2             | 5210.0         | 3.89                  | 10.21                  | 2.93                   | -12.50           | 4.53            | 2.95                     | 7.48                          | -12.28           | 4.75            | 1.99                     | 6.74                          | 7.65        | 10.14                 |                                     |
| 3             | 5210.0         | 3.89                  | 10.21                  | 3.20                   | -12.44           | 4.86            | 2.95                     | 7.81                          | -12.25           | 5.05            | 1.99                     | 7.04                          | 7.97        | 10.45                 |                                     |
| 4             | 5210.0         | 3.89                  | 10.21                  | 3.56                   | -12.94           | 4.72            | 2.95                     | 7.67                          | -12.51           | 5.15            | 1.99                     | 7.14                          | 7.95        | 10.42                 |                                     |
| 5             | 5210.0         | 3.89                  | 10.21                  | 3.84                   | -13.10           | 4.84            | 2.95                     | 7.79                          | -12.78           | 5.16            | 1.99                     | 7.15                          | <b>8.01</b> | <b>10.49</b>          | *                                   |
| 6             | 5210.0         | 3.89                  | 10.21                  | 3.89                   | -13.09           | 4.90            | 2.95                     | 7.85                          | -12.93           | 5.06            | 1.99                     | 7.05                          | 7.99        | 10.48                 |                                     |
| 7             | 5210.0         | 3.89                  | 10.21                  | 4.00                   | -13.31           | 4.79            | 2.95                     | 7.74                          | -12.94           | 5.16            | 1.99                     | 7.15                          | 7.99        | 10.46                 |                                     |
| 8             | 5210.0         | 3.89                  | 10.21                  | 4.00                   | -13.32           | 4.78            | 2.95                     | 7.73                          | -12.98           | 5.12            | 1.99                     | 7.11                          | 7.97        | 10.44                 |                                     |
| 9             | 5210.0         | 3.89                  | 10.21                  | 4.22                   | -13.53           | 4.79            | 2.95                     | 7.74                          | -13.47           | 4.85            | 1.99                     | 6.84                          | 7.83        | 10.32                 |                                     |

\*: Worst rate

Sample Calculation:    Result = Duty factor + Reading  
Result (e.i.r.p.) = Result + Antenna Gain  
Total Result = 10 \* log (10 ^ (Result (Antenna 0) / 10) + 10 ^ (Result (Antenna 1) / 10))

Test place                   Shonan EMC Lab. No.1 Measurement Room  
Date                            February 16, 2019  
Temperature / Humidity    23 deg. C / 52 % RH  
Engineer                    Yosuke Ishikawa  
Mode                         Tx, IEEE802.11ac VHT80 (MIMO), PN9, 5530 MHz / 5775 MHz

[Pre check]

| Mode<br>(MCS) | Freq.<br>[MHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Duty<br>factor<br>[dB] | Antenna 0        |                 |                          | Antenna 1                     |                  |                 | Antenna 0 + 1            |                               | Remarks      |                       |                                     |
|---------------|----------------|-----------------------|------------------------|------------------------|------------------|-----------------|--------------------------|-------------------------------|------------------|-----------------|--------------------------|-------------------------------|--------------|-----------------------|-------------------------------------|
|               |                |                       |                        |                        | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] | Reading<br>[dBm] | Result<br>[dBm] | Antenna<br>Gain<br>[dBi] | Result<br>(e.i.r.p.)<br>[dBm] |              | Total Result<br>[dBm] | Total Result<br>(e.i.r.p.)<br>[dBm] |
| 0             | 5530.0         | 3.97                  | 10.22                  | 1.73                   | -9.32            | 6.60            | 2.95                     | 9.55                          | -8.73            | 7.19            | 1.99                     | 9.18                          | 9.92         | 12.38                 |                                     |
| 1             | 5530.0         | 3.97                  | 10.22                  | 2.50                   | -10.15           | 6.54            | 2.95                     | 9.49                          | -9.57            | 7.12            | 1.99                     | 9.11                          | 9.85         | 12.31                 |                                     |
| 2             | 5530.0         | 3.97                  | 10.22                  | 2.93                   | -10.69           | 6.43            | 2.95                     | 9.38                          | -9.97            | 7.15            | 1.99                     | 9.14                          | 9.81         | 12.27                 |                                     |
| 3             | 5530.0         | 3.97                  | 10.22                  | 3.20                   | -10.53           | 6.86            | 2.95                     | 9.81                          | -10.06           | 7.33            | 1.99                     | 9.32                          | 10.11        | 12.58                 |                                     |
| 4             | 5530.0         | 3.97                  | 10.22                  | 3.56                   | -10.92           | 6.83            | 2.95                     | 9.78                          | -10.40           | 7.35            | 1.99                     | 9.34                          | 10.11        | 12.58                 |                                     |
| 5             | 5530.0         | 3.97                  | 10.22                  | 3.84                   | -11.18           | 6.85            | 2.95                     | 9.80                          | -10.66           | 7.37            | 1.99                     | 9.36                          | 10.13        | 12.60                 |                                     |
| 6             | 5530.0         | 3.97                  | 10.22                  | 3.89                   | -11.21           | 6.87            | 2.95                     | 9.82                          | -10.71           | 7.37            | 1.99                     | 9.36                          | <b>10.14</b> | <b>12.61</b>          | *                                   |
| 7             | 5530.0         | 3.97                  | 10.22                  | 4.00                   | -11.35           | 6.84            | 2.95                     | 9.79                          | -10.83           | 7.36            | 1.99                     | 9.35                          | 10.12        | 12.59                 |                                     |
| 8             | 5530.0         | 3.97                  | 10.22                  | 4.00                   | -11.38           | 6.81            | 2.95                     | 9.76                          | -10.90           | 7.29            | 1.99                     | 9.28                          | 10.07        | 12.54                 |                                     |
| 9             | 5530.0         | 3.97                  | 10.22                  | 4.22                   | -11.56           | 6.85            | 2.95                     | 9.80                          | -11.09           | 7.32            | 1.99                     | 9.31                          | 10.10        | 12.57                 |                                     |

\*: Worst rate

Sample Calculation:    Result = Duty factor + Reading  
Result (e.i.r.p.) = Result + Antenna Gain  
Total Result = 10 \* log (10 ^ (Result (Antenna 0) / 10) + 10 ^ (Result (Antenna 1) / 10))

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Average Output Power (Reference data)

|                        |  |                     |
|------------------------|--|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room      |                     |
| Date                   | January 8, 2019                            | February 16, 2019   |
| Temperature / Humidity | 22 deg. C / 50 % RH                        | 23 deg. C / 44 % RH |
| Engineer               | Kazutaka Takeyama                          | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11a, PN9, worst antenna port 0 |                     |

| Tested<br>Frequency<br>[MHz] | Power<br>Meter<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Result<br>(Timed average) |       | Duty<br>factor<br>[dB] | Result<br>(Burst power average) |       |
|------------------------------|------------------------------------|-----------------------|------------------------|---------------------------|-------|------------------------|---------------------------------|-------|
|                              |                                    |                       |                        | [dBm]                     | [mW]  |                        | [dBm]                           | [mW]  |
| 5180                         | -1.20                              | 3.89                  | 10.21                  | 12.90                     | 19.50 | 0.28                   | 13.18                           | 20.80 |
| 5220                         | -1.16                              | 3.90                  | 10.21                  | 12.95                     | 19.72 | 0.28                   | 13.23                           | 21.04 |
| 5240                         | -1.02                              | 3.90                  | 10.21                  | 13.09                     | 20.37 | 0.28                   | 13.37                           | 21.73 |
| 5260                         | -0.89                              | 3.91                  | 10.21                  | 13.23                     | 21.04 | 0.28                   | 13.51                           | 22.44 |
| 5300                         | -0.81                              | 3.92                  | 10.21                  | 13.32                     | 21.48 | 0.28                   | 13.60                           | 22.91 |
| 5320                         | -0.71                              | 3.92                  | 10.21                  | 13.42                     | 21.98 | 0.28                   | 13.70                           | 23.44 |
| 5500                         | -0.97                              | 3.97                  | 10.22                  | 13.22                     | 20.99 | 0.28                   | 13.50                           | 22.39 |
| 5580                         | -1.14                              | 3.98                  | 10.22                  | 13.06                     | 20.23 | 0.28                   | 13.34                           | 21.58 |
| 5700                         | -1.06                              | 3.99                  | 10.23                  | 13.16                     | 20.70 | 0.28                   | 13.44                           | 22.08 |
| 5745                         | -2.03                              | 4.00                  | 10.23                  | 12.20                     | 16.60 | 0.28                   | 12.48                           | 17.70 |
| 5785                         | -2.27                              | 4.00                  | 10.24                  | 11.97                     | 15.74 | 0.28                   | 12.25                           | 16.79 |
| 5825                         | -2.26                              | 4.01                  | 10.24                  | 11.99                     | 15.81 | 0.28                   | 12.27                           | 16.87 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Average Output Power (Reference data)

|                        |  |                     |
|------------------------|--|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room                  |                     |
| Date                   | January 8, 2019  | February 16, 2019   |
| Temperature / Humidity | 22 deg. C / 50 % RH                                    | 23 deg. C / 44 % RH |
| Engineer               | Kazutaka Takeyama                                      | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT20 (SISO), PN9, worst antenna port 0 |                     |

| Tested<br>Frequency<br>[MHz] | Power<br>Meter<br>Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Result<br>(Timed average) |       | Duty<br>factor<br>[dB] | Result<br>(Burst power average) |       |
|------------------------------|------------------------------------|-----------------------|------------------------|---------------------------|-------|------------------------|---------------------------------|-------|
|                              |                                    |                       |                        | [dBm]                     | [mW]  |                        | [dBm]                           | [mW]  |
| 5180                         | -1.21                              | 3.89                  | 10.21                  | 12.89                     | 19.45 | 0.30                   | 13.19                           | 20.84 |
| 5220                         | -1.26                              | 3.90                  | 10.21                  | 12.85                     | 19.28 | 0.30                   | 13.15                           | 20.65 |
| 5240                         | -1.24                              | 3.90                  | 10.21                  | 12.87                     | 19.36 | 0.30                   | 13.17                           | 20.75 |
| 5260                         | -0.81                              | 3.91                  | 10.21                  | 13.31                     | 21.43 | 0.30                   | 13.61                           | 22.96 |
| 5300                         | -0.76                              | 3.92                  | 10.21                  | 13.37                     | 21.73 | 0.30                   | 13.67                           | 23.28 |
| 5320                         | -0.66                              | 3.92                  | 10.21                  | 13.47                     | 22.23 | 0.30                   | 13.77                           | 23.82 |
| 5500                         | -1.24                              | 3.97                  | 10.22                  | 12.95                     | 19.72 | 0.30                   | 13.25                           | 21.13 |
| 5580                         | -1.42                              | 3.98                  | 10.22                  | 12.78                     | 18.97 | 0.30                   | 13.08                           | 20.32 |
| 5700                         | -1.33                              | 3.99                  | 10.23                  | 12.89                     | 19.45 | 0.30                   | 13.19                           | 20.84 |
| 5745                         | -2.08                              | 4.00                  | 10.23                  | 12.15                     | 16.41 | 0.30                   | 12.45                           | 17.58 |
| 5785                         | -2.19                              | 4.00                  | 10.24                  | 12.05                     | 16.03 | 0.30                   | 12.35                           | 17.18 |
| 5825                         | -2.20                              | 4.01                  | 10.24                  | 12.05                     | 16.03 | 0.30                   | 12.35                           | 17.18 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Average Output Power**  
**(Reference data)**

|                        |  |                     |
|------------------------|--|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room                    |                     |
| Date                   | January 8, 2019  | February 16, 2019   |
| Temperature / Humidity | 22 deg. C / 50 % RH                                      | 23 deg. C / 44 % RH |
| Engineer               | Kazutaka Takeyama  | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11ac VHT20 (SISO), PN9, worst antenna port 0 |                     |

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average) |       | Duty factor<br>[dB] | Result (Burst power average) |       |
|---------------------------|------------------------------|--------------------|---------------------|------------------------|-------|---------------------|------------------------------|-------|
|                           |                              |                    |                     | [dBm]                  | [mW]  |                     | [dBm]                        | [mW]  |
| 5180                      | -1.22                        | 3.89               | 10.21               | 12.88                  | 19.41 | 0.30                | 13.18                        | 20.80 |
| 5220                      | -1.26                        | 3.90               | 10.21               | 12.85                  | 19.28 | 0.30                | 13.15                        | 20.65 |
| 5240                      | -1.23                        | 3.90               | 10.21               | 12.88                  | 19.41 | 0.30                | 13.18                        | 20.80 |
| 5260                      | -1.08                        | 3.91               | 10.21               | 13.04                  | 20.14 | 0.30                | 13.34                        | 21.58 |
| 5300                      | -0.71                        | 3.92               | 10.21               | 13.42                  | 21.98 | 0.30                | 13.72                        | 23.55 |
| 5320                      | -0.63                        | 3.92               | 10.21               | 13.50                  | 22.39 | 0.30                | 13.80                        | 23.99 |
| 5500                      | -1.17                        | 3.97               | 10.22               | 13.02                  | 20.04 | 0.30                | 13.32                        | 21.48 |
| 5580                      | -1.41                        | 3.98               | 10.22               | 12.79                  | 19.01 | 0.30                | 13.09                        | 20.37 |
| 5700                      | -1.29                        | 3.99               | 10.23               | 12.93                  | 19.63 | 0.30                | 13.23                        | 21.04 |
| 5745                      | -2.04                        | 4.00               | 10.23               | 12.19                  | 16.56 | 0.30                | 12.49                        | 17.74 |
| 5785                      | -2.31                        | 4.00               | 10.24               | 11.93                  | 15.60 | 0.30                | 12.23                        | 16.71 |
| 5825                      | -2.22                        | 4.01               | 10.24               | 12.03                  | 15.96 | 0.30                | 12.33                        | 17.10 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**Average Output Power**  
**(Reference data)**

|                        |                                       |                     |
|------------------------|---------------------------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |
| Date                   | January 10, 2019                      | January 16, 2019    |
| Temperature / Humidity | 23 deg. C / 51 % RH                   | 23 deg. C / 52 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO), PN9      |                     |

| Tested Frequency [MHz] | Antenna 0                 |                 |                  |                              | Antenna 1                 |                 |                  |                              | Antenna 0+1            |           |       |       |
|------------------------|---------------------------|-----------------|------------------|------------------------------|---------------------------|-----------------|------------------|------------------------------|------------------------|-----------|-------|-------|
|                        | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Result (Timed average) [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Result (Timed average) [dBm] | Result (Timed average) |           | Sum   |       |
|                        |                           |                 |                  |                              |                           |                 |                  |                              | Antenna 1              | Antenna 2 | 1+2   | 1+2   |
|                        | [dBm]                     | [dB]            | [dB]             | [dBm]                        | [dBm]                     | [dB]            | [dB]             | [dBm]                        | [mW]                   | [mW]      | [mW]  | [dBm] |
| 5180                   | -4.76                     | 3.89            | 10.21            | 9.34                         | -3.94                     | 3.89            | 10.21            | 10.16                        | 8.59                   | 10.38     | 18.97 | 12.78 |
| 5220                   | -4.72                     | 3.90            | 10.21            | 9.39                         | -4.40                     | 3.90            | 10.21            | 9.71                         | 8.69                   | 9.35      | 18.04 | 12.56 |
| 5240                   | -4.57                     | 3.90            | 10.21            | 9.54                         | -4.62                     | 3.90            | 10.21            | 9.49                         | 8.99                   | 8.89      | 17.89 | 12.53 |
| 5260                   | -4.70                     | 3.91            | 10.21            | 9.42                         | -4.39                     | 3.91            | 10.21            | 9.73                         | 8.75                   | 9.40      | 18.15 | 12.59 |
| 5300                   | -4.52                     | 3.92            | 10.21            | 9.61                         | -4.30                     | 3.92            | 10.21            | 9.83                         | 9.14                   | 9.62      | 18.76 | 12.73 |
| 5320                   | -4.40                     | 3.92            | 10.21            | 9.73                         | -4.25                     | 3.92            | 10.21            | 9.88                         | 9.40                   | 9.73      | 19.12 | 12.82 |
| 5500                   | -4.76                     | 3.97            | 10.22            | 9.43                         | -4.21                     | 3.97            | 10.22            | 9.98                         | 8.77                   | 9.95      | 18.72 | 12.72 |
| 5580                   | -4.90                     | 3.98            | 10.22            | 9.30                         | -4.46                     | 3.98            | 10.22            | 9.74                         | 8.51                   | 9.42      | 17.93 | 12.54 |
| 5700                   | -4.69                     | 3.99            | 10.23            | 9.53                         | -4.71                     | 3.99            | 10.23            | 9.51                         | 8.97                   | 8.93      | 17.91 | 12.53 |
| 5745                   | -4.54                     | 4.00            | 10.23            | 9.69                         | -4.82                     | 4.00            | 10.23            | 9.41                         | 9.31                   | 8.73      | 18.04 | 12.56 |
| 5785                   | -4.49                     | 4.00            | 10.24            | 9.75                         | -4.63                     | 4.00            | 10.24            | 9.61                         | 9.44                   | 9.14      | 18.58 | 12.69 |
| 5825                   | -4.50                     | 4.01            | 10.24            | 9.75                         | -4.34                     | 4.01            | 10.24            | 9.91                         | 9.44                   | 9.79      | 19.24 | 12.84 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

## Average Output Power (Reference data)

|                        |                                       |                     |  |
|------------------------|---------------------------------------|---------------------|--|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |  |
| Date                   | January 10, 2019                      | January 16, 2019    |  |
| Temperature / Humidity | 23 deg. C / 51 % RH                   | 23 deg. C / 52 % RH |  |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     |  |
| Mode                   | Tx, IEEE802.11ac VHT20 (MIMO), PN9    |                     |  |

| Tested Frequency<br>[MHz] | Antenna 0                    |                    |                     |                                 | Antenna 1                    |                    |                     |                                 | Antenna 0+1            |      |       |       |
|---------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------|------|-------|-------|
|                           | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Result (Timed average) |      |       |       |
|                           |                              |                    |                     |                                 |                              |                    |                     |                                 | Antenna                |      | Sum   |       |
|                           |                              |                    |                     |                                 |                              |                    |                     | 1                               | 2                      | 1+2  |       |       |
|                           |                              |                    |                     |                                 |                              |                    |                     | [mW]                            | [mW]                   | [mW] | [dBm] |       |
| 5180                      | -4.73                        | 3.89               | 10.21               | 9.37                            | -4.47                        | 3.89               | 10.21               | 9.63                            | 8.65                   | 9.18 | 17.83 | 12.51 |
| 5220                      | -4.73                        | 3.90               | 10.21               | 9.38                            | -4.36                        | 3.90               | 10.21               | 9.75                            | 8.67                   | 9.44 | 18.11 | 12.58 |
| 5240                      | -4.62                        | 3.90               | 10.21               | 9.49                            | -4.61                        | 3.90               | 10.21               | 9.50                            | 8.89                   | 8.91 | 17.80 | 12.51 |
| 5260                      | -4.70                        | 3.91               | 10.21               | 9.42                            | -4.30                        | 3.91               | 10.21               | 9.82                            | 8.75                   | 9.59 | 18.34 | 12.63 |
| 5300                      | -4.56                        | 3.92               | 10.21               | 9.57                            | -4.28                        | 3.92               | 10.21               | 9.85                            | 9.06                   | 9.66 | 18.72 | 12.72 |
| 5320                      | -4.42                        | 3.92               | 10.21               | 9.71                            | -4.31                        | 3.92               | 10.21               | 9.82                            | 9.35                   | 9.59 | 18.95 | 12.78 |
| 5500                      | -4.82                        | 3.97               | 10.22               | 9.37                            | -4.22                        | 3.97               | 10.22               | 9.97                            | 8.65                   | 9.93 | 18.58 | 12.69 |
| 5580                      | -5.00                        | 3.98               | 10.22               | 9.20                            | -4.50                        | 3.98               | 10.22               | 9.70                            | 8.32                   | 9.33 | 17.65 | 12.47 |
| 5700                      | -4.71                        | 3.99               | 10.23               | 9.51                            | -4.72                        | 3.99               | 10.23               | 9.50                            | 8.93                   | 8.91 | 17.85 | 12.52 |
| 5745                      | -4.43                        | 4.00               | 10.23               | 9.80                            | -4.81                        | 4.00               | 10.23               | 9.42                            | 9.55                   | 8.75 | 18.30 | 12.62 |
| 5785                      | -4.59                        | 4.00               | 10.24               | 9.65                            | -4.84                        | 4.00               | 10.24               | 9.40                            | 9.23                   | 8.71 | 17.94 | 12.54 |
| 5825                      | -4.72                        | 4.01               | 10.24               | 9.53                            | -4.43                        | 4.01               | 10.24               | 9.82                            | 8.97                   | 9.59 | 18.57 | 12.69 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Average Output Power (Reference data)

|                        |   |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room   |                     |                     |                     |
| Date                   | January 8, 2019   | January 9, 2019     | January 11, 2019    | February 16, 2019   |
| Temperature / Humidity | 24 deg. C / 54 % RH   | 26 deg. C / 42 % RH | 24 deg. C / 51 % RH | 23 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa   | Yosuke Ishikawa     | Yosuke Ishikawa     | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO), PN9,<br>worst antenna port 1 (5190 MHz), 0 (other channel frequency) |                     |                     |                     |

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average) |       | Duty factor<br>[dB] | Result (Burst power average) |       |
|---------------------------|------------------------------|--------------------|---------------------|------------------------|-------|---------------------|------------------------------|-------|
|                           |                              |                    |                     | [dBm]                  | [mW]  |                     | [dBm]                        | [mW]  |
| 5190                      | -5.30                        | 3.89               | 10.21               | 8.80                   | 7.59  | 0.59                | 9.39                         | 8.69  |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5230                      | -1.91                        | 3.90               | 10.21               | 12.20                  | 16.60 | 0.59                | 12.79                        | 19.01 |
| 5270                      | -1.67                        | 3.91               | 10.21               | 12.45                  | 17.58 | 0.59                | 13.04                        | 20.14 |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5310                      | -1.43                        | 3.92               | 10.21               | 12.70                  | 18.62 | 0.59                | 13.29                        | 21.33 |
| 5510                      | -1.60                        | 3.97               | 10.22               | 12.59                  | 18.16 | 0.59                | 13.18                        | 20.80 |
| 5550                      | -1.89                        | 3.98               | 10.22               | 12.31                  | 17.02 | 0.59                | 12.90                        | 19.50 |
| 5670                      | -1.70                        | 3.99               | 10.23               | 12.52                  | 17.86 | 0.59                | 13.11                        | 20.46 |
| 5755                      | -2.60                        | 4.00               | 10.24               | 11.64                  | 14.59 | 0.59                | 12.23                        | 16.71 |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5795                      | -2.81                        | 4.01               | 10.24               | 11.44                  | 13.93 | 0.59                | 12.03                        | 15.96 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Average Output Power (Reference data)

|                        |   |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room   |                     |                     |                     |
| Date                   | January 8, 2019   | February 11, 2019   | February 16, 2019   | March 11, 2019      |
| Temperature / Humidity | 24 deg. C / 54 % RH   | 24 deg. C / 51 % RH | 23 deg. C / 44 % RH | 22 deg. C / 55 % RH |
| Engineer               | Yosuke Ishikawa   | Yosuke Ishikawa     | Yosuke Ishikawa     | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11ac VHT40 (SISO), PN9,<br>worst antenna port 1 (5190 MHz), 0 (other channel frequency) |                     |                     |                     |

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average) |       | Duty factor<br>[dB] | Result (Burst power average) |       |
|---------------------------|------------------------------|--------------------|---------------------|------------------------|-------|---------------------|------------------------------|-------|
|                           |                              |                    |                     | [dBm]                  | [mW]  |                     | [dBm]                        | [mW]  |
| 5190                      | -5.03                        | 3.89               | 10.21               | 9.07                   | 8.07  | 0.57                | 9.64                         | 9.20  |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5230                      | -1.90                        | 3.90               | 10.21               | 12.21                  | 16.63 | 0.57                | 12.78                        | 18.97 |
| 5270                      | -1.69                        | 3.91               | 10.21               | 12.43                  | 17.50 | 0.57                | 13.00                        | 19.95 |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5310                      | -1.49                        | 3.92               | 10.21               | 12.64                  | 18.37 | 0.57                | 13.21                        | 20.94 |
| 5510                      | -1.63                        | 3.97               | 10.22               | 12.56                  | 18.03 | 0.57                | 13.13                        | 20.56 |
| 5550                      | -1.84                        | 3.98               | 10.22               | 12.36                  | 17.22 | 0.57                | 12.93                        | 19.63 |
| 5670                      | -1.76                        | 3.99               | 10.23               | 12.46                  | 17.62 | 0.57                | 13.03                        | 20.09 |
| 5755                      | -2.57                        | 4.00               | 10.24               | 11.67                  | 14.69 | 0.57                | 12.24                        | 16.75 |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5795                      | -2.75                        | 4.01               | 10.24               | 11.50                  | 14.13 | 0.57                | 12.07                        | 16.11 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



### Average Output Power (Reference data)

|                        |                                       |                     |                     |
|------------------------|---------------------------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |                     |
| Date                   | January 10, 2019                      | January 16, 2019    | March 14, 2019      |
| Temperature / Humidity | 23 deg. C / 51 % RH                   | 23 deg. C / 52 % RH | 22 deg. C / 52 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     | Kazutaka Takeyama   |
| Mode                   | Tx, IEEE802.11n HT40 (MIMO), PN9      |                     |                     |

| Tested Frequency<br>[MHz] | Antenna 0                    |                    |                     |                                 | Antenna 1                    |                    |                     |                                 | Antenna 0+1            |           |         |       |
|---------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------|-----------|---------|-------|
|                           | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Result (Timed average) |           |         |       |
|                           |                              |                    |                     |                                 |                              |                    |                     |                                 | Antenna 1              | Antenna 2 | Sum 1+2 |       |
|                           |                              |                    |                     |                                 |                              |                    |                     | [mW]                            | [mW]                   | [mW]      | [dBm]   |       |
| 5190                      | -8.80                        | 3.93               | 9.94                | 5.07                            | -8.34                        | 3.93               | 9.94                | 5.53                            | 3.21                   | 3.57      | 6.79    | 8.32  |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -         | -       | -     |
| 5230                      | -5.24                        | 3.90               | 10.21               | 8.87                            | -4.99                        | 3.90               | 10.21               | 9.12                            | 7.71                   | 8.17      | 15.87   | 12.01 |
| 5270                      | -5.12                        | 3.91               | 10.21               | 9.00                            | -4.79                        | 3.91               | 10.21               | 9.33                            | 7.94                   | 8.57      | 16.51   | 12.18 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -         | -       | -     |
| 5310                      | -4.92                        | 3.92               | 10.21               | 9.21                            | -4.85                        | 3.92               | 10.21               | 9.28                            | 8.34                   | 8.47      | 16.81   | 12.26 |
| 5510                      | -5.14                        | 3.97               | 10.22               | 9.05                            | -4.29                        | 3.97               | 10.22               | 9.90                            | 8.04                   | 9.77      | 17.81   | 12.51 |
| 5550                      | -5.17                        | 3.98               | 10.22               | 9.03                            | -4.53                        | 3.98               | 10.22               | 9.67                            | 8.00                   | 9.27      | 17.27   | 12.37 |
| 5670                      | -5.19                        | 3.99               | 10.23               | 9.03                            | -4.82                        | 3.99               | 10.23               | 9.40                            | 8.00                   | 8.71      | 16.71   | 12.23 |
| 5755                      | -4.77                        | 4.00               | 10.24               | 9.47                            | -4.95                        | 4.00               | 10.24               | 9.29                            | 8.85                   | 8.49      | 17.34   | 12.39 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -         | -       | -     |
| 5795                      | -4.93                        | 4.01               | 10.24               | 9.32                            | -4.81                        | 4.01               | 10.24               | 9.44                            | 8.55                   | 8.79      | 17.34   | 12.39 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Average Output Power (Reference data)

|                        |                                       |                     |                     |
|------------------------|---------------------------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |                     |
| Date                   | January 9, 2019                       | January 16, 2019    | March 14, 2019      |
| Temperature / Humidity | 26 deg. C / 42 % RH                   | 23 deg. C / 52 % RH | 22 deg. C / 52 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     | Kazutaka Takeyama   |
| Mode                   | Tx, IEEE802.11ac VHT40 (MIMO), PN9    |                     |                     |

| Tested Frequency<br>[MHz] | Antenna 0                    |                    |                     |                                 | Antenna 1                    |                    |                     |                                 | Antenna 0+1            |           |         |       |
|---------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------|-----------|---------|-------|
|                           | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Result (Timed average) |           |         |       |
|                           |                              |                    |                     |                                 |                              |                    |                     |                                 | Antenna 1              | Antenna 2 | Sum 1+2 |       |
|                           |                              |                    |                     |                                 |                              |                    |                     | [mW]                            | [mW]                   | [mW]      | [dBm]   |       |
| 5190                      | -8.73                        | 3.93               | 9.94                | 5.14                            | -8.32                        | 3.93               | 9.94                | 5.55                            | 3.27                   | 3.59      | 6.86    | 8.36  |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -         | -       | -     |
| 5230                      | -5.18                        | 3.90               | 10.21               | 8.93                            | -4.91                        | 3.90               | 10.21               | 9.20                            | 7.82                   | 8.32      | 16.13   | 12.08 |
| 5270                      | -5.04                        | 3.91               | 10.21               | 9.08                            | -4.78                        | 3.91               | 10.21               | 9.34                            | 8.09                   | 8.59      | 16.68   | 12.22 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -         | -       | -     |
| 5310                      | -4.91                        | 3.92               | 10.21               | 9.22                            | -4.85                        | 3.92               | 10.21               | 9.28                            | 8.36                   | 8.47      | 16.83   | 12.26 |
| 5510                      | -5.01                        | 3.97               | 10.22               | 9.18                            | -4.30                        | 3.97               | 10.22               | 9.89                            | 8.28                   | 9.75      | 18.03   | 12.56 |
| 5550                      | -5.32                        | 3.98               | 10.22               | 8.88                            | -4.52                        | 3.98               | 10.22               | 9.68                            | 7.73                   | 9.29      | 17.02   | 12.31 |
| 5670                      | -5.13                        | 3.99               | 10.23               | 9.09                            | -5.04                        | 3.99               | 10.23               | 9.18                            | 8.11                   | 8.28      | 16.39   | 12.15 |
| 5755                      | -4.81                        | 4.00               | 10.24               | 9.43                            | -4.90                        | 4.00               | 10.24               | 9.34                            | 8.77                   | 8.59      | 17.36   | 12.40 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -         | -       | -     |
| 5795                      | -4.89                        | 4.01               | 10.24               | 9.36                            | -4.71                        | 4.01               | 10.24               | 9.54                            | 8.63                   | 8.99      | 17.62   | 12.46 |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Average Output Power (Reference data)

|                        |   |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room   |                     |                     |                     |
| Date                   | January 8, 2019   | January 11, 2019    | February 16, 2019   | March 18, 2019      |
| Temperature / Humidity | 24 deg. C / 54 % RH   | 24 deg. C / 51 % RH | 23 deg. C / 44 % RH | 22 deg. C / 54 % RH |
| Engineer               | Yosuke Ishikawa   | Yosuke Ishikawa     | Yosuke Ishikawa     | Kenichi Adachi      |
| Mode                   | Tx, IEEE802.11ac VHT80 (SISO), PN9,<br>worst antenna port 1 (5210 MHz - 5530 MHz), 0 (5775 MHz) |                     |                     |                     |

| Tested Frequency<br>[MHz] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average) |       | Duty factor<br>[dB] | Result (Burst power average) |       |
|---------------------------|------------------------------|--------------------|---------------------|------------------------|-------|---------------------|------------------------------|-------|
|                           |                              |                    |                     | [dBm]                  | [mW]  |                     | [dBm]                        | [mW]  |
| 5210                      | -6.78                        | 3.94               | 9.94                | 7.10                   | 5.13  | 1.09                | 8.19                         | 6.59  |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5290                      | -6.66                        | 3.96               | 9.93                | 7.23                   | 5.28  | 1.09                | 8.32                         | 6.79  |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5530                      | -4.70                        | 3.97               | 10.22               | 9.49                   | 8.89  | 1.09                | 10.58                        | 11.43 |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| 5775                      | -3.14                        | 4.00               | 10.24               | 11.10                  | 12.88 | 1.09                | 12.19                        | 16.56 |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |
| -                         | -                            | -                  | -                   | -                      | -     | -                   | -                            | -     |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Los

Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Average Output Power (Reference data)

|                        |                                       |                     |                     |                     |
|------------------------|---------------------------------------|---------------------|---------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |                     |                     |
| Date                   | January 9, 2019                       | January 16, 2019    | February 16, 2019   | March 18, 2019      |
| Temperature / Humidity | 26 deg. C / 42 % RH                   | 23 deg. C / 52 % RH | 23 deg. C / 44 % RH | 23 deg. C / 54 % RH |
| Engineer               | Yosuke Ishikawa                       | Yosuke Ishikawa     | Yosuke Ishikawa     | Kenichi Adachi      |
| Mode                   | Tx, IEEE802.11ac VHT80 (MIMO), PN9    |                     |                     |                     |

| Tested Frequency<br>[MHz] | Antenna 0                    |                    |                     |                                 | Antenna 1                    |                    |                     |                                 | Antenna 0+1            |                   |                     |                      |
|---------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------------|--------------------|---------------------|---------------------------------|------------------------|-------------------|---------------------|----------------------|
|                           | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Power Meter Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result (Timed average)<br>[dBm] | Result (Timed average) |                   | Sum                 |                      |
|                           |                              |                    |                     |                                 |                              |                    |                     |                                 | Antenna 1<br>[mW]      | Antenna 2<br>[mW] | Antenna 1+2<br>[mW] | Antenna 1+2<br>[dBm] |
| 5210                      | -10.75                       | 3.89               | 10.21               | 3.35                            | -10.52                       | 3.89               | 10.21               | 3.58                            | 2.16                   | 2.28              | 4.44                | 6.48                 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -                 | -                   | -                    |
| 5290                      | -10.70                       | 3.92               | 10.21               | 3.43                            | -10.59                       | 3.92               | 10.21               | 3.54                            | 2.20                   | 2.26              | 4.46                | 6.50                 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -                 | -                   | -                    |
| 5530                      | -9.17                        | 3.97               | 10.22               | 5.02                            | -8.68                        | 3.97               | 10.22               | 5.51                            | 3.18                   | 3.56              | 6.73                | 8.28                 |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -                 | -                   | -                    |
| 5775                      | -5.77                        | 4.00               | 10.24               | 8.47                            | -5.69                        | 4.00               | 10.24               | 8.55                            | 7.03                   | 7.16              | 14.19               | 11.52                |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -                 | -                   | -                    |
| -                         | -                            | -                  | -                   | -                               | -                            | -                  | -                   | -                               | -                      | -                 | -                   | -                    |

Sample Calculation:

Result (Timed average) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)




## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

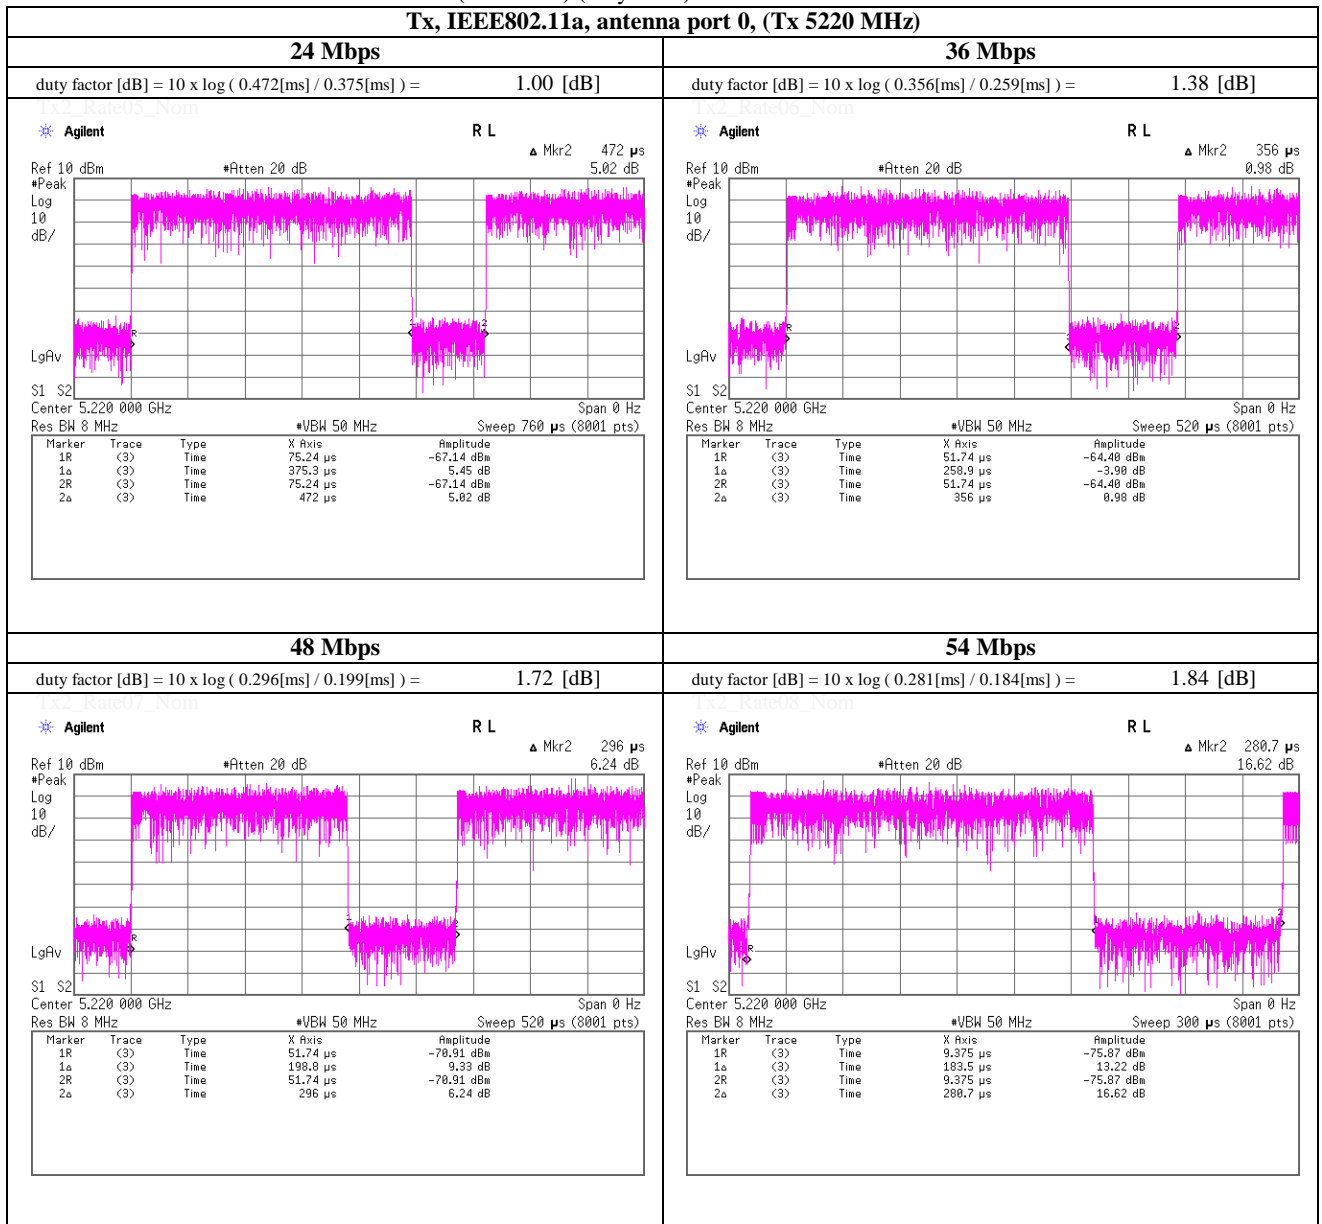


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

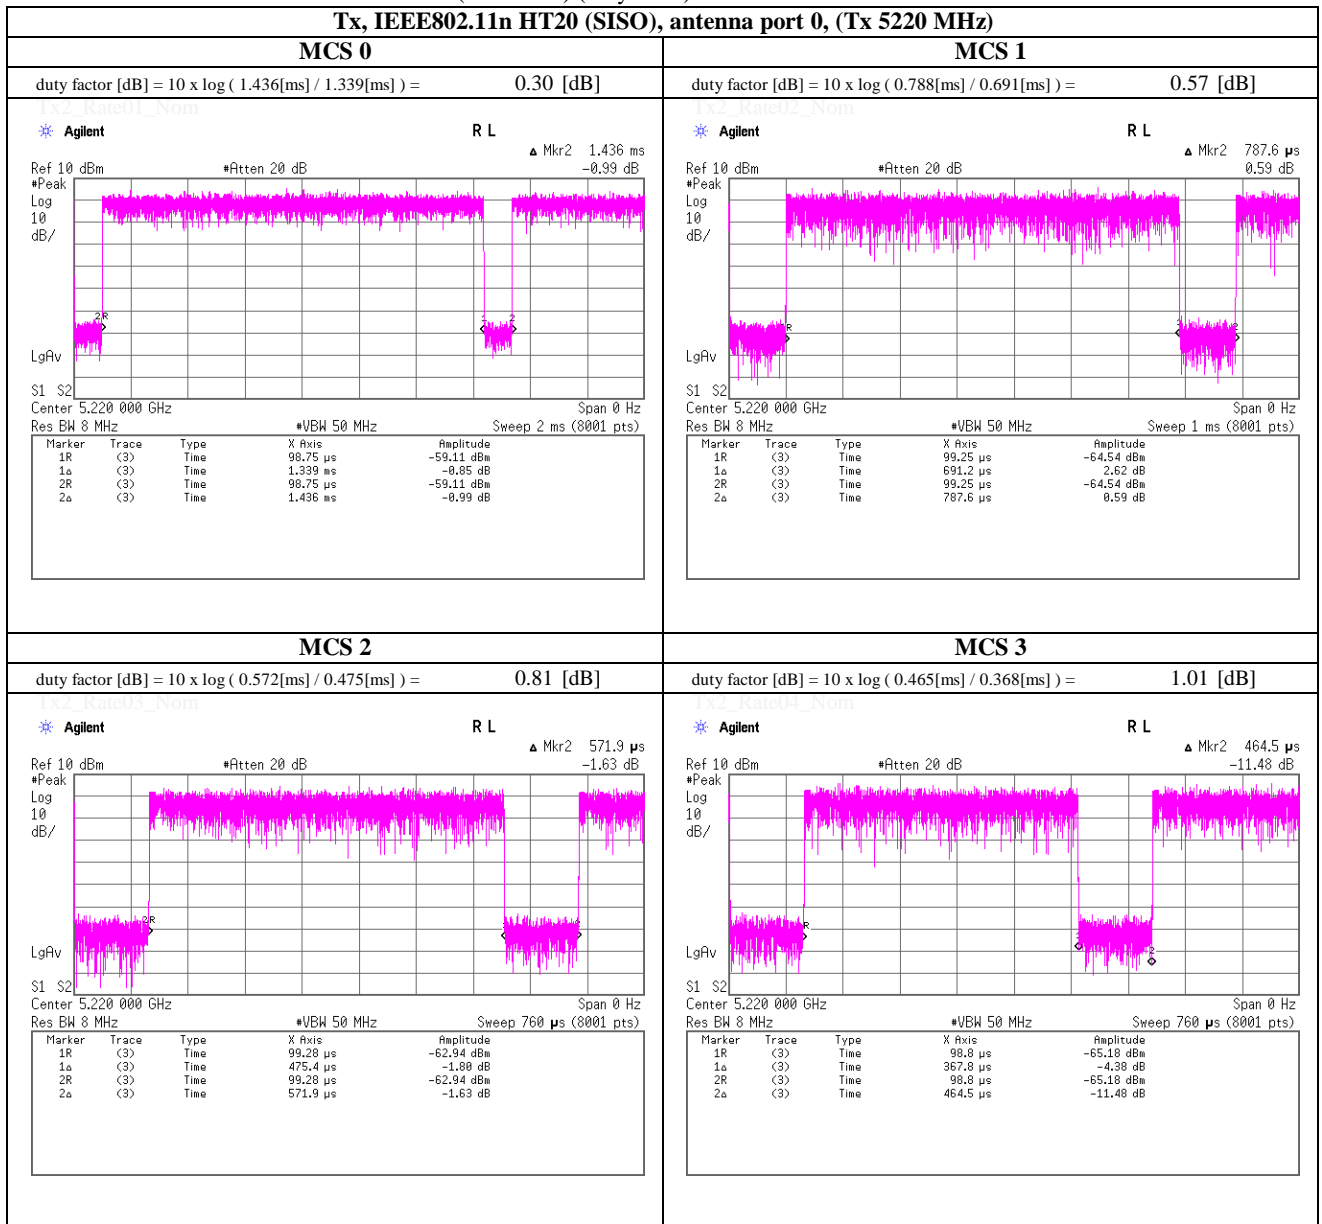

## Maximum Conducted Output Power (Conducted)


(Reference) (duty chart)

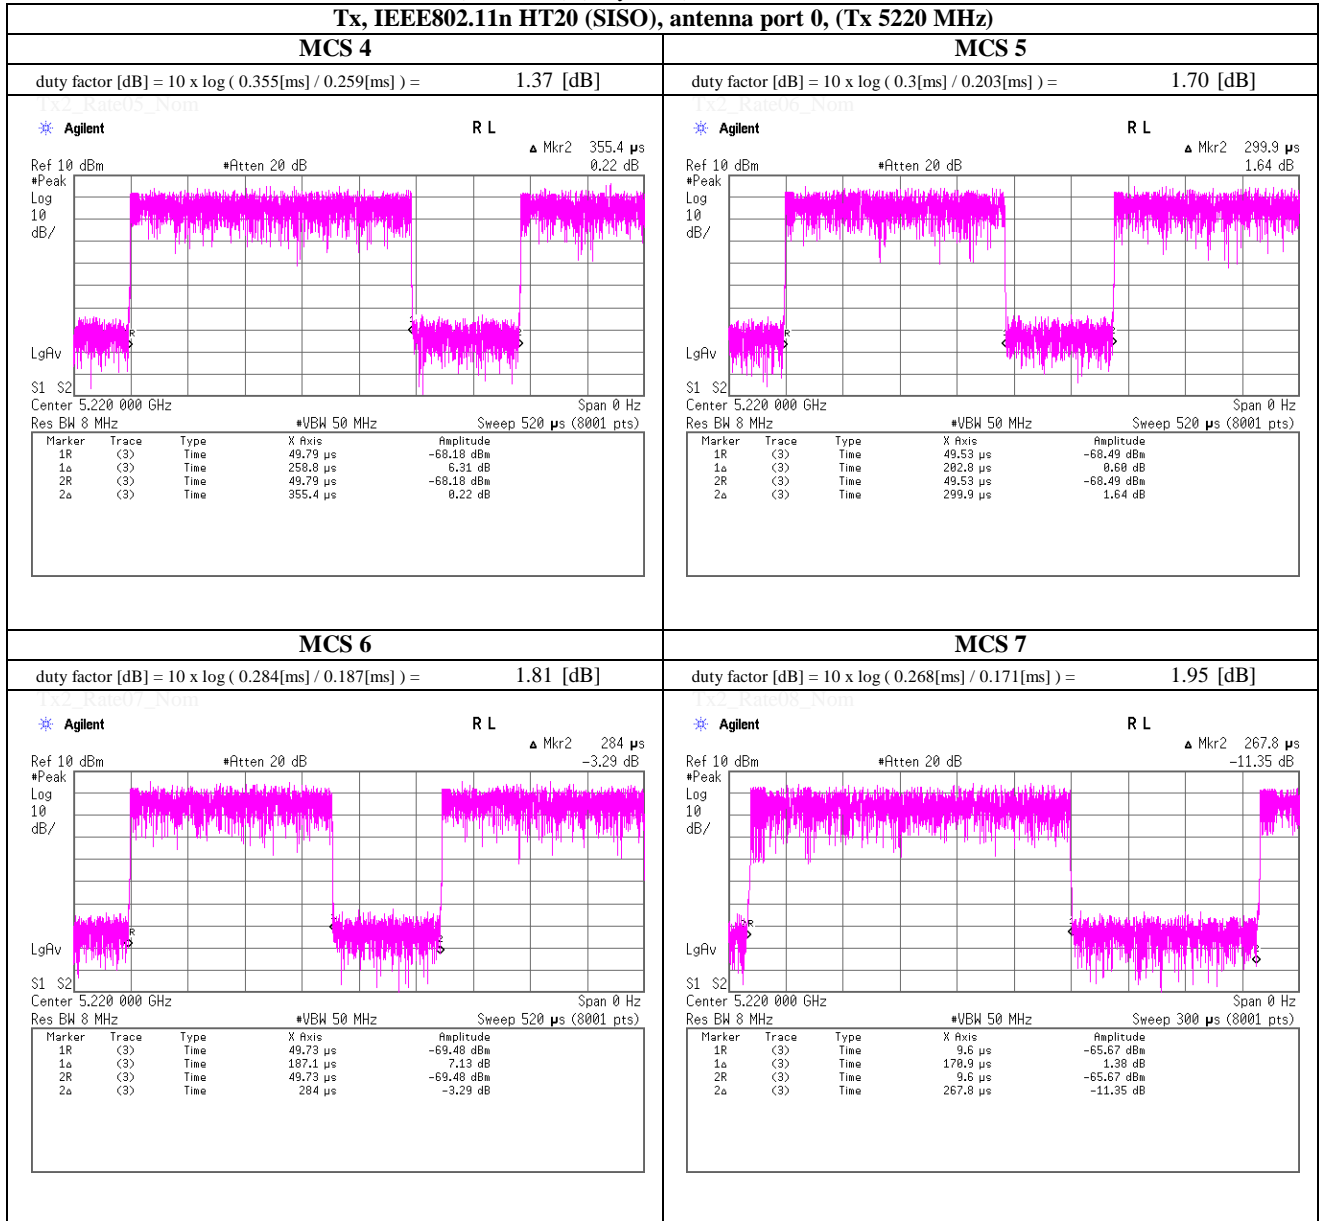




## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

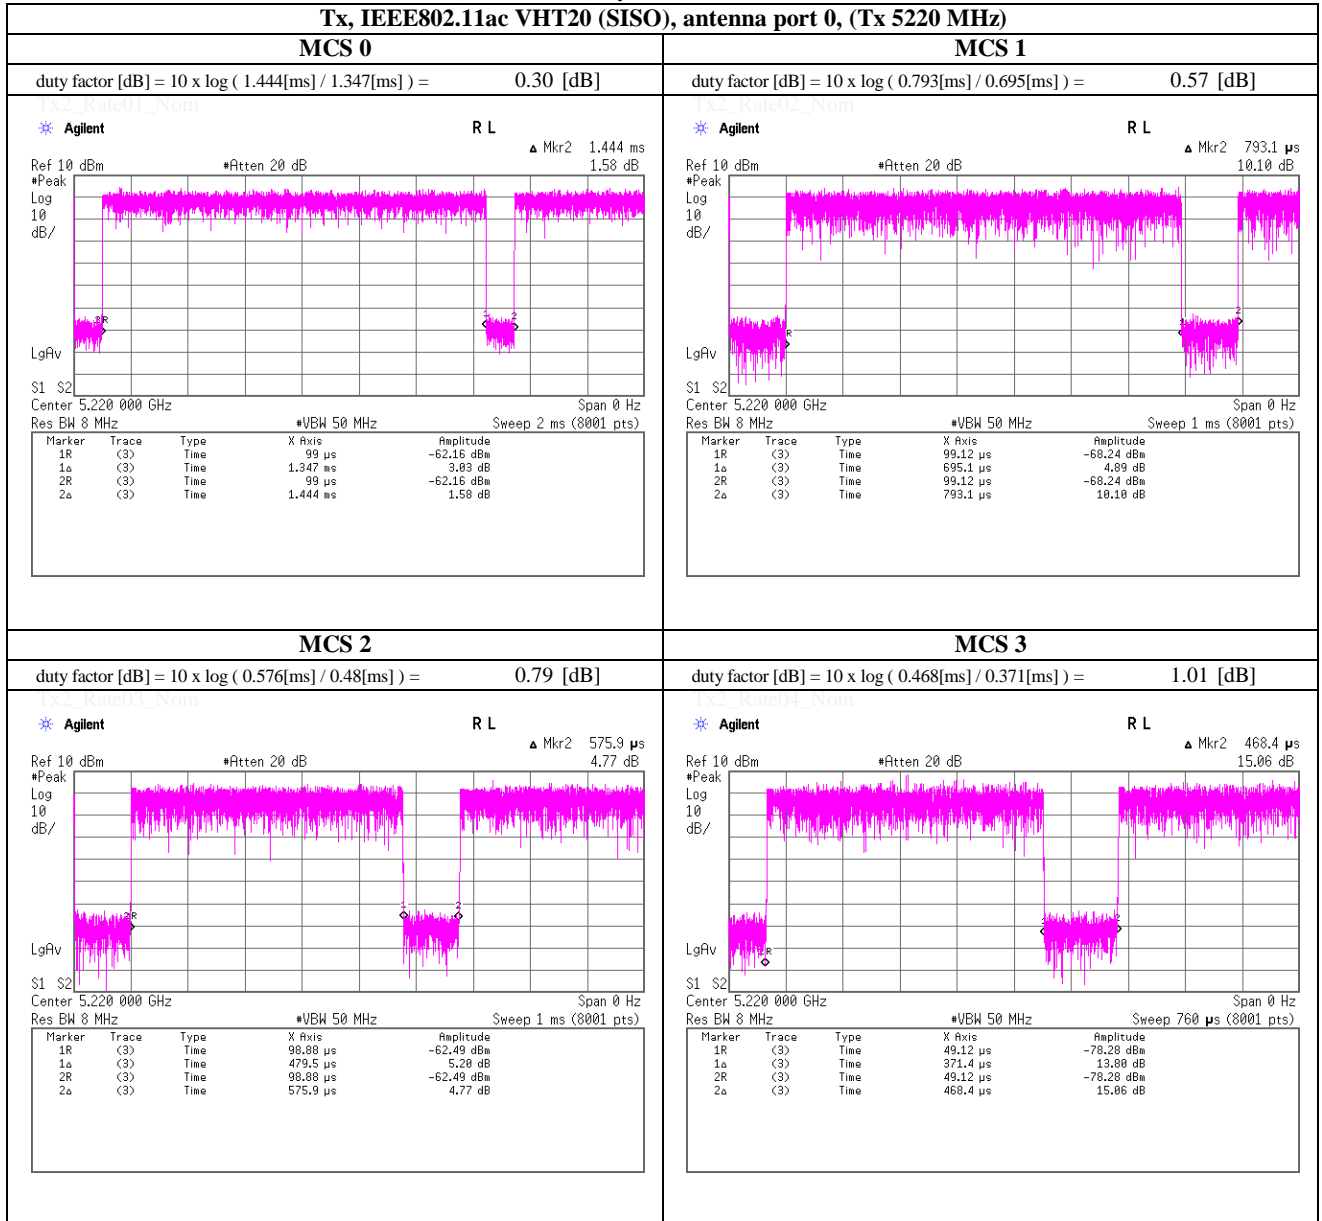


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

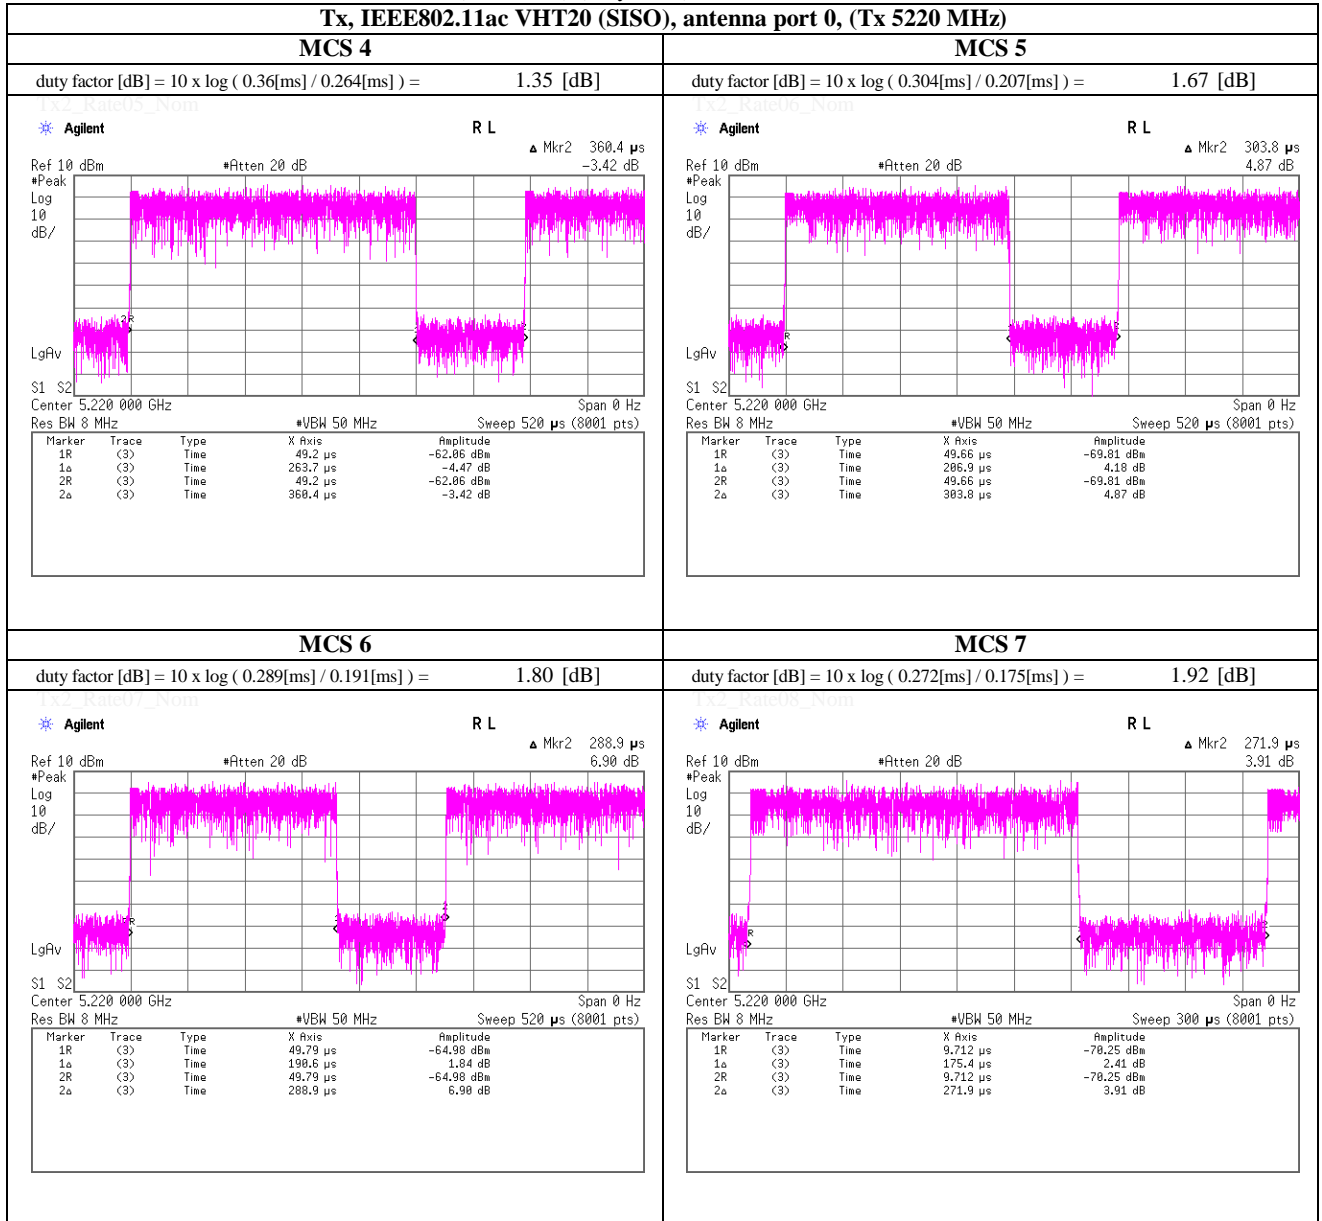

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

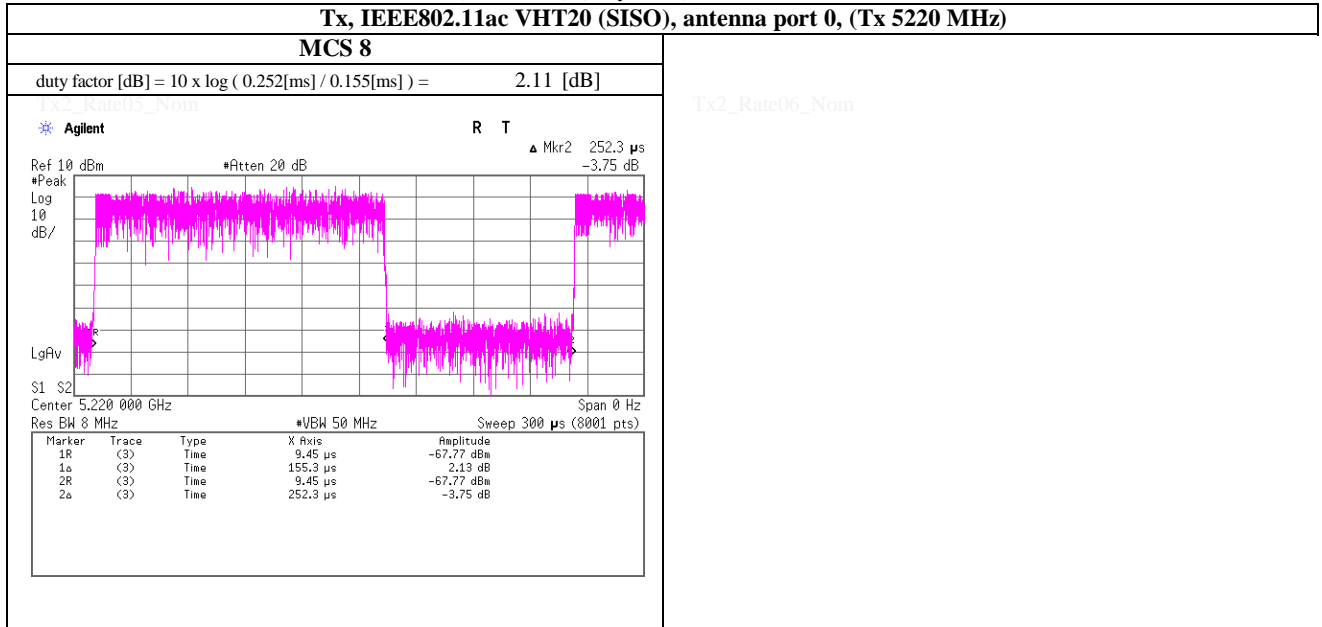

Tx2\_Rate06\_Nom


Tx2\_Rate07\_Nom

Tx2\_Rate08\_Nom

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)


**Tx, IEEE802.11n HT20 (MIMO), (5220 MHz)**

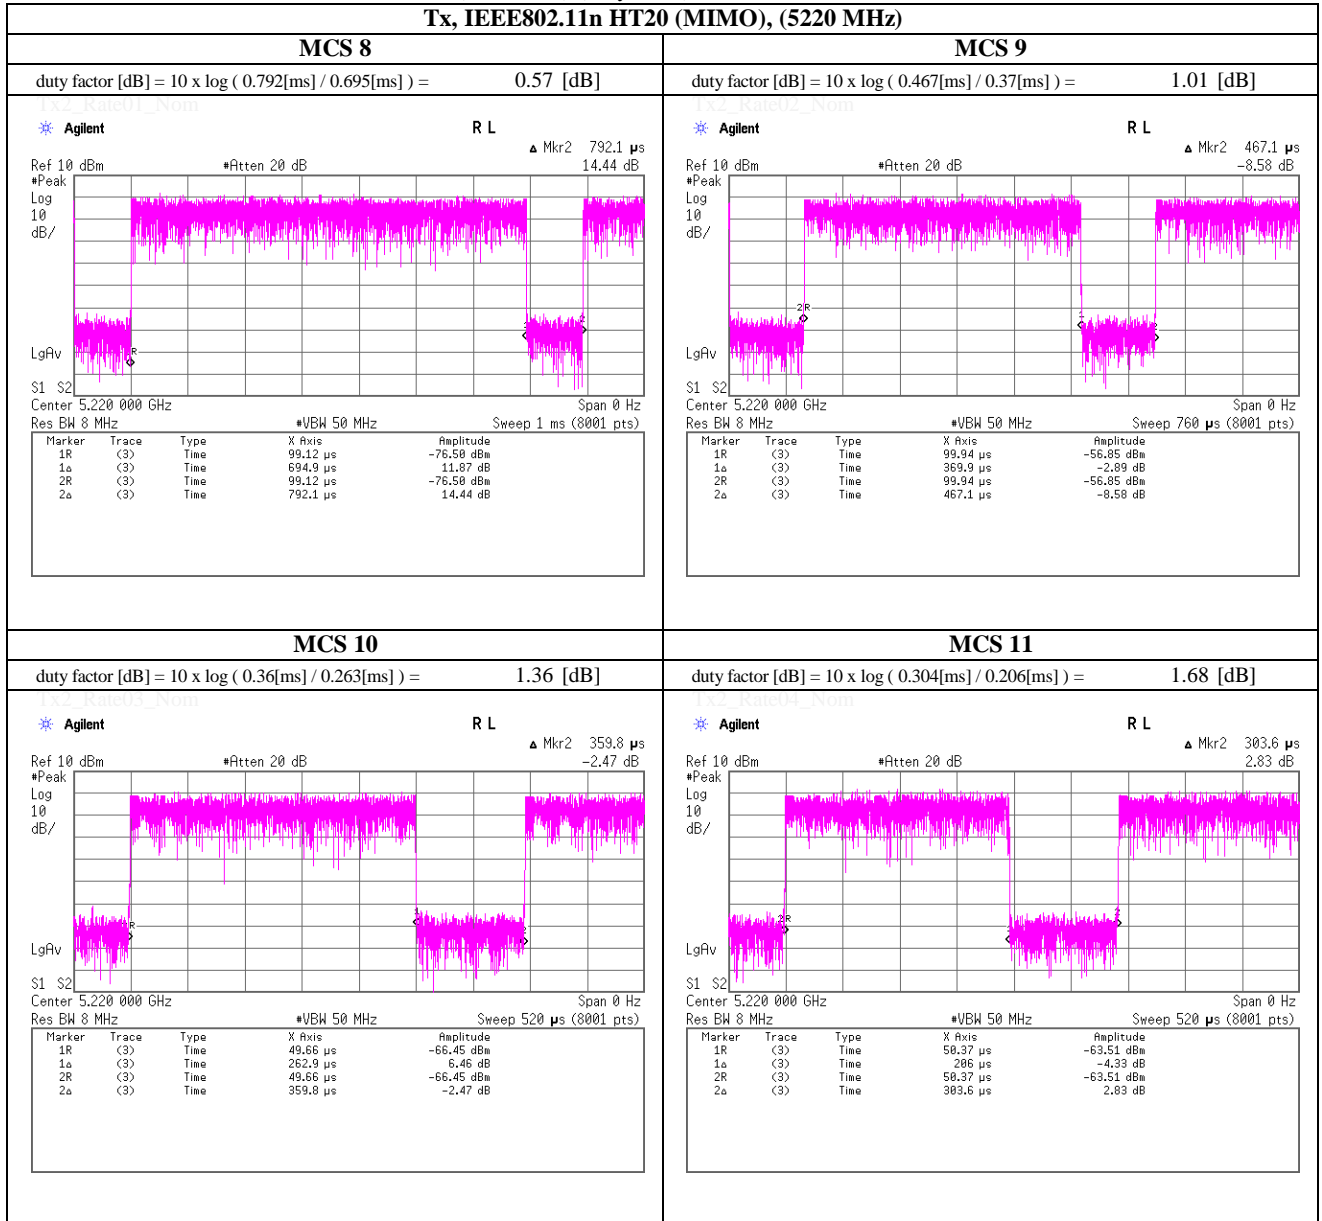

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE802.11n HT20 (MIMO), (5220 MHz)**

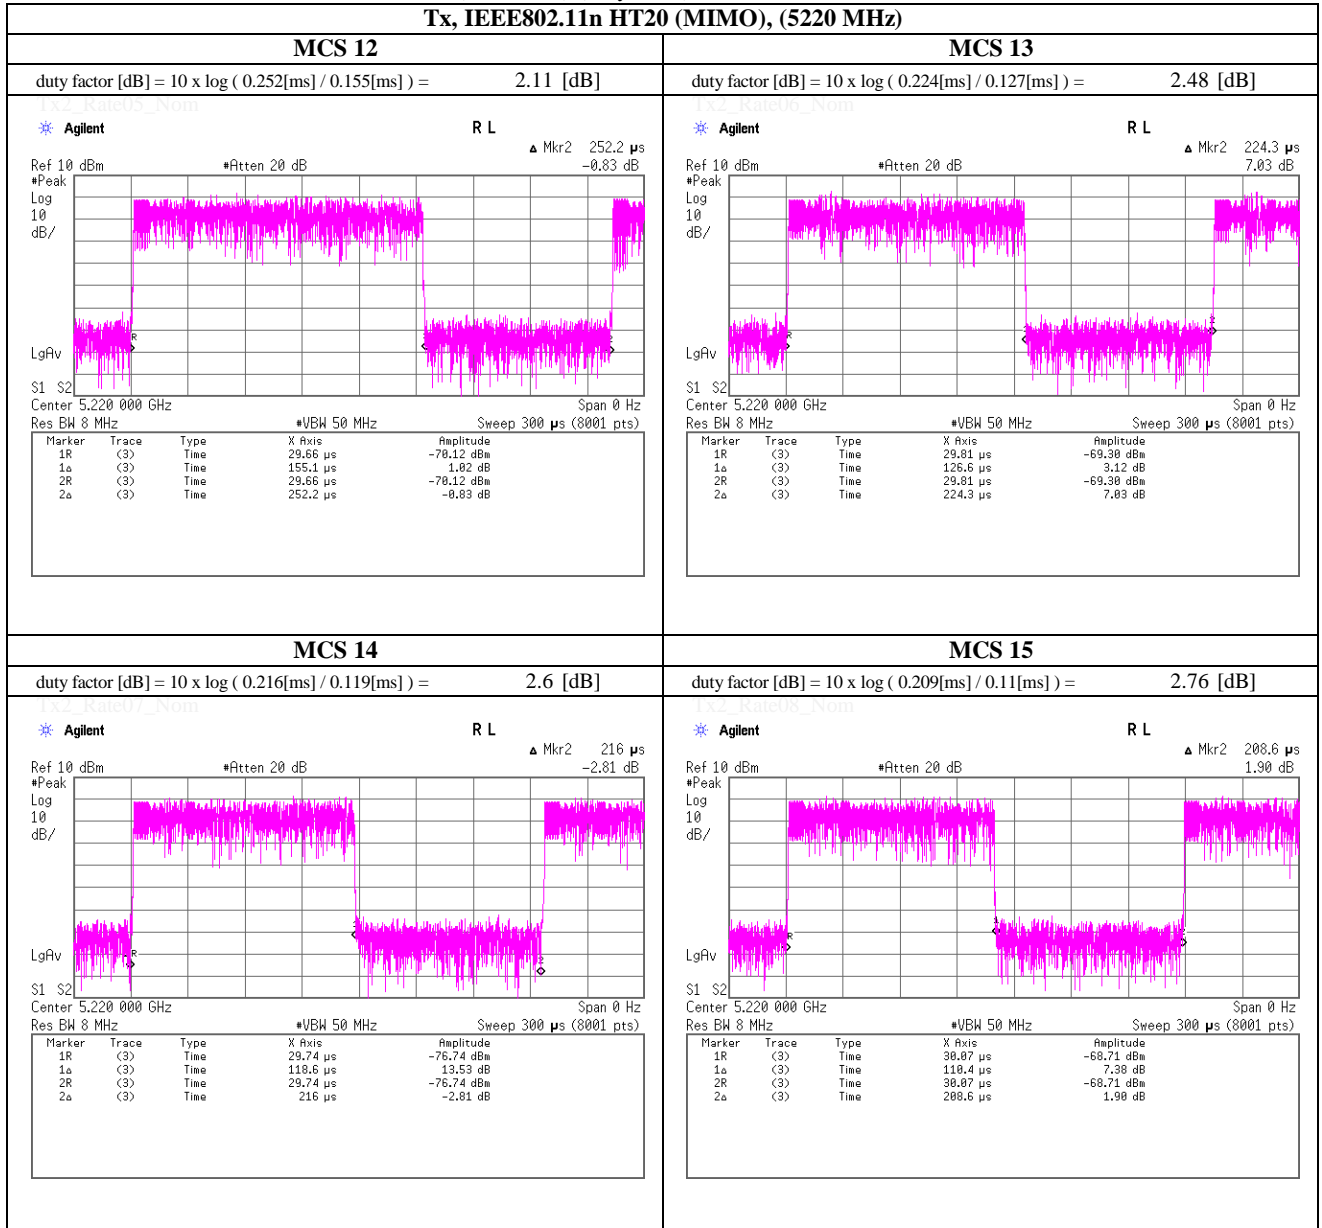

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)


**Tx, IEEE802.11ac VHT20 (MIMO), (5220 MHz)**

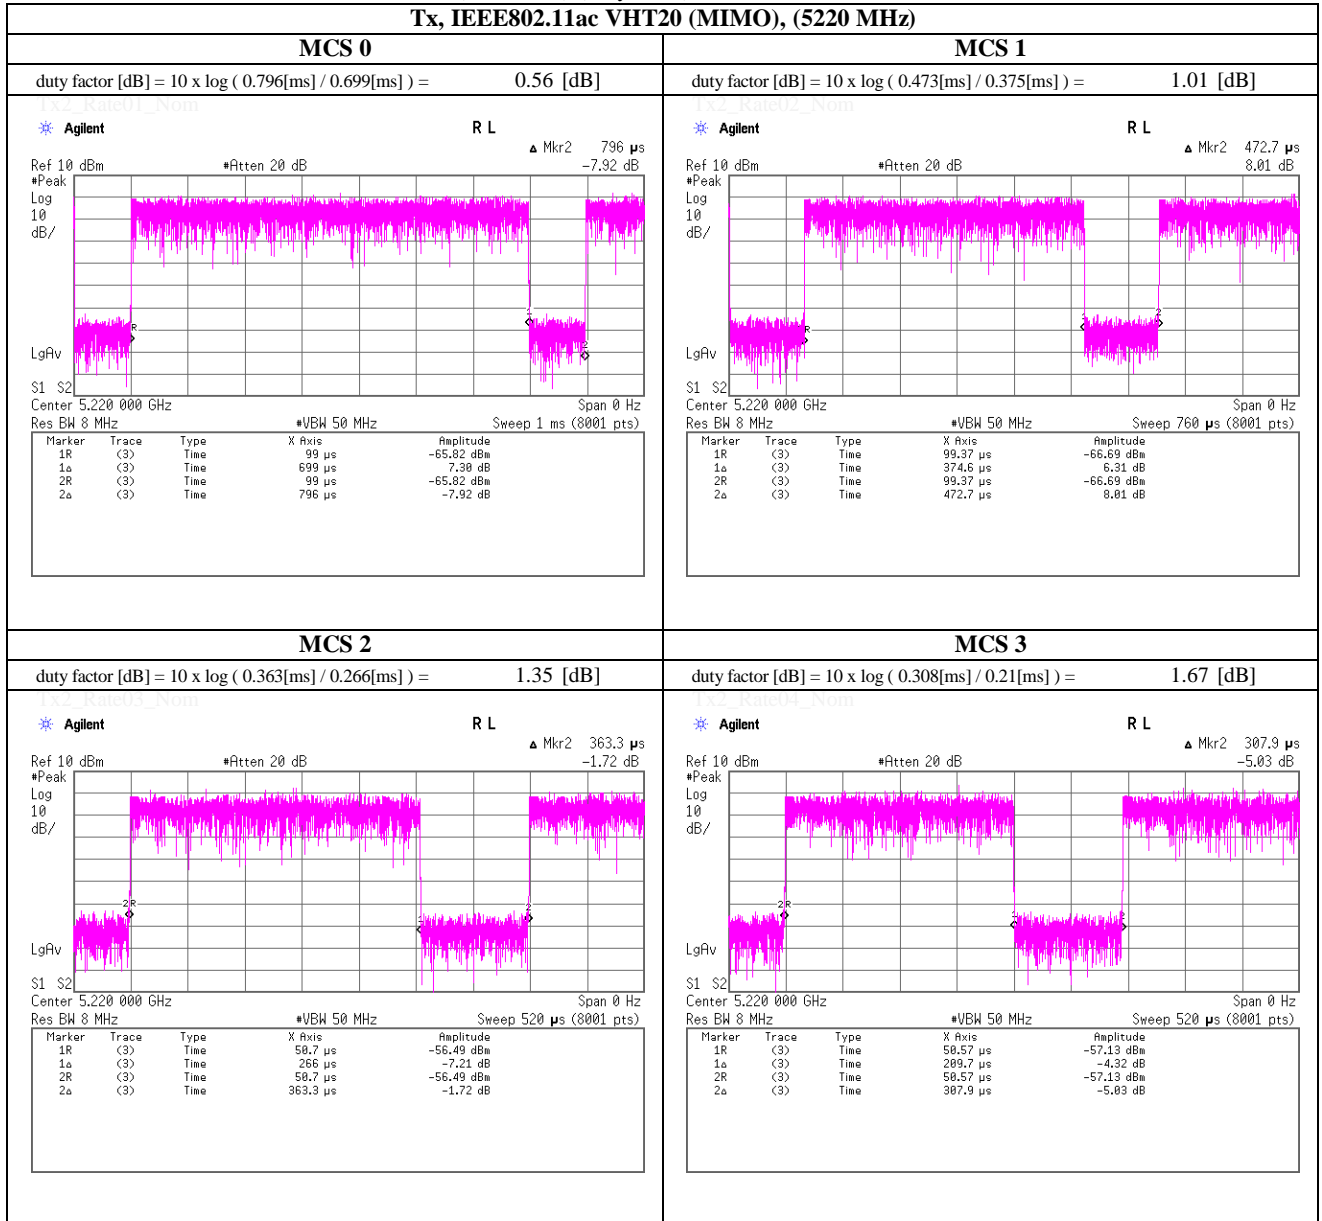

## Maximum Conducted Output Power (Conducted)


(Reference) (duty chart)

**Tx, IEEE802.11ac VHT20 (MIMO), (5220 MHz)**

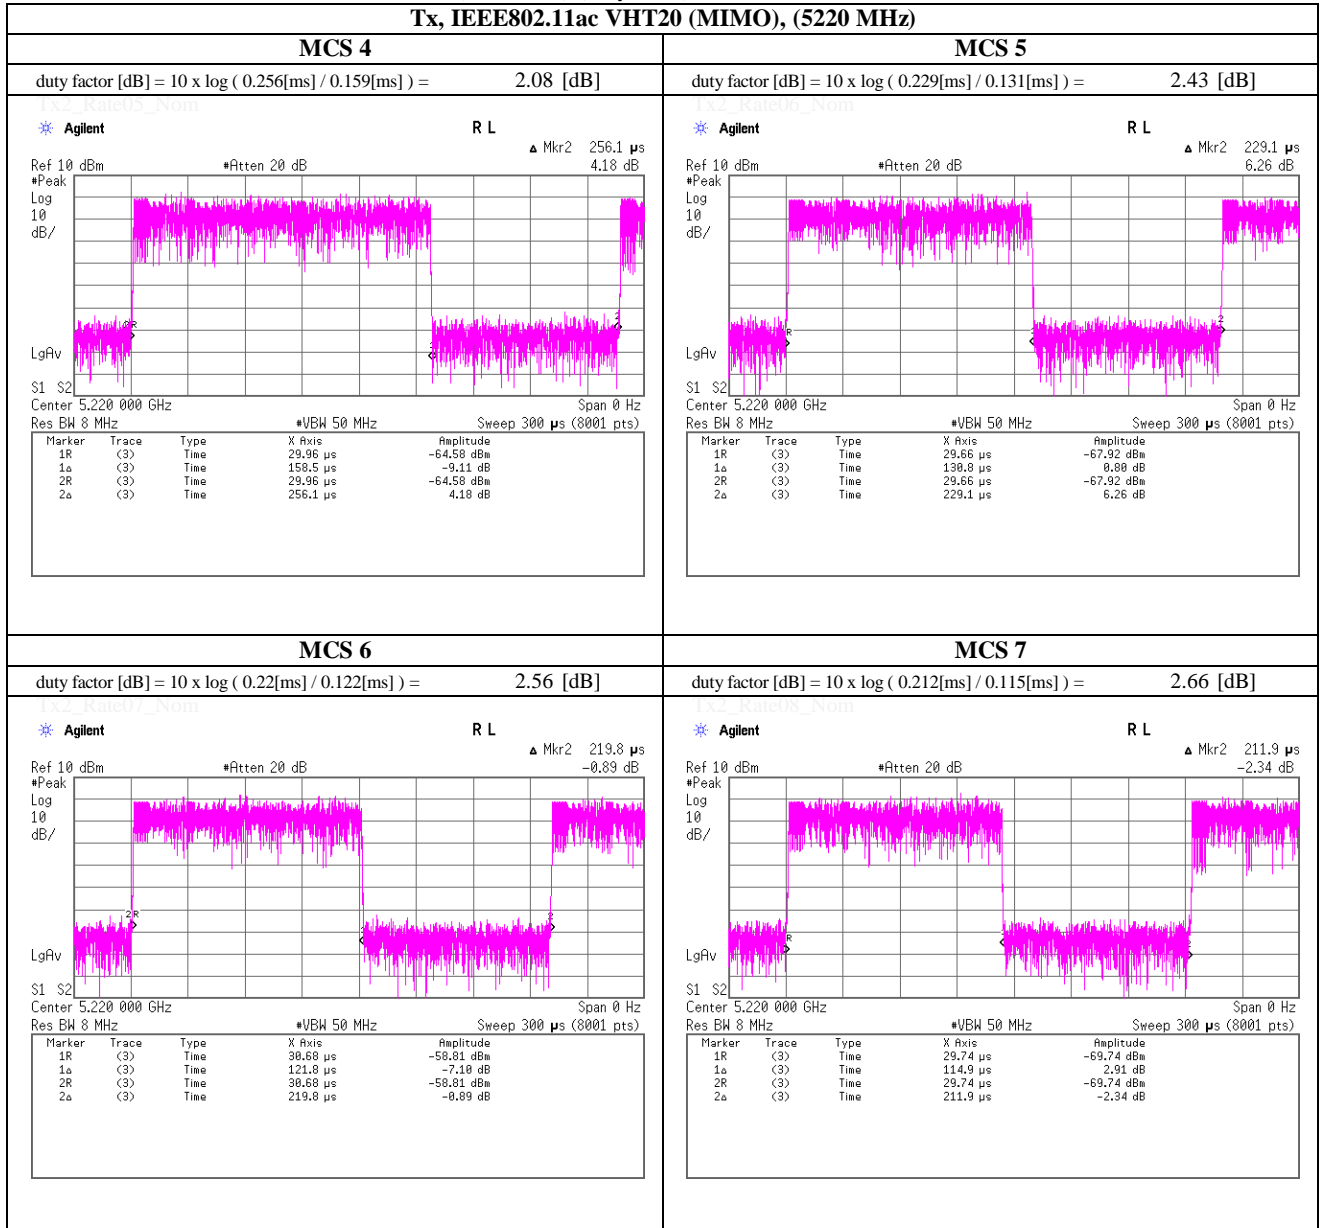

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

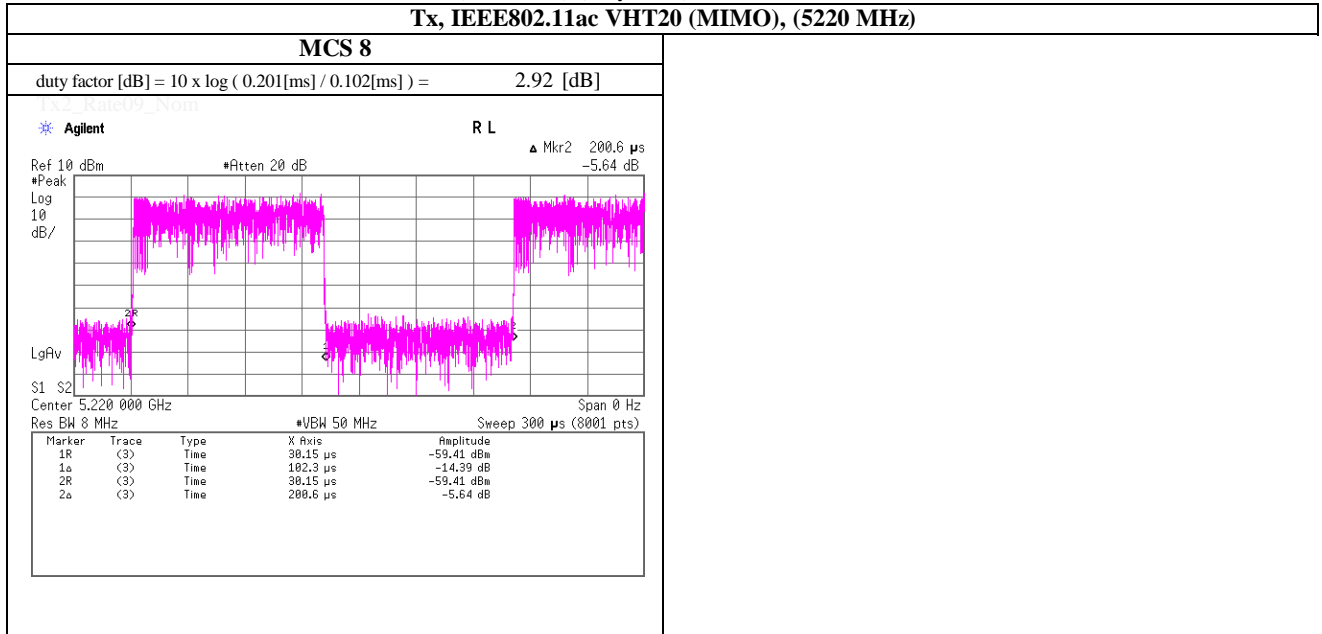

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401




## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

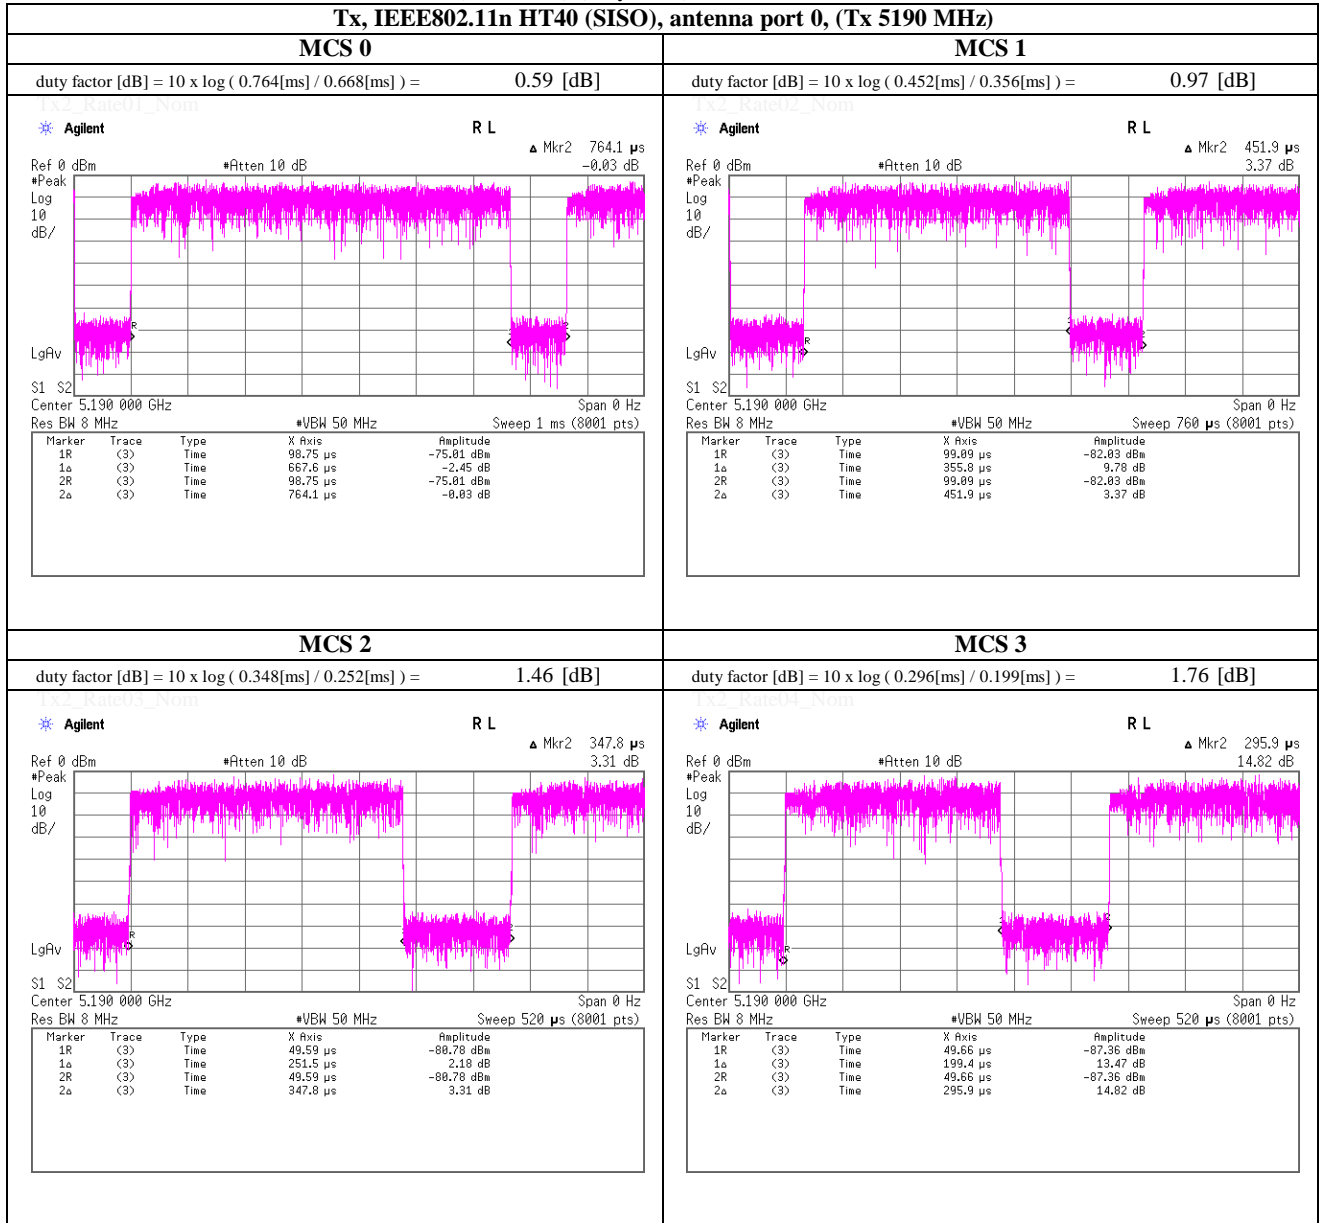


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

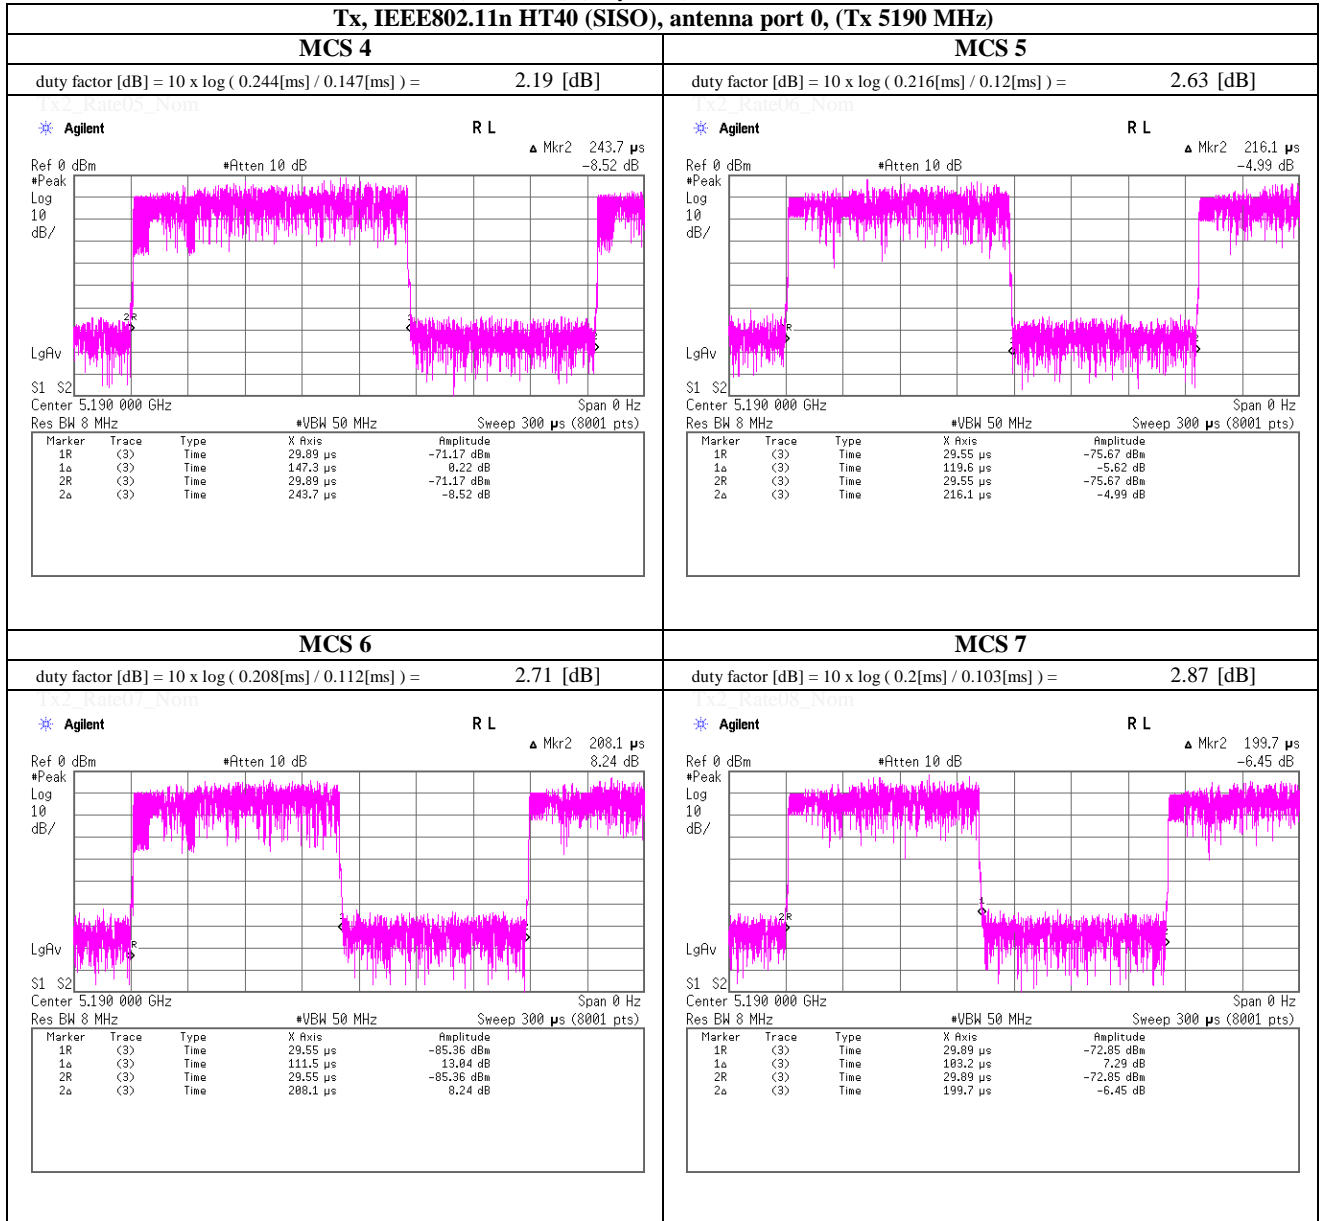


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

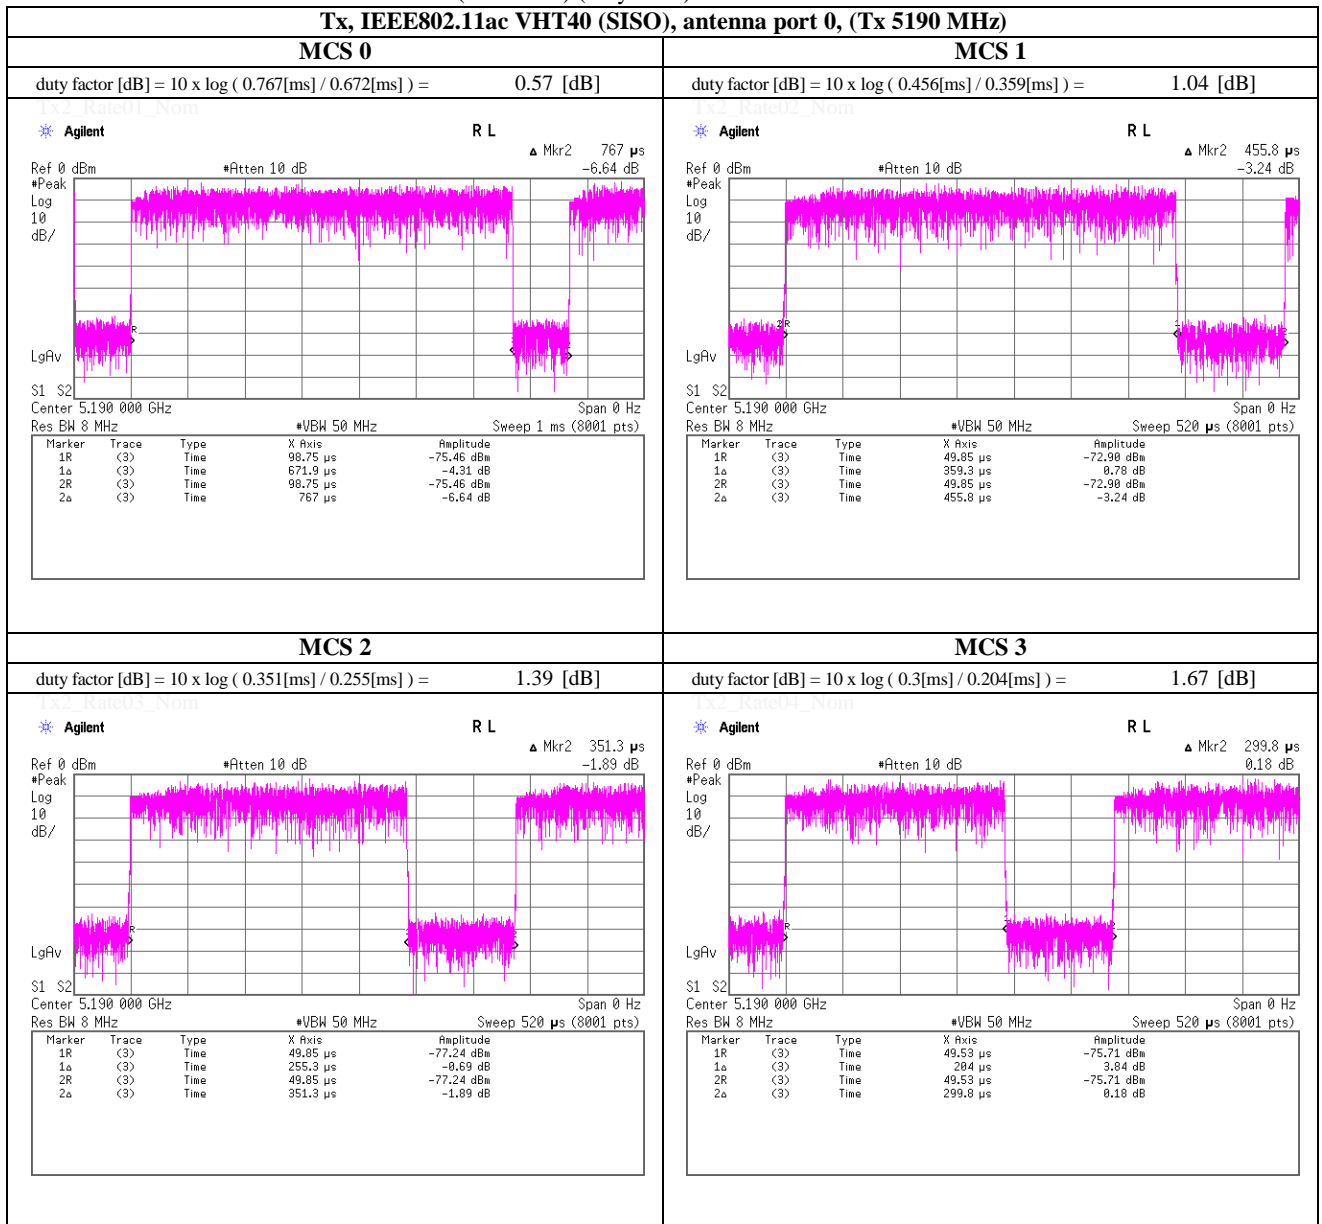


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

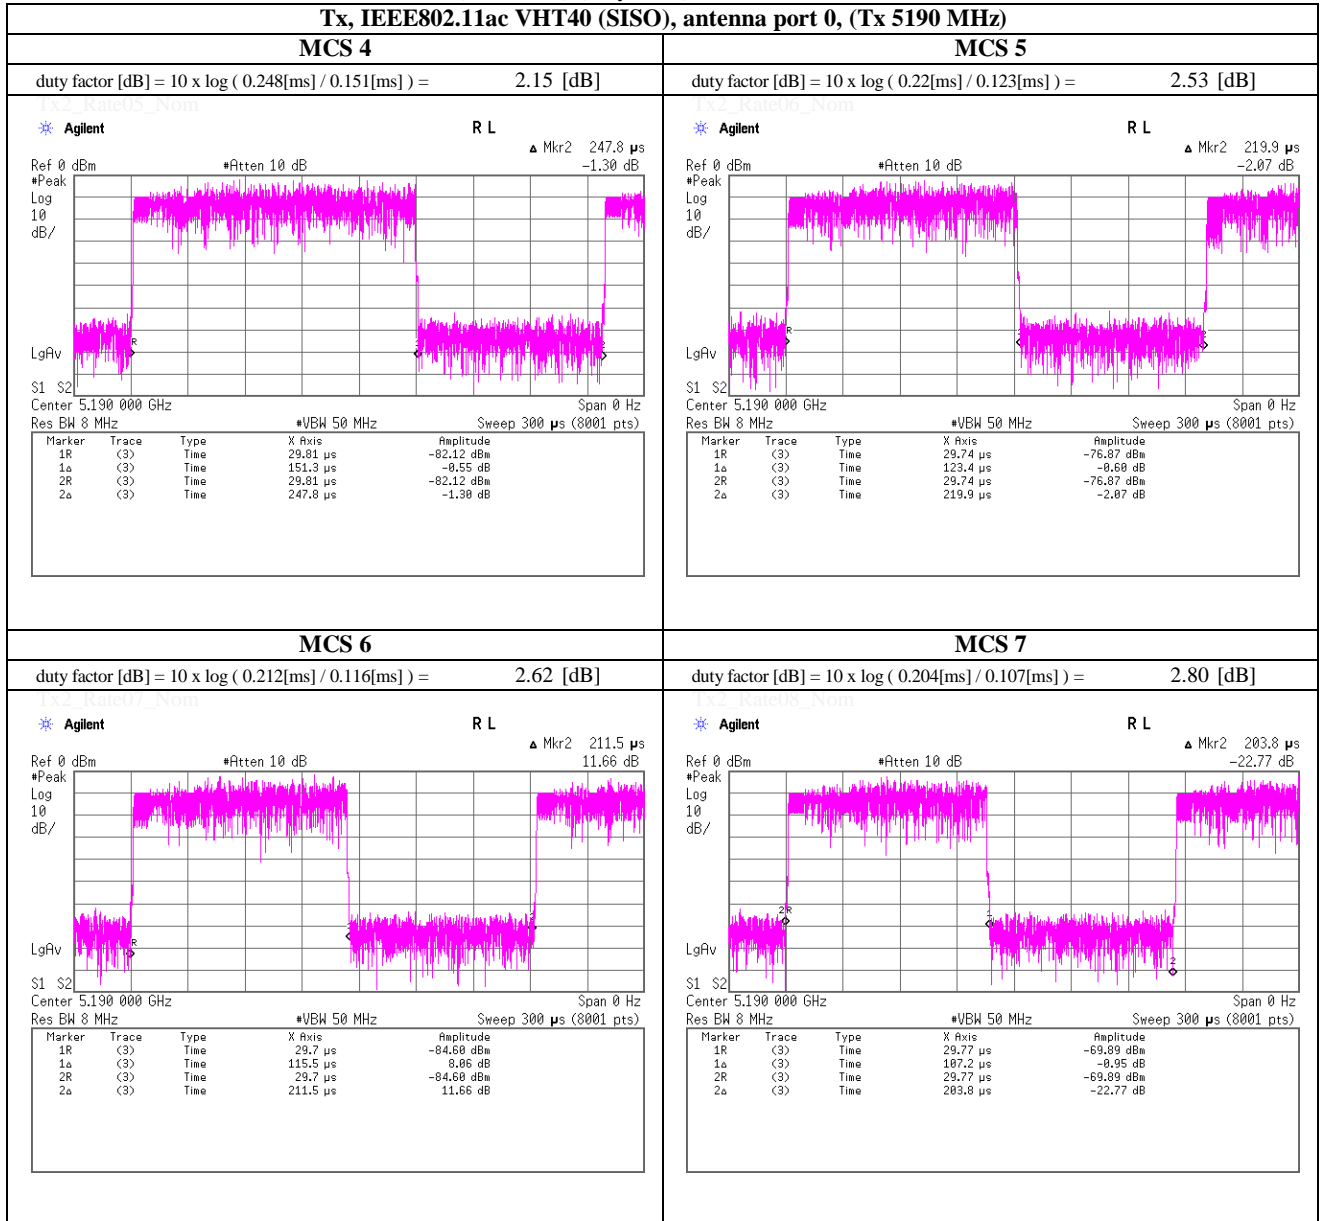

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

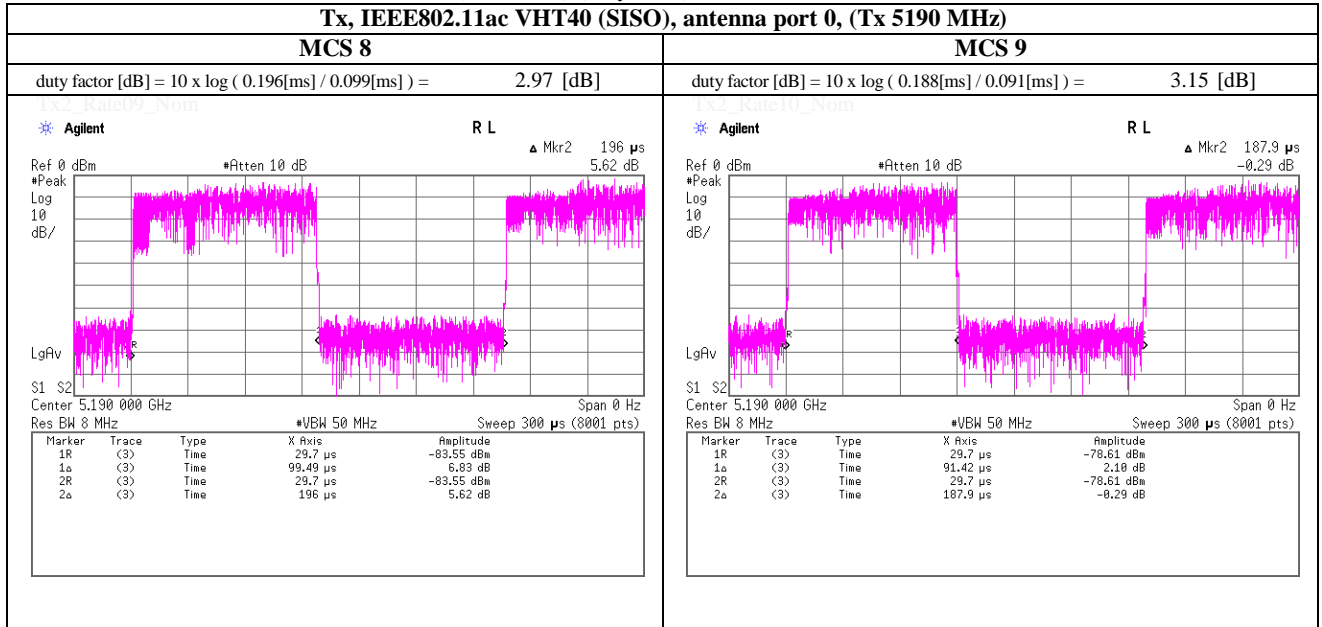

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)


**Tx, IEEE 802.11n HT40 (MIMO), (5190 MHz)**

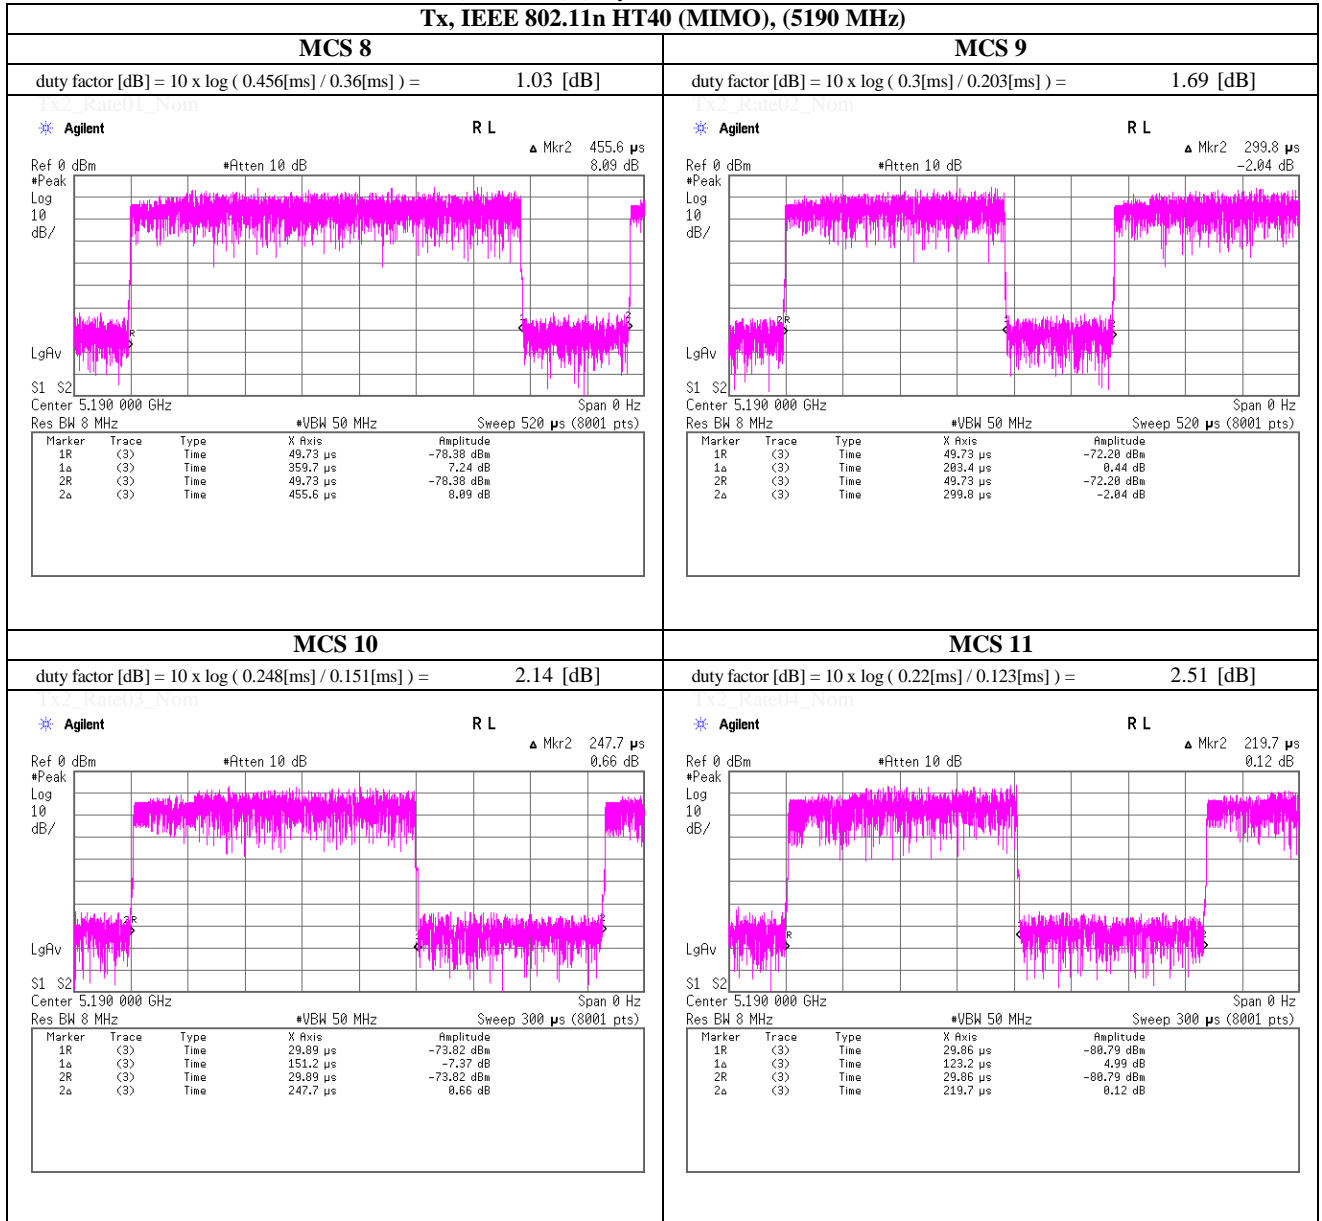

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)


**Tx, IEEE 802.11n HT40 (MIMO), (5190 MHz)**

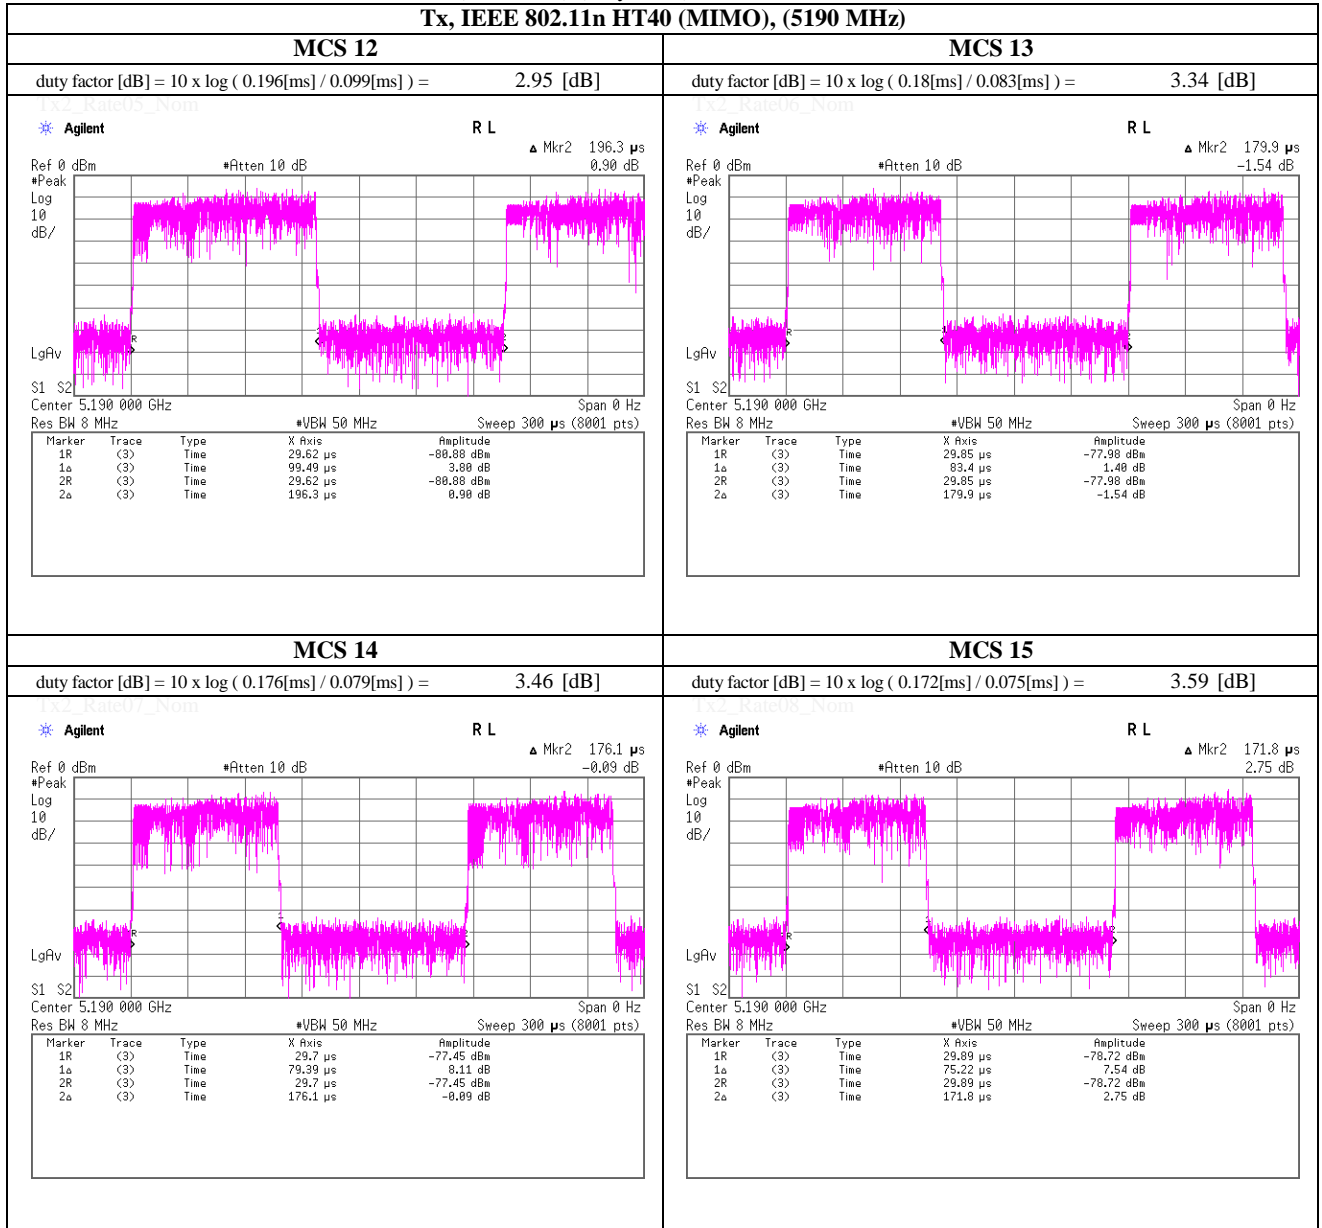

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE 802.11ac VHT40 (MIMO), (5190 MHz)**

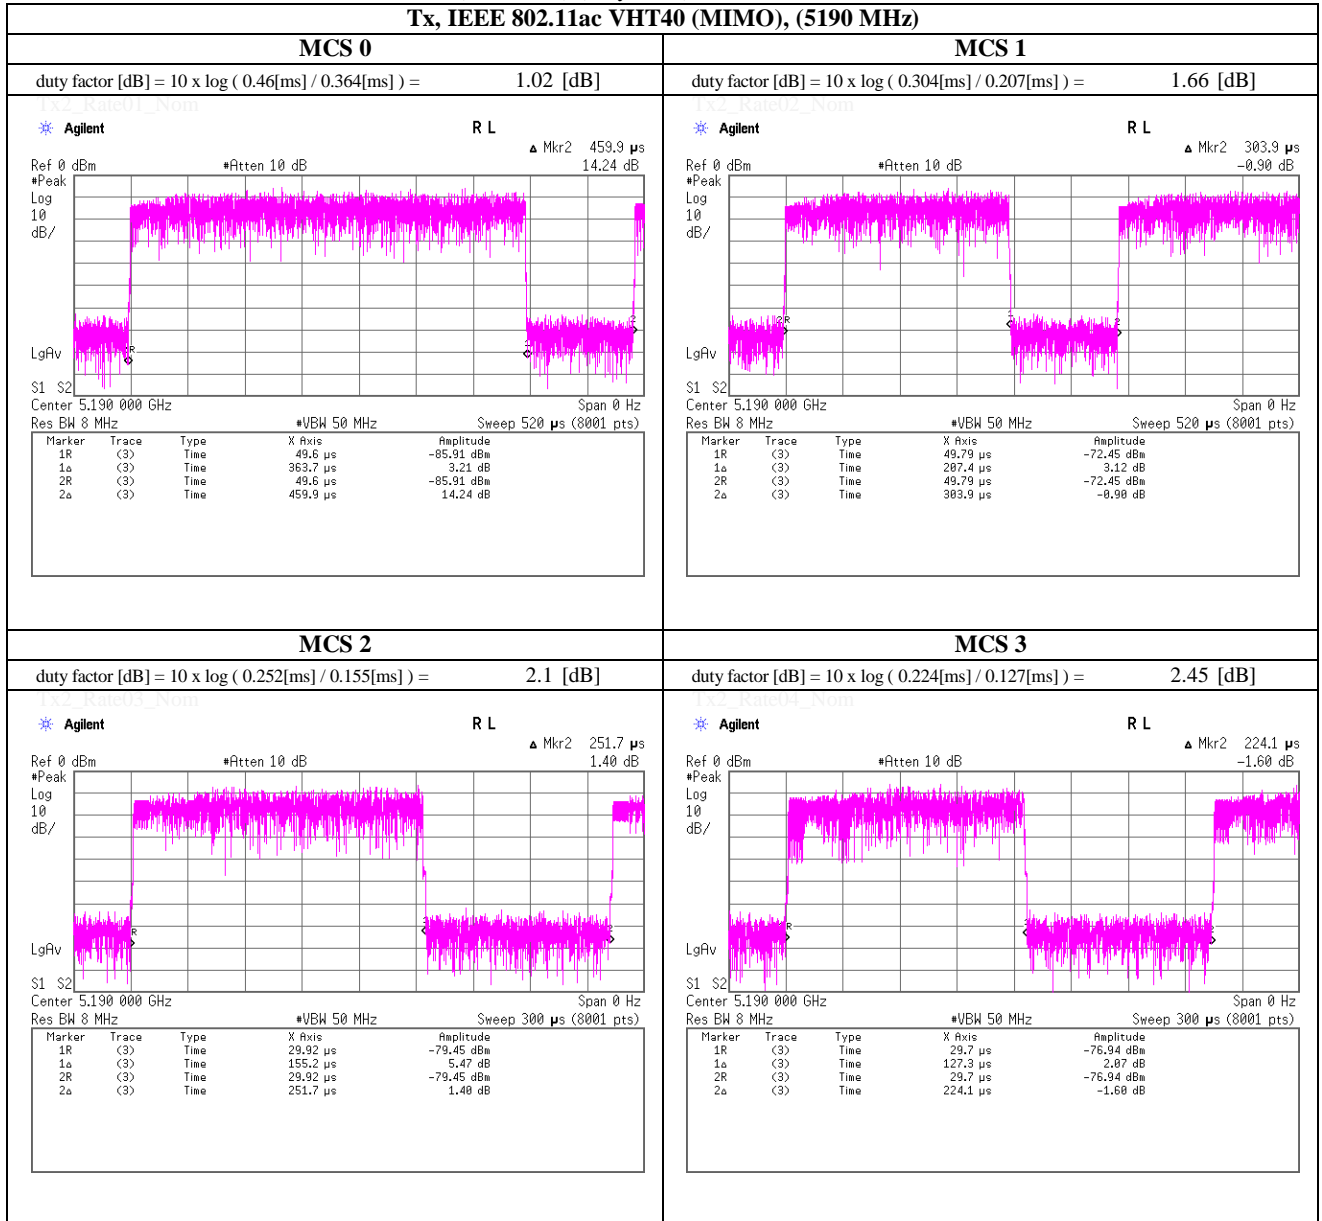




## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE 802.11ac VHT40 (MIMO), (5190 MHz)**

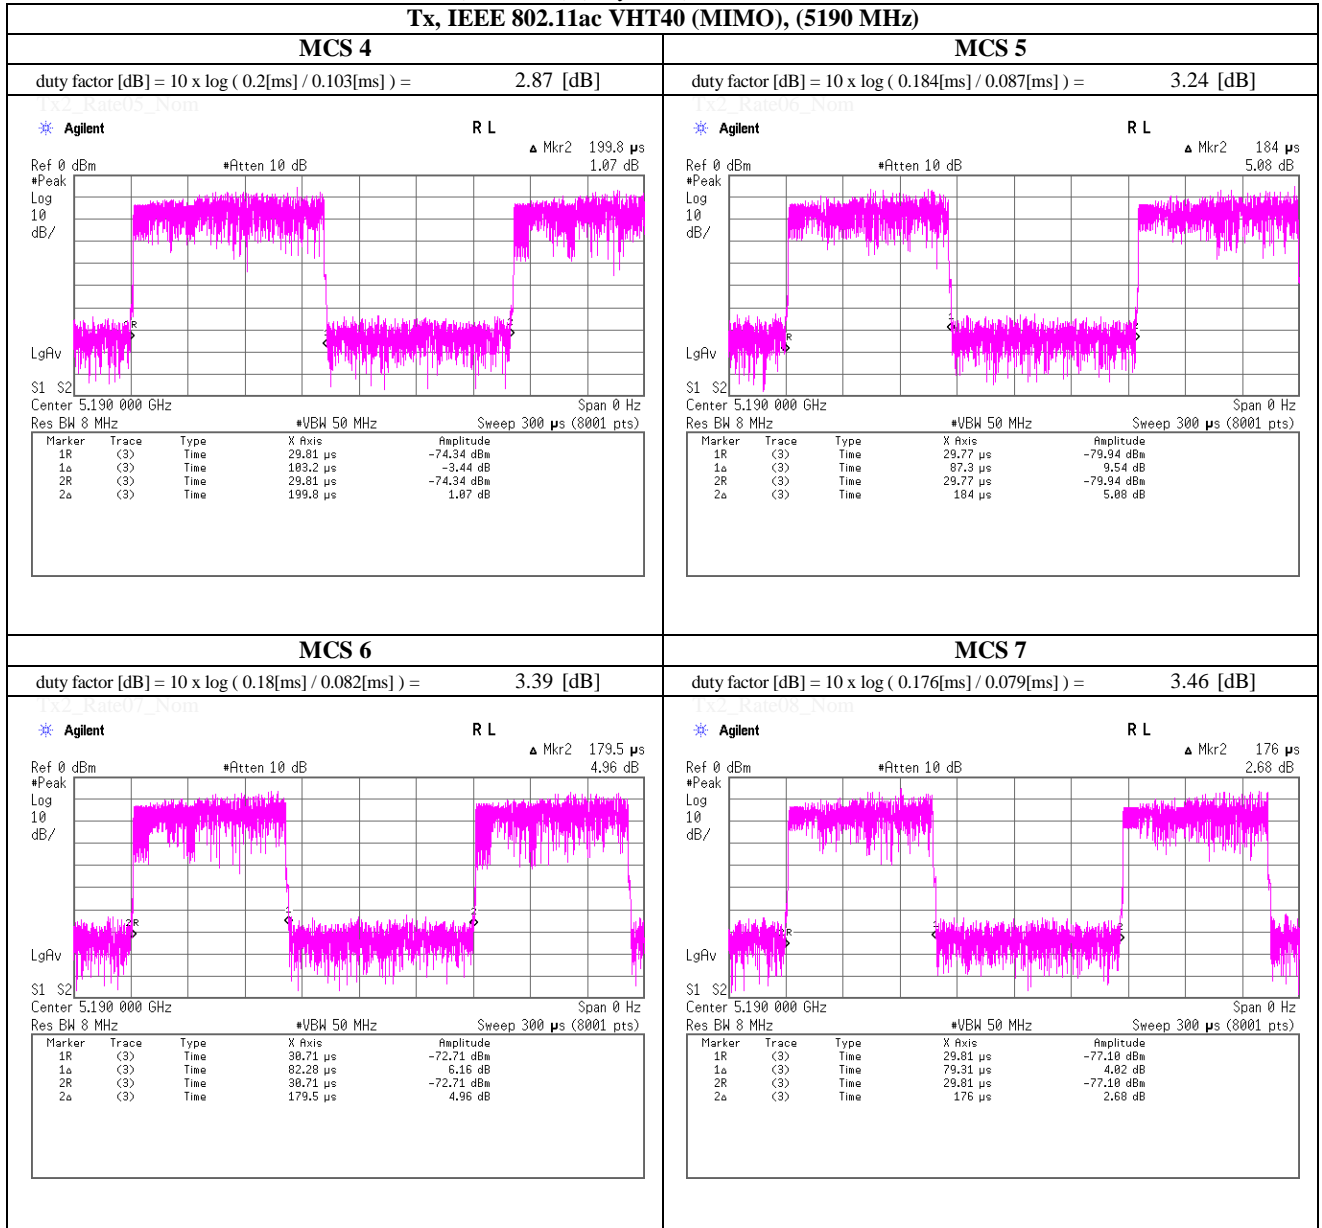

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE 802.11ac VHT40 (MIMO), (5190 MHz)**

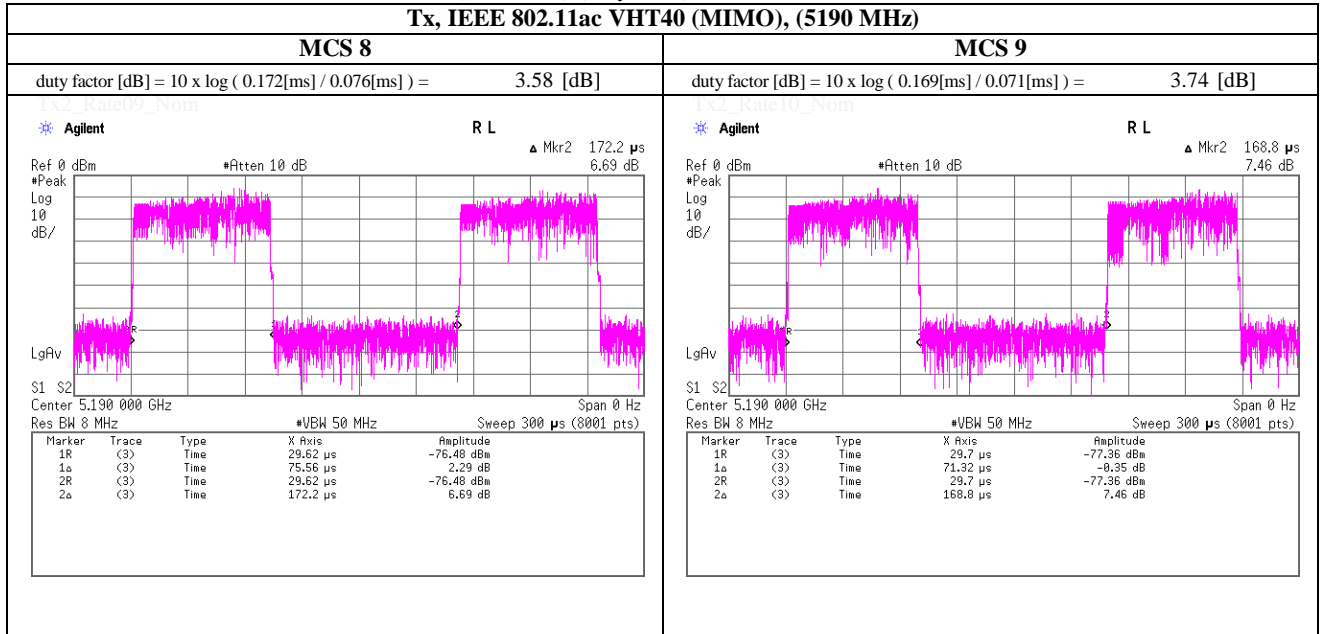

Tx2\_Rate11\_Nom

Tx2\_Rate12\_Nom

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

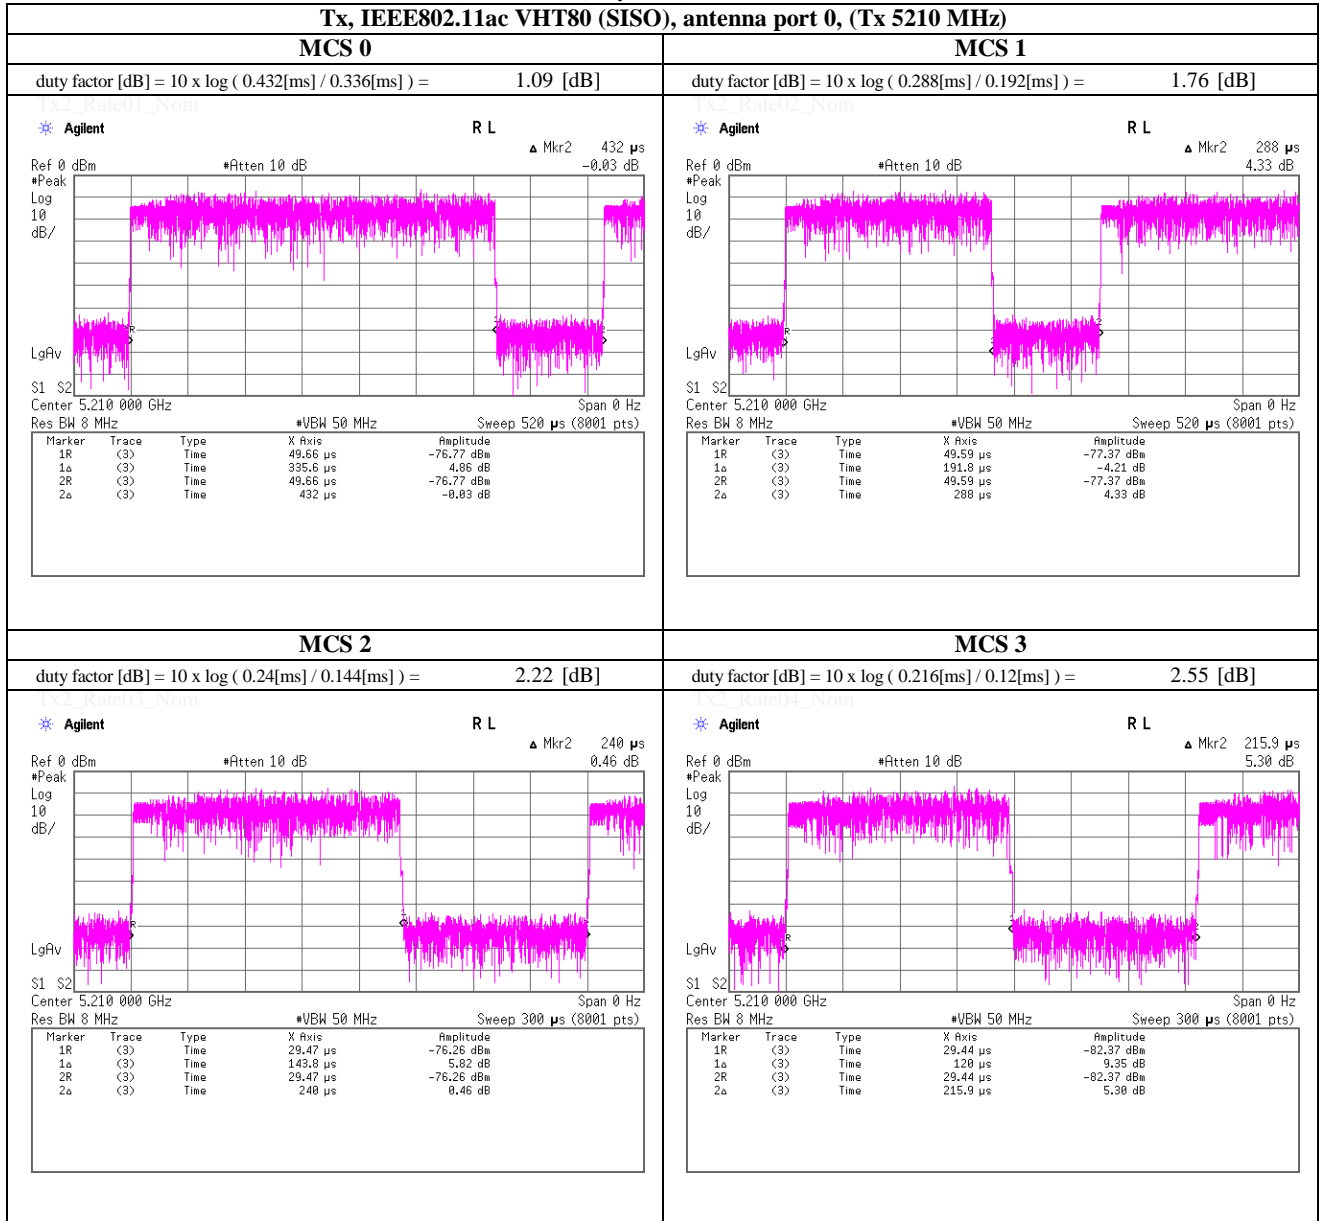


## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

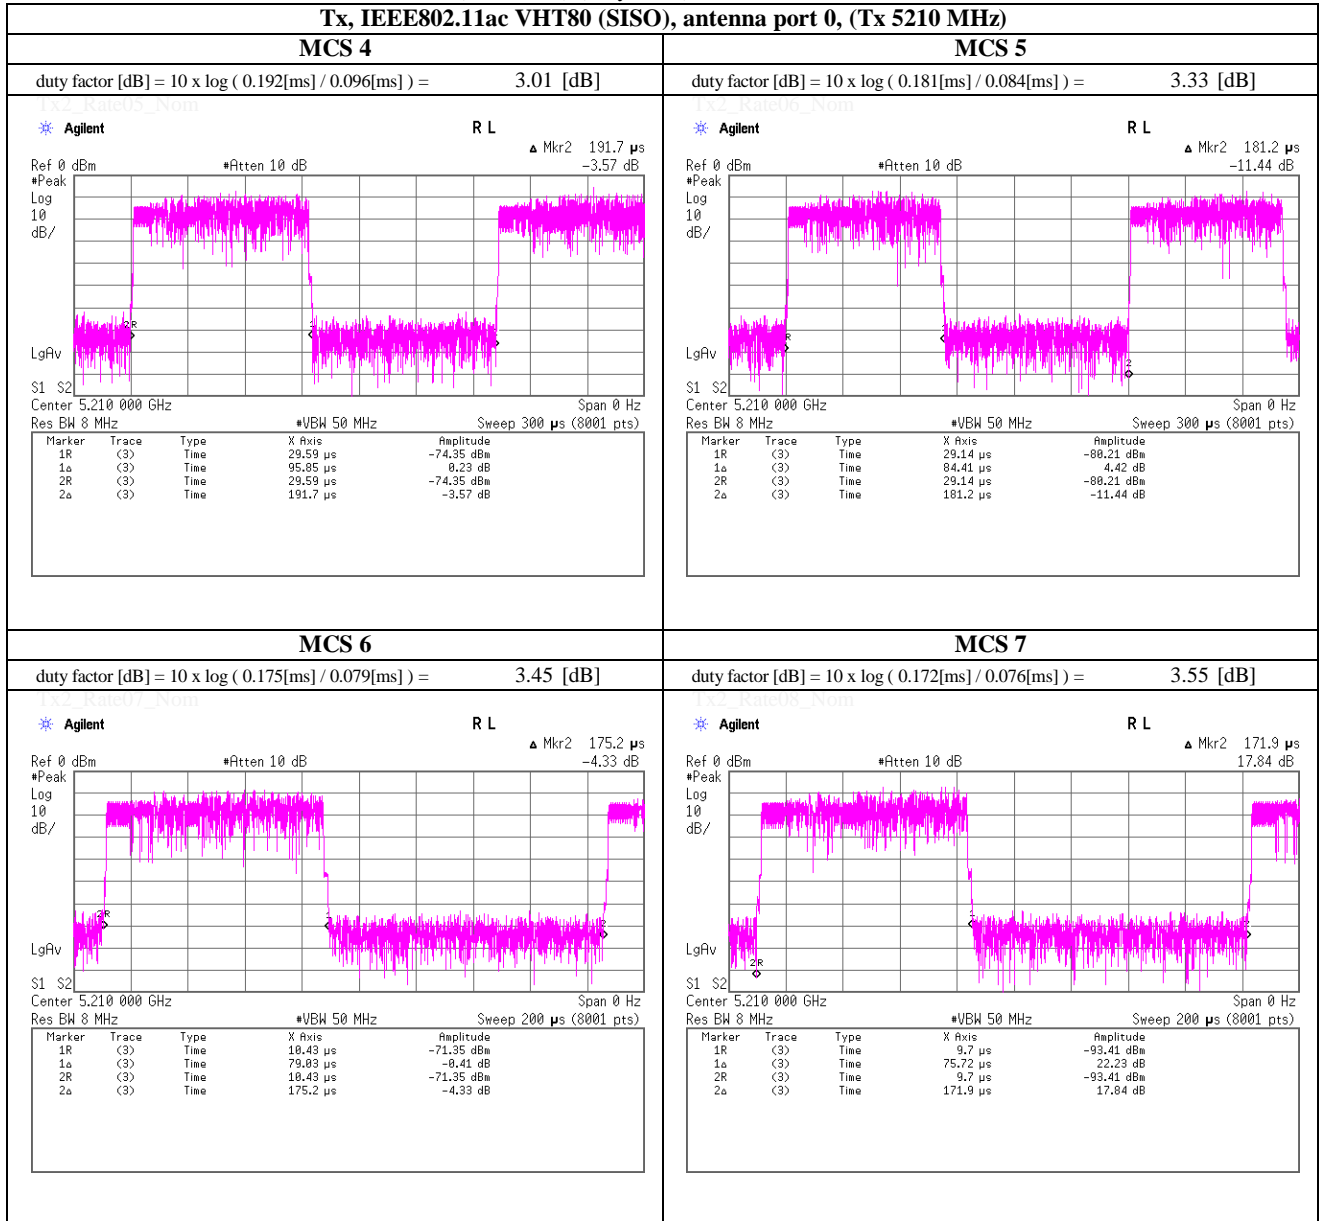

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

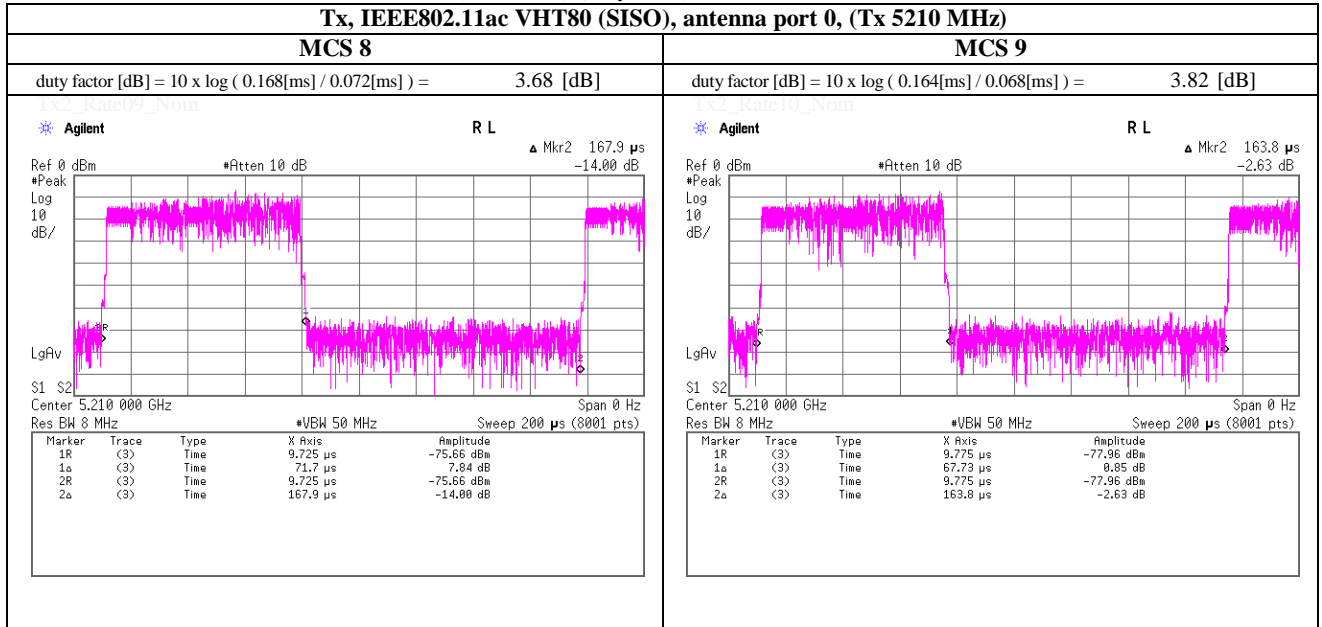

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE 802.11ac VHT80 (MIMO), (5210 MHz)**

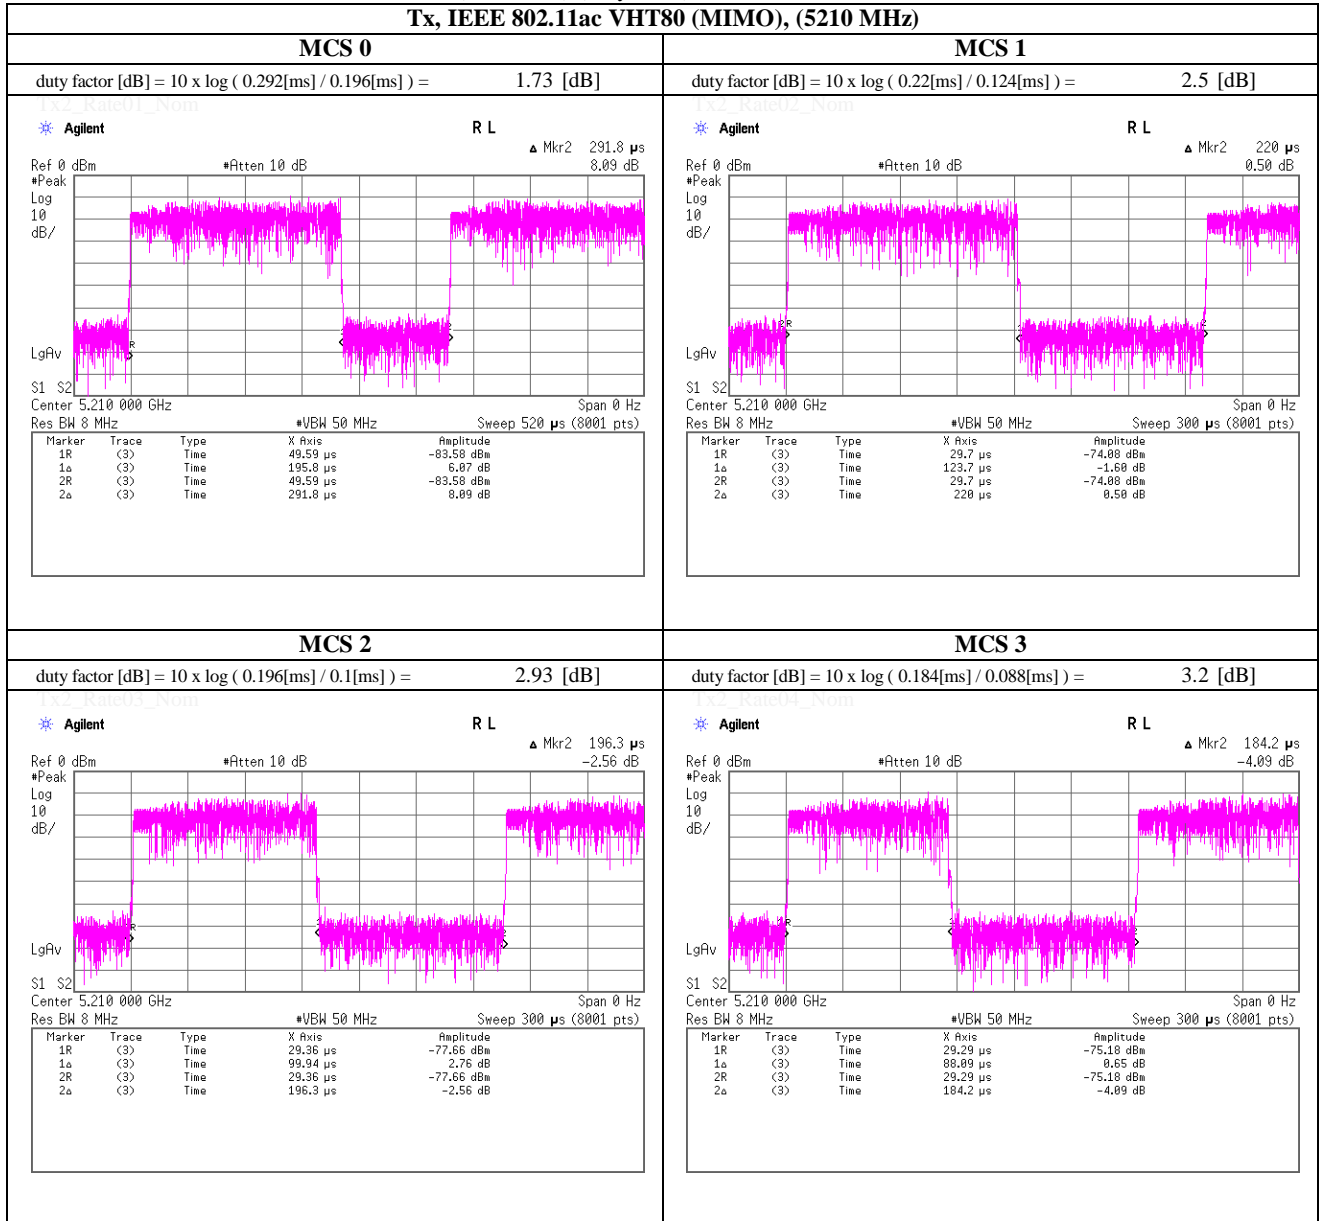

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE 802.11ac VHT80 (MIMO), (5210 MHz)**



**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Conducted Output Power (Conducted)

(Reference) (duty chart)

**Tx, IEEE 802.11ac VHT80 (MIMO), (5210 MHz)**

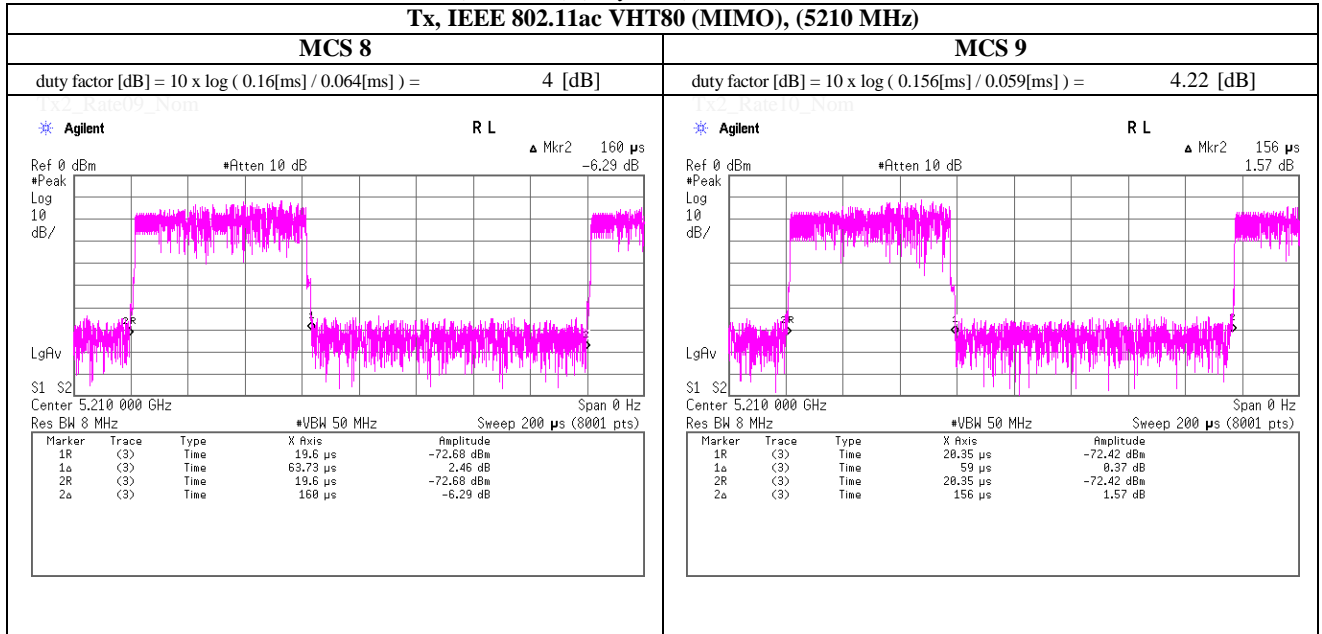

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## VBW (Average) Calculation & Duty chart

**Tx, IEEE802.11a, PN9, worst antenna port 0, worst data mode 48 Mbps**

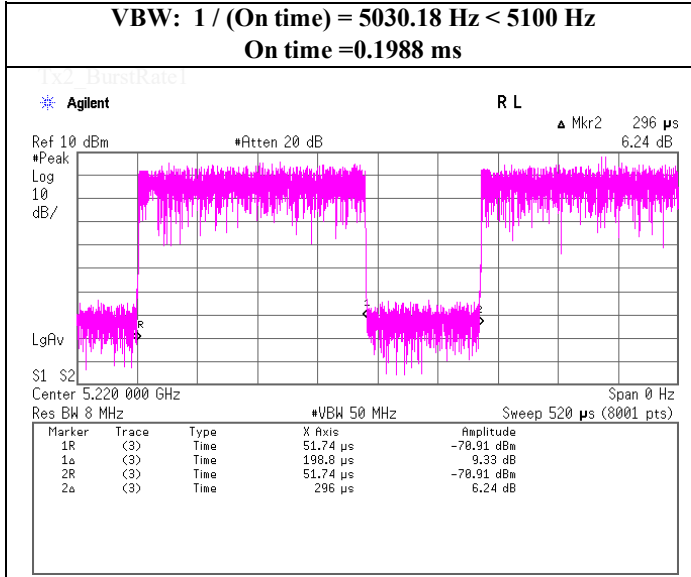

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## VBW (Average) Calculation & Duty chart

**Tx, IEEE802.11n HT20 (SISO), PN9, worst antenna port 0, worst data mode 6 (MCS)**

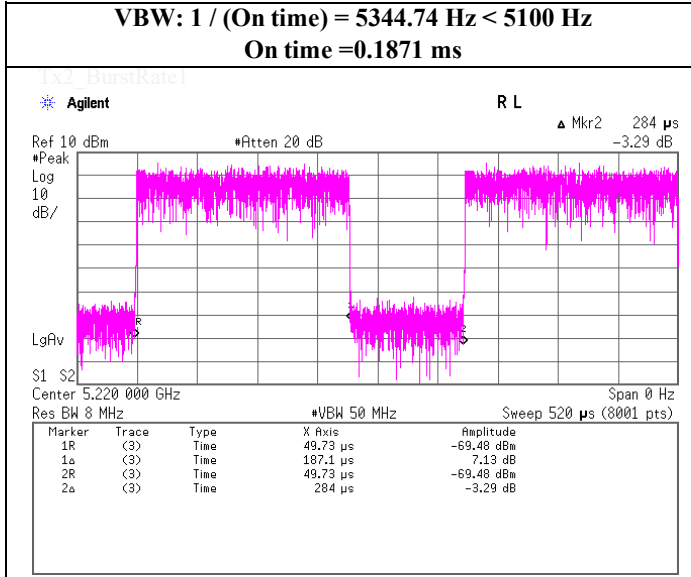

## VBW (Average) Calculation & Duty chart

**Tx, IEEE802.11ac VHT20 (SISO), PN9, worst antenna port 0, worst data mode 3 (MCS)**

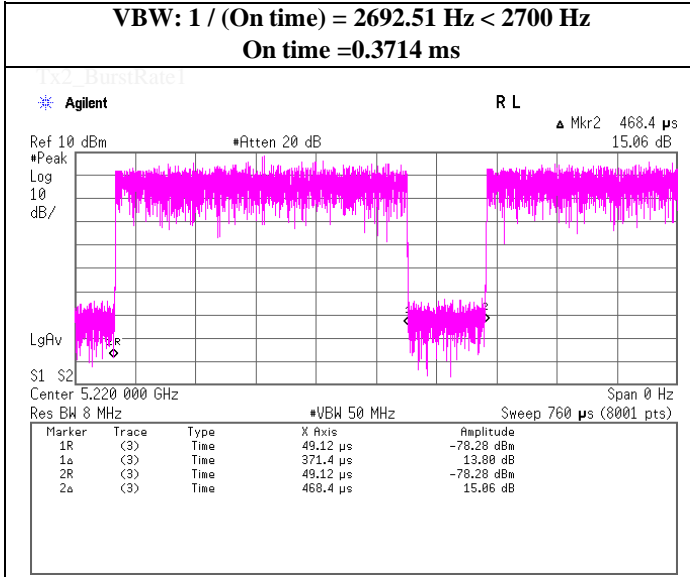

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## VBW (Average) Calculation & Duty chart

**Tx, IEEE802.11n HT20 (MIMO), PN9, worst data mode 15 (MCS)**

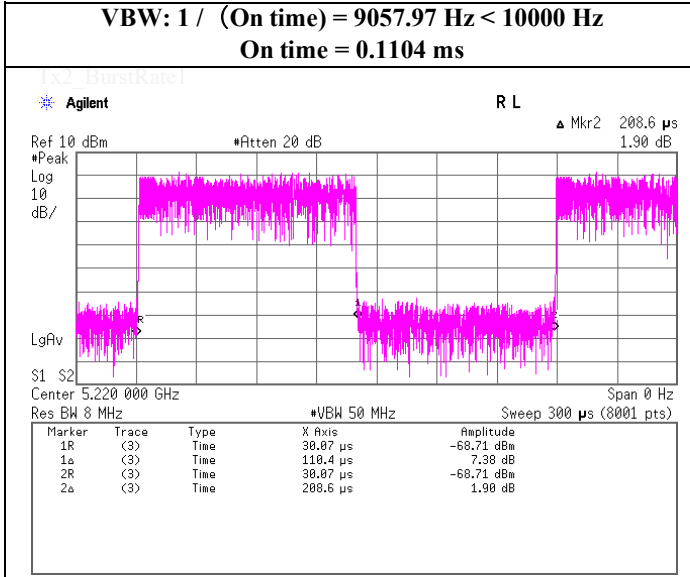

## VBW (Average) Calculation & Duty chart


**Tx, IEEE802.11ac VHT20 (MIMO), PN9, worst data mode 4 (MCS)**

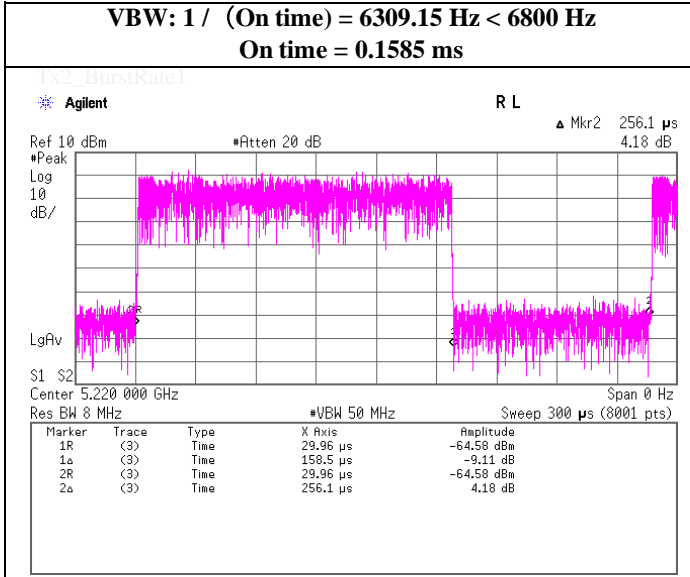

Tx2\_BurstRate2

## VBW (Average) Calculation & Duty chart


**Tx, IEEE802.11n HT40 (SISO), PN9, worst antenna port 1, worst data mode 5 (MCS)**

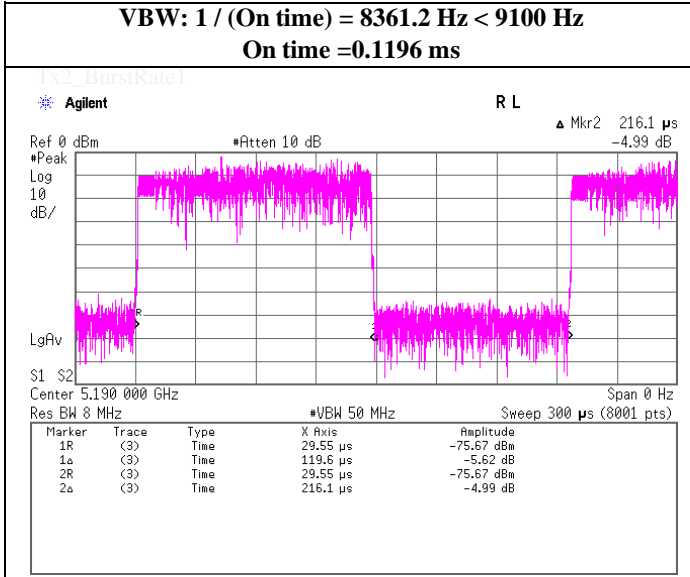

Tx2\_BurstRate2

## VBW (Average) Calculation & Duty chart


**Tx, IEEE802.11n HT40 (SISO), PN9, worst antenna port 0, worst data mode 3 (MCS)**

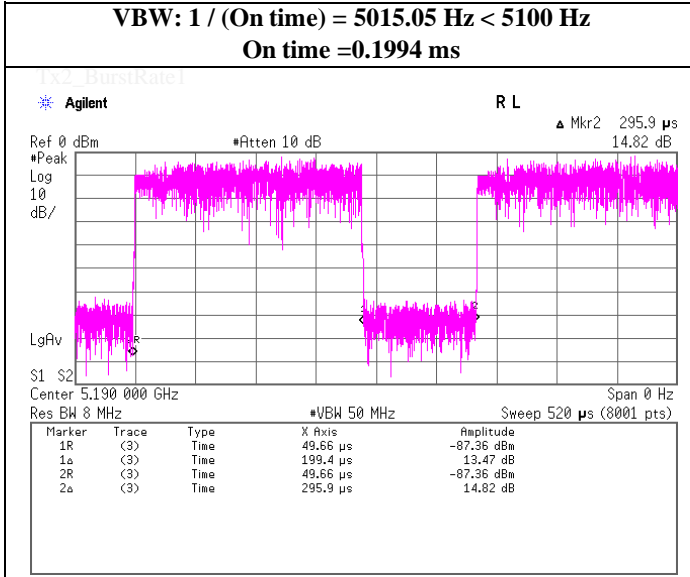

Tx2\_BurstRate2

## VBW (Average) Calculation & Duty chart

**Tx, IEEE802.11ac VHT40 (SISO), PN9, worst antenna port 1, worst data mode 4(MCS)**

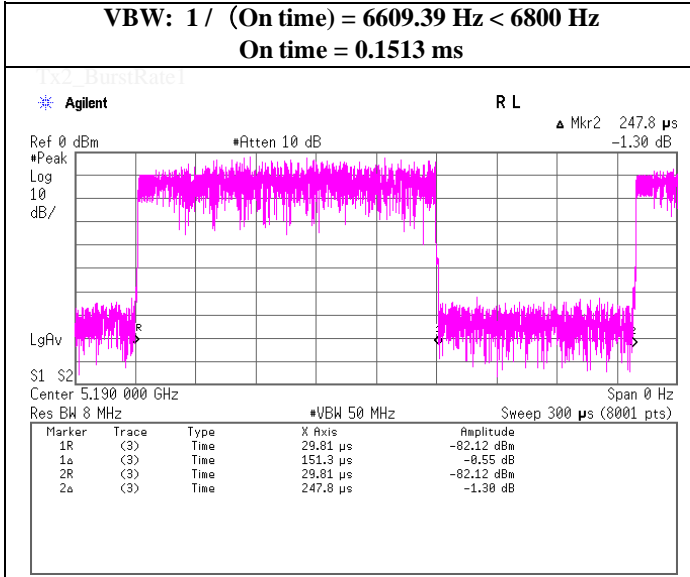


Tx2\_BurstRate2



## VBW (Average) Calculation & Duty chart


**Tx, IEEE802.11ac VHT40 (SISO), PN9, worst antenna port 0, worst data mode 2(MCS)**

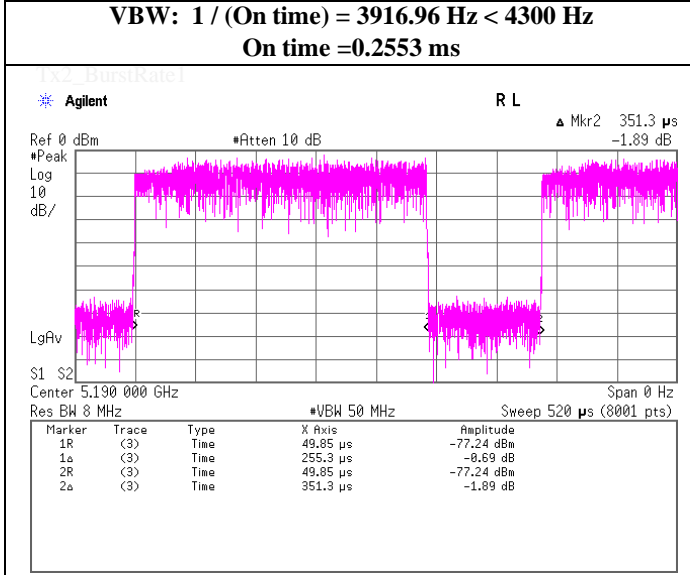

Tx2\_BurstRate2

## VBW (Average) Calculation & Duty chart

**Tx, IEEE 802.11n HT40 (MIMO), PN9, worst data mode 15 (MCS)**

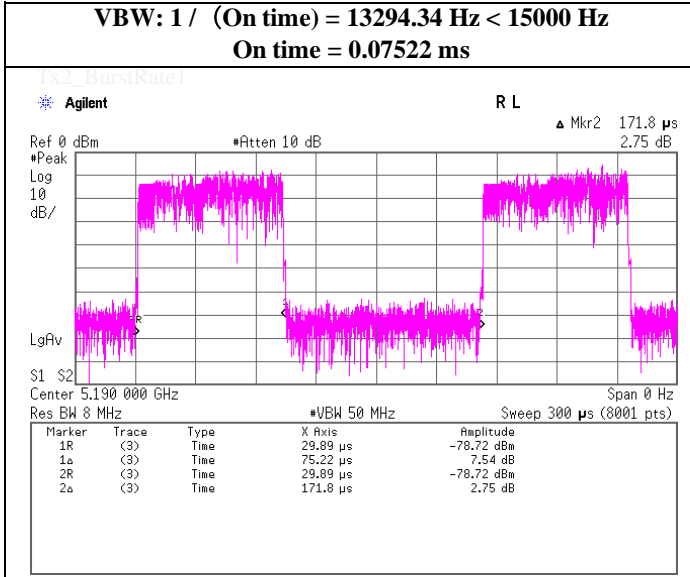

Tx2\_BurstRate2

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## VBW (Average) Calculation & Duty chart

**Tx, IEEE 802.11n HT40 (MIMO), PN9, worst data mode 11 (MCS)**

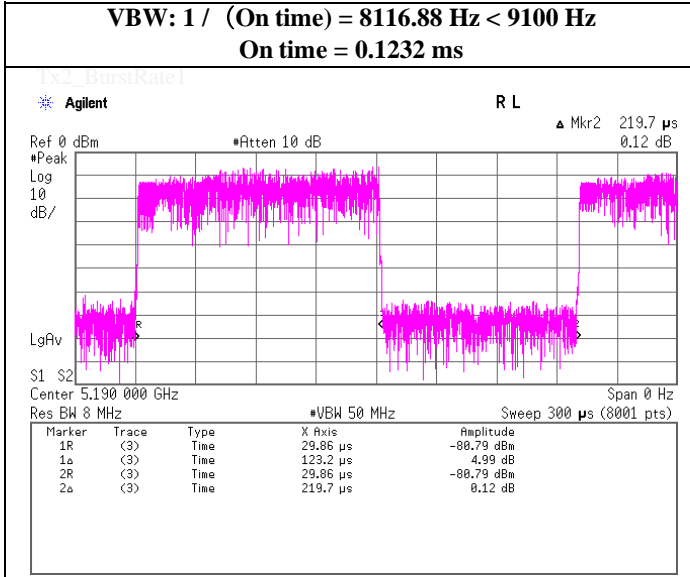

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## VBW (Average) Calculation & Duty chart

**Tx, IEEE 802.11ac VHT40 (MIMO), PN9, worst data mode 4 (MCS)**

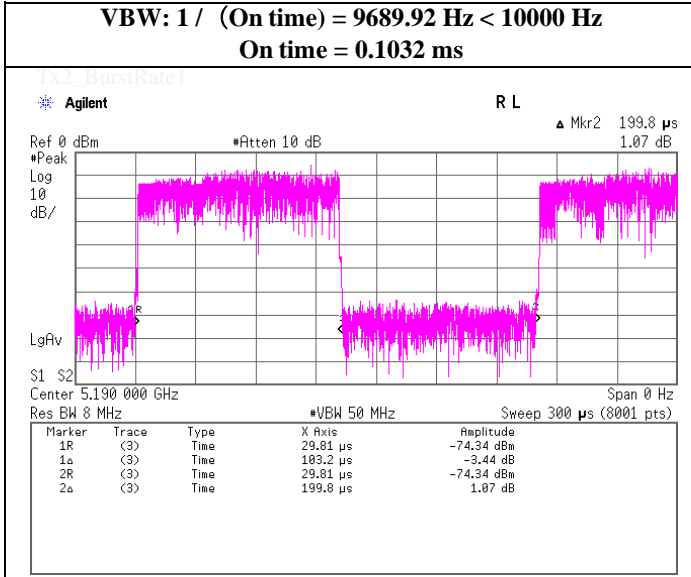

Tx2\_BurstRate2

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## VBW (Average) Calculation & Duty chart

**Tx, IEEE 802.11ac VHT40 (MIMO), PN9, worst data mode 6 (MCS)**

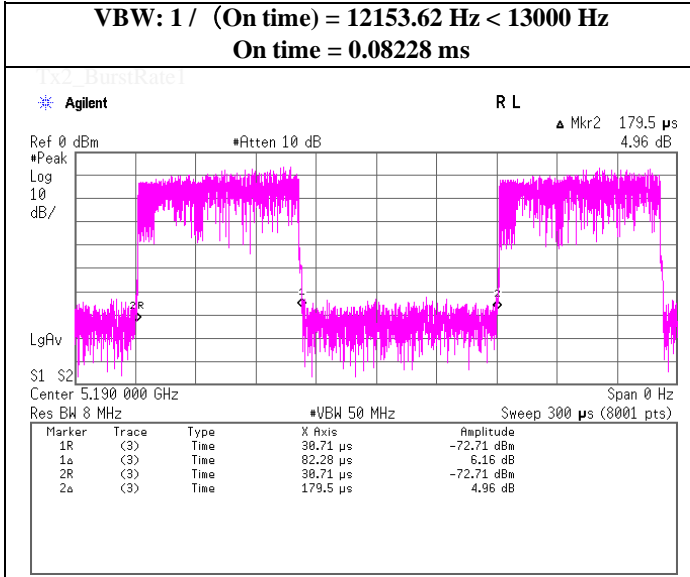

Tx2\_BurstRate2

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## VBW (Average) Calculation & Duty chart

**Tx, IEEE802.11ac VHT80 (SISO), PN9, worst antenna port 0, worst data mode 5 (MCS)**

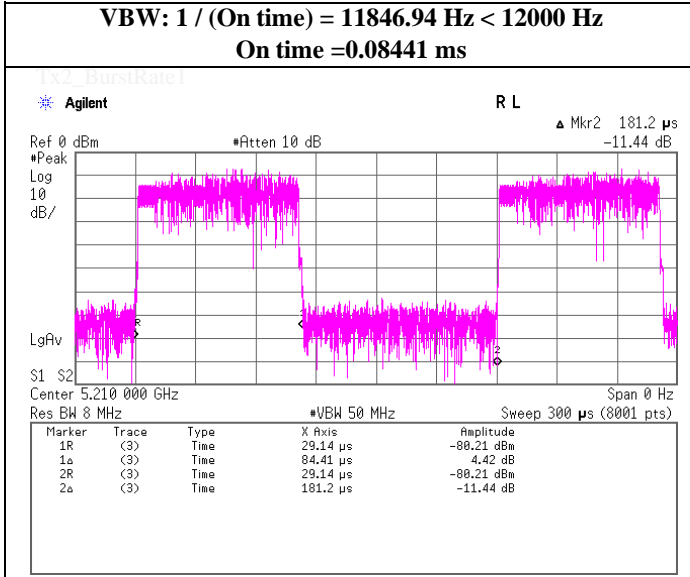

Tx2\_BurstRate2

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## VBW (Average) Calculation & Duty chart

**Tx, IEEE 802.11ac VHT80 (MIMO), PN9, worst data mode 5 (MCS)**

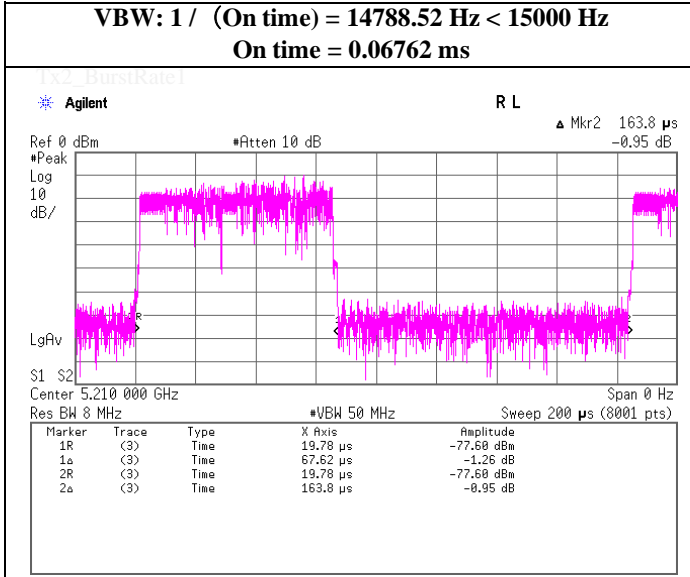

Tx2\_BurstRate2

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## VBW (Average) Calculation & Duty chart

**Tx, IEEE 802.11ac VHT80 (MIMO), PN9, worst data mode 6 (MCS)**

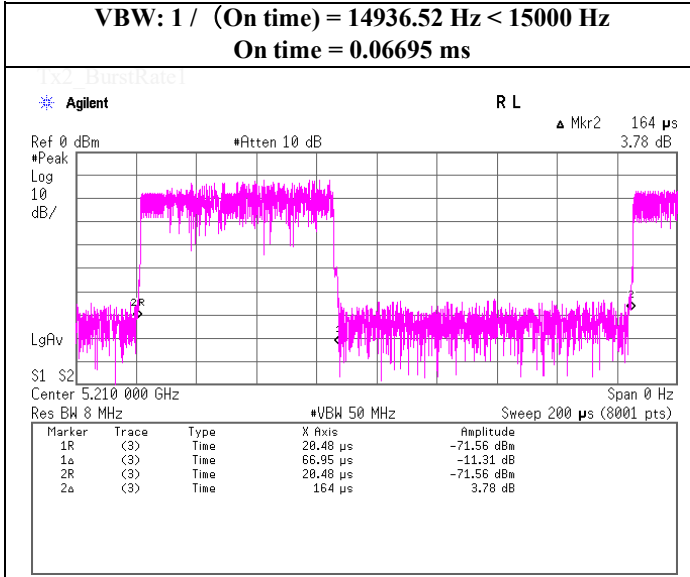

Tx2\_BurstRate2

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 13, 2019                        |
| Temperature / Humidity | 24 deg. C / 57 % RH                   |
| Engineer               | Kenichi Adachi                        |
| Mode                   | Tx, IIEEE802.11a                      |

### Antenna 0

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5180                      | -12.81                    | 3.89               | 10.21               | 1.72                | 2.95                  | 0.00                          | 3.01                 | 11.00               | 7.99           | 5.96                 | 17.00               | 11.04          |
| 5220                      | -12.52                    | 3.90               | 10.21               | 1.72                | 2.95                  | 0.00                          | 3.31                 | 11.00               | 7.69           | 6.26                 | 17.00               | 10.74          |
| 5240                      | -12.46                    | 3.90               | 10.21               | 1.72                | 2.95                  | 0.00                          | 3.37                 | 11.00               | 7.63           | 6.32                 | 17.00               | 10.69          |
| 5260                      | -12.51                    | 3.91               | 10.21               | 1.72                | 2.95                  | 0.00                          | 3.33                 | 11.00               | 7.67           | 6.28                 | 17.00               | 10.72          |
| 5300                      | -12.16                    | 3.92               | 10.21               | 1.72                | 2.95                  | 0.00                          | 3.69                 | 11.00               | 7.31           | 6.64                 | 17.00               | 10.36          |
| 5320                      | -12.38                    | 3.92               | 10.21               | 1.72                | 2.95                  | 0.00                          | 3.47                 | 11.00               | 7.53           | 6.42                 | 17.00               | 10.58          |
| 5500                      | -12.50                    | 3.97               | 10.22               | 1.72                | 2.95                  | 0.00                          | 3.41                 | 11.00               | 7.59           | 6.36                 | 17.00               | 10.64          |
| 5580                      | -12.75                    | 3.98               | 10.22               | 1.72                | 2.95                  | 0.00                          | 3.17                 | 11.00               | 7.83           | 6.12                 | 17.00               | 10.88          |
| 5700                      | -12.79                    | 3.99               | 10.23               | 1.72                | 2.95                  | 0.00                          | 3.15                 | 11.00               | 7.85           | 6.10                 | 17.00               | 10.90          |
| 5745                      | -21.11                    | 4.00               | 10.23               | 1.72                | 2.95                  | 6.99                          | 1.83                 | 30.00               | 28.17          | 4.78                 | 36.00               | 31.22          |
| 5785                      | -21.83                    | 4.00               | 10.24               | 1.72                | 2.95                  | 6.99                          | 1.12                 | 30.00               | 28.88          | 4.07                 | 36.00               | 31.93          |
| 5825                      | -21.64                    | 4.01               | 10.24               | 1.72                | 2.95                  | 6.99                          | 1.32                 | 30.00               | 28.68          | 4.27                 | 36.00               | 31.73          |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

### Maximum Power Spectral Density

#### Tx, IEEE802.11a, Antenna 0 (Worst)

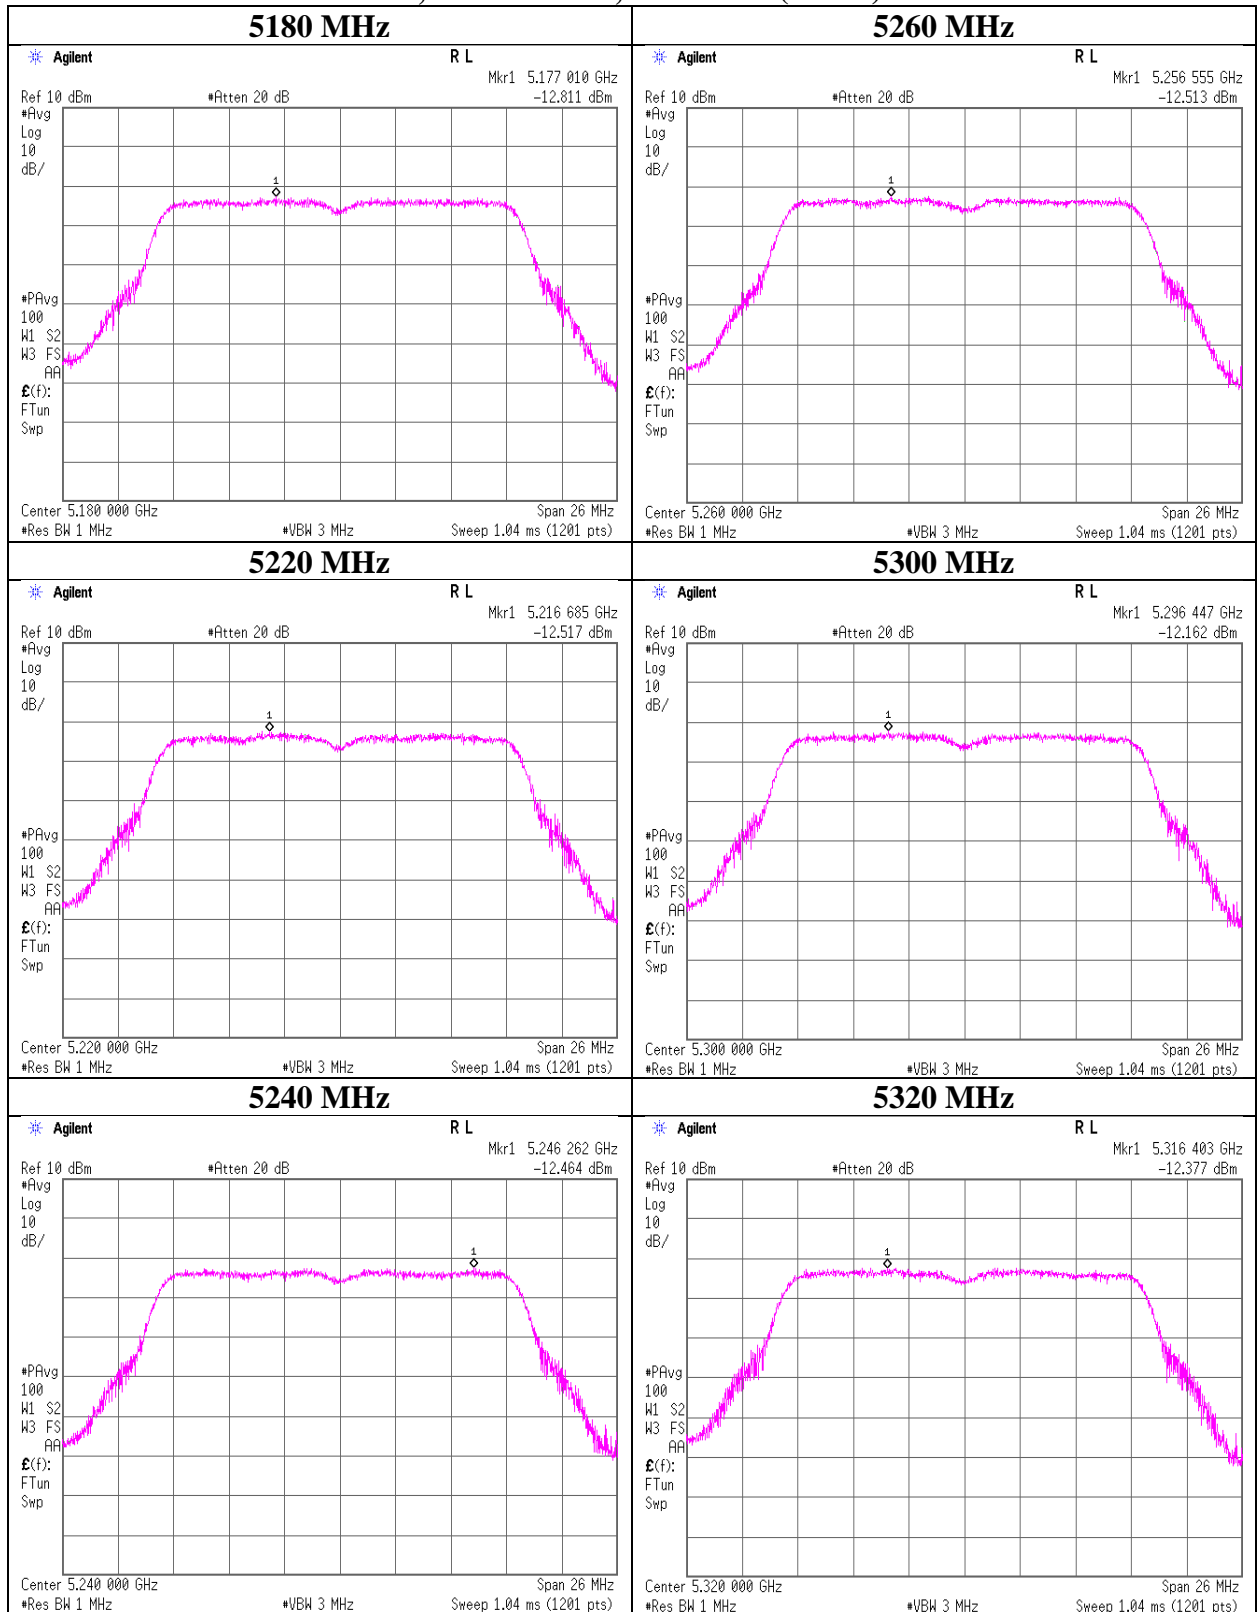


**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11a, Antenna 0 (Worst)

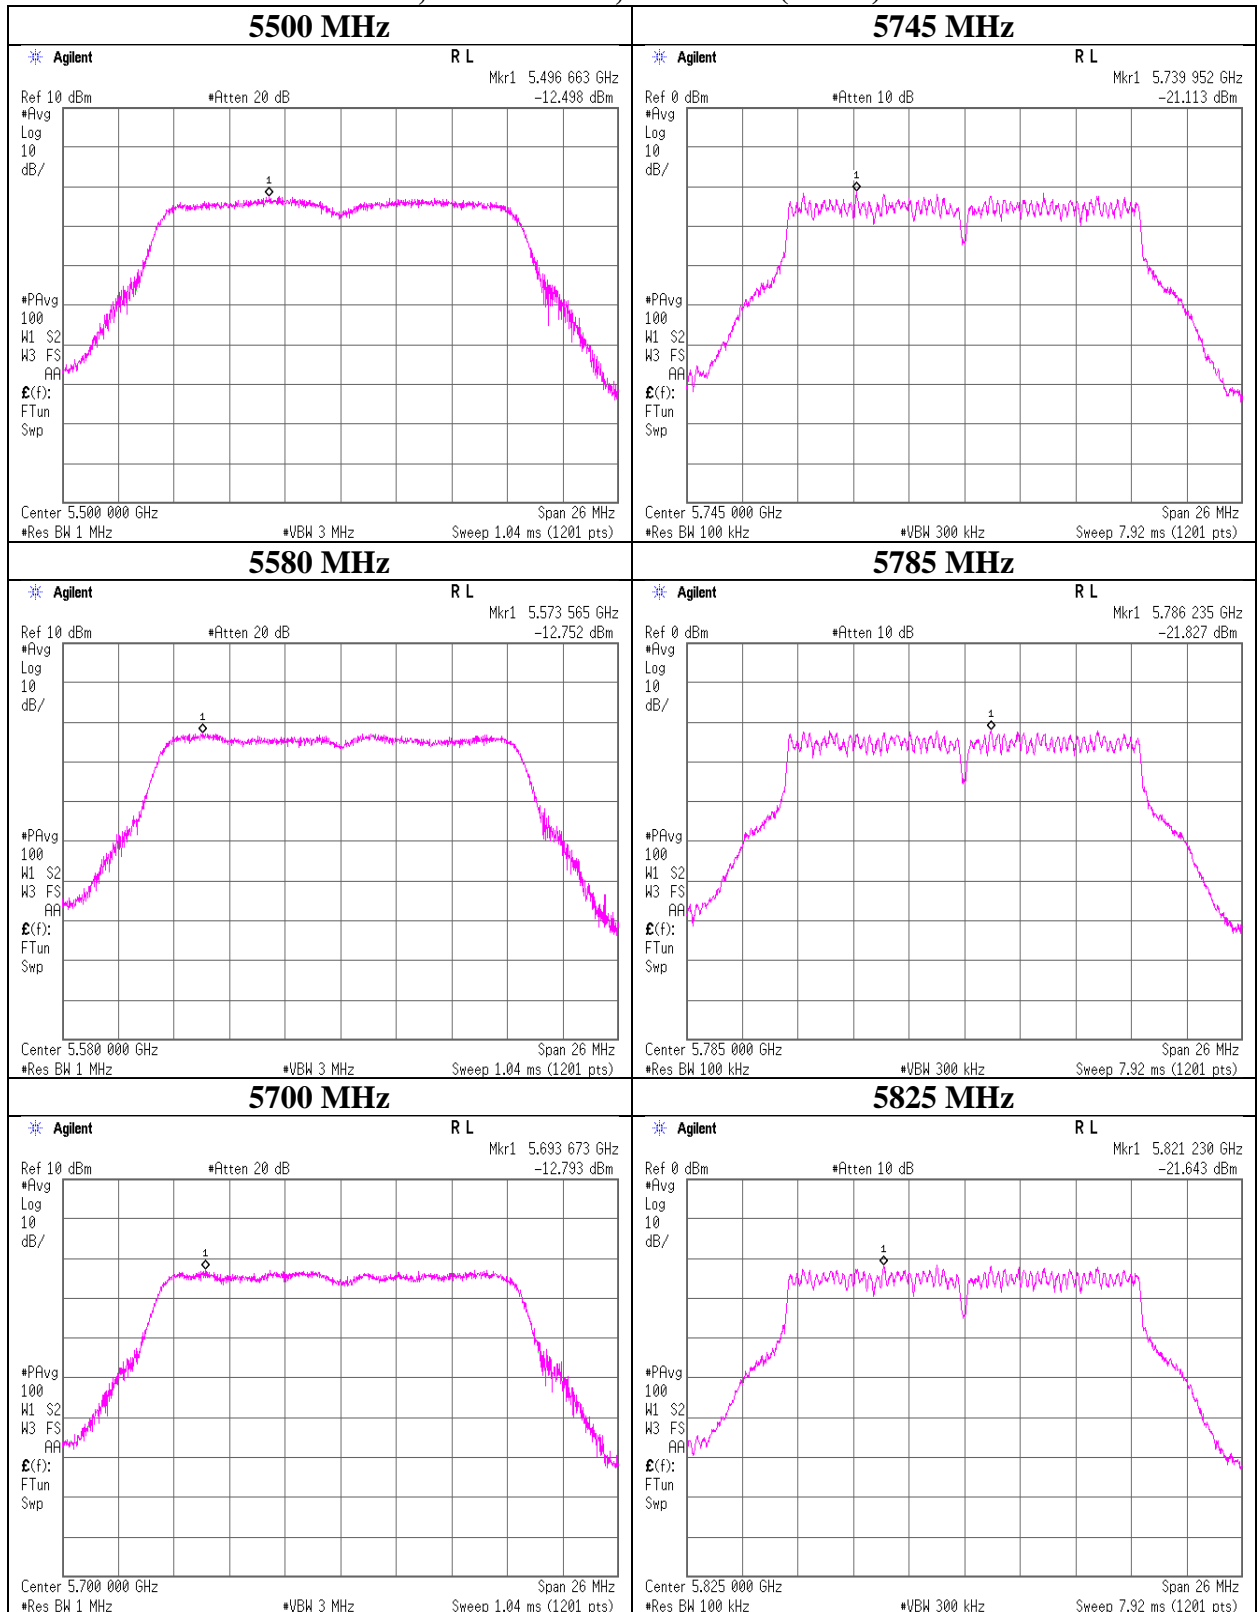

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 13, 2019                        |
| Temperature / Humidity | 24 deg. C / 57 % RH                   |
| Engineer               | Kenichi Adachi                        |
| Mode                   | Tx, IEEE802.11n HT20 (SISO)           |

### Antenna 0

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5180                      | -12.55                    | 3.89               | 10.21               | 1.81                | 2.95                  | 0.00                          | 3.36                 | 11.00               | 7.64           | 6.31                 | 17.00               | 10.69          |
| 5220                      | -12.91                    | 3.90               | 10.21               | 1.81                | 2.95                  | 0.00                          | 3.01                 | 11.00               | 7.99           | 5.96                 | 17.00               | 11.04          |
| 5240                      | -12.88                    | 3.90               | 10.21               | 1.81                | 2.95                  | 0.00                          | 3.04                 | 11.00               | 7.96           | 5.99                 | 17.00               | 11.01          |
| 5260                      | -11.83                    | 3.91               | 10.21               | 1.81                | 2.95                  | 0.00                          | 4.10                 | 11.00               | 6.90           | 7.05                 | 17.00               | 9.95           |
| 5300                      | -12.57                    | 3.92               | 10.21               | 1.81                | 2.95                  | 0.00                          | 3.37                 | 11.00               | 7.63           | 6.32                 | 17.00               | 10.68          |
| 5320                      | -12.60                    | 3.92               | 10.21               | 1.81                | 2.95                  | 0.00                          | 3.34                 | 11.00               | 7.66           | 6.29                 | 17.00               | 10.71          |
| 5500                      | -13.32                    | 3.97               | 10.22               | 1.81                | 2.95                  | 0.00                          | 2.68                 | 11.00               | 8.32           | 5.63                 | 17.00               | 11.38          |
| 5580                      | -13.53                    | 3.98               | 10.22               | 1.81                | 2.95                  | 0.00                          | 2.48                 | 11.00               | 8.52           | 5.43                 | 17.00               | 11.57          |
| 5700                      | -13.25                    | 3.99               | 10.23               | 1.81                | 2.95                  | 0.00                          | 2.78                 | 11.00               | 8.22           | 5.73                 | 17.00               | 11.27          |
| 5745                      | -21.56                    | 4.00               | 10.23               | 1.81                | 2.95                  | 6.99                          | 1.47                 | 30.00               | 28.53          | 4.42                 | 36.00               | 31.58          |
| 5785                      | -21.18                    | 4.00               | 10.24               | 1.81                | 2.95                  | 6.99                          | 1.86                 | 30.00               | 28.14          | 4.80                 | 36.00               | 31.20          |
| 5825                      | -21.72                    | 4.01               | 10.24               | 1.81                | 2.95                  | 6.99                          | 1.33                 | 30.00               | 28.67          | 4.28                 | 36.00               | 31.72          |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT20 (SISO), Antenna 0 (Worst)

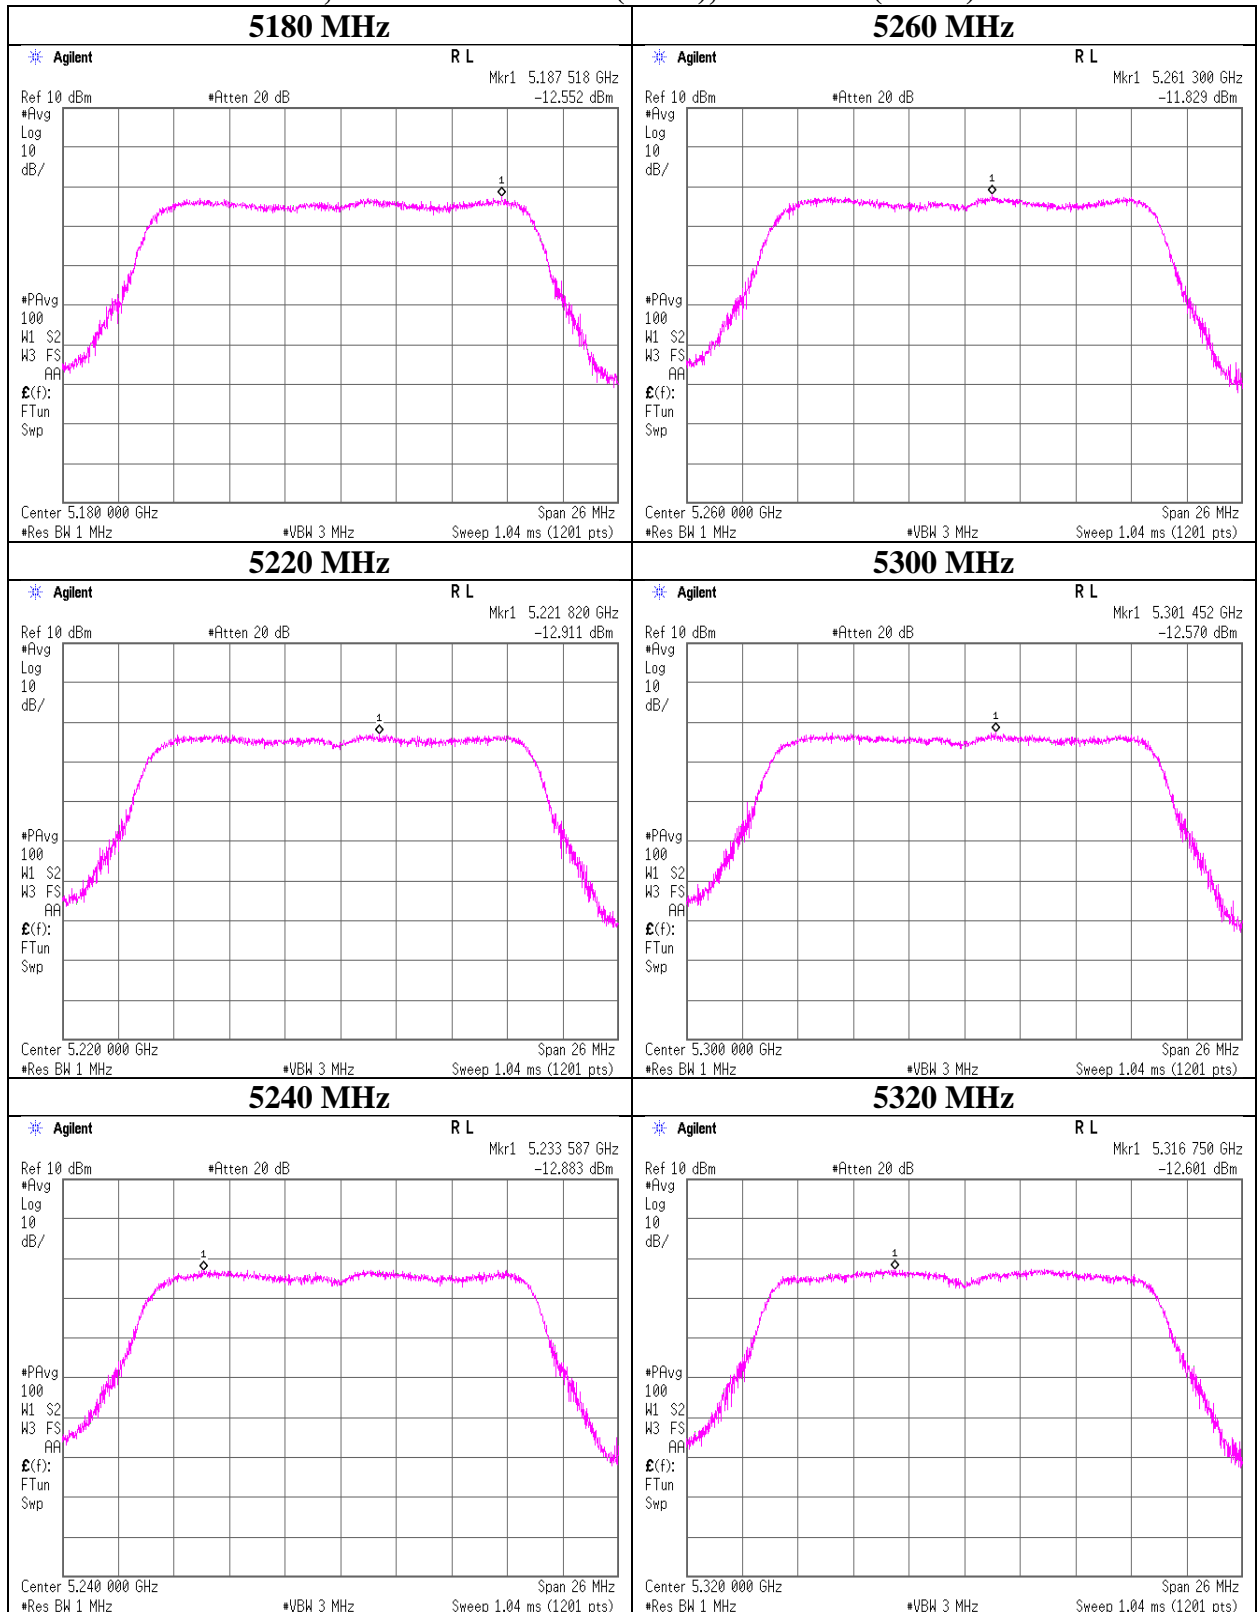


**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT20 (SISO), Antenna 0 (Worst)

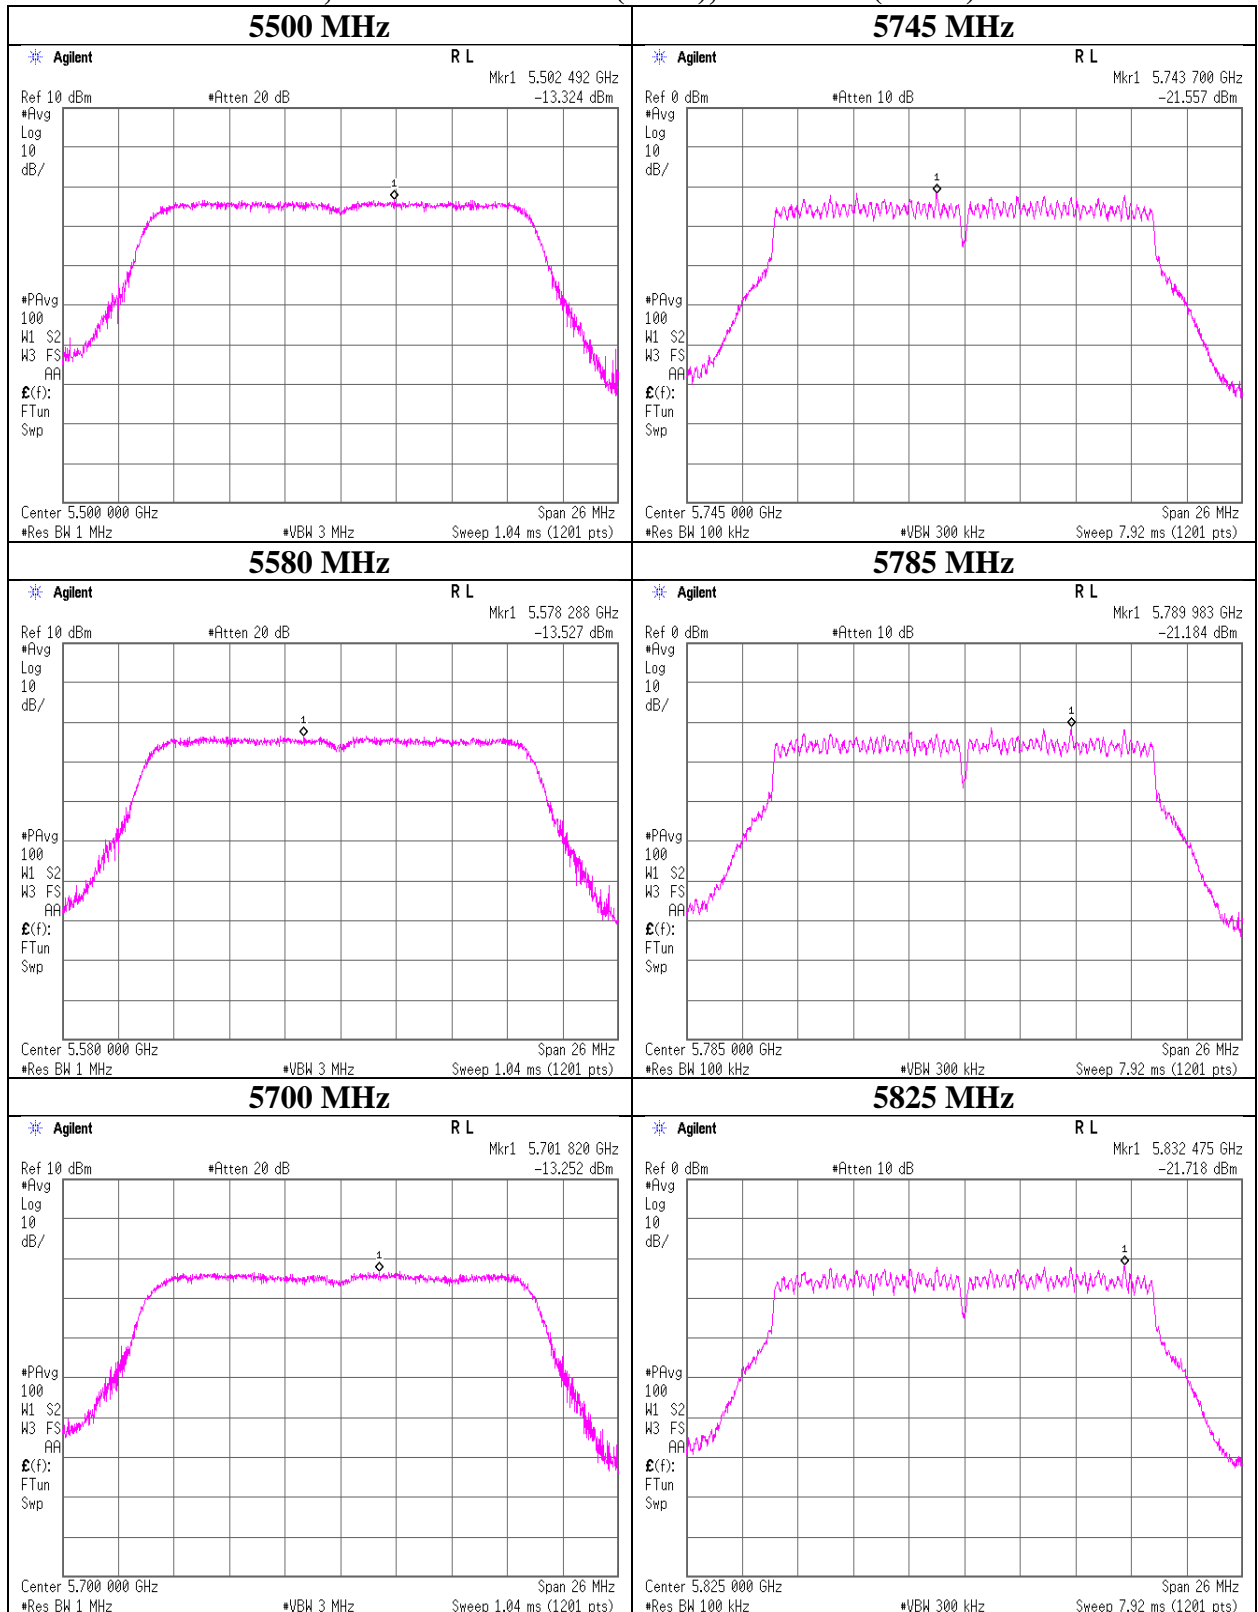

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 15, 2019                        |
| Temperature / Humidity | 24 deg. C / 35 % RH                   |
| Engineer               | Makoto Hosaka                         |
| Mode                   | Tx, IIEEE802.11ac VHT20 (SISO)        |

### Antenna 0

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5180                      | -12.42                    | 3.89               | 10.21               | 1.01                | 2.95                  | 0.00                          | 2.69                 | 11.00               | 8.31           | 5.64                 | 17.00               | 11.36          |
| 5220                      | -12.62                    | 3.90               | 10.21               | 1.01                | 2.95                  | 0.00                          | 2.50                 | 11.00               | 8.50           | 5.45                 | 17.00               | 11.55          |
| 5240                      | -12.52                    | 3.90               | 10.21               | 1.01                | 2.95                  | 0.00                          | 2.60                 | 11.00               | 8.40           | 5.55                 | 17.00               | 11.45          |
| 5260                      | -12.28                    | 3.91               | 10.21               | 1.01                | 2.95                  | 0.00                          | 2.86                 | 11.00               | 8.15           | 5.80                 | 17.00               | 11.20          |
| 5300                      | -11.56                    | 3.92               | 10.21               | 1.01                | 2.95                  | 0.00                          | 3.58                 | 11.00               | 7.42           | 6.53                 | 17.00               | 10.47          |
| 5320                      | -12.05                    | 3.92               | 10.21               | 1.01                | 2.95                  | 0.00                          | 3.09                 | 11.00               | 7.91           | 6.04                 | 17.00               | 10.96          |
| 5500                      | -12.78                    | 3.97               | 10.22               | 1.01                | 2.95                  | 0.00                          | 2.42                 | 11.00               | 8.58           | 5.37                 | 17.00               | 11.63          |
| 5580                      | -12.63                    | 3.98               | 10.22               | 1.01                | 2.95                  | 0.00                          | 2.58                 | 11.00               | 8.42           | 5.53                 | 17.00               | 11.47          |
| 5700                      | -12.34                    | 3.99               | 10.23               | 1.01                | 2.95                  | 0.00                          | 2.90                 | 11.00               | 8.11           | 5.84                 | 17.00               | 11.16          |
| 5745                      | -21.28                    | 4.00               | 10.23               | 1.01                | 2.95                  | 6.99                          | 0.95                 | 30.00               | 29.05          | 3.90                 | 36.00               | 32.10          |
| 5785                      | -20.77                    | 4.00               | 10.24               | 1.01                | 2.95                  | 6.99                          | 1.47                 | 30.00               | 28.53          | 4.42                 | 36.00               | 31.58          |
| 5825                      | -21.19                    | 4.01               | 10.24               | 1.01                | 2.95                  | 6.99                          | 1.06                 | 30.00               | 28.94          | 4.01                 | 36.00               | 31.99          |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT20 (SISO), Antenna 0 (Worst)

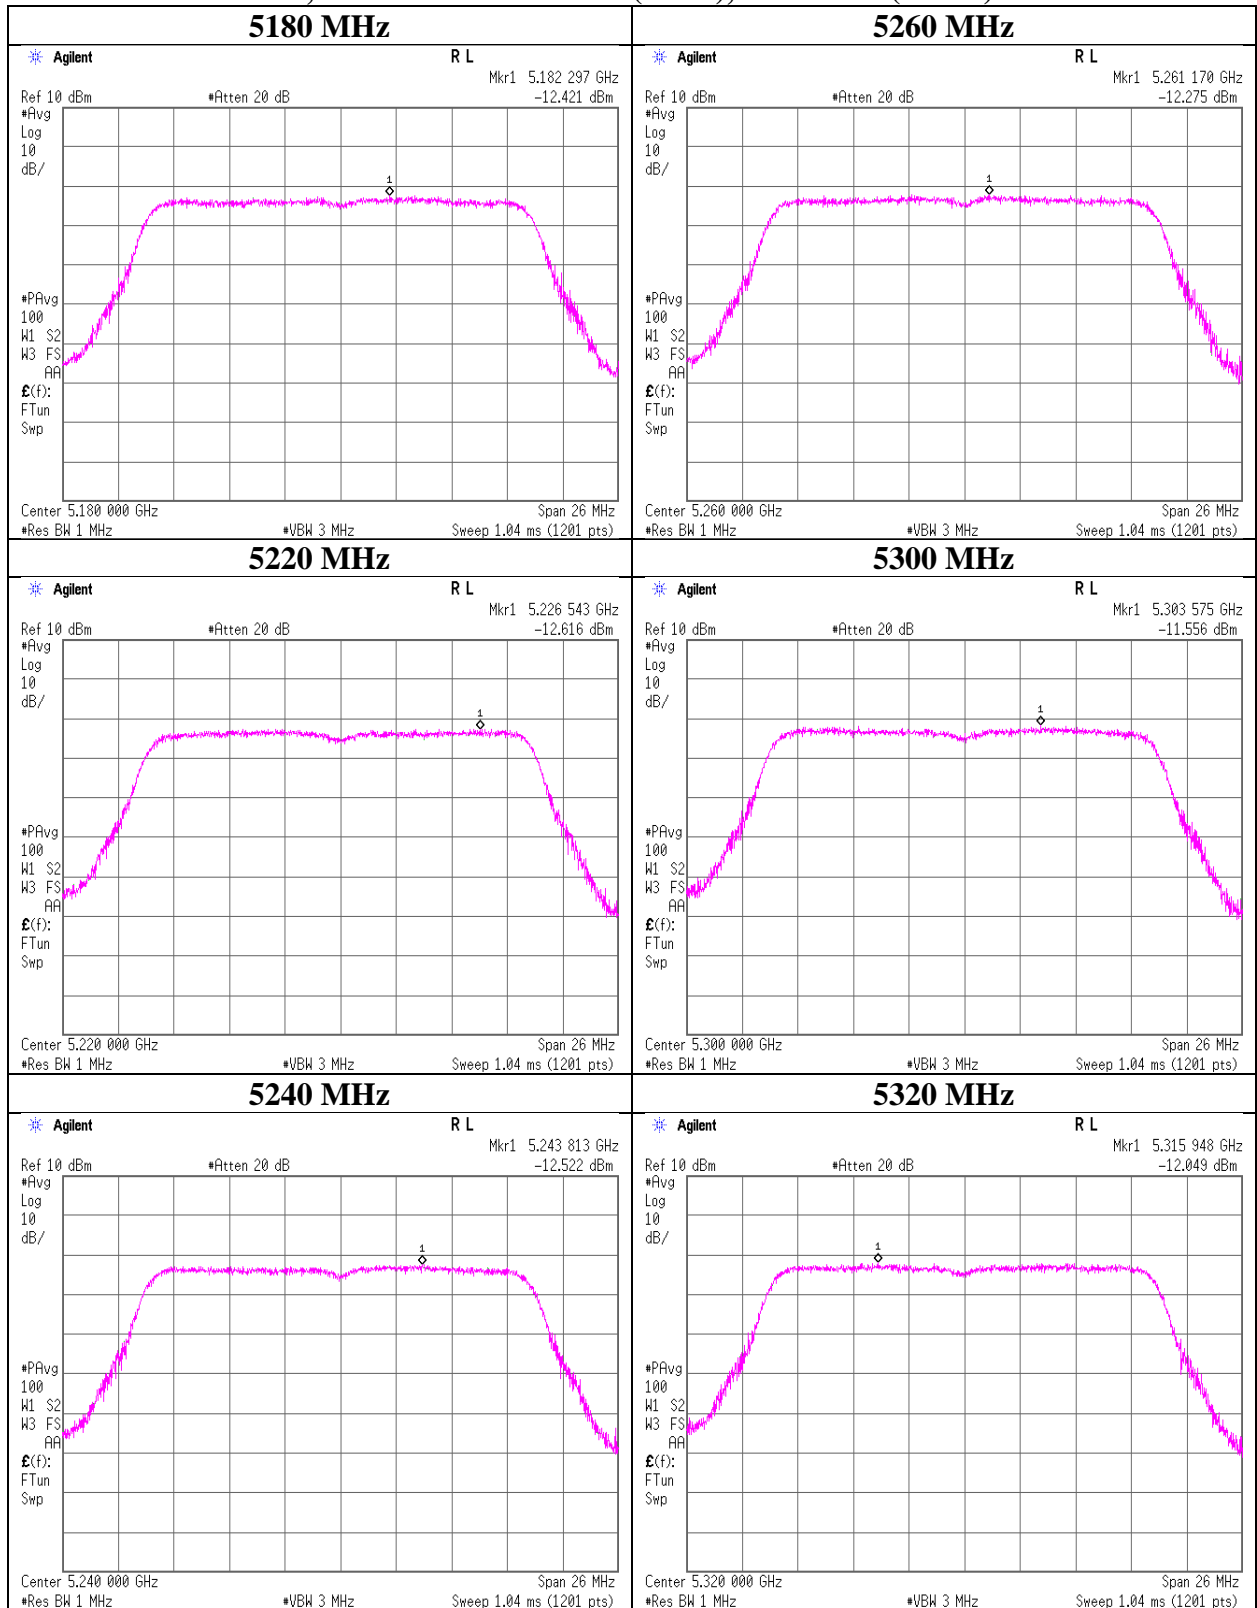

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



**Maximum Power Spectral Density**

**Tx, IEEE802.11ac VHT20 (SISO), Antenna 0 (Worst)**

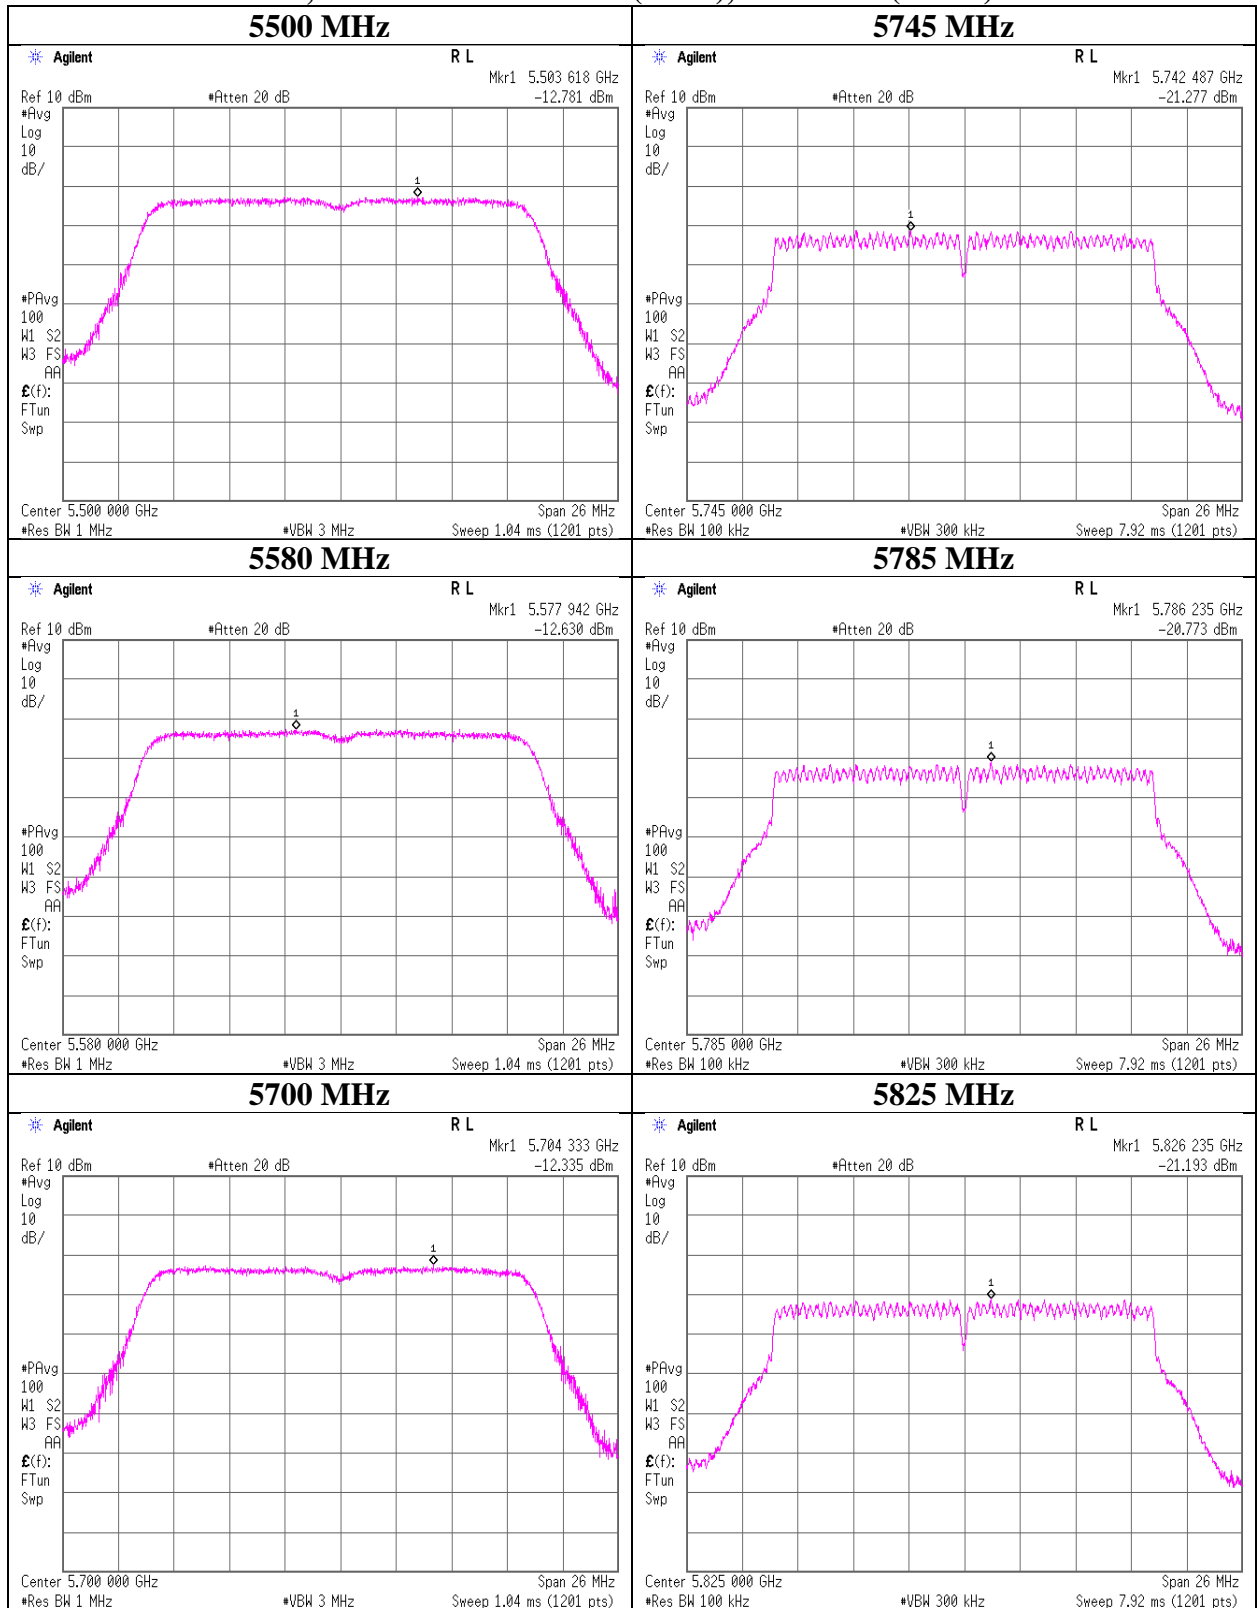

## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 19, 2019                        |
| Temperature / Humidity | 21 deg. C / 41 % RH                   |
| Engineer               | Yosuke Ishikawa                       |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO)           |

**Antenna 0**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm]<br>/MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)       |                      |             | PSD (e.i.r.p.)        |                      |             |
|---------------------------|-------------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|-----------------------|----------------------|-------------|-----------------------|----------------------|-------------|
|                           |                               |                    |                     |                     |                       |                               |                       | Result [dBm]<br>/MHz] | Limit [dBm]<br>/MHz] | Margin [dB] | Result [dBm]<br>/MHz] | Limit [dBm]<br>/MHz] | Margin [dB] |
| 5180                      | -17.07                        | 3.89               | 10.21               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.80                  | 11.00                | 8.20        | 5.75                  | 17.00                | 11.25       |
| 5220                      | -16.97                        | 3.90               | 10.21               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.91                  | 11.00                | 8.09        | 5.86                  | 17.00                | 11.14       |
| 5240                      | -17.03                        | 3.90               | 10.21               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.85                  | 11.00                | 8.15        | 5.80                  | 17.00                | 11.20       |
| 5260                      | -17.28                        | 3.91               | 10.21               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.62                  | 11.00                | 8.39        | 5.56                  | 17.00                | 11.44       |
| 5300                      | -16.64                        | 3.92               | 10.21               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 3.26                  | 11.00                | 7.74        | 6.21                  | 17.00                | 10.79       |
| 5320                      | -16.75                        | 3.92               | 10.21               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 3.15                  | 11.00                | 7.85        | 6.10                  | 17.00                | 10.90       |
| 5500                      | -17.42                        | 3.97               | 10.22               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.54                  | 11.00                | 8.46        | 5.49                  | 17.00                | 11.51       |
| 5580                      | -17.25                        | 3.98               | 10.22               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.72                  | 11.00                | 8.28        | 5.67                  | 17.00                | 11.33       |
| 5700                      | -17.09                        | 3.99               | 10.23               | 2.76                | 2.95                  | 0.00                          | 3.01                  | 2.90                  | 11.00                | 8.10        | 5.85                  | 17.00                | 11.15       |
| 5745                      | -24.22                        | 4.00               | 10.23               | 2.76                | 2.95                  | 6.99                          | 3.01                  | 2.77                  | 30.00                | 27.23       | 5.72                  | 36.00                | 30.28       |
| 5785                      | -23.99                        | 4.00               | 10.24               | 2.76                | 2.95                  | 6.99                          | 3.01                  | 3.01                  | 30.00                | 26.99       | 5.96                  | 36.00                | 30.04       |
| 5825                      | -23.56                        | 4.01               | 10.24               | 2.76                | 2.95                  | 6.99                          | 3.01                  | 3.45                  | 30.00                | 26.55       | 6.40                  | 36.00                | 29.60       |

**Antenna 1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm]<br>/MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)       |                      |             | PSD (e.i.r.p.)        |                      |             |
|---------------------------|-------------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|-----------------------|----------------------|-------------|-----------------------|----------------------|-------------|
|                           |                               |                    |                     |                     |                       |                               |                       | Result [dBm]<br>/MHz] | Limit [dBm]<br>/MHz] | Margin [dB] | Result [dBm]<br>/MHz] | Limit [dBm]<br>/MHz] | Margin [dB] |
| 5180                      | -16.27                        | 3.89               | 10.21               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.60                  | 11.00                | 7.40        | 5.60                  | 17.00                | 11.40       |
| 5220                      | -16.78                        | 3.90               | 10.21               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.10                  | 11.00                | 7.90        | 5.09                  | 17.00                | 11.91       |
| 5240                      | -17.05                        | 3.90               | 10.21               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 2.83                  | 11.00                | 8.17        | 4.82                  | 17.00                | 12.18       |
| 5260                      | -16.25                        | 3.91               | 10.21               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.64                  | 11.00                | 7.36        | 5.63                  | 17.00                | 11.37       |
| 5300                      | -16.38                        | 3.92               | 10.21               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.52                  | 11.00                | 7.48        | 5.51                  | 17.00                | 11.49       |
| 5320                      | -16.60                        | 3.92               | 10.21               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.30                  | 11.00                | 7.70        | 5.30                  | 17.00                | 11.70       |
| 5500                      | -16.46                        | 3.97               | 10.22               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.50                  | 11.00                | 7.50        | 5.49                  | 17.00                | 11.51       |
| 5580                      | -17.58                        | 3.98               | 10.22               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 2.39                  | 11.00                | 8.61        | 4.39                  | 17.00                | 12.61       |
| 5700                      | -16.77                        | 3.99               | 10.23               | 2.76                | 1.99                  | 0.00                          | 3.01                  | 3.22                  | 11.00                | 7.78        | 5.22                  | 17.00                | 11.79       |
| 5745                      | -23.80                        | 4.00               | 10.23               | 2.76                | 1.99                  | 6.99                          | 3.01                  | 3.19                  | 30.00                | 26.81       | 5.18                  | 36.00                | 30.82       |
| 5785                      | -23.82                        | 4.00               | 10.24               | 2.76                | 1.99                  | 6.99                          | 3.01                  | 3.18                  | 30.00                | 26.82       | 5.17                  | 36.00                | 30.83       |
| 5825                      | -23.17                        | 4.01               | 10.24               | 2.76                | 1.99                  | 6.99                          | 3.01                  | 3.84                  | 30.00                | 26.16       | 5.84                  | 36.00                | 30.16       |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log$  (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor + 10log (Nant)

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

\*) This test was measured based on Method In-Band Power Spectral Density (PSD) Measurements E) 2) c) of

"Guidance for Summing Emission Measurements from Multiple Outputs of a Transmitter or from Multiple Transmitters (KDB662911 D01)"

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**UL Japan, Inc.****Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT20 (MIMO), Antenna 0**

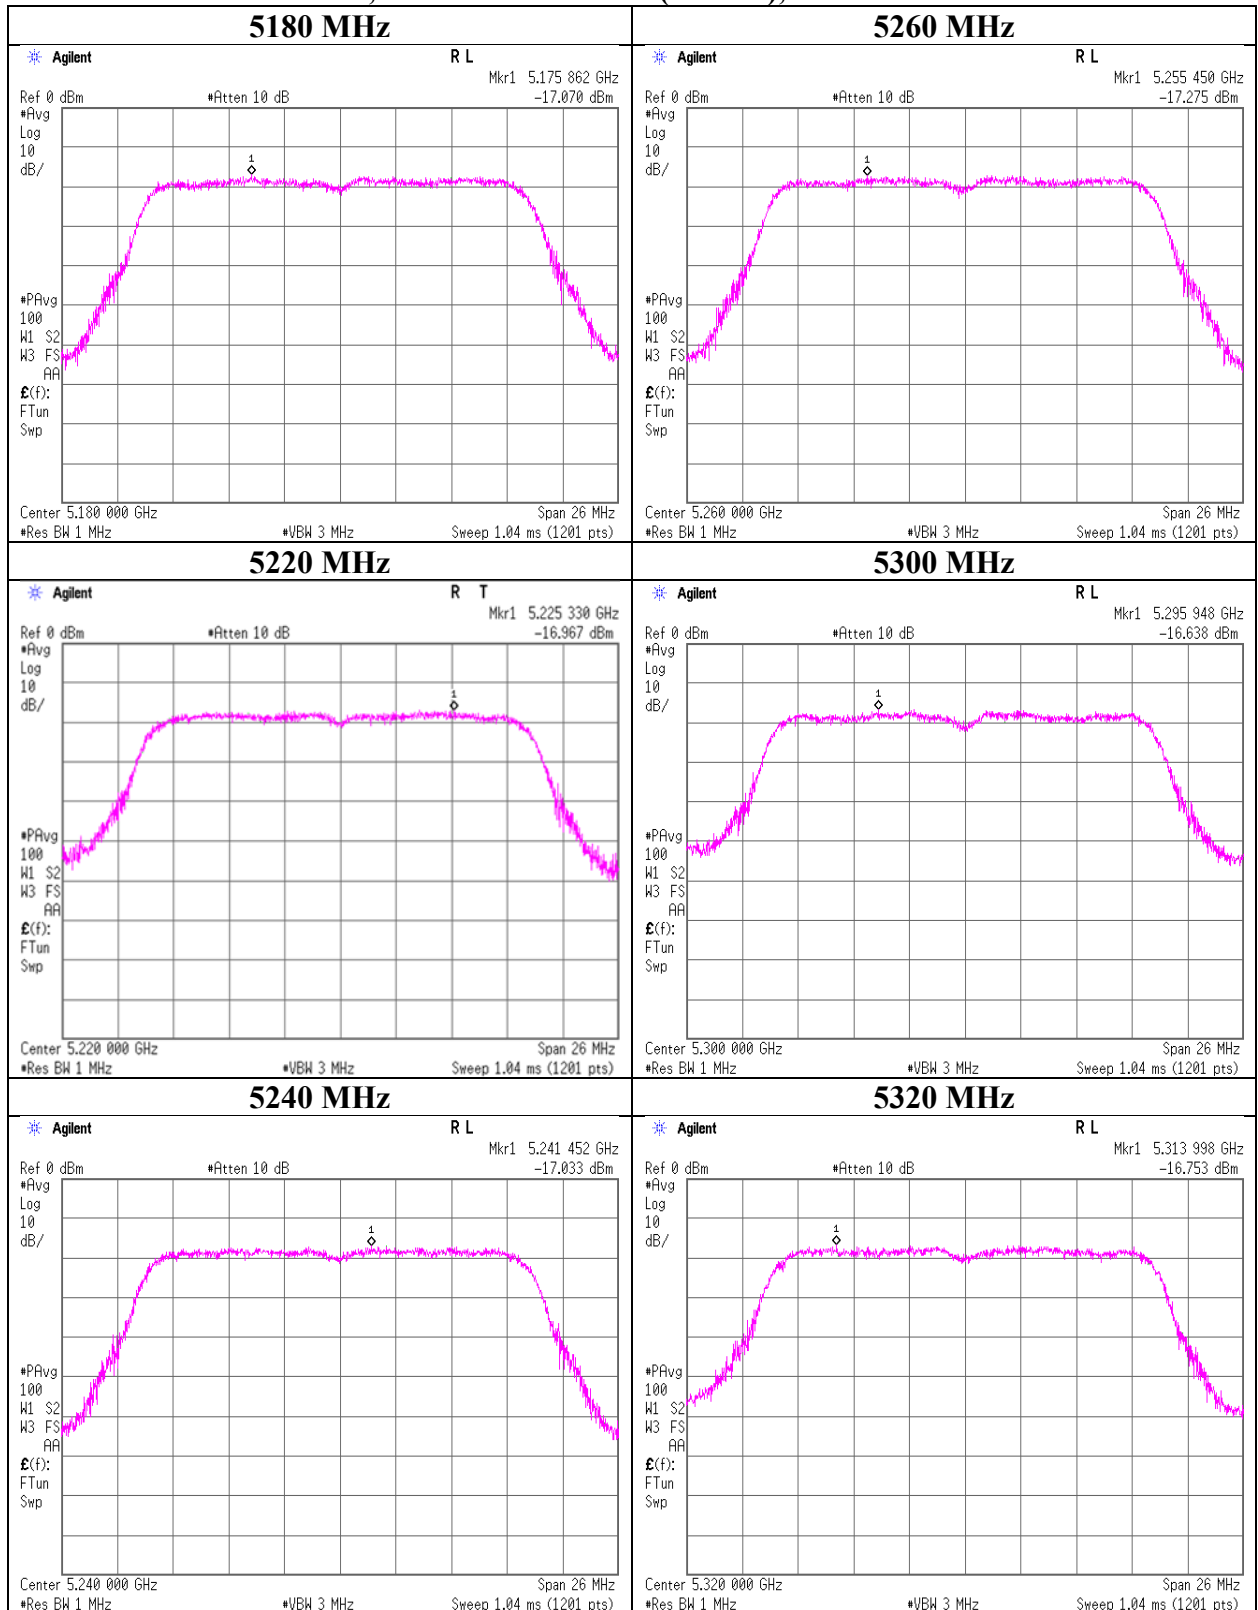

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT20 (MIMO), Antenna 0**

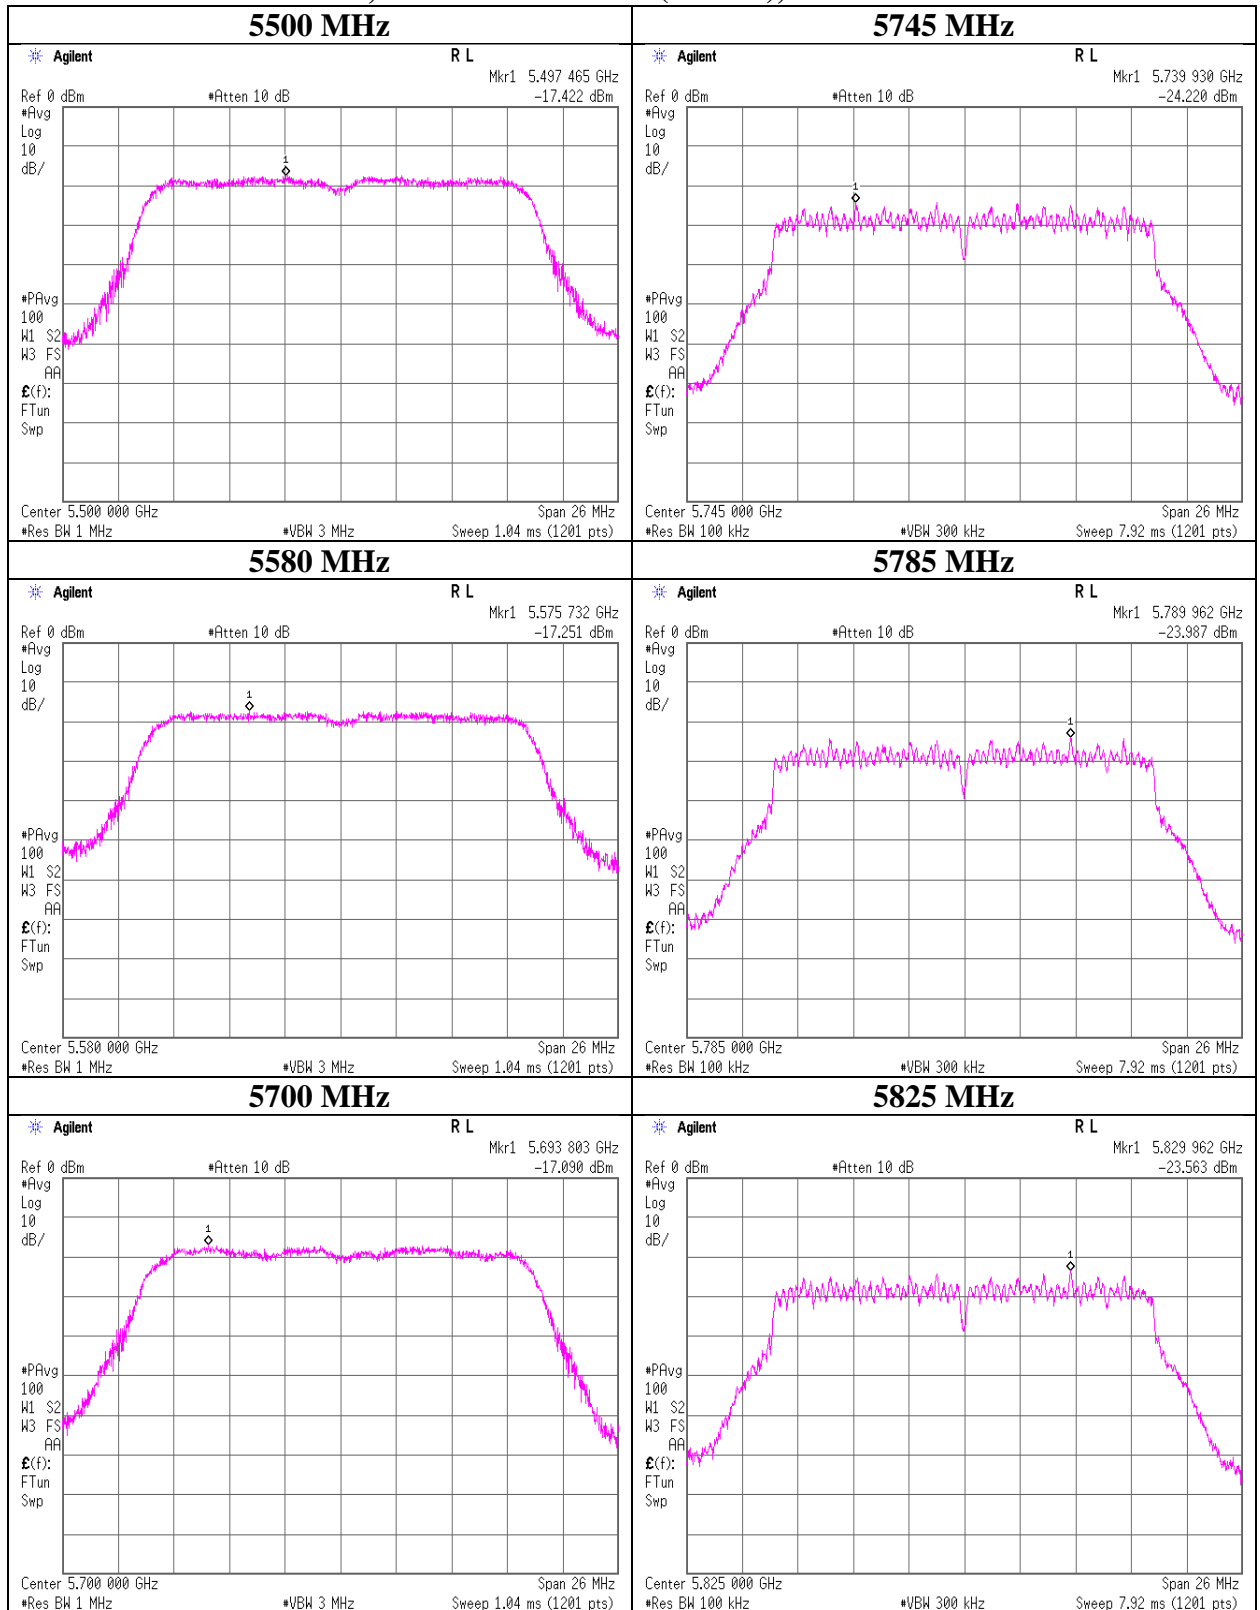

**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT20 (MIMO), Antenna 1**

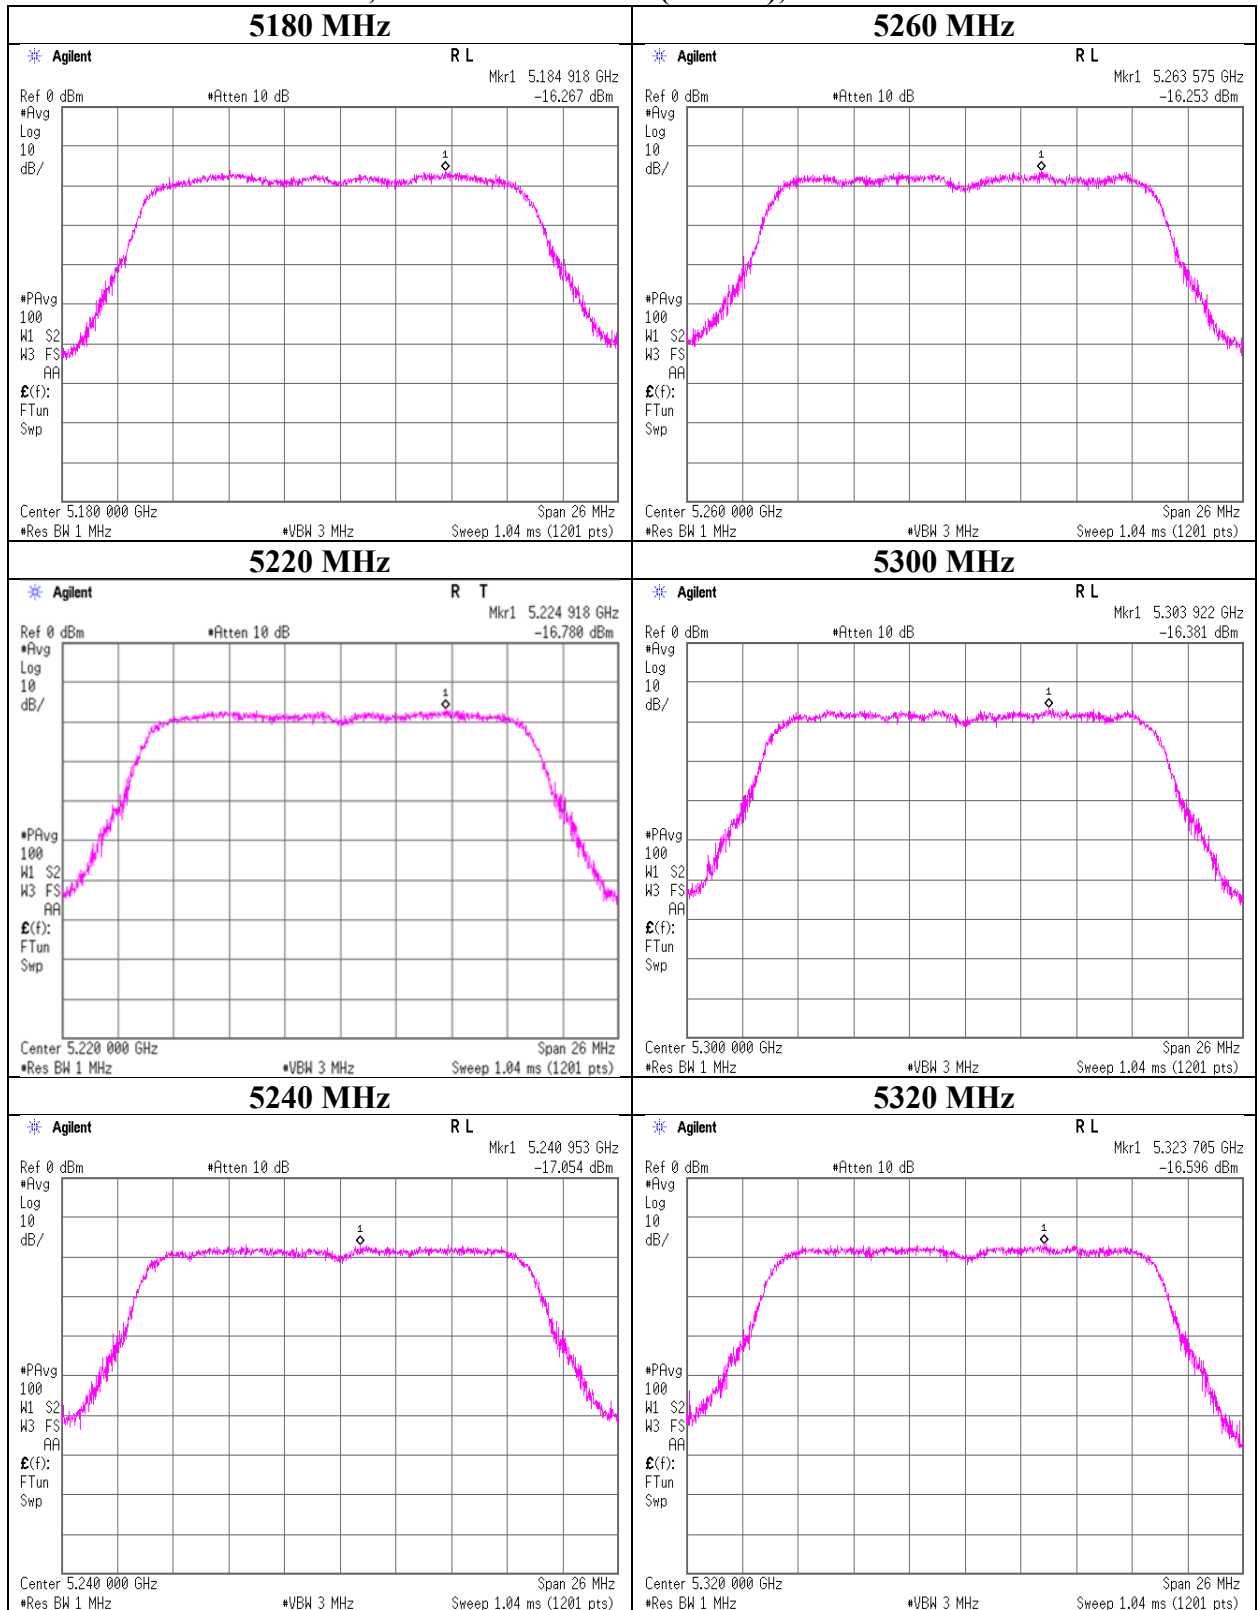


**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
 Telephone : +81 463 50 6400  
 Facsimile : +81 463 50 6401

**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT20 (MIMO), Antenna 1**

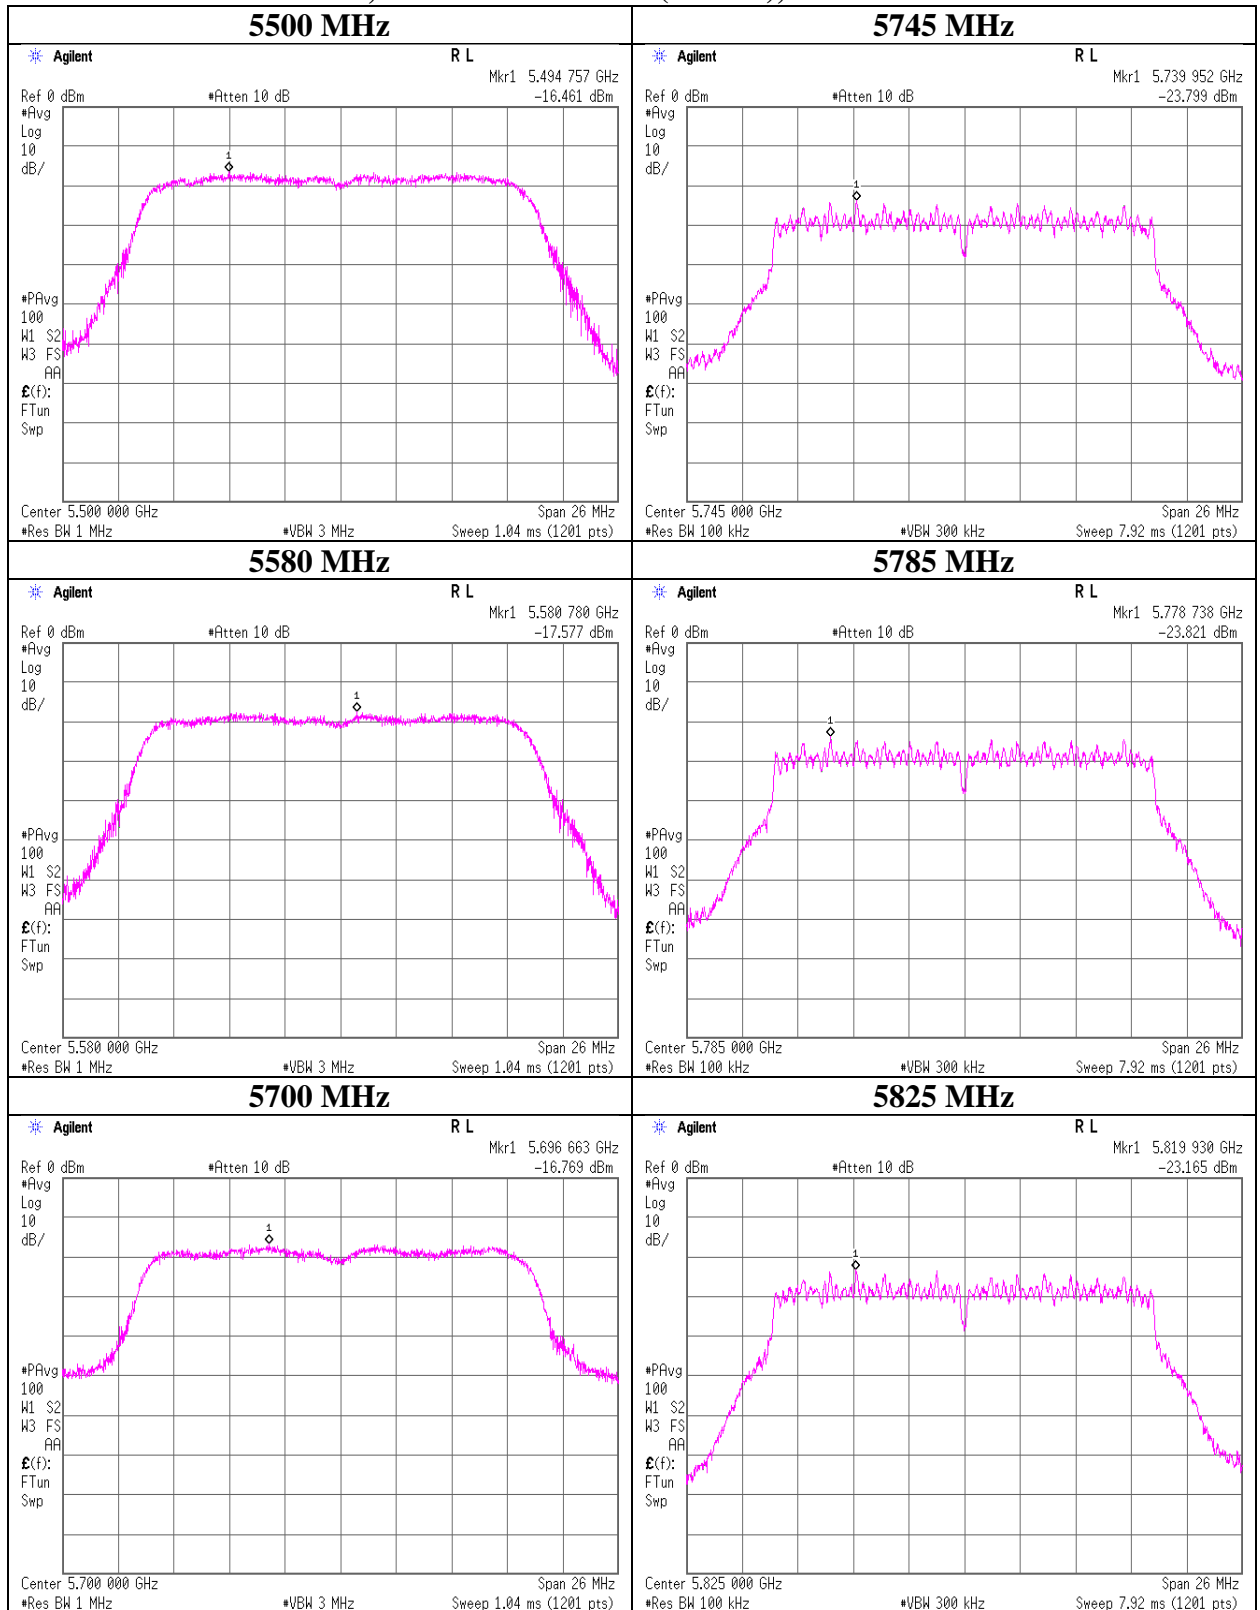

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 19, 2019                        |
| Temperature / Humidity | 21 deg. C / 41 % RH                   |
| Engineer               | Yosuke Ishikawa                       |
| Mode                   | Tx, IEEE802.11ac VHT20 (MIMO)         |

**Antenna 0**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm]<br>/MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)          |                         |                | PSD (e.i.r.p.)           |                         |                |
|---------------------------|-------------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|--------------------------|-------------------------|----------------|--------------------------|-------------------------|----------------|
|                           |                               |                    |                     |                     |                       |                               |                       | Result<br>[dBm]<br>/MHz] | Limit<br>[dBm]<br>/MHz] | Margin<br>[dB] | Result<br>[dBm]<br>/MHz] | Limit<br>[dBm]<br>/MHz] | Margin<br>[dB] |
| 5180                      | -16.38                        | 3.89               | 10.21               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 2.81                     | 11.00                   | 8.19           | 5.76                     | 17.00                   | 11.24          |
| 5220                      | -16.07                        | 3.90               | 10.21               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 3.13                     | 11.00                   | 7.87           | 6.08                     | 17.00                   | 10.92          |
| 5240                      | -16.50                        | 3.90               | 10.21               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 2.70                     | 11.00                   | 8.30           | 5.65                     | 17.00                   | 11.35          |
| 5260                      | -16.29                        | 3.91               | 10.21               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 2.92                     | 11.00                   | 8.08           | 5.87                     | 17.00                   | 11.13          |
| 5300                      | -16.19                        | 3.92               | 10.21               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 3.03                     | 11.00                   | 7.97           | 5.98                     | 17.00                   | 11.02          |
| 5320                      | -15.86                        | 3.92               | 10.21               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 3.36                     | 11.00                   | 7.64           | 6.31                     | 17.00                   | 10.69          |
| 5500                      | -16.66                        | 3.97               | 10.22               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 2.63                     | 11.00                   | 8.38           | 5.57                     | 17.00                   | 11.43          |
| 5580                      | -16.53                        | 3.98               | 10.22               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 2.76                     | 11.00                   | 8.24           | 5.71                     | 17.00                   | 11.29          |
| 5700                      | -16.41                        | 3.99               | 10.23               | 2.08                | 2.95                  | 0.00                          | 3.01                  | 2.90                     | 11.00                   | 8.10           | 5.85                     | 17.00                   | 11.15          |
| 5745                      | -24.38                        | 4.00               | 10.23               | 2.08                | 2.95                  | 6.99                          | 3.01                  | 1.93                     | 30.00                   | 28.07          | 4.88                     | 36.00                   | 31.12          |
| 5785                      | -24.47                        | 4.00               | 10.24               | 2.08                | 2.95                  | 6.99                          | 3.01                  | 1.85                     | 30.00                   | 28.15          | 4.80                     | 36.00                   | 31.20          |
| 5825                      | -23.94                        | 4.01               | 10.24               | 2.08                | 2.95                  | 6.99                          | 3.01                  | 2.39                     | 30.00                   | 27.61          | 5.34                     | 36.00                   | 30.66          |

**Antenna 1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm]<br>/MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)          |                         |                | PSD (e.i.r.p.)           |                         |                |
|---------------------------|-------------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|--------------------------|-------------------------|----------------|--------------------------|-------------------------|----------------|
|                           |                               |                    |                     |                     |                       |                               |                       | Result<br>[dBm]<br>/MHz] | Limit<br>[dBm]<br>/MHz] | Margin<br>[dB] | Result<br>[dBm]<br>/MHz] | Limit<br>[dBm]<br>/MHz] | Margin<br>[dB] |
| 5180                      | -16.32                        | 3.89               | 10.21               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 2.87                     | 11.00                   | 8.13           | 4.87                     | 17.00                   | 12.14          |
| 5220                      | -15.98                        | 3.90               | 10.21               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.22                     | 11.00                   | 7.78           | 5.21                     | 17.00                   | 11.79          |
| 5240                      | -16.19                        | 3.90               | 10.21               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.01                     | 11.00                   | 7.99           | 5.00                     | 17.00                   | 12.00          |
| 5260                      | -15.62                        | 3.91               | 10.21               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.59                     | 11.00                   | 7.41           | 5.58                     | 17.00                   | 11.42          |
| 5300                      | -16.20                        | 3.92               | 10.21               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.02                     | 11.00                   | 7.98           | 5.01                     | 17.00                   | 11.99          |
| 5320                      | -16.07                        | 3.92               | 10.21               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.15                     | 11.00                   | 7.85           | 5.15                     | 17.00                   | 11.86          |
| 5500                      | -16.12                        | 3.97               | 10.22               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.16                     | 11.00                   | 7.84           | 5.15                     | 17.00                   | 11.85          |
| 5580                      | -16.22                        | 3.98               | 10.22               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.07                     | 11.00                   | 7.93           | 5.06                     | 17.00                   | 11.94          |
| 5700                      | -16.30                        | 3.99               | 10.23               | 2.08                | 1.99                  | 0.00                          | 3.01                  | 3.01                     | 11.00                   | 7.99           | 5.00                     | 17.00                   | 12.00          |
| 5745                      | -23.87                        | 4.00               | 10.23               | 2.08                | 1.99                  | 6.99                          | 3.01                  | 2.44                     | 30.00                   | 27.56          | 4.43                     | 36.00                   | 31.57          |
| 5785                      | -23.66                        | 4.00               | 10.24               | 2.08                | 1.99                  | 6.99                          | 3.01                  | 2.66                     | 30.00                   | 27.34          | 4.66                     | 36.00                   | 31.34          |
| 5825                      | -23.58                        | 4.01               | 10.24               | 2.08                | 1.99                  | 6.99                          | 3.01                  | 2.75                     | 30.00                   | 27.25          | 4.74                     | 36.00                   | 31.26          |

## Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor + 10log (Nant)

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

\*) This test was measured based on Method In-Band Power Spectral Density (PSD) Measurements E) 2) c) of

"Guidance for Summing Emission Measurements from Multiple Outputs of a Transmitter or from Multiple Transmitters (KDB662911 D01)"

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**UL Japan, Inc.****Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Maximum Power Spectral Density**

**Tx, IEEE802.11ac VHT20 (MIMO), Antenna 0**

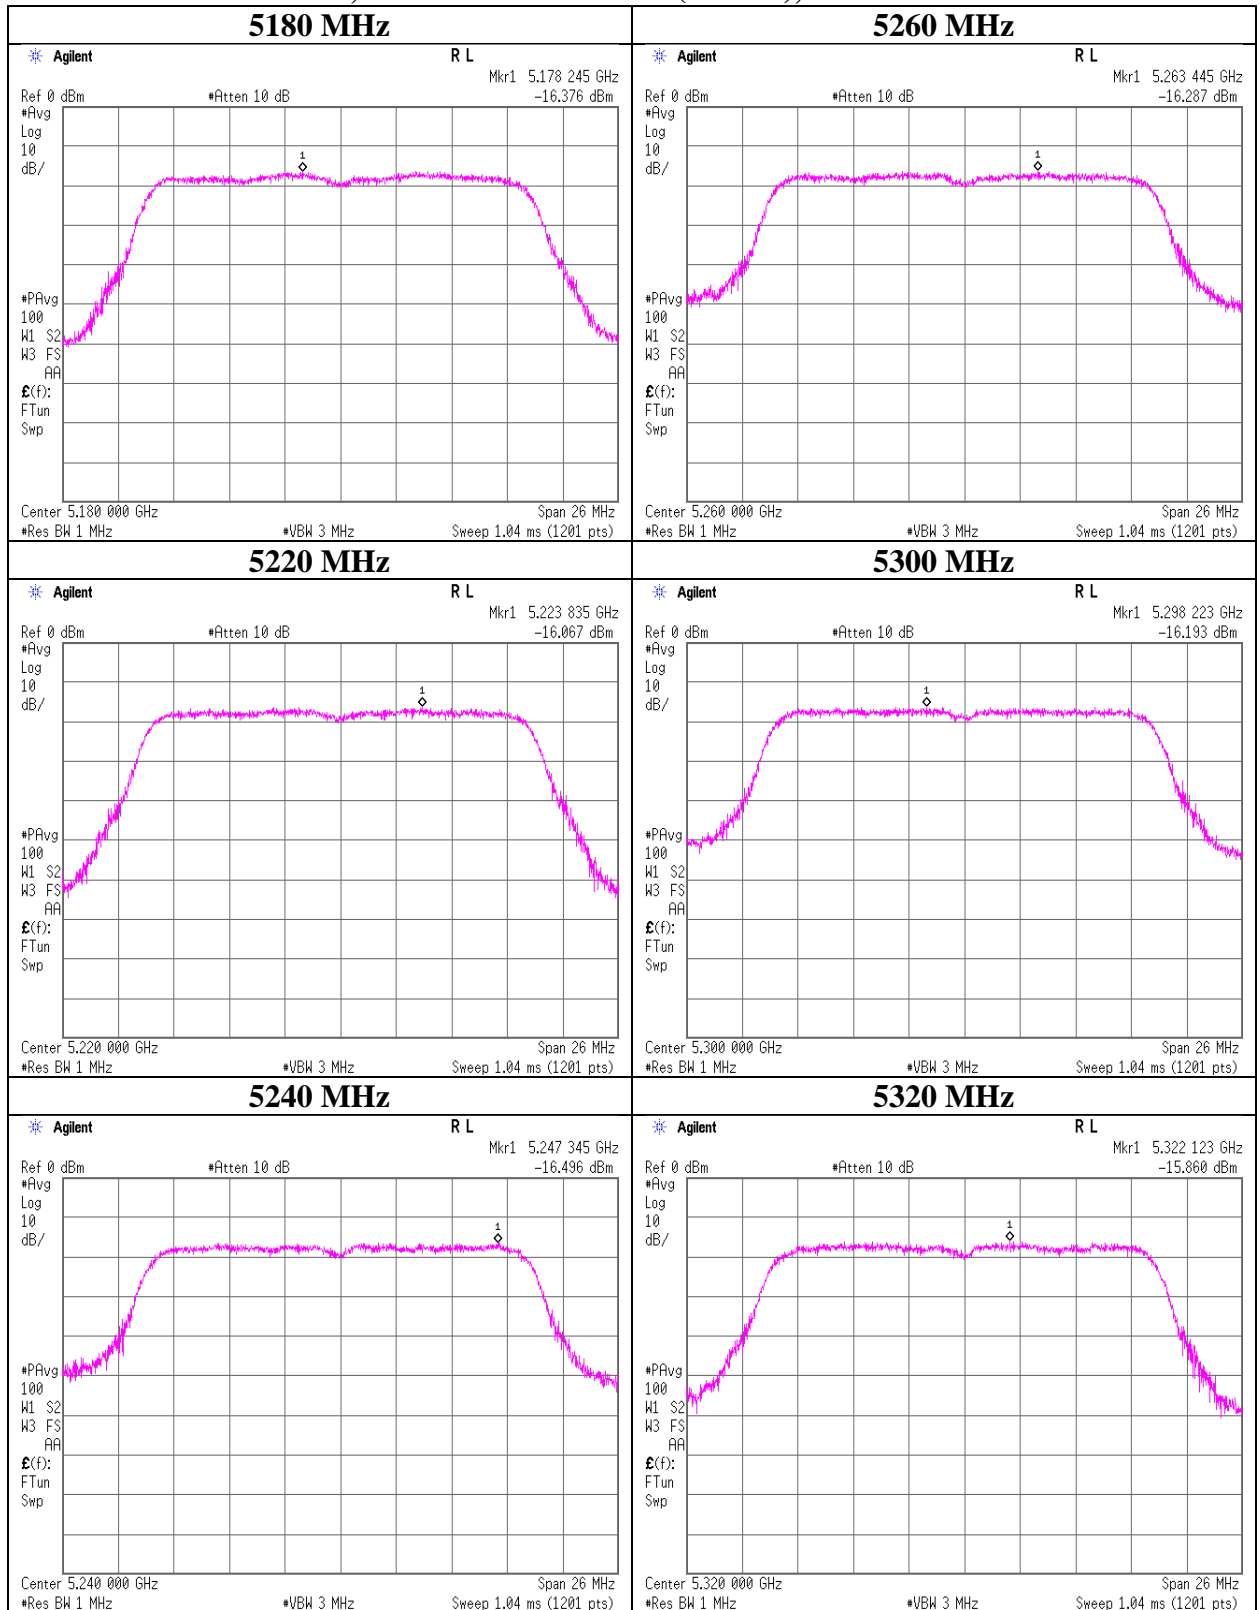

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401




**Maximum Power Spectral Density**

**Tx, IEEE802.11ac VHT20 (MIMO), Antenna 0**

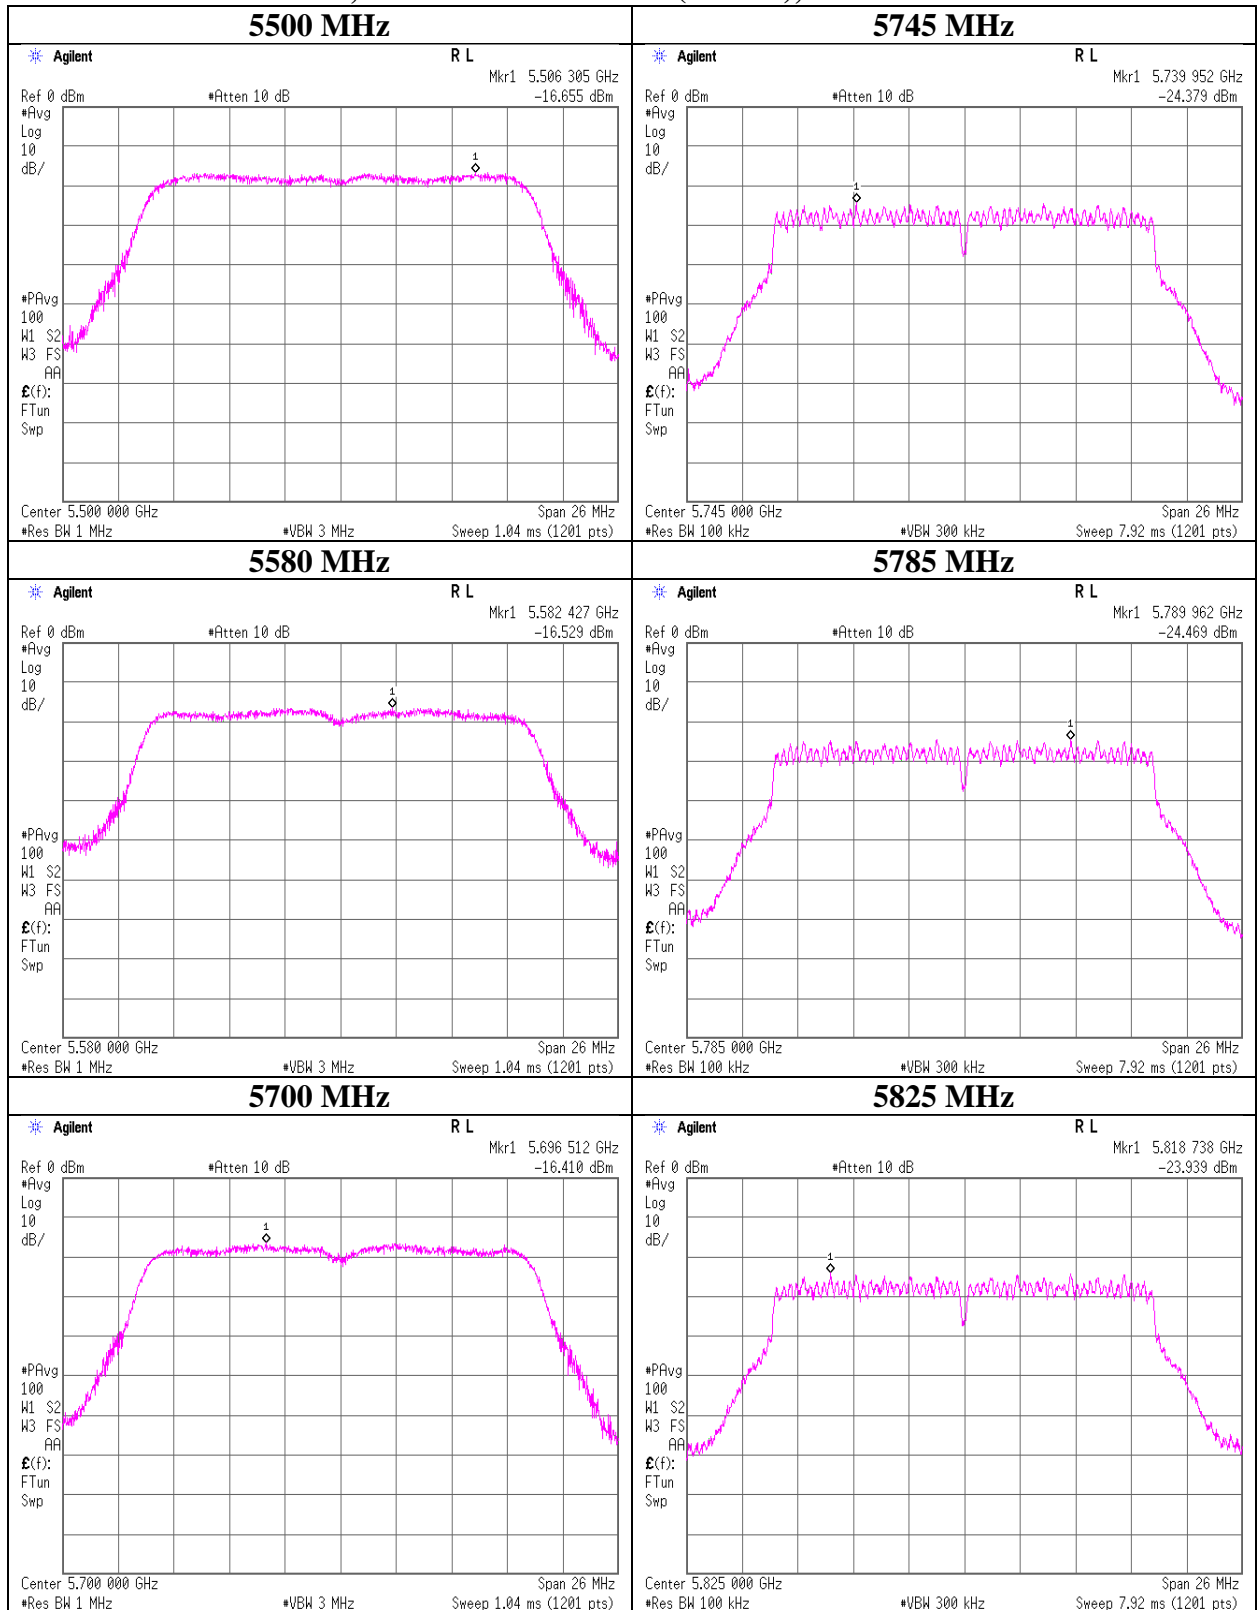

**Maximum Power Spectral Density**

**Tx, IEEE802.11ac VHT20 (MIMO), Antenna 1**

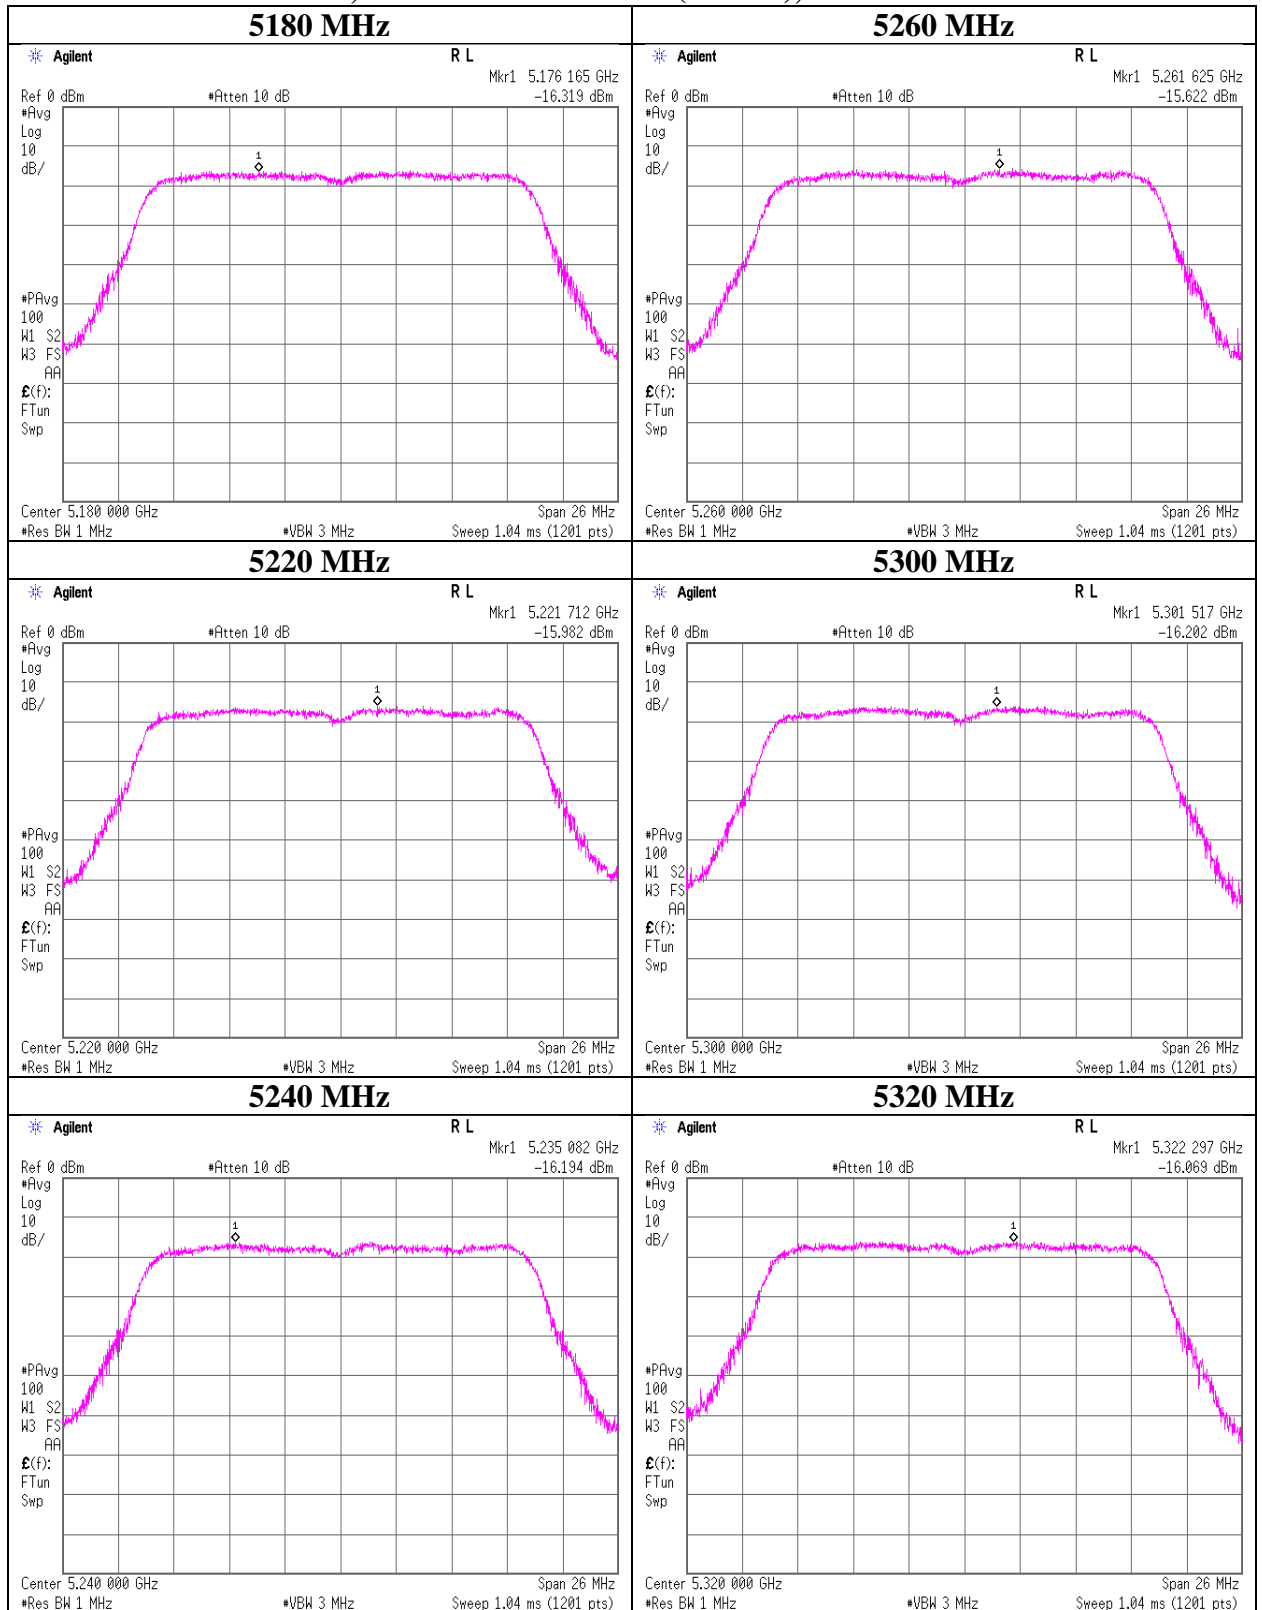

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT20 (MIMO), Antenna 1

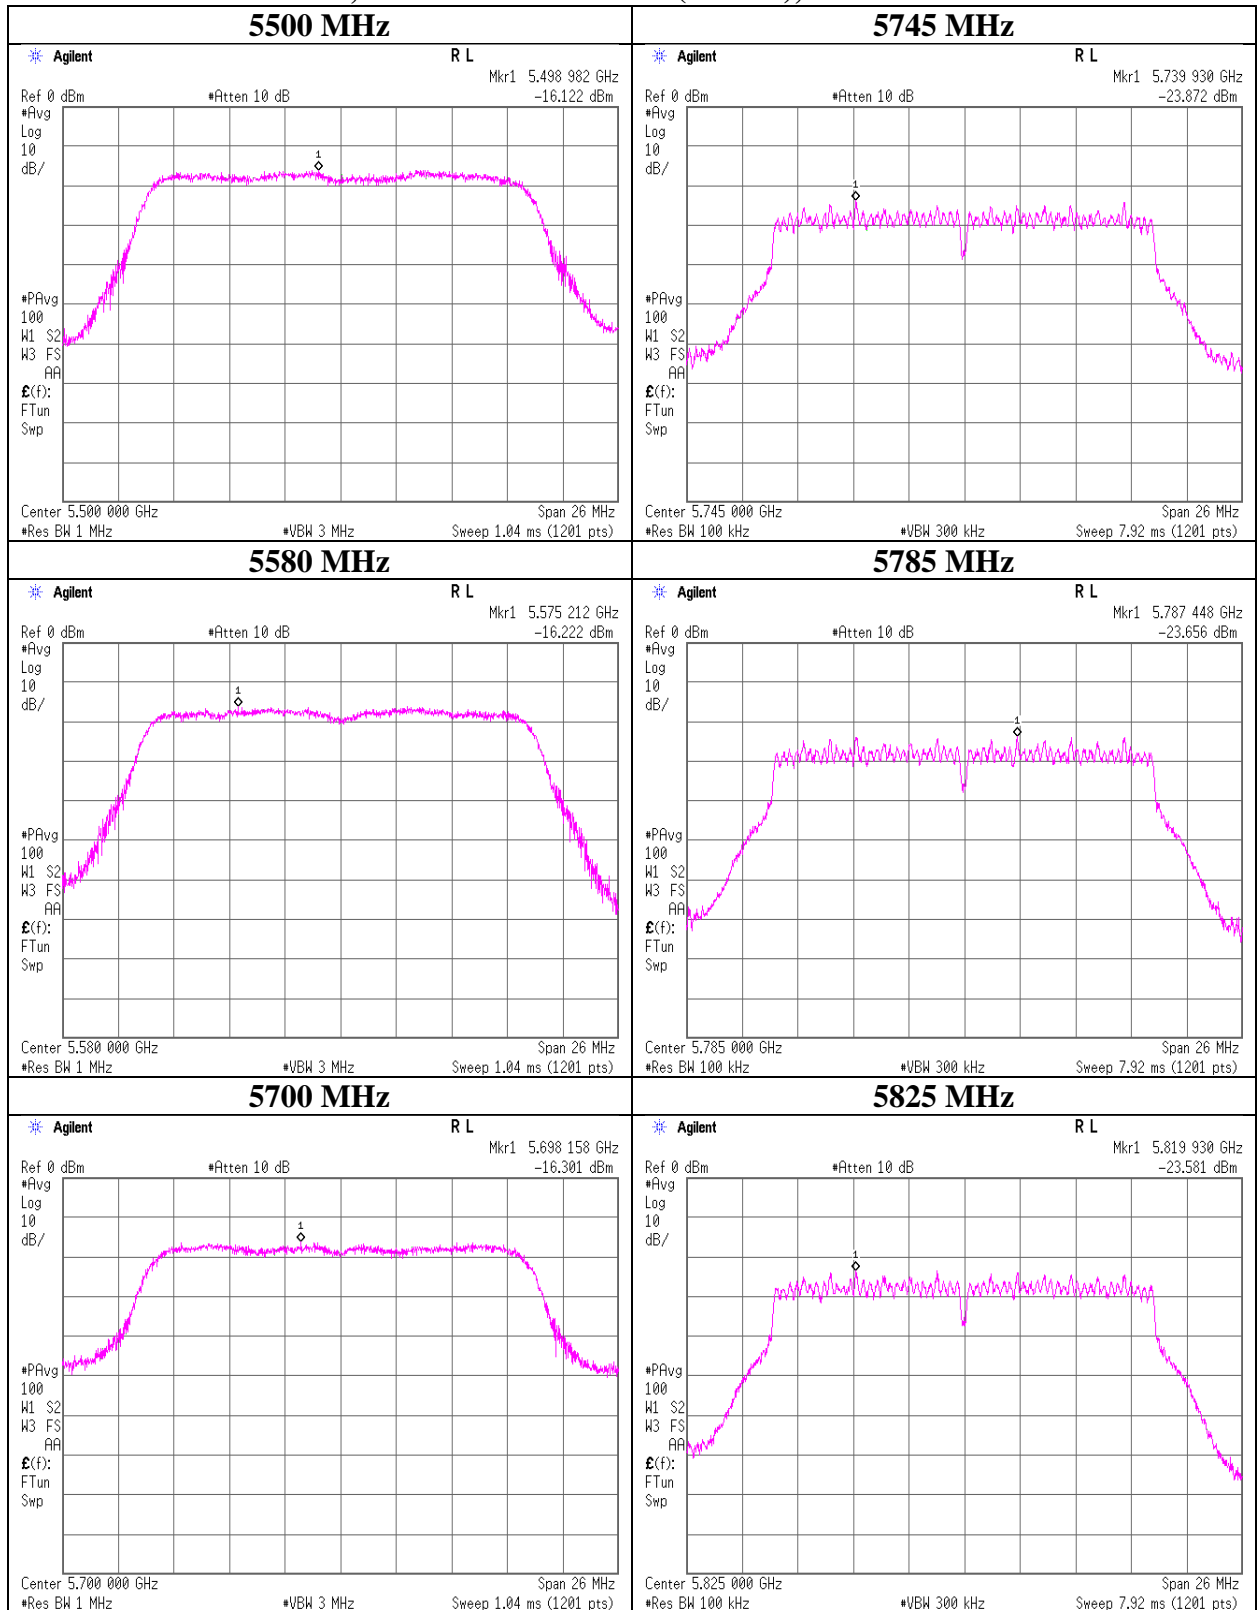

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |  |                     |
|------------------------|--|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room  |                     |
| Date                   | March 18, 2019   | March 19, 2019      |
| Temperature / Humidity | 22 deg. C / 54 % RH  | 21 deg. C / 41 % RH |
| Engineer               | Kenichi Adachi   | Yosuke Ishikawa     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO), PN9,<br>worst antenna port 1(5190 MHz), 0 (other channel frequency) |                     |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD Reading [dBm /MHz] | Cable Loss [dB] | Atten. Loss [dB] | Duty Factor [dB] | Antenna Gain [dBi] | RBW Correction Factor [dB] | PSD (Conducted)   |                  |             | PSD (e.i.r.p.)    |                  |             |
|------------------------|------------------------|-----------------|------------------|------------------|--------------------|----------------------------|-------------------|------------------|-------------|-------------------|------------------|-------------|
|                        |                        |                 |                  |                  |                    |                            | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] |
| 5190                   | -19.22                 | 3.89            | 10.21            | 2.63             | 1.99               | 0.00                       | -2.49             | 11.00            | 13.49       | -0.49             | 17.00            | 17.49       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                 | -                | -           | -                 | -                | -           |
| 5230                   | -16.49                 | 3.90            | 10.21            | 1.76             | 2.95               | 0.00                       | -0.62             | 11.00            | 11.62       | 2.33              | 17.00            | 14.67       |
| 5270                   | -16.35                 | 3.91            | 10.21            | 1.76             | 2.95               | 0.00                       | -0.46             | 11.00            | 11.47       | 2.48              | 17.00            | 14.52       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                 | -                | -           | -                 | -                | -           |
| 5310                   | -16.12                 | 3.92            | 10.21            | 1.76             | 2.95               | 0.00                       | -0.23             | 11.00            | 11.23       | 2.72              | 17.00            | 14.29       |
| 5510                   | -16.31                 | 3.97            | 10.22            | 1.76             | 2.95               | 0.00                       | -0.36             | 11.00            | 11.36       | 2.59              | 17.00            | 14.41       |
| 5550                   | -16.11                 | 3.98            | 10.22            | 1.76             | 2.95               | 0.00                       | -0.15             | 11.00            | 11.15       | 2.80              | 17.00            | 14.20       |
| 5670                   | -16.18                 | 3.99            | 10.23            | 1.76             | 2.95               | 0.00                       | -0.20             | 11.00            | 11.20       | 2.75              | 17.00            | 14.25       |
| 5755                   | -25.73                 | 4.00            | 10.23            | 1.76             | 2.95               | 6.99                       | -2.75             | 30.00            | 32.75       | 0.20              | 36.00            | 35.80       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                 | -                | -           | -                 | -                | -           |
| 5795                   | -26.03                 | 4.01            | 10.24            | 1.76             | 2.95               | 6.99                       | -3.03             | 30.00            | 33.03       | -0.08             | 36.00            | 36.08       |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT40 (SISO), Antenna 1 (5190 MHz), 0 (other channel frequency)**

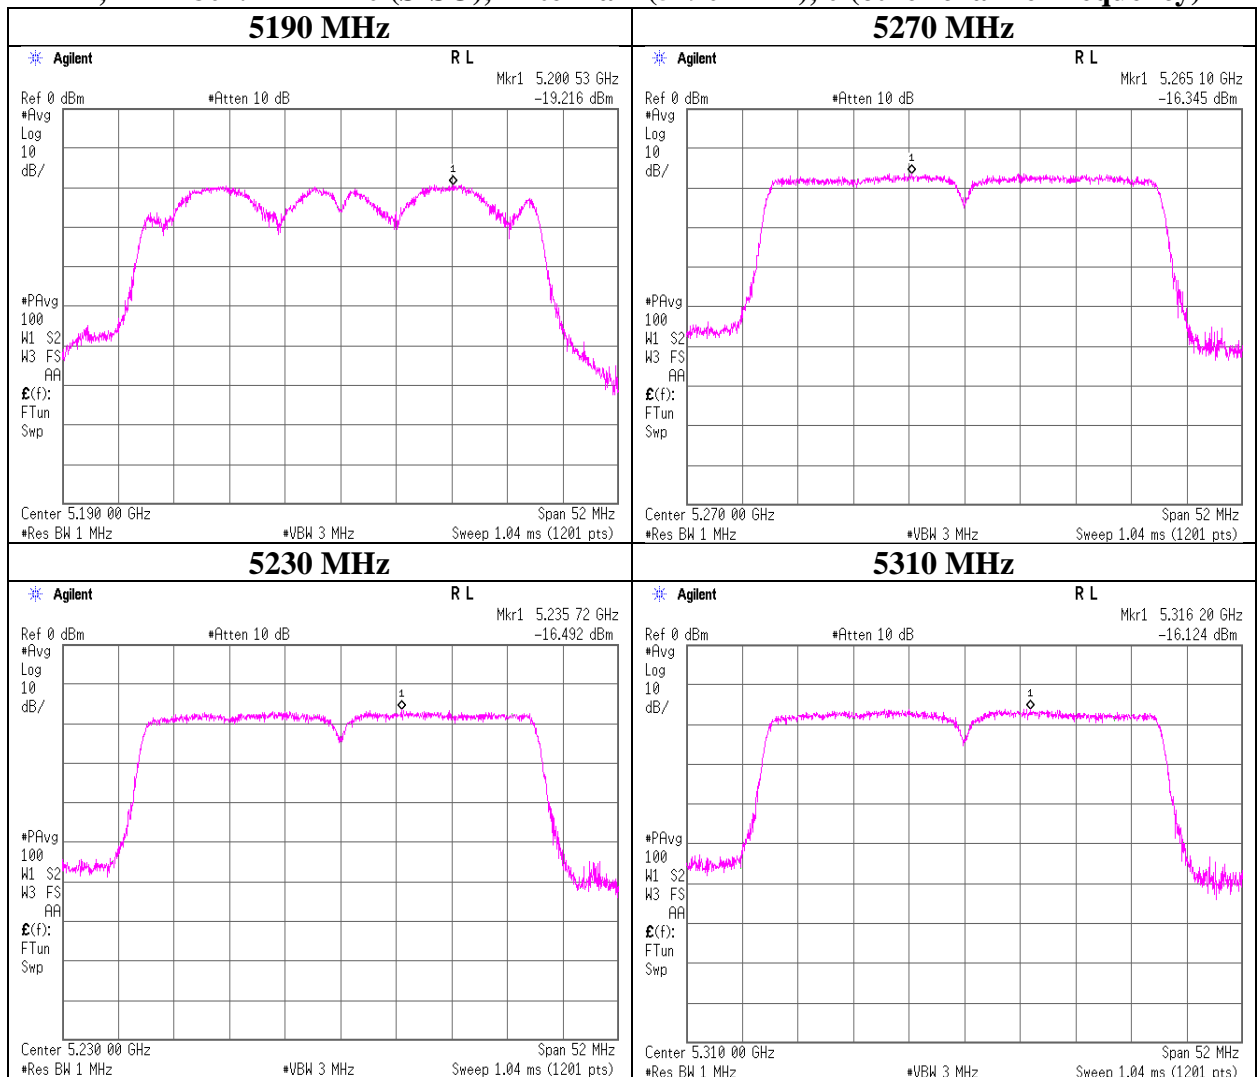

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT40 (SISO), Antenna 0 (Worst)

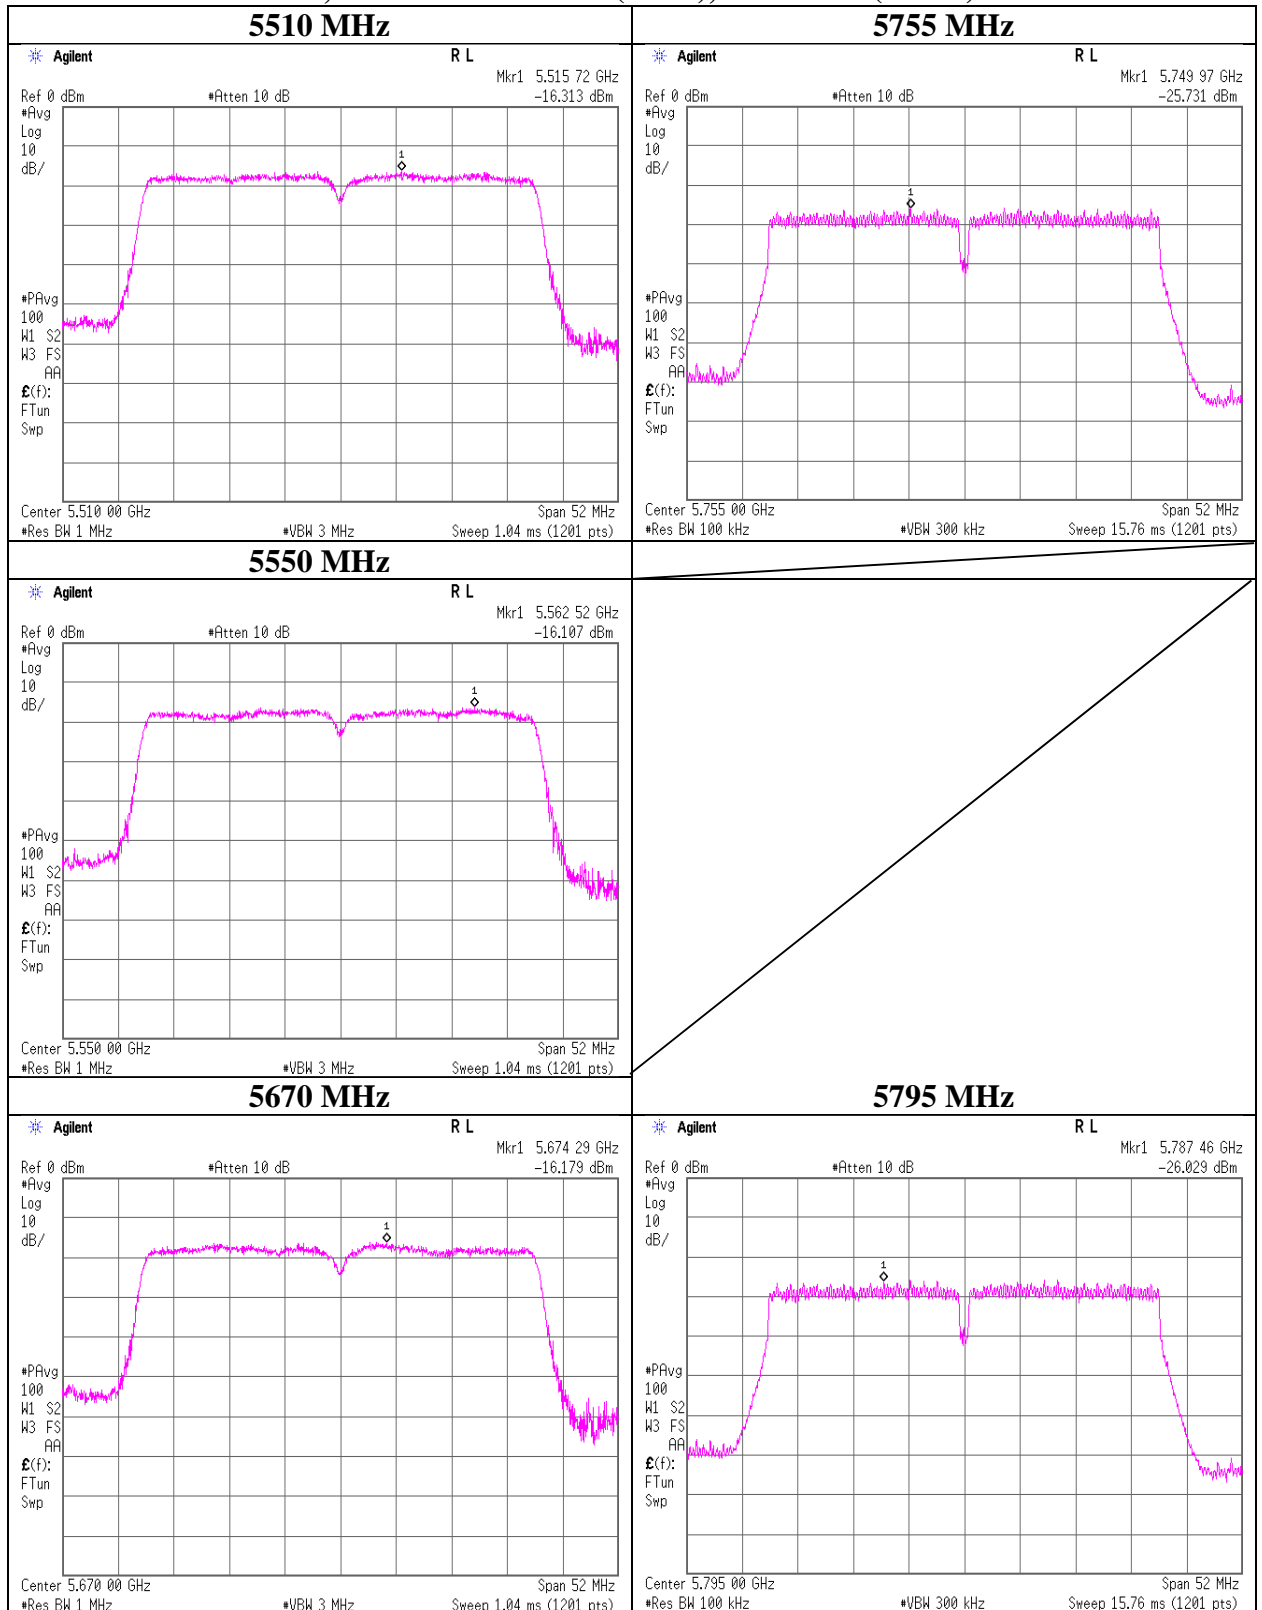

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab. No.1 Measurement Room  |
| Date                   | March 19, 2019   |
| Temperature / Humidity | 21 deg. C / 41 % RH  |
| Engineer               | Yosuke Ishikawa  |
| Mode                   | Tx, IEEE802.11ac VHT40 (SISO), PN9,<br>worst antenna port 1(5190 MHz), 0 (other channel frequency) |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD Reading [dBm /MHz] | Cable Loss [dB] | Atten. Loss [dB] | Duty Factor [dB] | Antenna Gain [dBi] | RBW Correction Factor [dB] | PSD (Conducted)   |                  |             | PSD (e.i.r.p.)    |                  |             |
|------------------------|------------------------|-----------------|------------------|------------------|--------------------|----------------------------|-------------------|------------------|-------------|-------------------|------------------|-------------|
|                        |                        |                 |                  |                  |                    |                            | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] |
| 5190                   | -20.47                 | 3.89            | 10.21            | 2.15             | 1.99               | 0.00                       | -4.22             | 11.00            | 15.22       | -2.23             | 17.00            | 19.23       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                 | -                | -           | -                 | -                | -           |
| 5230                   | -16.40                 | 3.90            | 10.21            | 1.39             | 2.95               | 0.00                       | -0.90             | 11.00            | 11.90       | 2.05              | 17.00            | 14.95       |
| 5270                   | -16.33                 | 3.91            | 10.21            | 1.39             | 2.95               | 0.00                       | -0.82             | 11.00            | 11.82       | 2.13              | 17.00            | 14.87       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                 | -                | -           | -                 | -                | -           |
| 5310                   | -16.24                 | 3.92            | 10.21            | 1.39             | 2.95               | 0.00                       | -0.72             | 11.00            | 11.72       | 2.23              | 17.00            | 14.77       |
| 5510                   | -16.05                 | 3.97            | 10.22            | 1.39             | 2.95               | 0.00                       | -0.47             | 11.00            | 11.47       | 2.48              | 17.00            | 14.52       |
| 5550                   | -16.23                 | 3.98            | 10.22            | 1.39             | 2.95               | 0.00                       | -0.64             | 11.00            | 11.64       | 2.31              | 17.00            | 14.69       |
| 5670                   | -16.66                 | 3.99            | 10.23            | 1.39             | 2.95               | 0.00                       | -1.05             | 11.00            | 12.05       | 1.90              | 17.00            | 15.11       |
| 5755                   | -25.04                 | 4.00            | 10.23            | 1.39             | 2.95               | 6.99                       | -2.43             | 30.00            | 32.43       | 0.52              | 36.00            | 35.48       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                 | -                | -           | -                 | -                | -           |
| 5795                   | -25.99                 | 4.01            | 10.24            | 1.39             | 2.95               | 6.99                       | -3.36             | 30.00            | 33.36       | -0.41             | 36.00            | 36.41       |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT40 (SISO), Antenna 1(5190 MHz), 0 (other channel frequency)**

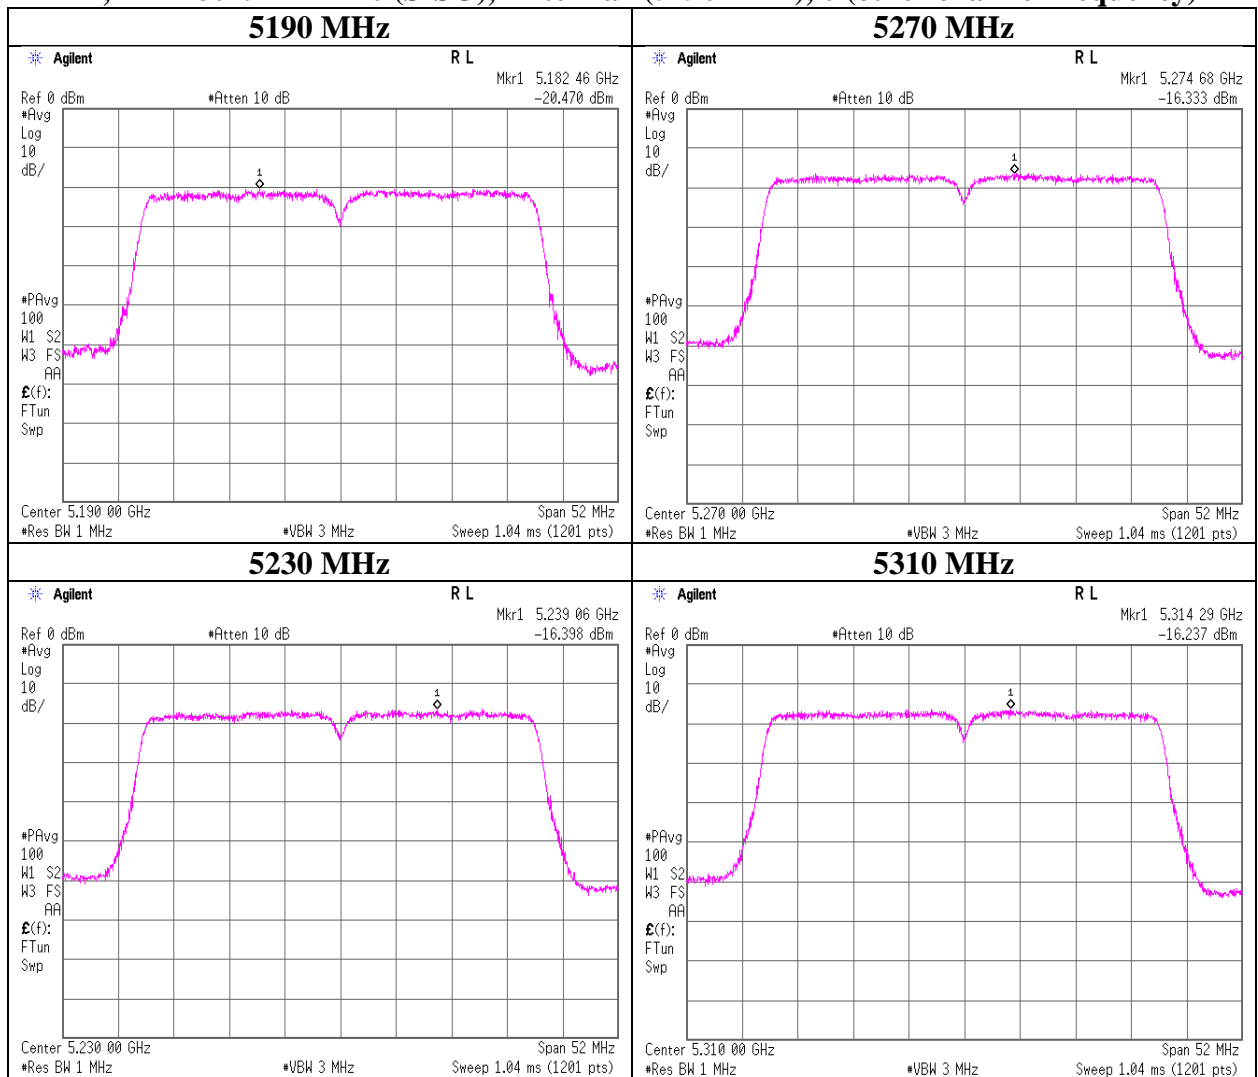

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT40 (SISO), Antenna 0 (Worst)

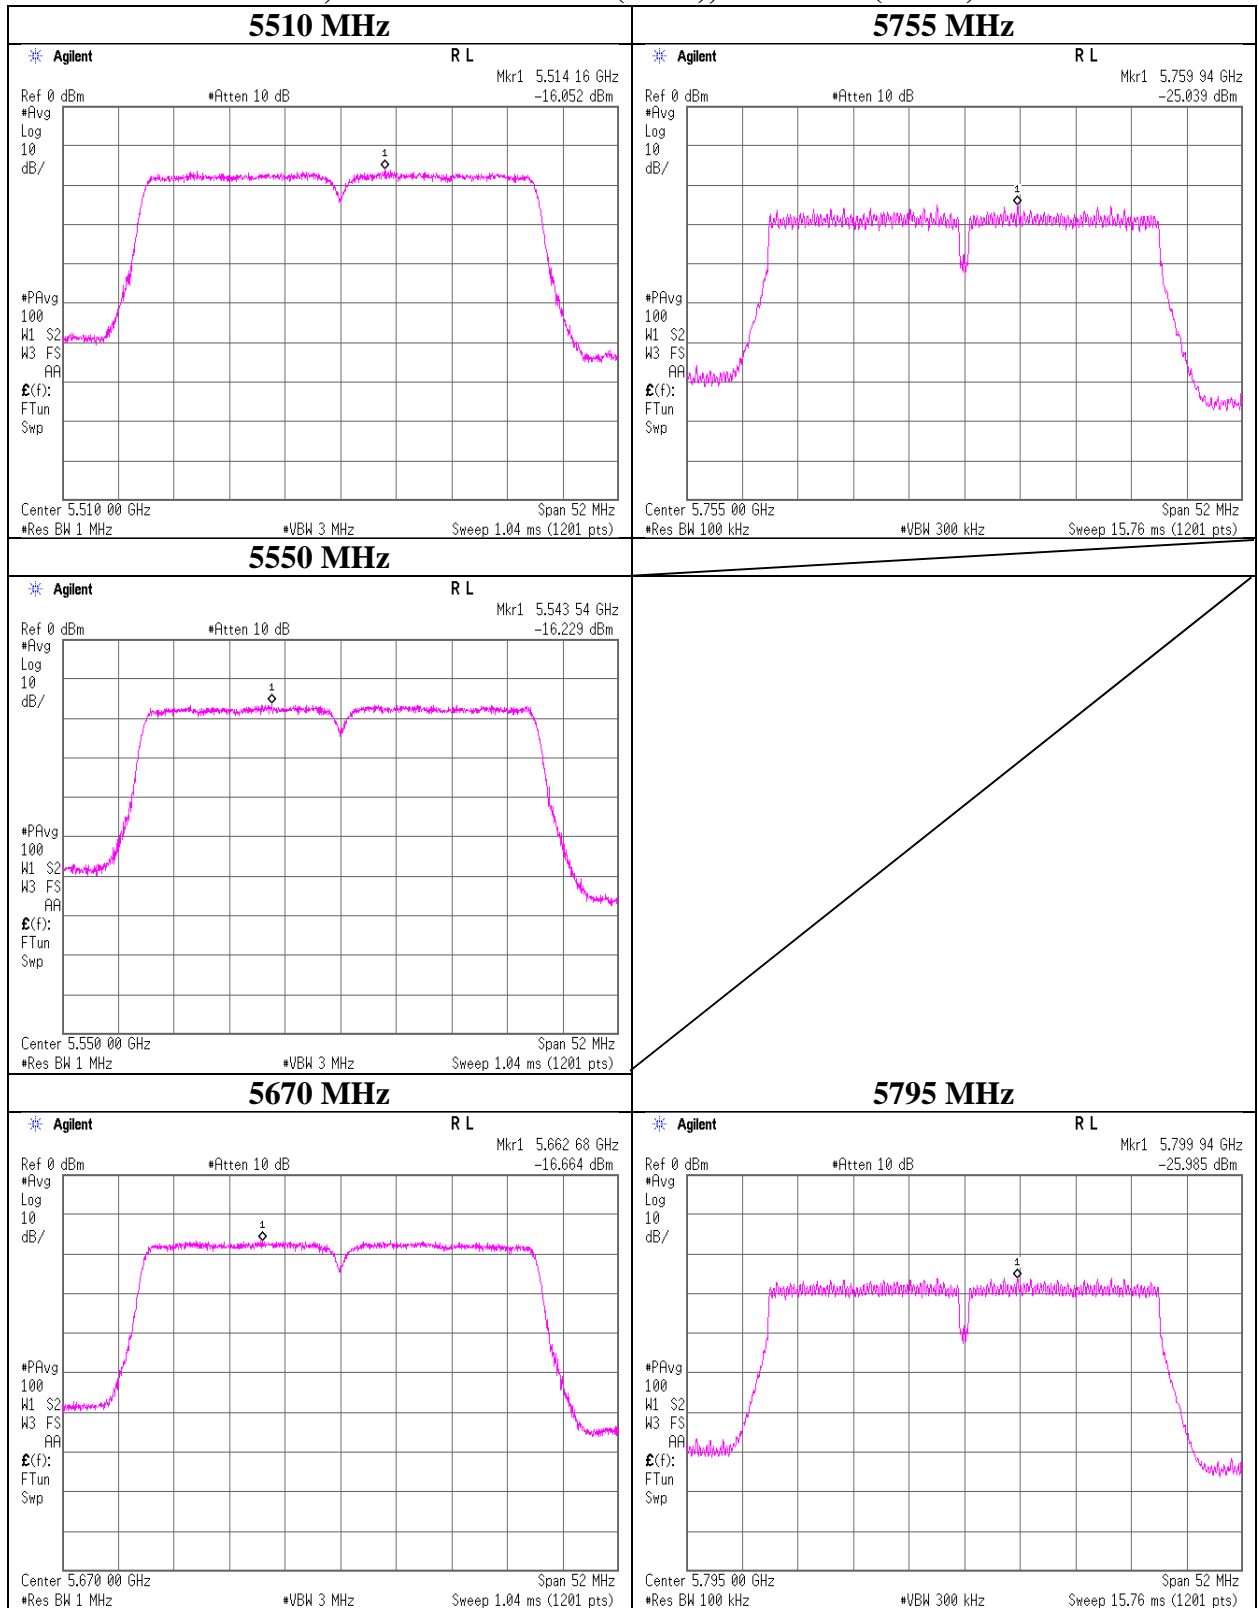

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 25, 2019                        |
| Temperature / Humidity | 20 deg. C / 59 % RH                   |
| Engineer               | Kenichi Adachi                        |
| Mode                   | Tx, IEEE802.11n HT40 (MIMO)           |

**Antenna 0**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               |                       | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5190                      | -24.96                    | 3.89               | 10.21               | 3.59                | 2.95                  | 0.00                          | 3.01                  | -4.26                | 11.00               | 15.26          | -1.31                | 17.00               | 18.31          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5230                      | -19.76                    | 3.90               | 10.21               | 2.51                | 2.95                  | 0.00                          | 3.01                  | -0.13                | 11.00               | 11.13          | 2.82                 | 17.00               | 14.18          |
| 5270                      | -20.17                    | 3.91               | 10.21               | 2.51                | 2.95                  | 0.00                          | 3.01                  | -0.53                | 11.00               | 11.53          | 2.42                 | 17.00               | 14.58          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5310                      | -19.60                    | 3.92               | 10.21               | 2.51                | 2.95                  | 0.00                          | 3.01                  | 0.05                 | 11.00               | 10.95          | 3.00                 | 17.00               | 14.00          |
| 5510                      | -19.97                    | 3.97               | 10.22               | 2.51                | 2.95                  | 0.00                          | 3.01                  | -0.26                | 11.00               | 11.26          | 2.69                 | 17.00               | 14.31          |
| 5550                      | -20.23                    | 3.98               | 10.22               | 2.51                | 2.95                  | 0.00                          | 3.01                  | -0.51                | 11.00               | 11.51          | 2.44                 | 17.00               | 14.56          |
| 5670                      | -20.28                    | 3.99               | 10.23               | 2.51                | 2.95                  | 0.00                          | 3.01                  | -0.54                | 11.00               | 11.54          | 2.41                 | 17.00               | 14.59          |
| 5755                      | -26.16                    | 4.00               | 10.24               | 2.51                | 2.95                  | 6.99                          | 3.01                  | 0.59                 | 30.00               | 29.41          | 3.54                 | 36.00               | 32.46          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5795                      | -27.17                    | 4.01               | 10.24               | 2.51                | 2.95                  | 6.99                          | 3.01                  | -0.41                | 30.00               | 30.41          | 2.54                 | 36.00               | 33.46          |

**Antenna 1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               |                       | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5190                      | -24.66                    | 3.89               | 10.21               | 3.59                | 1.99                  | 0.00                          | 3.01                  | -3.96                | 11.00               | 14.96          | -1.97                | 17.00               | 18.97          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5230                      | -19.56                    | 3.90               | 10.21               | 2.51                | 1.99                  | 0.00                          | 3.01                  | 0.07                 | 11.00               | 10.93          | 2.07                 | 17.00               | 14.93          |
| 5270                      | -19.78                    | 3.91               | 10.21               | 2.51                | 1.99                  | 0.00                          | 3.01                  | -0.14                | 11.00               | 11.14          | 1.86                 | 17.00               | 15.14          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5310                      | -19.17                    | 3.92               | 10.21               | 2.51                | 1.99                  | 0.00                          | 3.01                  | 0.48                 | 11.00               | 10.52          | 2.47                 | 17.00               | 14.53          |
| 5510                      | -19.09                    | 3.97               | 10.22               | 2.51                | 1.99                  | 0.00                          | 3.01                  | 0.62                 | 11.00               | 10.38          | 2.61                 | 17.00               | 14.39          |
| 5550                      | -18.74                    | 3.98               | 10.22               | 2.51                | 1.99                  | 0.00                          | 3.01                  | 0.98                 | 11.00               | 10.02          | 2.97                 | 17.00               | 14.03          |
| 5670                      | -20.03                    | 3.99               | 10.23               | 2.51                | 1.99                  | 0.00                          | 3.01                  | -0.28                | 11.00               | 11.29          | 1.71                 | 17.00               | 15.29          |
| 5755                      | -27.00                    | 4.00               | 10.24               | 2.51                | 1.99                  | 6.99                          | 3.01                  | -0.25                | 30.00               | 30.25          | 1.74                 | 36.00               | 34.26          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5795                      | -26.83                    | 4.01               | 10.24               | 2.51                | 1.99                  | 6.99                          | 3.01                  | -0.07                | 30.00               | 30.07          | 1.93                 | 36.00               | 34.07          |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log$  (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor + 10log (Nant)

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

\*) This test was measured based on Method In-Band Power Spectral Density (PSD) Measurements E) 2) c) of

"Guidance for Summing Emission Measurements from Multiple Outputs of a Transmitter or from Multiple Transmitters (KDB662911 D01)"

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**UL Japan, Inc.****Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT40 (MIMO), Antenna 0

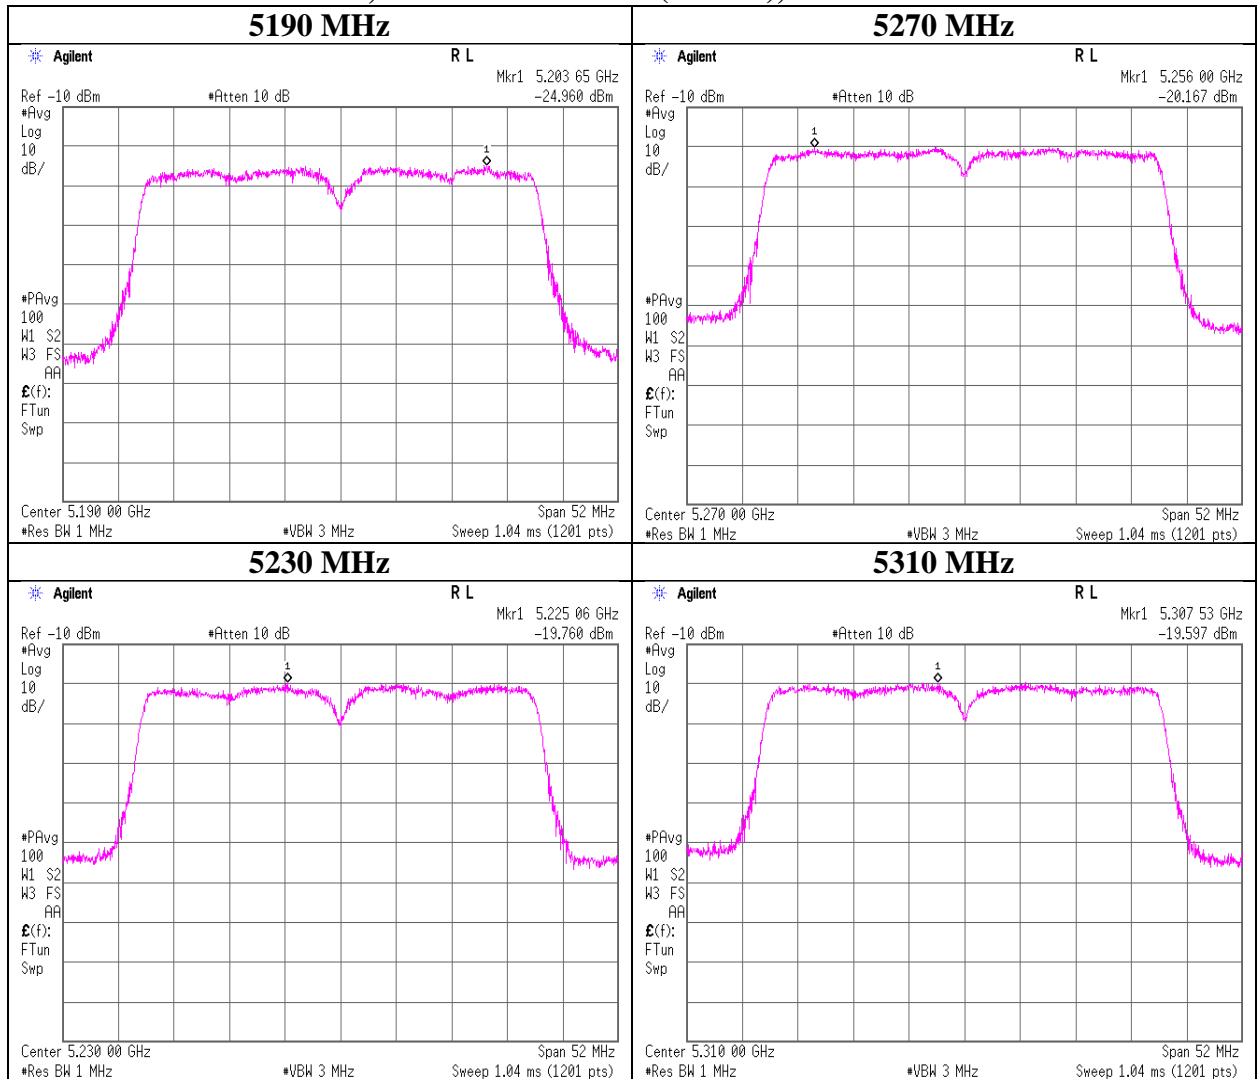

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT40 (MIMO), Antenna 0

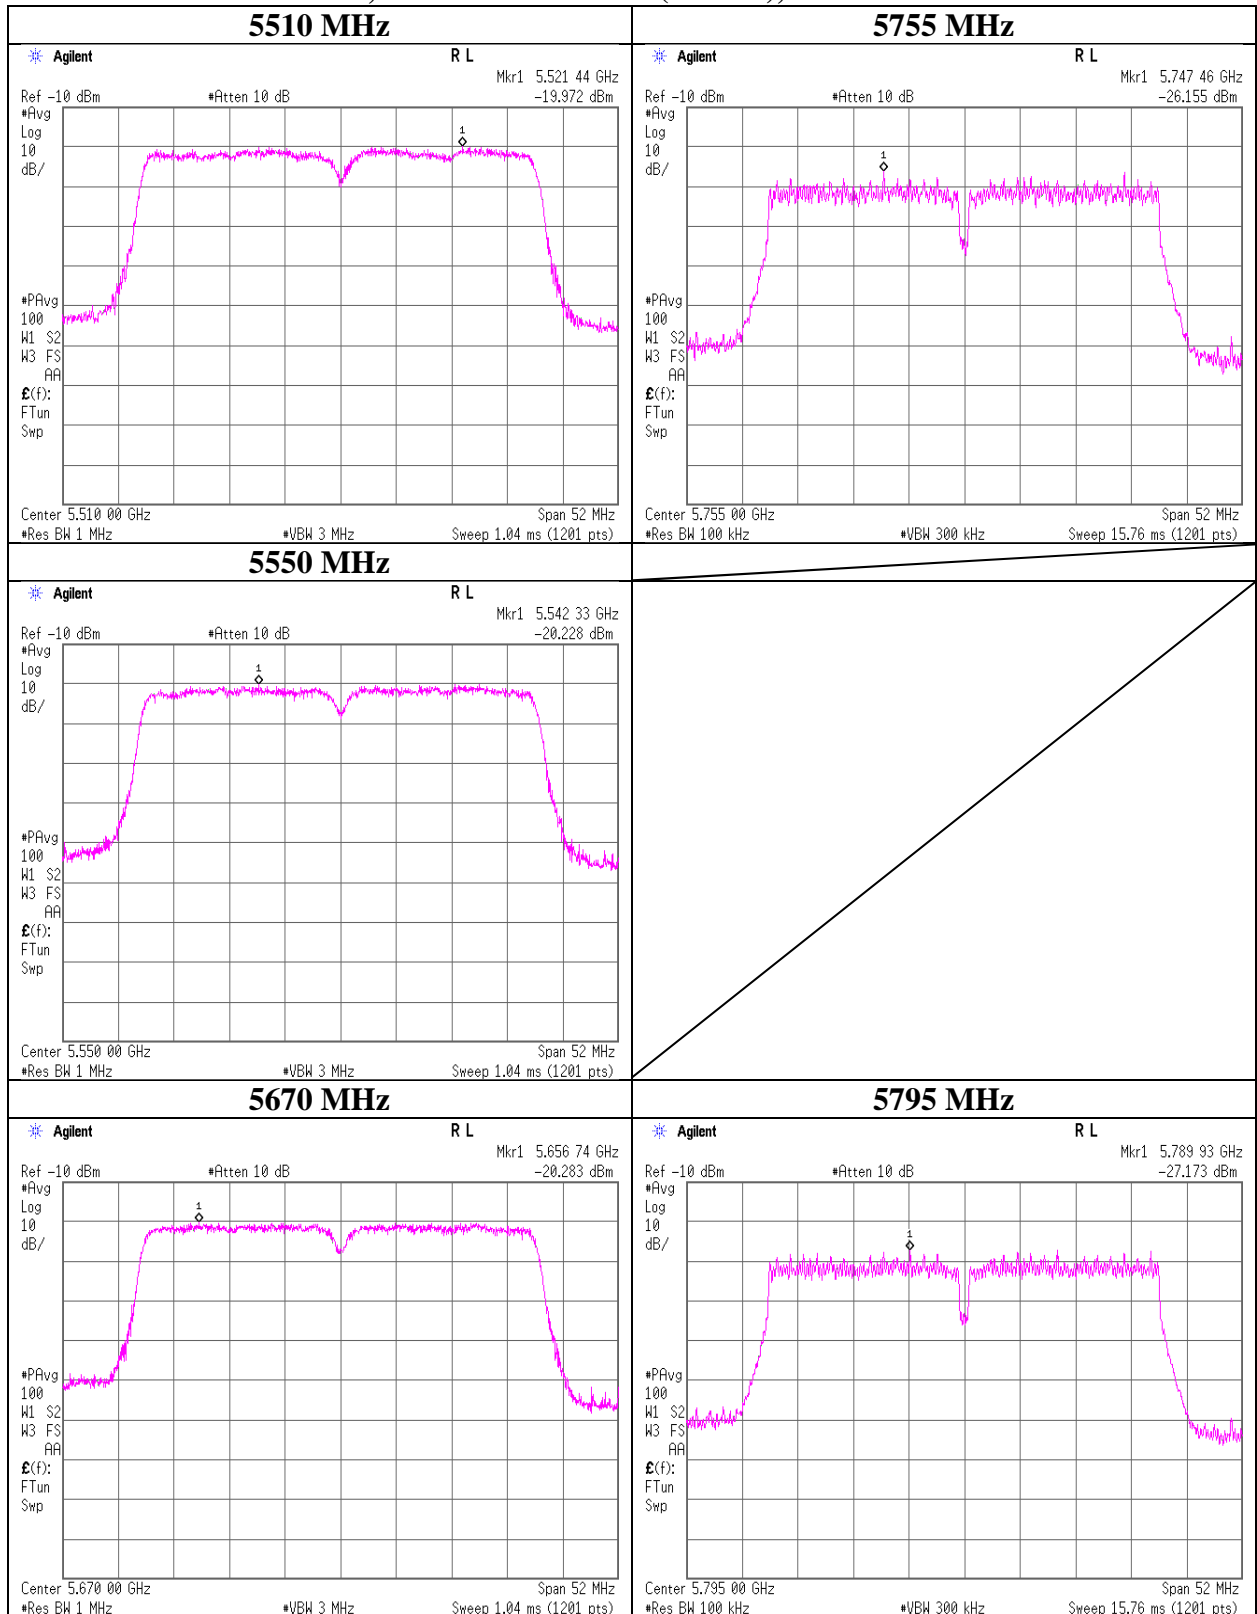

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11n HT40 (MIMO), Antenna 1

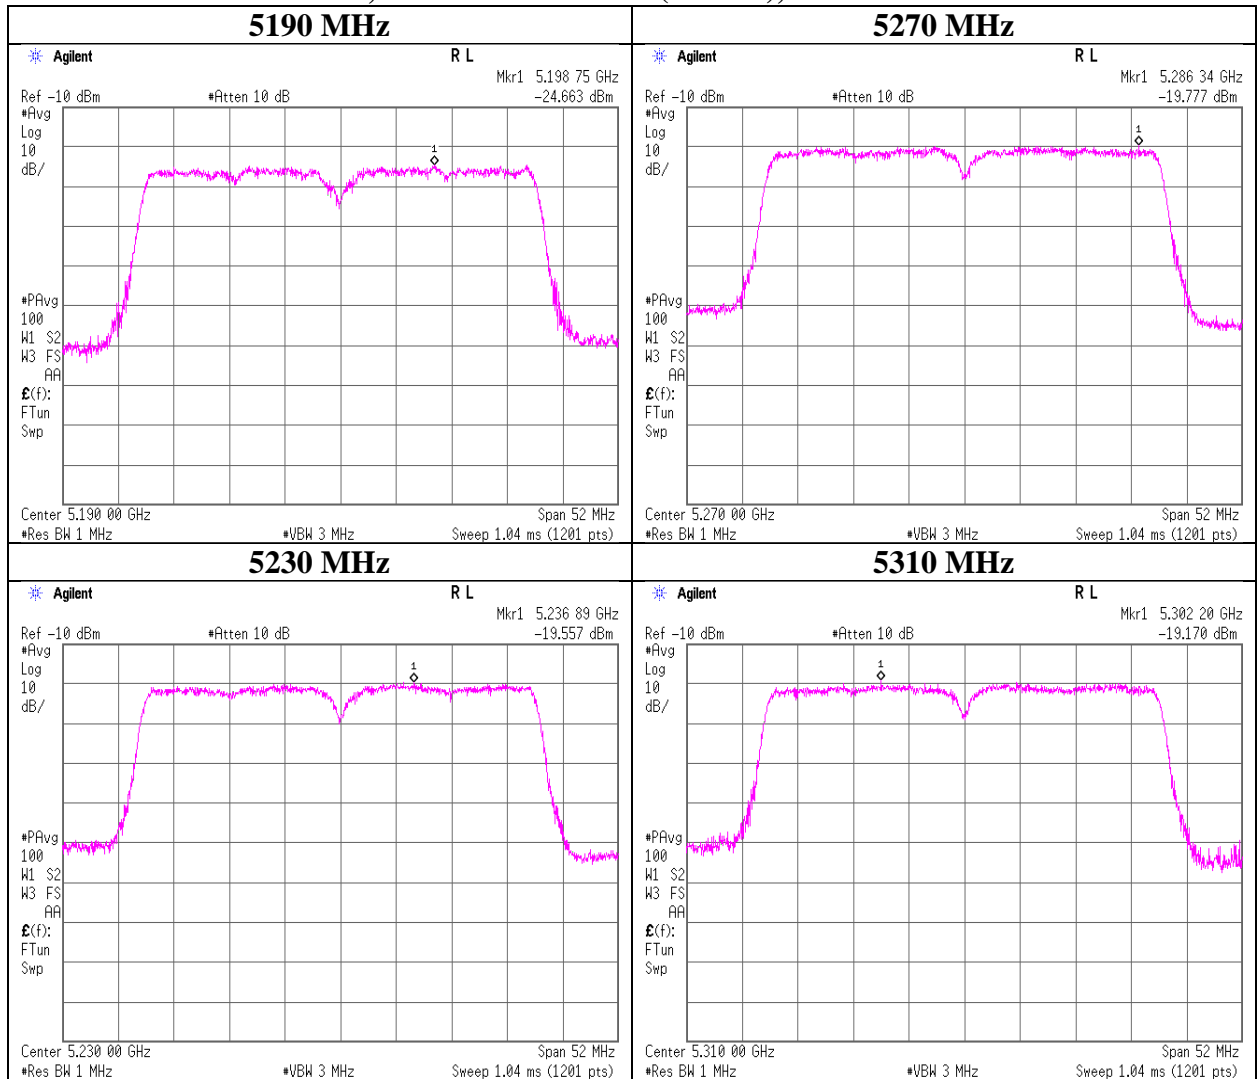

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Maximum Power Spectral Density**

**Tx, IEEE802.11n HT40 (MIMO), Antenna 1**

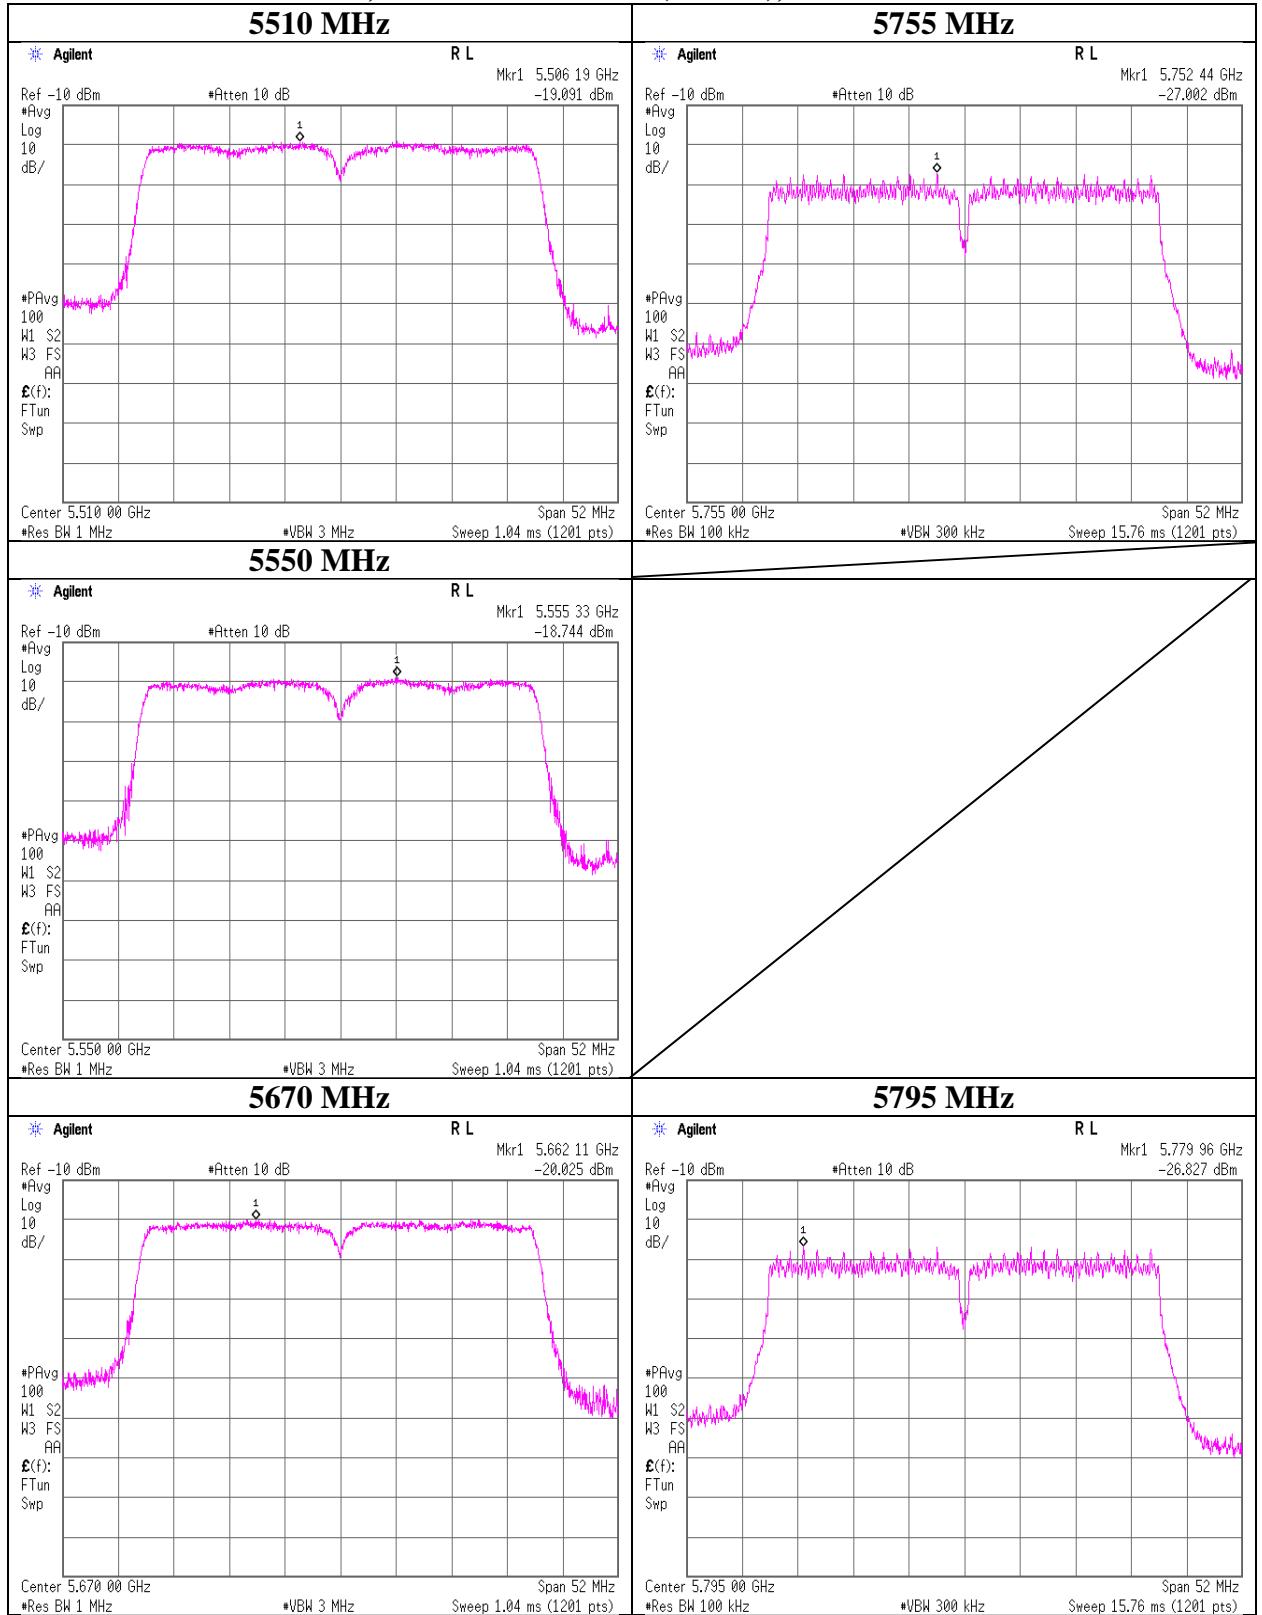

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |                                       |                     |
|------------------------|---------------------------------------|---------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |                     |
| Date                   | March 25, 2019                        | March 26, 2019      |
| Temperature / Humidity | 20 deg. C / 59 % RH                   | 21 deg. C / 51 % RH |
| Engineer               | Kenichi Adachi                        | Kenichi Adachi      |
| Mode                   | Tx, IIEEE802.11ac VHT40 (MIMO)        |                     |

**Antenna 0**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD Reading [dBm /MHz] | Cable Loss [dB] | Atten. Loss [dB] | Duty Factor [dB] | Antenna Gain [dBi] | RBW Correction Factor [dB] | 10log (NANT)* [dB] | PSD (Conducted)   |                  |             | PSD (e.i.r.p.)    |                  |             |
|------------------------|------------------------|-----------------|------------------|------------------|--------------------|----------------------------|--------------------|-------------------|------------------|-------------|-------------------|------------------|-------------|
|                        |                        |                 |                  |                  |                    |                            |                    | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] |
| 5190                   | -23.85                 | 3.89            | 10.21            | 2.87             | 2.95               | 0.00                       | 3.01               | -3.87             | 11.00            | 14.87       | -0.92             | 17.00            | 17.92       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                  | -                 | -                | -           | -                 | -                | -           |
| 5230                   | -20.04                 | 3.90            | 10.21            | 3.39             | 2.95               | 0.00                       | 3.01               | 0.47              | 11.00            | 10.53       | 3.42              | 17.00            | 13.58       |
| 5270                   | -20.84                 | 3.91            | 10.21            | 3.39             | 2.95               | 0.00                       | 3.01               | -0.32             | 11.00            | 11.32       | 2.63              | 17.00            | 14.37       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                  | -                 | -                | -           | -                 | -                | -           |
| 5310                   | -20.73                 | 3.92            | 10.21            | 3.39             | 2.95               | 0.00                       | 3.01               | -0.20             | 11.00            | 11.20       | 2.75              | 17.00            | 14.25       |
| 5510                   | -20.50                 | 3.97            | 10.22            | 3.39             | 2.95               | 0.00                       | 3.01               | 0.09              | 11.00            | 10.91       | 3.04              | 17.00            | 13.97       |
| 5550                   | -20.69                 | 3.98            | 10.22            | 3.39             | 2.95               | 0.00                       | 3.01               | -0.09             | 11.00            | 11.09       | 2.86              | 17.00            | 14.14       |
| 5670                   | -21.09                 | 3.99            | 10.23            | 3.39             | 2.95               | 0.00                       | 3.01               | -0.47             | 11.00            | 11.47       | 2.48              | 17.00            | 14.52       |
| 5755                   | -27.68                 | 4.00            | 10.24            | 3.39             | 2.95               | 6.99                       | 3.01               | -0.05             | 30.00            | 30.05       | 2.90              | 36.00            | 33.10       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                  | -                 | -                | -           | -                 | -                | -           |
| 5795                   | -27.34                 | 4.01            | 10.24            | 3.39             | 2.95               | 6.99                       | 3.01               | 0.30              | 30.00            | 29.70       | 3.25              | 36.00            | 32.75       |

**Antenna 1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD Reading [dBm /MHz] | Cable Loss [dB] | Atten. Loss [dB] | Duty Factor [dB] | Antenna Gain [dBi] | RBW Correction Factor [dB] | 10log (NANT)* [dB] | PSD (Conducted)   |                  |             | PSD (e.i.r.p.)    |                  |             |
|------------------------|------------------------|-----------------|------------------|------------------|--------------------|----------------------------|--------------------|-------------------|------------------|-------------|-------------------|------------------|-------------|
|                        |                        |                 |                  |                  |                    |                            |                    | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] | Result [dBm /MHz] | Limit [dBm /MHz] | Margin [dB] |
| 5190                   | -23.98                 | 3.89            | 10.21            | 2.87             | 1.99               | 0.00                       | 3.01               | -4.00             | 11.00            | 15.00       | -2.00             | 17.00            | 19.00       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                  | -                 | -                | -           | -                 | -                | -           |
| 5230                   | -20.36                 | 3.90            | 10.21            | 3.39             | 1.99               | 0.00                       | 3.01               | 0.15              | 11.00            | 10.85       | 2.15              | 17.00            | 14.85       |
| 5270                   | -19.96                 | 3.91            | 10.21            | 3.39             | 1.99               | 0.00                       | 3.01               | 0.57              | 11.00            | 10.44       | 2.56              | 17.00            | 14.44       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                  | -                 | -                | -           | -                 | -                | -           |
| 5310                   | -19.84                 | 3.92            | 10.21            | 3.39             | 1.99               | 0.00                       | 3.01               | 0.69              | 11.00            | 10.31       | 2.68              | 17.00            | 14.32       |
| 5510                   | -19.77                 | 3.97            | 10.22            | 3.39             | 1.99               | 0.00                       | 3.01               | 0.82              | 11.00            | 10.18       | 2.81              | 17.00            | 14.19       |
| 5550                   | -19.70                 | 3.98            | 10.22            | 3.39             | 1.99               | 0.00                       | 3.01               | 0.90              | 11.00            | 10.10       | 2.90              | 17.00            | 14.10       |
| 5670                   | -19.44                 | 3.99            | 10.23            | 3.39             | 1.99               | 0.00                       | 3.01               | 1.18              | 11.00            | 9.82        | 3.18              | 17.00            | 13.83       |
| 5755                   | -27.34                 | 4.00            | 10.24            | 3.39             | 1.99               | 6.99                       | 3.01               | 0.29              | 30.00            | 29.71       | 2.29              | 36.00            | 33.71       |
| -                      | -                      | -               | -                | -                | -                  | -                          | -                  | -                 | -                | -           | -                 | -                | -           |
| 5795                   | -26.25                 | 4.01            | 10.24            | 3.39             | 1.99               | 6.99                       | 3.01               | 1.39              | 30.00            | 28.61       | 3.39              | 36.00            | 32.61       |

## Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$ 

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor + 10log (Nant)

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

\*) This test was measured based on Method In-Band Power Spectral Density (PSD) Measurements E) 2) c) of

"Guidance for Summing Emission Measurements from Multiple Outputs of a Transmitter or from Multiple Transmitters (KDB662911 D01)"

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**UL Japan, Inc.****Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT40 (MIMO), Antenna 0

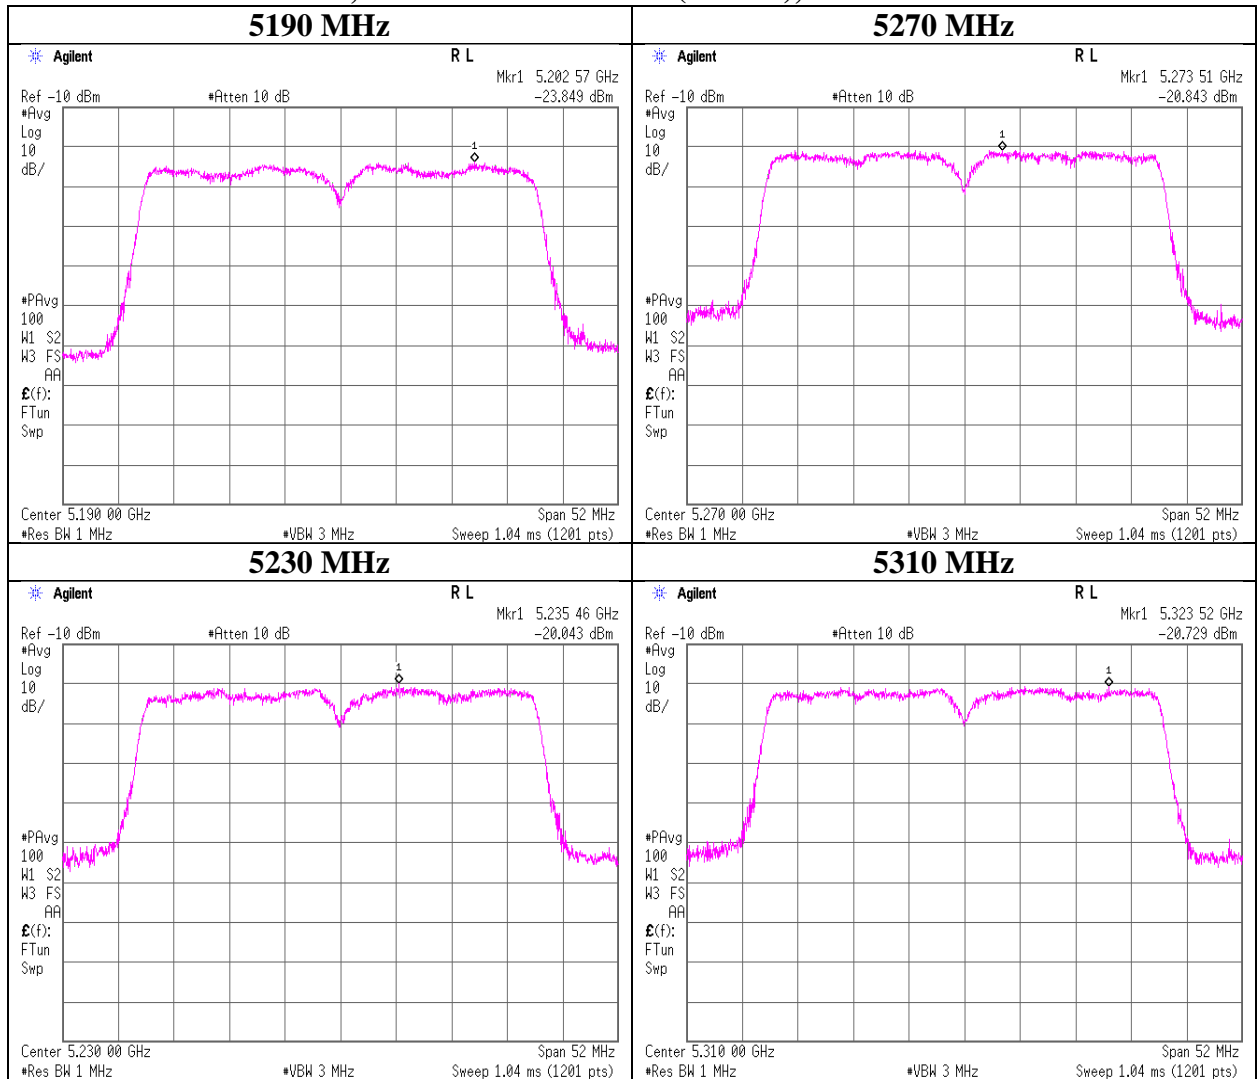

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



**Maximum Power Spectral Density**

**Tx, IEEE802.11ac VHT40 (MIMO), Antenna 0**

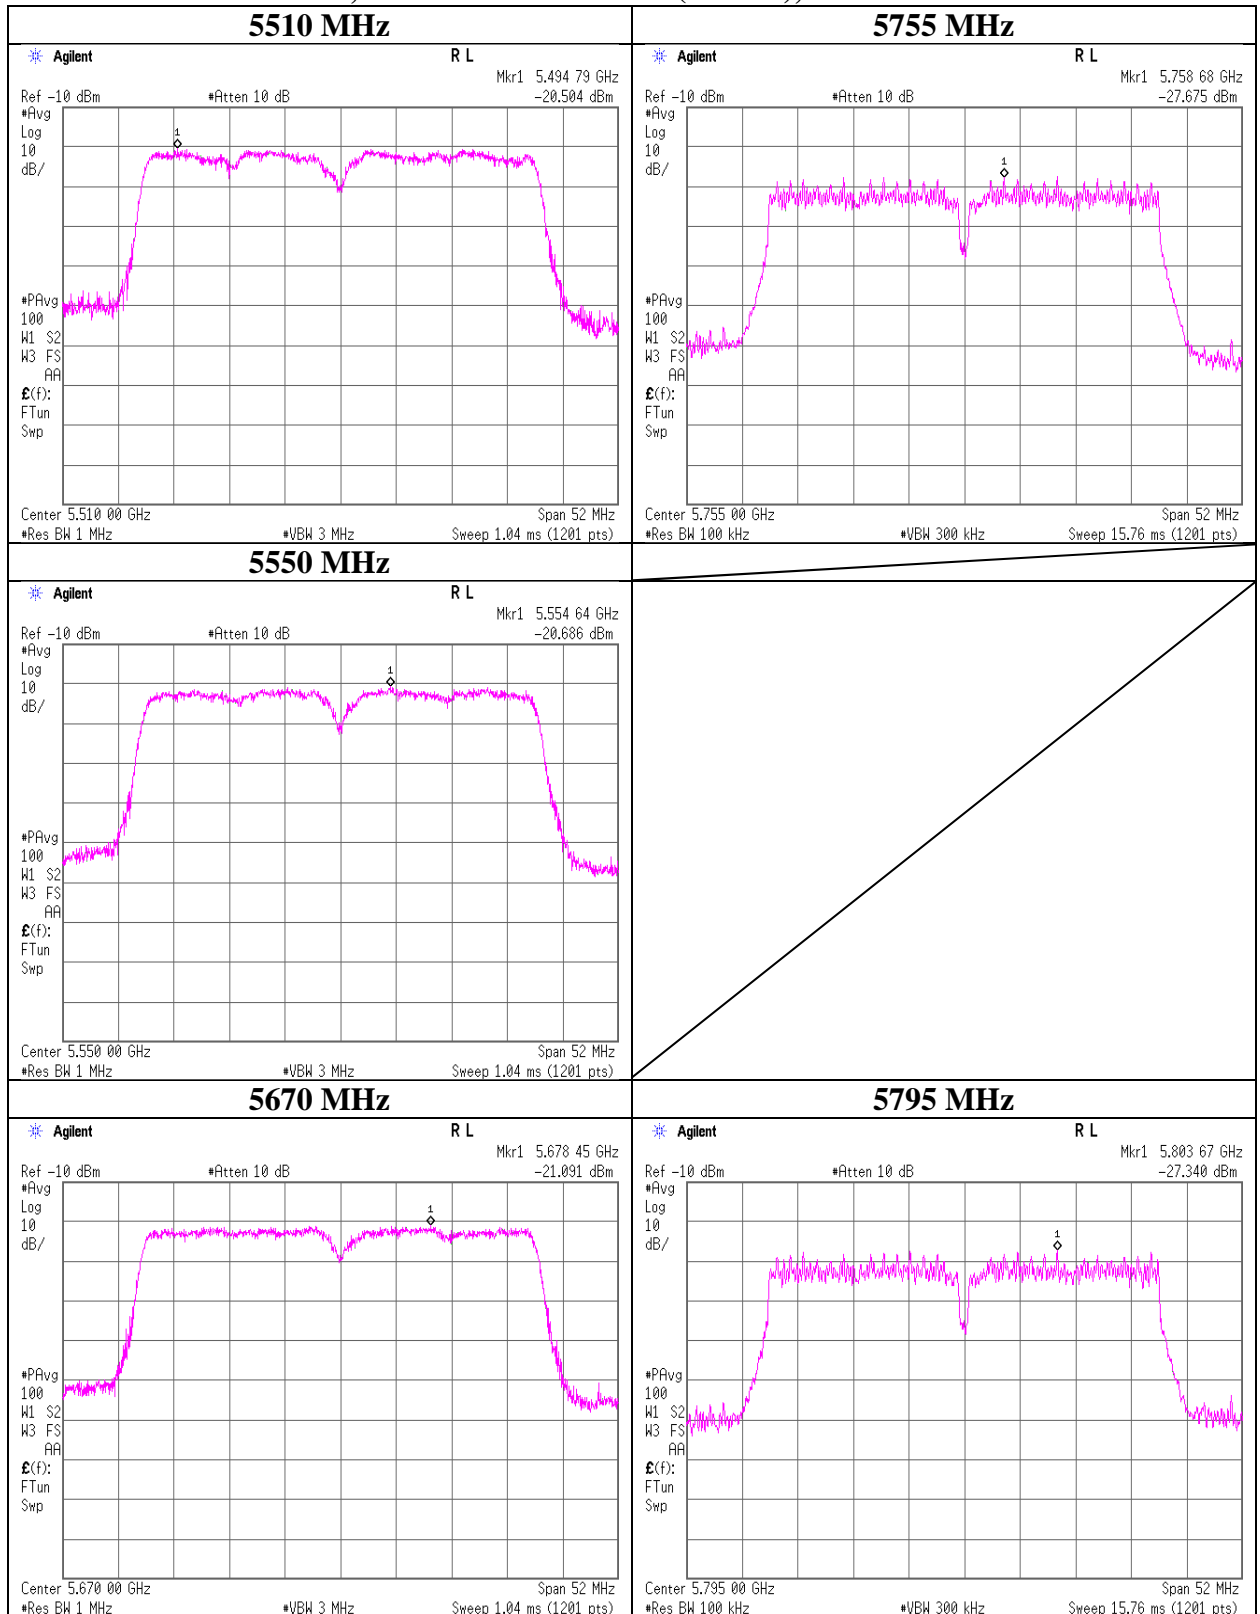

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT40 (MIMO), Antenna 1

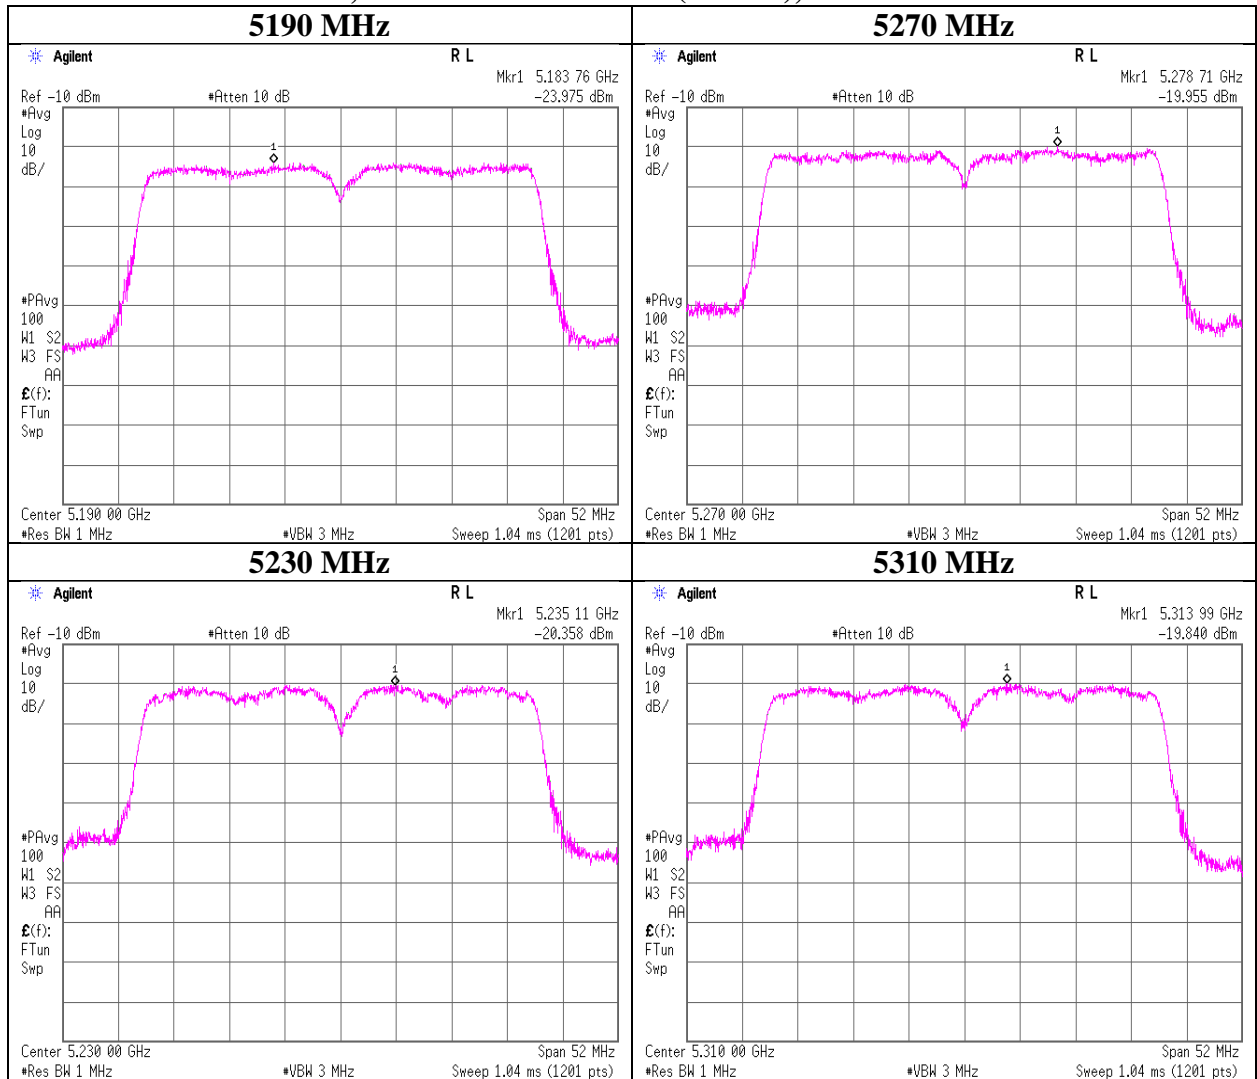

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT40 (MIMO), Antenna 1

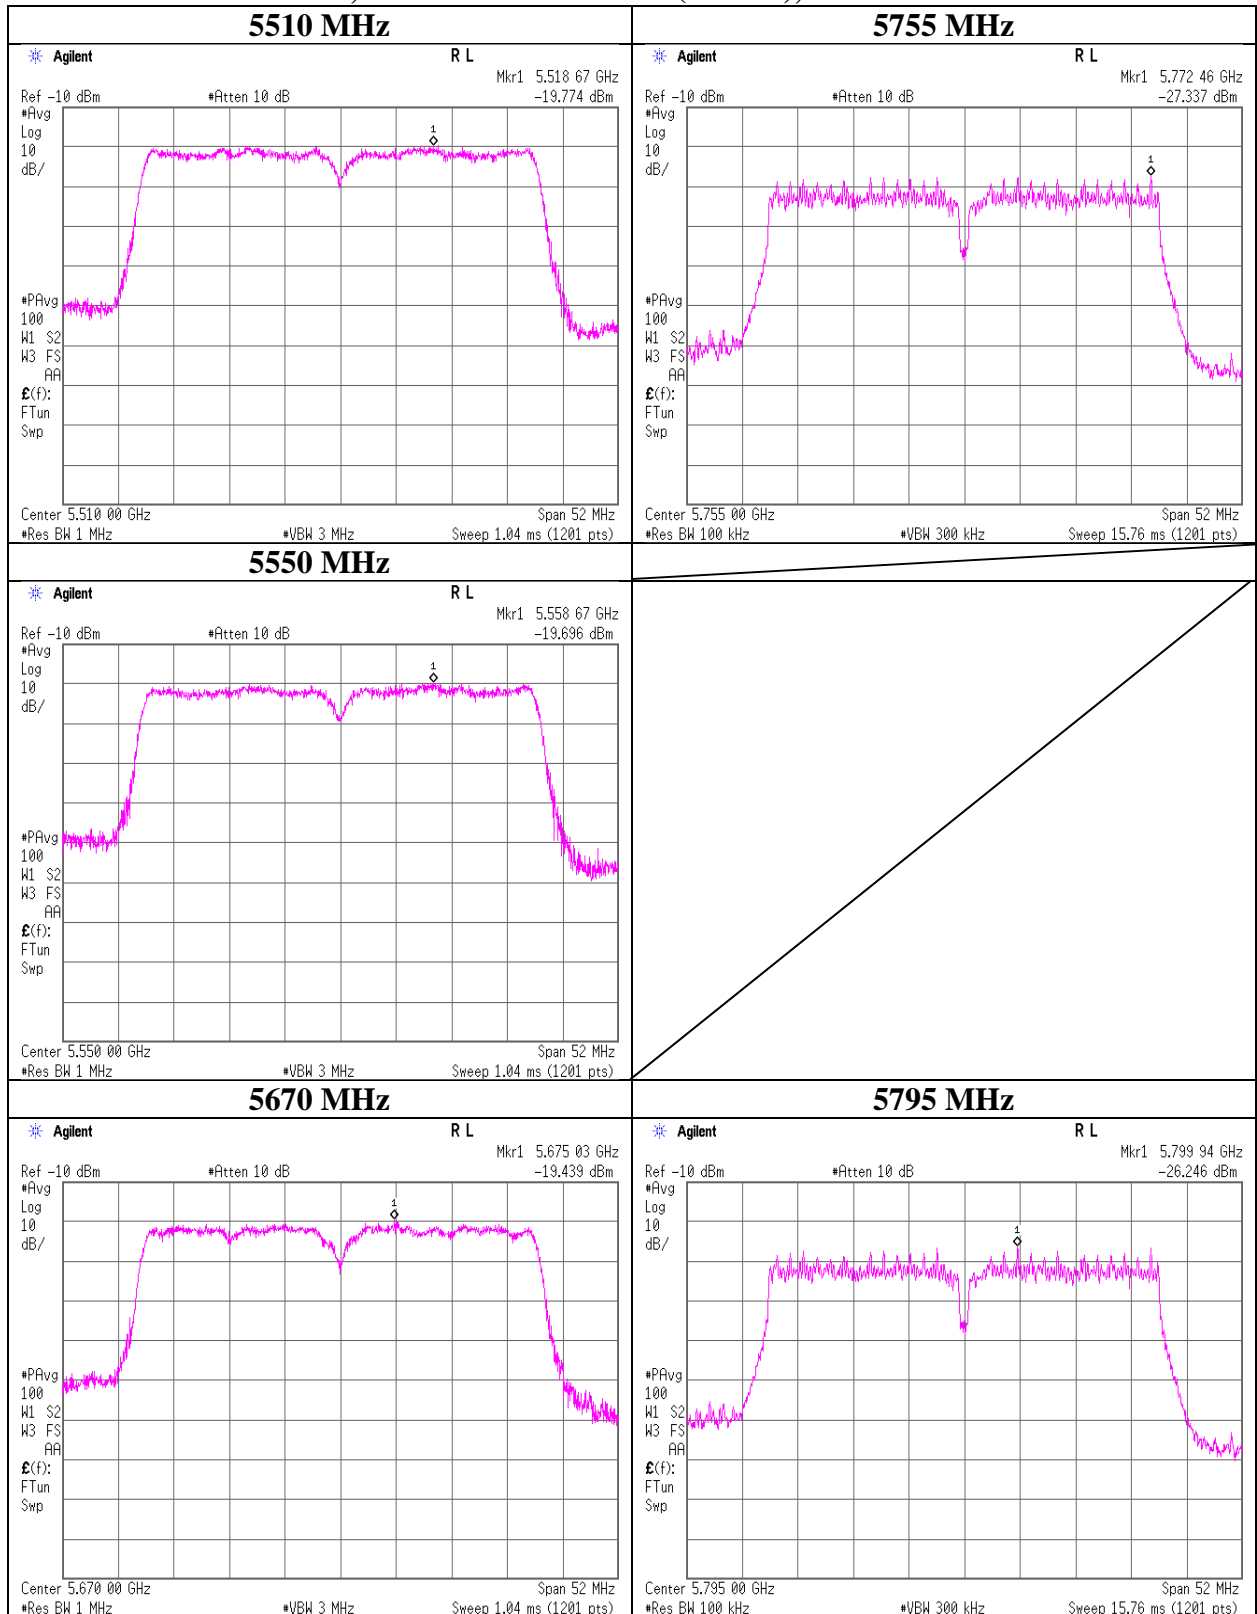

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab. No.1 Measurement Room  |
| Date                   | March 22, 2019   |
| Temperature / Humidity | 24 deg. C / 47 % RH  |
| Engineer               | Kenichi Adachi   |
| Mode                   | Tx, IEEE802.11ac VHT80 (SISO), PN9,<br>worst antenna port 1 (below 5530 MHz), 0 (5775 MHz) |

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5210                      | -25.94                    | 3.89               | 10.21               | 3.33                | 1.99                  | 0.00                          | -8.51                | 11.00               | 19.51          | -6.52                | 17.00               | 23.52          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                    | -                   | -              | -                    | -                   | -              |
| 5290                      | -25.30                    | 3.92               | 10.21               | 3.33                | 1.99                  | 0.00                          | -7.84                | 11.00               | 18.84          | -5.85                | 17.00               | 22.85          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                    | -                   | -              | -                    | -                   | -              |
| 5530                      | -22.82                    | 3.97               | 10.22               | 3.33                | 1.99                  | 0.00                          | -5.30                | 11.00               | 16.30          | -3.31                | 17.00               | 20.31          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                    | -                   | -              | -                    | -                   | -              |
| 5775                      | -28.92                    | 4.00               | 10.24               | 3.33                | 2.95                  | 6.99                          | -4.36                | 30.00               | 34.36          | -1.41                | 36.00               | 37.41          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                    | -                   | -              | -                    | -                   | -              |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                    | -                   | -              | -                    | -                   | -              |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

**Maximum Power Spectral Density**

**Tx, IEEE802.11ac VHT80 (SISO), Antenna 1 (below 5530 MHz), 0 (5775 MHz)**

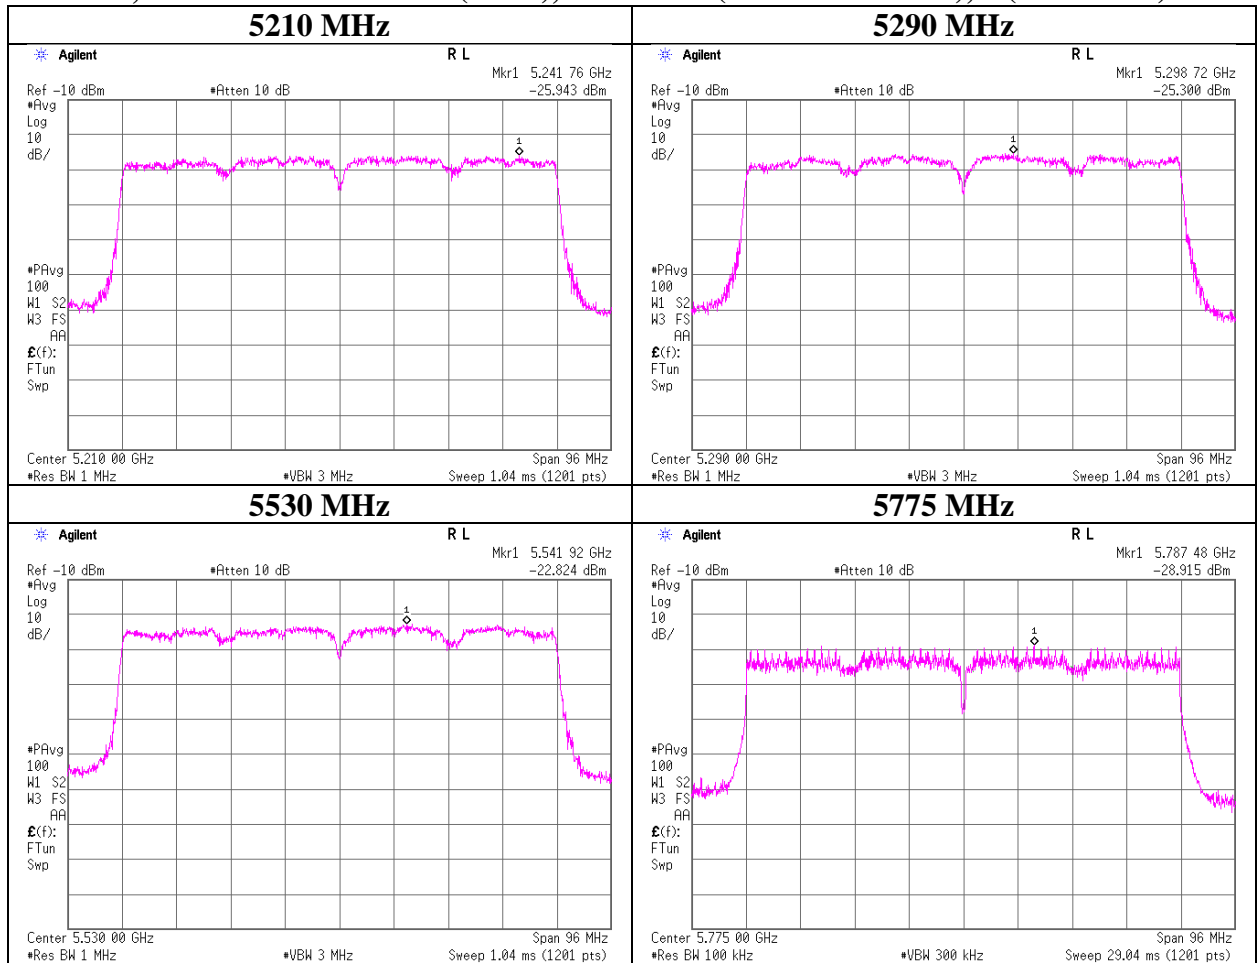

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Maximum Power Spectral Density

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab. No.1 Measurement Room |
| Date                   | March 26, 2019                        |
| Temperature / Humidity | 21 deg. C / 51 % RH                   |
| Engineer               | Kenichi Adachi                        |
| Mode                   | Tx, IIEEE802.11ac VHT80 (MIMO), PN9   |

**Antenna 0**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               |                       | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5210                      | -28.58                    | 3.89               | 10.21               | 3.84                | 2.95                  | 0.00                          | 3.01                  | -7.63                | 11.00               | 18.63          | -4.68                | 17.00               | 21.68          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5290                      | -28.86                    | 3.92               | 10.21               | 3.84                | 2.95                  | 0.00                          | 3.01                  | -7.88                | 11.00               | 18.88          | -4.93                | 17.00               | 21.93          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5530                      | -26.69                    | 3.97               | 10.22               | 3.89                | 2.95                  | 0.00                          | 3.01                  | -5.60                | 11.00               | 16.60          | -2.65                | 17.00               | 19.65          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5775                      | -30.66                    | 4.00               | 10.24               | 3.89                | 2.95                  | 6.99                          | 3.01                  | -2.53                | 30.00               | 32.53          | 0.42                 | 36.00               | 35.58          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |

Sample Calculation:

**Antenna 1**

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD Reading<br>[dBm /MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Duty Factor<br>[dB] | Antenna Gain<br>[dBi] | RBW Correction Factor<br>[dB] | 10log (NANT)*<br>[dB] | PSD (Conducted)      |                     |                | PSD (e.i.r.p.)       |                     |                |
|---------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|-------------------------------|-----------------------|----------------------|---------------------|----------------|----------------------|---------------------|----------------|
|                           |                           |                    |                     |                     |                       |                               |                       | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] | Result<br>[dBm /MHz] | Limit<br>[dBm /MHz] | Margin<br>[dB] |
| 5210                      | -28.79                    | 3.89               | 10.21               | 3.84                | 1.99                  | 0.00                          | 3.01                  | -7.84                | 11.00               | 18.84          | -5.85                | 17.00               | 22.85          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5290                      | -27.71                    | 3.92               | 10.21               | 3.84                | 1.99                  | 0.00                          | 3.01                  | -6.73                | 11.00               | 17.73          | -4.74                | 17.00               | 21.74          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5530                      | -26.62                    | 3.97               | 10.22               | 3.89                | 1.99                  | 0.00                          | 3.01                  | -5.53                | 11.00               | 16.53          | -3.53                | 17.00               | 20.53          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| 5775                      | -29.24                    | 4.00               | 10.24               | 3.89                | 1.99                  | 6.99                          | 3.01                  | -1.11                | 30.00               | 31.11          | 0.88                 | 36.00               | 35.12          |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |
| -                         | -                         | -                  | -                   | -                   | -                     | -                             | -                     | -                    | -                   | -              | -                    | -                   | -              |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$ 

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor + 10log (Nant)

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

\*) This test was measured based on Method In-Band Power Spectral Density (PSD) Measurements E) 2) c) of

"Guidance for Summing Emission Measurements from Multiple Outputs of a Transmitter of from Multiple Transmitters (KDB662911 D01)"

Although the EUT operates on Master mode, more stringent limit for Client device was applied. (W52 for FCC)

### UL Japan, Inc.

#### Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT80 (MIMO), Antenna 0

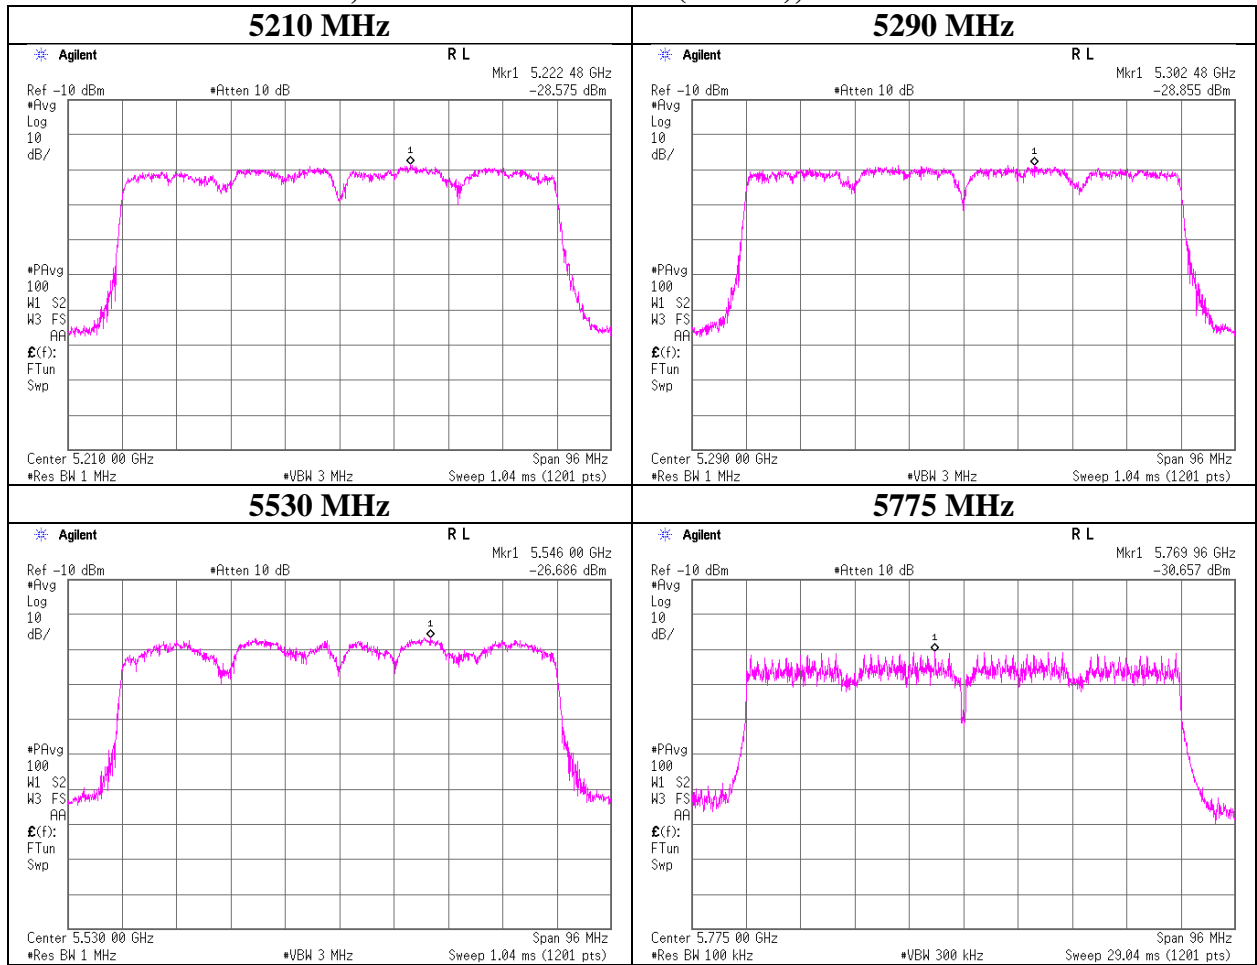

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Maximum Power Spectral Density

#### Tx, IEEE802.11ac VHT80 (MIMO), Antenna 1

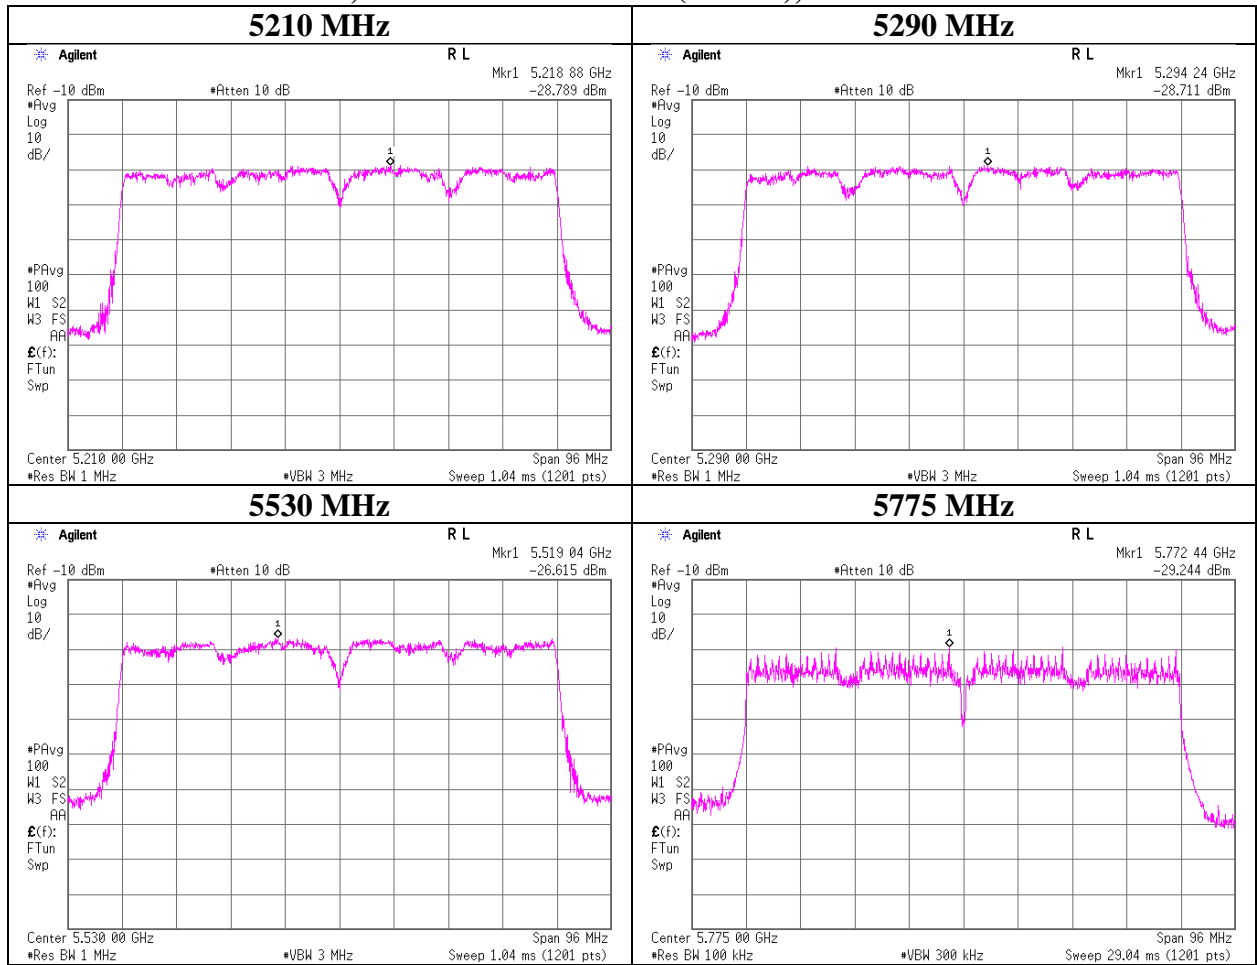

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 9, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5180 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5150.000        | PK       | 52.60          | 32.18           | 16.22     | 39.58     | 2.26                 | 63.68           | 73.90          | 10.2        | 338         | 330          |             |
| Hori.    | 15540.000       | PK       | 46.80          | 38.62           | 13.21     | 38.78     | -9.54                | 50.31           | 73.90          | 23.5        | 146         | 59           |             |
| Hori.    | 5150.000        | AV       | 36.80          | 32.18           | 16.22     | 39.58     | 2.26                 | 47.88           | 53.90          | <b>6.0</b>  | 338         | 330          | VBW:2.7 kHz |
| Hori.    | 15540.000       | AV       | 36.11          | 38.62           | 13.21     | 38.78     | -9.54                | 39.62           | 53.90          | 14.2        | 146         | 59           | VBW:2.7 kHz |
| Vert.    | 5150.000        | PK       | 50.50          | 32.18           | 16.22     | 39.58     | 2.26                 | 61.58           | 73.90          | 12.3        | 100         | 281          |             |
| Vert.    | 15540.000       | PK       | 47.06          | 38.62           | 13.21     | 38.78     | -9.54                | 50.57           | 73.90          | 23.3        | 143         | 299          |             |
| Vert.    | 5150.000        | AV       | 36.70          | 32.18           | 16.22     | 39.58     | 2.26                 | 47.78           | 53.90          | 6.1         | 100         | 281          | VBW:2.7 kHz |
| Vert.    | 15540.000       | AV       | 36.50          | 38.62           | 13.21     | 38.78     | -9.54                | 40.01           | 53.90          | 13.8        | 143         | 299          | VBW:2.7 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 10360.000       | PK       | 44.80          | 39.48           | 10.40     | 39.62     | 2.26                 | 57.32           | -37.90              | -27.00      | 10.9        | 100         | 0            |        |
| Vert.    | 10360.000       | PK       | 45.00          | 39.48           | 10.40     | 39.62     | 2.26                 | 57.52           | -37.70              | -27.00      | <b>10.7</b> | 100         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG} \left( \left( \left( 10^{\left( \text{Electric Field Strength [dBuV/m]} / 20 \right)} \cdot 10^{-6} \right) \cdot \text{Distance:}3[\text{m}] \right)^2 / 30 \right) \cdot 10^3$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 9, 2019                 |
| Temperature / Humidity | 20 deg.C / 25 %RH               |
| Engineer               | Kazutaka Takeyama               |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT20 (SISO) ,5180 MHz |

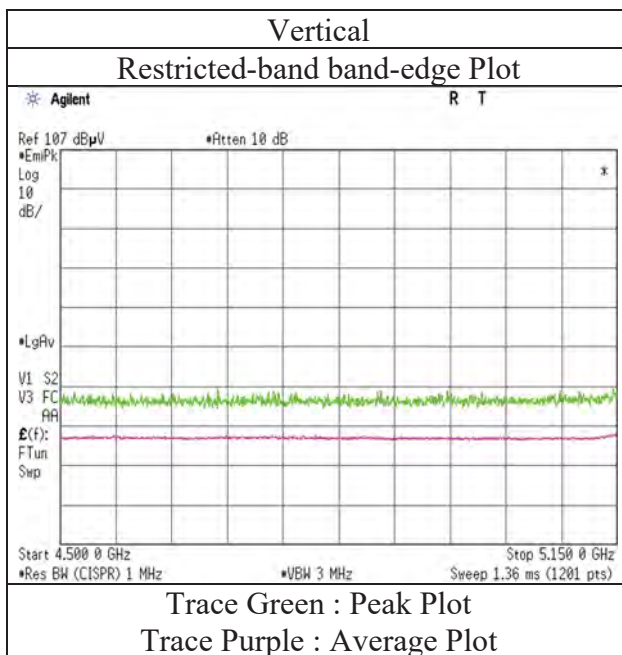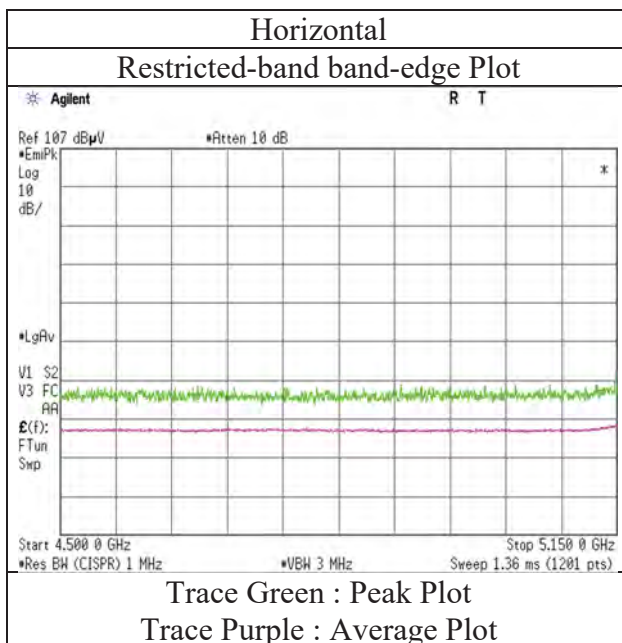

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 10, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5240 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 15720.000       | PK       | 46.60          | 38.32           | 13.10     | 39.17     | -9.54                | 49.31           | 73.90          | 24.5        | 150         | 0            | VBW:2.7 kHz |
| Hori.    | 15720.000       | AV       | 35.72          | 38.32           | 13.10     | 39.17     | -9.54                | 38.43           | 53.90          | 15.4        | 150         | 0            |             |
| Vert.    | 15720.000       | PK       | 46.29          | 38.32           | 13.10     | 39.17     | -9.54                | 49.00           | 73.90          | 24.9        | 150         | 0            | VBW:2.7 kHz |
| Vert.    | 15720.000       | AV       | 35.64          | 38.32           | 13.10     | 39.17     | -9.54                | 38.35           | 53.90          | 15.5        | 150         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 10480.000       | PK       | 44.50          | 39.71           | 10.52     | 39.75     | 2.26                 | 57.24           | -37.98              | -27.00      | 10.9        | 100         | 0            |        |
| Vert.    | 10480.000       | PK       | 44.60          | 39.71           | 10.52     | 39.75     | 2.26                 | 57.34           | -37.88              | -27.00      | 10.8        | 100         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 / 30) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3 No.3  
 Date January 26, 2019 January 10, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 22 deg. C / 31 % RH 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kenichi Adachi Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (30 MHz - 1000 MHz) (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5320 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (below 1GHz and above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 36.692          | QP       | 34.98          | 16.12           | 6.58      | 32.20     | 0.00                 | 25.48           | 40.00          | 14.5        | 400         | 53           |             |
| Hori.    | 92.712          | QP       | 43.33          | 8.79            | 7.50      | 32.16     | 0.00                 | 27.46           | 43.50          | 16.0        | 274         | 214          |             |
| Hori.    | 155.955         | QP       | 28.45          | 14.84           | 7.85      | 32.11     | 0.00                 | 19.03           | 43.50          | 24.4        | 196         | 259          |             |
| Hori.    | 250.011         | QP       | 54.23          | 11.81           | 8.38      | 32.01     | 0.00                 | 42.41           | 46.00          | 3.5         | 121         | 172          |             |
| Hori.    | 430.074         | QP       | 43.48          | 16.33           | 9.37      | 31.97     | 0.00                 | 37.21           | 46.00          | 8.7         | 100         | 39           |             |
| Hori.    | 651.255         | QP       | 31.74          | 19.33           | 10.20     | 31.98     | 0.00                 | 29.29           | 46.00          | 16.7        | 181         | 51           |             |
| Hori.    | 959.994         | QP       | 33.72          | 22.22           | 11.27     | 30.57     | 0.00                 | 36.64           | 46.00          | 9.3         | 100         | 208          |             |
| Hori.    | 5350.000        | PK       | 51.60          | 31.73           | 16.28     | 39.68     | 2.26                 | 62.19           | 73.90          | 11.7        | 115         | 26           |             |
| Hori.    | 10640.000       | PK       | 44.60          | 39.52           | 10.51     | 39.69     | 2.26                 | 57.20           | 73.90          | 16.7        | 100         | 0            |             |
| Hori.    | 15960.000       | PK       | 45.37          | 37.78           | 12.96     | 39.68     | -9.54                | 46.89           | 73.90          | 27.0        | 150         | 0            |             |
| Hori.    | 5350.000        | AV       | 36.20          | 31.73           | 16.28     | 39.68     | 2.26                 | 46.79           | 53.90          | 7.1         | 115         | 26           | VBW:2.7 kHz |
| Hori.    | 10640.000       | AV       | 35.30          | 39.52           | 10.51     | 39.69     | 2.26                 | 47.90           | 53.90          | 6.0         | 100         | 0            | VBW:2.7 kHz |
| Hori.    | 15960.000       | AV       | 35.42          | 37.78           | 12.96     | 39.68     | -9.54                | 36.94           | 53.90          | 16.9        | 150         | 0            | VBW:2.7 kHz |
| Vert.    | 38.255          | QP       | 38.76          | 15.51           | 6.61      | 32.20     | 0.00                 | 28.68           | 40.00          | 11.3        | 100         | 145          |             |
| Vert.    | 94.611          | QP       | 41.11          | 9.16            | 7.47      | 32.16     | 0.00                 | 25.58           | 43.50          | 17.9        | 100         | 105          |             |
| Vert.    | 158.713         | QP       | 35.42          | 15.07           | 7.86      | 32.11     | 0.00                 | 26.24           | 43.50          | 17.2        | 100         | 314          |             |
| Vert.    | 250.011         | QP       | 41.69          | 11.81           | 8.38      | 32.01     | 0.00                 | 29.87           | 46.00          | 16.1        | 100         | 8            |             |
| Vert.    | 430.074         | QP       | 39.21          | 16.33           | 9.37      | 31.97     | 0.00                 | 32.94           | 46.00          | 13.0        | 159         | 11           |             |
| Vert.    | 651.255         | QP       | 35.97          | 19.33           | 10.20     | 31.98     | 0.00                 | 33.52           | 46.00          | 12.4        | 100         | 238          |             |
| Vert.    | 5350.000        | PK       | 50.00          | 31.73           | 16.28     | 39.68     | 2.26                 | 60.59           | 73.90          | 13.3        | 100         | 255          |             |
| Vert.    | 10640.000       | PK       | 45.00          | 39.52           | 10.51     | 39.69     | 2.26                 | 57.60           | 73.90          | 16.3        | 100         | 0            |             |
| Vert.    | 15960.000       | PK       | 45.60          | 37.78           | 12.96     | 39.68     | -9.54                | 47.12           | 73.90          | 26.7        | 150         | 0            |             |
| Vert.    | 5350.000        | AV       | 35.40          | 31.73           | 16.28     | 39.68     | 2.26                 | 45.99           | 53.90          | 7.9         | 100         | 255          | VBW:2.7 kHz |
| Vert.    | 10640.000       | AV       | 35.50          | 39.52           | 10.51     | 39.69     | 2.26                 | 48.10           | 53.90          | 5.8         | 100         | 0            | VBW:2.7 kHz |
| Vert.    | 15960.000       | AV       | 35.46          | 37.78           | 12.96     | 39.68     | -9.54                | 36.98           | 53.90          | 16.9        | 150         | 0            | VBW:2.7 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 10, 2019                |
| Temperature / Humidity | 20 deg.C / 25 %RH               |
| Engineer               | Kazutaka Takeyama               |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT20 (SISO) ,5320 MHz |

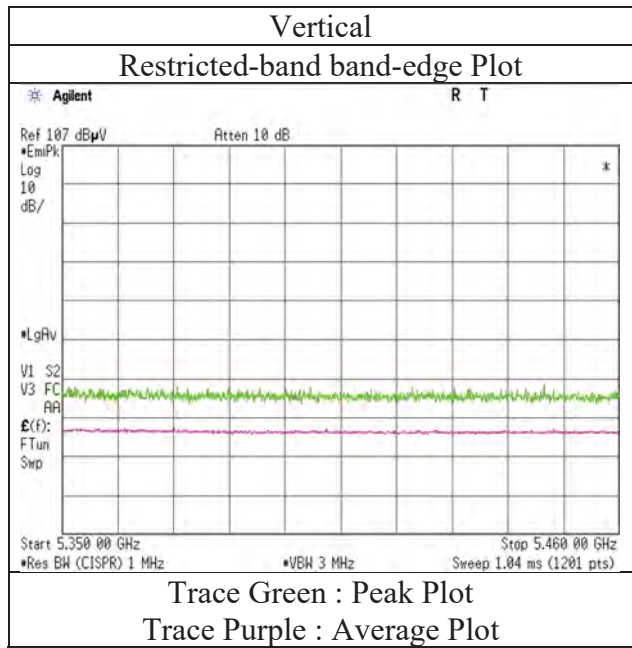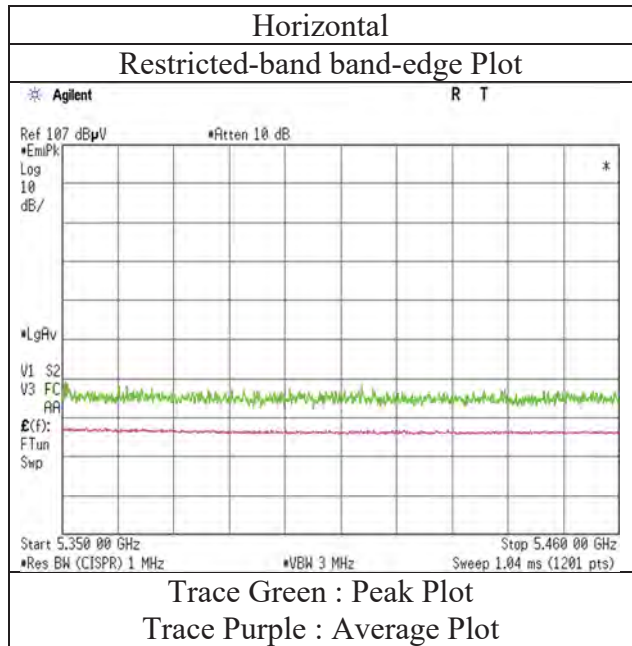

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 12, 2019  
 Temperature / Humidity 23 deg. C / 29 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5180 MHz  
 Tx, IEEE802.11n HT20 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5150.000        | PK       | 42.52          | 32.18           | 17.09     | 34.00     | 2.26                 | 60.05           | 73.90          | 13.8        | 190         | 295          | VBW:9.1 kHz |
| Hori.    | 5150.000        | AV       | 32.61          | 32.18           | 17.09     | 34.00     | 2.26                 | 50.14           | 53.90          | 3.7         | 190         | 295          |             |
| Vert.    | 5150.000        | PK       | 42.56          | 32.18           | 17.09     | 34.00     | 2.26                 | 60.09           | 73.90          | 13.8        | 169         | 221          | VBW:9.1 kHz |
| Vert.    | 5150.000        | AV       | 32.94          | 32.18           | 17.09     | 34.00     | 2.26                 | 50.47           | 53.90          | 3.4         | 169         | 221          |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 12, 2019                      |
| Temperature / Humidity | 23 deg.C / 39 %RH                     |
| Engineer               | Makoto Hosaka                         |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO) ,5180 MHz |

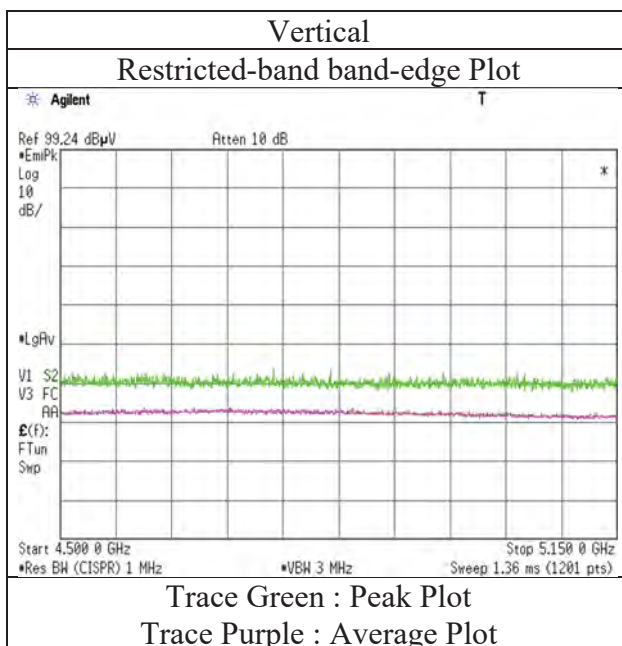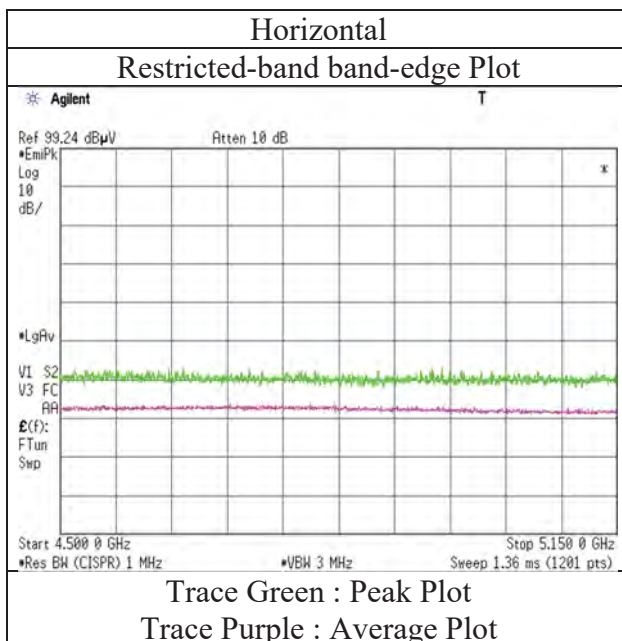

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 12, 2019  
 Temperature / Humidity 23 deg. C / 29 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5320 MHz  
 Tx, IEEE802.11n HT20 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5350.000        | PK       | 45.05          | 31.73           | 17.20     | 33.96     | 2.26                 | 62.28           | 73.90          | 11.6        | 257         | 242          | VBW:9.1 kHz |
| Hori.    | 5350.000        | AV       | 32.59          | 31.73           | 17.20     | 33.96     | 2.26                 | 49.82           | 53.90          | 4.0         | 257         | 242          |             |
| Vert.    | 5350.000        | PK       | 42.08          | 31.73           | 17.20     | 33.96     | 2.26                 | 59.31           | 73.90          | 14.5        | 179         | 104          | VBW:9.1 kHz |
| Vert.    | 5350.000        | AV       | 32.51          | 31.73           | 17.20     | 33.96     | 2.26                 | 49.74           | 53.90          | 4.1         | 179         | 104          |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 12, 2019                      |
| Temperature / Humidity | 23 deg.C / 39 %RH                     |
| Engineer               | Makoto Hosaka                         |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO) ,5320 MHz |

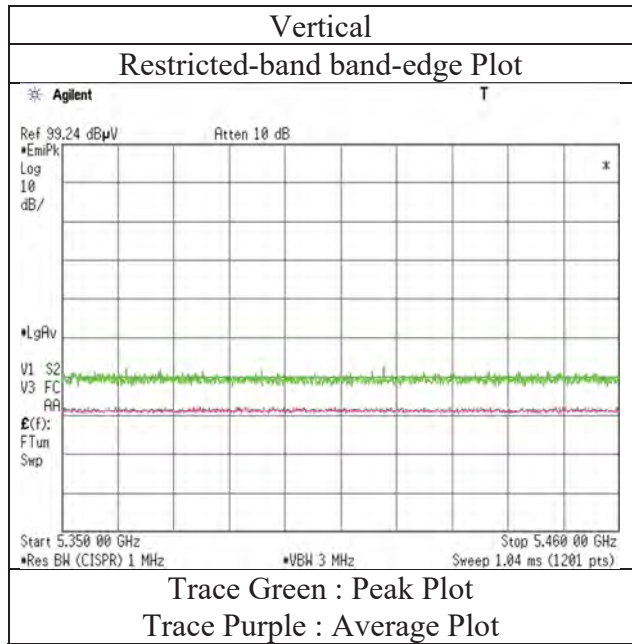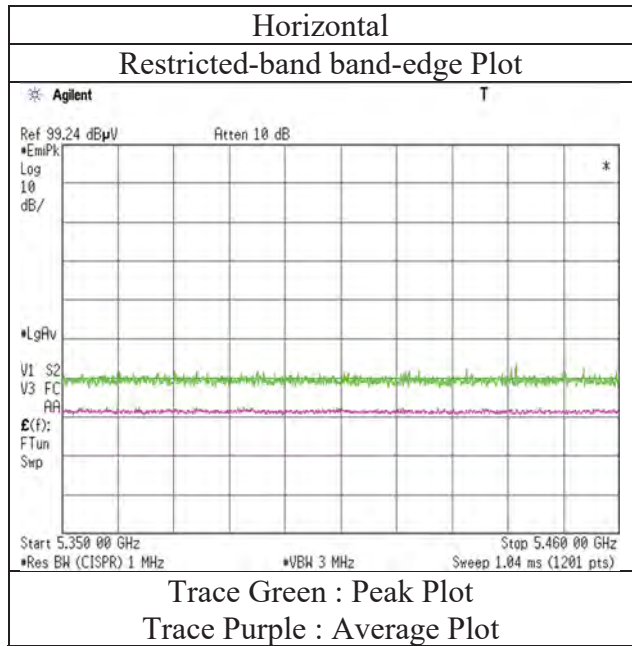

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 9, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5190 MHz  
 Tx, IEEE802.11n HT40 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5150.000        | PK       | 51.10          | 32.18           | 16.22     | 39.58     | 2.24                 | 62.16           | 73.90          | 11.7        | 376         | 335          |             |
| Hori.    | 15570.000       | PK       | 47.46          | 38.54           | 13.19     | 38.84     | -9.54                | 50.81           | 73.90          | 23.0        | 150         | 0            |             |
| Hori.    | 5150.000        | AV       | 40.60          | 32.18           | 16.22     | 39.58     | 2.24                 | 51.66           | 53.90          | 2.2         | 376         | 335          | VBW:5.1 kHz |
| Hori.    | 15570.000       | AV       | 36.67          | 38.54           | 13.19     | 38.84     | -9.54                | 40.02           | 53.90          | 13.8        | 150         | 0            | VBW:5.1 kHz |
| Vert.    | 5150.000        | PK       | 50.60          | 32.18           | 16.22     | 39.58     | 2.24                 | 61.66           | 73.90          | 12.2        | 100         | 72           |             |
| Vert.    | 15570.000       | PK       | 46.17          | 38.54           | 13.19     | 38.84     | -9.54                | 49.52           | 73.90          | 24.3        | 150         | 0            |             |
| Vert.    | 5150.000        | AV       | 39.60          | 32.18           | 16.22     | 39.58     | 2.24                 | 50.66           | 53.90          | 3.2         | 100         | 72           | VBW:5.1 kHz |
| Vert.    | 15570.000       | AV       | 36.55          | 38.54           | 13.19     | 38.84     | -9.54                | 39.90           | 53.90          | 14.0        | 150         | 0            | VBW:5.1 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 10380.000       | PK       | 45.40          | 39.54           | 10.43     | 39.64     | 2.26                 | 57.99           | -37.23              | -27.00      | 10.2        | 100         | 0            |        |
| Vert.    | 10380.000       | PK       | 45.30          | 39.54           | 10.43     | 39.64     | 2.26                 | 57.89           | -37.33              | -27.00      | 10.3        | 100         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG} \left( \left( \left( 10^{\left( \text{Electric Field Strength [dBuV/m]} / 20 \right)^2} \cdot 10^{-6} \right) \cdot \text{Distance:}^3[\text{m}] \right)^2 / 30 \right) \cdot 10^3$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 9, 2019                       |
| Temperature / Humidity | 20 deg.C / 25 %RH                     |
| Engineer               | Kazutaka Takeyama                     |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO) ,5190 MHz |

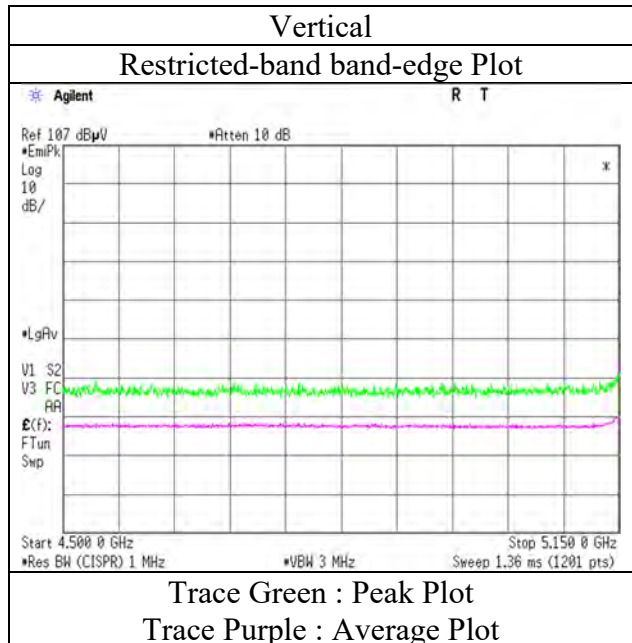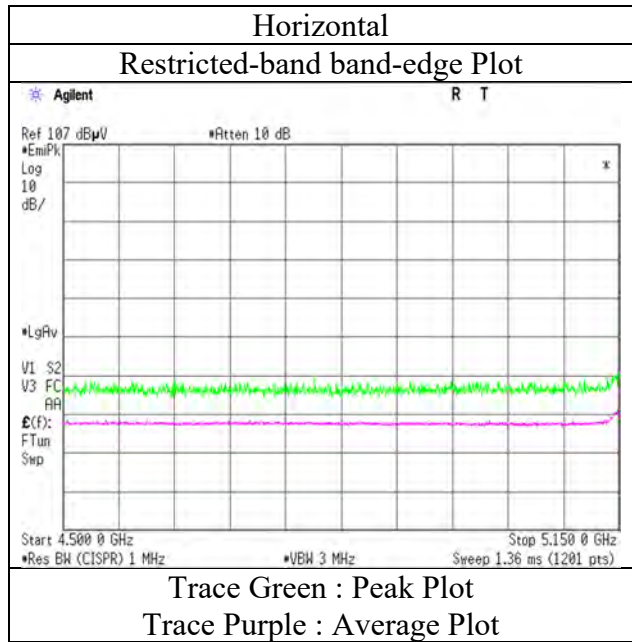

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 11, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5230 MHz  
 Tx, IEEE802.11n HT40 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 15690.000       | PK       | 45.96          | 38.39           | 13.12     | 39.10     | -9.54                | 48.83           | 73.90          | 25.0        | 150         | 0            | VBW:5.1 kHz |
| Hori.    | 15690.000       | AV       | 36.69          | 38.39           | 13.12     | 39.10     | -9.54                | 39.56           | 53.90          | 14.3        | 150         | 0            |             |
| Vert.    | 15690.000       | PK       | 45.83          | 38.39           | 13.12     | 39.10     | -9.54                | 48.70           | 73.90          | 25.2        | 150         | 0            | VBW:5.1 kHz |
| Vert.    | 15690.000       | AV       | 37.24          | 38.39           | 13.12     | 39.10     | -9.54                | 40.11           | 53.90          | 13.7        | 150         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 10460.000       | PK       | 44.90          | 39.74           | 10.49     | 39.73     | 2.26                 | 57.66           | -37.56              | -27.00      | 10.5        | 100         | 0            |        |
| Vert.    | 10460.000       | PK       | 44.90          | 39.74           | 10.49     | 39.73     | 2.26                 | 57.66           | -37.56              | -27.00      | 10.5        | 100         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 / 30) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 11, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5310 MHz  
 Tx, IEEE802.11n HT40 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5350.000        | PK       | 46.40          | 31.73           | 17.20     | 33.96     | 2.26                 | 63.63           | 73.90          | 10.2        | 356         | 33           |             |
| Hori.    | 10620.000       | PK       | 44.30          | 39.57           | 10.53     | 39.70     | 2.26                 | 56.96           | 73.90          | 16.9        | 100         | 0            |             |
| Hori.    | 15930.000       | PK       | 45.57          | 37.78           | 12.98     | 39.62     | -9.54                | 47.17           | 73.90          | 26.7        | 150         | 0            |             |
| Hori.    | 5350.000        | AV       | 33.70          | 31.73           | 17.20     | 33.96     | 2.26                 | 50.93           | 53.90          | 2.9         | 356         | 33           | VBW:5.1 kHz |
| Hori.    | 10620.000       | AV       | 35.40          | 39.57           | 10.53     | 39.70     | 2.26                 | 48.06           | 53.90          | 5.8         | 100         | 0            | VBW:5.1 kHz |
| Hori.    | 15930.000       | AV       | 36.04          | 37.78           | 12.98     | 39.62     | -9.54                | 37.64           | 53.90          | 16.2        | 150         | 0            | VBW:5.1 kHz |
| Vert.    | 5350.000        | PK       | 46.20          | 31.73           | 17.20     | 33.96     | 2.26                 | 63.43           | 73.90          | 10.4        | 100         | 277          |             |
| Vert.    | 10620.000       | PK       | 43.90          | 39.57           | 10.53     | 39.70     | 2.26                 | 56.56           | 73.90          | 17.3        | 100         | 0            |             |
| Vert.    | 15930.000       | PK       | 45.72          | 37.78           | 12.98     | 39.62     | -9.54                | 47.32           | 73.90          | 26.5        | 150         | 0            |             |
| Vert.    | 5350.000        | AV       | 32.90          | 31.73           | 17.20     | 33.96     | 2.26                 | 50.13           | 53.90          | 3.7         | 100         | 277          | VBW:5.1 kHz |
| Vert.    | 10620.000       | AV       | 35.20          | 39.57           | 10.53     | 39.70     | 2.26                 | 47.86           | 53.90          | 6.0         | 100         | 0            | VBW:5.1 kHz |
| Vert.    | 15930.000       | AV       | 36.08          | 37.78           | 12.98     | 39.62     | -9.54                | 37.68           | 53.90          | 16.2        | 150         | 0            | VBW:5.1 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 11, 2019                      |
| Temperature / Humidity | 20 deg.C / 25 %RH                     |
| Engineer               | Kazutaka Takeyama                     |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO) ,5310 MHz |

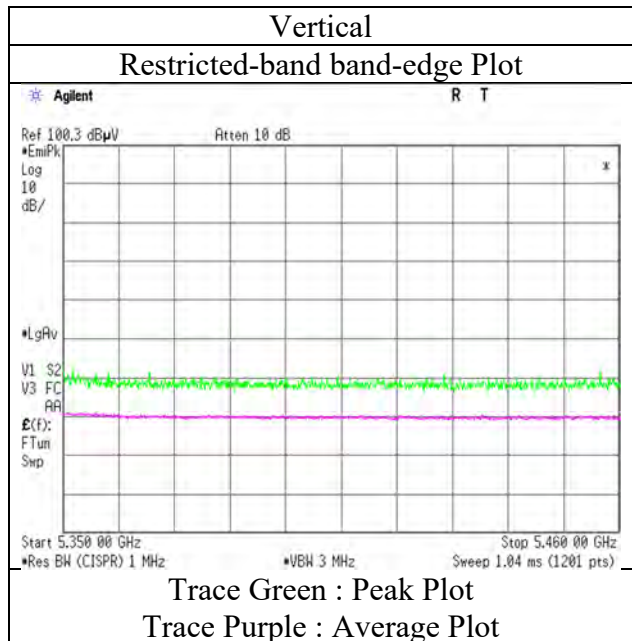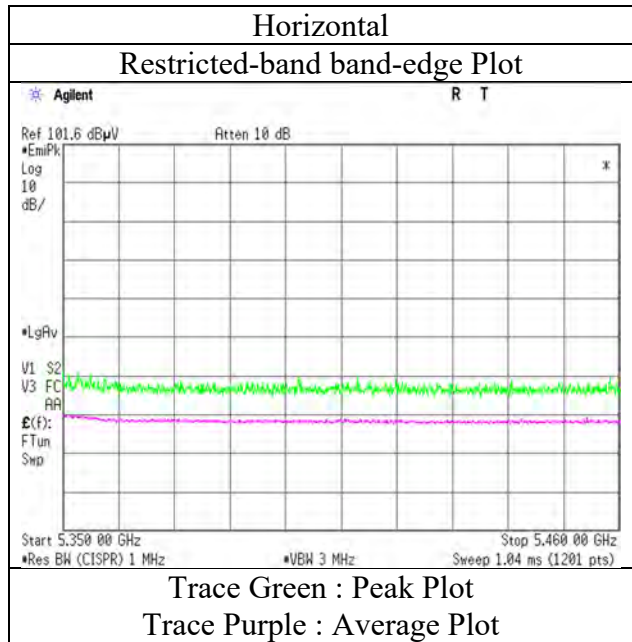

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5190 MHz  
 Tx, IEEE802.11ac VHT40 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5150.000        | PK       | 41.35          | 32.18           | 17.09     | 34.00     | 2.26                 | 58.88           | 73.90          | 15.0        | 291         | 301          | VBW:10 kHz |
| Hori.    | 5150.000        | AV       | 32.65          | 32.18           | 17.09     | 34.00     | 2.26                 | 50.18           | 53.90          | 3.7         | 291         | 301          |            |
| Vert.    | 5150.000        | PK       | 42.27          | 32.18           | 17.09     | 34.00     | 2.26                 | 59.80           | 73.90          | 14.1        | 342         | 278          | VBW:10 kHz |
| Vert.    | 5150.000        | AV       | 32.86          | 32.18           | 17.09     | 34.00     | 2.26                 | 50.39           | 53.90          | 3.5         | 342         | 278          |            |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT40 (MIMO) ,5190 MHz |

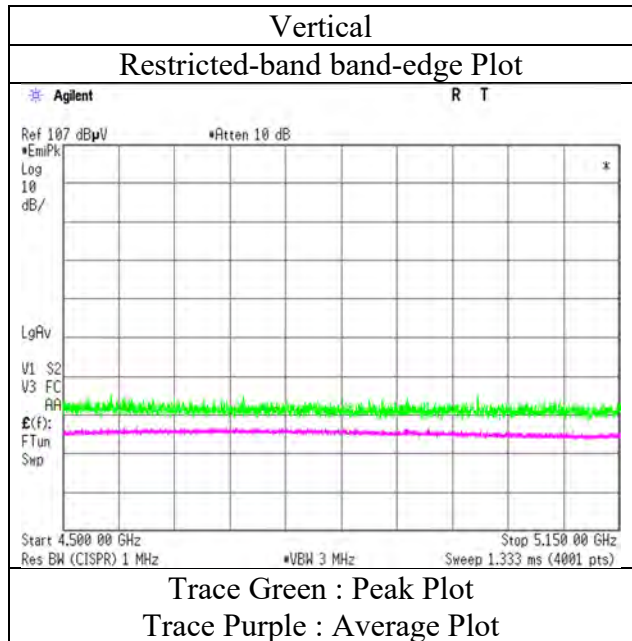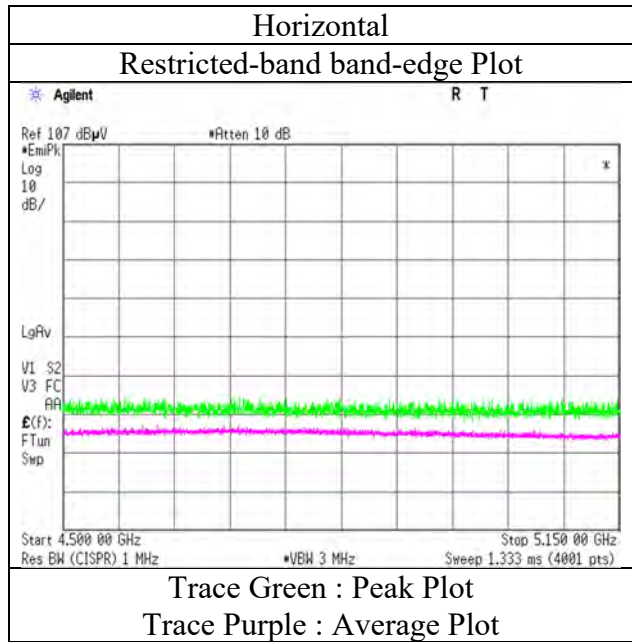

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.



## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5310 MHz  
 Tx, IEEE802.11ac VHT40 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5350.000        | PK       | 41.79          | 31.73           | 17.20     | 33.96     | 2.26                 | 59.02           | 73.90          | 14.8        | 172         | 132          | VBW:13 kHz |
| Hori.    | 5350.000        | AV       | 33.46          | 31.73           | 17.20     | 33.96     | 2.26                 | 50.69           | 53.90          | 3.2         | 172         | 132          |            |
| Vert.    | 5350.000        | PK       | 42.05          | 31.73           | 17.20     | 33.96     | 2.26                 | 59.28           | 73.90          | 14.6        | 100         | 88           | VBW:13 kHz |
| Vert.    | 5350.000        | AV       | 32.74          | 31.73           | 17.20     | 33.96     | 2.26                 | 49.97           | 53.90          | 3.9         | 100         | 88           |            |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT40 (MIMO) ,5310 MHz |

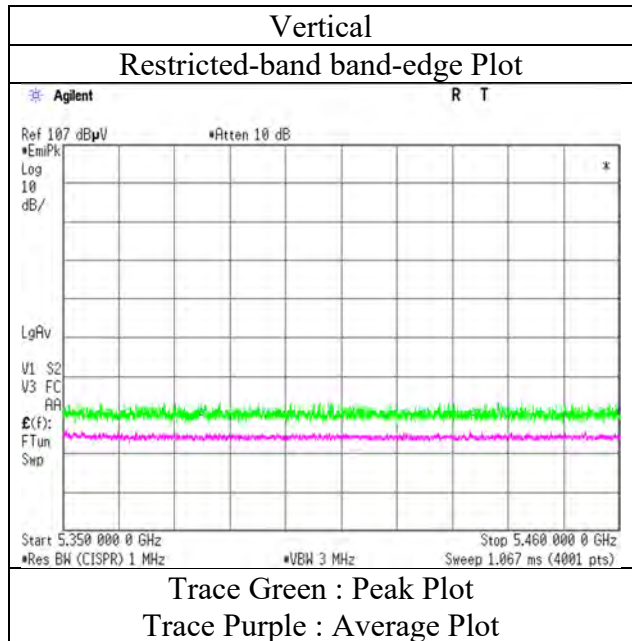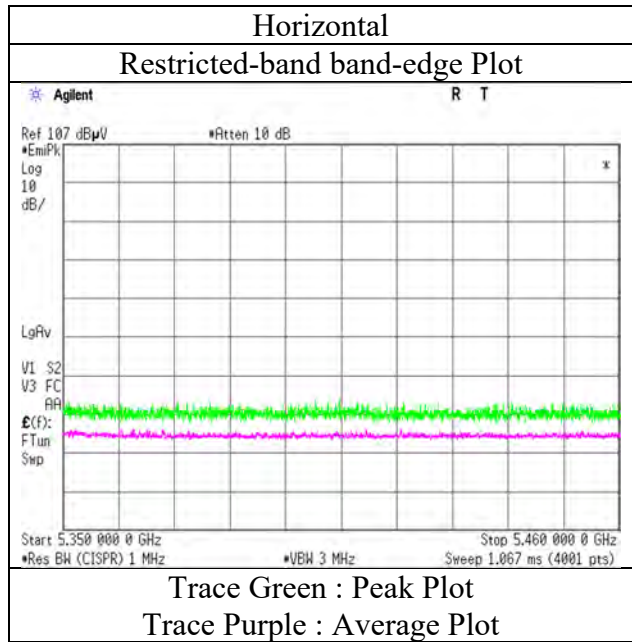

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date April 6, 2019  
 Temperature / Humidity 22 deg. C / 56 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 40 GHz)  
 Mode Tx, 5210 MHz  
 Tx, IEEE802.11ac VHT80 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5150.000        | PK       | 52.54          | 32.18           | 16.32     | 43.04     | 2.26                 | 60.26           | 73.90          | 13.6        | 100         | 31           |            |
| Hori.    | 15630.000       | PK       | 46.52          | 38.45           | 11.69     | 40.69     | -9.54                | 46.43           | 73.90          | 27.4        | 150         | 0            |            |
| Hori.    | 5150.000        | AV       | 43.03          | 32.18           | 16.32     | 43.04     | 2.26                 | 50.75           | 53.90          | 3.1         | 100         | 31           | VBW:12 kHz |
| Hori.    | 15630.000       | AV       | 38.02          | 38.45           | 11.69     | 40.69     | -9.54                | 37.93           | 53.90          | 15.9        | 150         | 0            | VBW:12 kHz |
| Vert.    | 5150.000        | PK       | 51.69          | 32.18           | 16.32     | 43.04     | 2.26                 | 59.41           | 73.90          | 14.4        | 383         | 6            |            |
| Vert.    | 15630.000       | PK       | 47.40          | 38.45           | 11.69     | 40.69     | -9.54                | 47.31           | 73.90          | 26.5        | 150         | 0            |            |
| Vert.    | 5150.000        | AV       | 43.18          | 32.18           | 16.32     | 43.04     | 2.26                 | 50.90           | 53.90          | 3.0         | 383         | 6            | VBW:12 kHz |
| Vert.    | 15630.000       | AV       | 37.91          | 38.45           | 11.69     | 40.69     | -9.54                | 37.82           | 53.90          | 16.0        | 150         | 0            | VBW:12 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 10420.000       | PK       | 49.05          | 39.66           | 9.12      | 42.68     | 2.26                 | 57.41           | -37.81              | -27.00      | 10.8        | 150         | 0            |        |
| Vert.    | 10420.000       | PK       | 48.82          | 39.66           | 9.12      | 42.68     | 2.26                 | 57.18           | -38.04              | -27.00      | 11.0        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | April 6, 2019                   |
| Temperature / Humidity | 22 deg.C / 56 %RH               |
| Engineer               | Makoto Hosaka                   |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (SISO) ,5210 MHz |

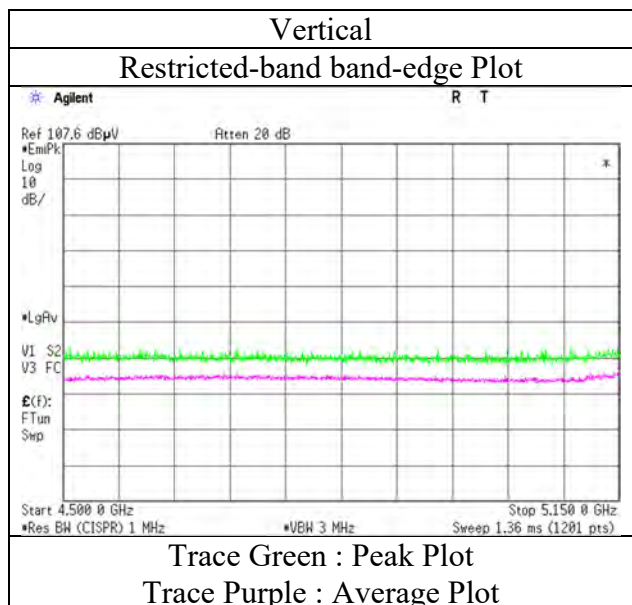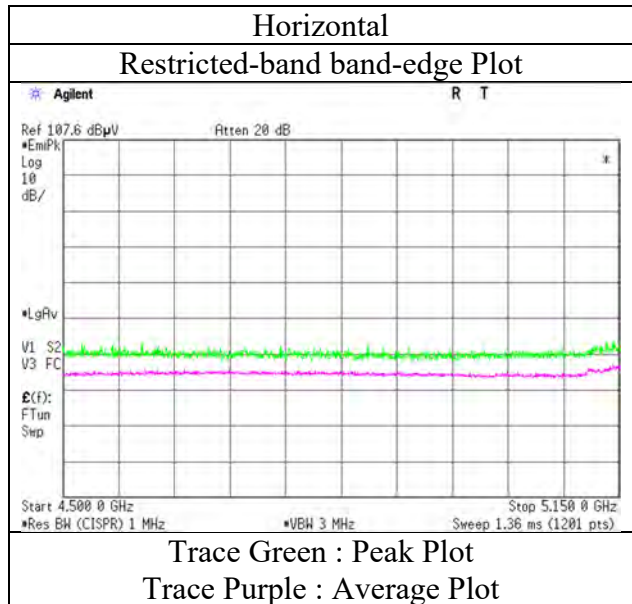

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date April 6, 2019  
 Temperature / Humidity 22 deg. C / 56 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 40 GHz)  
 Mode Tx, 5290 MHz  
 Tx, IEEE802.11ac VHT80 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5350.000        | PK       | 52.26          | 31.73           | 16.40     | 43.21     | 2.26                 | 59.44           | 73.90          | 14.4        | 105         | 344          |            |
| Hori.    | 15870.000       | PK       | 47.73          | 37.85           | 11.70     | 40.44     | -9.54                | 47.30           | 73.90          | 26.6        | 150         | 0            |            |
| Hori.    | 5350.000        | AV       | 41.43          | 31.73           | 16.40     | 43.21     | 2.26                 | 48.61           | 53.90          | 5.2         | 105         | 344          | VBW:12 kHz |
| Hori.    | 15870.000       | AV       | 38.32          | 37.85           | 11.70     | 40.44     | -9.54                | 37.89           | 53.90          | 16.0        | 150         | 0            | VBW:12 kHz |
| Vert.    | 5350.000        | PK       | 50.55          | 31.73           | 16.40     | 43.21     | 2.26                 | 57.73           | 73.90          | 16.1        | 310         | 8            |            |
| Vert.    | 15870.000       | PK       | 47.80          | 37.85           | 11.70     | 40.44     | -9.54                | 47.37           | 73.90          | 26.5        | 150         | 0            |            |
| Vert.    | 5350.000        | AV       | 41.10          | 31.73           | 16.40     | 43.21     | 2.26                 | 48.28           | 53.90          | 5.6         | 310         | 8            | VBW:12 kHz |
| Vert.    | 15870.000       | AV       | 38.17          | 37.85           | 11.70     | 40.44     | -9.54                | 37.74           | 53.90          | 16.1        | 150         | 0            | VBW:12 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 10580.000       | PK       | 47.89          | 39.62           | 9.17      | 42.67     | 2.26                 | 56.27           | -38.95              | -27.00      | 11.9        | 150         | 0            |        |
| Vert.    | 10580.000       | PK       | 47.85          | 39.62           | 9.17      | 42.67     | 2.26                 | 56.23           | -38.99              | -27.00      | 11.9        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | April 6, 2019                   |
| Temperature / Humidity | 22 deg.C / 56 %RH               |
| Engineer               | Makoto Hosaka                   |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (SISO) ,5290 MHz |

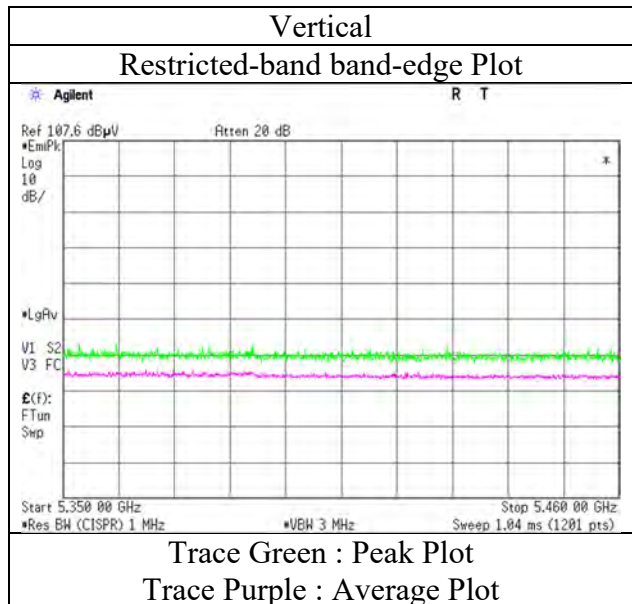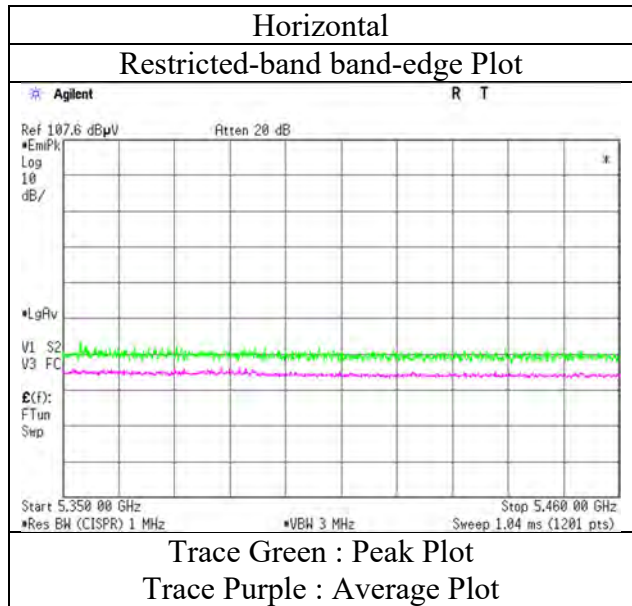

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date April 6, 2019  
 Temperature / Humidity 22 deg. C / 56 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5210 MHz  
 Tx, IEEE802.11ac VHT80 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5150.000        | PK       | 48.70          | 31.73           | 16.40     | 43.21     | 2.26                 | 55.88           | 73.90          | 18.0        | 177         | 130          | VBW:15 kHz |
| Hori.    | 5150.000        | AV       | 40.67          | 31.73           | 16.40     | 43.21     | 2.26                 | 47.85           | 53.90          | <b>6.0</b>  | 177         | 130          |            |
| Vert.    | 5150.000        | PK       | 49.53          | 31.73           | 16.40     | 43.21     | 2.26                 | 56.71           | 73.90          | 17.1        | 168         | 217          | VBW:15 kHz |
| Vert.    | 5150.000        | AV       | 40.42          | 31.73           | 16.40     | 43.21     | 2.26                 | 47.60           | 53.90          | 6.3         | 168         | 217          |            |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | April 6, 2019                   |
| Temperature / Humidity | 22 deg.C / 56 %RH               |
| Engineer               | Makoto Hosaka                   |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (MIMO) ,5210 MHz |

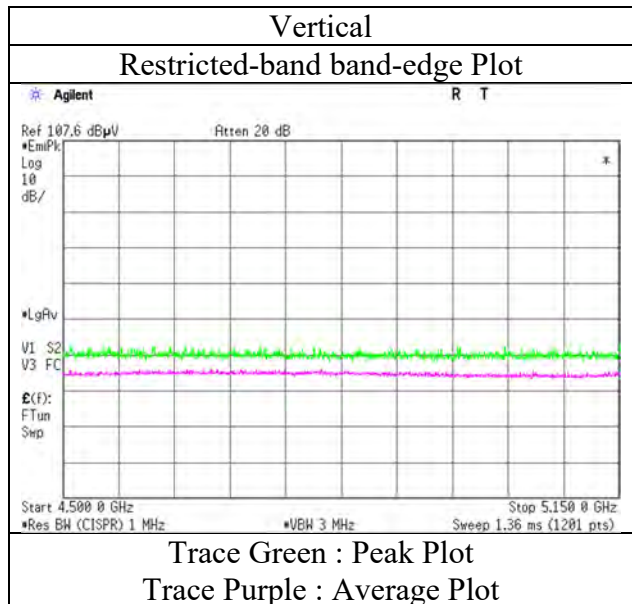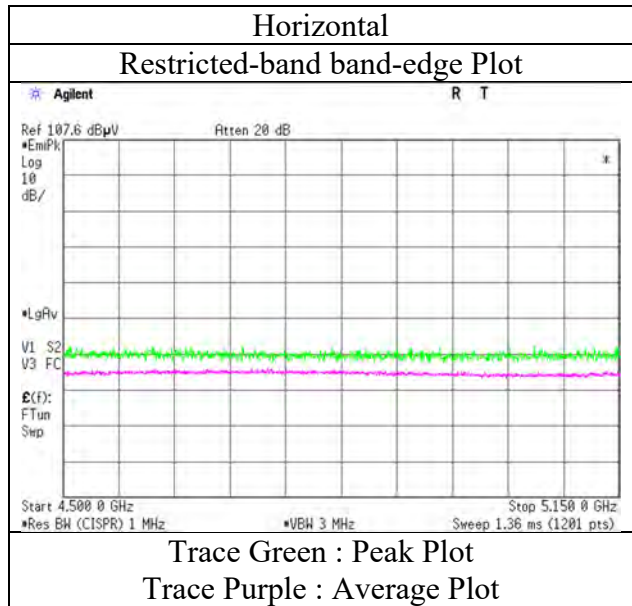

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.



## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date April 6, 2019  
 Temperature / Humidity 22 deg. C / 56 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5290 MHz  
 Tx, IEEE802.11ac VHT80 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5350.000        | PK       | 41.13          | 31.73           | 17.20     | 33.96     | 2.26                 | 58.36           | 73.90          | 15.5        | 145         | 136          | VBW:15 kHz |
| Hori.    | 5350.000        | AV       | 32.75          | 31.73           | 17.20     | 33.96     | 2.26                 | 49.98           | 53.90          | 3.9         | 145         | 136          |            |
| Vert.    | 5350.000        | PK       | 41.47          | 31.73           | 17.20     | 33.96     | 2.26                 | 58.70           | 73.90          | 15.2        | 100         | 85           | VBW:15 kHz |
| Vert.    | 5350.000        | AV       | 32.83          | 31.73           | 17.20     | 33.96     | 2.26                 | 50.06           | 53.90          | 3.8         | 100         | 85           |            |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | April 6, 2019                   |
| Temperature / Humidity | 22 deg.C / 56 %RH               |
| Engineer               | Makoto Hosaka                   |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (MIMO) ,5290 MHz |

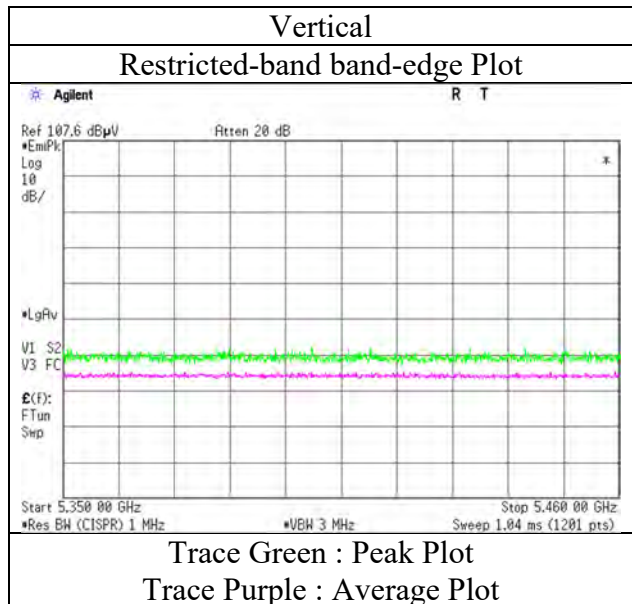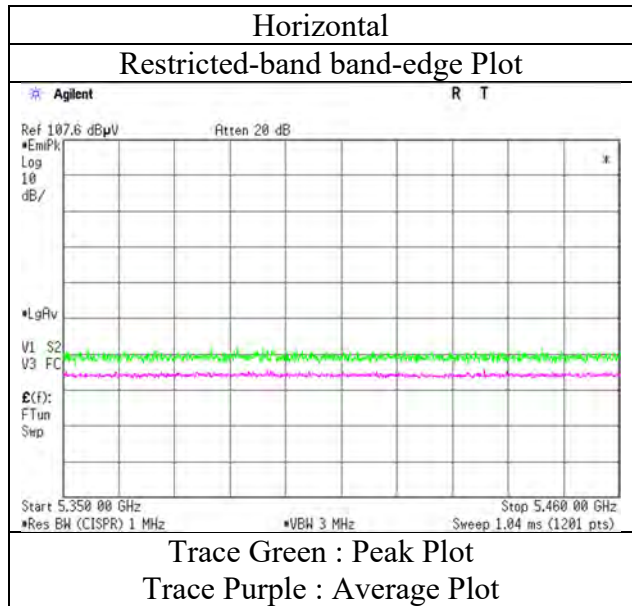

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 10, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5500 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5460.000        | PK       | 48.30          | 32.08           | 16.30     | 39.73     | 2.26                 | 59.21           | 73.90          | 14.7        | 353         | 329          |             |
| Hori.    | 11000.000       | PK       | 45.80          | 39.94           | 10.49     | 39.49     | 2.26                 | 59.00           | 73.90          | 14.9        | 100         | 0            |             |
| Hori.    | 5460.000        | AV       | 35.60          | 32.08           | 16.30     | 39.73     | 2.26                 | 46.51           | 53.90          | 7.4         | 353         | 329          | VBW:2.7 kHz |
| Hori.    | 11000.000       | AV       | 35.90          | 39.94           | 10.49     | 39.49     | 2.26                 | 49.10           | 53.90          | 4.8         | 100         | 0            | VBW:2.7 kHz |
| Vert.    | 5460.000        | PK       | 45.70          | 32.08           | 16.30     | 39.73     | 2.26                 | 56.61           | 73.90          | 17.3        | 100         | 277          |             |
| Vert.    | 11000.000       | PK       | 45.70          | 39.94           | 10.49     | 39.49     | 2.26                 | 58.90           | 73.90          | 15.0        | 100         | 0            |             |
| Vert.    | 5460.000        | AV       | 35.10          | 32.08           | 16.30     | 39.73     | 2.26                 | 46.01           | 53.90          | 7.9         | 100         | 277          | VBW:2.7 kHz |
| Vert.    | 11000.000       | AV       | 35.70          | 39.94           | 10.49     | 39.49     | 2.26                 | 48.90           | 53.90          | 5.0         | 100         | 0            | VBW:2.7 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5470.000        | PK       | 52.20          | 32.06           | 16.31     | 39.74     | 2.26                 | 63.09           | -32.13              | -27.00      | 5.1         | 353         | 329          |        |
| Hori.    | 16500.000       | PK       | 45.00          | 38.67           | 13.19     | 39.82     | -9.54                | 47.50           | -47.72              | -27.00      | 20.7        | 150         | 0            |        |
| Vert.    | 5470.000        | PK       | 50.20          | 32.06           | 16.31     | 39.74     | 2.26                 | 61.09           | -34.13              | -27.00      | 7.1         | 100         | 277          |        |
| Vert.    | 16500.000       | PK       | 45.40          | 38.67           | 13.19     | 39.82     | -9.54                | 47.90           | -47.32              | -27.00      | 20.3        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG}(\{(10^{\wedge}(\text{Electric Field Strength [dBuV/m]} / 20) * 10^{\wedge}(-6) * \text{Distance}:3[\text{m}])^{\wedge}2\} / 30) * 10^{\wedge}3)$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab.                        |
| Semi Anechoic Chamber  | No.3                                   |
| Date                   | January 10, 2019                       |
| Temperature / Humidity | 20 deg.C / 25 %RH                      |
| Engineer               | Kazutaka Takeyama<br>(1 GHz – 6.4 GHz) |
| Mode                   | Tx, OFDM VHT20 (SISO) ,5500 MHz        |

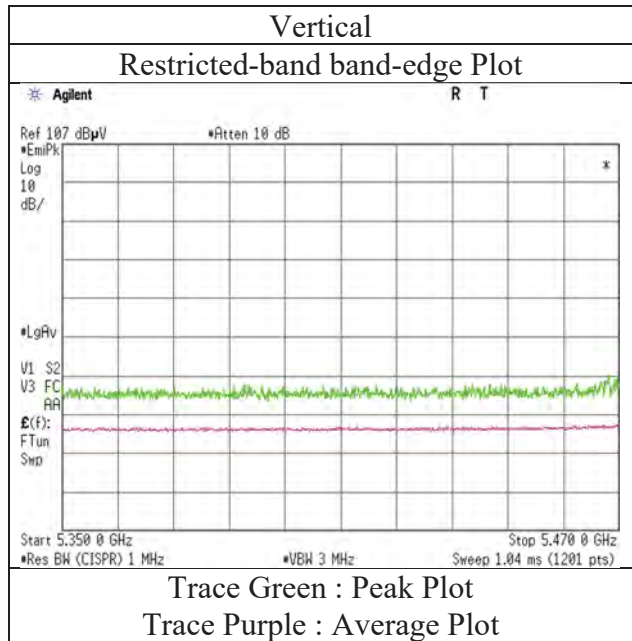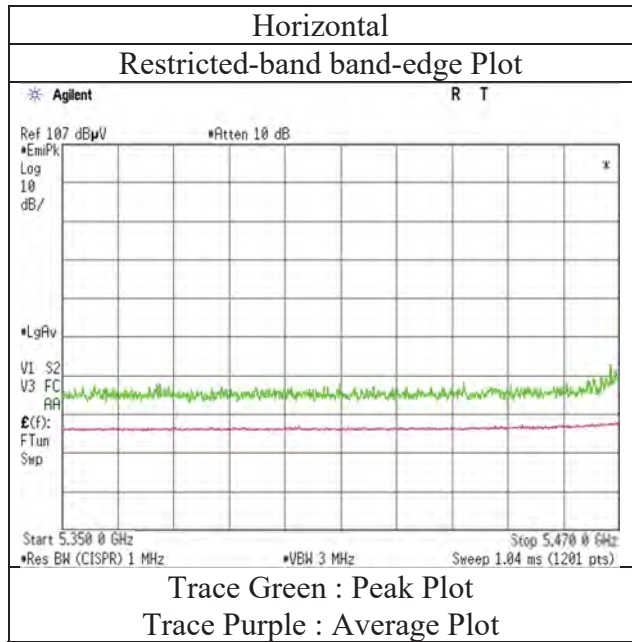

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 10, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5580 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11160.000       | PK       | 44.70          | 39.57           | 10.79     | 39.42     | 2.26                 | 57.90           | 73.90          | 16.0        | 100         | 0            | VBW:2.7 kHz |
| Hori.    | 11160.000       | AV       | 35.10          | 39.57           | 10.79     | 39.42     | 2.26                 | 48.30           | 53.90          | 5.6         | 100         | 0            |             |
| Vert.    | 11160.000       | PK       | 45.10          | 39.57           | 10.79     | 39.42     | 2.26                 | 58.30           | 73.90          | 15.6        | 100         | 0            | VBW:2.7 kHz |
| Vert.    | 11160.000       | AV       | 35.20          | 39.57           | 10.79     | 39.42     | 2.26                 | 48.40           | 53.90          | 5.5         | 100         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 16740.000       | PK       | 45.41          | 39.30           | 13.34     | 39.49     | -9.54                | 49.02           | -46.20              | -27.00      | 19.2        | 150         | 0            |        |
| Vert.    | 16740.000       | PK       | 45.92          | 39.30           | 13.34     | 39.49     | -9.54                | 49.53           | -45.69              | -27.00      | 18.6        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 / 30 ) \* 10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 10, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5700 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11400.000       | PK       | 44.40          | 39.78           | 11.25     | 39.31     | 2.26                 | 58.38           | 73.90          | 15.5        | 100         | 0            |             |
| Hori.    | 11400.000       | AV       | 35.00          | 39.78           | 11.25     | 39.31     | 2.26                 | 48.98           | 53.90          | 4.9         | 100         | 0            | VBW:2.7 kHz |
| Vert.    | 11400.000       | PK       | 44.30          | 39.78           | 11.25     | 39.31     | 2.26                 | 58.28           | 73.90          | 15.6        | 100         | 0            |             |
| Vert.    | 11400.000       | AV       | 35.00          | 39.78           | 11.25     | 39.31     | 2.26                 | 48.98           | 53.90          | 4.9         | 100         | 0            | VBW:2.7 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5725.000        | PK       | 51.80          | 32.35           | 16.38     | 39.88     | 2.26                 | 62.91           | -32.31              | -27.00      | 5.3         | 367         | 329          |        |
| Hori.    | 17100.000       | PK       | 45.97          | 39.83           | 13.50     | 38.93     | -9.54                | 50.83           | -44.39              | -27.00      | 17.3        | 150         | 0            |        |
| Vert.    | 5725.000        | PK       | 51.00          | 32.35           | 16.38     | 39.88     | 2.26                 | 62.11           | -33.11              | -27.00      | 6.1         | 100         | 268          |        |
| Vert.    | 17100.000       | PK       | 45.03          | 39.83           | 13.50     | 38.93     | -9.54                | 49.89           | -45.33              | -27.00      | 18.3        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG}(\{(10^{\wedge}(\text{Electric Field Strength [dBuV/m]} / 20) * 10^{\wedge}(-6) * \text{Distance:3[m]})^{\wedge}2\} / 30) * 10^{\wedge}3)$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |  |
|------------------------|--|
| Test place             | Shonan EMC Lab.                        |
| Semi Anechoic Chamber  | No.3                                   |
| Date                   | January 10, 2019                       |
| Temperature / Humidity | 20 deg.C / 25 %RH                      |
| Engineer               | Kazutaka Takeyama<br>(1 GHz – 6.4 GHz) |
| Mode                   | Tx, OFDM VHT20 (SISO) ,5700 MHz        |

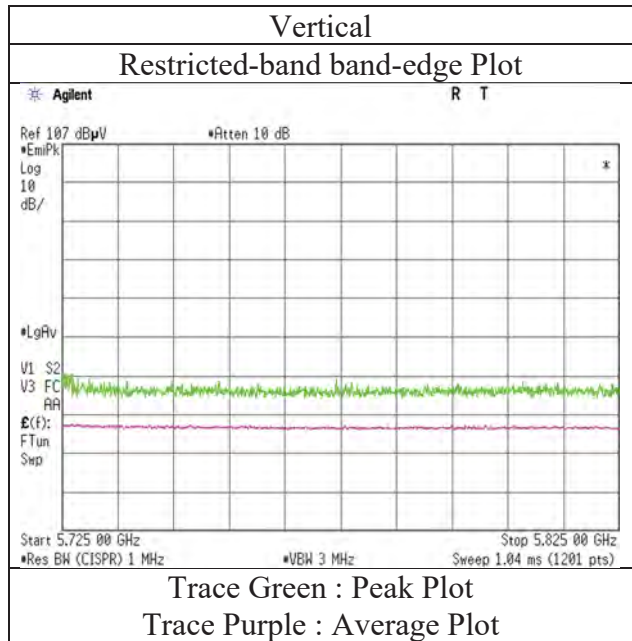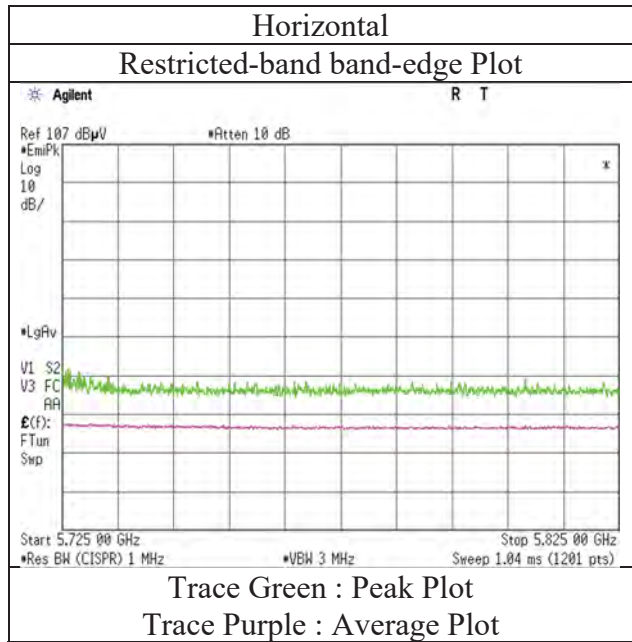

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 12, 2019  
 Temperature / Humidity 23 deg. C / 29 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5500 MHz  
 Tx, IEEE802.11n HT20 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5460.000        | PK       | 42.19          | 32.08           | 17.27     | 33.95     | 2.26                 | 59.85           | 73.90          | 14.0        | 232         | 136          | VBW:9.1 kHz |
| Hori.    | 5460.000        | AV       | 32.72          | 32.08           | 17.27     | 33.95     | 2.26                 | 50.38           | 53.90          | 3.5         | 232         | 136          |             |
| Vert.    | 5460.000        | PK       | 41.95          | 32.08           | 17.27     | 33.95     | 2.26                 | 59.61           | 73.90          | 14.2        | 147         | 27           | VBW:9.1 kHz |
| Vert.    | 5460.000        | AV       | 32.33          | 32.08           | 17.27     | 33.95     | 2.26                 | 49.99           | 53.90          | 3.9         | 147         | 27           |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5470.000        | PK       | 42.70          | 32.06           | 17.28     | 33.94     | 2.26                 | 60.36           | -34.86              | -27.00      | 7.8         | 232         | 136          |        |
| Vert.    | 5470.000        | PK       | 42.21          | 32.06           | 17.28     | 33.94     | 2.26                 | 59.87           | -35.35              | -27.00      | 8.3         | 147         | 27           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 12, 2019                      |
| Temperature / Humidity | 23 deg.C / 39 %RH                     |
| Engineer               | Makoto Hosaka                         |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO) ,5500 MHz |

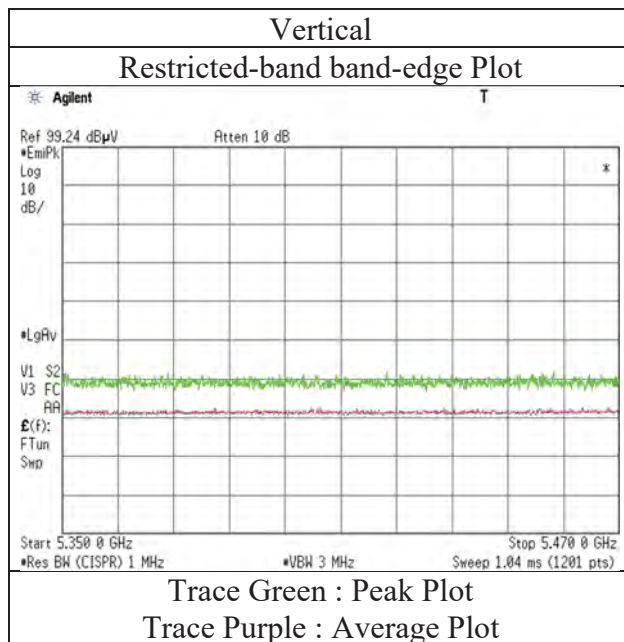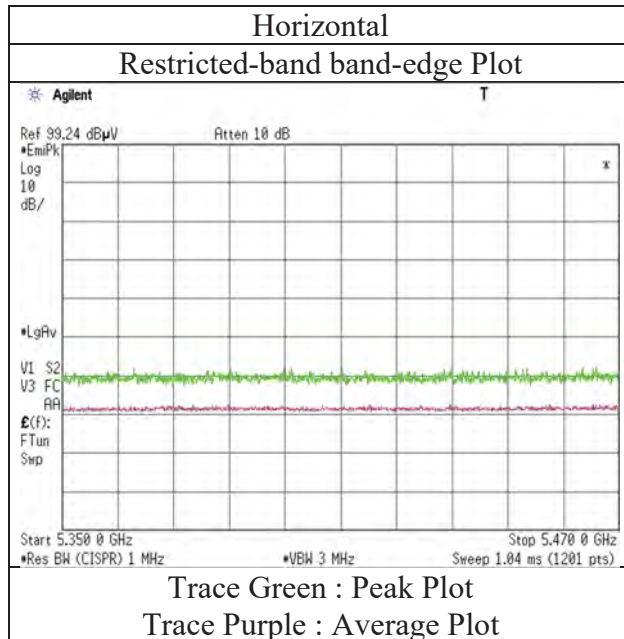

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 12, 2019  
 Temperature / Humidity 23 deg. C / 29 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5700 MHz  
 Tx, IEEE802.11n HT20 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5725.000        | PK       | 45.12          | 32.35           | 17.31     | 33.94     | 2.26                 | 63.10           | -32.12              | -27.00      | 5.1         | 285         | 246          |        |
| Vert.    | 5725.000        | PK       | 42.66          | 32.35           | 17.31     | 33.94     | 2.26                 | 60.64           | -34.58              | -27.00      | 7.5         | 152         | 24           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor  
 Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)



\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 12, 2019                      |
| Temperature / Humidity | 23 deg.C / 39 %RH                     |
| Engineer               | Makoto Hosaka                         |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO) ,5700 MHz |

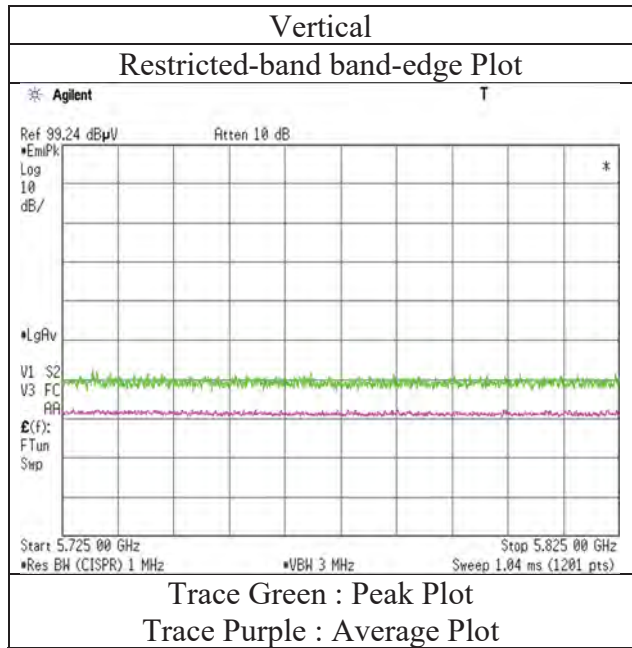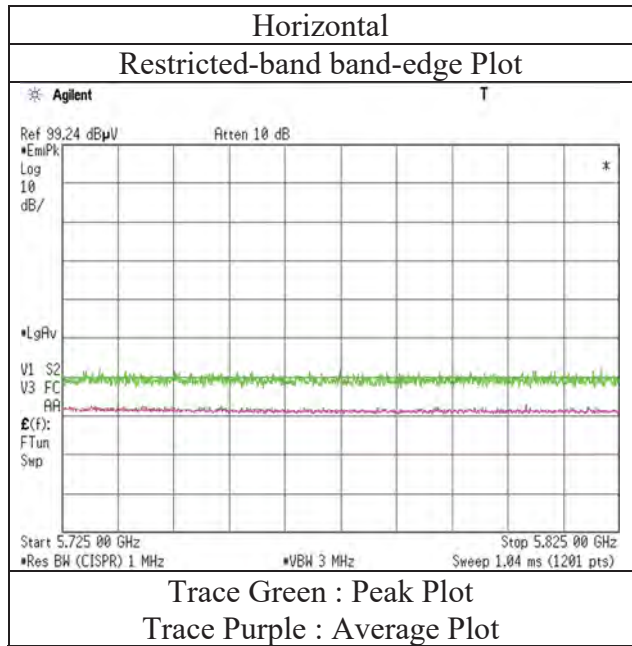

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 11, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5510 MHz  
 Tx, IEEE802.11n HT40 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 5460.000        | PK       | 44.30          | 32.08           | 17.27     | 33.95     | 2.26                 | 61.96           | 73.90          | 11.9        | 100         | 332          |             |
| Hori.    | 11020.000       | PK       | 45.60          | 39.96           | 10.52     | 39.48     | 2.26                 | 58.86           | 73.90          | 15.0        | 100         | 0            |             |
| Hori.    | 5460.000        | AV       | 32.90          | 32.08           | 17.27     | 33.95     | 2.26                 | 50.56           | 53.90          | 3.3         | 100         | 332          | VBW:5.1 kHz |
| Hori.    | 11020.000       | AV       | 35.20          | 39.96           | 10.52     | 39.48     | 2.26                 | 48.46           | 53.90          | 5.4         | 100         | 0            | VBW:5.1 kHz |
| Vert.    | 5460.000        | PK       | 42.50          | 32.08           | 17.27     | 33.95     | 2.26                 | 60.16           | 73.90          | 13.7        | 100         | 275          |             |
| Vert.    | 11020.000       | PK       | 44.40          | 39.96           | 10.52     | 39.48     | 2.26                 | 57.66           | 73.90          | 16.2        | 100         | 0            |             |
| Vert.    | 5460.000        | AV       | 32.20          | 32.08           | 17.27     | 33.95     | 2.26                 | 49.86           | 53.90          | 4.0         | 100         | 275          | VBW:5.1 kHz |
| Vert.    | 11020.000       | AV       | 34.50          | 39.96           | 10.52     | 39.48     | 2.26                 | 47.76           | 53.90          | 6.1         | 100         | 0            | VBW:5.1 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5470.000        | PK       | 48.50          | 32.06           | 17.28     | 33.94     | 2.26                 | 66.16           | -29.06              | -27.00      | 2.0         | 100         | 332          |        |
| Hori.    | 16530.000       | PK       | 45.99          | 38.60           | 13.21     | 39.78     | -9.54                | 48.48           | -46.74              | -27.00      | 19.7        | 150         | 0            |        |
| Vert.    | 5470.000        | PK       | 46.90          | 32.06           | 17.28     | 33.94     | 2.26                 | 64.56           | -30.66              | -27.00      | 3.6         | 100         | 275          |        |
| Vert.    | 16530.000       | PK       | 44.97          | 38.60           | 13.21     | 39.78     | -9.54                | 47.46           | -47.76              | -27.00      | 20.7        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 11, 2019                      |
| Temperature / Humidity | 20 deg.C / 25 %RH                     |
| Engineer               | Kazutaka Takeyama                     |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO) ,5510 MHz |

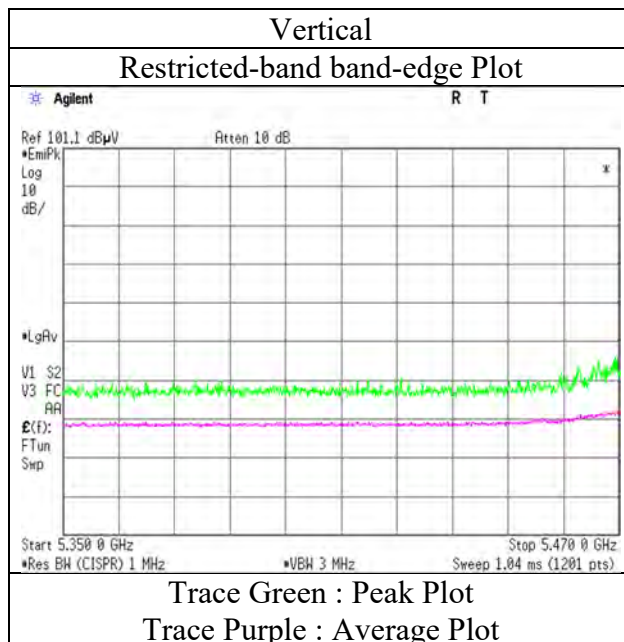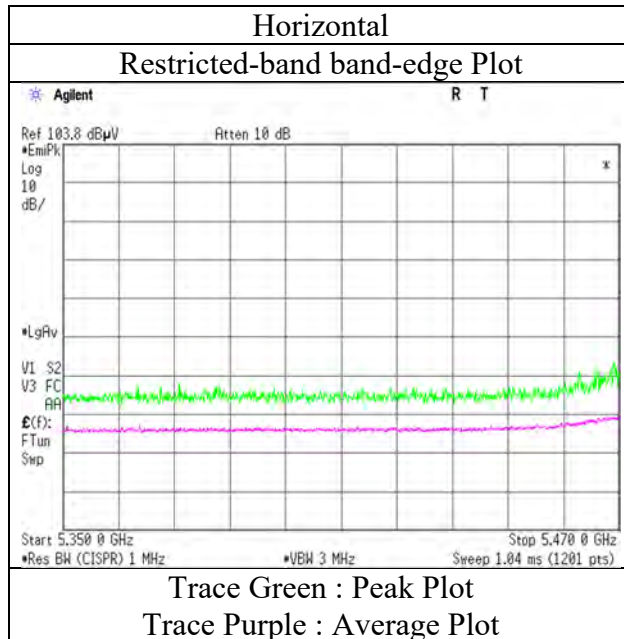

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 11, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5550 MHz  
 Tx, IEEE802.11n HT40 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11100.000       | PK       | 44.60          | 39.79           | 10.68     | 39.45     | 2.26                 | 57.88           | 73.90          | 16.0        | 100         | 0            | VBW:5.1 kHz |
| Hori.    | 11100.000       | AV       | 35.20          | 39.79           | 10.68     | 39.45     | 2.26                 | 48.48           | 53.90          | 5.4         | 100         | 0            |             |
| Vert.    | 11100.000       | PK       | 45.20          | 39.79           | 10.68     | 39.45     | 2.26                 | 58.48           | 73.90          | 15.4        | 100         | 0            | VBW:5.1 kHz |
| Vert.    | 11100.000       | AV       | 35.50          | 39.79           | 10.68     | 39.45     | 2.26                 | 48.78           | 53.90          | 5.1         | 100         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 16650.000       | PK       | 46.33          | 38.57           | 13.29     | 39.61     | -9.54                | 49.04           | -46.18              | -27.00      | 19.1        | 150         | 0            |        |
| Vert.    | 16650.000       | PK       | 45.27          | 38.57           | 13.29     | 39.61     | -9.54                | 47.98           | -47.24              | -27.00      | 20.2        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (( (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 / 30) \*10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.  
 Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 11, 2019 January 19, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 20 deg. C / 25 % RH 20 deg. C / 40 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Kazutaka Takeyama Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5670 MHz  
 Tx, IEEE802.11n HT40 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11340.000       | PK       | 44.50          | 39.56           | 11.14     | 39.34     | 2.26                 | 58.12           | 73.90          | 15.7        | 100         | 0            | VBW:5.1 kHz |
| Hori.    | 11340.000       | AV       | 35.30          | 39.56           | 11.14     | 39.34     | 2.26                 | 48.92           | 53.90          | 4.9         | 100         | 0            |             |
| Vert.    | 11340.000       | PK       | 44.40          | 39.56           | 11.14     | 39.34     | 2.26                 | 58.02           | 73.90          | 15.8        | 100         | 0            | VBW:5.1 kHz |
| Vert.    | 11340.000       | AV       | 35.10          | 39.56           | 11.14     | 39.34     | 2.26                 | 48.72           | 53.90          | 5.1         | 100         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5725.000        | PK       | 42.40          | 32.35           | 17.31     | 33.94     | 2.26                 | 60.38           | -34.84              | -27.00      | 7.8         | 100         | 338          |        |
| Hori.    | 17010.000       | PK       | 45.57          | 39.55           | 13.50     | 39.11     | -9.54                | 49.97           | -45.25              | -27.00      | 18.2        | 150         | 0            |        |
| Vert.    | 5725.000        | PK       | 42.50          | 32.35           | 17.31     | 33.94     | 2.26                 | 60.48           | -34.74              | -27.00      | 7.7         | 100         | 265          |        |
| Vert.    | 17010.000       | PK       | 44.82          | 39.55           | 13.50     | 39.11     | -9.54                | 49.22           | -46.00              | -27.00      | 19.0        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 11, 2019                      |
| Temperature / Humidity | 20 deg.C / 25 %RH                     |
| Engineer               | Kazutaka Takeyama                     |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO) ,5670 MHz |

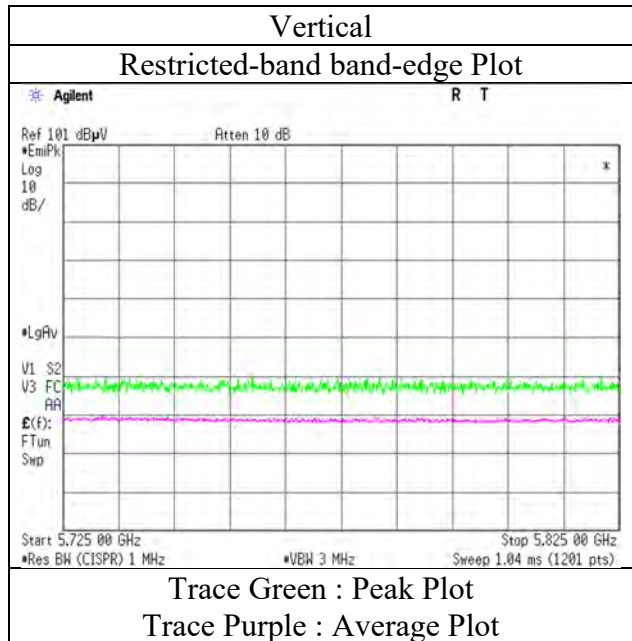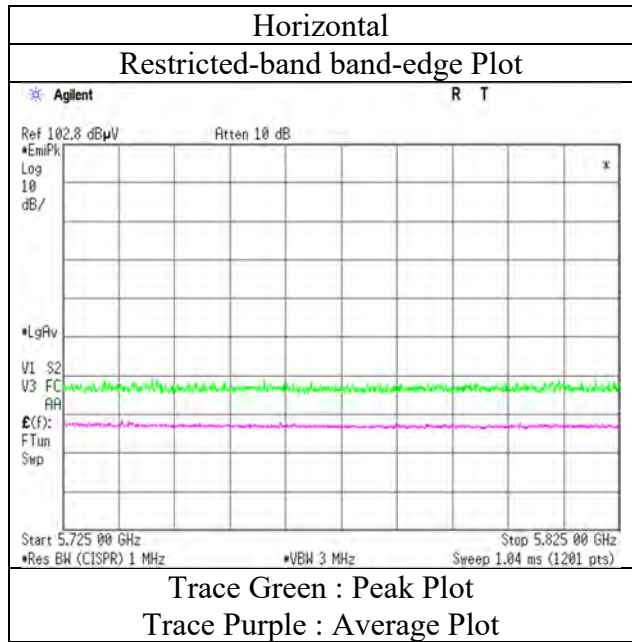

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.



## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5510 MHz  
 Tx, IEEE802.11ac VHT40 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5460.000        | PK       | 42.14          | 32.08           | 17.27     | 33.95     | 2.26                 | 59.80           | 73.90          | 14.1        | 143         | 140          | VBW:13 kHz |
| Hori.    | 5460.000        | AV       | 33.38          | 32.08           | 17.27     | 33.95     | 2.26                 | 51.04           | 53.90          | 2.8         | 143         | 140          |            |
| Vert.    | 5460.000        | PK       | 42.33          | 32.08           | 17.27     | 33.95     | 2.26                 | 59.99           | 73.90          | 13.9        | 100         | 94           | VBW:13 kHz |
| Vert.    | 5460.000        | AV       | 33.03          | 32.08           | 17.27     | 33.95     | 2.26                 | 50.69           | 53.90          | 3.2         | 100         | 94           |            |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5470.000        | PK       | 44.69          | 32.06           | 17.28     | 33.94     | 2.26                 | 62.35           | -32.87              | -27.00      | 5.8         | 143         | 140          |        |
| Vert.    | 5470.000        | PK       | 43.67          | 32.06           | 17.28     | 33.94     | 2.26                 | 61.33           | -33.89              | -27.00      | 6.8         | 100         | 94           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT40 (MIMO) ,5510 MHz |

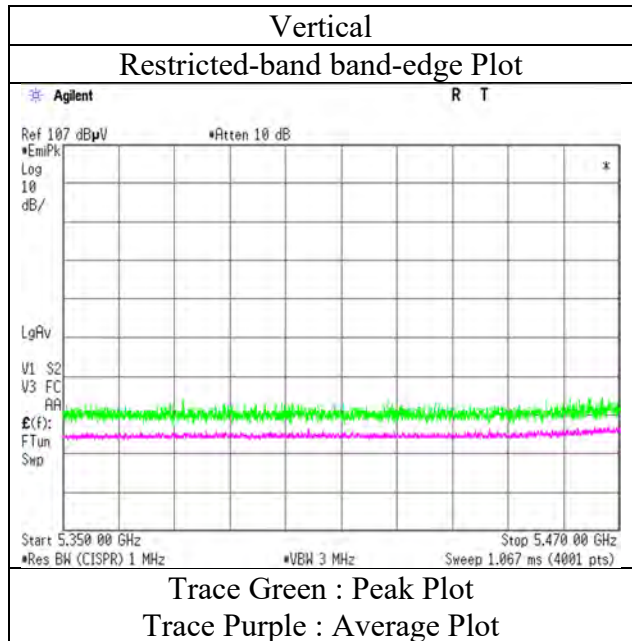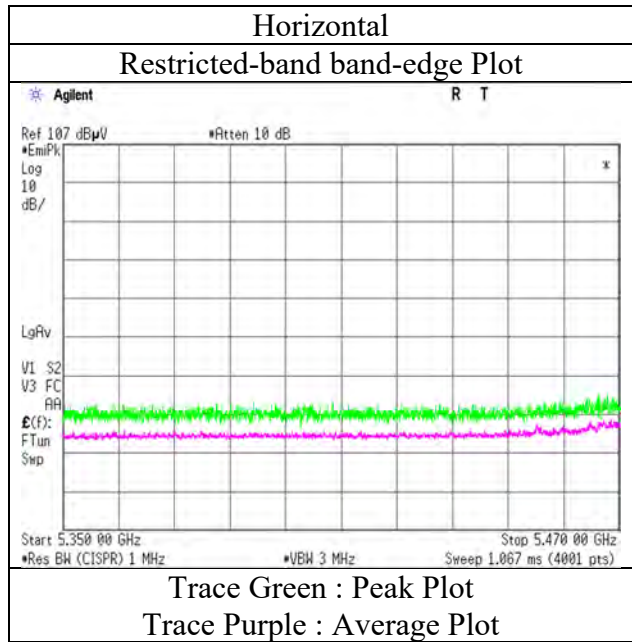

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5670 MHz  
 Tx, IEEE802.11ac VHT40 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5725.000        | PK       | 41.91          | 32.35           | 17.31     | 33.94     | 2.26                 | 59.89           | -35.33              | -27.00      | 8.3         | 171         | 141          |        |
| Vert.    | 5725.000        | PK       | 42.03          | 32.35           | 17.31     | 33.94     | 2.26                 | 60.01           | -35.21              | -27.00      | <b>8.2</b>  | 100         | 94           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor  
 Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)



\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT40 (MIMO) ,5670 MHz |

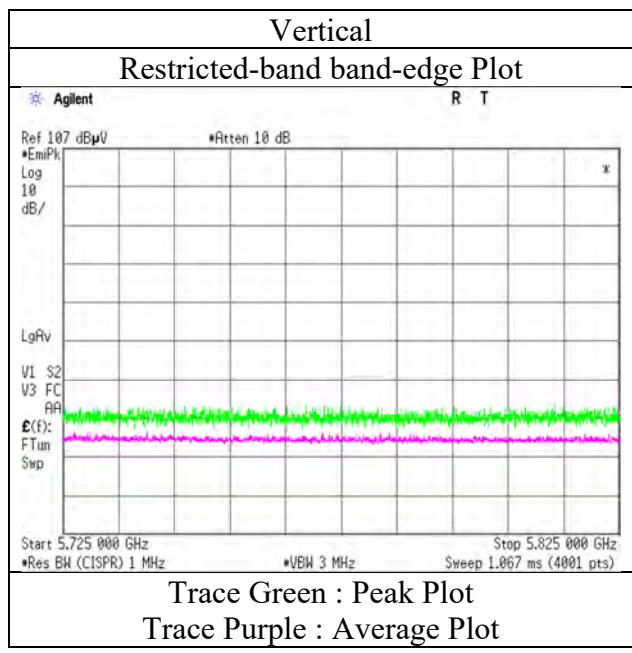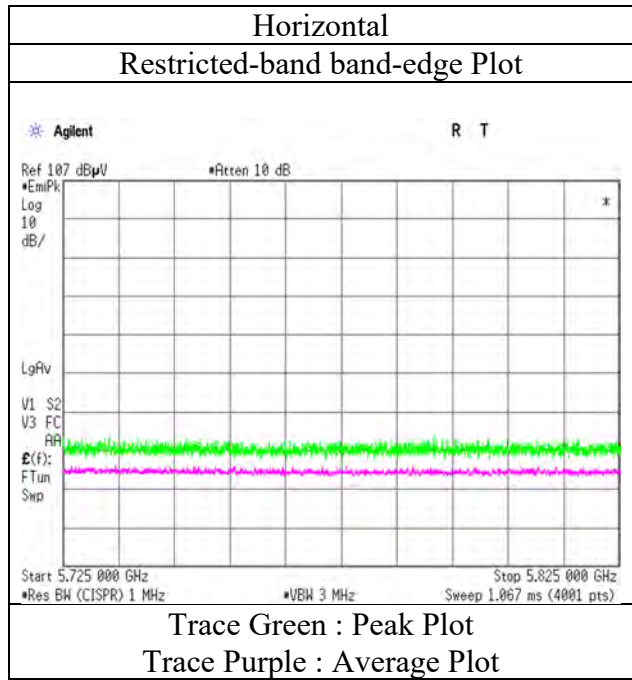

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.3 No.3 No.3  
 Date January 25, 2019 January 25, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 21 deg. C / 30 % RH 21 deg. C / 30 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Makoto Hosaka Makoto Hosaka Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5530 MHz  
 Tx, IEEE802.11ac VHT80 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5460.000        | PK       | 42.75          | 32.08           | 17.27     | 33.95     | 2.26                 | 60.41           | 73.90          | 13.4        | 133         | 336          |            |
| Hori.    | 11060.000       | PK       | 45.07          | 39.94           | 10.60     | 39.46     | 2.26                 | 58.41           | 73.90          | 15.4        | 150         | 0            |            |
| Hori.    | 5460.000        | AV       | 33.67          | 32.08           | 17.27     | 33.95     | 2.26                 | 51.33           | 53.90          | 2.5         | 133         | 336          | VBW:12 kHz |
| Hori.    | 11060.000       | AV       | 35.92          | 39.94           | 10.60     | 39.46     | 2.26                 | 49.26           | 53.90          | 4.6         | 150         | 0            | VBW:12 kHz |
| Vert.    | 5460.000        | PK       | 43.62          | 32.08           | 17.27     | 33.95     | 2.26                 | 61.28           | 73.90          | 12.6        | 341         | 22           |            |
| Vert.    | 11060.000       | PK       | 44.99          | 39.94           | 10.60     | 39.46     | 2.26                 | 58.33           | 73.90          | 15.5        | 150         | 0            |            |
| Vert.    | 5460.000        | AV       | 33.27          | 32.08           | 17.27     | 33.95     | 2.26                 | 50.93           | 53.90          | 2.9         | 341         | 22           | VBW:12 kHz |
| Vert.    | 11060.000       | AV       | 35.95          | 39.94           | 10.60     | 39.46     | 2.26                 | 49.29           | 53.90          | 4.6         | 150         | 0            | VBW:12 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5470.000        | PK       | 42.37          | 32.06           | 17.28     | 33.94     | 2.26                 | 60.03           | -35.19              | -27.00      | 8.1         | 133         | 336          |        |
| Hori.    | 5725.000        | PK       | 41.93          | 32.35           | 17.31     | 33.94     | 2.26                 | 59.91           | -35.31              | -27.00      | 8.3         | 133         | 336          |        |
| Hori.    | 16590.000       | PK       | 46.01          | 38.55           | 13.24     | 39.70     | -9.54                | 48.56           | -46.66              | -27.00      | 19.6        | 150         | 0            |        |
| Vert.    | 5470.000        | PK       | 42.18          | 32.06           | 17.28     | 33.94     | 2.26                 | 59.84           | -35.38              | -27.00      | 8.3         | 341         | 22           |        |
| Vert.    | 5725.000        | PK       | 42.07          | 32.35           | 17.31     | 33.94     | 2.26                 | 60.05           | -35.17              | -27.00      | 8.1         | 341         | 22           |        |
| Vert.    | 16590.000       | PK       | 45.63          | 38.55           | 13.24     | 39.70     | -9.54                | 48.18           | -47.04              | -27.00      | 20.0        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \* 10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 25, 2019                |
| Temperature / Humidity | 21 deg.C / 30 %RH               |
| Engineer               | Makoto Hosaka                   |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (SISO) ,5530 MHz |

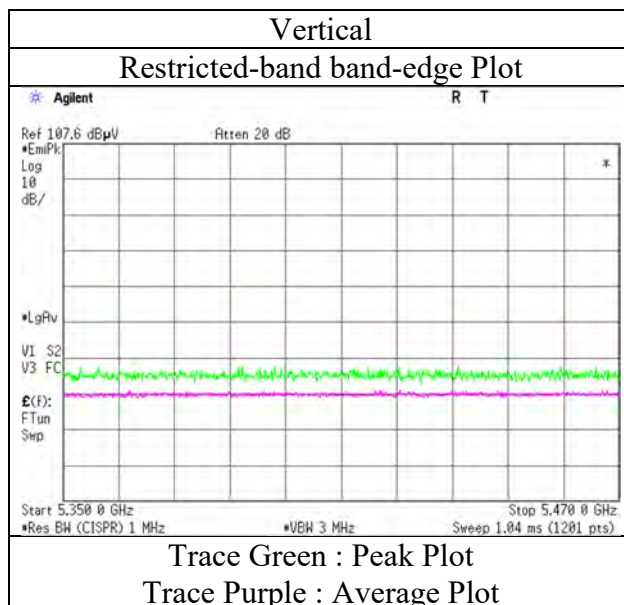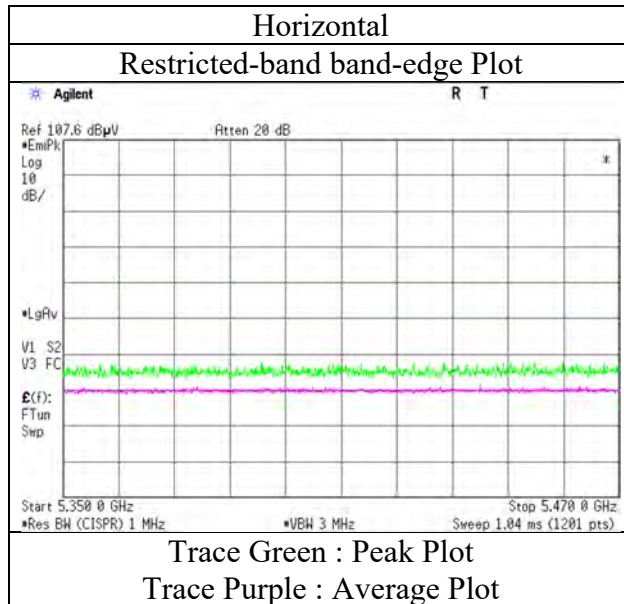

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 25, 2019  
 Temperature / Humidity 21 deg. C / 30 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5530 MHz  
 Tx, IEEE802.11ac VHT80 (MIMO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 5460.000        | PK       | 42.69          | 32.08           | 17.27     | 33.95     | 2.26                 | 60.35           | 73.90          | 13.5        | 236         | 240          | VBW:15 kHz |
| Hori.    | 5460.000        | AV       | 34.06          | 32.08           | 17.27     | 33.95     | 2.26                 | 51.72           | 53.90          | 2.1         | 236         | 240          |            |
| Vert.    | 5460.000        | PK       | 41.82          | 32.08           | 17.27     | 33.95     | 2.26                 | 59.48           | 73.90          | 14.4        | 145         | 104          | VBW:15 kHz |
| Vert.    | 5460.000        | AV       | 33.48          | 32.08           | 17.27     | 33.95     | 2.26                 | 51.14           | 53.90          | 2.7         | 145         | 104          |            |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5470.000        | PK       | 42.81          | 32.06           | 17.28     | 33.94     | 2.26                 | 60.47           | -34.75              | -27.00      | 7.7         | 236         | 240          |        |
| Hori.    | 5725.000        | PK       | 41.85          | 32.35           | 17.31     | 33.94     | 2.26                 | 59.83           | -35.39              | -27.00      | 8.3         | 236         | 240          |        |
| Vert.    | 5470.000        | PK       | 42.25          | 32.06           | 17.28     | 33.94     | 2.26                 | 59.91           | -35.31              | -27.00      | 8.3         | 145         | 104          |        |
| Vert.    | 5725.000        | PK       | 41.95          | 32.35           | 17.31     | 33.94     | 2.26                 | 59.93           | -35.29              | -27.00      | 8.2         | 145         | 104          |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 25, 2019                |
| Temperature / Humidity | 21 deg.C / 30 %RH               |
| Engineer               | Makoto Hosaka                   |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (MIMO) ,5530 MHz |

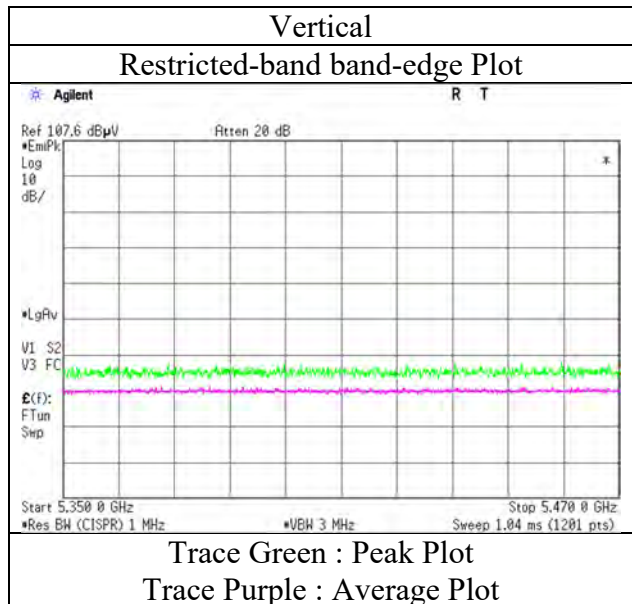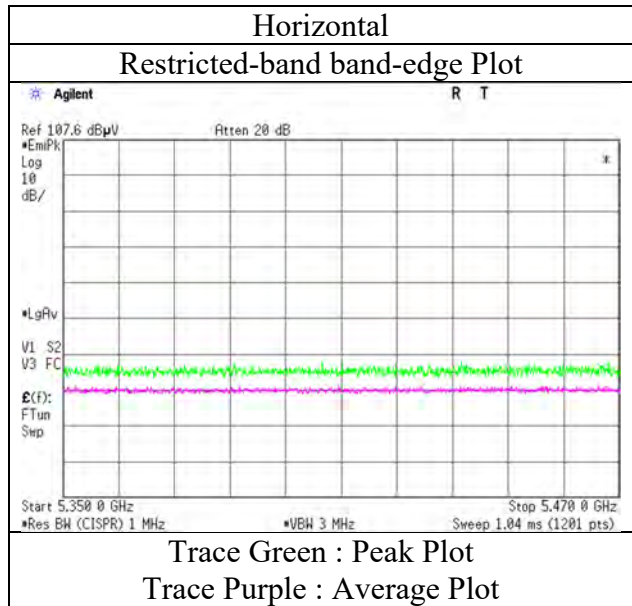

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.



## Radiated Emission

|                        |                               |                     |                     |                     |                     |
|------------------------|-------------------------------|---------------------|---------------------|---------------------|---------------------|
| Report No.             | 12656071S                     |                     |                     |                     |                     |
| Test place             | Shonan EMC Lab.               |                     |                     |                     |                     |
| Semi Anechoic Chamber  | No.3                          | No.1                | No.3                | No.3                | No.3                |
| Date                   | February 20, 2019             | February 24, 2019   | January 25, 2019    | January 17, 2019    | January 18, 2019    |
| Temperature / Humidity | 26 deg.C / 35 %RH             | 22 deg. C / 33 % RH | 21 deg. C / 30 % RH | 21 deg. C / 35 % RH | 22 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa               | Kazutaka Takeyama   | Makoto Hosaka       | Makoto Hosaka       | Kazutaka Takeyama   |
|                        | (1 GHz - 6.4 GHz)             | (6.4 GHz - 13 GHz)  | (13 GHz - 18 GHz)   | (18 GHz - 26.5 GHz) | (26.5 GHz - 40 GHz) |
| Mode                   | Tx, 5745 MHz                  |                     |                     |                     |                     |
|                        | Tx, IEEE802.11ac VHT20 (SISO) |                     |                     |                     |                     |

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11490.000       | PK       | 45.05          | 40.01           | 9.64      | 39.27     | 2.26                 | 57.69           | 73.90          | 16.2        | 150         | 0            | VBW:2.7 kHz |
| Hori.    | 11490.000       | AV       | 35.18          | 40.01           | 9.64      | 39.27     | 2.26                 | 47.82           | 53.90          | 6.0         | 150         | 0            |             |
| Vert.    | 11490.000       | PK       | 44.94          | 40.01           | 9.64      | 39.27     | 2.26                 | 57.58           | 73.90          | 16.3        | 150         | 0            | VBW:2.7 kHz |
| Vert.    | 11490.000       | AV       | 35.23          | 40.01           | 9.64      | 39.27     | 2.26                 | 47.87           | 53.90          | 6.0         | 150         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5650.000        | PK       | 47.95          | 32.18           | 17.41     | 43.33     | 2.26                 | 56.47           | -38.75              | -27.00      | 11.7        | 297         | 332          |        |
| Hori.    | 5700.000        | PK       | 48.47          | 32.23           | 17.45     | 43.33     | 2.26                 | 57.08           | -38.14              | 10.00       | 48.1        | 297         | 332          |        |
| Hori.    | 5720.000        | PK       | 54.80          | 32.33           | 17.46     | 43.33     | 2.26                 | 63.52           | -31.70              | 15.60       | 47.3        | 297         | 332          |        |
| Hori.    | 5725.000        | PK       | 57.33          | 32.35           | 17.46     | 43.33     | 2.26                 | 66.07           | -29.15              | 27.00       | 56.1        | 297         | 332          |        |
| Hori.    | 17235.000       | PK       | 46.08          | 39.91           | 13.52     | 38.66     | -9.54                | 51.31           | -43.91              | -27.00      | 16.9        | 138         | 189          |        |
| Vert.    | 5650.000        | PK       | 47.68          | 32.18           | 17.41     | 43.33     | 2.26                 | 56.20           | -39.02              | -27.00      | 12.0        | 352         | 264          |        |
| Vert.    | 5700.000        | PK       | 48.50          | 32.23           | 17.45     | 43.33     | 2.26                 | 57.11           | -38.11              | 10.00       | 48.1        | 352         | 264          |        |
| Vert.    | 5720.000        | PK       | 52.15          | 32.33           | 17.46     | 43.33     | 2.26                 | 60.87           | -34.35              | 15.60       | 49.9        | 352         | 264          |        |
| Vert.    | 5725.000        | PK       | 56.95          | 32.35           | 17.46     | 43.33     | 2.26                 | 65.69           | -29.53              | 27.00       | 56.5        | 352         | 264          |        |
| Vert.    | 17235.000       | PK       | 45.67          | 39.91           | 13.52     | 38.66     | -9.54                | 50.90           | -44.32              | -27.00      | 17.3        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | February 20, 2019               |
| Temperature / Humidity | 26 deg.C / 35 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT20 (SISO) ,5745 MHz |

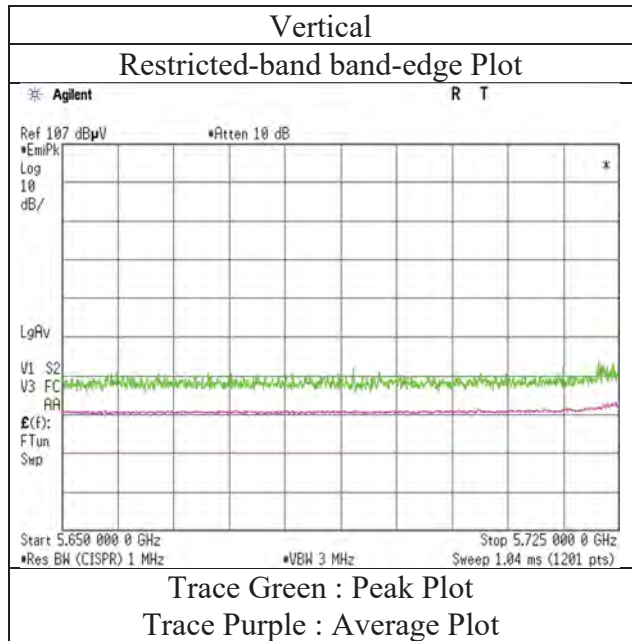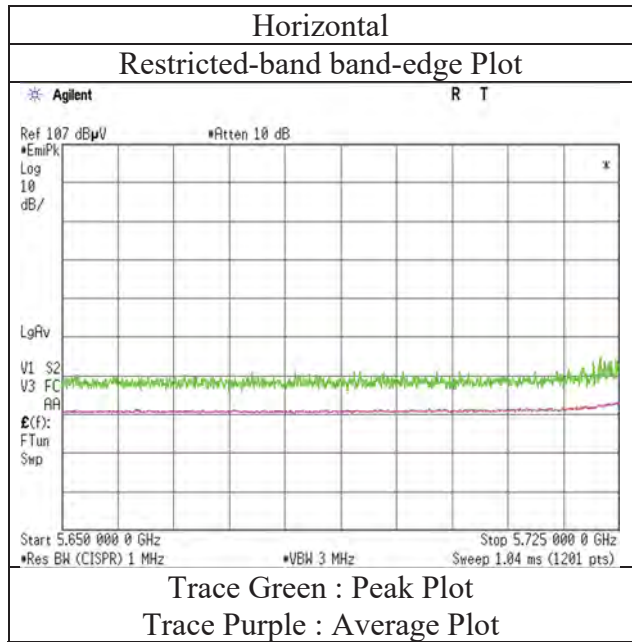

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.1 No.3 No.3 No.3  
 Date February 20, 2019 February 24, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 26 deg.C / 35 %RH 22 deg. C / 33 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Yosuke Ishikawa Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5785 MHz  
 Tx, IEEE802.11ac VHT20 (SISO)

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11570.000       | PK       | 44.62          | 39.98           | 9.67      | 39.21     | 2.26                 | 57.32           | 73.90          | 16.5        | 150         | 0            | VBW:2.7 kHz |
| Hori.    | 11570.000       | AV       | 34.52          | 39.98           | 9.67      | 39.21     | 2.26                 | 47.22           | 53.90          | 6.6         | 150         | 0            |             |
| Vert.    | 11570.000       | PK       | 44.41          | 39.98           | 9.67      | 39.21     | 2.26                 | 57.11           | 73.90          | 16.7        | 150         | 0            | VBW:2.7 kHz |
| Vert.    | 11570.000       | AV       | 34.37          | 39.98           | 9.67      | 39.21     | 2.26                 | 47.07           | 53.90          | 6.8         | 150         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 17355.000       | PK       | 46.60          | 40.56           | 13.54     | 38.42     | -9.54                | 52.74           | -42.48              | -27.00      | 15.4        | 155         | 189          |        |
| Vert.    | 17355.000       | PK       | 45.39          | 40.56           | 13.54     | 38.42     | -9.54                | 51.53           | -43.69              | -27.00      | 16.6        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.  
 Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Emission

|                        |                               |                     |                     |                     |                     |
|------------------------|-------------------------------|---------------------|---------------------|---------------------|---------------------|
| Report No.             | 12656071S                     |                     |                     |                     |                     |
| Test place             | Shonan EMC Lab.               |                     |                     |                     |                     |
| Semi Anechoic Chamber  | No.3                          | No.1                | No.3                | No.3                | No.3                |
| Date                   | February 20, 2019             | February 24, 2019   | January 25, 2019    | January 17, 2019    | January 18, 2019    |
| Temperature / Humidity | 26 deg.C / 35 %RH             | 22 deg. C / 33 % RH | 21 deg. C / 30 % RH | 21 deg. C / 35 % RH | 22 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa               | Kazutaka Takeyama   | Makoto Hosaka       | Makoto Hosaka       | Kazutaka Takeyama   |
| Mode                   | (1 GHz - 6.4 GHz)             | (6.4 GHz - 13 GHz)  | (13 GHz - 18 GHz)   | (18 GHz - 26.5 GHz) | (26.5 GHz - 40 GHz) |
|                        | Tx,                           | 5825 MHz            |                     |                     |                     |
|                        | Tx, IEEE802.11ac VHT20 (SISO) |                     |                     |                     |                     |

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11650.000       | PK       | 44.03          | 39.69           | 9.67      | 39.14     | 2.26                 | 56.51           | 73.90          | 17.3        | 150         | 0            | VBW:2.7 kHz |
| Hori.    | 11650.000       | AV       | 33.52          | 39.69           | 9.67      | 39.14     | 2.26                 | 46.00           | 53.90          | 7.9         | 150         | 0            |             |
| Vert.    | 11650.000       | PK       | 43.75          | 39.69           | 9.67      | 39.14     | 2.26                 | 56.23           | 73.90          | 17.6        | 150         | 0            | VBW:2.7 kHz |
| Vert.    | 11650.000       | AV       | 33.35          | 39.69           | 9.67      | 39.14     | 2.26                 | 45.83           | 53.90          | 8.0         | 150         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5850.000        | PK       | 48.45          | 32.65           | 17.54     | 43.34     | 2.26                 | 57.56           | -37.66              | 27.00       | 64.6        | 106         | 258          |        |
| Hori.    | 5855.000        | PK       | 48.27          | 32.66           | 17.54     | 43.34     | 2.26                 | 57.39           | -37.83              | 15.60       | 53.4        | 106         | 258          |        |
| Hori.    | 5875.000        | PK       | 47.96          | 32.72           | 17.55     | 43.34     | 2.26                 | 57.15           | -38.07              | 10.00       | 48.0        | 106         | 258          |        |
| Hori.    | 5925.000        | PK       | 47.95          | 32.80           | 17.58     | 43.34     | 2.26                 | 57.25           | -37.97              | -27.00      | 10.9        | 106         | 258          |        |
| Hori.    | 17475.000       | PK       | 45.49          | 41.59           | 13.55     | 38.18     | -9.54                | 52.91           | -42.31              | -27.00      | 15.3        | 155         | 183          |        |
| Vert.    | 5850.000        | PK       | 48.86          | 32.65           | 17.54     | 43.34     | 2.26                 | 57.97           | -37.25              | 27.00       | 64.2        | 361         | 315          |        |
| Vert.    | 5855.000        | PK       | 48.34          | 32.66           | 17.54     | 43.34     | 2.26                 | 57.46           | -37.76              | 15.60       | 53.3        | 361         | 315          |        |
| Vert.    | 5875.000        | PK       | 48.11          | 32.72           | 17.55     | 43.34     | 2.26                 | 57.30           | -37.92              | 10.00       | 47.9        | 361         | 315          |        |
| Vert.    | 5925.000        | PK       | 47.78          | 32.80           | 17.58     | 43.34     | 2.26                 | 57.08           | -38.14              | -27.00      | 11.1        | 361         | 315          |        |
| Vert.    | 17475.000       | PK       | 43.89          | 41.59           | 13.55     | 38.18     | -9.54                | 51.31           | -43.91              | -27.00      | 16.9        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | February 20, 2019               |
| Temperature / Humidity | 26 deg.C / 35 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT20 (SISO) ,5825 MHz |

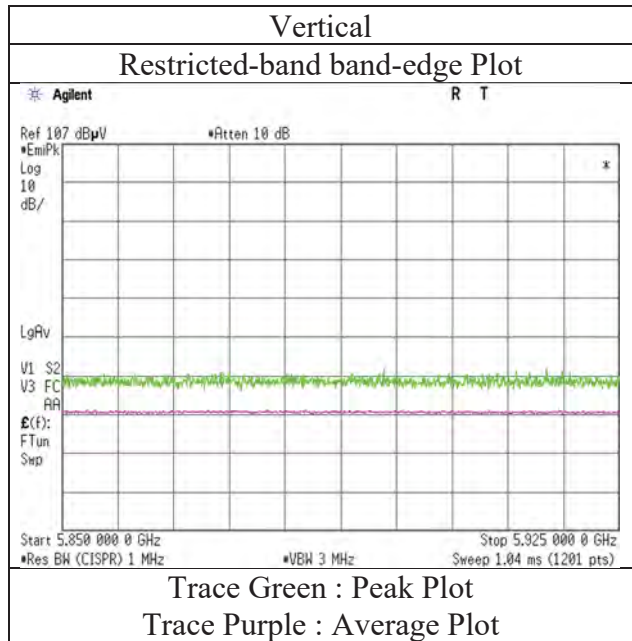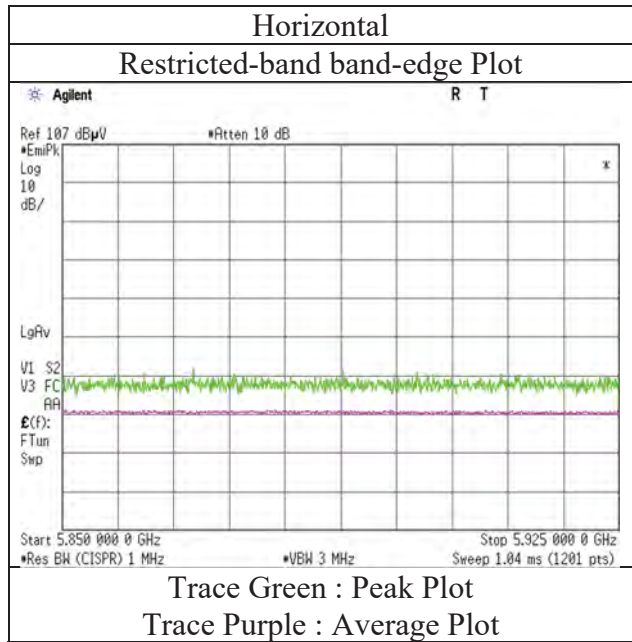

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 12, 2019  
 Temperature / Humidity 23 deg. C / 29 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5745 MHz  
 Tx, IEEE802.11n HT20 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5650.000        | PK       | 41.81          | 32.18           | 17.31     | 33.94     | 2.26                 | 59.62           | -35.60              | -27.00      | 8.6         | 274         | 294          |        |
| Hori.    | 5700.000        | PK       | 42.79          | 32.23           | 17.31     | 33.94     | 2.26                 | 60.65           | -34.57              | 10.00       | 44.5        | 274         | 294          |        |
| Hori.    | 5720.000        | PK       | 46.10          | 32.33           | 17.31     | 33.94     | 2.26                 | 64.06           | -31.16              | 15.60       | 46.7        | 274         | 294          |        |
| Hori.    | 5725.000        | PK       | 50.10          | 32.35           | 17.31     | 33.94     | 2.26                 | 68.08           | -27.14              | 27.00       | 54.1        | 274         | 294          |        |
| Vert.    | 5650.000        | PK       | 42.21          | 32.18           | 17.31     | 33.94     | 2.26                 | 60.02           | -35.20              | -27.00      | 8.2         | 176         | 25           |        |
| Vert.    | 5700.000        | PK       | 42.24          | 32.23           | 17.31     | 33.94     | 2.26                 | 60.10           | -35.12              | 10.00       | 45.1        | 176         | 25           |        |
| Vert.    | 5720.000        | PK       | 44.50          | 32.33           | 17.31     | 33.94     | 2.26                 | 62.46           | -32.76              | 15.60       | 48.3        | 176         | 25           |        |
| Vert.    | 5725.000        | PK       | 49.04          | 32.35           | 17.31     | 33.94     | 2.26                 | 67.02           | -28.20              | 27.00       | 55.2        | 176         | 25           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 12, 2019                      |
| Temperature / Humidity | 23 deg.C / 39 %RH                     |
| Engineer               | Makoto Hosaka                         |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO) ,5745 MHz |

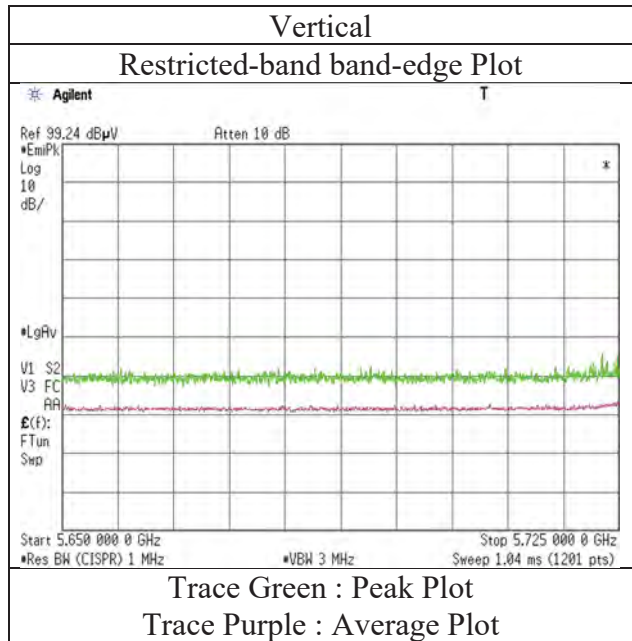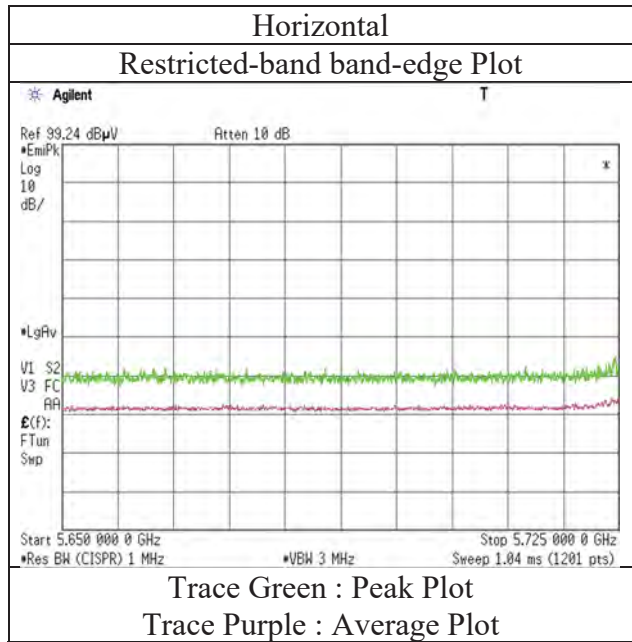

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 12, 2019  
 Temperature / Humidity 23 deg. C / 29 % RH  
 Engineer Makoto Hosaka  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5825 MHz  
 Tx, IEEE802.11n HT20 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5850.000        | PK       | 43.07          | 32.65           | 17.32     | 33.93     | 2.26                 | 61.37           | -33.85              | 27.00       | 60.8        | 283         | 295          |        |
| Hori.    | 5855.000        | PK       | 42.57          | 32.66           | 17.33     | 33.93     | 2.26                 | 60.89           | -34.33              | 15.60       | 49.9        | 283         | 295          |        |
| Hori.    | 5875.000        | PK       | 42.20          | 32.72           | 17.33     | 33.93     | 2.26                 | 60.58           | -34.64              | 10.00       | 44.6        | 283         | 295          |        |
| Hori.    | 5925.000        | PK       | 41.83          | 32.80           | 17.34     | 33.93     | 2.26                 | 60.30           | -34.92              | -27.00      | 7.9         | 283         | 295          |        |
| Vert.    | 5850.000        | PK       | 43.45          | 32.65           | 17.32     | 33.93     | 2.26                 | 61.75           | -33.47              | 27.00       | 60.4        | 111         | 32           |        |
| Vert.    | 5855.000        | PK       | 41.62          | 32.66           | 17.33     | 33.93     | 2.26                 | 59.94           | -35.28              | 15.60       | 50.8        | 111         | 32           |        |
| Vert.    | 5875.000        | PK       | 41.29          | 32.72           | 17.33     | 33.93     | 2.26                 | 59.67           | -35.55              | 10.00       | 45.5        | 111         | 32           |        |
| Vert.    | 5925.000        | PK       | 42.48          | 32.80           | 17.34     | 33.93     | 2.26                 | 60.95           | -34.27              | -27.00      | 7.2         | 111         | 32           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor  
 Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | January 12, 2019                      |
| Temperature / Humidity | 23 deg.C / 39 %RH                     |
| Engineer               | Makoto Hosaka                         |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT20 (MIMO) ,5825 MHz |

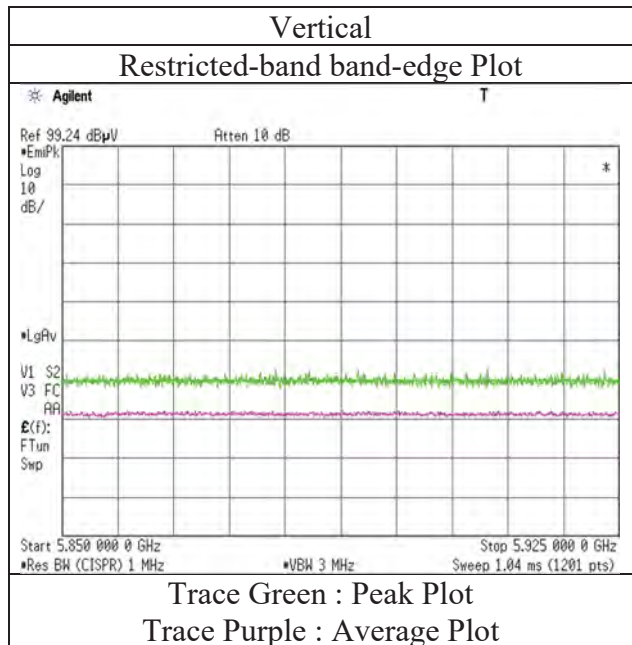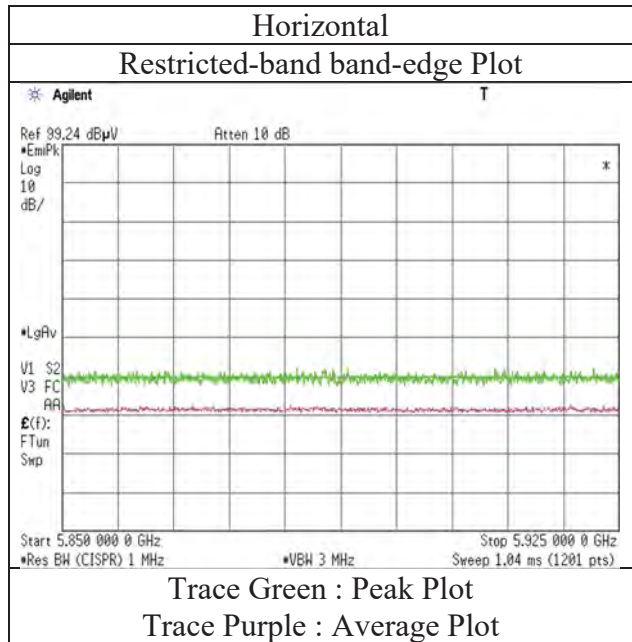

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

|                        |                   |                             |                     |                     |                     |
|------------------------|-------------------|-----------------------------|---------------------|---------------------|---------------------|
| Report No.             | 12656071S         |                             |                     |                     |                     |
| Test place             | Shonan EMC Lab.   |                             |                     |                     |                     |
| Semi Anechoic Chamber  | No.3              | No.1                        | No.3                | No.3                | No.3                |
| Date                   | February 20, 2019 | February 24, 2019           | January 25, 2019    | January 17, 2019    | January 18, 2019    |
| Temperature / Humidity | 26 deg.C / 35 %RH | 22 deg. C / 33 % RH         | 21 deg. C / 30 % RH | 21 deg. C / 35 % RH | 22 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa   | Kazutaka Takeyama           | Makoto Hosaka       | Makoto Hosaka       | Kazutaka Takeyama   |
| Mode                   | (1 GHz - 6.4 GHz) | (6.4 GHz - 13 GHz)          | (13 GHz - 18 GHz)   | (18 GHz - 26.5 GHz) | (26.5 GHz - 40 GHz) |
|                        | Tx,               | 5755 MHz                    |                     |                     |                     |
|                        |                   | Tx, IEEE802.11n HT40 (SISO) |                     |                     |                     |

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11510.000       | PK       | 44.53          | 40.01           | 9.65      | 39.26     | 2.26                 | 57.19           | 73.90          | 16.7        | 150         | 0            |             |
| Hori.    | 11510.000       | AV       | 35.62          | 40.01           | 9.65      | 39.26     | 2.26                 | 48.28           | 53.90          | 5.6         | 150         | 0            | VBW:5.1 kHz |
| Vert.    | 11510.000       | PK       | 44.13          | 40.01           | 9.65      | 39.26     | 2.26                 | 56.79           | 73.90          | 17.1        | 150         | 0            |             |
| Vert.    | 11510.000       | AV       | 35.85          | 40.01           | 9.65      | 39.26     | 2.26                 | 48.51           | 53.90          | 5.3         | 150         | 0            | VBW:5.1 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5650.000        | PK       | 47.32          | 32.18           | 17.41     | 43.33     | 2.26                 | 55.84           | -39.38              | -27.00      | 12.3        | 100         | 325          |        |
| Hori.    | 5700.000        | PK       | 48.10          | 32.23           | 17.45     | 43.33     | 2.26                 | 56.71           | -38.51              | 10.00       | 48.5        | 100         | 325          |        |
| Hori.    | 5717.625        | PK       | 54.75          | 32.31           | 17.46     | 43.33     | 2.26                 | 63.45           | -31.77              | 14.94       | 46.7        | 100         | 325          |        |
| Hori.    | 5720.000        | PK       | 53.88          | 32.33           | 17.46     | 43.33     | 2.26                 | 62.60           | -32.62              | 15.60       | 48.2        | 100         | 325          |        |
| Hori.    | 5725.000        | PK       | 54.83          | 32.35           | 17.46     | 43.33     | 2.26                 | 63.57           | -31.65              | 27.00       | 58.6        | 100         | 325          |        |
| Hori.    | 17265.000       | PK       | 45.41          | 39.98           | 13.54     | 38.60     | -9.54                | 50.79           | -44.43              | -27.00      | 17.4        | 150         | 0            |        |
| Vert.    | 5650.000        | PK       | 48.52          | 32.18           | 17.41     | 43.33     | 2.26                 | 57.04           | -38.18              | -27.00      | 11.1        | 352         | 302          |        |
| Vert.    | 5700.000        | PK       | 48.38          | 32.23           | 17.45     | 43.33     | 2.26                 | 56.99           | -38.23              | 10.00       | 48.2        | 352         | 302          |        |
| Vert.    | 5717.630        | PK       | 53.91          | 32.31           | 17.46     | 43.33     | 2.26                 | 62.61           | -32.61              | 14.94       | 47.5        | 352         | 302          |        |
| Vert.    | 5720.000        | PK       | 54.32          | 32.33           | 17.46     | 43.33     | 2.26                 | 63.04           | -32.18              | 15.60       | 47.7        | 352         | 302          |        |
| Vert.    | 5725.000        | PK       | 56.08          | 32.35           | 17.46     | 43.33     | 2.26                 | 64.82           | -30.40              | 27.00       | 57.4        | 352         | 302          |        |
| Vert.    | 17265.000       | PK       | 44.87          | 39.98           | 13.54     | 38.60     | -9.54                | 50.25           | -44.97              | -27.00      | 17.9        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | February 20, 2019                     |
| Temperature / Humidity | 26 deg.C / 35 %RH                     |
| Engineer               | Yosuke Ishikawa                       |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO), 5755 MHz |

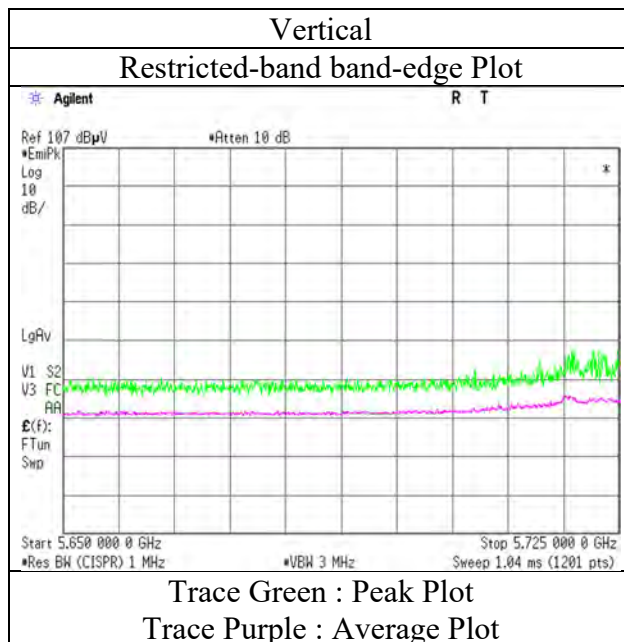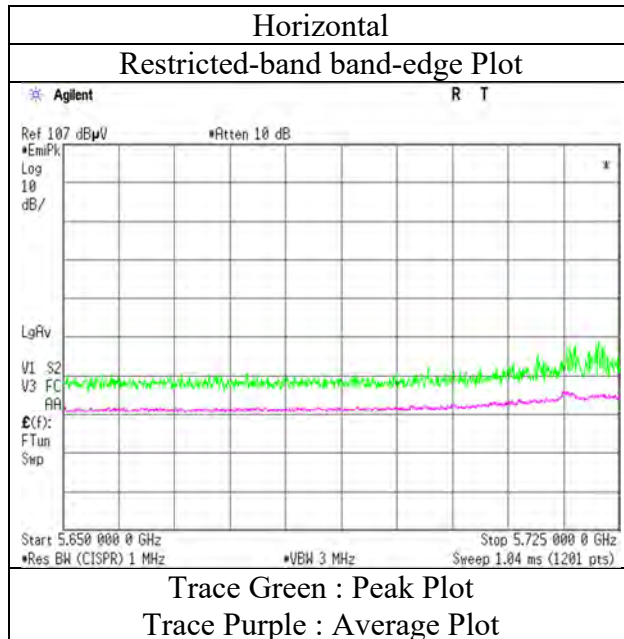

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

|                        |                             |                     |                     |                     |                     |
|------------------------|-----------------------------|---------------------|---------------------|---------------------|---------------------|
| Report No.             | 12656071S                   |                     |                     |                     |                     |
| Test place             | Shonan EMC Lab.             |                     |                     |                     |                     |
| Semi Anechoic Chamber  | No.3                        | No.1                | No.3                | No.3                | No.3                |
| Date                   | February 20, 2019           | February 24, 2019   | January 25, 2019    | January 17, 2019    | January 18, 2019    |
| Temperature / Humidity | 26 deg.C / 35 %RH           | 22 deg. C / 33 % RH | 21 deg. C / 30 % RH | 21 deg. C / 35 % RH | 22 deg. C / 44 % RH |
| Engineer               | Yosuke Ishikawa             | Kazutaka Takeyama   | Makoto Hosaka       | Makoto Hosaka       | Kazutaka Takeyama   |
| Mode                   | (1 GHz - 6.4 GHz)           | (6.4 GHz - 13 GHz)  | (13 GHz - 18 GHz)   | (18 GHz - 26.5 GHz) | (26.5 GHz - 40 GHz) |
|                        | Tx, 5795 MHz                |                     |                     |                     |                     |
|                        | Tx, IEEE802.11n HT40 (SISO) |                     |                     |                     |                     |

### (above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|-------------|
| Hori.    | 11590.000       | PK       | 44.65          | 39.93           | 9.66      | 39.19     | 2.26                 | 57.31           | 73.90          | 16.5        | 150         | 0            | VBW:5.1 kHz |
| Hori.    | 11590.000       | AV       | 35.07          | 39.93           | 9.66      | 39.19     | 2.26                 | 47.73           | 53.90          | 6.1         | 150         | 0            |             |
| Vert.    | 11590.000       | PK       | 44.72          | 39.93           | 9.66      | 39.19     | 2.26                 | 57.38           | 73.90          | 16.5        | 150         | 0            | VBW:5.1 kHz |
| Vert.    | 11590.000       | AV       | 34.84          | 39.93           | 9.66      | 39.19     | 2.26                 | 47.50           | 53.90          | 6.4         | 150         | 0            |             |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5850.000        | PK       | 48.33          | 32.65           | 17.54     | 43.34     | 2.26                 | 57.44           | -37.78              | 27.00       | 64.7        | 100         | 258          |        |
| Hori.    | 5855.000        | PK       | 48.62          | 32.66           | 17.54     | 43.34     | 2.26                 | 57.74           | -37.48              | 15.60       | 53.0        | 100         | 258          |        |
| Hori.    | 5875.000        | PK       | 48.76          | 32.72           | 17.55     | 43.34     | 2.26                 | 57.95           | -37.27              | 10.00       | 47.2        | 100         | 258          |        |
| Hori.    | 5925.000        | PK       | 48.20          | 32.80           | 17.58     | 43.34     | 2.26                 | 57.50           | -37.72              | -27.00      | 10.7        | 100         | 258          |        |
| Hori.    | 17385.000       | PK       | 44.59          | 40.84           | 13.55     | 38.36     | -9.54                | 51.08           | -44.14              | -27.00      | 17.1        | 150         | 0            |        |
| Vert.    | 5850.000        | PK       | 48.65          | 32.65           | 17.54     | 43.34     | 2.26                 | 57.76           | -37.46              | 27.00       | 64.4        | 346         | 286          |        |
| Vert.    | 5855.000        | PK       | 48.25          | 32.66           | 17.54     | 43.34     | 2.26                 | 57.37           | -37.85              | 15.60       | 53.4        | 346         | 286          |        |
| Vert.    | 5875.000        | PK       | 48.21          | 32.72           | 17.55     | 43.34     | 2.26                 | 57.40           | -37.82              | 10.00       | 47.8        | 346         | 286          |        |
| Vert.    | 5925.000        | PK       | 48.45          | 32.80           | 17.58     | 43.34     | 2.26                 | 57.75           | -37.47              | -27.00      | 10.4        | 346         | 286          |        |
| Vert.    | 17385.000       | PK       | 45.44          | 40.84           | 13.55     | 38.36     | -9.54                | 51.93           | -43.29              | -27.00      | 16.2        | 150         | 0            |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])= $10\cdot\text{LOG}(\{ (10 \wedge (\text{Electric Field Strength [dBuV/m]} / 20) * 10 \wedge (-6) * \text{Distance:3[m]}) \wedge 2 \} / 30) * 10 \wedge 3$

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz :  $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**

|                        |                                       |
|------------------------|---------------------------------------|
| Test place             | Shonan EMC Lab.                       |
| Semi Anechoic Chamber  | No.3                                  |
| Date                   | February 20, 2019                     |
| Temperature / Humidity | 26 deg.C / 35 %RH                     |
| Engineer               | Yosuke Ishikawa                       |
|                        | (1 GHz – 6.4 GHz)                     |
| Mode                   | Tx, IEEE802.11n HT40 (SISO) ,5795 MHz |

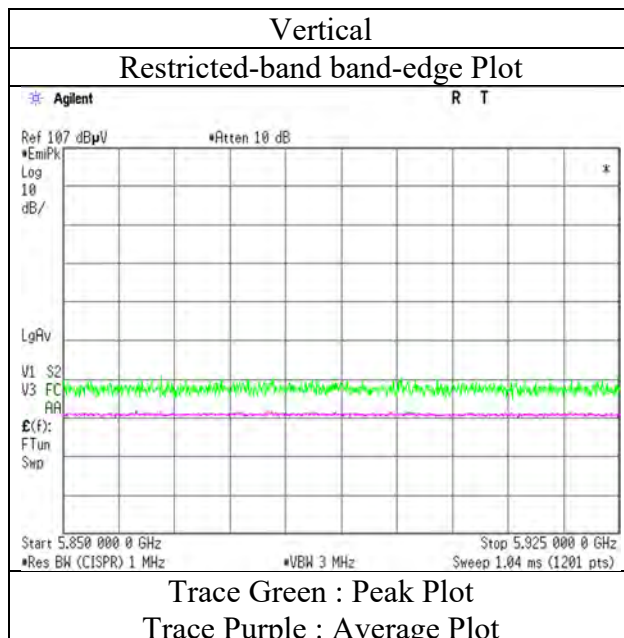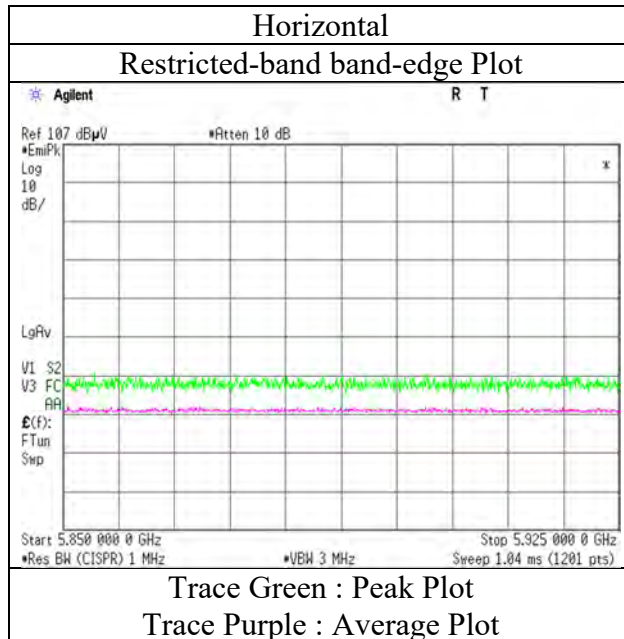

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5755 MHz  
 Tx, IEEE802.11ac VHT40 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5650.000        | PK       | 42.28          | 32.18           | 17.31     | 33.94     | 2.26                 | 60.09           | -35.13              | -27.00      | <b>8.1</b>  | 160         | 149          |        |
| Hori.    | 5700.000        | PK       | 42.63          | 32.23           | 17.31     | 33.94     | 2.26                 | 60.49           | -34.73              | 10.00       | 44.7        | 160         | 149          |        |
| Hori.    | 5717.200        | PK       | 46.46          | 32.31           | 17.31     | 33.94     | 2.26                 | 64.40           | -30.82              | 14.81       | 45.6        | 160         | 149          |        |
| Hori.    | 5720.000        | PK       | 47.37          | 32.33           | 17.31     | 33.94     | 2.26                 | 65.33           | -29.89              | 15.60       | 45.4        | 160         | 149          |        |
| Hori.    | 5722.271        | PK       | 48.67          | 32.34           | 17.31     | 33.94     | 2.26                 | 66.64           | -28.58              | 20.77       | 49.3        | 160         | 149          |        |
| Hori.    | 5725.000        | PK       | 46.79          | 32.35           | 17.31     | 33.94     | 2.26                 | 64.77           | -30.45              | 27.00       | 57.4        | 160         | 149          |        |
| Vert.    | 5650.000        | PK       | 41.95          | 32.18           | 17.31     | 33.94     | 2.26                 | 59.76           | -35.46              | -27.00      | 8.4         | 100         | 95           |        |
| Vert.    | 5700.000        | PK       | 41.85          | 32.23           | 17.31     | 33.94     | 2.26                 | 59.71           | -35.51              | 10.00       | 45.5        | 100         | 95           |        |
| Vert.    | 5717.363        | PK       | 47.77          | 32.31           | 17.31     | 33.94     | 2.26                 | 65.71           | -29.51              | 14.86       | 44.3        | 100         | 95           |        |
| Vert.    | 5720.000        | PK       | 48.02          | 32.33           | 17.31     | 33.94     | 2.26                 | 65.98           | -29.24              | 15.60       | 44.8        | 100         | 95           |        |
| Vert.    | 5722.463        | PK       | 47.73          | 32.34           | 17.31     | 33.94     | 2.26                 | 65.70           | -29.52              | 21.21       | 50.7        | 100         | 95           |        |
| Vert.    | 5725.000        | PK       | 46.34          | 32.35           | 17.31     | 33.94     | 2.26                 | 64.32           | -30.90              | 27.00       | 57.9        | 100         | 95           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor  
 Result(EIRP[dBm])=10\*LOG ( ( ( 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 ) / 30 ) \* 10^3

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT40 (MIMO) ,5755 MHz |

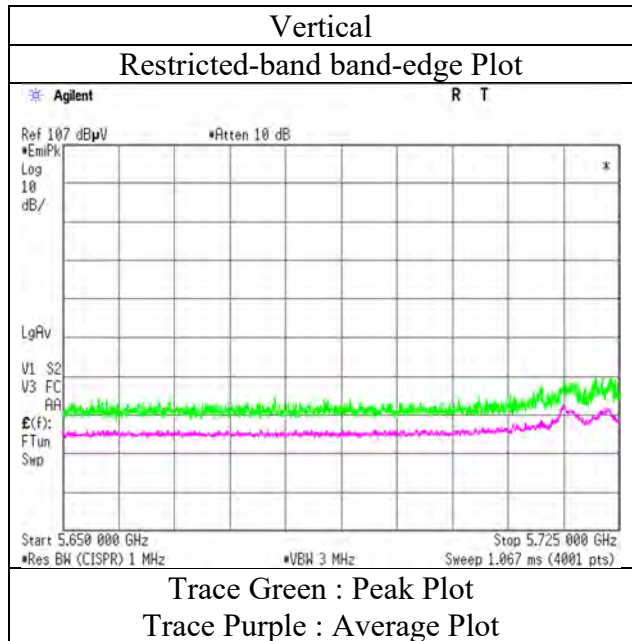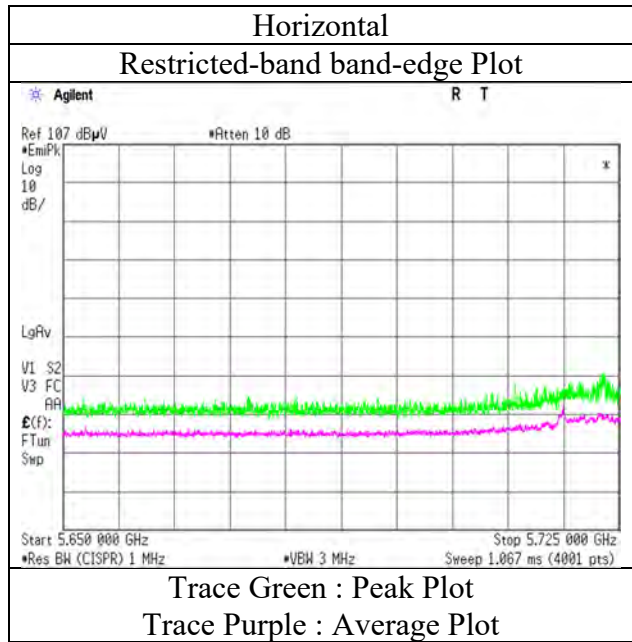

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5795 MHz  
 Tx, IEEE802.11ac VHT40 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5850.000        | PK       | 41.58          | 32.65           | 17.32     | 33.93     | 2.26                 | 59.88           | -35.34              | 27.00       | 62.3        | 100         | 178          |        |
| Hori.    | 5855.000        | PK       | 40.68          | 32.66           | 17.33     | 33.93     | 2.26                 | 59.00           | -36.22              | 15.60       | 51.8        | 100         | 178          |        |
| Hori.    | 5875.000        | PK       | 40.94          | 32.72           | 17.33     | 33.93     | 2.26                 | 59.32           | -35.90              | 10.00       | 45.9        | 100         | 178          |        |
| Hori.    | 5925.000        | PK       | 41.16          | 32.80           | 17.34     | 33.93     | 2.26                 | 59.63           | -35.59              | -27.00      | 8.5         | 100         | 178          |        |
| Vert.    | 5850.000        | PK       | 41.39          | 32.65           | 17.32     | 33.93     | 2.26                 | 59.69           | -35.53              | 27.00       | 62.5        | 100         | 96           |        |
| Vert.    | 5855.000        | PK       | 41.75          | 32.66           | 17.33     | 33.93     | 2.26                 | 60.07           | -35.15              | 15.60       | 50.7        | 100         | 96           |        |
| Vert.    | 5875.000        | PK       | 41.91          | 32.72           | 17.33     | 33.93     | 2.26                 | 60.29           | -34.93              | 10.00       | 44.9        | 100         | 96           |        |
| Vert.    | 5925.000        | PK       | 41.74          | 32.80           | 17.34     | 33.93     | 2.26                 | 60.21           | -35.01              | -27.00      | <b>8.0</b>  | 100         | 96           |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT40 (MIMO) ,5795 MHz |

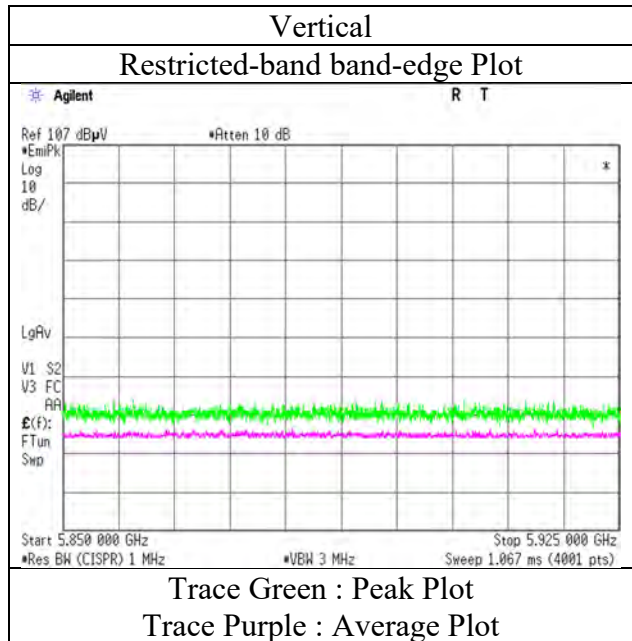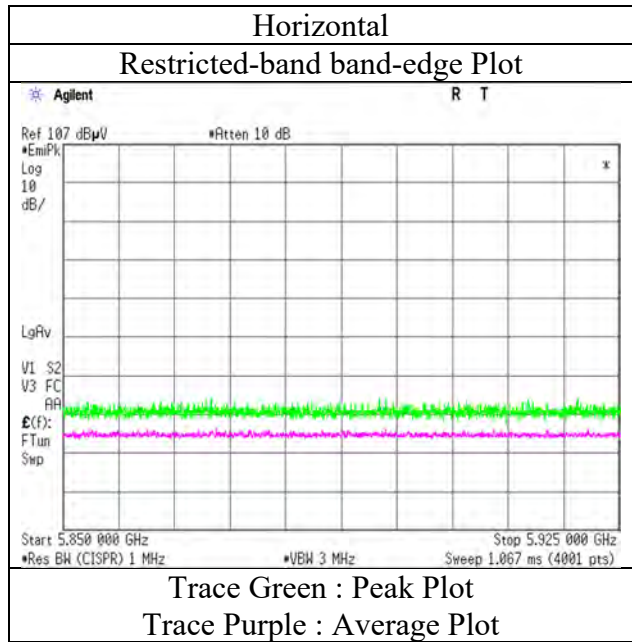

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3 No.1 No.3 No.3 No.3  
 Date February 20, 2019 February 24, 2019 January 25, 2019 January 17, 2019 January 18, 2019  
 Temperature / Humidity 26 deg.C / 35 %RH 22 deg. C / 33 % RH 21 deg. C / 30 % RH 21 deg. C / 35 % RH 22 deg. C / 44 % RH  
 Engineer Yosuke Ishikawa Kazutaka Takeyama Makoto Hosaka Makoto Hosaka Kazutaka Takeyama  
 (1 GHz - 6.4 GHz) (6.4 GHz - 13 GHz) (13 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
 Mode Tx, 5775 MHz  
 Tx, IEEE802.11ac VHT80 (SISO)

### (below 1GHz and above 1GHz Inside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark     |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|--------------|------------|
| Hori.    | 11550.000       | PK       | 44.50          | 40.03           | 9.65      | 39.23     | 2.26                 | 57.21           | 73.90          | 16.6        | 150         | 0            |            |
| Hori.    | 11550.000       | AV       | 36.26          | 40.03           | 9.65      | 39.23     | 2.26                 | 48.97           | 53.90          | 4.9         | 150         | 0            | VBW:12 kHz |
| Vert.    | 11550.000       | PK       | 44.36          | 40.03           | 9.65      | 39.23     | 2.26                 | 57.07           | 73.90          | 16.8        | 150         | 0            |            |
| Vert.    | 11550.000       | AV       | 36.03          | 40.03           | 9.65      | 39.23     | 2.26                 | 48.74           | 53.90          | 5.1         | 150         | 0            | VBW:12 kHz |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20d)

\*The 4th harmonic was not seen so the result was its base noise level

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5650.000        | PK       | 48.39          | 32.18           | 17.41     | 43.33     | 2.26                 | 56.91           | -38.31              | -27.00      | 11.3        | 169         | 253          |        |
| Hori.    | 5700.000        | PK       | 50.85          | 32.23           | 17.45     | 43.33     | 2.26                 | 59.46           | -35.76              | 10.00       | 45.7        | 169         | 253          |        |
| Hori.    | 5720.000        | PK       | 51.73          | 32.33           | 17.46     | 43.33     | 2.26                 | 60.45           | -34.77              | 15.60       | 50.3        | 169         | 253          |        |
| Hori.    | 5725.000        | PK       | 51.28          | 32.35           | 17.46     | 43.33     | 2.26                 | 60.02           | -35.20              | 27.00       | 62.2        | 169         | 253          |        |
| Hori.    | 5850.000        | PK       | 48.46          | 32.65           | 17.54     | 43.34     | 2.26                 | 57.57           | -37.65              | 27.00       | 64.6        | 169         | 253          |        |
| Hori.    | 5855.000        | PK       | 48.47          | 32.66           | 17.54     | 43.34     | 2.26                 | 57.59           | -37.63              | 15.60       | 53.2        | 169         | 253          |        |
| Hori.    | 5875.000        | PK       | 48.54          | 32.72           | 17.55     | 43.34     | 2.26                 | 57.73           | -37.49              | 10.00       | 47.4        | 169         | 253          |        |
| Hori.    | 5925.000        | PK       | 48.30          | 32.80           | 17.58     | 43.34     | 2.26                 | 57.60           | -37.62              | -27.00      | 10.6        | 169         | 253          |        |
| Vert.    | 5650.000        | PK       | 49.62          | 32.18           | 17.41     | 43.33     | 2.26                 | 58.14           | -37.08              | -27.00      | 10.0        | 330         | 267          |        |
| Vert.    | 5700.000        | PK       | 50.54          | 32.23           | 17.45     | 43.33     | 2.26                 | 59.15           | -36.07              | 10.00       | 46.0        | 330         | 267          |        |
| Vert.    | 5720.000        | PK       | 52.71          | 32.33           | 17.46     | 43.33     | 2.26                 | 61.43           | -33.79              | 15.60       | 49.3        | 330         | 267          |        |
| Vert.    | 5725.000        | PK       | 51.39          | 32.35           | 17.46     | 43.33     | 2.26                 | 60.13           | -35.09              | 27.00       | 62.0        | 330         | 267          |        |
| Vert.    | 5850.000        | PK       | 48.99          | 32.65           | 17.54     | 43.34     | 2.26                 | 58.10           | -37.12              | 27.00       | 64.1        | 330         | 267          |        |
| Vert.    | 5855.000        | PK       | 48.20          | 32.66           | 17.54     | 43.34     | 2.26                 | 57.32           | -37.90              | 15.60       | 53.5        | 330         | 267          |        |
| Vert.    | 5875.000        | PK       | 48.90          | 32.72           | 17.55     | 43.34     | 2.26                 | 58.09           | -37.13              | 10.00       | 47.1        | 330         | 267          |        |
| Vert.    | 5925.000        | PK       | 48.63          | 32.80           | 17.58     | 43.34     | 2.26                 | 57.93           | -37.29              | -27.00      | 10.2        | 330         | 267          |        |

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result(EIRP[dBm])=10\*LOC ( ( ( 10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30 ) \*10^0

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.

Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB

13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **Radiated Spurious Emission** **(Reference Plot for band-edge)**



|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | February 20, 2019               |
| Temperature / Humidity | 26 deg.C / 35 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (SISO) ,5775 MHz |

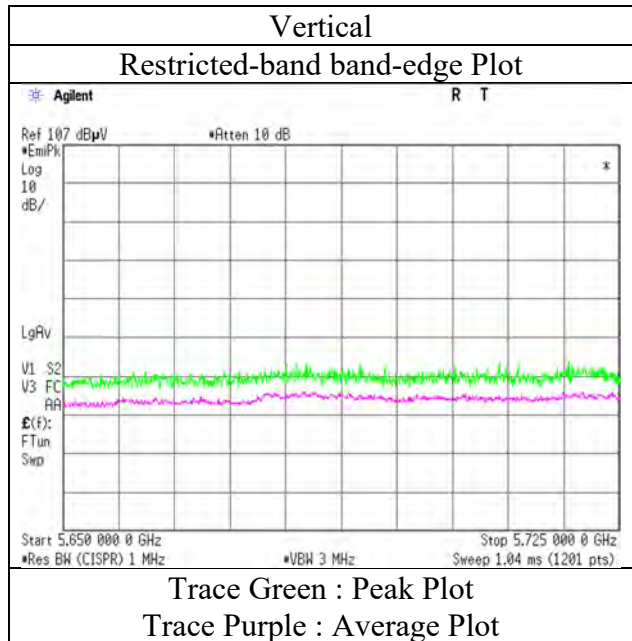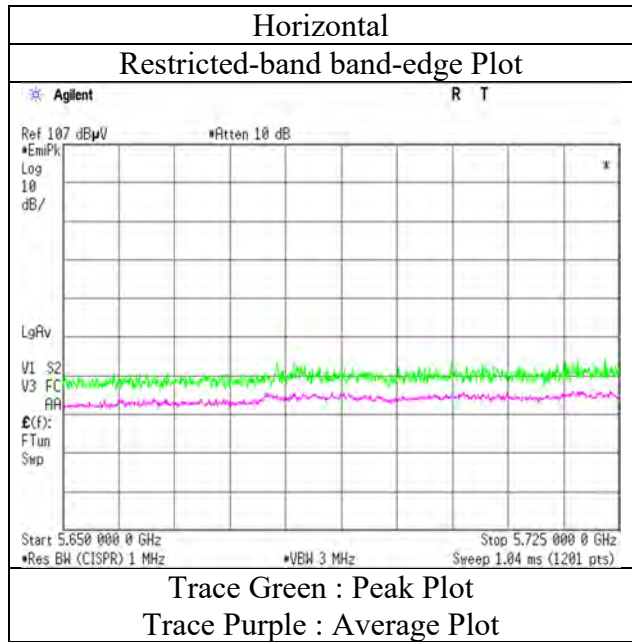

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | February 20, 2019               |
| Temperature / Humidity | 26 deg.C / 35 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (SISO) ,5775 MHz |

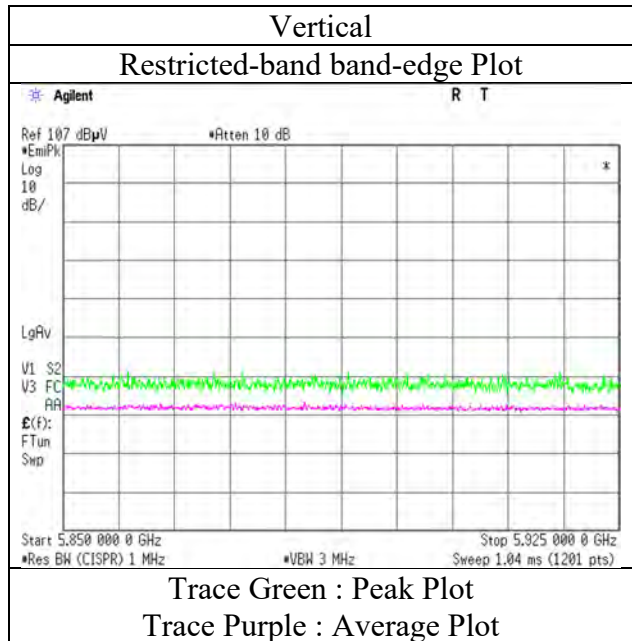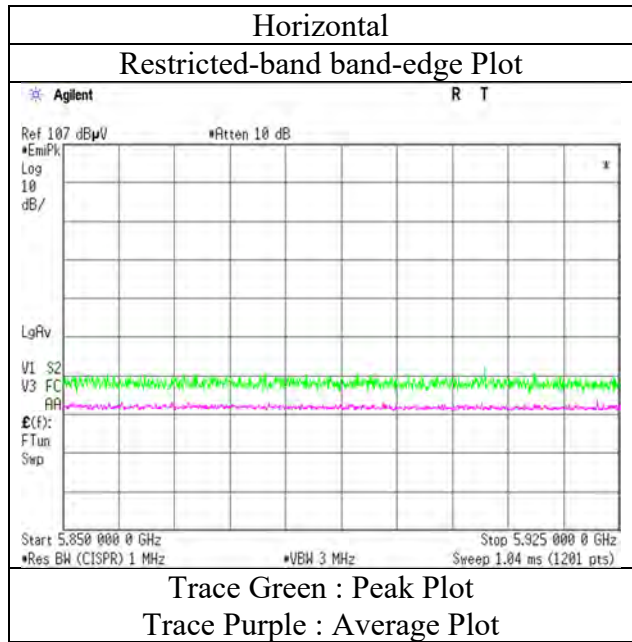

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Emission

Report No. 12656071S  
 Test place Shonan EMC Lab.  
 Semi Anechoic Chamber No.3  
 Date January 13, 2019  
 Temperature / Humidity 22 deg. C / 39 % RH  
 Engineer Yosuke Ishikawa  
 (1 GHz - 6.4 GHz)  
 Mode Tx, 5775 MHz  
 Tx, IEEE802.11ac VHT80 (MIMO)

### (Calculation) (above 1GHz Outside of the restricted band)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Result (EIRP) [dBm] | Limit [dBm] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|---------------------|-------------|-------------|-------------|--------------|--------|
| Hori.    | 5650.000        | PK       | 41.96          | 32.18           | 17.31     | 33.94     | 2.26                 | 59.77           | -35.45              | -27.00      | 8.4         | 146         | 147          |        |
| Hori.    | 5679.613        | PK       | 43.76          | 32.21           | 17.31     | 33.94     | 2.26                 | 61.60           | -33.62              | -5.09       | 28.5        | 146         | 147          |        |
| Hori.    | 5700.000        | PK       | 43.37          | 32.23           | 17.31     | 33.94     | 2.26                 | 61.23           | -33.99              | 10.00       | 43.9        | 146         | 147          |        |
| Hori.    | 5720.000        | PK       | 44.13          | 32.33           | 17.31     | 33.94     | 2.26                 | 62.09           | -33.13              | 15.60       | 48.7        | 146         | 147          |        |
| Hori.    | 5725.000        | PK       | 33.69          | 32.35           | 17.31     | 33.94     | 2.26                 | 51.67           | -43.55              | 27.00       | 70.5        | 146         | 147          |        |
| Hori.    | 5850.000        | PK       | 41.57          | 32.65           | 17.32     | 33.93     | 2.26                 | 59.87           | -35.35              | 27.00       | 62.3        | 146         | 147          |        |
| Hori.    | 5855.000        | PK       | 41.27          | 32.66           | 17.33     | 33.93     | 2.26                 | 59.59           | -35.63              | 15.60       | 51.2        | 146         | 147          |        |
| Hori.    | 5875.000        | PK       | 42.35          | 32.72           | 17.33     | 33.93     | 2.26                 | 60.73           | -34.49              | 10.00       | 44.4        | 146         | 147          |        |
| Hori.    | 5925.000        | PK       | 42.15          | 32.80           | 17.34     | 33.93     | 2.26                 | 60.62           | -34.60              | -27.00      | 7.6         | 146         | 147          |        |
| Vert.    | 5650.000        | PK       | 41.68          | 32.18           | 17.31     | 33.94     | 2.26                 | 59.49           | -35.73              | -27.00      | 8.7         | 100         | 97           |        |
| Vert.    | 5687.500        | PK       | 44.65          | 32.22           | 17.31     | 33.94     | 2.26                 | 62.50           | -32.72              | 0.75        | 33.4        | 100         | 97           |        |
| Vert.    | 5700.000        | PK       | 43.81          | 32.23           | 17.31     | 33.94     | 2.26                 | 61.67           | -33.55              | 10.00       | 43.5        | 100         | 97           |        |
| Vert.    | 5718.735        | PK       | 44.94          | 32.32           | 17.31     | 33.94     | 2.26                 | 62.89           | -32.33              | 15.25       | 47.5        | 100         | 97           |        |
| Vert.    | 5720.000        | PK       | 44.58          | 32.33           | 17.31     | 33.94     | 2.26                 | 62.54           | -32.68              | 15.60       | 48.2        | 100         | 97           |        |
| Vert.    | 5723.723        | PK       | 44.43          | 32.34           | 17.31     | 33.94     | 2.26                 | 62.40           | -32.82              | 24.09       | 56.9        | 100         | 97           |        |
| Vert.    | 5725.000        | PK       | 43.74          | 32.35           | 17.31     | 33.94     | 2.26                 | 61.72           | -33.50              | 27.00       | 60.5        | 100         | 97           |        |
| Vert.    | 5850.000        | PK       | 41.37          | 32.65           | 17.32     | 33.93     | 2.26                 | 59.67           | -35.55              | 27.00       | 62.5        | 100         | 97           |        |
| Vert.    | 5855.000        | PK       | 41.47          | 32.66           | 17.33     | 33.93     | 2.26                 | 59.79           | -35.43              | 15.60       | 51.0        | 100         | 97           |        |
| Vert.    | 5875.000        | PK       | 41.17          | 32.72           | 17.33     | 33.93     | 2.26                 | 59.55           | -35.67              | 10.00       | 45.6        | 100         | 97           |        |
| Vert.    | 5925.000        | PK       | 41.36          | 32.80           | 17.34     | 33.93     | 2.26                 | 59.83           | -35.39              | -27.00      | 8.3         | 100         | 97           |        |



Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor  
 Result(EIRP[dBm])=10\*LOG (({ (10 ^ ( Electric Field Strength [dBuV/m] / 20 ) \* 10 ^ (-6) \* Distance:3[m] ) ) ^ 2 } / 30) \*10^3)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*The 4th harmonic was not seen so the result was its base noise level.  
 Distance factor : 1 GHz - 13 GHz : 20log (3.89 m / 3.0 m) = 2.26 dB  
 13 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Radiated Spurious Emission (Reference Plot for band-edge)



|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | February 20, 2019               |
| Temperature / Humidity | 26 deg.C / 35 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (MIMO) ,5775 MHz |

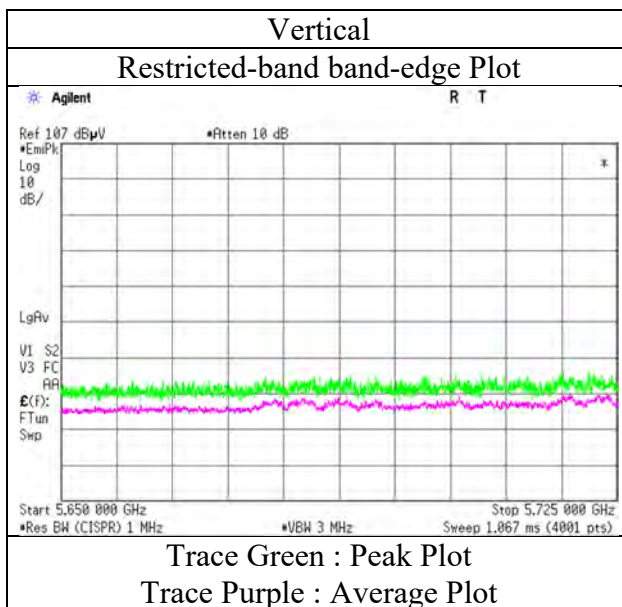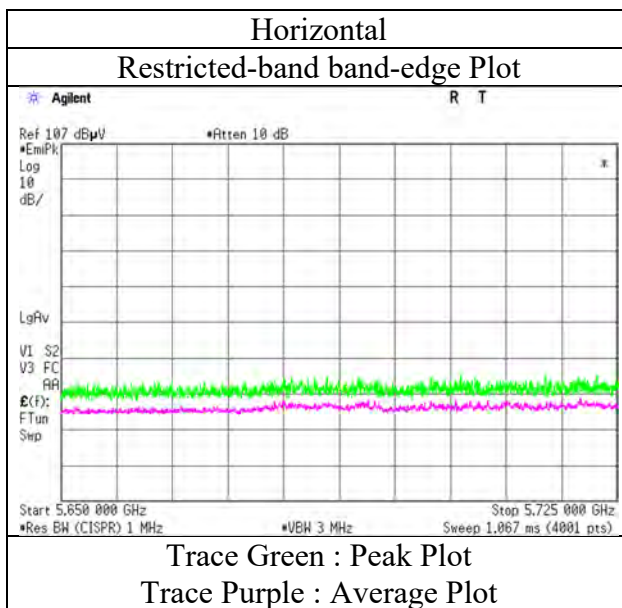

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

### Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                 |
|------------------------|---------------------------------|
| Test place             | Shonan EMC Lab.                 |
| Semi Anechoic Chamber  | No.3                            |
| Date                   | January 13, 2019                |
| Temperature / Humidity | 22 deg.C / 39 %RH               |
| Engineer               | Yosuke Ishikawa                 |
|                        | (1 GHz – 6.4 GHz)               |
| Mode                   | Tx, OFDM VHT80 (MIMO) ,5775 MHz |

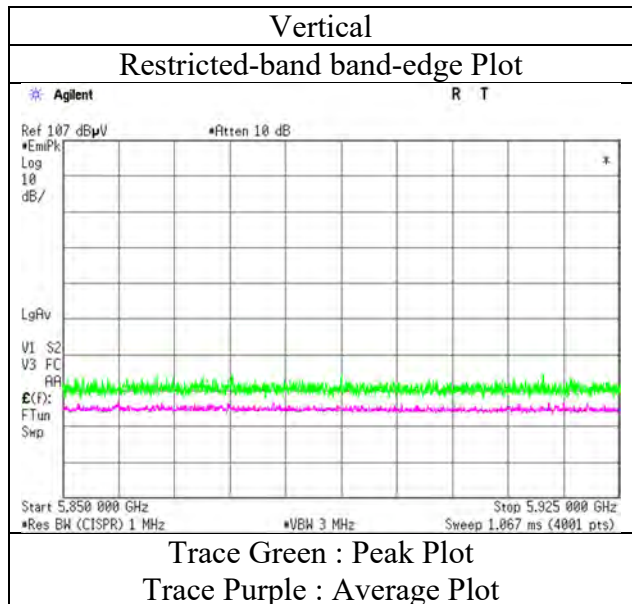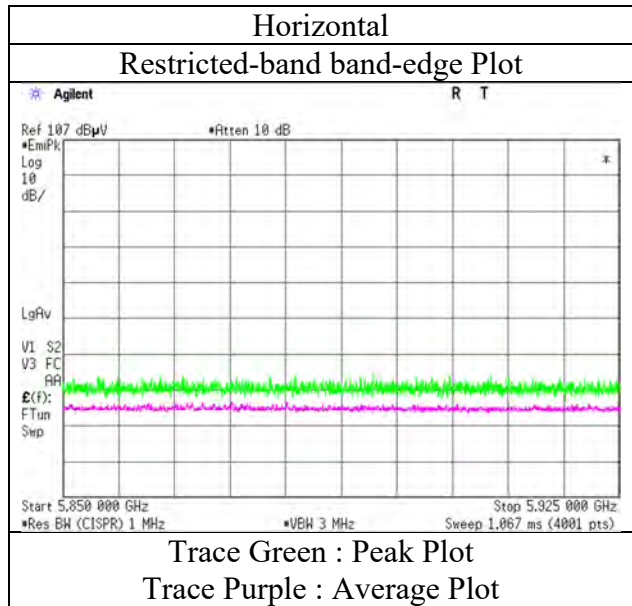


\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

### Spurious emission (Conducted)

**Tx, IEEE802.11ac VHT20 (SISO), PN9, worst antenna port 0, worst data mode 3 (MCS)**

**Tx, 5320 MHz (below 30 MHz)**

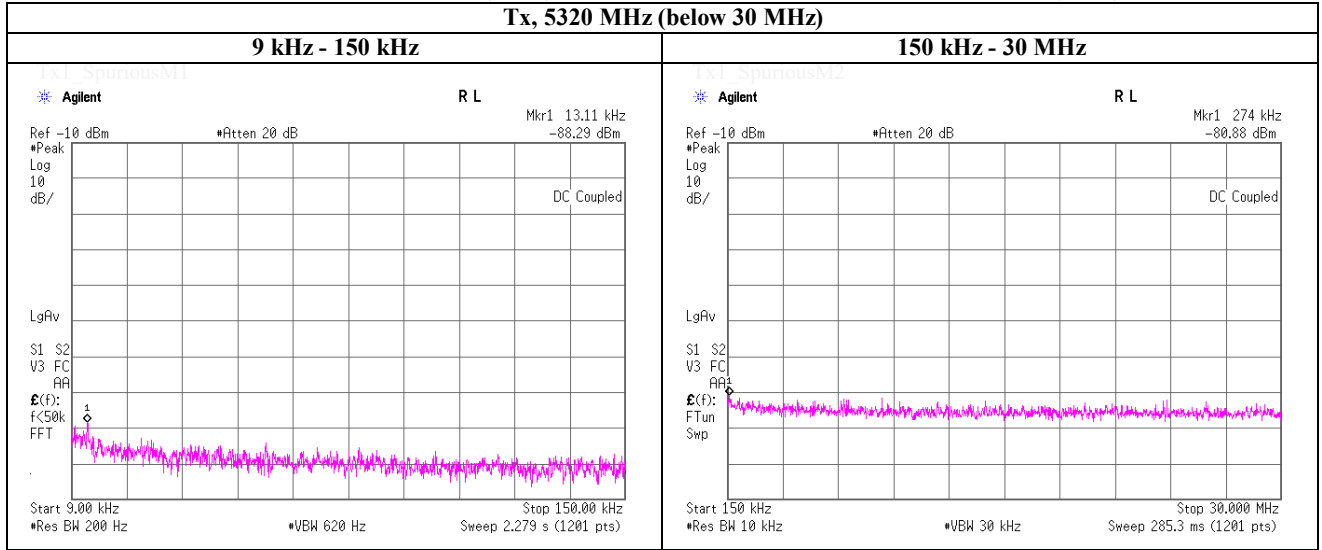

| FREQ<br>[kHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Attenuator<br>Loss<br>[dB] | Antenna<br>Gain | N<br>(Number of<br>output) | EIRP<br>[dBm] | Distance<br>[m] | Ground<br>bounce<br>[dB] | E (field<br>Strength)<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] |
|---------------|------------------|-----------------------|----------------------------|-----------------|----------------------------|---------------|-----------------|--------------------------|-----------------------------------|-------------------|----------------|
| 13.110        | -88.29           | 2.01                  | 10.11                      | 2.95            | 2                          | -70.21        | 300.00          | 6.00                     | -8.95                             | 45.25             | 54.20          |
| 274.000       | -80.88           | 2.02                  | 10.11                      | 2.95            | 2                          | -62.79        | 30.00           | 6.00                     | 18.47                             | 38.85             | 20.38          |

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \times \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable Loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna Gain [dBi]} + 10 \times \log(N)$

N: Number of output port

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



EMI test equipment

| Local ID           | Test Name | LIMS ID | Description               | Manufacturer                            | Model               | Serial                  | Last Calibration Date | Calibration Due Date | Calibration Interval (Month) |
|--------------------|-----------|---------|---------------------------|---|---------------------|-------------------------|-----------------------|----------------------|------------------------------|
| SAT10-15           | AT        | 160493  | Attenuator                | Weinschel Corp.                         | 54A-10              | 83406                   | 2018/12/6             | 2019/12/30           | 12                           |
| SCC-G13            | AT        | 145166  | Coaxial Cable             | Suhner                                  | SUCOFLEX 102        | 31599/2                 | 2018/12/25            | 2019/12/31           | 12                           |
| SOS-13             | AT        | 146321  | Humidity Indicator        | CUSTOM                                  | CTH-202             | Q.C.17                  | 2018/12/5             | 2019/12/31           | 12                           |
| SPM-07             | AT        | 146247  | Power Meter               | AGILENT                                 | 8990B               | MY5100272               | 2018/7/13             | 2019/7/31            | 12                           |
| SPSS-04            | AT        | 146310  | Power sensor              | AGILENT                                 | N1923A              | MY5326009               | 2018/7/13             | 2019/7/31            | 12                           |
| STM-G7             | AT        | 171614  | Terminator                | WEINSCHEL                               | M1459A              | 88995                   | 2018/7/10             | 2019/7/31            | 12                           |
| SSA-03             | AT        | 145801  | Spectrum Analyzer         | AGILENT                                 | E4448A              | MY48250152              | 2018/8/30             | 2019/8/31            | 12                           |
| SCC-C9/C10/SRSE-03 | CE        | 145036  | Coaxial Cable&RF Selector | Suhner/Suhner/TOYO                      | RG223U/141PE/NS4906 | -/0901-271(RF Selector) | 2019/4/19             | 2020/4/30            | 12                           |
| SOS-06             | CE        | 146294  | Humidity Indicator        | A&D                                     | AD-5681             | 4062118                 | 2018/12/5             | 2019/12/31           | 12                           |
| SLS-05             | CE (AE)   | 145542  | LISN                      | Rohde & Schwarz                         | ENV216              | 100516                  | 2019/2/19             | 2020/2/29            | 12                           |
| STM-08             | CE (AE)   | 146190  | Terminator                | TME                                     | CT-01 BP            | -                       | 2018/12/25            | 2019/12/31           | 12                           |
| SAT3-13            | CE (EUT)  | 150923  | Attenuator                | JFW                                     | 50HF-003N           |                         | 2019/1/25             | 2020/1/31            | 12                           |
| SLS-02             | CE (EUT)  | 145539  | LISN                      | Rohde & Schwarz                         | ENV216              | 100512                  | 2019/2/20             | 2020/2/29            | 12                           |
| KJM-09             | RE        | 145929  | Measure                   | KOMELON                                 | KMC-36              | -                       | -                     | -                    | -                            |
| KSA-08             | RE        | 145089  | Spectrum Analyzer         | AGILENT                                 | E4446A              | MY46180525              | 2018/10/7             | 2019/10/31           | 12                           |
| SAEC-01(SVSWR)     | RE        | 145561  | Semi-Anechoic Chamber     | TDK                                     | SAEC-01(SVSWR)      | 1                       | 2018/7/19             | 2019/7/31            | 12                           |
| SAEC-03(NSA)       | RE        | 145565  | Semi-Anechoic Chamber     | TDK                                     | SAEC-03(NSA)        | 3                       | 2019/4/8              | 2020/4/30            | 12                           |
| SAEC-03(SVSWR)     | RE        | 145566  | Semi-Anechoic Chamber     | TDK                                     | SAEC-03(SVSWR)      | 3                       | 2018/7/17             | 2019/7/31            | 12                           |
| SAF-03             | RE        | 145126  | Pre Amplifier             | SONOMA                                  | 310N                | 290213                  | 2019/2/5              | 2020/2/29            | 12                           |
| SAF-04             | RE        | 145127  | Pre Amplifier             | Toyo Corporation                        | TPA0118-36          | 2072554                 | 2018/6/26             | 2019/6/30            | 12                           |
| SAF-06             | RE        | 145005  | Pre Amplifier             | Toyo Corporation                        | TPA0118-36          | 1440491                 | 2019/2/8              | 2020/2/29            | 12                           |
| SAF-08             | RE        | 145007  | Pre Amplifier             | Toyo Corporation                        | HAP18-26W           | 19                      | 2019/3/5              | 2020/3/31            | 12                           |
| SAF-10             | RE        | 145129  | Pre Amplifier             | Toyo Corporation                        | HAP26-40W           | 10                      | 2019/3/22             | 2020/3/31            | 12                           |
| SAJ-02             | RE        | 146104  | Antenna Tilt Jig          | Intelligent System Engineering Co., Ltd | Antenna Tilt Jig    | T-S002                  | -                     | -                    | -                            |
| SAJ-03             | RE        | 146105  | Antenna Tilt Jig          | Intelligent System Engineering Co., Ltd | Antenna Tilt Jig    | T-S003                  | -                     | -                    | -                            |
| SAT10-05           | RE        | 145136  | Attenuator(above1 GHz)    | AGILENT                                 | 8493C-010           | 74864                   | 2018/11/25            | 2019/11/30           | 12                           |
| SAT10-06           | RE        | 145137  | Attenuator                | AGILENT                                 | 8493C-010           | 74865                   | 2018/11/25            | 2019/11/30           | 12                           |
| SAT6-13            | RE        | 167094  | Attenuator                | JFW                                     | 50HF-006N           |                         | 2019/2/5              | 2020/2/29            | 12                           |

EMI test equipment

| Local ID                       | Test Name | LIMS ID | Description               | Manufacturer                                       | Model                               | Serial                  | Last Calibration Date | Calibration Due Date | Calibration Interval (Month) |
|--------------------------------|-----------|---------|---------------------------|--|-------------------------------------|-------------------------|-----------------------|----------------------|------------------------------|
| SBA-03                         | RE        | 145023  | Biconical Antenna         | Schwarzbeck  | BBA9106                             | 91032666                | 2018/6/17             | 2019/6/30            | 12                           |
| SCC-C1/C2/C3/C4/C5/C10/SRSE-03 | RE        | 145171  | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO | 8D2W/12DSFA/141PE/141PE/141PE/141PE | -/0901-271(RF Selector) | 2019/4/19             | 2020/4/30            | 12                           |
| SCC-G05                        | RE        | 145039  | Coaxial Cable             | Junkosha   | J12J102207-00                       | APR-30-15-037           | 2019/1/25             | 2020/1/31            | 12                           |
| SCC-G15                        | RE        | 145176  | Coaxial Cable             | Suhner   | SUCOFLEX 102                        | 32703/2                 | 2019/3/27             | 2020/3/31            | 12                           |
| SCC-G22                        | RE        | 145180  | Coaxial Cable             | Suhner   | SUCOFLEX 104                        | 296199/4                | 2018/5/11             | 2019/5/31            | 12                           |
| SCC-G33                        | RE        | 145184  | Coaxial Cable             | Junkosha   | MWX241-01000KMSKMS                  | -                       | 2018/4/20             | 2019/4/30            | 12                           |
| SCC-G40                        | RE        | 166491  | Coaxial Cable             | Junkosha   | MWX221-01000NFSNMS/B                | 1612S005                | 2019/1/25             | 2020/1/31            | 12                           |
| SCC-G41                        | RE        | 151617  | Coaxial Cable             | Junkosha   | MWX221-01000NFSNMS/B                | 1612S006                | 2019/1/25             | 2020/1/31            | 12                           |
| SCC-G43                        | RE        | 156380  | Coaxial Cable             | HUBER+SUNER  | SUCOFLEX_104_E                      | SN MY 13406/4E          | 2018/7/10             | 2019/7/31            | 12                           |
| SCC-G44                        | RE        | 168300  | Coaxial Cable             | HUBER+SUNER  | SUCOFLEX 104                        | 800070/4A               | 2019/3/26             | 2020/3/31            | 12                           |
| SCC-G45                        | RE        | 168301  | Coaxial Cable             | HUBER+SUNER  | SUCOFLEX 102 E                      | 800137/2EA              | 2019/3/26             | 2020/3/31            | 12                           |
| SFL-03                         | RE        | 145377  | Highpass Filter           | MICRO-TRONICS                                      | HPM50112                            | 28                      | 2018/11/16            | 2019/11/30           | 12                           |
| SHA-01                         | RE        | 145383  | Horn Antenna              | Schwarzbeck  | BBHA9120D                           | 9120D-725               | 2018/7/23             | 2019/7/31            | 12                           |
| SHA-03                         | RE        | 145501  | Horn Antenna              | Schwarzbeck  | BBHA9120D                           | 9120D-739               | 2018/7/23             | 2019/7/31            | 12                           |
| SHA-04                         | RE        | 145512  | Horn Antenna              | ETS LINDGREN                                       | Sep-60                              | LM3640                  | 2018/7/23             | 2019/7/31            | 12                           |
| SHA-06                         | RE        | 145514  | Horn Antenna              | ETS LINDGREN                                       | Oct-60                              | LM3459                  | 2018/7/23             | 2019/7/31            | 12                           |
| SLA-07                         | RE        | 145529  | Logperiodic Antenna       | Schwarzbeck  | VUSLP9111B                          | 196                     | 2018/6/17             | 2019/6/30            | 12                           |
| SOS-01                         | RE        | 146316  | Humidity Indicator        | A&D  | AD-5681                             | 4062555                 | 2018/10/25            | 2019/10/31           | 12                           |
| SOS-05                         | RE        | 146293  | Humidity Indicator        | A&D  | AD-5681                             | 4062518                 | 2018/10/25            | 2019/10/31           | 12                           |
| SRENT-20                       | RE        | 176115  | Pre Amplifier             | Agilent  | 8449B                               | 3008A02595              | 2018/12/18            | 2019/12/31           | 12                           |
| SSA-02                         | RE        | 145800  | Spectrum Analyzer         | AGILENT  | E4448A                              | MY48250106              | 2018/3/5              | 2019/3/31*1)         | 12                           |
| STS-01                         | RE        | 145792  | Digital Hitester          | HIOKI  | 3805-50                             | 80997812                | 2018/10/16            | 2019/10/31           | 12                           |
| STR-08                         | RE, CE    | 150463  | Test Receiver             | Rohde & Schwarz                                    | ESW44                               | 101581                  | 2018/11/28            | 2019/11/30           | 12                           |
| COTS-SEMI-5                    | RE,CE     | 170932  | EMI Software              | TSJ  | TEPTO-DV3(RE,CE,ME,PE)              | -                       | -                     | -                    | -                            |
| KJM-02                         | RE,CE     | 146432  | Measure                   | TAJIMA   | GL19-55                             | -                       | -                     | -                    | -                            |
| STS-03                         | RE,CE     | 146210  | Digital Hitester          | HIOKI  | 3805-50                             | 80997823                | 2018/10/16            | 2019/10/31           | 12                           |

\*1) This test equipment was used for the tests before the expiration date of the calibration.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with valid calibrations . Each measurement data is traceable to the national or international standards Test Item:

- CE: Conducted emission,
- RE: Radiated emission,
- AT: Antenna terminal conducted test