



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**

TEST REPORT

NINTENDO DS

MODEL NUMBER: NTR-001

FCC ID: BKENTR001

REPORT NUMBER: 04I2987-1

ISSUE DATE: OCTOBER 07, 2004

Prepared for
NINTENDO CO., LTD.
11-1 KAMITOBA-HOKOTATE-CHO
MINAMI-KU, KYOTO
JAPAN

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888



TABLE OF CONTENTS

| | |
|---|-----------|
| 1. TEST RESULT DECLARATION | 3 |
| 2. EUT DESCRIPTION..... | 4 |
| 3. TEST METHODOLOGY | 5 |
| 4. FACILITIES AND ACCREDITATION | 5 |
| 5. CALIBRATION AND UNCERTAINTY..... | 6 |
| 5.1. MEASURING INSTRUMENT CALIBRATION..... | 6 |
| 5.2. MEASUREMENT UNCERTAINTY..... | 6 |
| 5.3. TEST AND MEASUREMENT EQUIPMENT..... | 7 |
| 6. SETUP OF EQUIPMENT UNDER TEST | 8 |
| 7. APPLICABLE LIMITS AND TEST RESULTS | 10 |
| 7.1. 6 dB BANDWIDTH..... | 10 |
| 7.2. 99% BANDWIDTH..... | 14 |
| 7.3. PEAK OUTPUT POWER..... | 18 |
| 7.4. MAXIMUM PERMISSIBLE EXPOSURE | 23 |
| 7.5. AVERAGE POWER..... | 26 |
| 7.6. PEAK POWER SPECTRAL DENSITY | 27 |
| 7.7. CONDUCTED SPURIOUS EMISSIONS..... | 31 |
| 7.8. RADIATED EMISSIONS..... | 38 |
| 7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS | 38 |
| 7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ | 41 |
| 7.9. POWERLINE CONDUCTED EMISSIONS..... | 54 |
| 8. SETUP PHOTOS..... | 58 |

1. TEST RESULT DECLARATION

COMPANY NAME: NINTENDO CO., LTD.
11-1 KAMITOBA-HOKOTATE-CHO
MINAMI-KU, KYOTO
JAPAN

EUT DESCRIPTION: NINTENDO DS

MODEL: NTR-001

DATE TESTED: OCTOBER 04-05, 2004

| APPLICABLE STANDARDS | |
|-----------------------|-------------------------|
| STANDARD | TEST RESULTS |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is a portable game machine with a Wireless 802.11 transceiver operating in the 2400-2483.5 MHz band with 13 channels.

The transmitter has a maximum peak conducted output power as follows:

| Frequency Band (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|----------------------|--------|--------------------|-------------------|
| 2412 - 2472 | 802.11 | 2.12 | 1.63 |

The radio utilizes a Dipole Antenna, with a maximum gain of 2.09 dBi.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP, NIST, or any government agency.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz | +/- 3.3 dB |
| Radiated Emission, 200 to 1000 MHz | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission | +/- 2.9 dB |

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST | | | | |
|-----------------------------------|----------------|------------------|------------|------------|
| Name of Equipment | Manufacturer | Model No. | Serial No. | Due Date |
| Spectrum Analyzer 20 Hz - 44 GHz | Agilent | E4446A | US42070220 | 1/13/2005 |
| Amplifier 1-26GHz | MITEQ | NSP2600-SP | 924341 | 4/25/205 |
| Horn Antenna, 1-18 GHz | EMCO | 3115 | 2238 | 2/4/2005 |
| Horn Antenna, 18-26 GHz | ARA | SWH-28 | 1007 | 9/12/05 |
| EMI Test Receiver | R & S | ESHS 20 | 827129/006 | 10/22/2005 |
| Spectrum Analyzer, 26.5 GHz | HP | 8593EM | 3710A00205 | 10/1/2005 |
| Line Filter | Lindgren | LMF-3489 | 497 | CNR |
| LISN, 10 kHz ~ 30 MHz | FCC | LISN-50/250-25-2 | 2023 | 10/13/2004 |
| EMI Receiver, 9 kHz ~ 2.9 GHz | HP | 8542E | 3942A00286 | 11/20/2004 |
| RF Filter Section | HP | 85420E | 3705A00256 | 11/20/2004 |
| Antenna, Bicon/Log, 25 ~ 2000 MHz | Sunol Sciences | JBL | A121003 | 12/22/2004 |
| 4.0GHz HPF | MicrTronic | HPM13351 | 1 | CNR |

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|----------------|-------------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| AC ADAPTER | KYUSHU MITSUMI | NTR-002 (JPN/USA) | N/A | N/A |
| DS CARD | NINTENDO | NTR-005 | N/A | N/A |


I/O CABLES

| I/O CABLE LIST | | | | | | |
|----------------|------|----------------------|----------------|------------|--------------|---------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | DC | 1 | DC | UNSHIELDED | 2 | N/A |

TEST SETUP

The EUT was set in continuous transmit mode. X, Y, and Z positions were investigated; "Z" position was deemed worst case. High channel was deemed worst case due to the highest output power.

SETUP DIAGRAM FOR TESTS

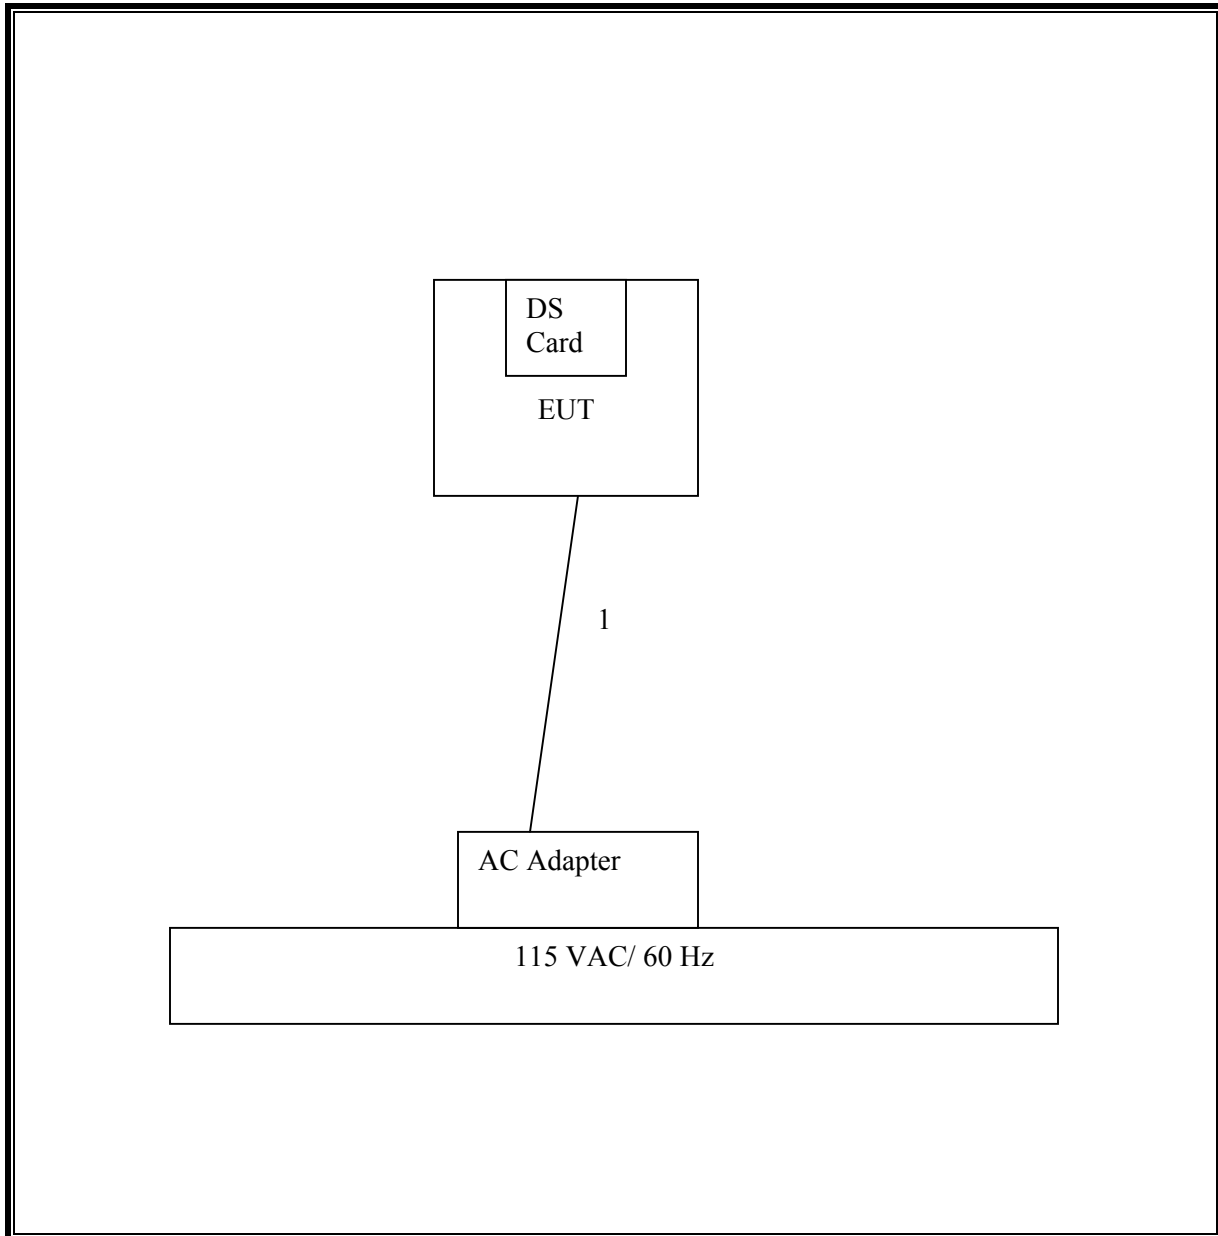

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS


No non-compliance noted:


802.11

| Channel | Frequency (MHz) | 6 dB Bandwidth (kHz) | Minimum Limit (kHz) | Margin (kHz) |
|---------|-----------------|----------------------|---------------------|--------------|
| Low | 2412 | 10300 | 500 | 9800 |
| Middle | 2442 | 9870 | 500 | 9370 |
| High | 2472 | 9970 | 500 | 9470 |

6 DB BANDWIDTH (802.11)

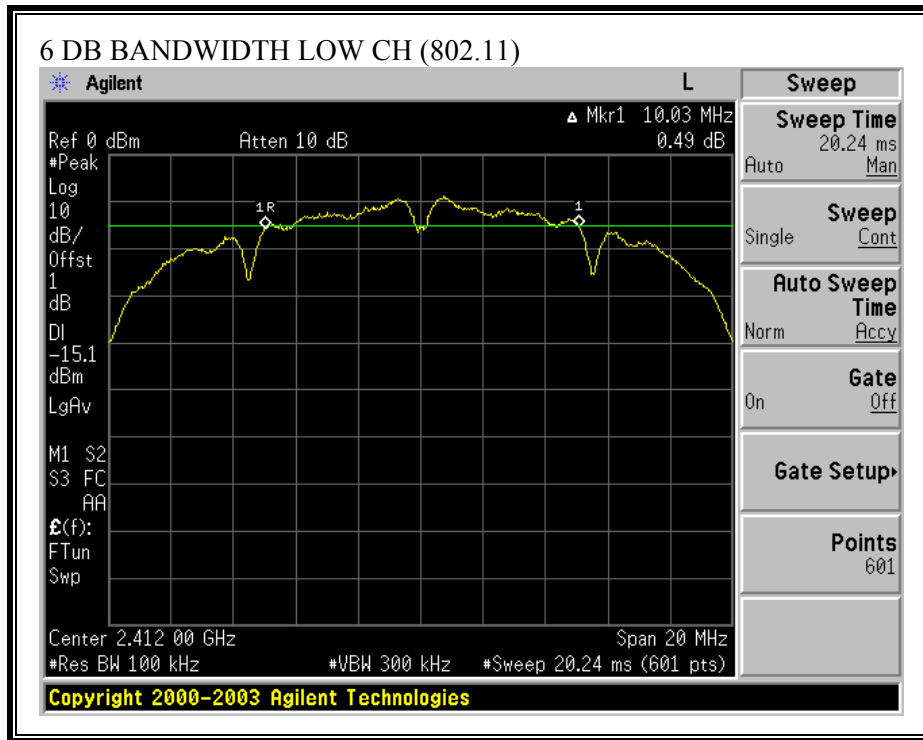

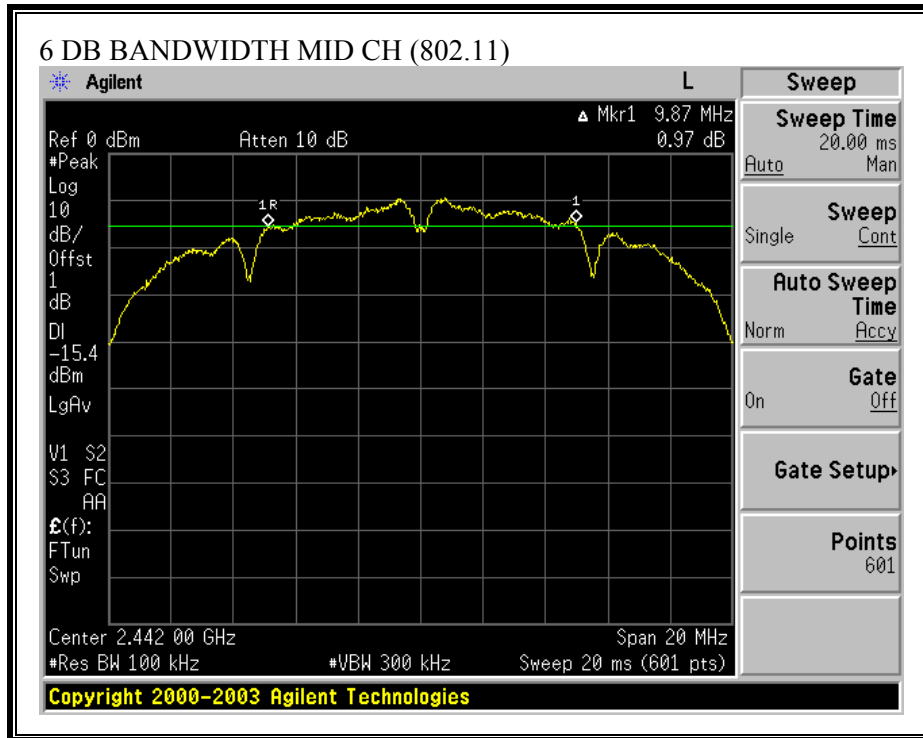

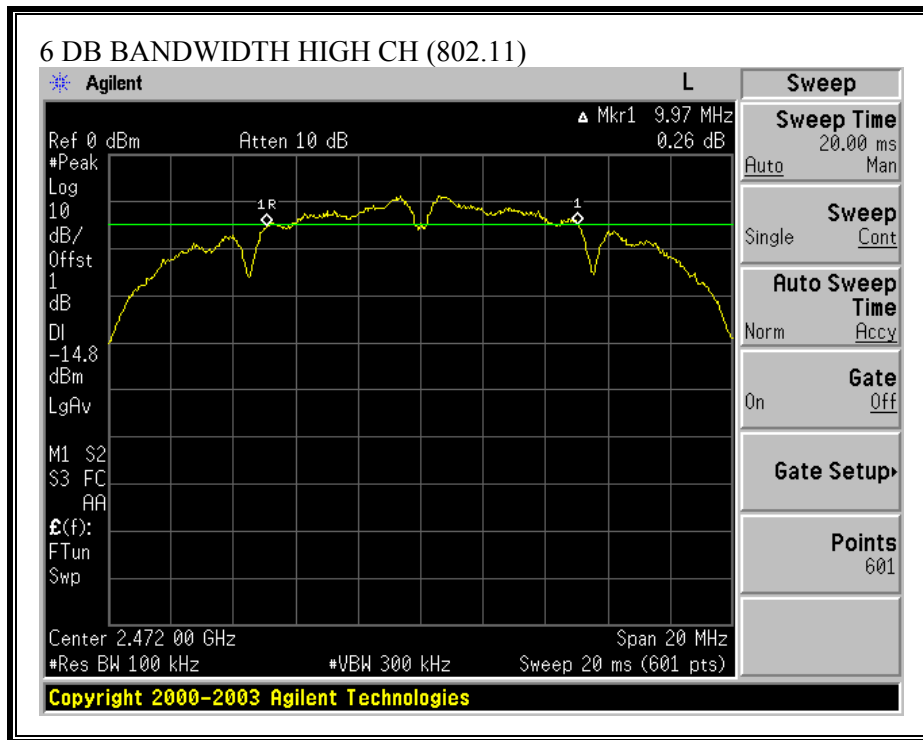

7.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS


No non-compliance noted:


802.11

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2412 | 16.4086 |
| Middle | 2442 | 16.4471 |
| High | 2472 | 16.3803 |

99% BANDWIDTH (802.11)

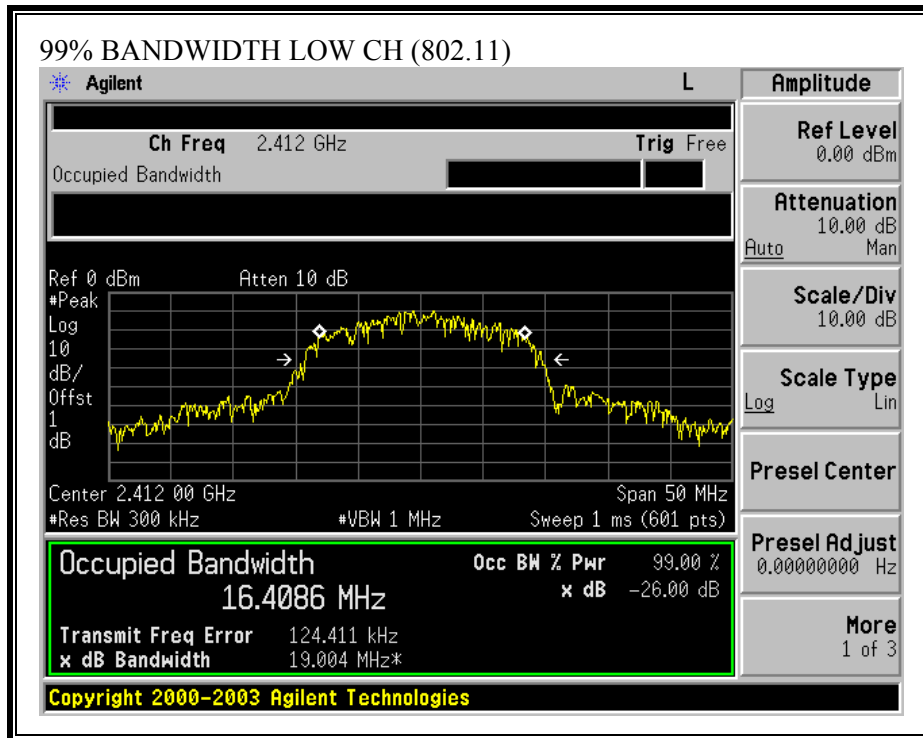

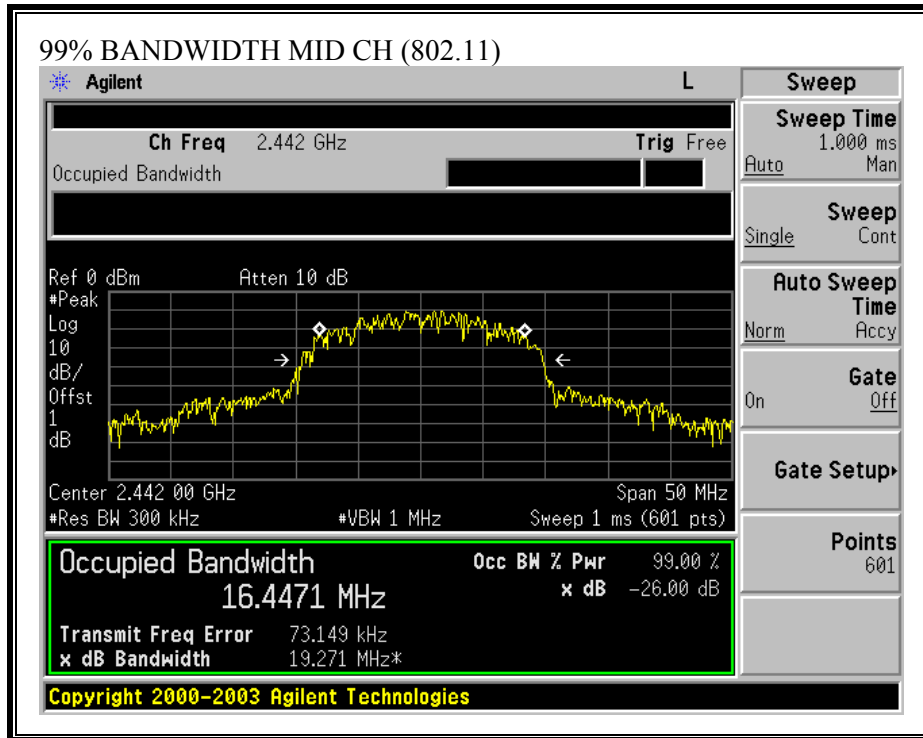

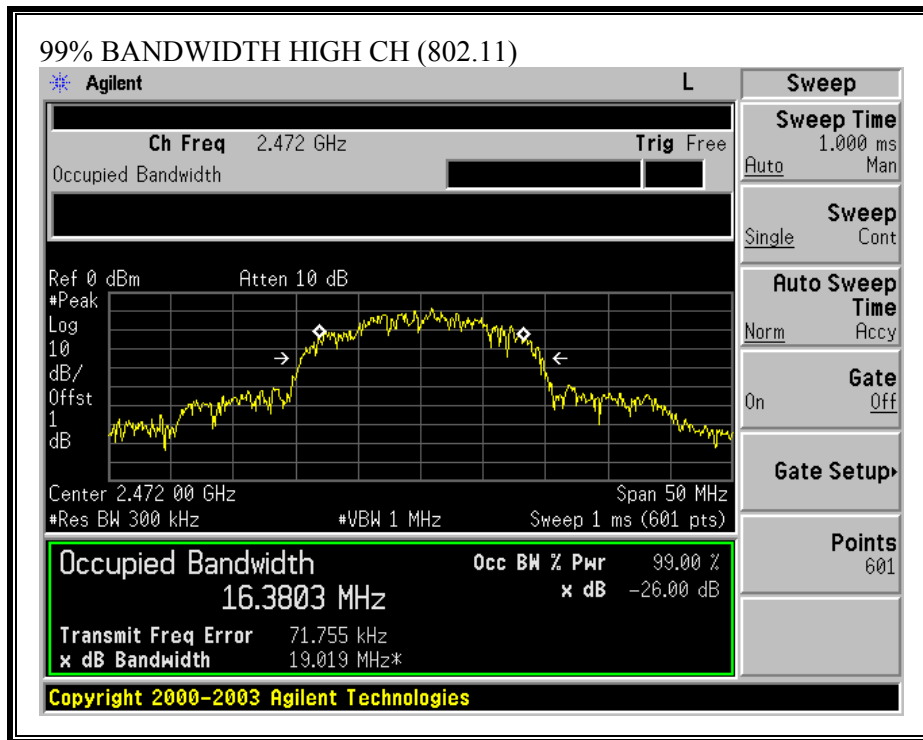

7.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS


No non-compliance noted:


802.11

| Channel | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------|----------------------------|-----------------------------|------------------------|------------------------|
| Low | 2412 | 1.84 | 30 | -28.16 |
| Middle | 2442 | 1.88 | 30 | -28.12 |
| High | 2472 | 2.12 | 30 | -27.88 |

OUTPUT POWER (802.11)

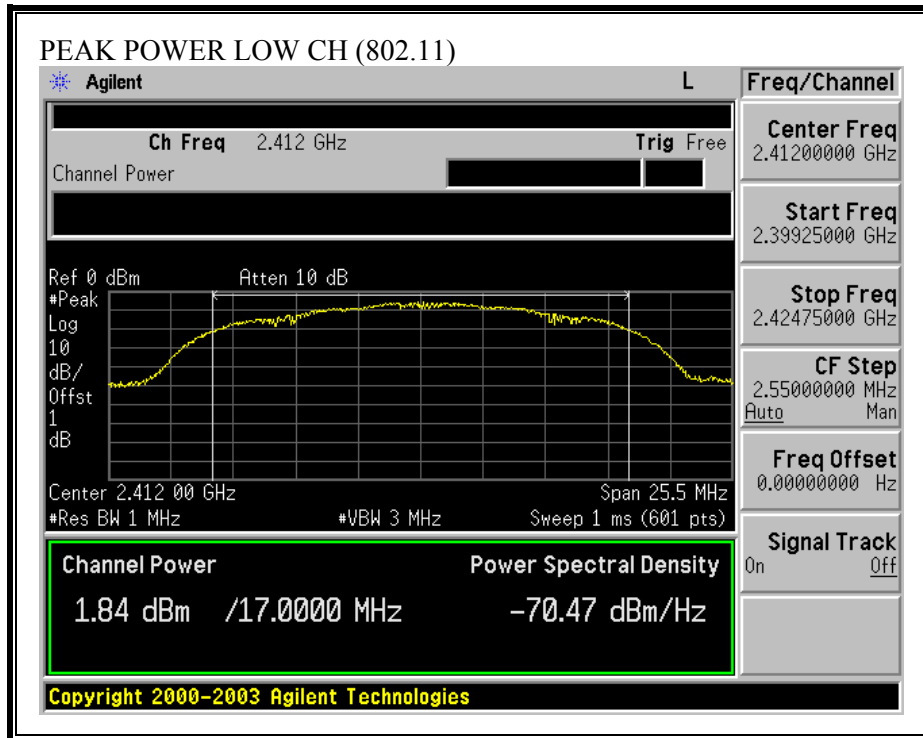

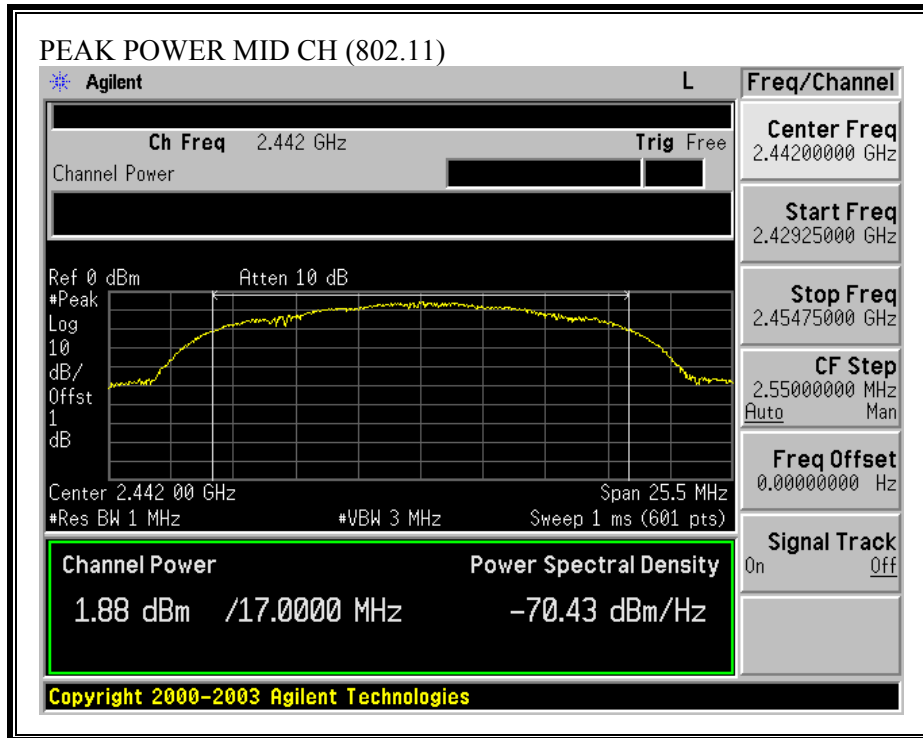

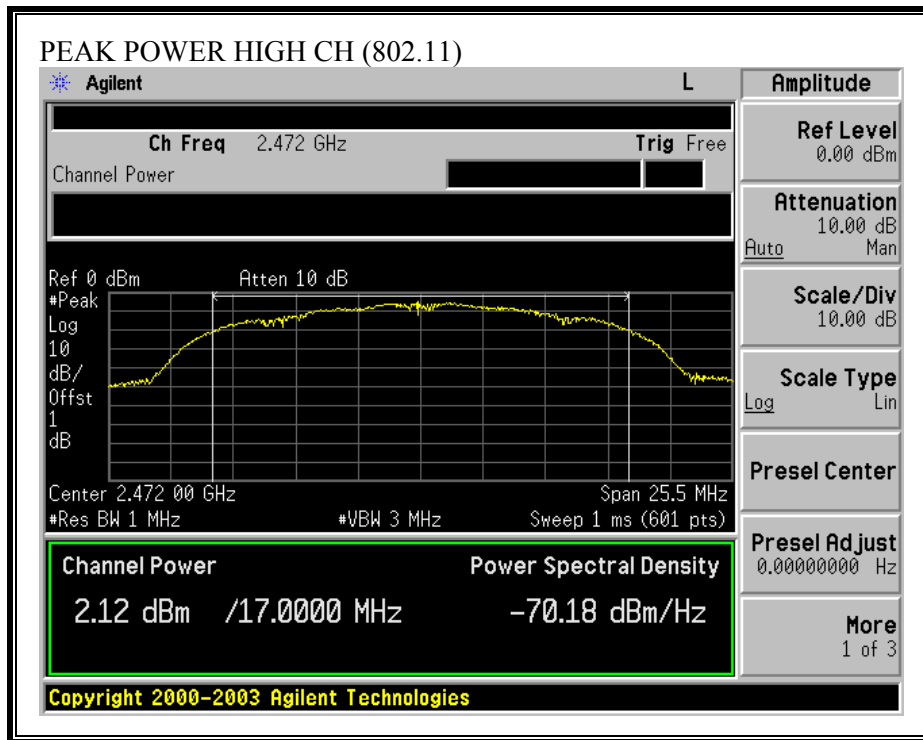

7.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3–3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0–30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30–300 | 61.4 | 0.163 | 1.0 | 6 |
| 300–1500 | | | f/300 | 6 |
| 1500–100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | | | f/1500 | 30 |
| 1500–100,000 | | | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

| Mode | Power Density Limit (mW/cm²) | Output Power (dBm) | Antenna Gain (dBi) | MPE Distance (cm) |
|-------------|--|-------------------------------|-------------------------------|------------------------------|
| 802.11b | 1.0 | 2.12 | 2.09 | 0.46 |

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 1.0 dB was entered as an offset in the power meter to allow for direct reading of power

802.11

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low | 2412 | -0.93 |
| Middle | 2442 | -0.94 |
| High | 2472 | -0.73 |

7.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:


802.11

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -21.95 | 8 | -29.95 |
| Middle | 2442 | -21.43 | 8 | -29.43 |
| High | 2472 | -21.62 | 8 | -29.62 |

PEAK POWER SPECTRAL DENSITY (802.11)

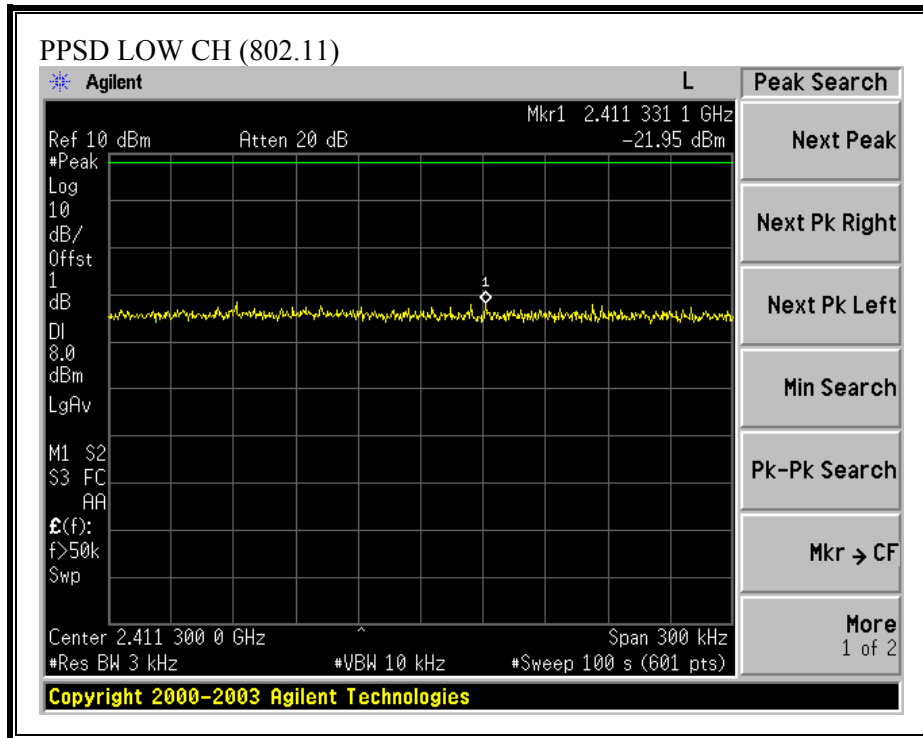

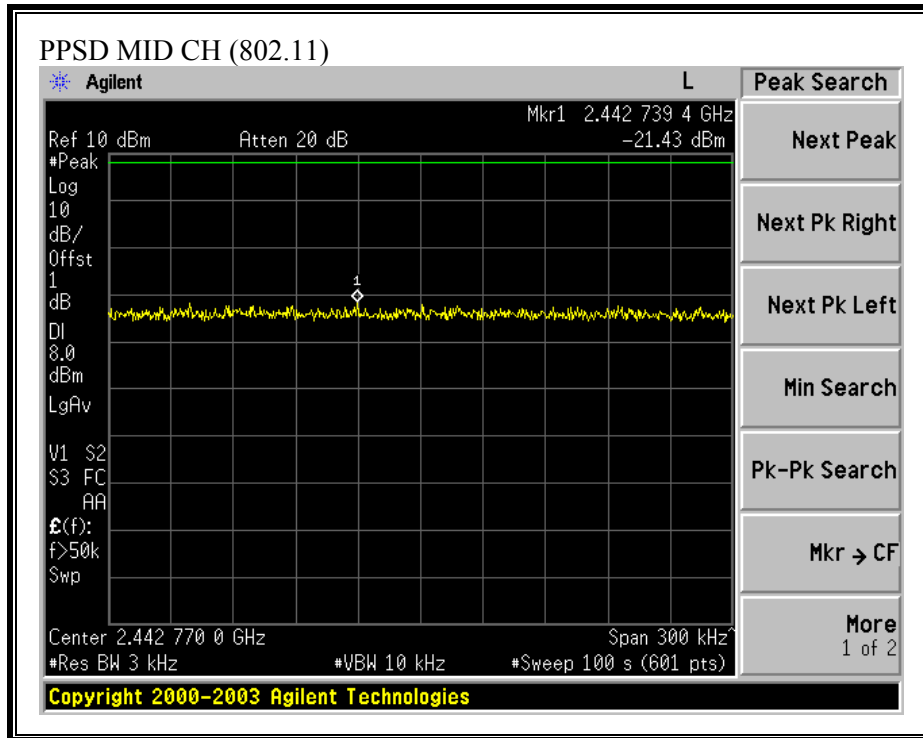

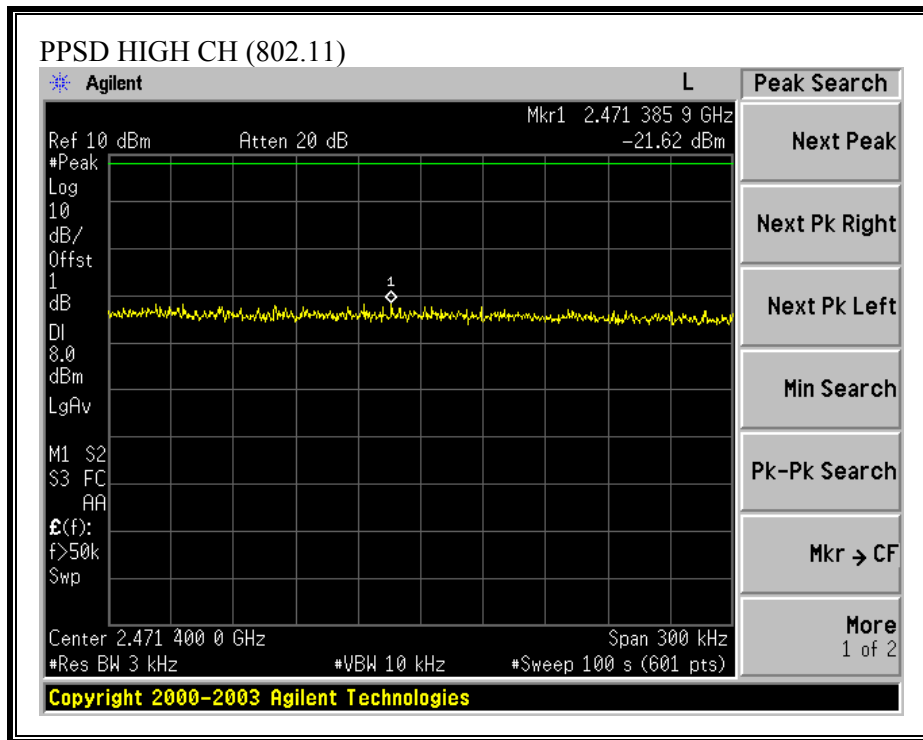

7.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11)

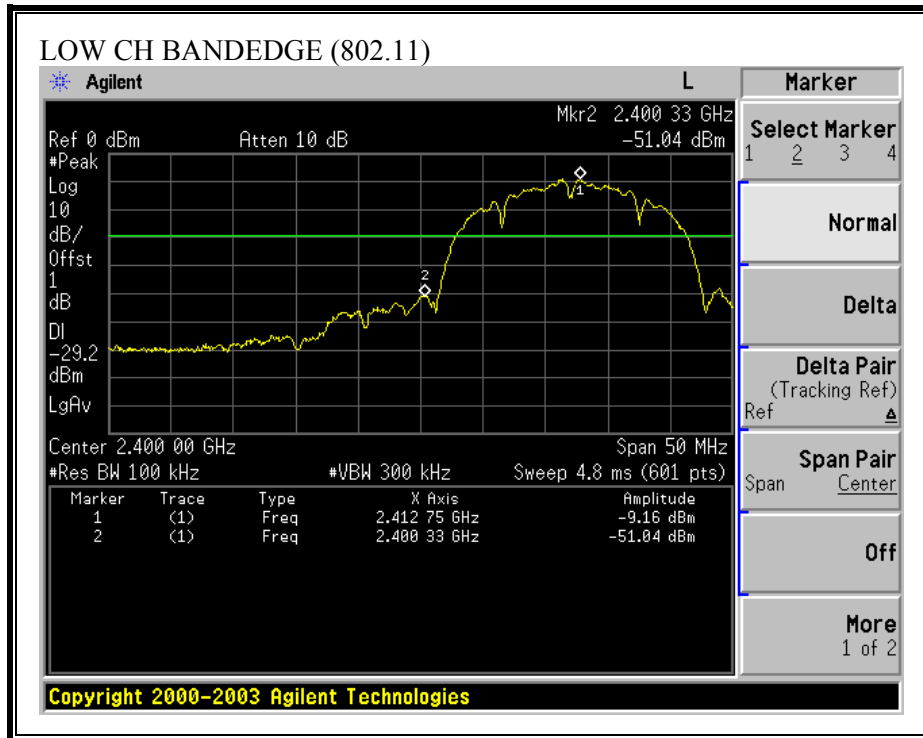

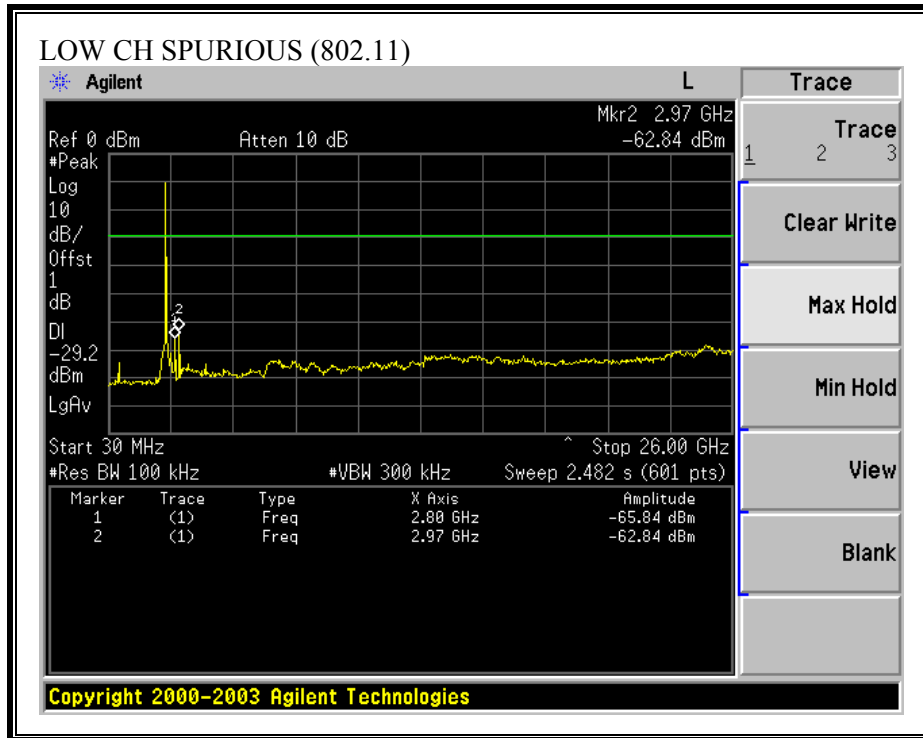



SPURIOUS EMISSIONS, MID CHANNEL (802.11)

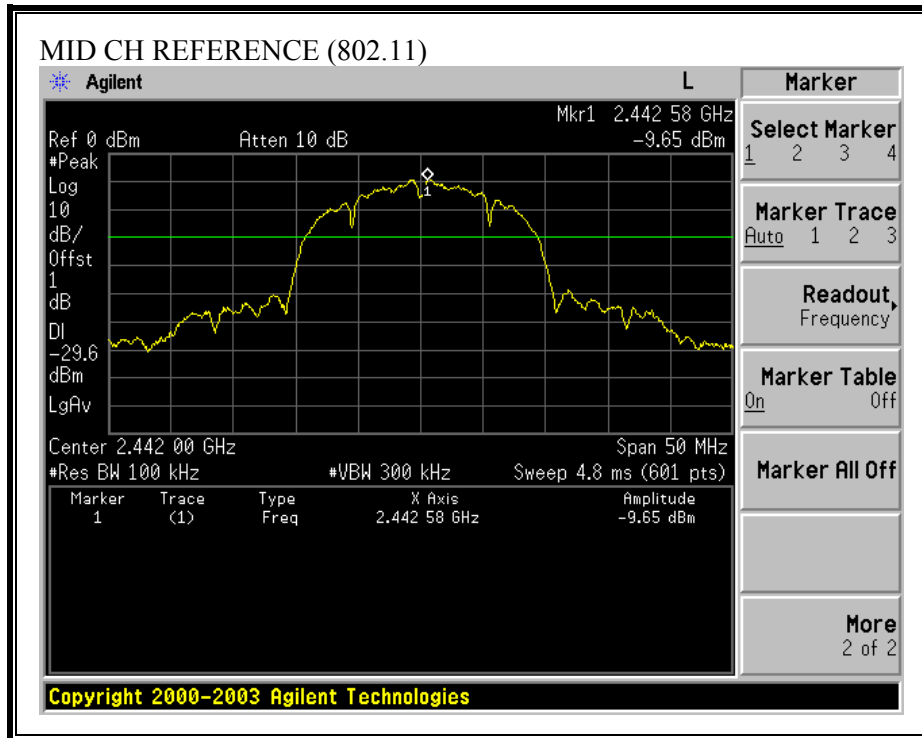

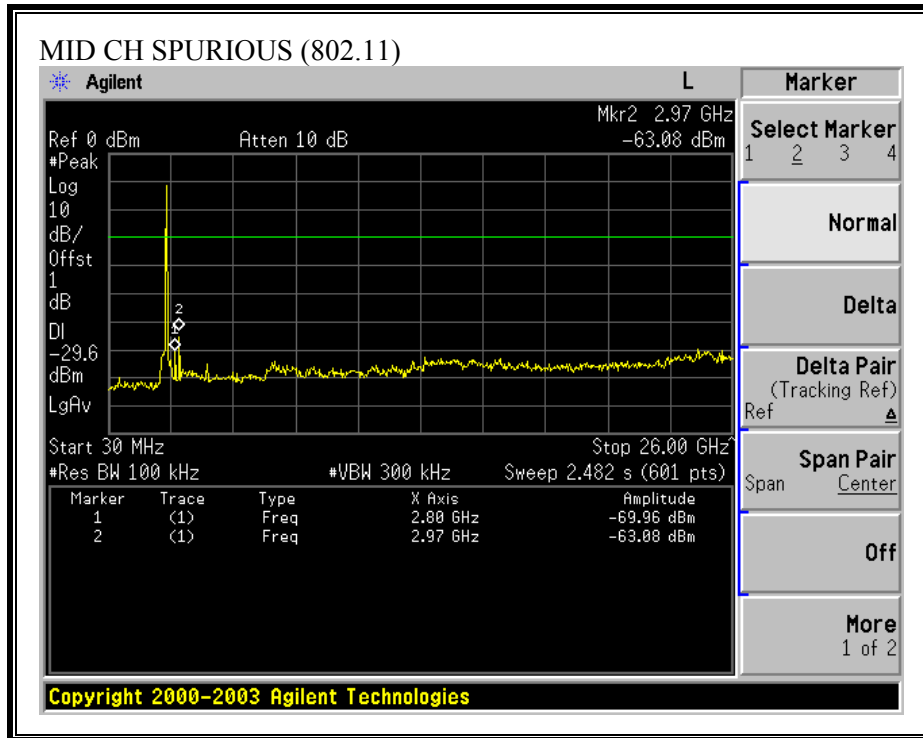

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11)

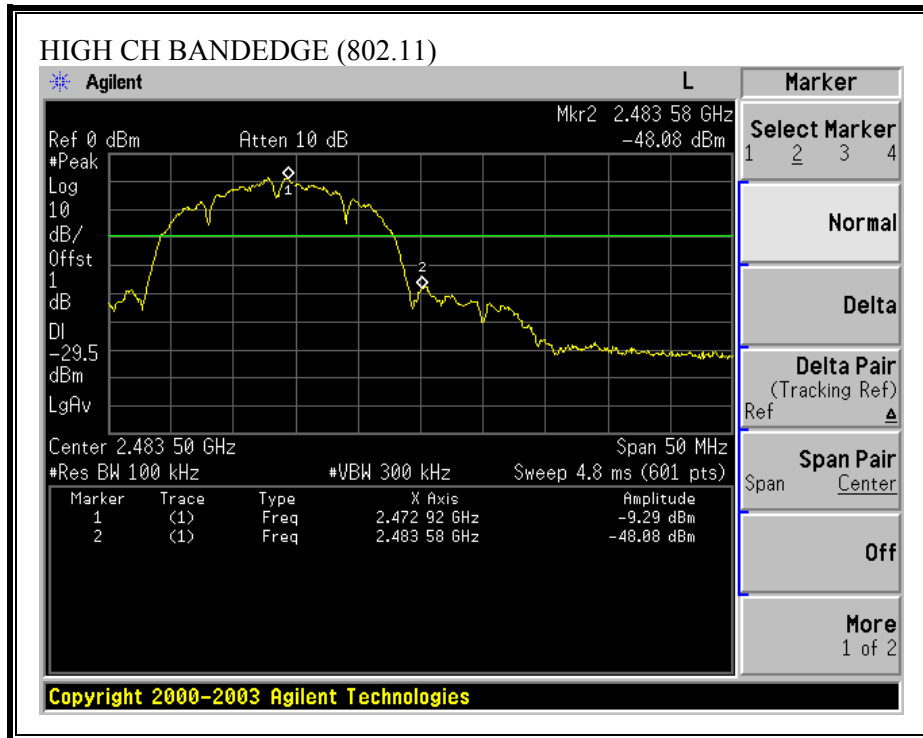

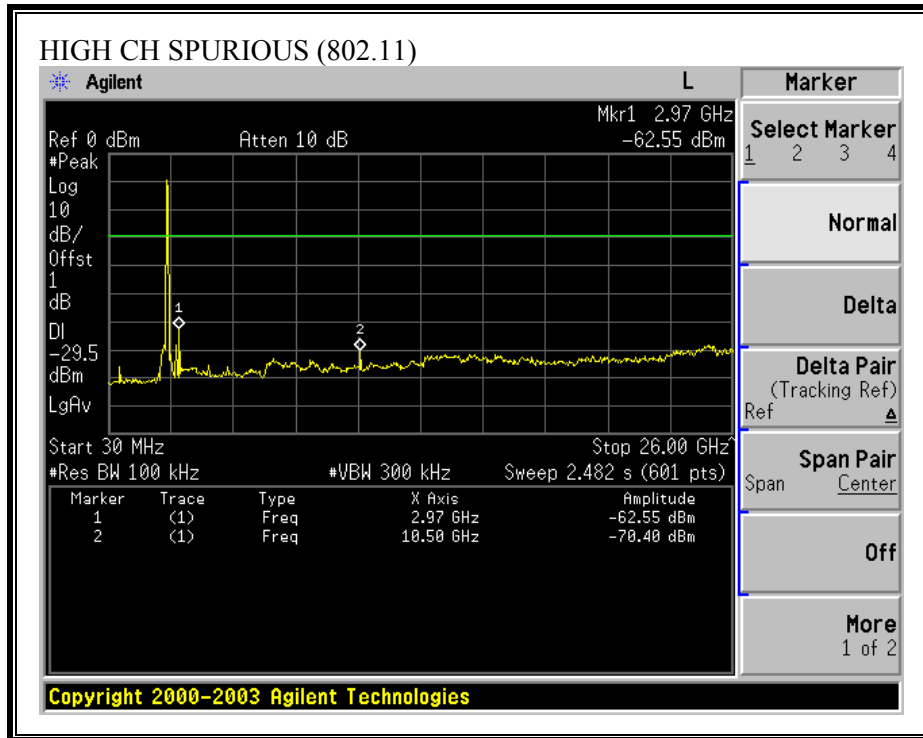

7.8. RADIATED EMISSIONS

7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


RESULTS

No non-compliance noted:


7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

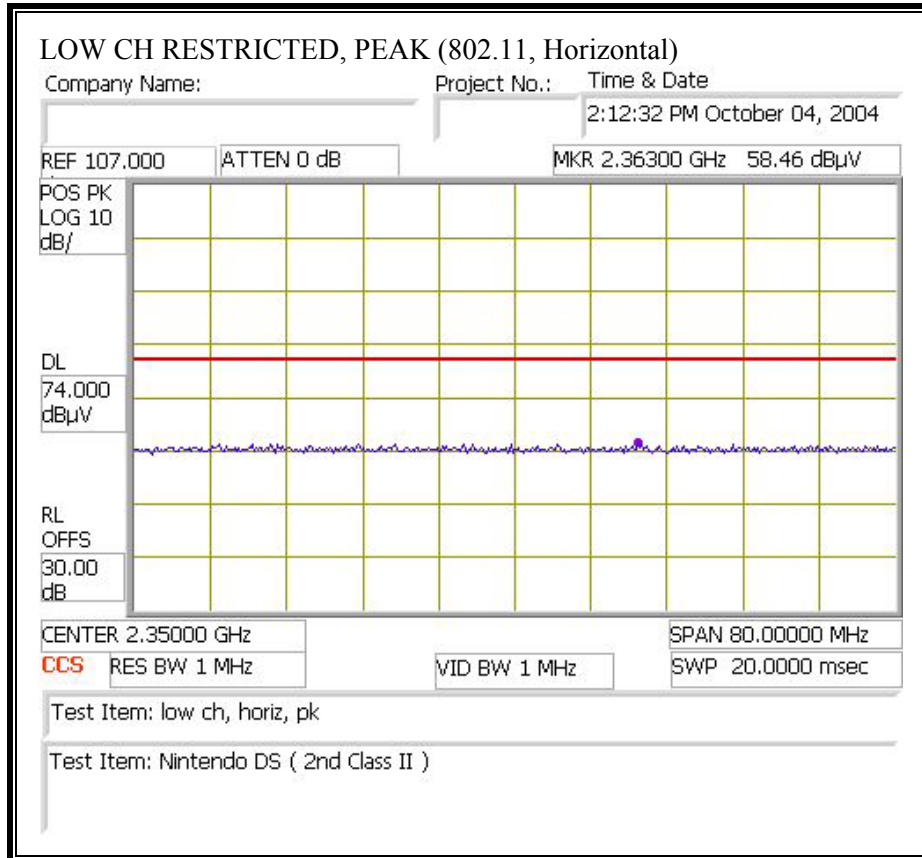

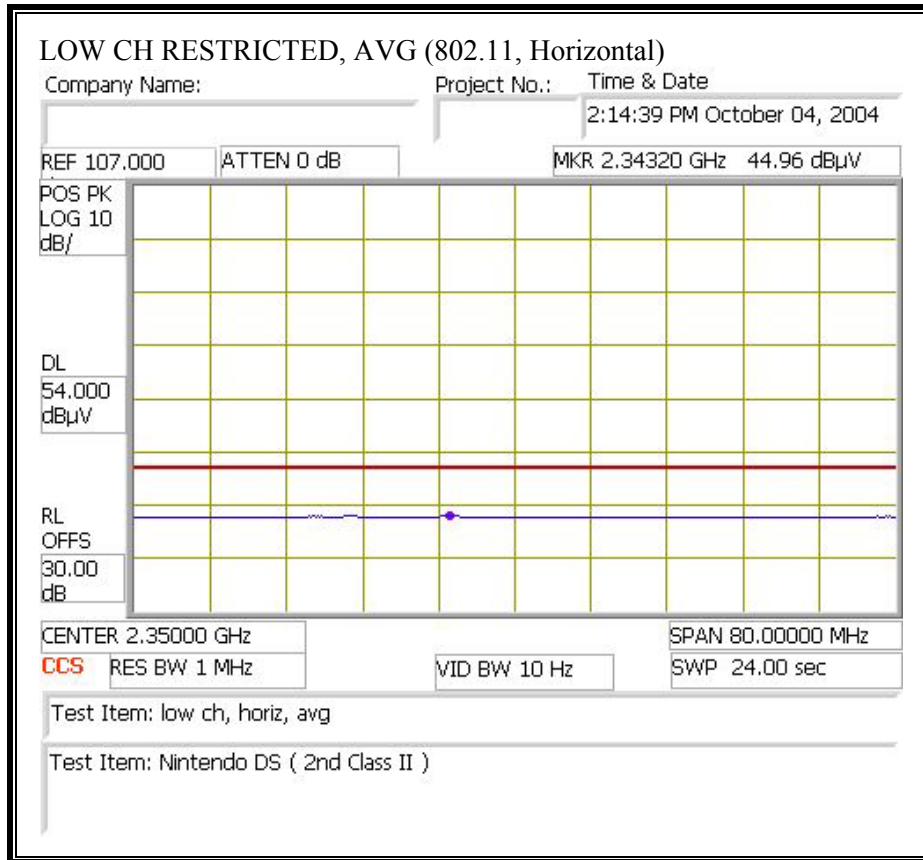



RESTRICTED BANDEGE (LOW CHANNEL, VERTICAL)

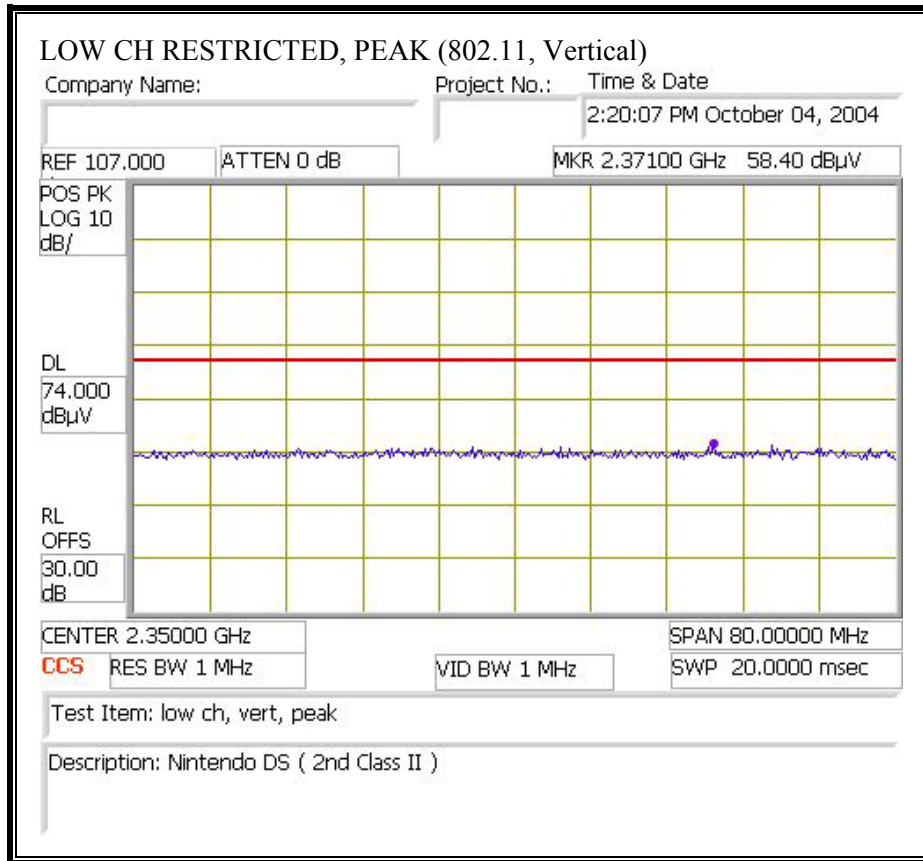

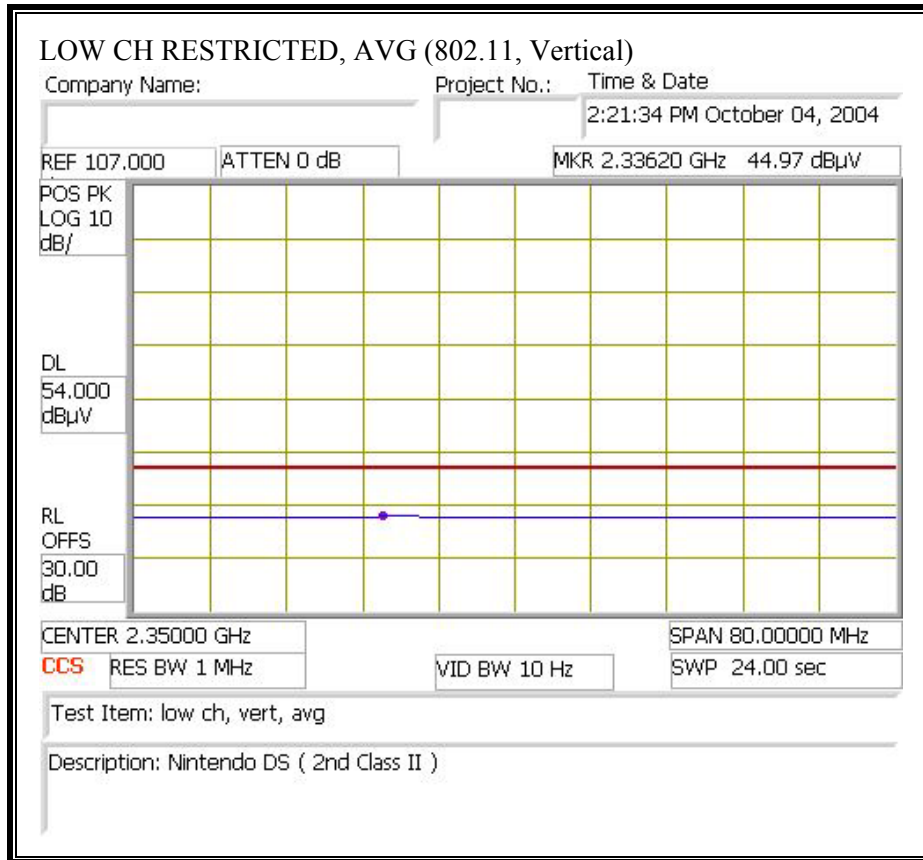



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

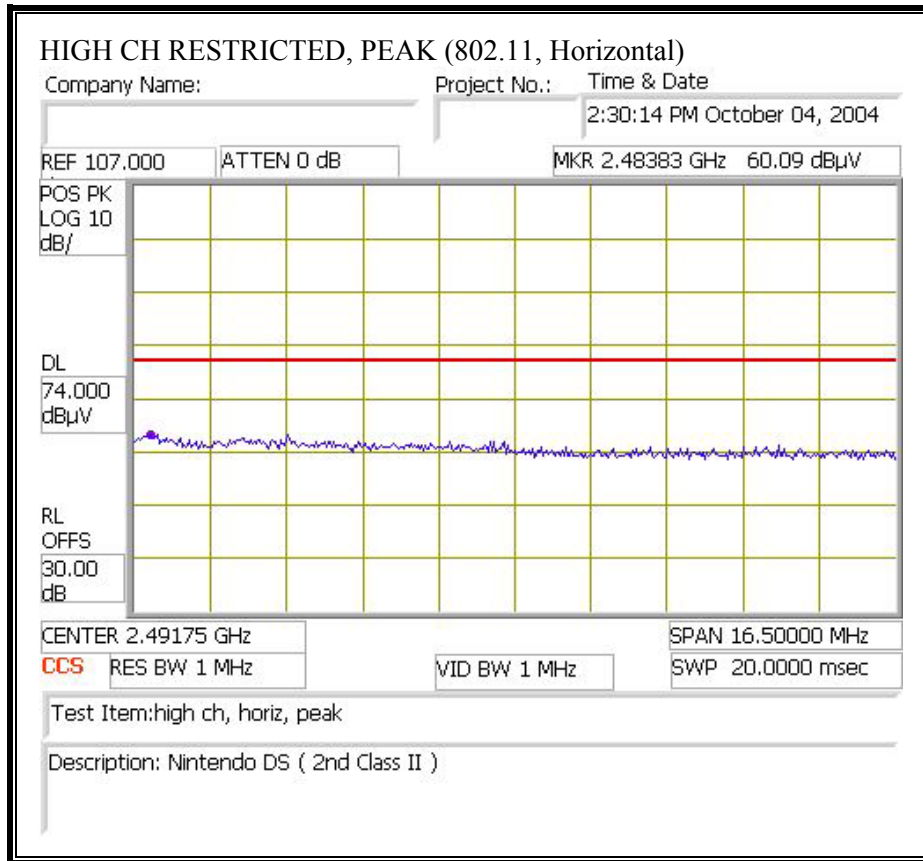

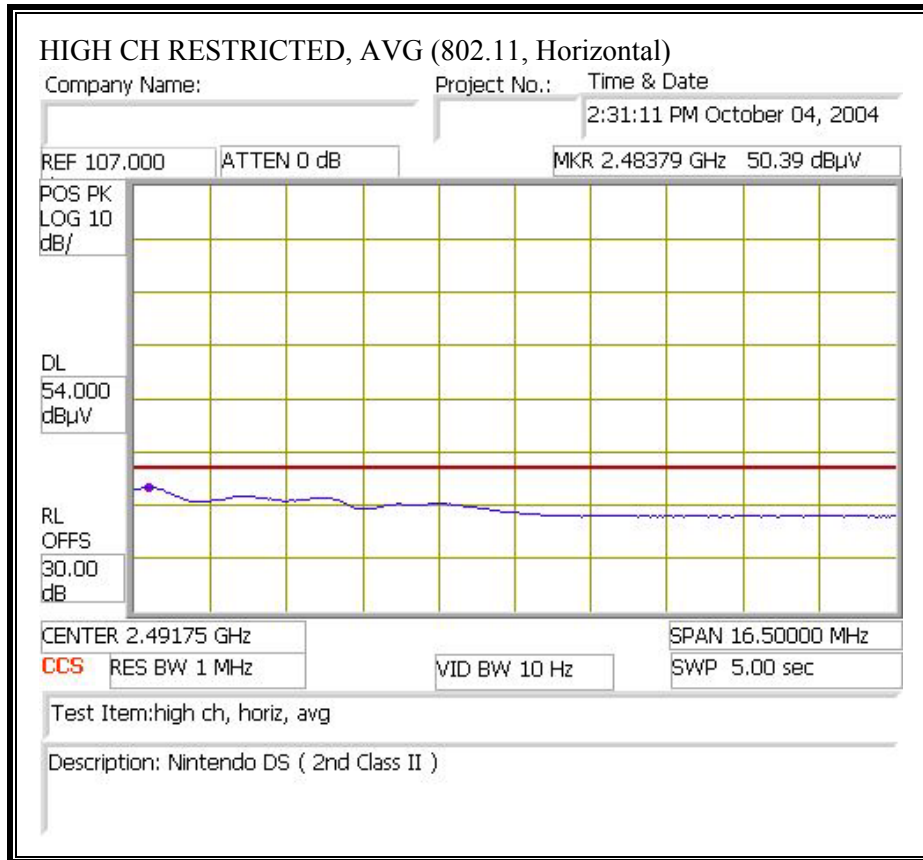

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

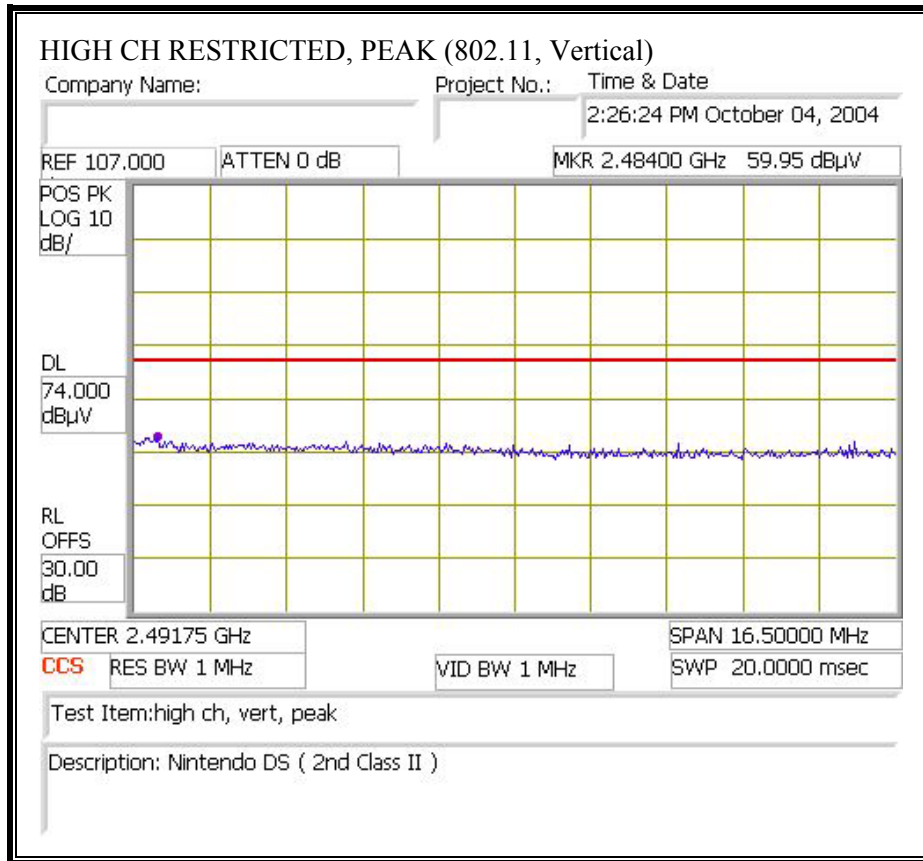

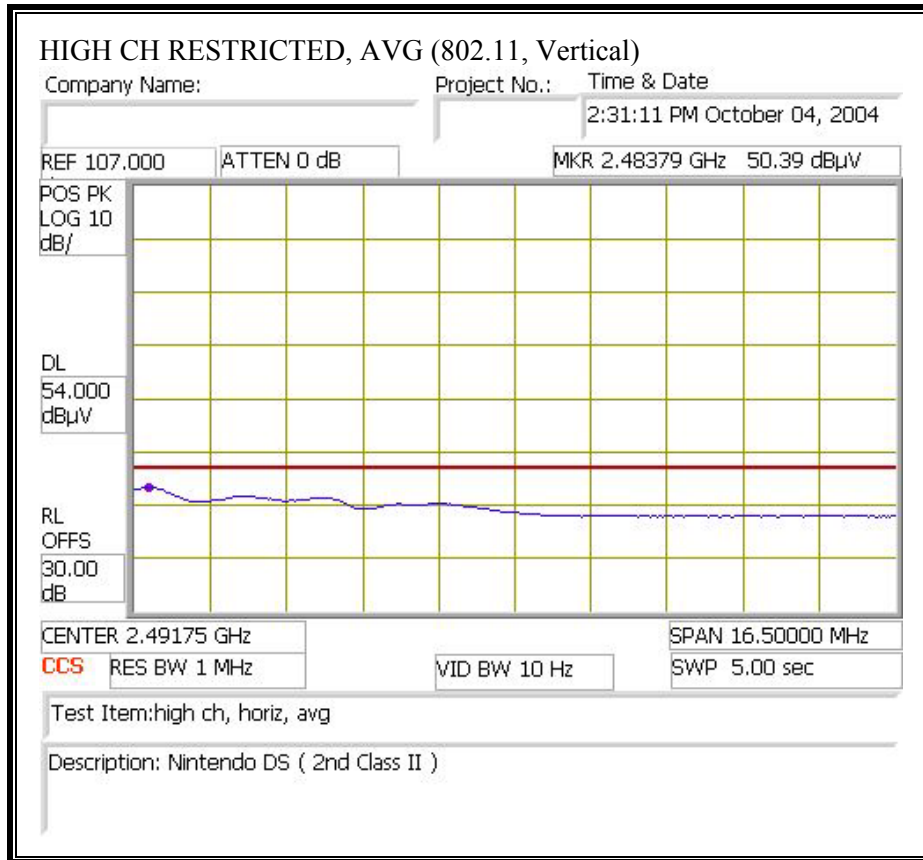

HARMONICS AND SPURIOUS EMISSIONS

10/04/04 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 04I2987-1
 Company: Nintendo Co., LTD
 EUT Descrip.: Nintendo DS (2nd Class II)
 EUT M/N: NTR-001
 Test Target: FCC class B
 Mode Oper: TX

Test Equipment:

| | | | | |
|---|---|------------------------|--------------|---------------------|
| EMCO Horn 1-18GHz T60; S/N: 2238 @3m | Pre-amplifier 1-26GHz T86 Miteq 924341 | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit FCC 15.205 |
|---|---|------------------------|--------------|---------------------|

Hi Frequency Cables

| | | | | | |
|------------------------|--------------|--------------|---------------------------|------------------|---------------|
| 2 foot cable 2_Chin | 3 foot cable | 4 foot cable | 12 foot cable 12_Thank | HPF HPF_40GHz | Reject Filter |
|------------------------|--------------|--------------|---------------------------|------------------|---------------|

Peak Measurements
 RBW=VBW=1MHz

Average Measurements
 RBW=1MHz; VEW=10Hz


| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filt dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|---|----------|--------------|---------------|---------|-------|--------|-----------|---------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Transmitting at low ch, 2412MHz | | | | | | | | | | | | | | | |
| 4.824 | 3.0 | 47.9 | 36.1 | 33.0 | 3.3 | -44.0 | 0.0 | 0.6 | 40.8 | 29.0 | 74 | 54 | -33.2 | -25.0 | V |
| 12.060 | 3.0 | 48.5 | 36.3 | 38.4 | 5.6 | -44.0 | 0.0 | 0.9 | 49.4 | 37.2 | 74 | 54 | -24.6 | -16.8 | V |
| 4.824 | 3.0 | 48.2 | 36.3 | 33.0 | 3.3 | -44.0 | 0.0 | 0.6 | 41.1 | 29.2 | 74 | 54 | -32.9 | -24.8 | H |
| 12.060 | 3.0 | 48.3 | 36.2 | 38.4 | 5.6 | -44.0 | 0.0 | 0.9 | 49.2 | 37.1 | 74 | 54 | -24.8 | -16.9 | H |
| Transmitting at mid ch, 2442MHz | | | | | | | | | | | | | | | |
| 4.884 | 3.0 | 47.5 | 35.7 | 33.0 | 3.3 | -44.1 | 0.0 | 0.6 | 40.3 | 28.5 | 74 | 54 | -33.7 | -25.5 | V |
| 7.326 | 3.0 | 48.2 | 36.1 | 35.9 | 4.1 | -45.0 | 0.0 | 0.6 | 43.8 | 31.7 | 74 | 54 | -30.2 | -22.3 | V |
| 12.210 | 3.0 | 49.3 | 36.5 | 38.5 | 5.6 | -44.2 | 0.0 | 0.9 | 50.0 | 37.2 | 74 | 54 | -24.0 | -16.8 | V |
| 4.884 | 3.0 | 48.0 | 36.0 | 33.0 | 3.3 | -44.1 | 0.0 | 0.6 | 40.8 | 28.8 | 74 | 54 | -33.2 | -25.2 | H |
| 7.326 | 3.0 | 48.7 | 36.3 | 35.9 | 4.1 | -45.0 | 0.0 | 0.6 | 44.3 | 31.9 | 74 | 54 | -29.7 | -22.1 | H |
| 12.210 | 3.0 | 50.1 | 36.7 | 38.5 | 5.6 | -44.2 | 0.0 | 0.9 | 50.8 | 37.4 | 74 | 54 | -23.2 | -16.6 | H |
| Transmitting at high ch, 2472MHz | | | | | | | | | | | | | | | |
| 4.944 | 3.0 | 47.3 | 35.6 | 33.0 | 3.3 | -44.2 | 0.0 | 0.6 | 40.1 | 28.4 | 74 | 54 | -33.9 | -25.6 | V |
| 7.416 | 3.0 | 48.9 | 36.3 | 36.1 | 4.1 | -45.0 | 0.0 | 0.6 | 44.7 | 32.1 | 74 | 54 | -29.3 | -21.9 | V |
| 12.360 | 3.0 | 49.1 | 36.4 | 38.5 | 5.6 | -44.5 | 0.0 | 0.9 | 49.6 | 36.9 | 74 | 54 | -24.4 | -17.1 | V |
| 4.944 | 3.0 | 47.6 | 35.7 | 33.0 | 3.3 | -44.2 | 0.0 | 0.6 | 40.4 | 28.5 | 74 | 54 | -33.6 | -25.5 | H |
| 7.416 | 3.0 | 49.3 | 36.5 | 36.1 | 4.1 | -45.0 | 0.0 | 0.6 | 45.1 | 32.3 | 74 | 54 | -28.9 | -21.7 | H |
| 12.360 | 3.0 | 49.5 | 36.5 | 38.5 | 5.6 | -44.5 | 0.0 | 0.9 | 50.0 | 37.0 | 74 | 54 | -24.0 | -17.0 | H |

Note: No other emissions were detected above the system noise floor .

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

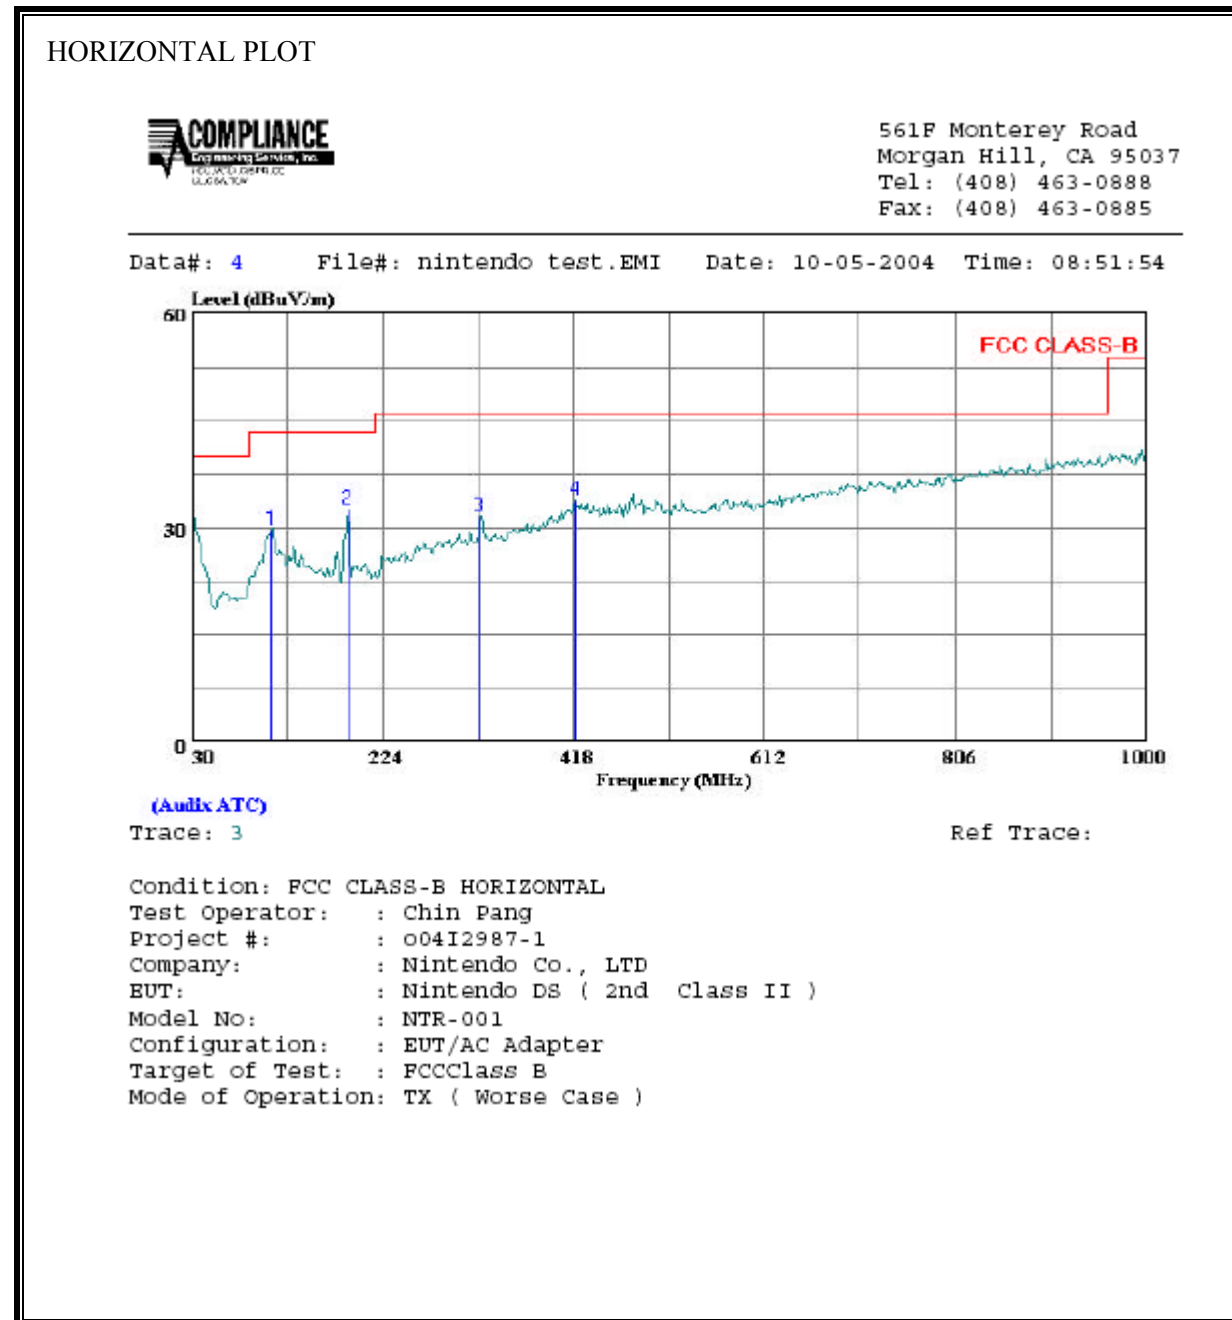


HORIZONTAL DATA

Page: 1

| | Freq | Remark | Read Level | Factor | Level | Limit Line | Over Limit |
|---|---------|--------|------------|--------|--------|------------|------------|
| | MHz | | dBuV | dB | dBuV/m | dBuV/m | dB |
| 1 | 110.510 | Peak | 15.82 | 13.86 | 29.68 | 43.50 | -13.82 |
| 2 | 189.080 | Peak | 19.17 | 13.40 | 32.57 | 43.50 | -10.93 |
| 3 | 322.940 | Peak | 14.88 | 16.66 | 31.54 | 46.00 | -14.46 |
| 4 | 419.940 | Peak | 14.83 | 19.06 | 33.89 | 46.00 | -12.11 |

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

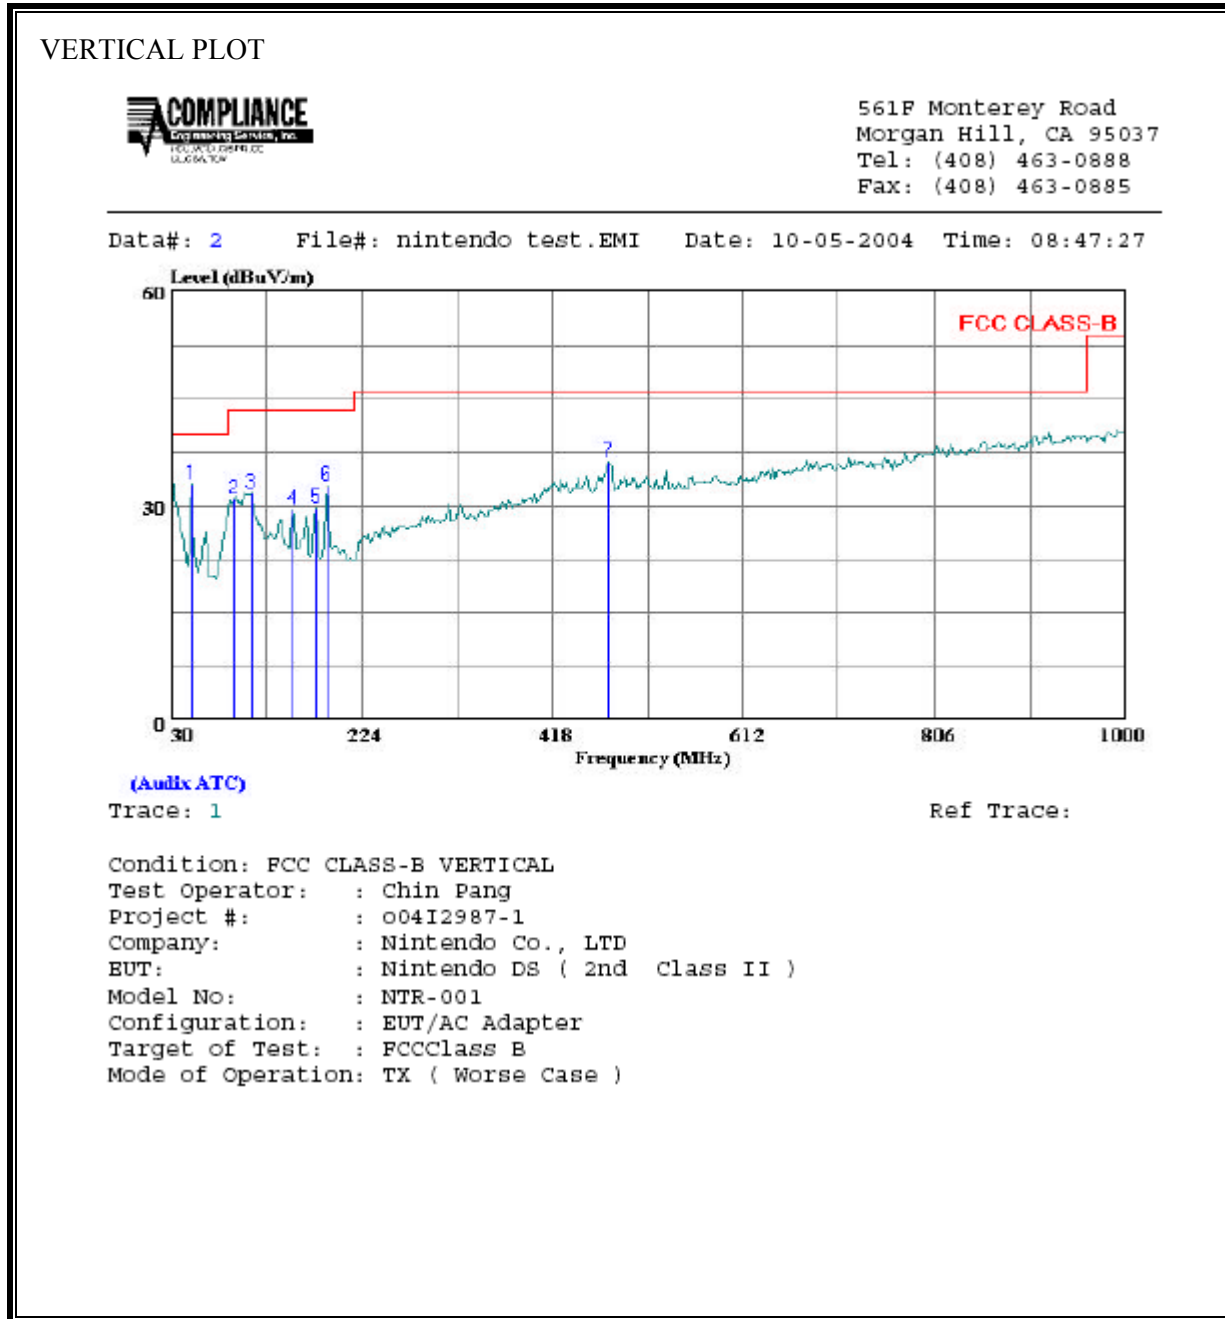

VERTICAL DATA

Page: 1

| | Freq | Remark | Read Level | Factor | Level | Limit Line | Over Limit |
|---|---------|--------|---------------|--------|--------|---------------|---------------|
| | MHz | | dBuV | dB | dBuV/m | dBuV/m | dB |
| 1 | 51.340 | Peak | 23.38 | 9.57 | 32.95 | 40.00 | -7.05 |
| 2 | 94.020 | Peak | 21.38 | 9.61 | 30.99 | 43.50 | -12.51 |
| 3 | 111.480 | Peak | 17.63 | 14.10 | 31.73 | 43.50 | -11.77 |
| 4 | 153.190 | Peak | 15.11 | 14.48 | 29.59 | 43.50 | -13.91 |
| 5 | 177.440 | Peak | 16.22 | 13.38 | 29.60 | 43.50 | -13.90 |
| 6 | 189.080 | Peak | 19.47 | 13.40 | 32.87 | 43.50 | -10.63 |
| 7 | 475.230 | Peak | 15.65 | 20.42 | 36.07 | 46.00 | -9.93 |

7.9. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

6 WORST EMISSIONS

| CONDUCTED EMISSIONS DATA (115VAC 60Hz) | | | | | | | | | |
|--|-----------|-----------|-----------|-------|-------|-------|---------|---------|---------|
| Freq. | Reading | | | Class | Limit | EN B | Margin | | Remark |
| (MHz) | PK (dBuV) | QP (dBuV) | AV (dBuV) | (dB) | QP | AV | QP (dB) | AV (dB) | L1 / L2 |
| 0.26 | 41.30 | -- | -- | 0.00 | 62.80 | 52.80 | -21.50 | -11.50 | L1 |
| 0.47 | 32.74 | -- | -- | 0.00 | 56.74 | 46.74 | -24.00 | -14.00 | L1 |
| 1.60 | 34.71 | -- | -- | 0.00 | 56.00 | 46.00 | -21.29 | -11.29 | L1 |
| 0.26 | 42.34 | -- | -- | 0.00 | 62.80 | 52.80 | -20.46 | -10.46 | L2 |
| 0.46 | 34.14 | -- | -- | 0.00 | 57.03 | 47.03 | -22.89 | -12.89 | L2 |
| 1.43 | 32.60 | -- | -- | 0.00 | 56.00 | 46.00 | -23.40 | -13.40 | L2 |
| 6 Worst Data | | | | | | | | | |

LINE 1 RESULTS

