

MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac

FCC ID: BKMAE-STI6110B
APPLICANT: SEIKO EPSON CORPORATION
Application Type: Certification
Product: Streaming Media Player
Model No.: STI6110B
Brand Name: EPSON
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part15 Subpart E (Section 15.407)
Receive Date: June 30, 2021
Test Date: July 07 ~ 19, 2021

Tested By : Kevin Ker
(Kevin Ker)

Reviewed By : Paddy Chen
(Paddy Chen)

Approved By : Chenz Ker
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2106TW0004-U4	V1.0	Original report	2021-08-10	Valid

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	9
2.4. Description of Available Antennas	9
2.5. Description of Antenna RF Port	10
2.6. Test Mode	10
2.7. Configuration of Test System.....	11
2.8. Test System Details.....	11
2.9. Description of Test Software.....	11
2.10. Applied Standards	12
2.11. Duty Cycle	12
2.12. Test Configuration	13
2.13. EMI Suppression Device(s)/Modifications	13
2.14. Labeling Requirements.....	13
3. DESCRIPTION OF TEST	14
3.1. Evaluation Procedure	14
3.2. AC Line Conducted Emissions	14
3.3. Radiated Emissions.....	15
4. ANTENNA REQUIREMENTS.....	16
5. TEST EQUIPMENT CALIBRATION DATE.....	17
6. MEASUREMENT UNCERTAINTY.....	18
7. TEST RESULT	19
7.1. Summary	19
7.2. 26dB Bandwidth Measurement.....	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup	20
7.2.5. Test Result.....	21

7.3.	6dB Bandwidth Measurement.....	27
7.3.1.	Test Limit	27
7.3.2.	Test Procedure used.....	27
7.3.3.	Test Setting.....	27
7.3.4.	Test Setup	27
7.3.5.	Test Result.....	28
7.4.	Output Power Measurement.....	32
7.4.1.	Test Limit	32
7.4.2.	Test Procedure Used	32
7.4.3.	Test Setting.....	32
7.4.4.	Test Setup	32
7.4.5.	Test Result.....	33
7.5.	Transmit Power Control	35
7.5.1.	Test Limit	35
7.5.2.	Test Procedure Used	35
7.5.3.	Test Setting.....	35
7.5.4.	Test Setup	35
7.5.5.	Test Result.....	35
7.6.	Power Spectral Density Measurement.....	36
7.6.1.	Test Limit	36
7.6.2.	Test Procedure Used	36
7.6.3.	Test Setting.....	36
7.6.4.	Test Setup	37
7.6.5.	Test Result.....	38
7.7.	Frequency Stability Measurement.....	50
7.7.1.	Test Limit	50
7.7.2.	Test Procedure Used	50
7.7.3.	Test Setup	51
7.7.4.	Test Result.....	52
7.8.	Radiated Spurious Emission Measurement	53
7.8.1.	Test Limit	53
7.8.2.	Test Procedure Used	53
7.8.3.	Test Setting.....	53
7.8.4.	Test Setup	55
7.8.5.	Test Result.....	56
7.9.	Radiated Restricted Band Edge Measurement	114
7.9.1.	Test Limit	114
7.9.2.	Test Procedure Used	115
7.9.3.	Test Setting.....	116

7.9.4. Test Setup	117
7.9.5. Test Result.....	118
7.10. AC Conducted Emissions Measurement.....	165
7.10.1. Test Limit	165
7.10.2. Test Setup	165
7.10.3. Test Result.....	166
8. CONCLUSION.....	168
Appendix A - Test Setup Photograph	169
Appendix B - External Photograph.....	170
Appendix C - Internal Photograph	171

General Information

Applicant	SEIKO EPSON CORPORATION
Applicant Address	3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan
Manufacturer	SEIKO EPSON CORPORATION
Manufacturer Address	3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247
Test Device Serial No.	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

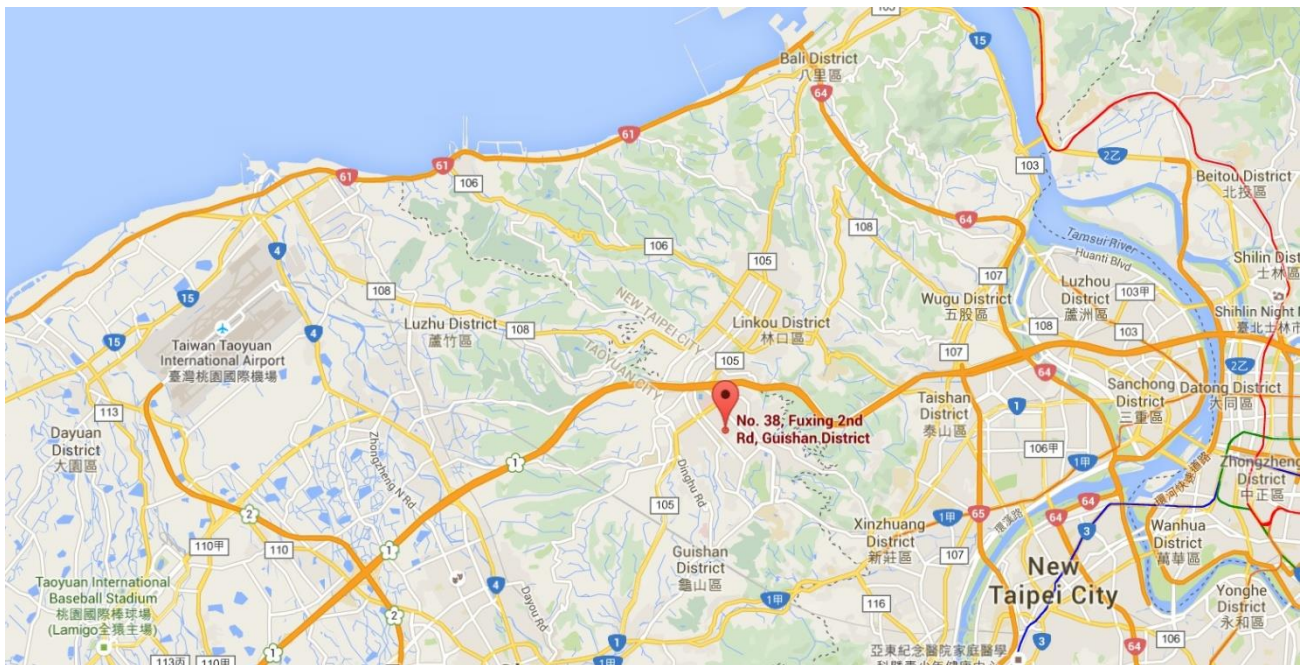

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Streaming Media Player
Model No.:	STI6110B
Brand Name:	EPSON
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	v5.1 (Dual mode)
EUT Identification No.:	20210628Sample#06 (Conducted) 20210628Sample#08 (Radiated & AC conducted emission)
Power Type	DC 5V

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	Tx Paths	Antenna Gain (dBi)		CDD Directional Gain (dBi)	
			Ant 1	Ant 2	For Power	For PSD
Wi-Fi Antenna						
PCB Antenna	2412 ~ 2462	2	1.8	1.6	1.8	4.81
	5150 ~ 5250	2	6.4	7.1	7.1	10.11
	5725 ~ 5850	2	3.0	2.2	3.0	6.01
Bluetooth Antenna						
PCB Antenna	2402 ~ 2480	1	--	1.6	--	--

Note:


The EUT supports SISO (802.11b only) and Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices,
 Array Gain = 0 dB for $N_{ANT} \leq 4$;

2.5. Description of Antenna RF Port


Wi-Fi & Bluetooth Antenna RF Port		
Software Control Port	Ant 1 (Wi-Fi)	Ant 2 (Wi-Fi & Bluetooth)
 <p>The photograph shows a green printed circuit board (PCB) antenna module. On the left side, there are two ports. The upper port is labeled 'Ant 2' in red text with a red arrow pointing to it. The lower port is labeled 'Ant 1' in red text with a red arrow pointing to it. Both ports have a circular SMA connector and a small rectangular component with a '+' sign. The rest of the PCB is a solid green color. The module is placed on a blue textured background.</p>		

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

2.7. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

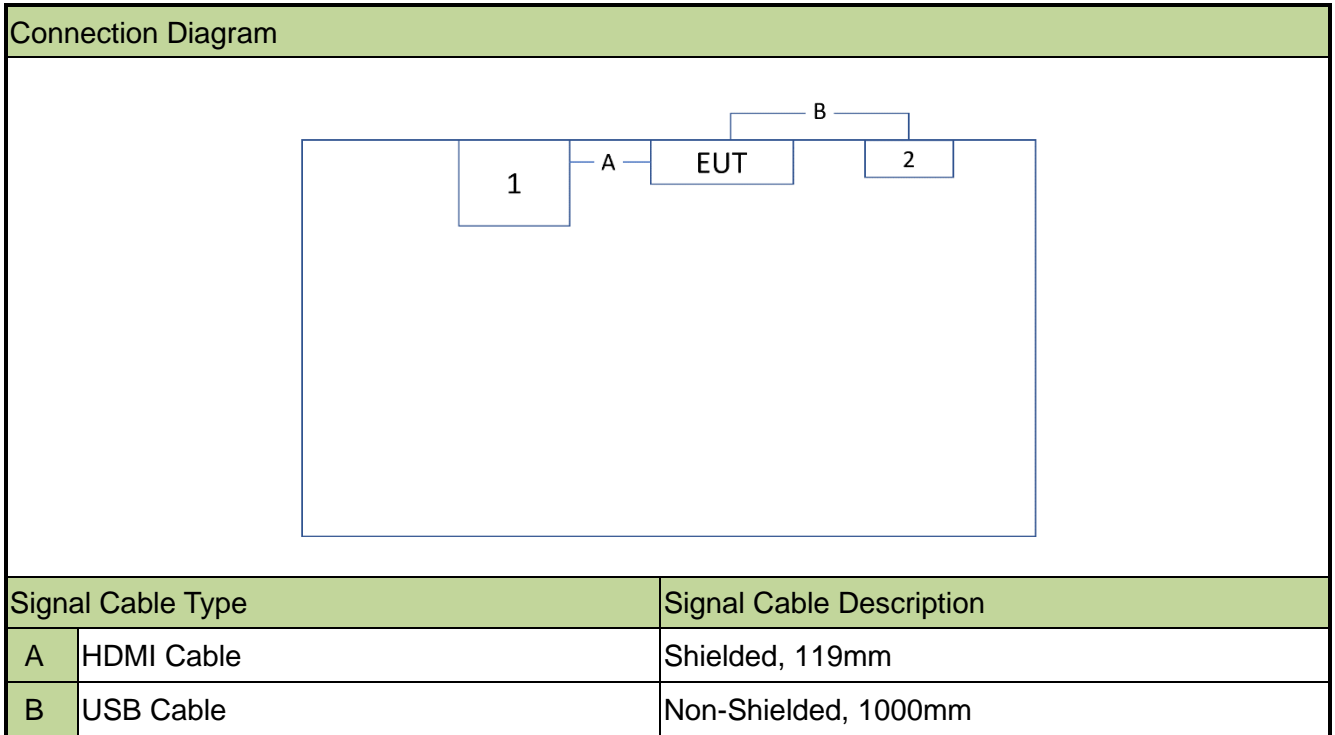

2.8. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 LED Display	DELL	U2718Q	N/A	Non-Shielded, 1.8m
2 Adapter	Chenyang	UC13US	N/A	N/A

2.9. Description of Test Software

The test utility software used during testing was “Ampak RFTestTool” and the command provided by the customer. The Ampak RFTestTool version was VER 5.8.

Note: Final power setting please refer to operational description.

2.10. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:


- FCC Part 15.247
- KDB 789033 D02v02r01,
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.11. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	99.09%
802.11n-HT20	98.82%
802.11n-HT20	98.59%
802.11ac-VHT20	98.87%
802.11ac-VHT40	98.53%
802.11ac-VHT80	98.98%

Duty Cycle (T = Transmission Duration)	
802.11a (T = 2.063ms)	802.11n-HT20 (T = 1.919ms)

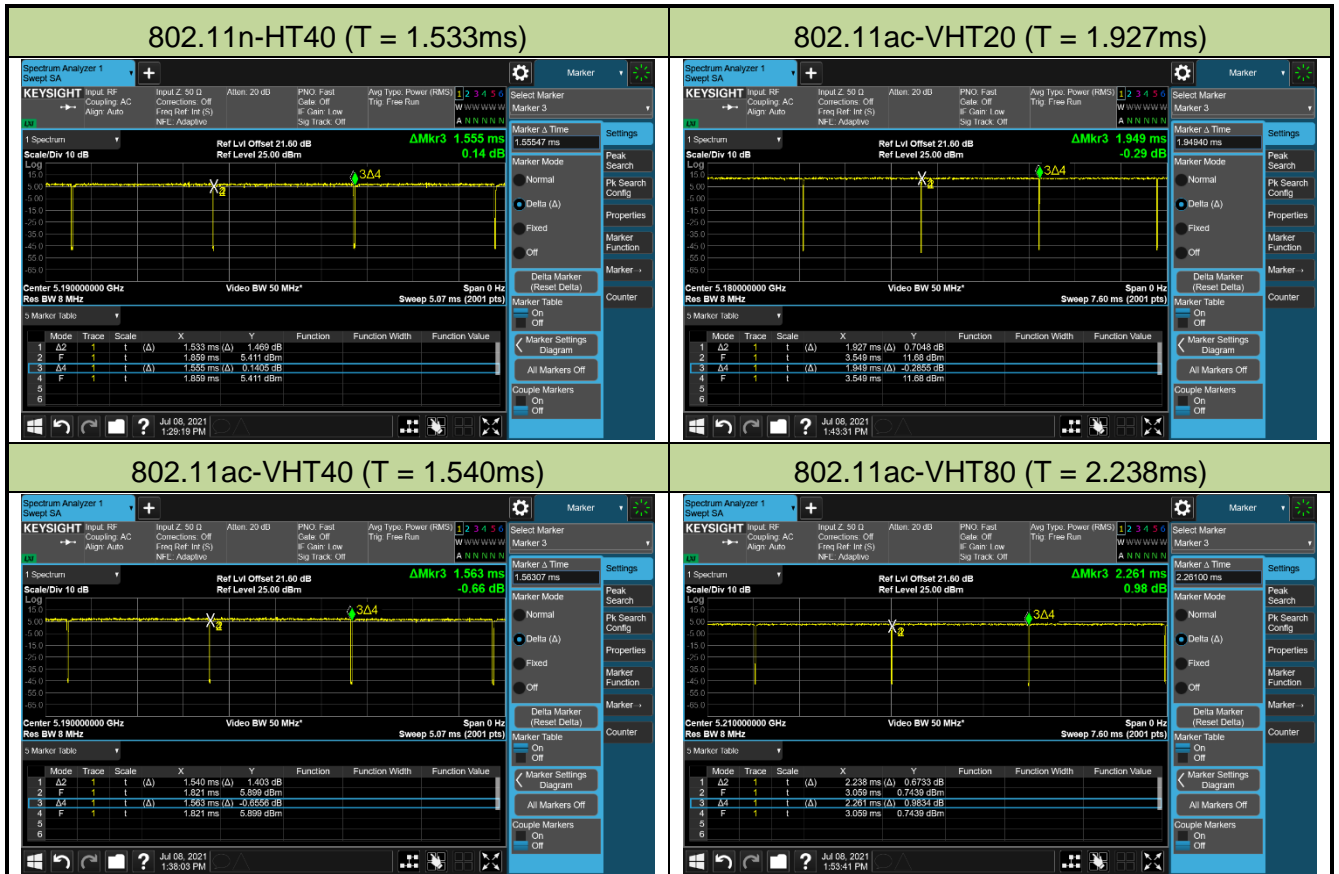

2.12. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.13. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.14. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement of the device.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2022/3/23
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2022/4/28
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2022/5/25
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2021/8/28

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2021/10/05
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2022/5/6
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2022/4/21
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2022/4/28
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2022/4/21
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2022/4/26
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2022/3/23
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2022/3/24
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2021/10/14
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2022/6/15
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2021/8/28

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2022/4/21
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2021/10/14
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2021/10/14
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2022/5/30
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2022/5/30
Attenuator	WTI	218FS-06	MRTTWE00028	1 year	2022/5/30
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2022/6/3
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2021/08/28

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Conducted Power (Carrier Power / Power Density)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(iv), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	≤ 24 dBm		N/A	Section 7.5
15.407(a)(1)(iv), (3)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(7), (8), (9)	General Field Strength Limits(Restricted Bands andRadiated Emission Limits)	Emissions in restrictedbands must meet theradiated limits detailed in15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Test Items “26dB Bandwidth” & “6dB Bandwidth” showed the worst test data in this report.
- 4) “N/A” means that this item is not applicable, and the detail information refers to relevant section.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

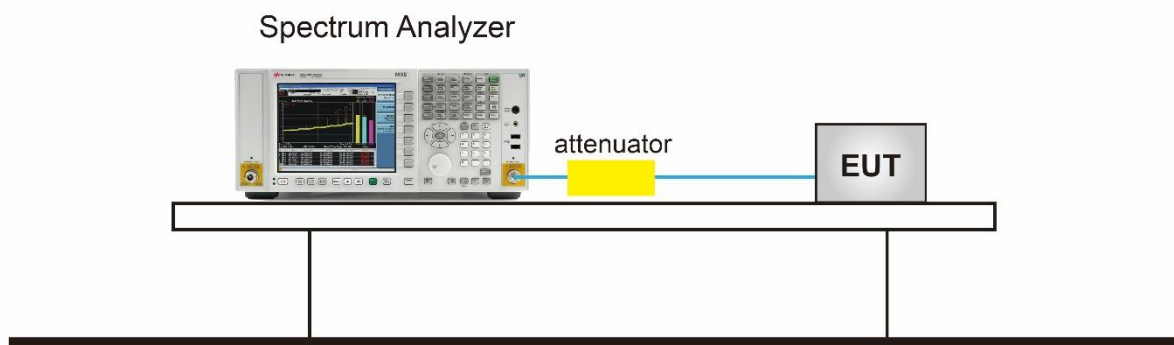

7.2.5. Test Result

Product	Streaming Media Player	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2021/07/08~2021/07/09


Test Mode	Data Rate/ Mbps	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6Mbps	36	5180	20.81	16.59
802.11a	6Mbps	44	5220	21.67	16.73
802.11a	6Mbps	48	5240	21.35	16.70
802.11a	6Mbps	149	5745	32.56	18.00
802.11a	6Mbps	157	5785	32.63	18.64
802.11a	6Mbps	165	5825	35.89	19.60
802.11n-HT20	MCS0	36	5180	21.22	17.75
802.11n-HT20	MCS0	44	5220	21.29	17.74
802.11n-HT20	MCS0	48	5240	21.13	17.72
802.11n-HT20	MCS0	149	5745	35.37	19.33
802.11n-HT20	MCS0	157	5785	33.96	18.66
802.11n-HT20	MCS0	165	5825	35.01	19.28
802.11n-HT40	MCS0	38	5190	39.87	36.39
802.11n-HT40	MCS0	46	5230	39.85	36.35
802.11n-HT40	MCS0	151	5755	79.75	38.78
802.11n-HT40	MCS0	159	5795	79.70	37.94
802.11ac-VHT20	MCS0	36	5180	21.60	17.81
802.11ac-VHT20	MCS0	44	5220	24.94	17.93
802.11ac-VHT20	MCS0	48	5240	21.31	17.76
802.11ac-VHT20	MCS0	149	5745	34.19	18.50
802.11ac-VHT20	MCS0	157	5785	33.79	19.19
802.11ac-VHT20	MCS0	165	5825	36.04	19.05
802.11ac-VHT40	MCS0	38	5190	39.78	36.27
802.11ac-VHT40	MCS0	46	5230	40.09	36.39
802.11ac-VHT40	MCS0	151	5755	79.12	37.31
802.11ac-VHT40	MCS0	159	5795	79.89	38.53
802.11ac-VHT80	MCS0	42	5210	145.00	76.54
802.11ac-VHT80	MCS0	155	5775	151.10	76.51

802.11a 26dB Bandwidth & 99% Bandwidth -Ant 1 / Ant 1 + 2


Channel 36 (5180MHz)




Channel 44 (5220MHz)

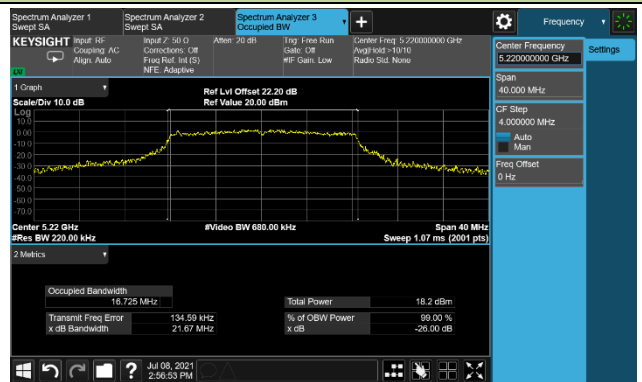


Channel 48 (5240MHz)

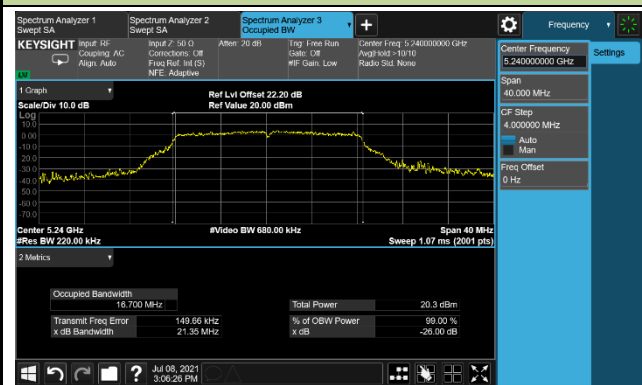


Channel 149 (5745MHz)

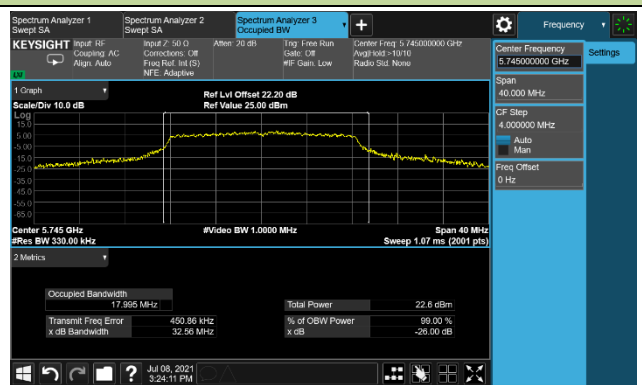

Channel 157 (5785MHz)

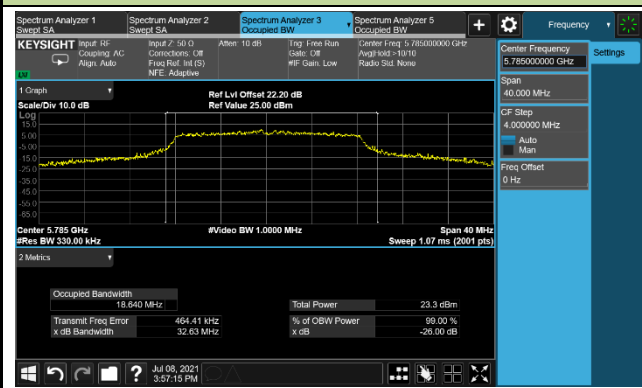


Channel 165 (5825MHz)

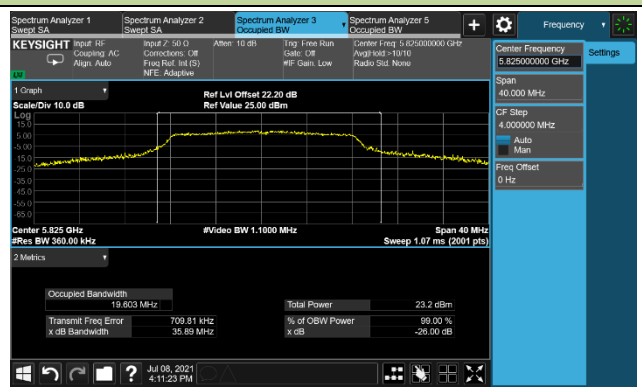


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 1 + 2


Channel 36 (5180MHz)

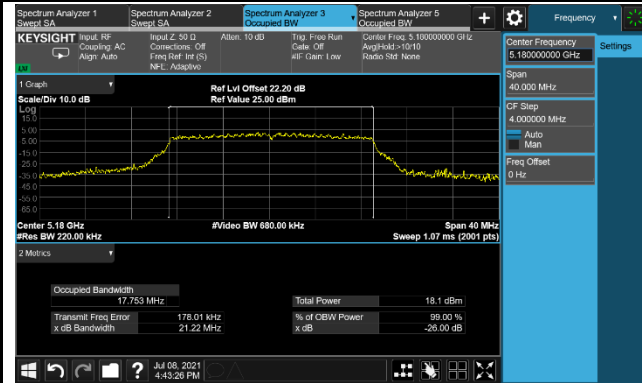


Channel 44 (5220MHz)

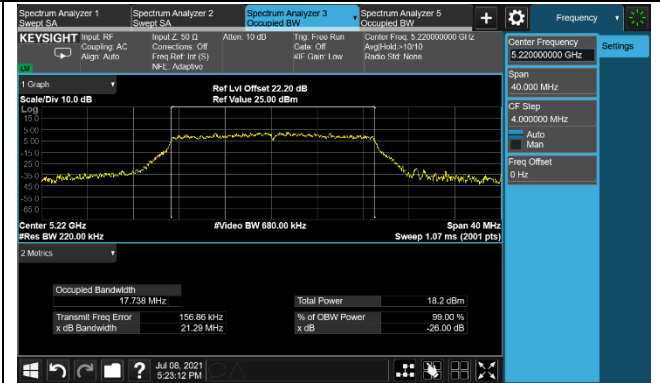


Channel 48 (5240MHz)

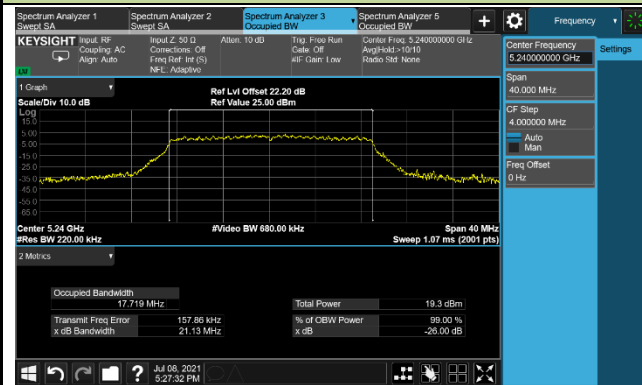


Channel 149 (5745MHz)

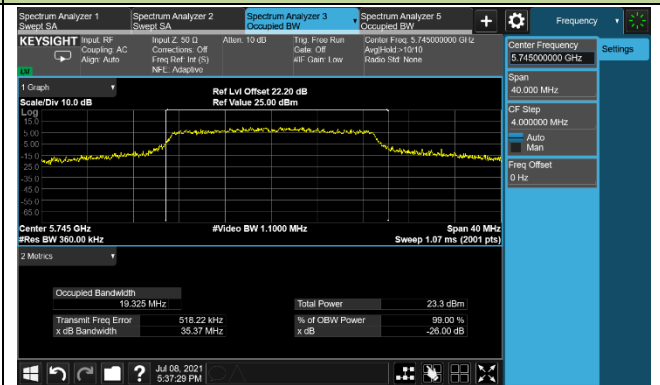

Channel 157 (5785MHz)

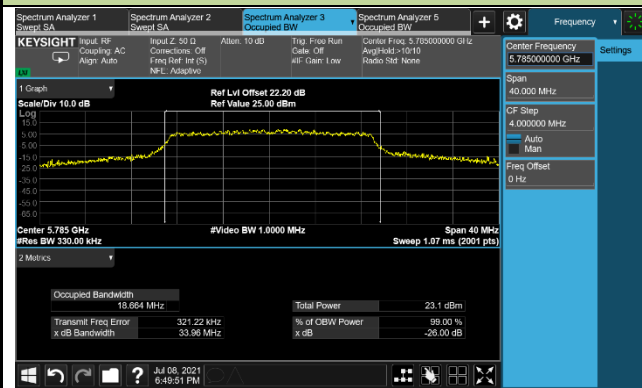


Channel 165 (5825MHz)

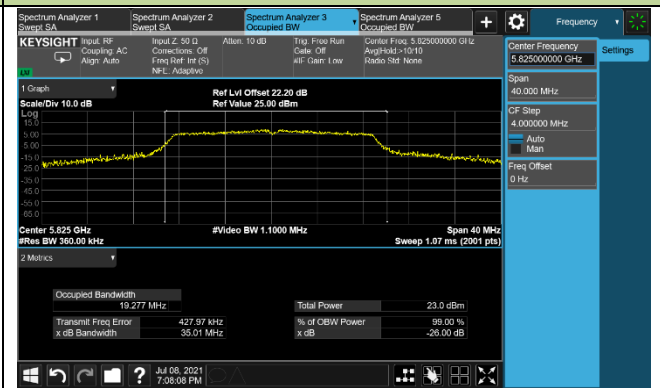


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 1 + 2


Channel 38 (5190MHz)

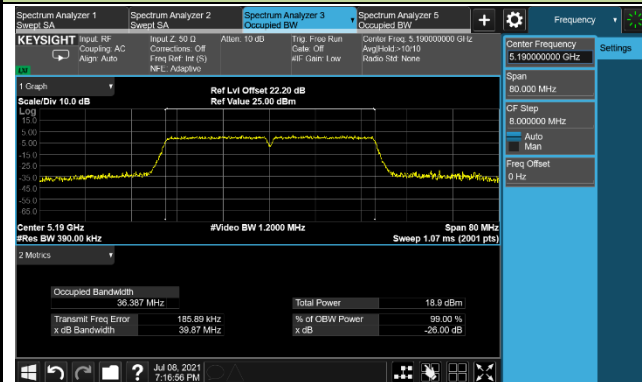


Channel 46 (5230MHz)

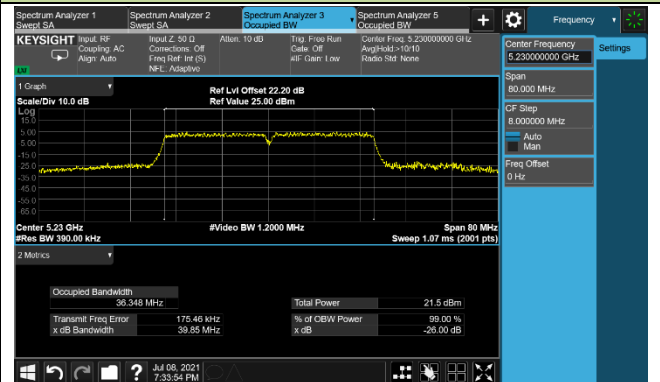

Channel 151 (5755MHz)

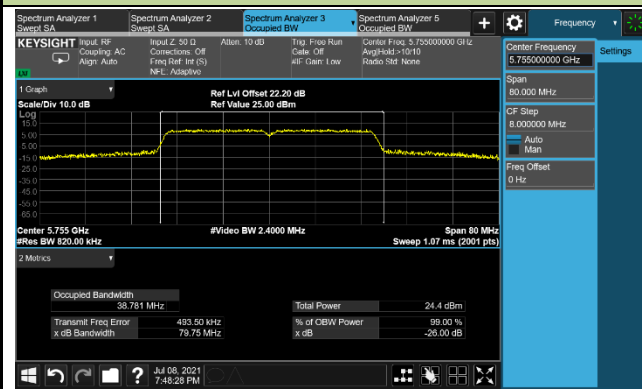


Channel 159 (5795MHz)

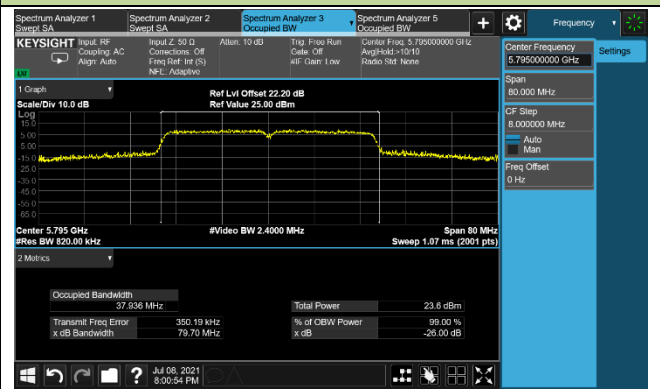


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 1 + 2


Channel 36 (5180MHz)

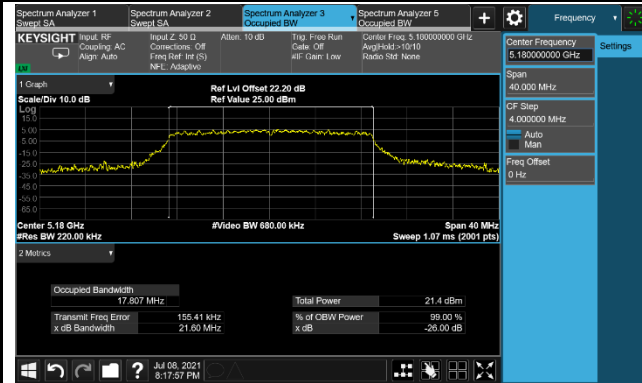


Channel 44 (5220MHz)

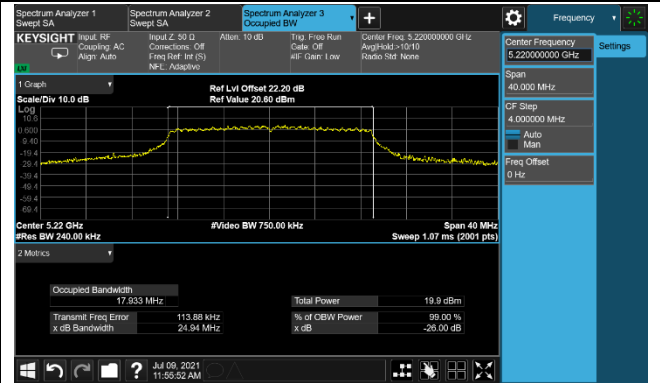


Channel 48 (5240MHz)

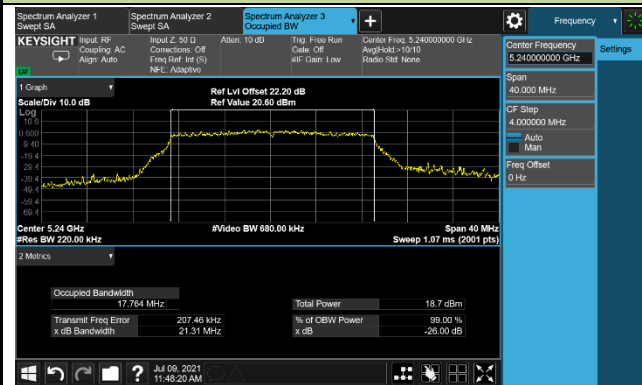


Channel 149 (5745MHz)

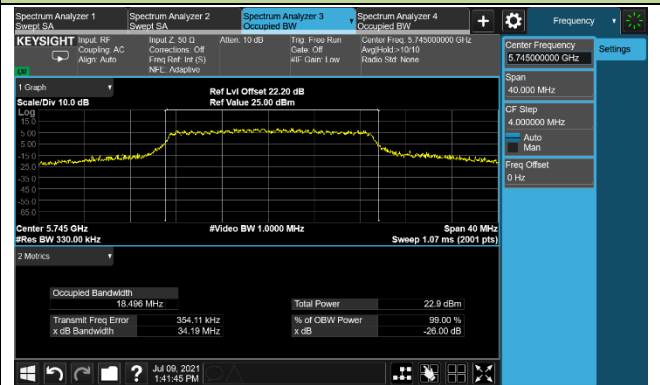

Channel 157 (5785MHz)

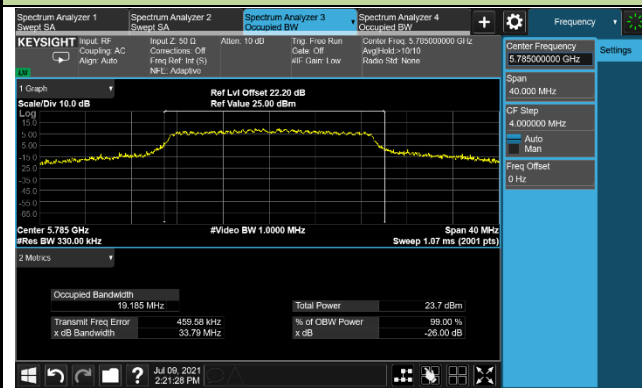


Channel 165 (5825MHz)

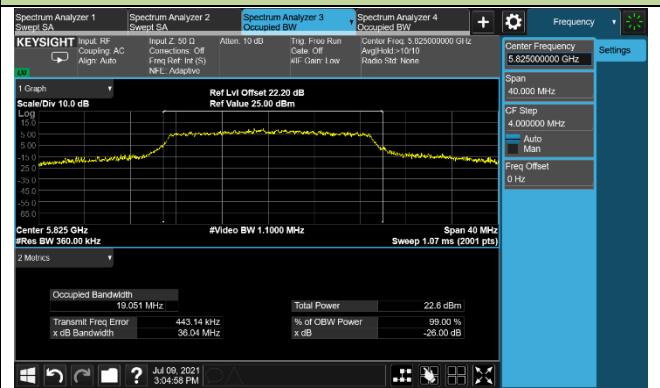


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 1 + 2


Channel 38 (5190MHz)

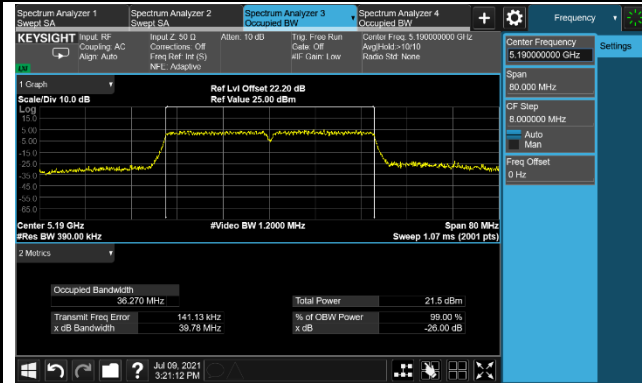


Channel 46 (5230MHz)

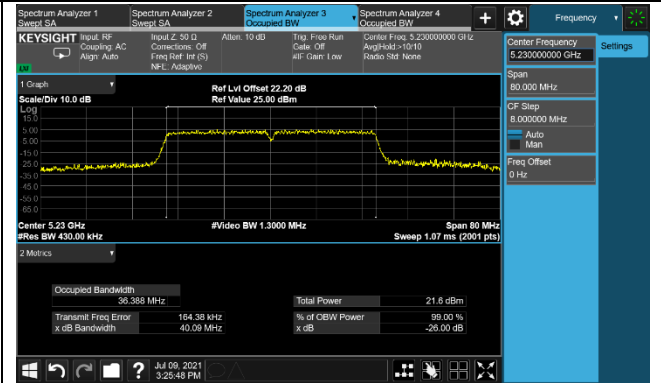

Channel 151 (5755MHz)

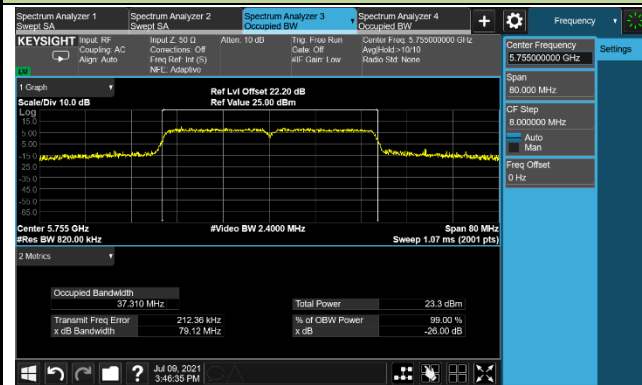


Channel 159 (5795MHz)

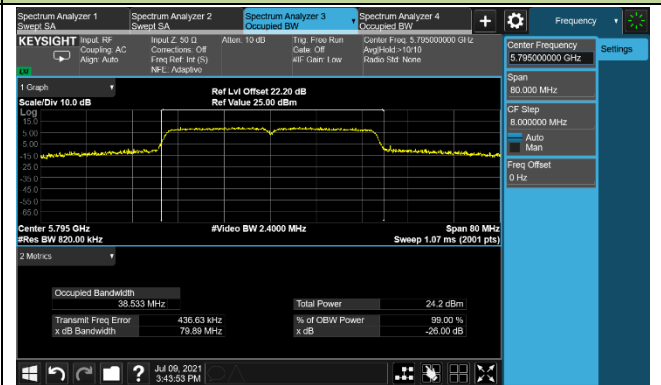


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 1 + 2

Channel 42 (5210MHz)

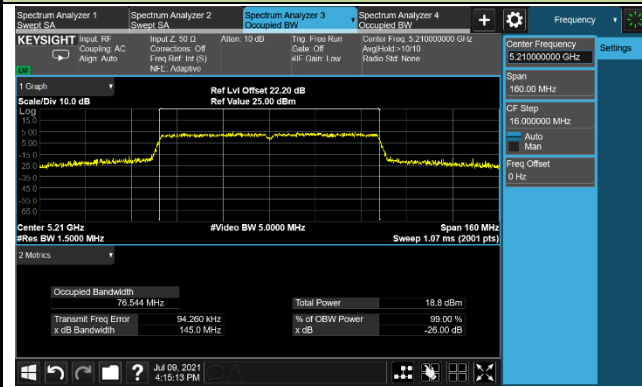

Channel 155 (5775MHz)

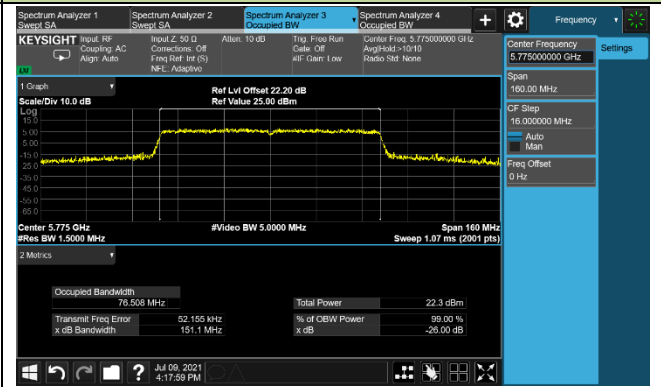

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

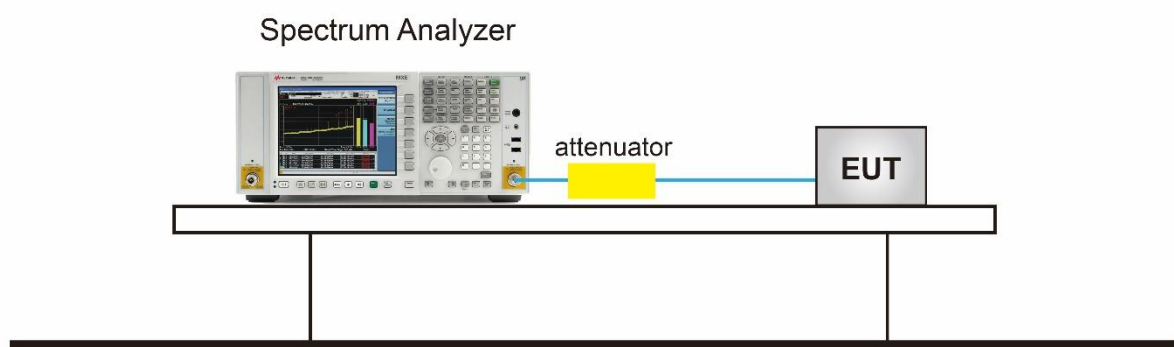


7.3.5. Test Result

Product	Streaming Media Player	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2021/07/08~2021/07/09


Test Mode	Data Rate/ Mbps	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	6Mbps	149	5745	16.33	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.34	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.31	≥ 0.5	Pass
802.11n-HT20	MCS0	149	5745	17.58	≥ 0.5	Pass
802.11n-HT20	MCS0	157	5785	17.56	≥ 0.5	Pass
802.11n-HT20	MCS0	165	5825	16.69	≥ 0.5	Pass
802.11n-HT40	MCS0	151	5755	36.39	≥ 0.5	Pass
802.11n-HT40	MCS0	159	5795	36.34	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.59	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.60	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.59	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	36.37	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.32	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	76.14	≥ 0.5	Pass

802.11a 6dB Bandwidth- Ant 1 / Ant 1 + 2


Channel 149 (5745MHz)

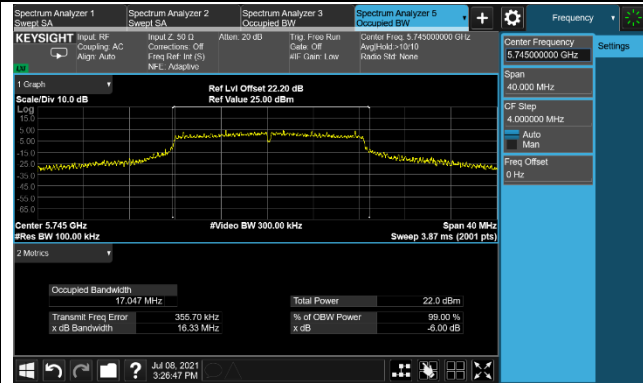

Channel 157 (5785MHz)

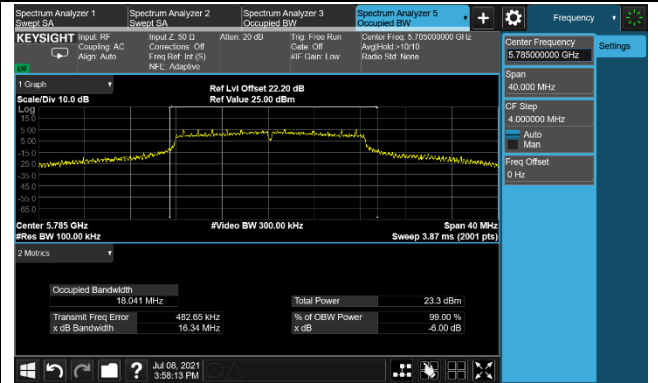


Channel 165 (5825MHz)

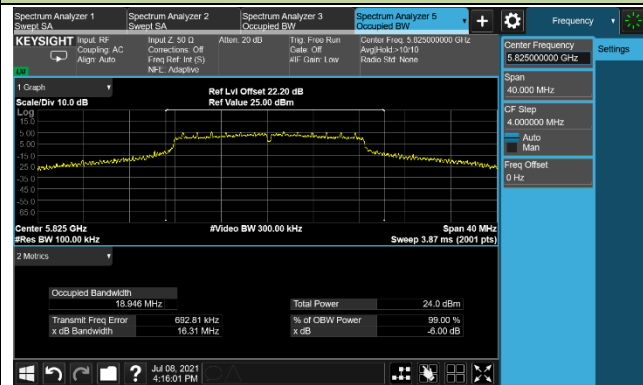


802.11n-HT20 6dB Bandwidth- Ant 1 / Ant 1 + 2


Channel 149 (5745MHz)

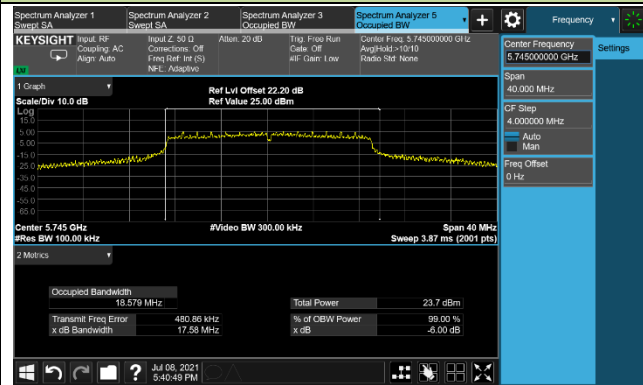

Channel 157 (5785MHz)

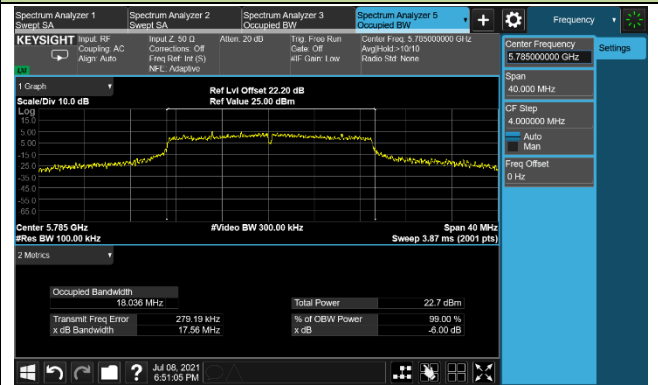


Channel 165 (5825MHz)

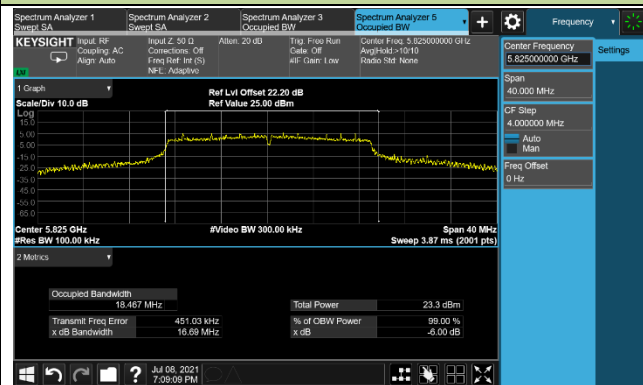


802.11n-HT40 6dB Bandwidth - Ant 1 / Ant 1 + 2

Channel 149 (5755MHz)

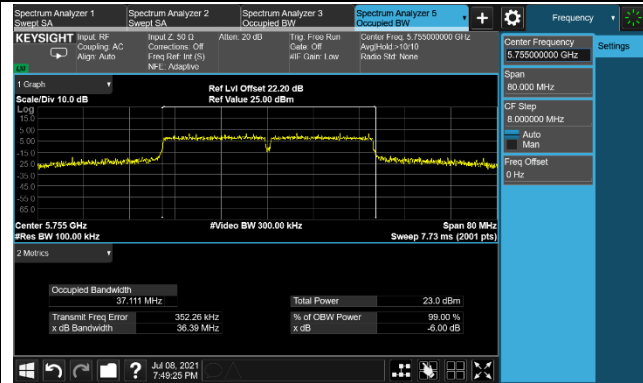


Channel 157 (5795MHz)

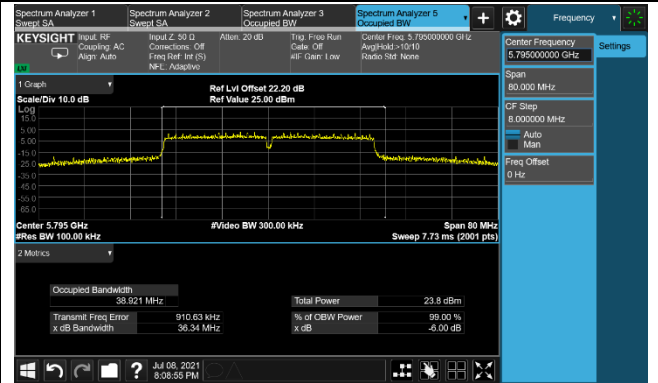


802.11ac-VHT20 6dB Bandwidth - Ant 1 / Ant 1 + 2


Channel 149 (5745MHz)

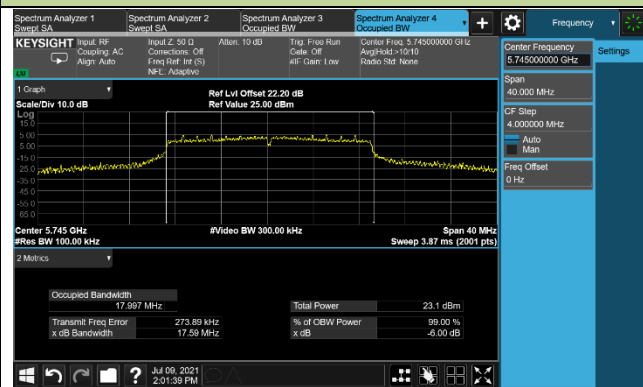

Channel 157 (5785MHz)

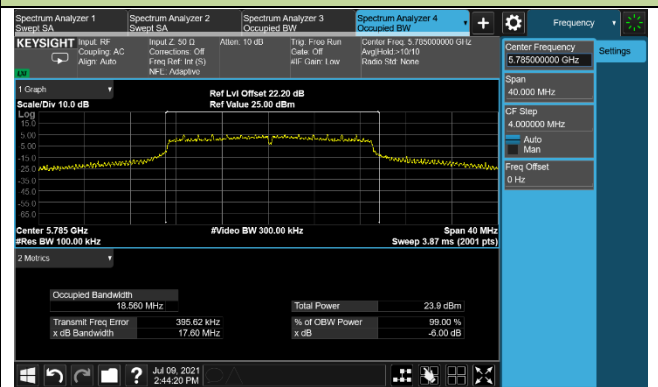


Channel 165 (5825MHz)

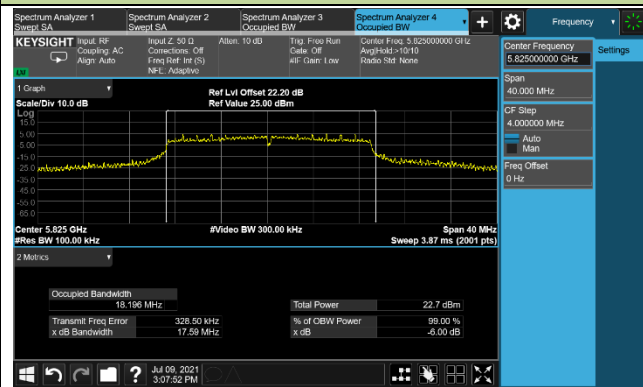


802.11ac-VHT40 6dB Bandwidth - Ant 1 / Ant 1 + 2

Channel 151 (5755MHz)

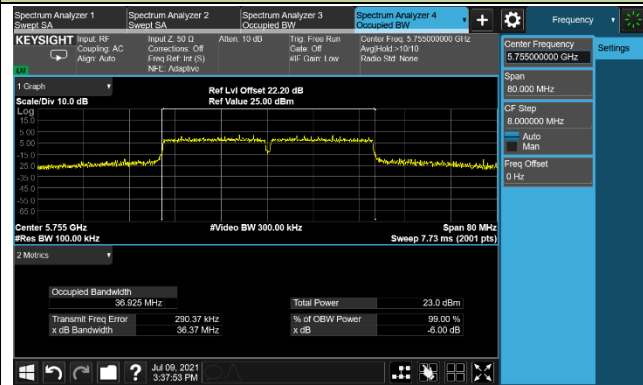


Channel 159 (5795MHz)

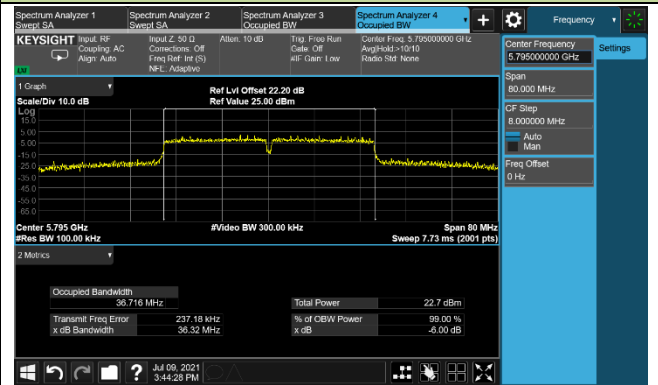

802.11ac-VHT80 6dB Bandwidth - Ant 1 / Ant 1 + 2

Channel 155 (5775MHz)

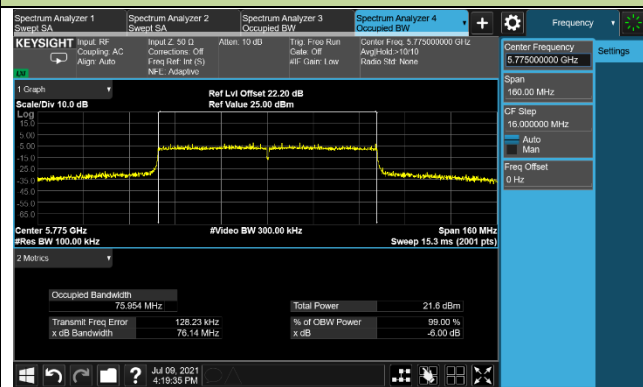

7.4. Output Power Measurement

7.4.1. Test Limit

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.4.4. Test Setup

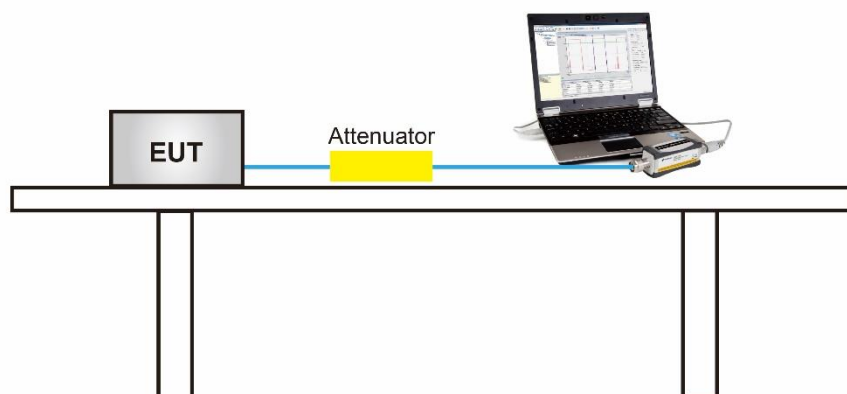

7.4.5. Test Result

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (grey marker) for final test of each channel.

For Ant 1:

Test Mode	Bandwidth	Channel	Frequency (MHz)	Data Rate/ Mbps	Average Power (dBm)
802.11a	20	36	5180	6Mbps	13.68
				24Mbps	13.55
				54Mbps	13.41
802.11n	20	36	5180	MCS0	13.69
				MCS3	13.54
				MCS7	13.40
802.11n	40	38	5190	MCS0	12.49
				MCS3	12.33
				MCS7	12.21
802.11ac	20	36	5180	MCS0	14.47
				MCS4	14.32
				MCS8	14.18
802.11ac	40	38	5190	MCS0	15.93
				MCS4	15.79
				MCS9	15.66
802.11ac	80	42	5210	MCS0	11.06
				MCS4	10.89
				MCS9	10.74



Product	Streaming Media Player	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2021/07/10

Test Mode	Data Rate/ Mbps	Channel No.	Freq. (MHz)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	13.68	12.20	16.01	≤ 22.88	Pass
11a	6Mbps	44	5220	13.85	12.58	16.27	≤ 22.88	Pass
11a	6Mbps	48	5240	14.23	12.71	16.55	≤ 22.88	Pass
11a	6Mbps	149	5745	16.28	15.45	18.90	≤ 30.00	Pass
11a	6Mbps	157	5785	16.82	16.14	19.50	≤ 30.00	Pass
11a	6Mbps	165	5825	16.26	15.88	19.08	≤ 30.00	Pass
11n-HT20	MCS0	36	5180	13.69	12.13	15.99	≤ 22.88	Pass
11n-HT20	MCS0	40	5220	14.66	12.93	16.89	≤ 22.88	Pass
11n-HT20	MCS0	48	5240	14.53	12.90	16.80	≤ 23.98	Pass
11n-HT20	MCS0	149	5745	16.99	16.28	19.66	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	16.55	15.93	19.26	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	16.21	16.05	19.14	≤ 30.00	Pass
11n-HT40	MCS0	38	5190	12.49	10.86	14.76	≤ 22.88	Pass
11n-HT40	MCS0	46	5230	16.06	14.46	18.34	≤ 22.88	Pass
11n-HT40	MCS0	151	5755	16.46	16.05	19.27	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	16.10	15.90	19.01	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	14.47	13.04	16.82	≤ 22.88	Pass
11ac-VHT20	MSC0	40	5220	14.63	13.59	17.15	≤ 22.88	Pass
11ac-VHT20	MCS0	48	5240	14.64	13.40	17.07	≤ 22.88	Pass
11ac-VHT20	MSC0	149	5745	16.68	15.83	19.29	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	16.69	16.00	19.37	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	15.72	15.43	18.59	≤ 30.00	Pass
11ac-VHT40	MCS0	38	5190	15.93	14.13	18.13	≤ 22.88	Pass
11ac-VHT40	MSC0	46	5230	16.42	14.63	18.63	≤ 22.88	Pass
11ac-VHT40	MSC0	151	5755	15.86	15.60	18.74	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	16.03	15.77	18.91	≤ 30.00	Pass
11ac-VHT80	MSC0	42	5210	11.06	9.66	13.43	≤ 22.88	Pass
11ac-VHT80	MCS0	155	5775	14.50	14.41	17.47	≤ 30.00	Pass

Note1: The Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} \}$.

Note 2: For U-NII 1, Average Power Limit (dBm/MHz) = 23.98dBm/MHz - (7.1dBi-6dB) = 22.88dBm/MHz

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

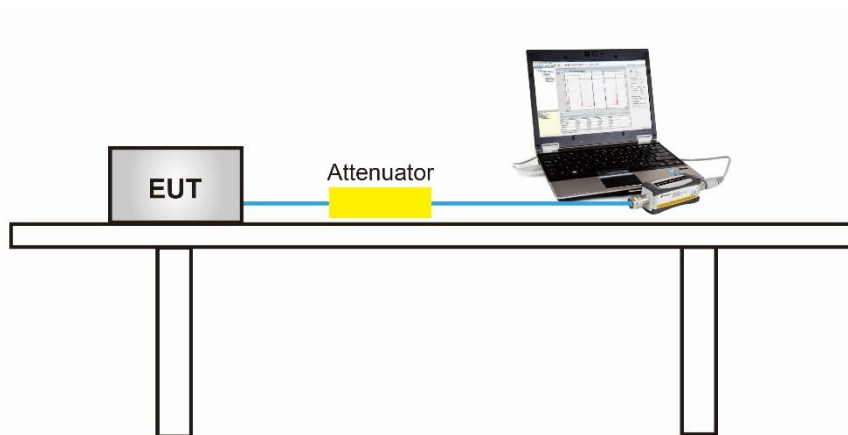

7.5.5. Test Result

A TPC mechanism is not required for systems operating in frequency band 5150 ~ 5250 MHz & 5725 ~ 5850 MHz.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$ dB to the measured result.

7.6.4. Test Setup

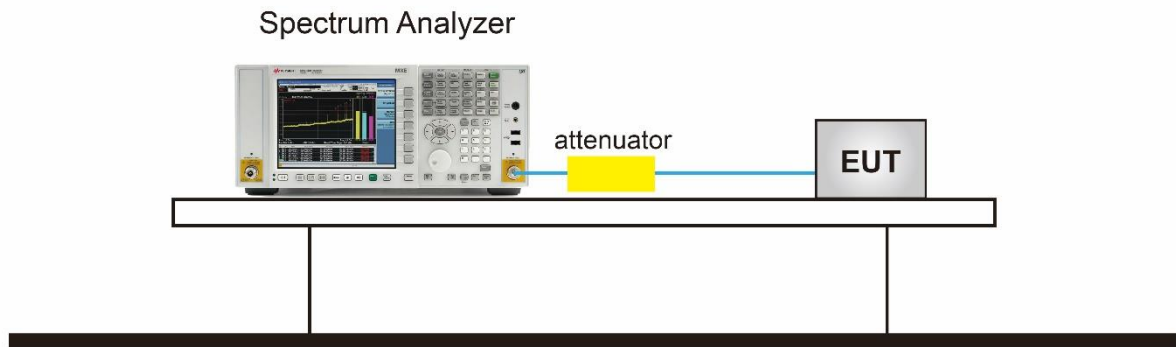

7.6.5. Test Result

Product	Streaming Media Player	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2021/07/08~2021/07/09
Test Mode	For FCC UNII-1 (5150-5250MHz)		

Test Mode	Data Rate /Mbps	Channel No.	Freq. (MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	3.42	2.10	99.09	5.82	≤ 6.89	Pass
11a	6Mbps	44	5220	3.94	2.96	99.09	6.49	≤ 6.89	Pass
11a	6Mbps	48	5240	4.09	2.66	99.09	6.44	≤ 6.89	Pass
11n-HT20	MCS0	36	5180	3.10	2.23	98.82	5.70	≤ 6.89	Pass
11n-HT20	MCS0	44	5220	4.05	2.49	98.82	6.35	≤ 6.89	Pass
11n-HT20	MCS0	48	5240	3.99	2.64	98.82	6.38	≤ 6.89	Pass
11n-HT40	MCS0	38	5190	-1.92	-3.65	98.59	0.31	≤ 6.89	Pass
11n-HT40	MCS0	46	5230	1.96	0.24	98.59	4.20	≤ 6.89	Pass
11ac-VHT20	MCS0	36	5180	3.96	2.53	98.87	6.31	≤ 6.89	Pass
11ac-VHT20	MCS0	44	5220	4.06	2.93	98.87	6.54	≤ 6.89	Pass
11ac-VHT20	MCS0	48	5240	4.22	2.89	98.87	6.62	≤ 6.89	Pass
11ac-VHT40	MCS0	38	5190	1.30	-0.16	98.53	3.64	≤ 6.89	Pass
11ac-VHT40	MCS0	46	5230	1.60	-0.07	98.53	3.86	≤ 6.89	Pass
11ac-VHT80	MCS0	42	5210	-6.61	-8.14	98.98	-4.30	≤ 6.89	Pass

Note 1: When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/MHz).

When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/MHz) + $10 \cdot \log (1/\text{Duty Cycle})$.

Note 2: PSD Limit (dBm/MHz) = 11dBm/MHz - (10.11dBi-6dB) = 6.89dBm/MHz

Product	Streaming Media Player	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2021/07/08~2021/07/09
Test Mode	For FCC UNII-3 (5725-5850MHz)		

Test Mode	Data Rate/ Mbps	Channel No.	Freq. (MHz)	Ant 1 PSD (dBm/ 510kHz)	Ant 2 PSD (dBm/ 510kHz)	Duty Cycle (%)	Total PSD (dBm/ 510kHz)	Limit (dBm/ 500kHz)	Result
11a	6Mbps	149	5745	3.79	2.78	99.09	6.33	≤ 29.99	Pass
11a	6Mbps	157	5785	4.27	3.91	99.09	7.10	≤ 29.99	Pass
11a	6Mbps	165	5825	3.82	3.45	99.09	6.65	≤ 29.99	Pass
11n-HT20	MCS8	149	5745	4.34	3.51	98.82	6.96	≤ 29.99	Pass
11n-HT20	MCS8	157	5785	3.35	2.94	98.82	6.16	≤ 29.99	Pass
11n-HT20	MCS8	165	5825	3.45	2.83	98.82	6.16	≤ 29.99	Pass
11n-HT40	MCS8	151	5755	-0.52	-0.88	98.59	2.31	≤ 29.99	Pass
11n-HT40	MCS8	159	5795	-0.60	-0.94	98.59	2.24	≤ 29.99	Pass
11ac-VHT20	MCS0	149	5745	3.91	3.04	98.87	6.51	≤ 29.99	Pass
11ac-VHT20	MCS0	157	5785	3.74	3.66	98.87	6.71	≤ 29.99	Pass
11ac-VHT20	MCS0	165	5825	3.30	2.86	98.87	6.09	≤ 29.99	Pass
11ac-VHT40	MCS0	151	5755	-0.73	-1.07	98.53	2.12	≤ 29.99	Pass
11ac-VHT40	MCS0	159	5795	-0.90	-1.10	98.53	2.01	≤ 29.99	Pass
11ac-VHT80	MCS0	155	5775	-5.85	-5.77	98.98	-2.80	≤ 29.99	Pass

Note 1:


When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/510kHz).

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/510kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.


Note 2: PSD Limit (dBm/500kHz) = 30dBm/500kHz - (6.01dBi -6dB) = 29.99dBm/500kHz

802.11a Power Spectral Density - Ant 1 / Ant 1 + 2


Channel 36 (5180MHz)

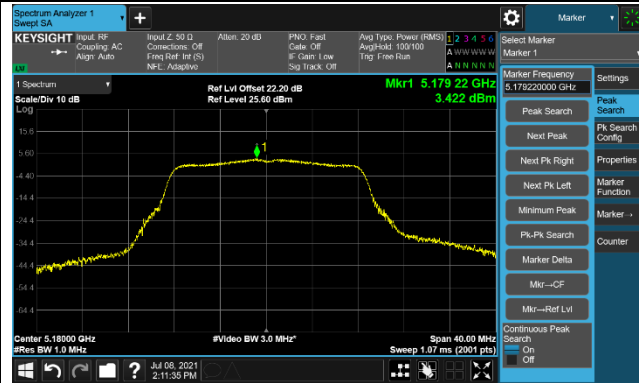


Channel 44 (5220MHz)

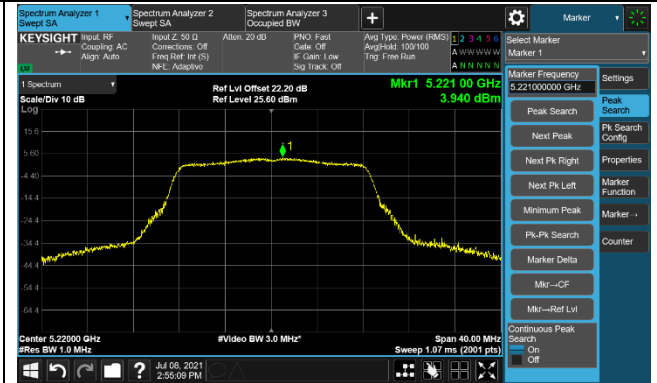


Channel 48 (5240MHz)

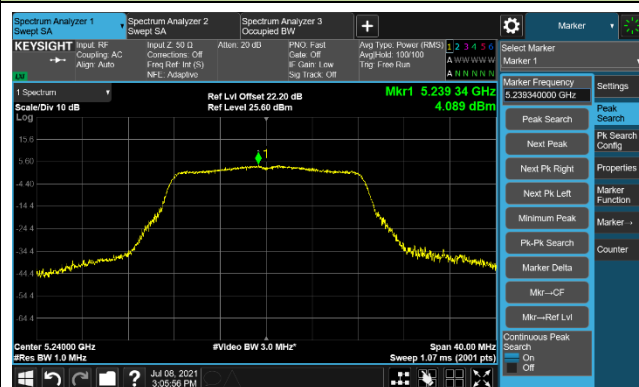


Channel 149 (5745MHz)

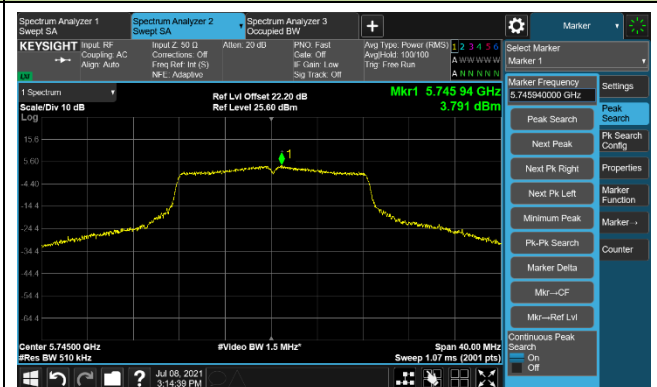

Channel 157 (5785MHz)

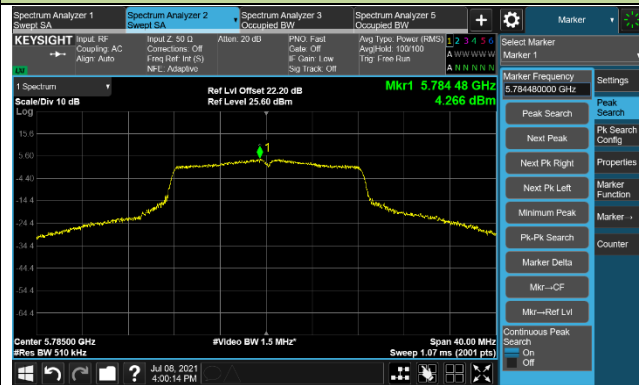


Channel 165 (5825MHz)

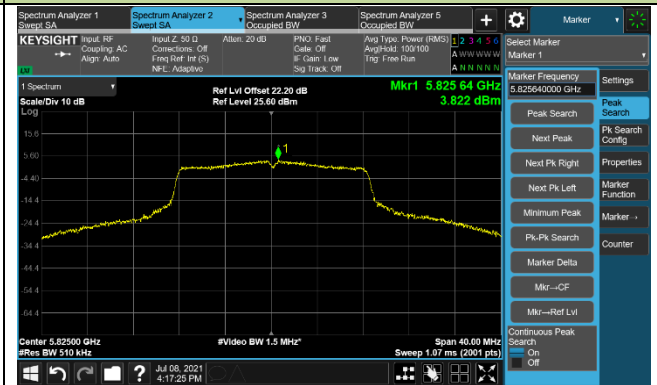


802.11n-HT20 Power Spectral Density - Ant 1 / Ant 1 + 2

Channel 36 (5180MHz)

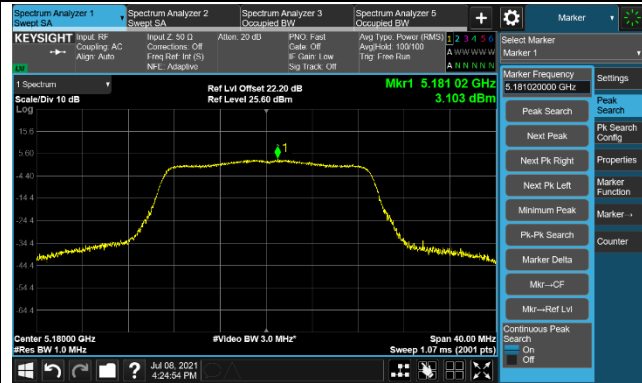


Channel 44 (5220MHz)

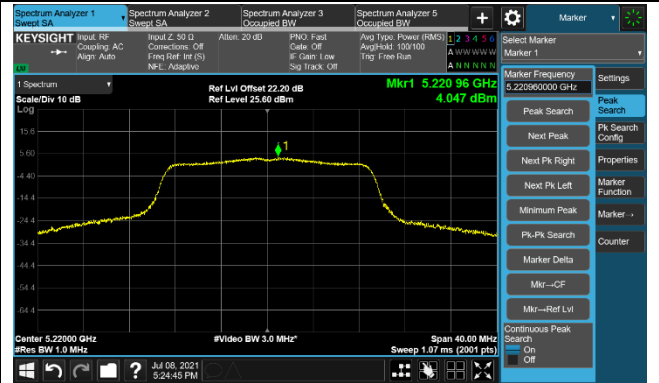


Channel 48 (5240MHz)




Channel 149 (5745MHz)

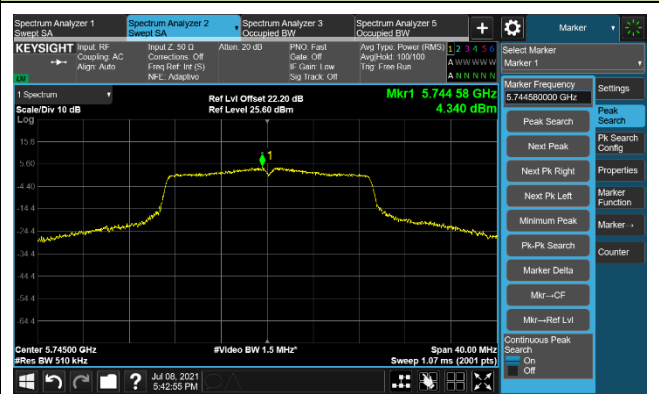

Channel 157 (5785MHz)

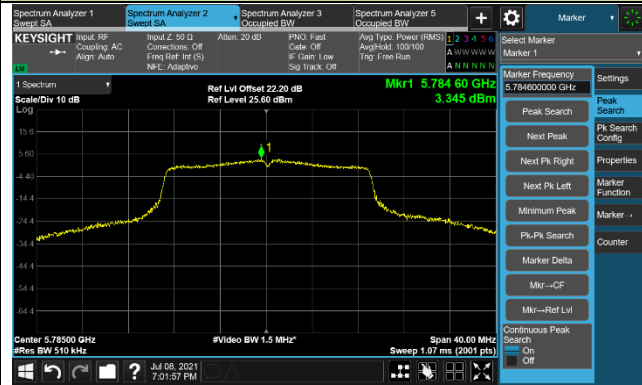


Channel 165 (5825MHz)

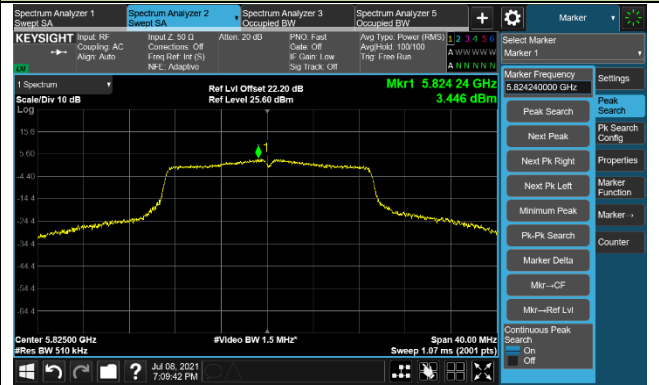


802.11n-HT40 Power Spectral Density - Ant 1 / Ant 1 + 2


Channel 38 (5190MHz)

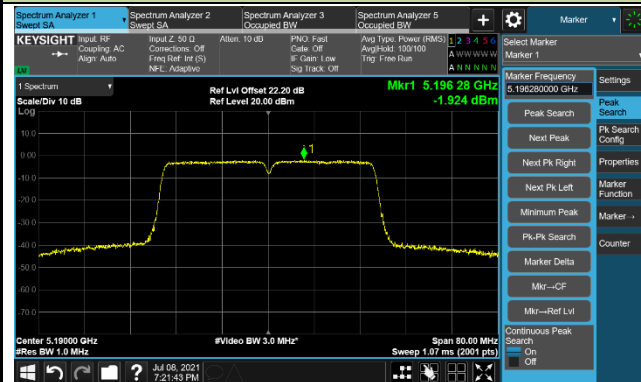


Channel 46 (5230MHz)

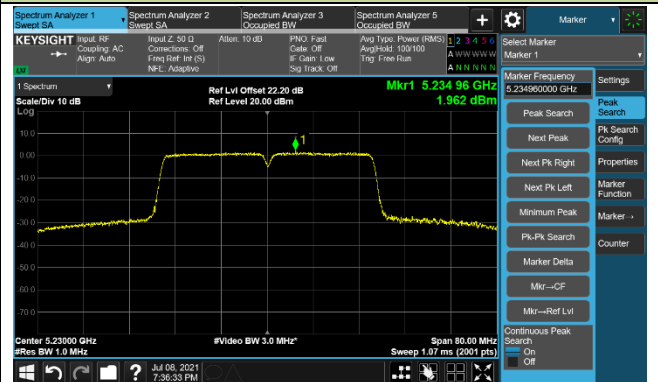

Channel 151 (5755MHz)

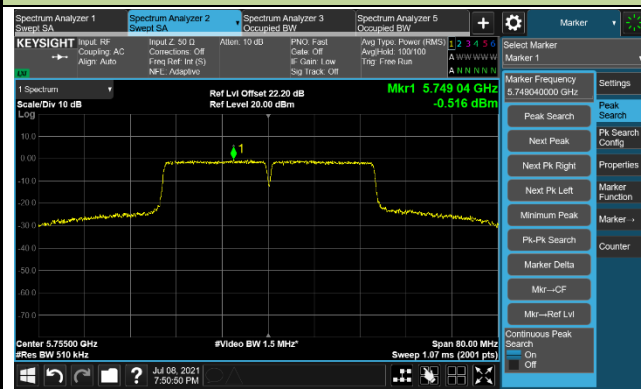


Channel 159 (5795MHz)

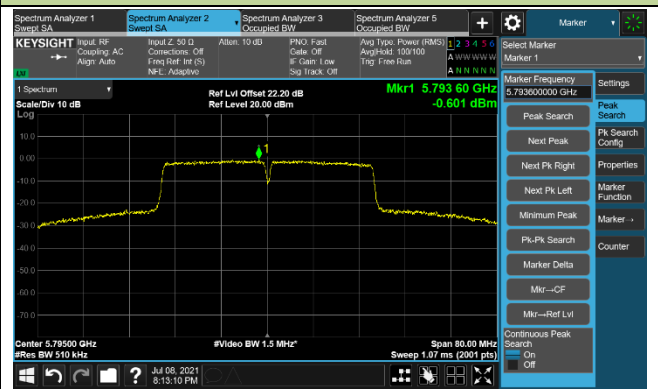


802.11ac-VHT20 Power Spectral Density - Ant 1 / Ant 1 + 2


Channel 36 (5180MHz)

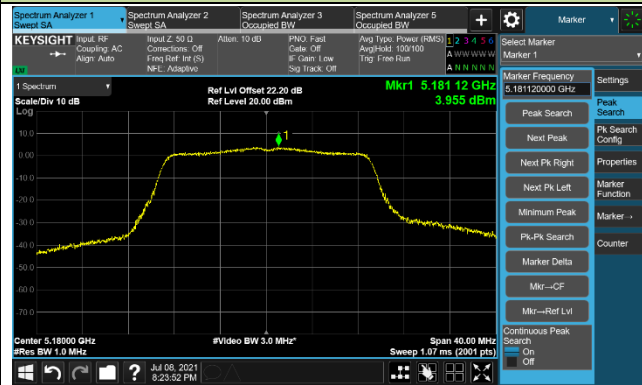

Channel 44 (5220MHz)

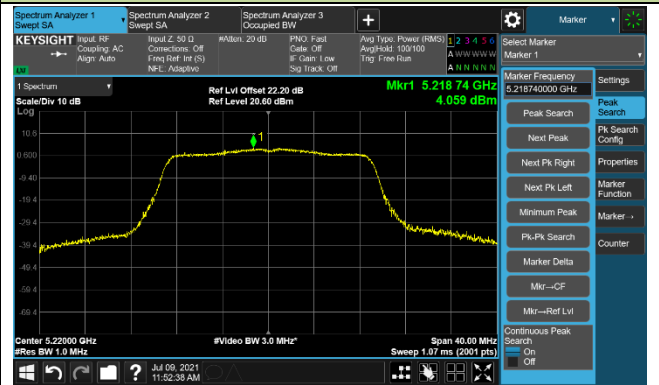


Channel 48 (5240MHz)

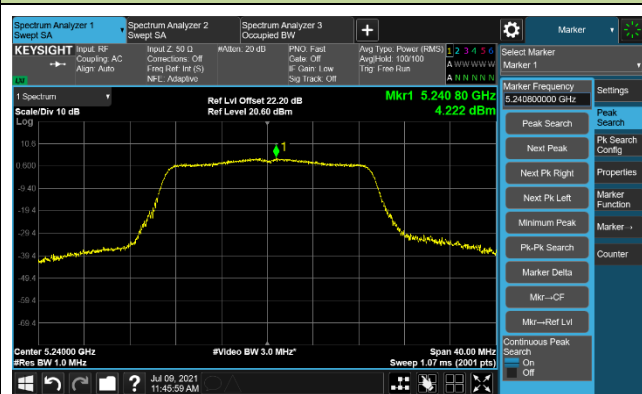

Channel 149 (5745MHz)



Channel 157 (5785MHz)

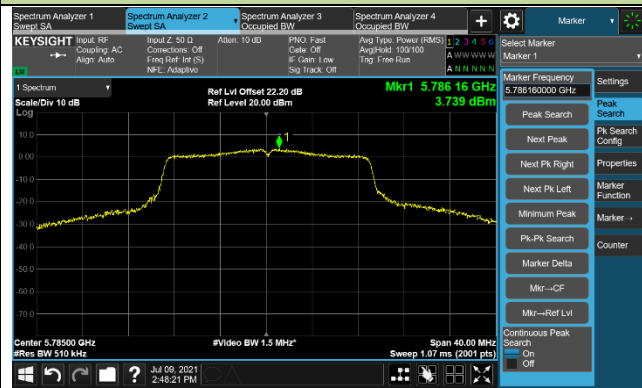

Channel 165 (5825MHz)

