



802.11ac-VHT40 Power Spectral Density - Ant 1 / Ant 1 + 2


Channel 38 (5190MHz)

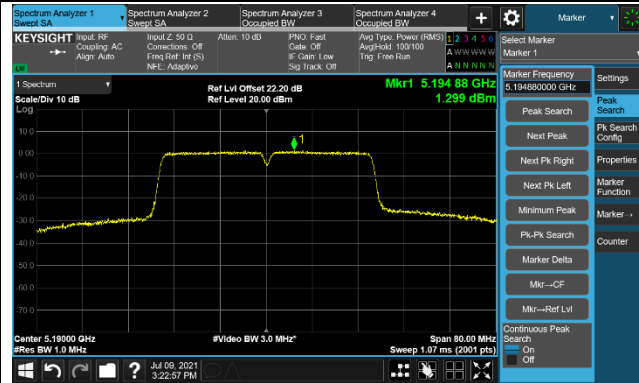


Channel 46 (5230MHz)

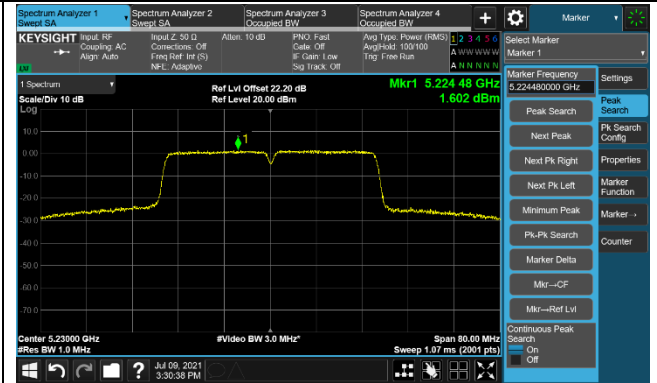

Channel 151 (5755MHz)

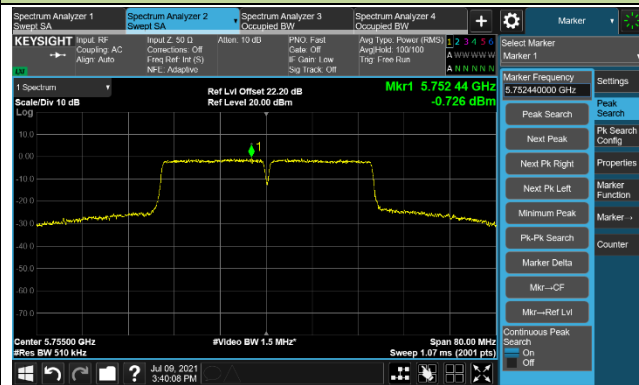


Channel 159 (5795MHz)

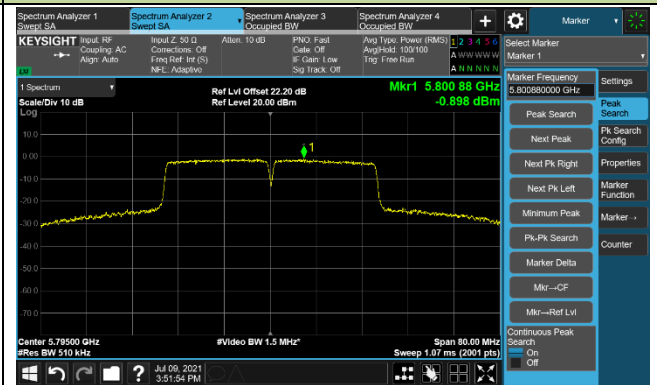


802.11ac-VHT80 Power Spectral Density - Ant 1 / Ant 1 + 2

Channel 42 (5210MHz)

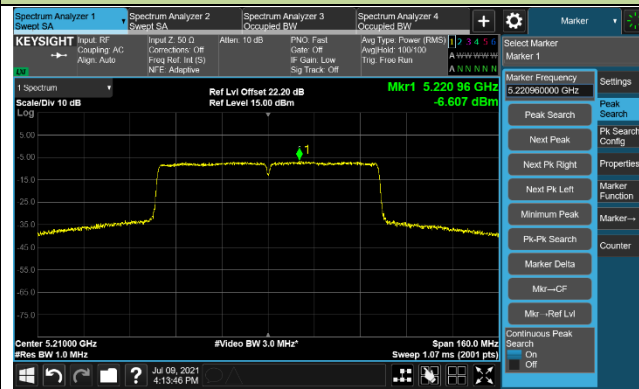


Channel 155 (5775MHz)

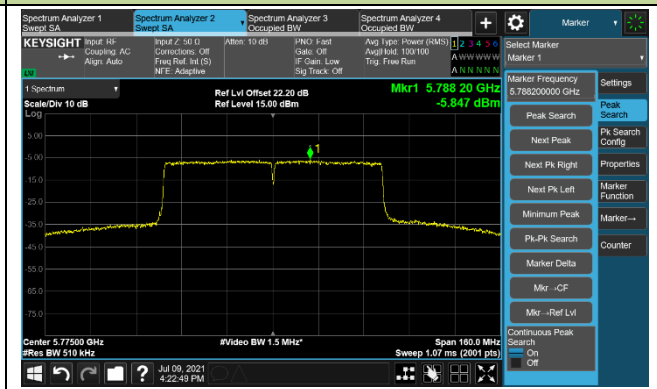


802.11a Power Spectral Density - Ant 2 / Ant 1 + 2


Channel 36 (5180MHz)

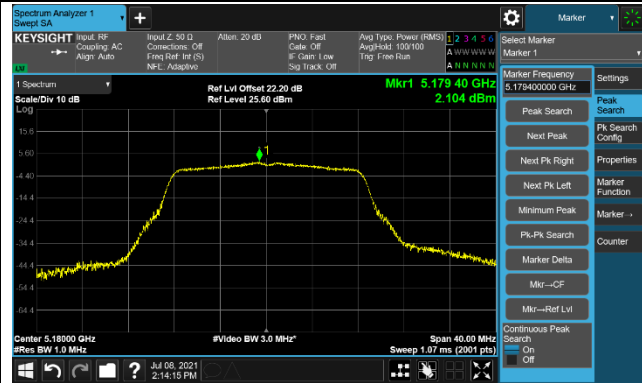


Channel 44 (5220MHz)

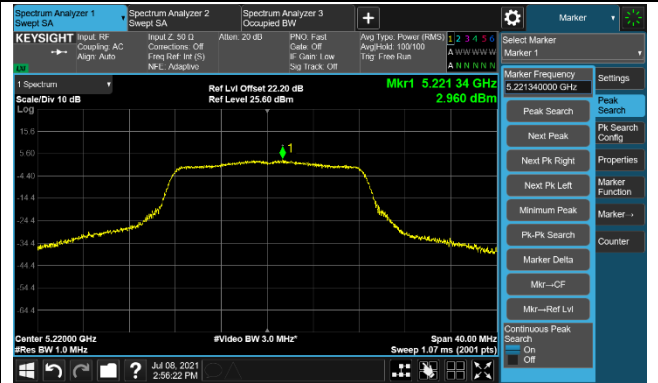


Channel 48 (5240MHz)

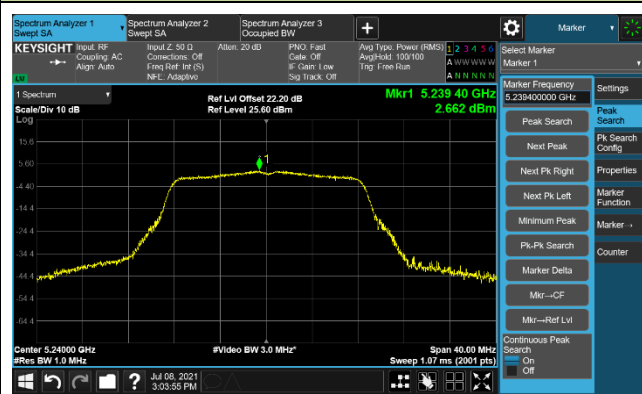


Channel 149 (5745MHz)

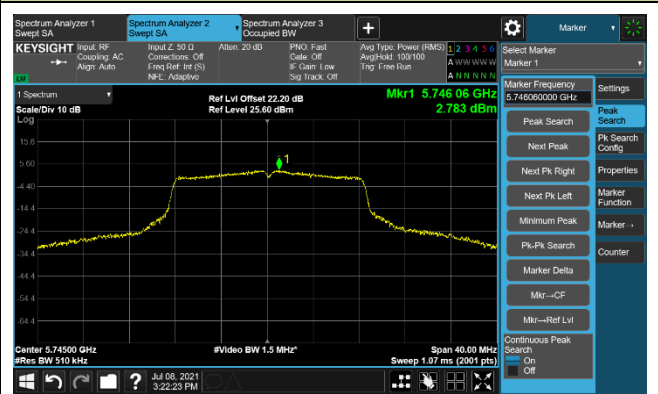

Channel 157 (5785MHz)

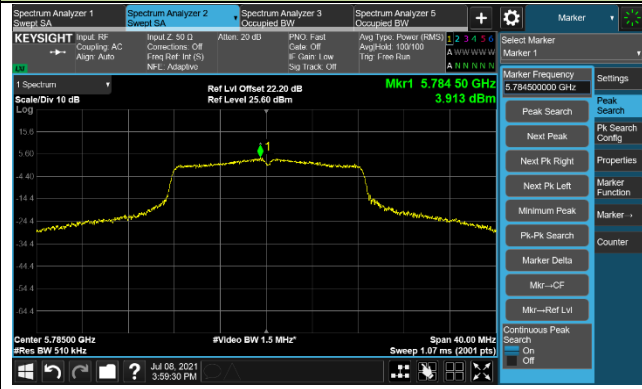


Channel 165 (5825MHz)

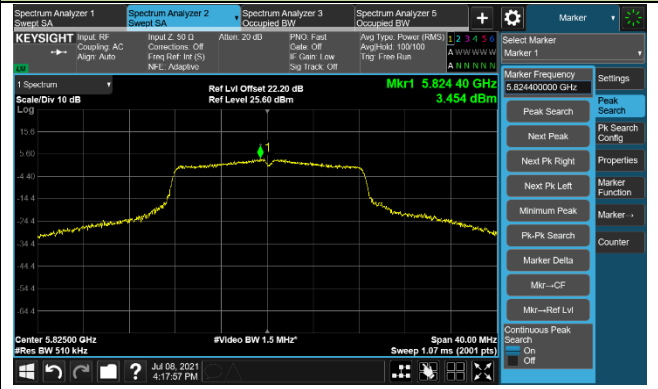


802.11n-HT20 Power Spectral Density - Ant 2 / Ant 1 + 2


Channel 36 (5180MHz)

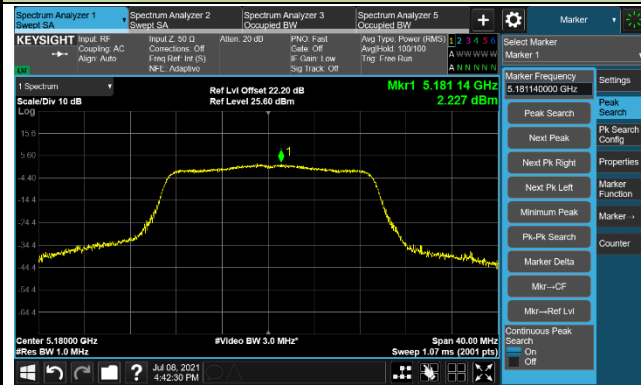


Channel 44 (5220MHz)

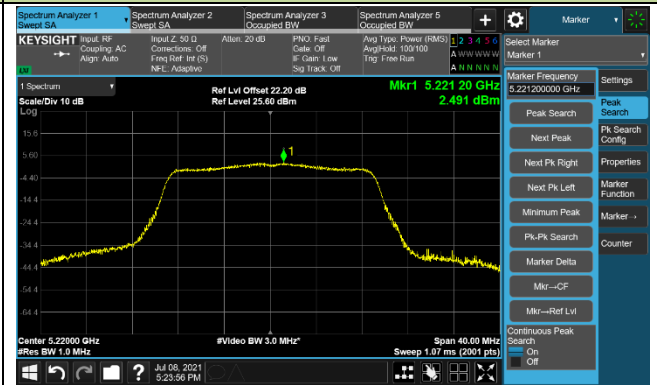


Channel 48 (5240MHz)

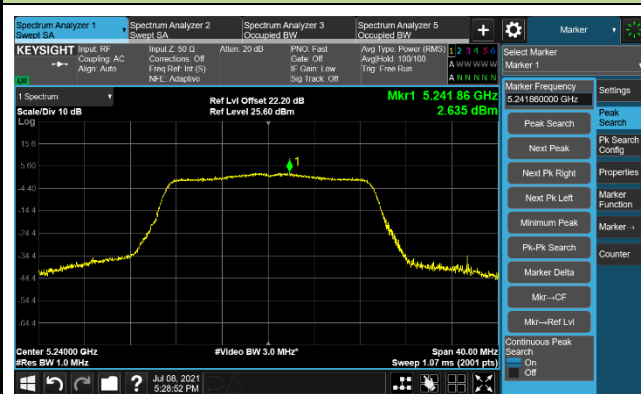


Channel 149 (5745MHz)

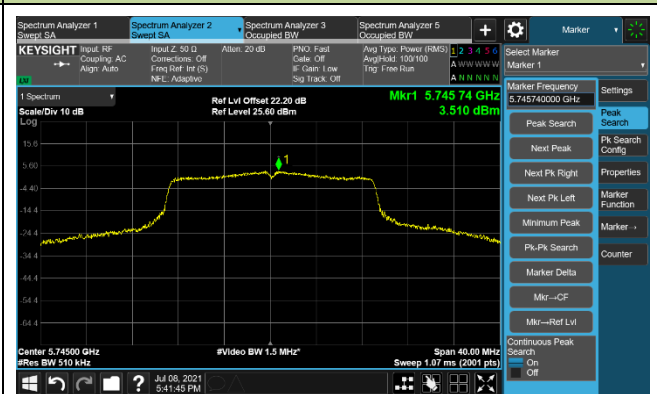

Channel 157 (5785MHz)

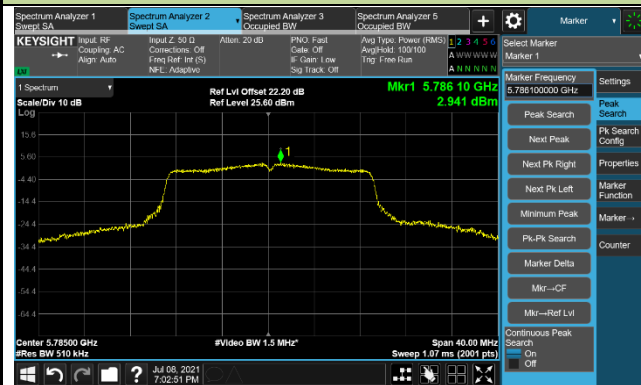


Channel 165 (5825MHz)

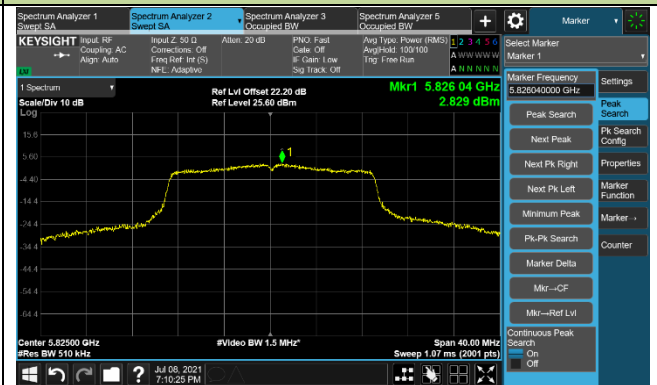


802.11n-HT40 Power Spectral Density - Ant 2 / Ant 1 + 2


Channel 38 (5190MHz)

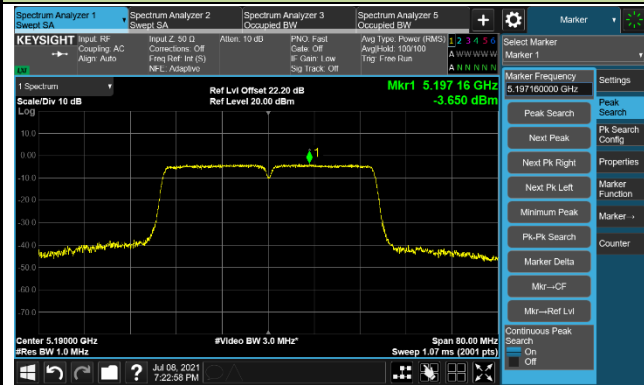


Channel 46 (5230MHz)

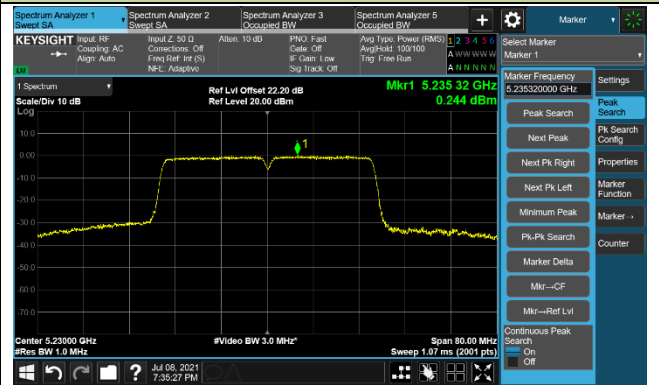

Channel 151 (5755MHz)

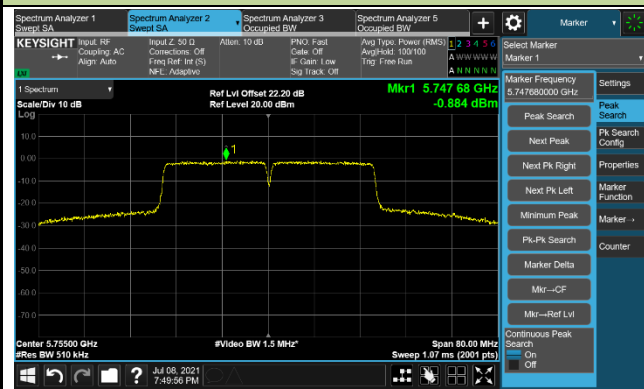


Channel 159 (5795MHz)

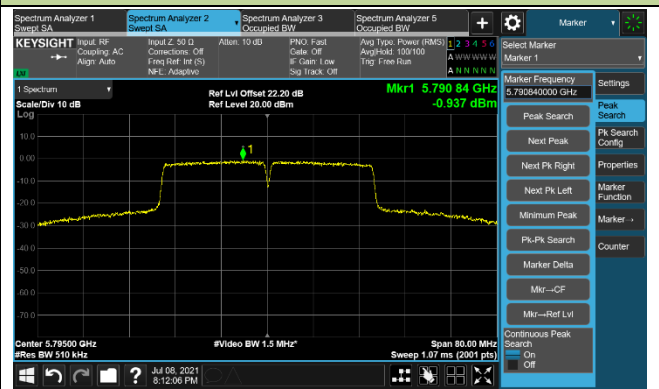


802.11ac-VHT20 Power Spectral Density - Ant 2 / Ant 1 + 2


Channel 36 (5180MHz)

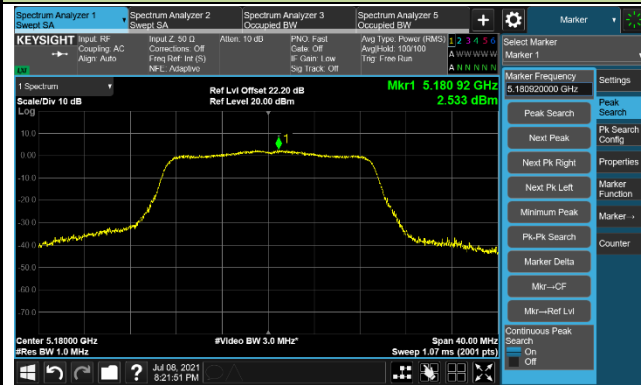


Channel 44 (5220MHz)

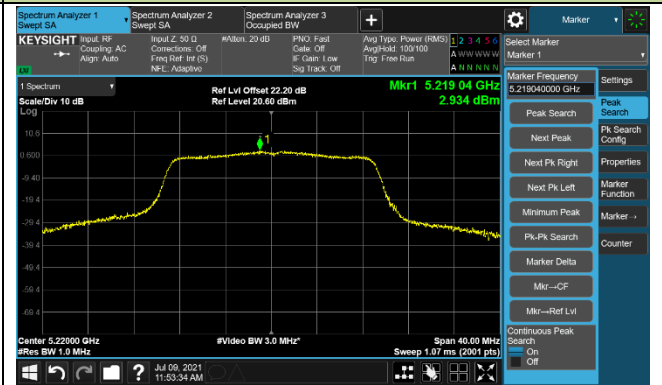


Channel 48 (5240MHz)

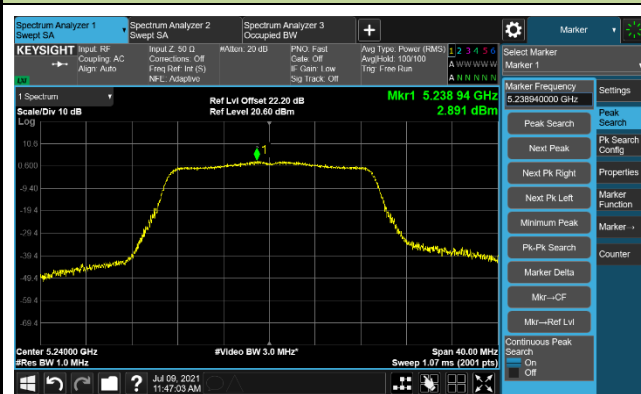


Channel 149 (5745MHz)

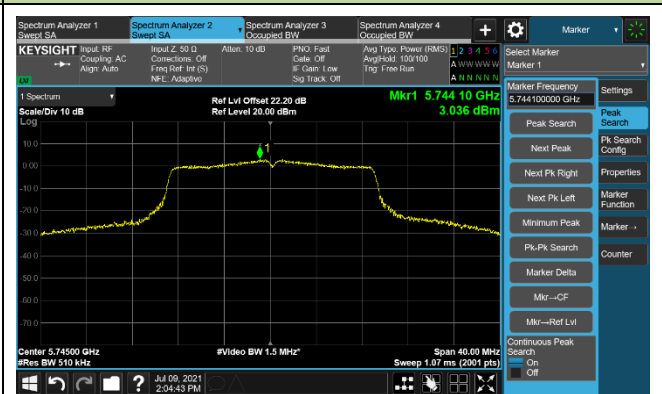

Channel 157 (5785MHz)

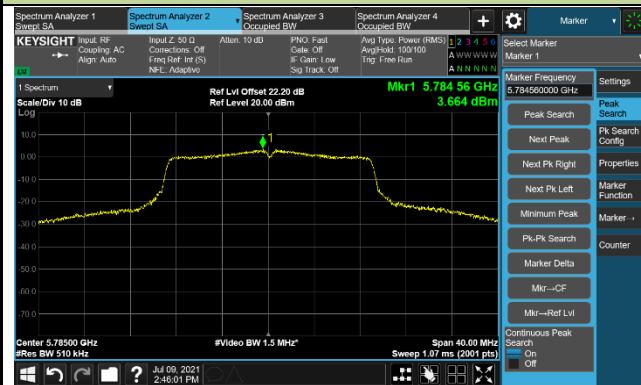


Channel 165 (5825MHz)

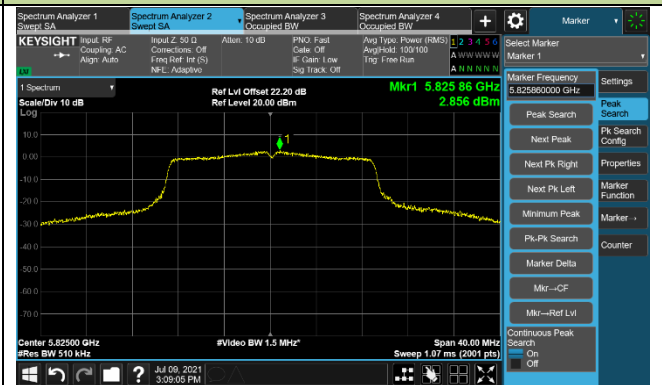


802.11ac-VHT40 Power Spectral Density - Ant 2 / Ant 1 + 2


Channel 38 (5190MHz)

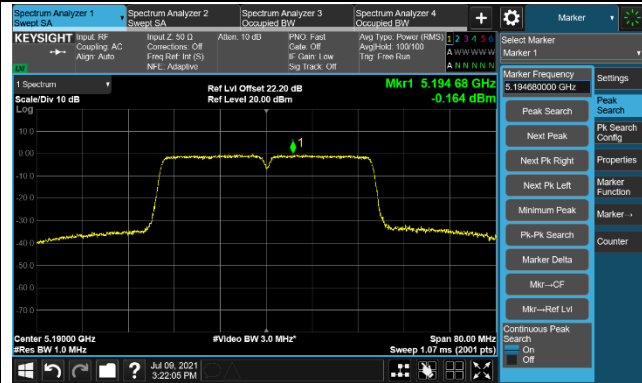


Channel 46 (5230MHz)

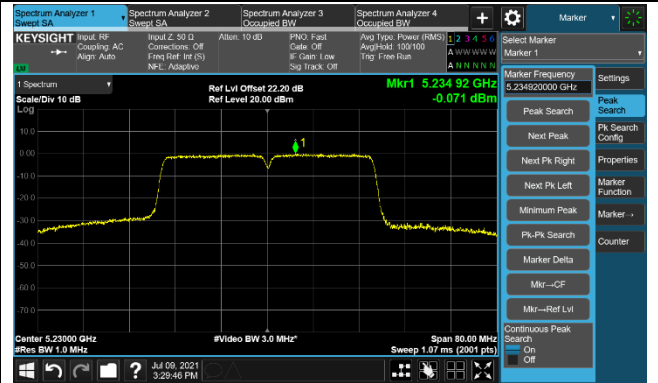

Channel 151 (5755MHz)

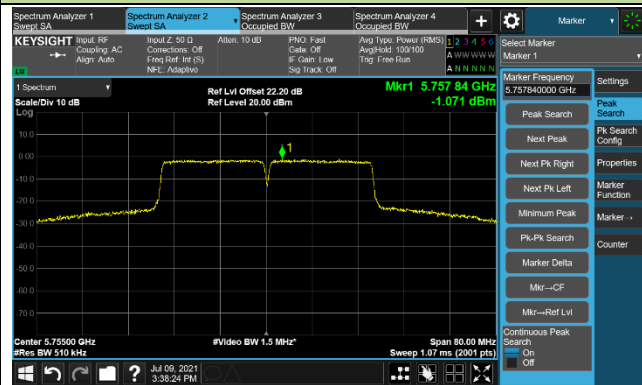


Channel 159 (5795MHz)

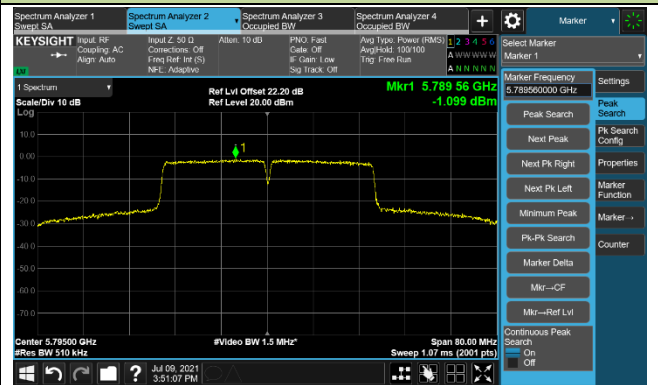


802.11ac-VHT80 Power Spectral Density - Ant 2 / Ant 1 + 2

Channel 42 (5210MHz)

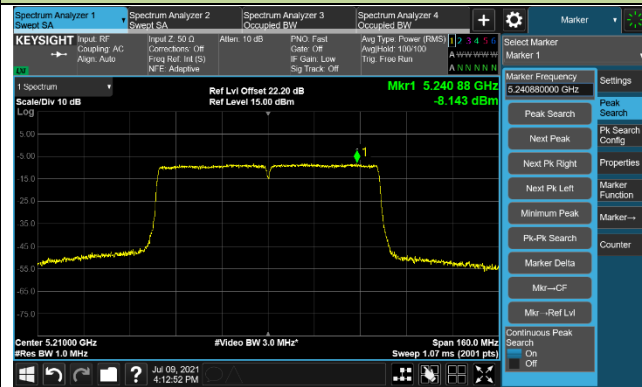

Channel 155 (5775MHz)

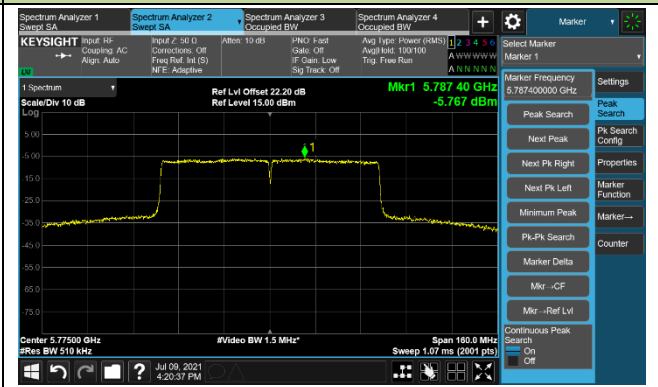

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

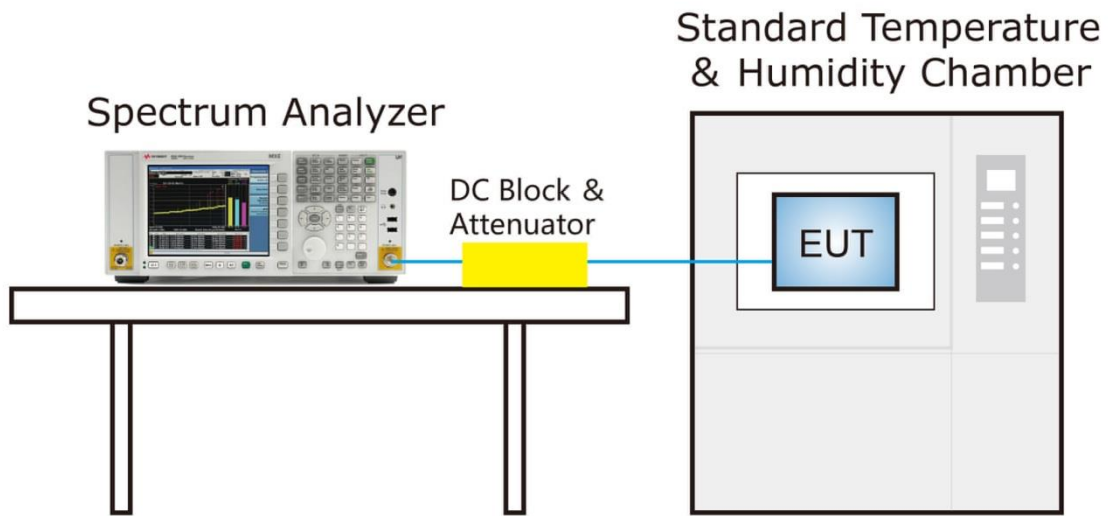

7.7.4. Test Result

Product	Streaming Media Player	Temperature	-30 ~ 50°C
Test Engineer	Kevin Ker	Relative Humidity	46 ~ 55%RH
Test Site	SR2	Test Time	2021/07/19
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	-1.25	1.64	2.51	2.70
		- 20	-1.06	1.74	2.61	3.09
		- 10	0.10	1.83	2.32	2.99
		0	0.29	1.64	2.41	3.38
		+ 10	0.68	1.64	2.80	3.19
		+ 20 (Ref)	0.77	1.54	2.61	3.38
		+ 30	0.87	2.03	2.80	3.38
		+ 40	0.97	2.22	2.80	3.67
		+ 50	0.87	2.03	2.90	3.57
115%	138	+ 20	1.16	1.83	2.80	3.86
85%	102	+ 20	1.25	1.93	2.70	3.38

Note: Frequency Tolerance (ppm) = $\frac{\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}]\}}{\text{Declared Frequency (Hz)}} * 10^6$.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

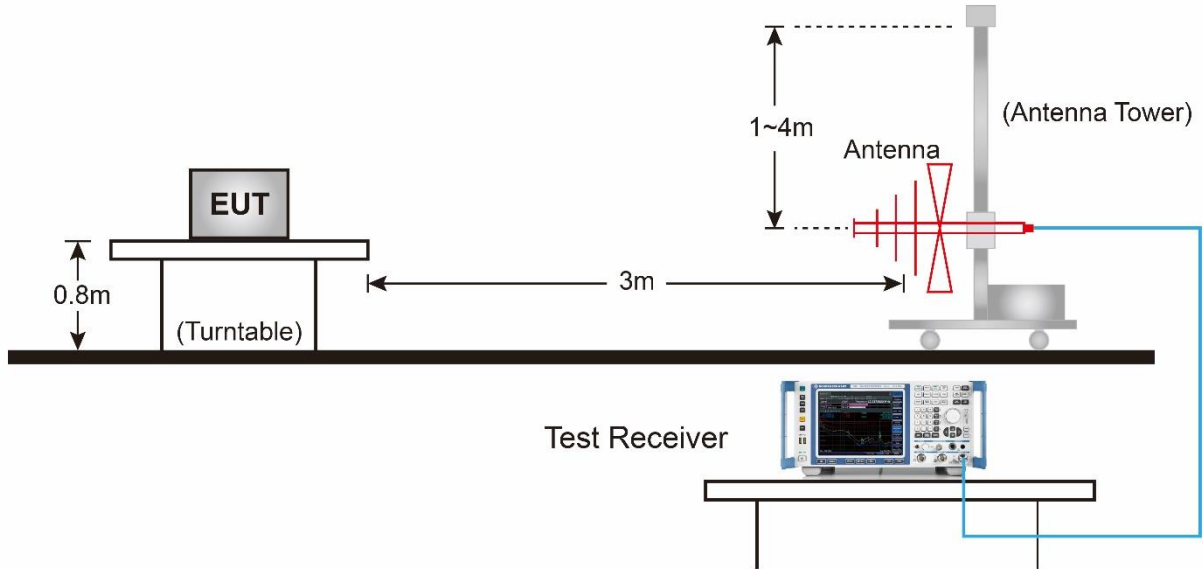


Above 1GHz Test Setup:

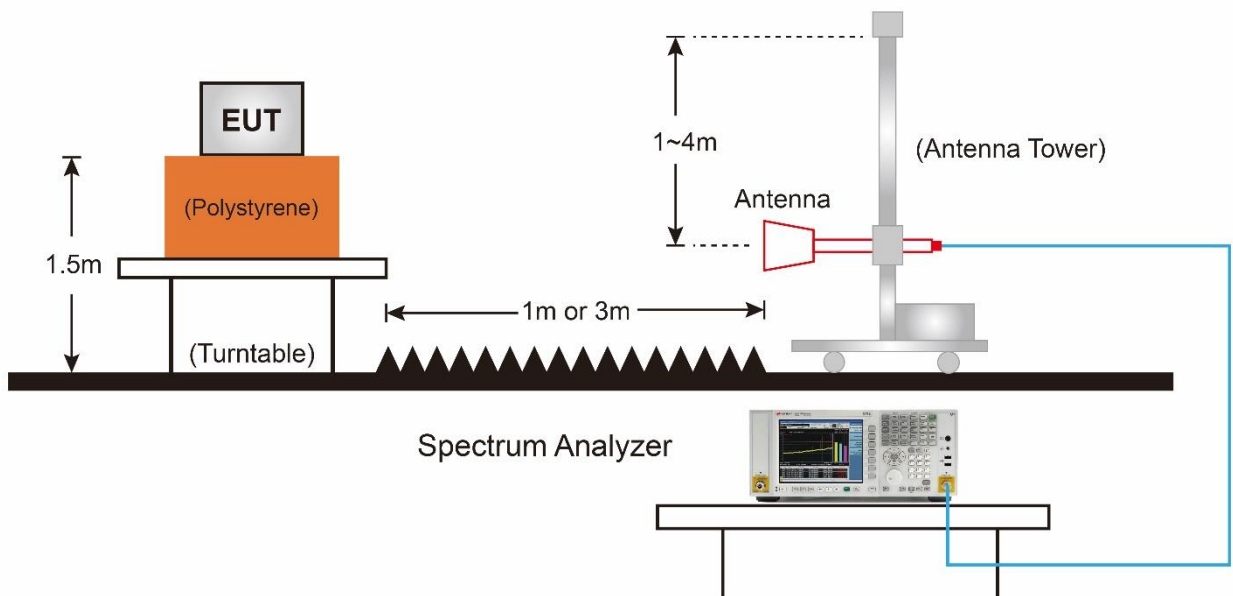

7.8.5. Test Result

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

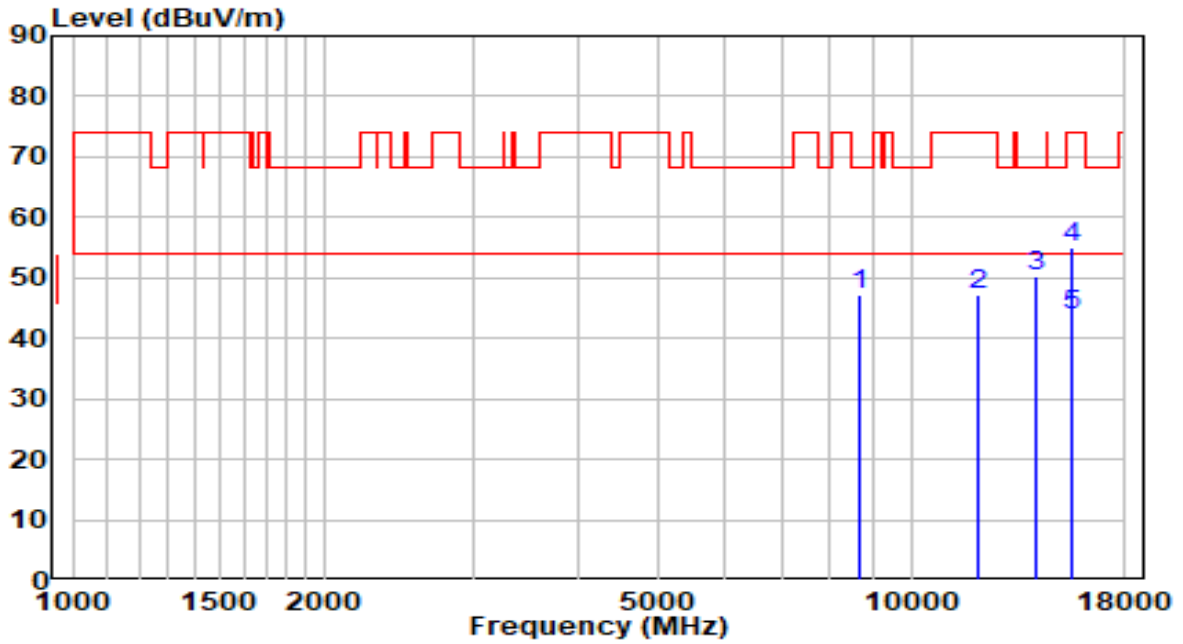


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8667.000	34.38	12.86	47.24	-20.96	68.20	Peak
2	12016.000	29.49	17.82	47.31	-26.69	74.00	Peak
3	14090.000	28.71	21.49	50.20	-18.00	68.20	Peak
4	15543.500	33.68	21.38	55.06	-18.94	74.00	Peak
5	* 15543.500	22.27	21.38	43.64	-10.36	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

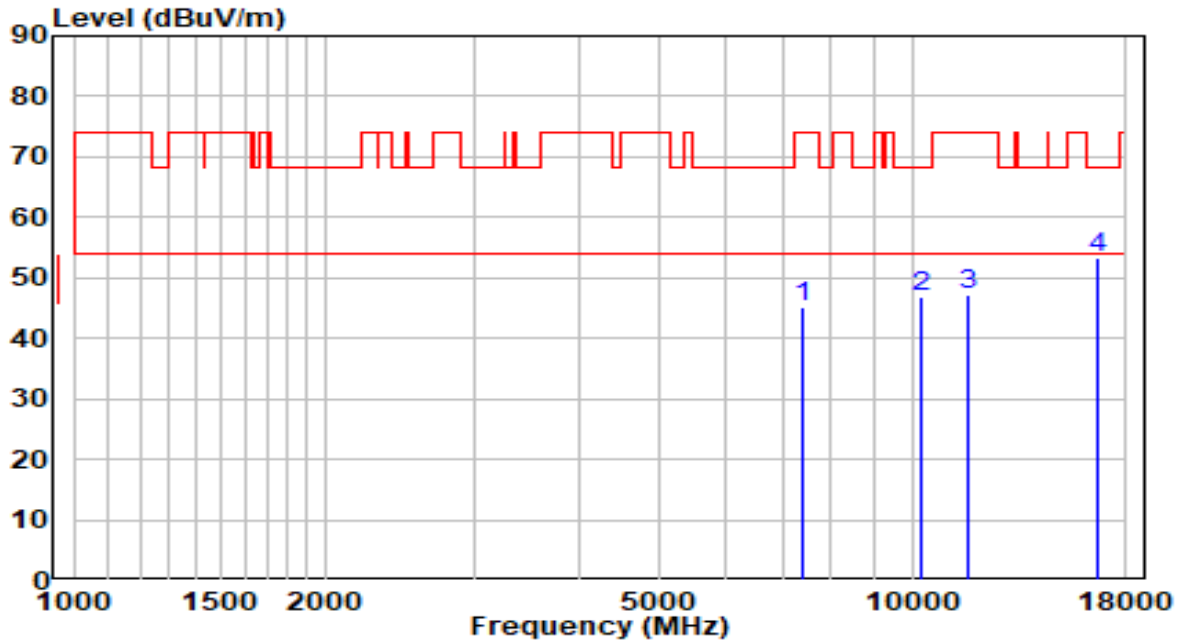


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	33.77	11.43	45.20	-28.80	74.00	Peak
2	10222.500	30.90	16.12	47.02	-21.18	68.20	Peak
3	11659.000	28.90	18.25	47.15	-26.85	74.00	Peak
4	* 16691.000	30.12	23.35	53.48	-14.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	AC 120V/60Hz

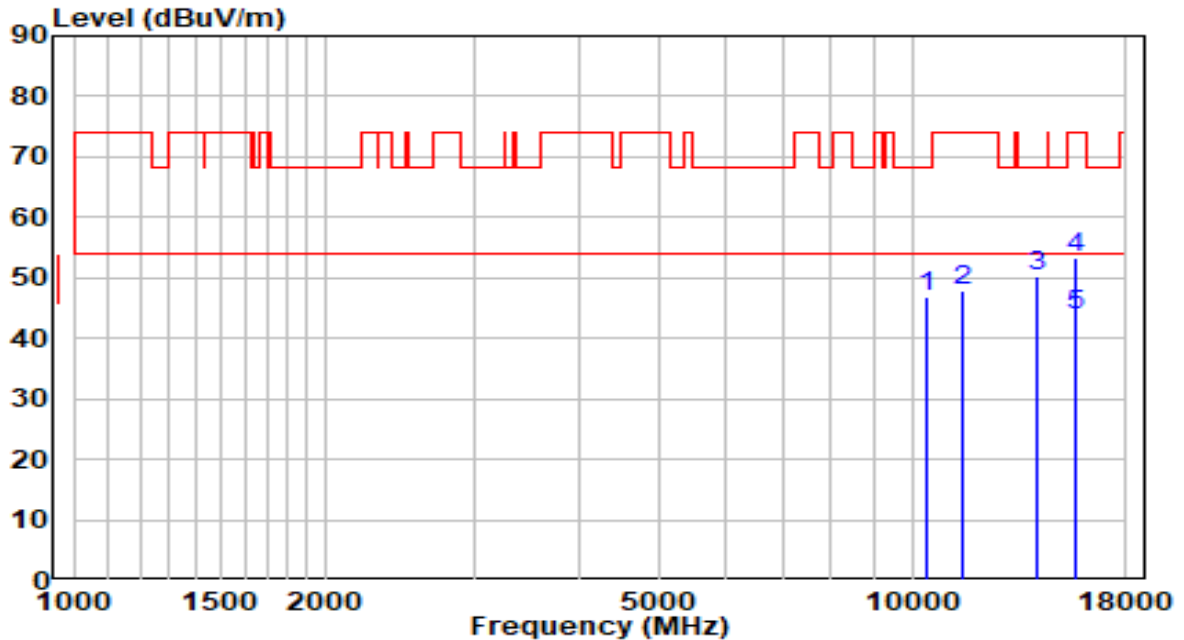


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10392.500	30.24	16.70	46.94	-21.26	68.20	Peak
2	11489.000	29.56	18.44	47.99	-26.01	74.00	Peak
3	14073.000	28.78	21.50	50.27	-17.93	68.20	Peak
4	15662.500	31.99	21.18	53.17	-20.83	74.00	Peak
5	* 15662.500	22.62	21.18	43.80	-10.20	54.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	AC 120V/60Hz

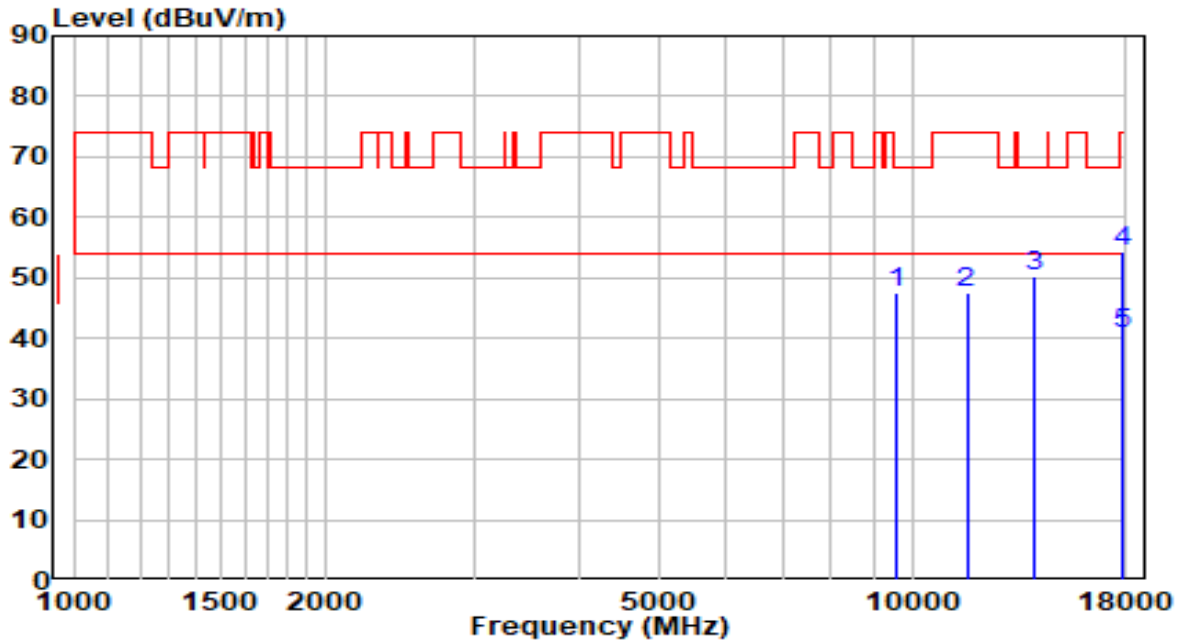


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9568.000	32.85	14.55	47.40	-20.80	68.20	Peak
2	11616.500	29.30	18.30	47.60	-26.40	74.00	Peak
3	13971.000	28.87	21.46	50.34	-17.86	68.20	Peak
4	17796.000	22.83	31.49	54.32	-19.68	74.00	Peak
5	* 17796.000	9.43	31.49	40.92	-13.08	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	AC 120V/60Hz

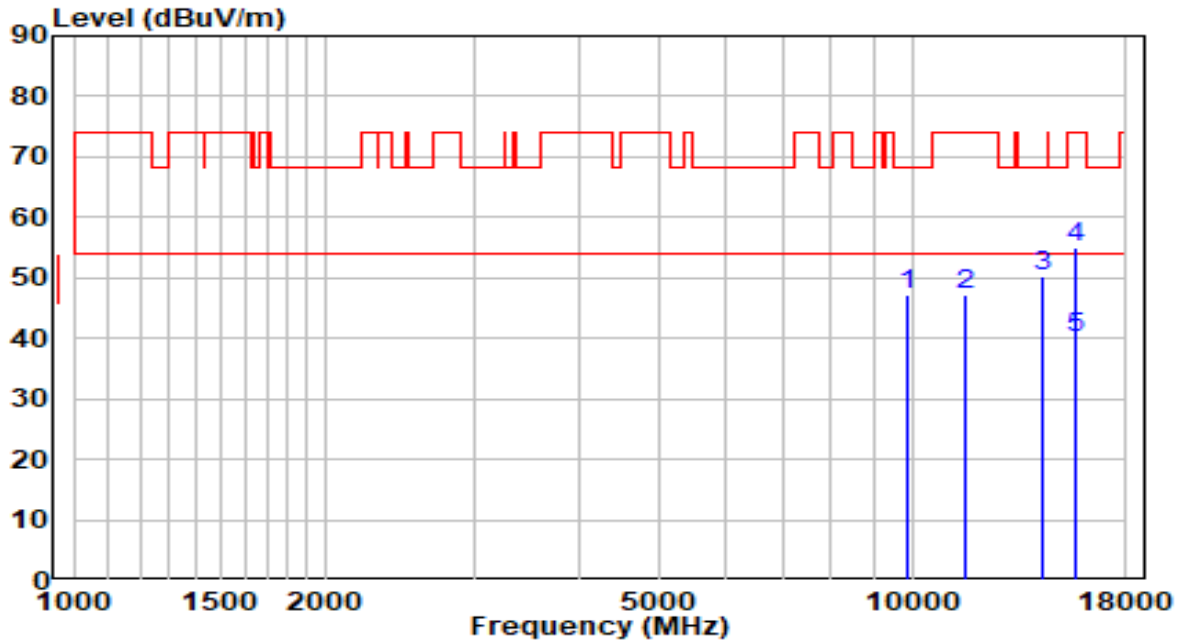


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9882.500	32.01	15.14	47.15	-21.05	68.20	Peak
2	11591.000	28.73	18.34	47.07	-26.93	74.00	Peak
3	14268.500	28.96	21.43	50.39	-17.81	68.20	Peak
4	15713.500	34.01	21.09	55.10	-18.90	74.00	Peak
5	* 15713.500	19.14	21.09	40.23	-13.77	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	AC 120V/60Hz

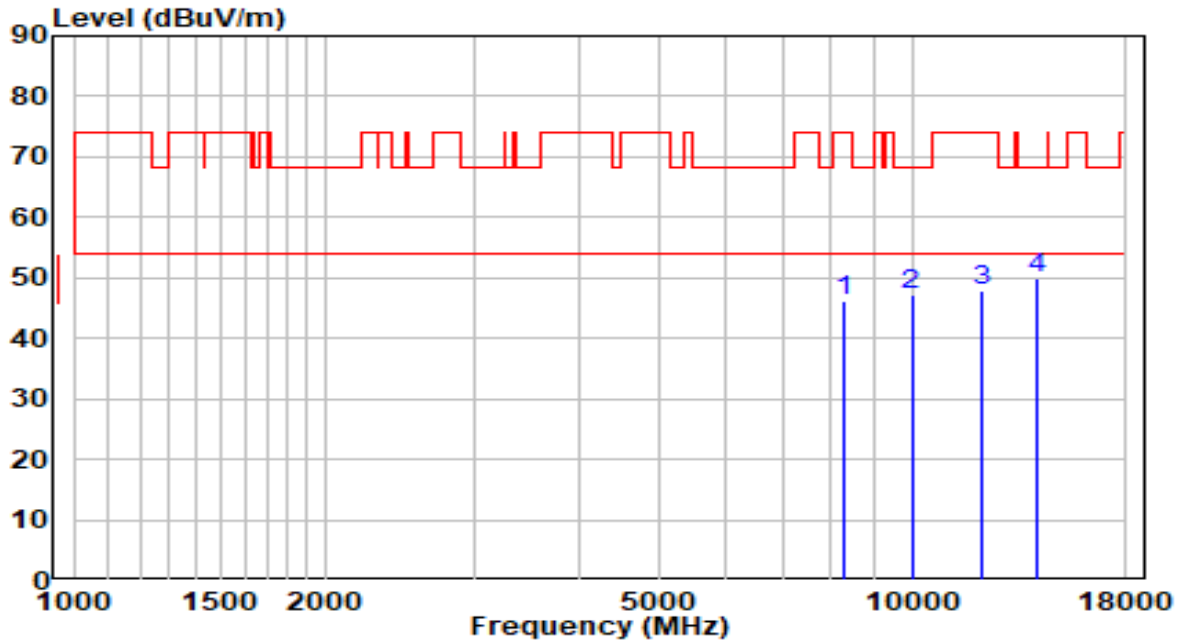


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8284.500	33.60	12.49	46.08	-27.92	74.00	Peak
2	9984.500	31.79	15.33	47.12	-21.08	68.20	Peak
3	12135.000	29.99	17.84	47.83	-26.17	74.00	Peak
4	* 14098.500	28.50	21.49	49.99	-18.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

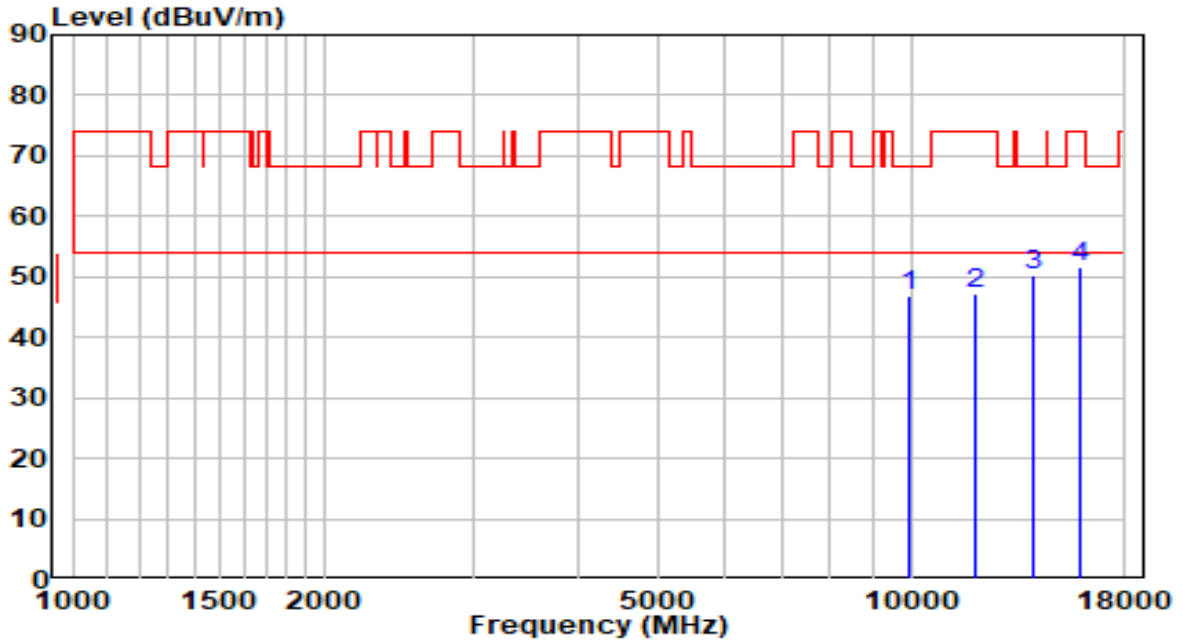


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9976.000	31.47	15.31	46.79	-21.41	68.20	Peak
2	11948.000	29.18	17.89	47.07	-26.93	74.00	Peak
3	* 13988.000	28.82	21.50	50.32	-17.88	68.20	Peak
4	15883.500	30.92	20.81	51.73	-22.27	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

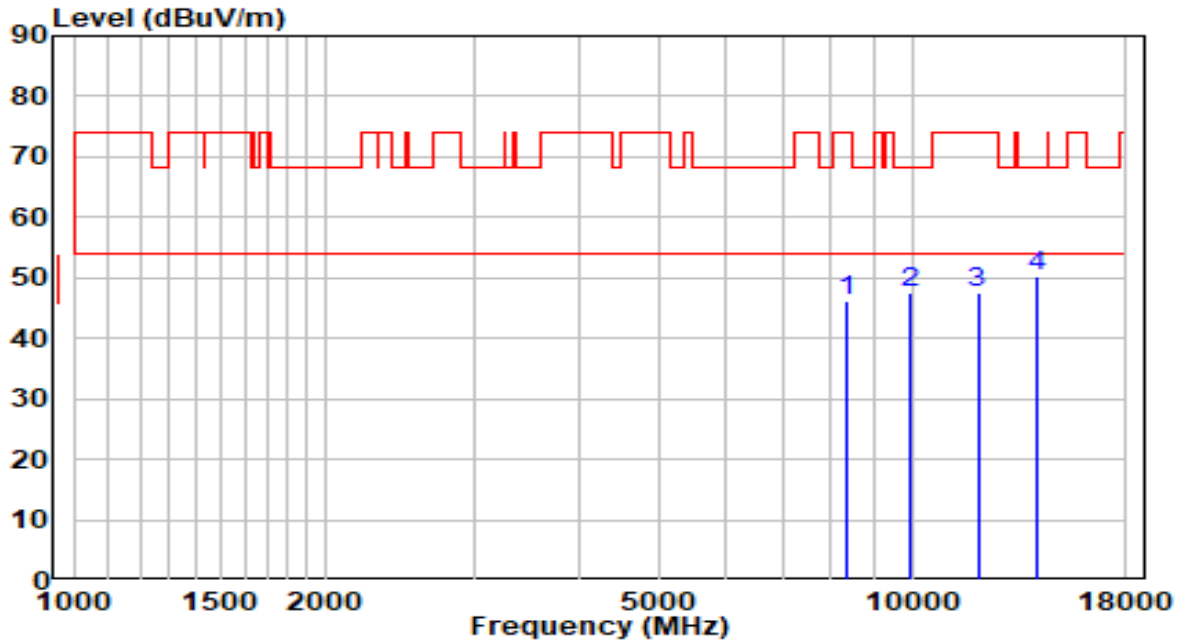


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	33.76	12.48	46.24	-27.76	74.00	Peak
2	9933.500	32.28	15.23	47.52	-20.68	68.20	Peak
3	11973.500	29.61	17.85	47.47	-26.53	74.00	Peak
4	* 14081.500	28.68	21.49	50.17	-18.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	AC 120V/60Hz

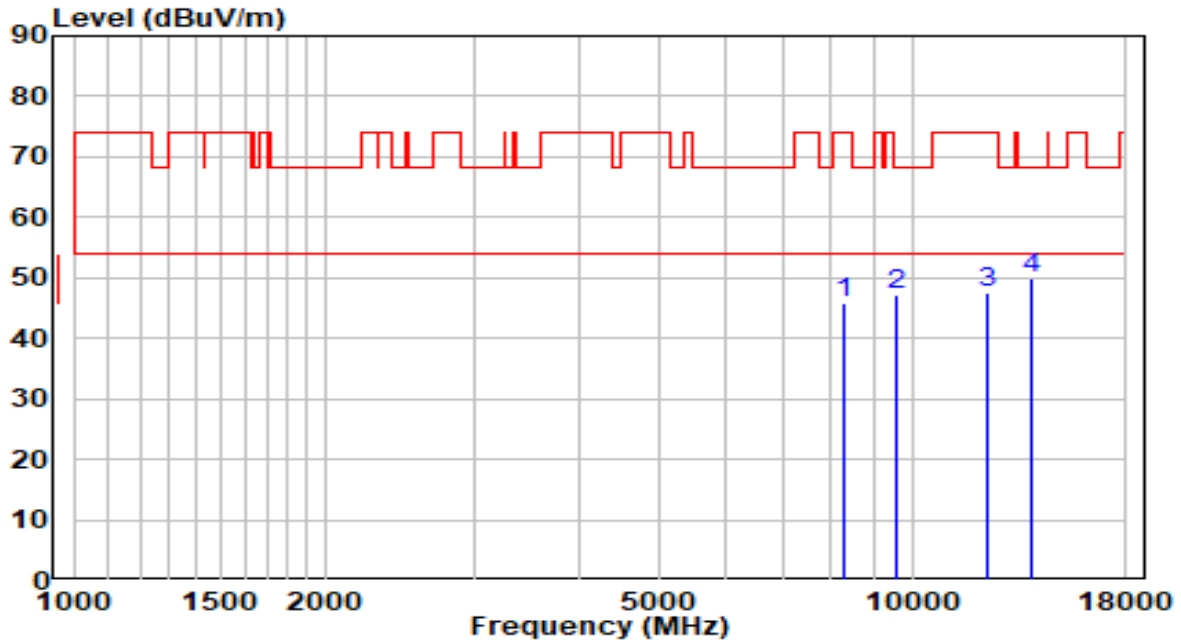


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8267.500	33.50	12.49	45.99	-28.01	74.00	Peak
2	9593.500	32.48	14.60	47.07	-21.13	68.20	Peak
3	12305.000	29.71	17.87	47.58	-26.42	74.00	Peak
4	* 13903.000	28.71	21.33	50.05	-18.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	AC 120V/60Hz

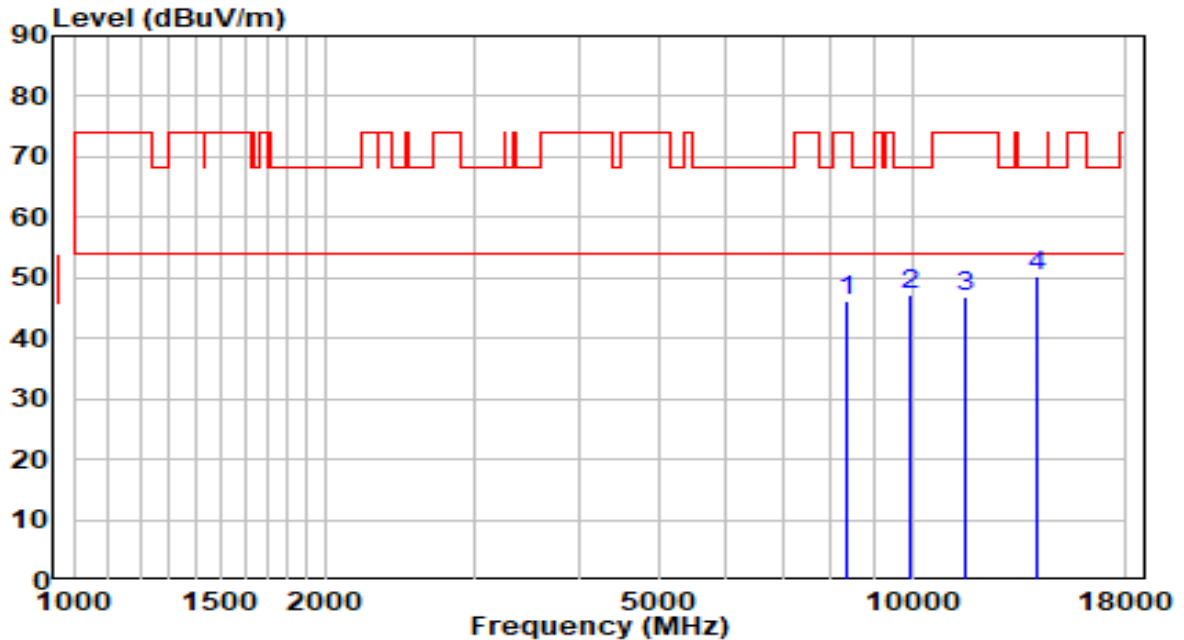


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8378.000	33.66	12.47	46.13	-27.87	74.00	Peak
2	9959.000	31.90	15.28	47.18	-21.02	68.20	Peak
3	11557.000	28.46	18.38	46.84	-27.16	74.00	Peak
4	* 14073.000	28.69	21.50	50.18	-18.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

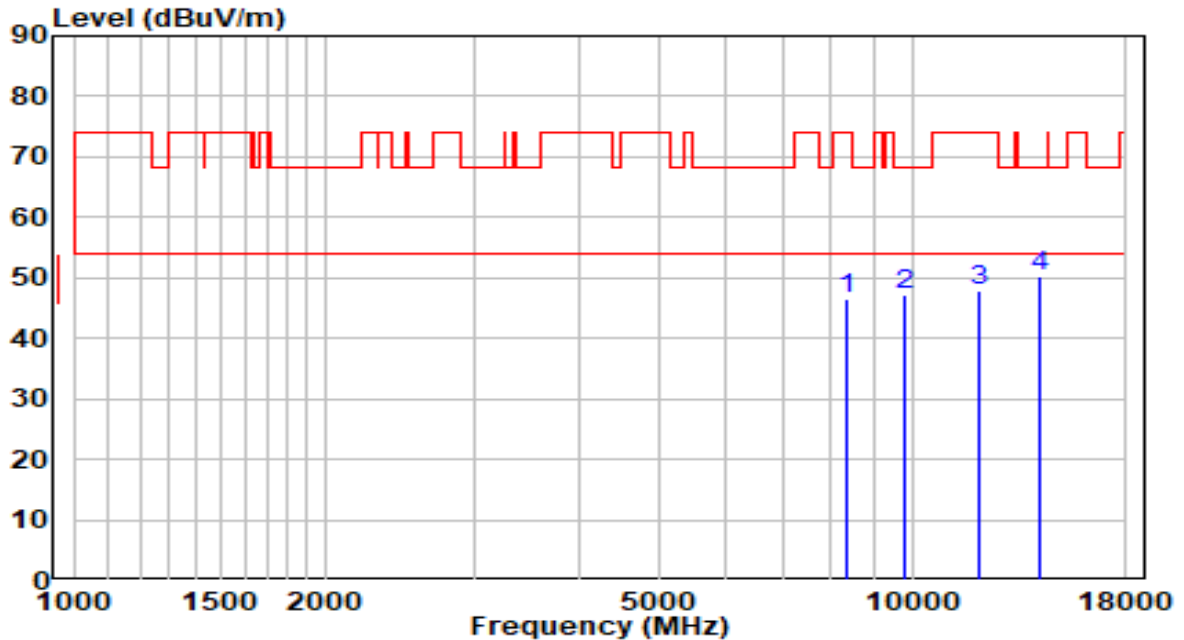


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	34.13	12.48	46.60	-27.40	74.00	Peak
2	9823.000	32.12	15.03	47.15	-21.05	68.20	Peak
3	11982.000	29.90	17.84	47.74	-26.26	74.00	Peak
4	* 14209.000	28.71	21.45	50.16	-18.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

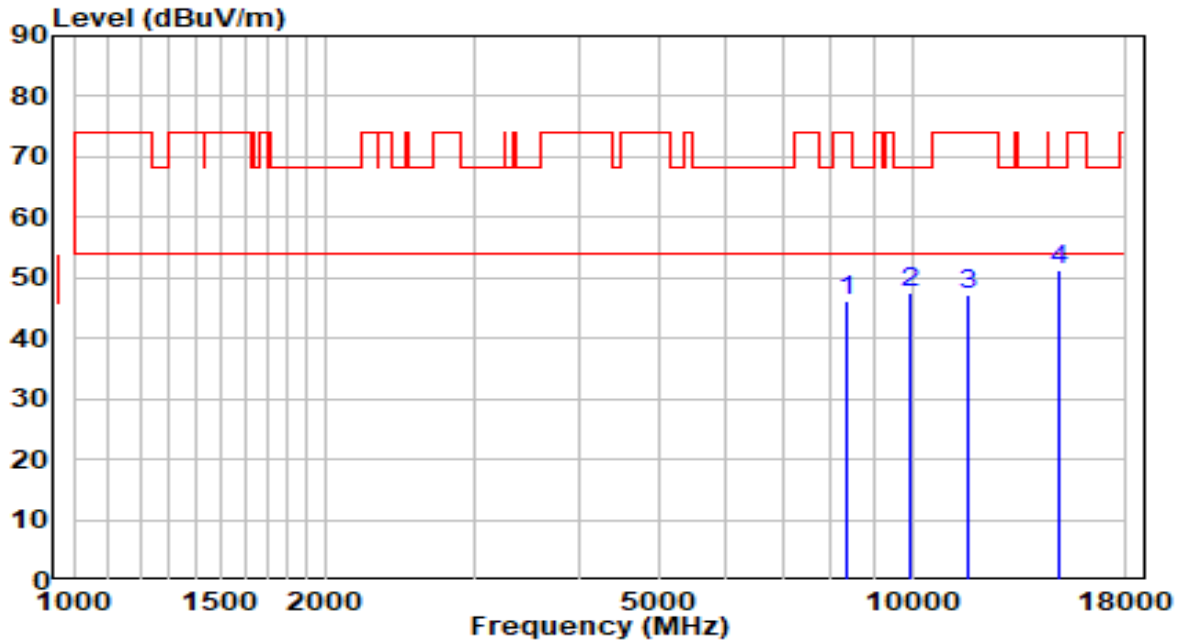


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	33.82	12.48	46.29	-27.71	74.00	Peak
2	9967.500	32.13	15.30	47.43	-20.77	68.20	Peak
3	11659.000	28.92	18.25	47.17	-26.83	74.00	Peak
4	* 15008.000	29.76	21.49	51.25	-16.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

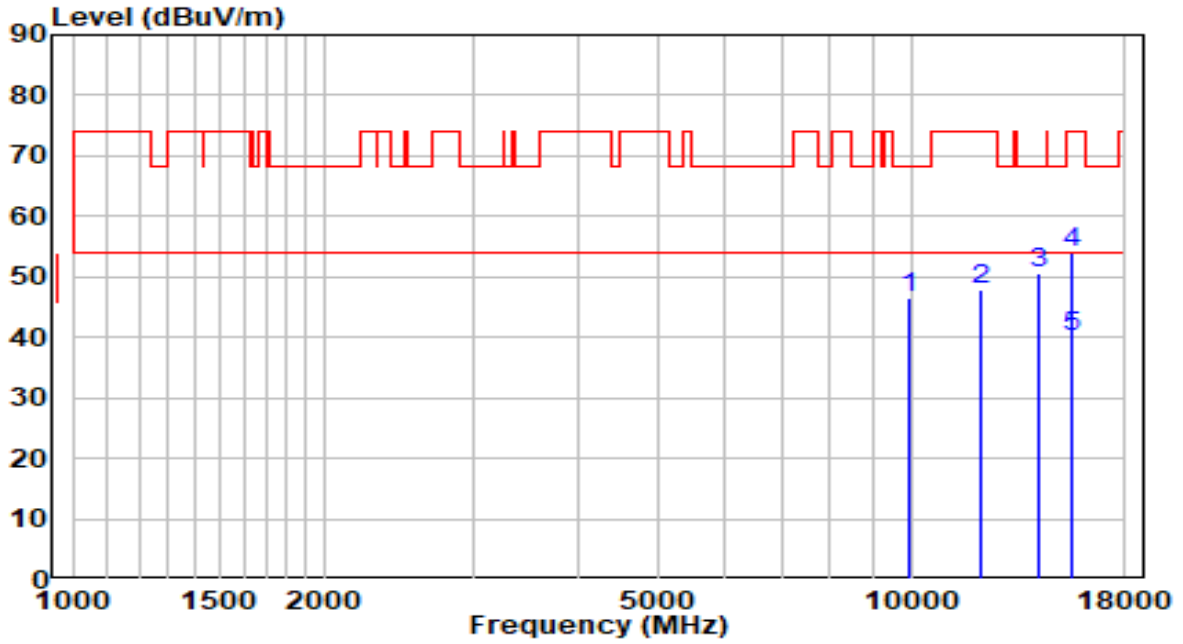


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9950.500	31.38	15.27	46.65	-21.55	68.20	Peak
2	12092.500	30.11	17.84	47.95	-26.05	74.00	Peak
3	14200.500	29.05	21.45	50.51	-17.69	68.20	Peak
4	15543.500	32.68	21.38	54.06	-19.94	74.00	Peak
5	* 15543.500	18.78	21.38	40.15	-13.85	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

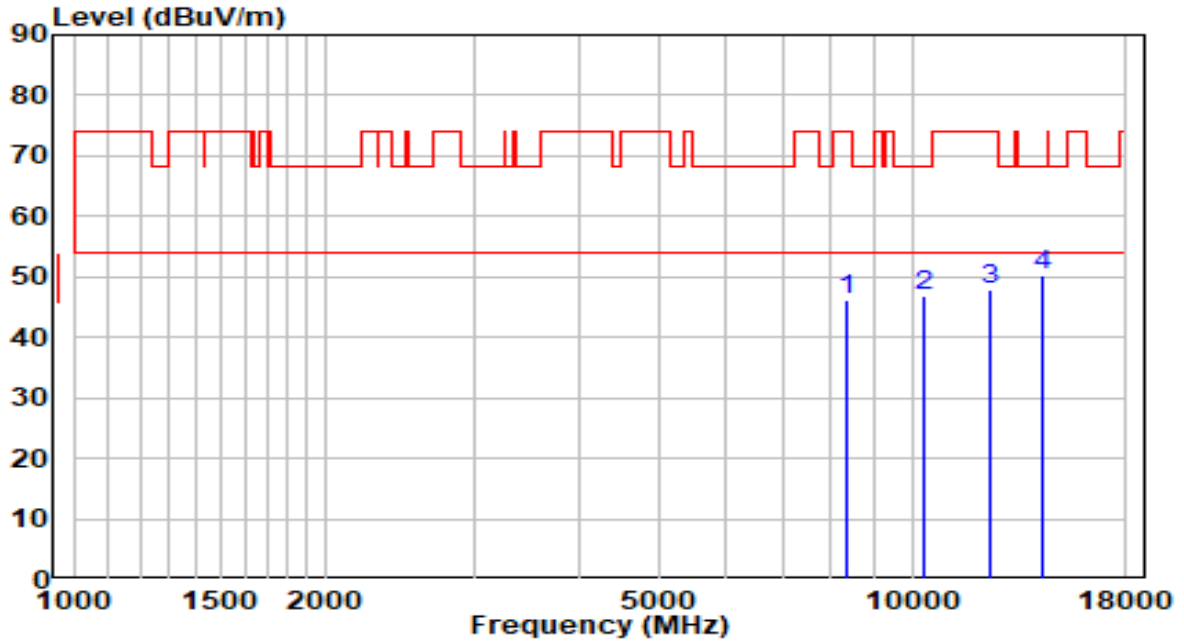


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8369.500	33.81	12.47	46.28	-27.72	74.00	Peak
2	10307.500	30.46	16.41	46.87	-21.33	68.20	Peak
3	12356.000	29.95	17.88	47.83	-26.17	74.00	Peak
4	* 14260.000	28.86	21.43	50.30	-17.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

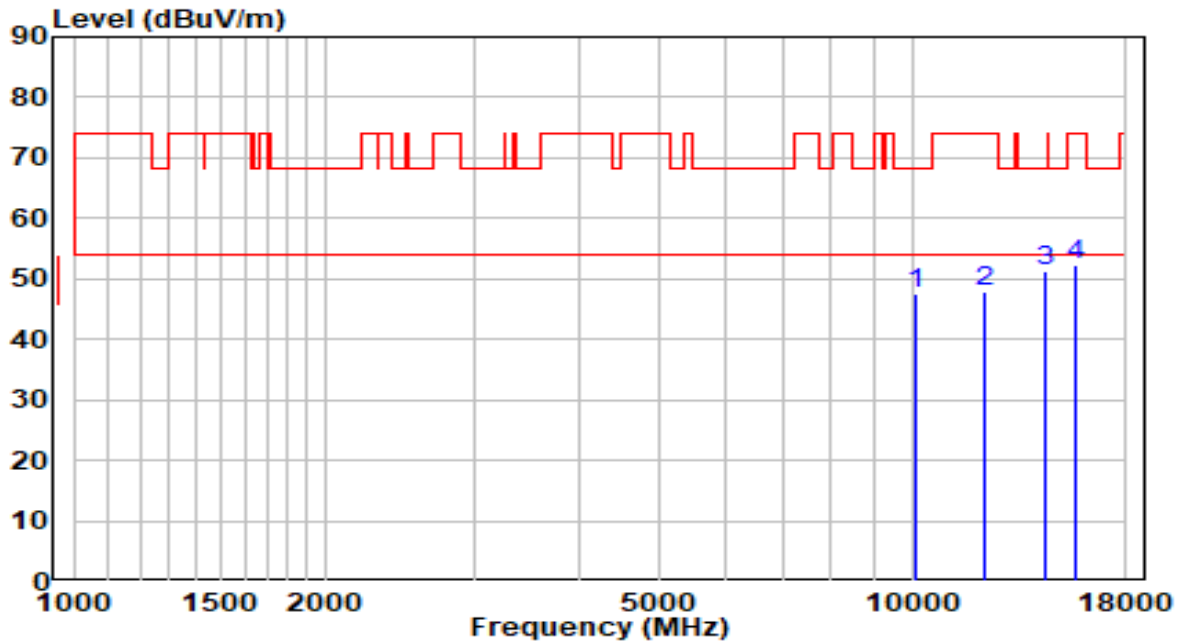


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10078.000	31.96	15.63	47.59	-20.61	68.20	Peak
2	12237.000	30.05	17.86	47.91	-26.09	74.00	Peak
3	* 14379.000	29.90	21.39	51.29	-16.91	68.20	Peak
4	15654.000	30.96	21.19	52.15	-21.85	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

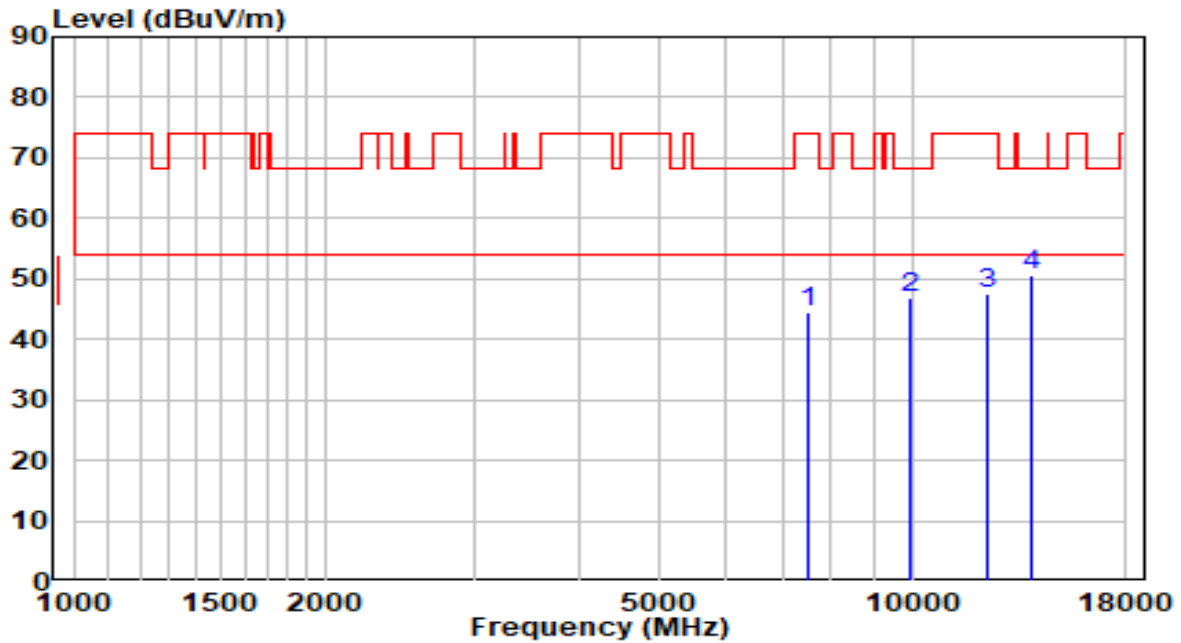


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	32.90	11.70	44.60	-29.40	74.00	Peak
2	9925.000	31.75	15.22	46.97	-21.23	68.20	Peak
3	12262.500	29.81	17.86	47.67	-26.33	74.00	Peak
4	* 13877.500	29.44	21.28	50.72	-17.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

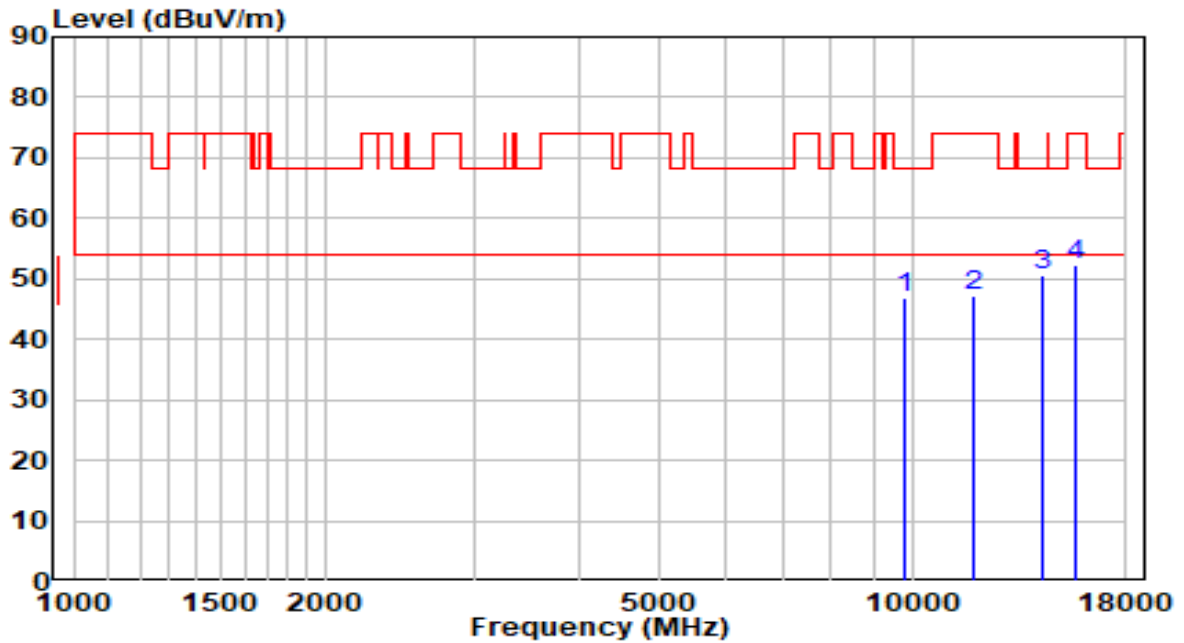


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9831.500	31.92	15.04	46.96	-21.24	68.20	Peak
2	11812.000	29.03	18.06	47.09	-26.91	74.00	Peak
3	* 14302.500	29.20	21.42	50.62	-17.58	68.20	Peak
4	15722.000	31.37	21.08	52.45	-21.55	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

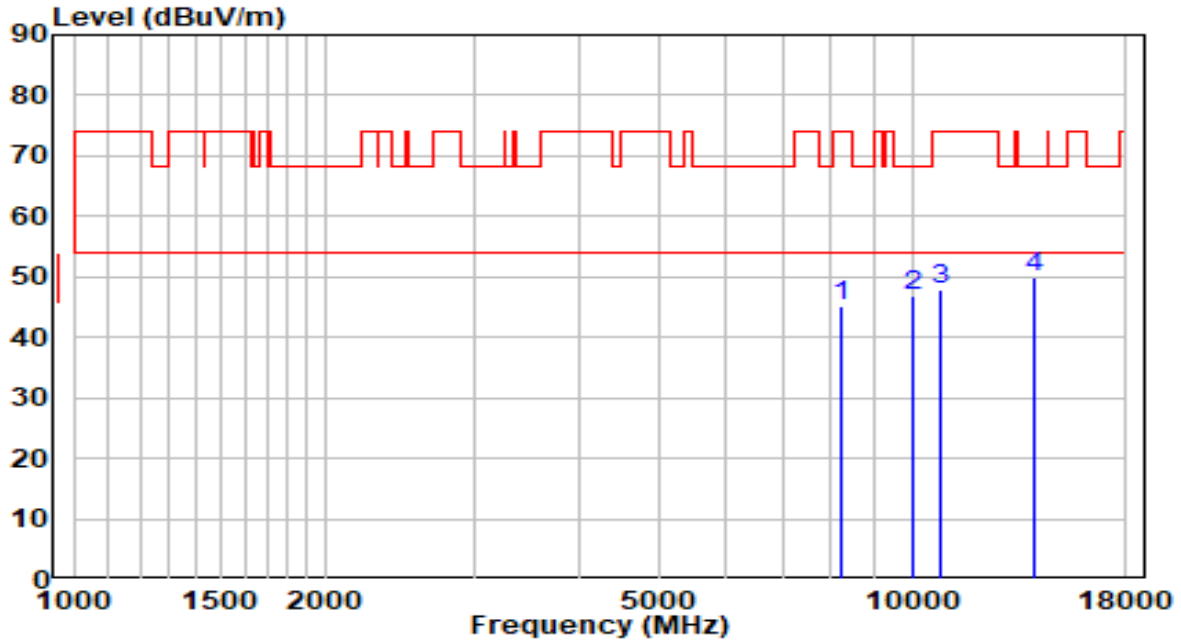


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8242.000	32.74	12.49	45.23	-28.77	74.00	Peak
2	10018.500	31.55	15.42	46.97	-21.23	68.20	Peak
3	10800.500	30.33	17.50	47.82	-26.18	74.00	Peak
4	* 13971.000	28.46	21.46	49.93	-18.27	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

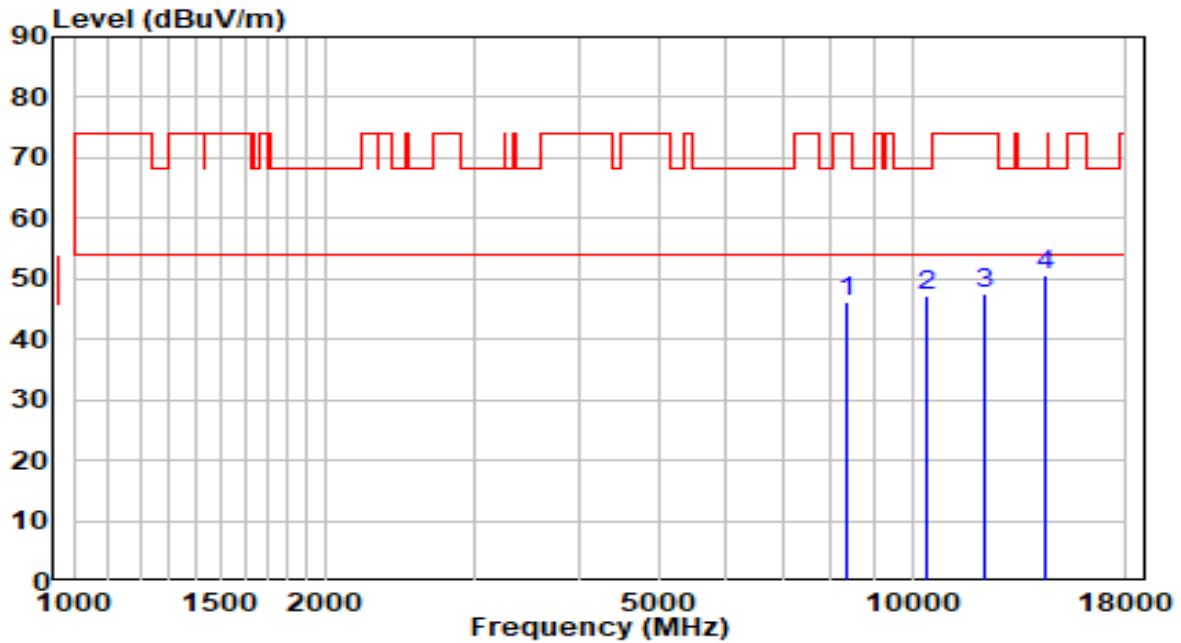


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	33.87	12.48	46.35	-27.65	74.00	Peak
2	10418.000	30.55	16.79	47.34	-20.86	68.20	Peak
3	12245.500	29.62	17.86	47.48	-26.52	74.00	Peak
4	* 14447.000	29.40	21.37	50.77	-17.43	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

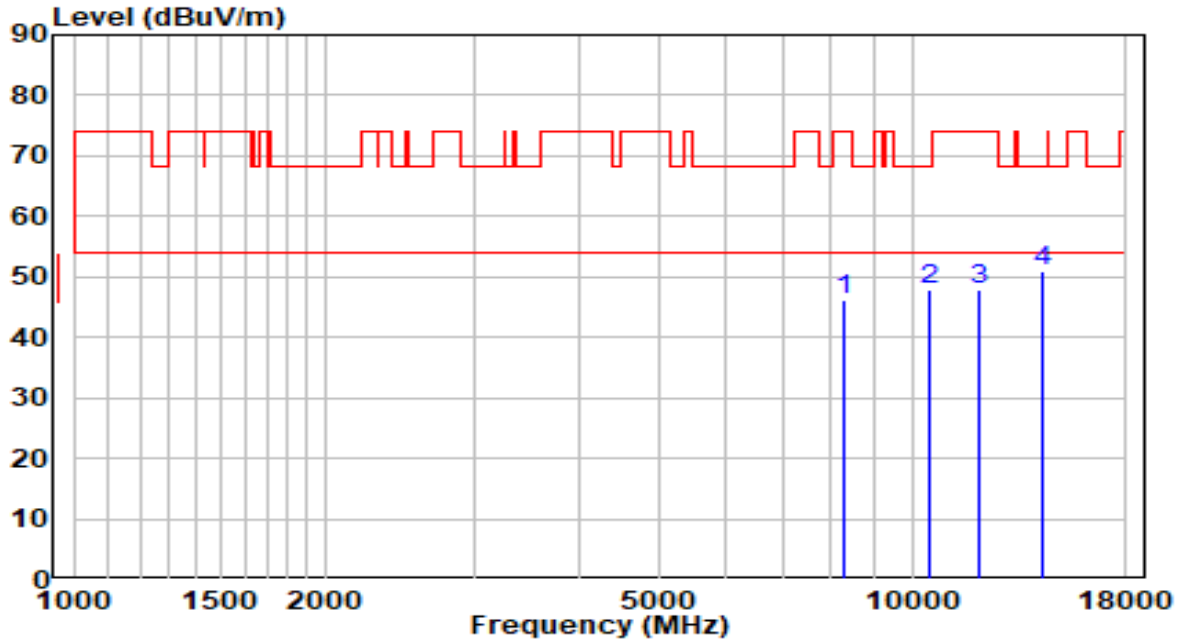


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8318.500	33.84	12.48	46.32	-27.68	74.00	Peak
2	10520.000	30.76	17.10	47.86	-20.34	68.20	Peak
3	12041.500	29.94	17.83	47.77	-26.23	74.00	Peak
4	* 14285.500	29.44	21.43	50.87	-17.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

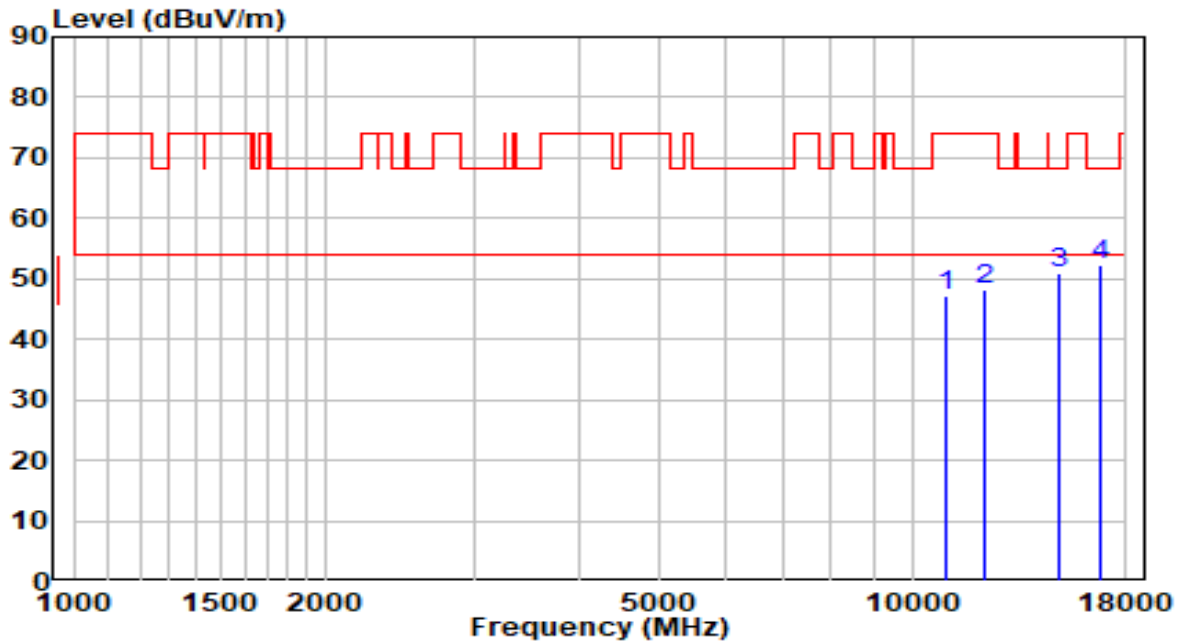


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10979.000	29.62	17.75	47.38	-26.62	74.00	Peak
2	12245.500	30.29	17.86	48.15	-25.85	74.00	Peak
3	14923.000	29.33	21.47	50.80	-17.40	68.20	Peak
4	* 16716.500	28.75	23.54	52.29	-15.91	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

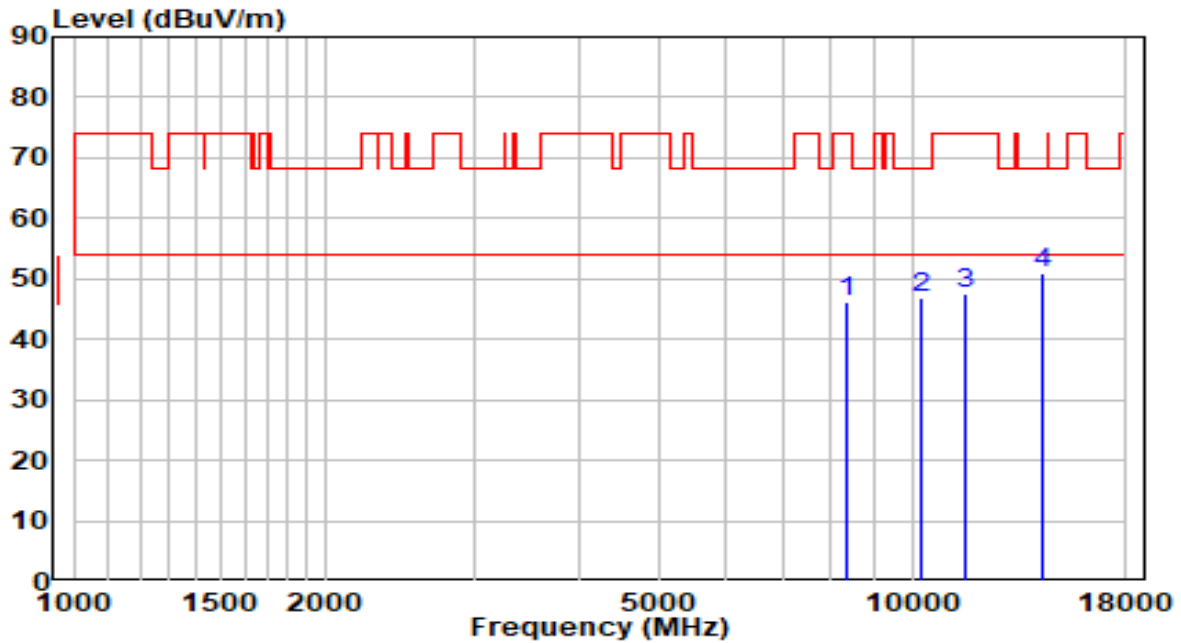


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8344.000	33.59	12.48	46.07	-27.93	74.00	Peak
2	10282.000	30.60	16.32	46.92	-21.28	68.20	Peak
3	11565.500	29.24	18.37	47.60	-26.40	74.00	Peak
4	* 14294.000	29.41	21.42	50.83	-17.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

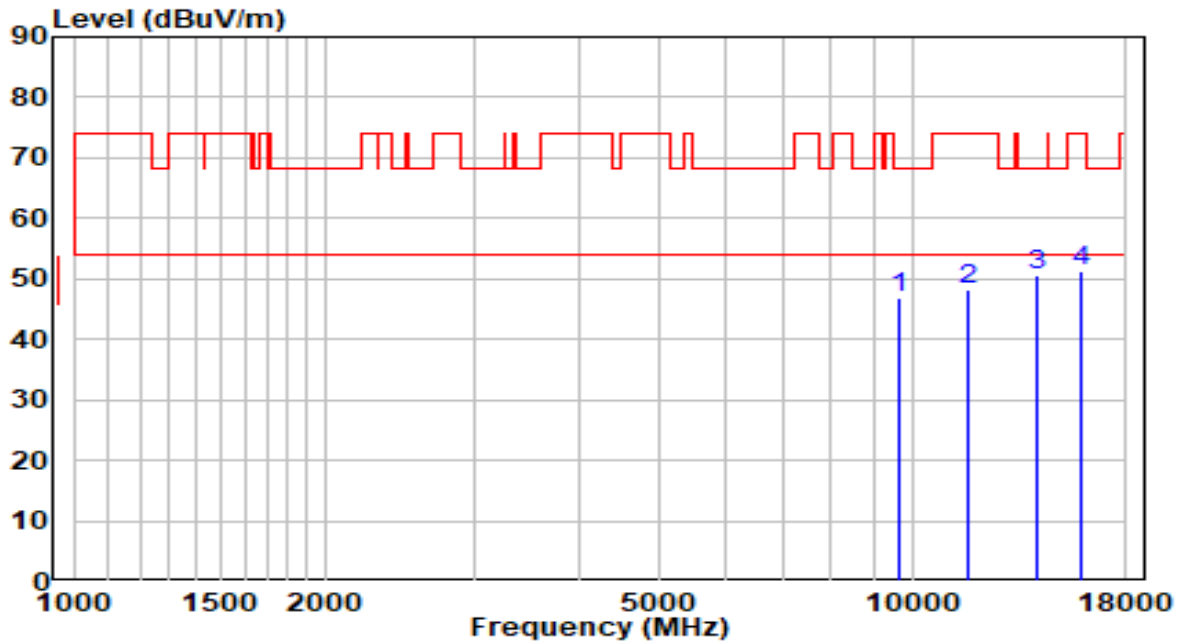


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9627.500	32.04	14.66	46.70	-21.50	68.20	Peak
2	11650.500	29.91	18.26	48.17	-25.83	74.00	Peak
3	* 14064.500	29.08	21.50	50.58	-17.62	68.20	Peak
4	15960.000	30.77	20.68	51.45	-22.55	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

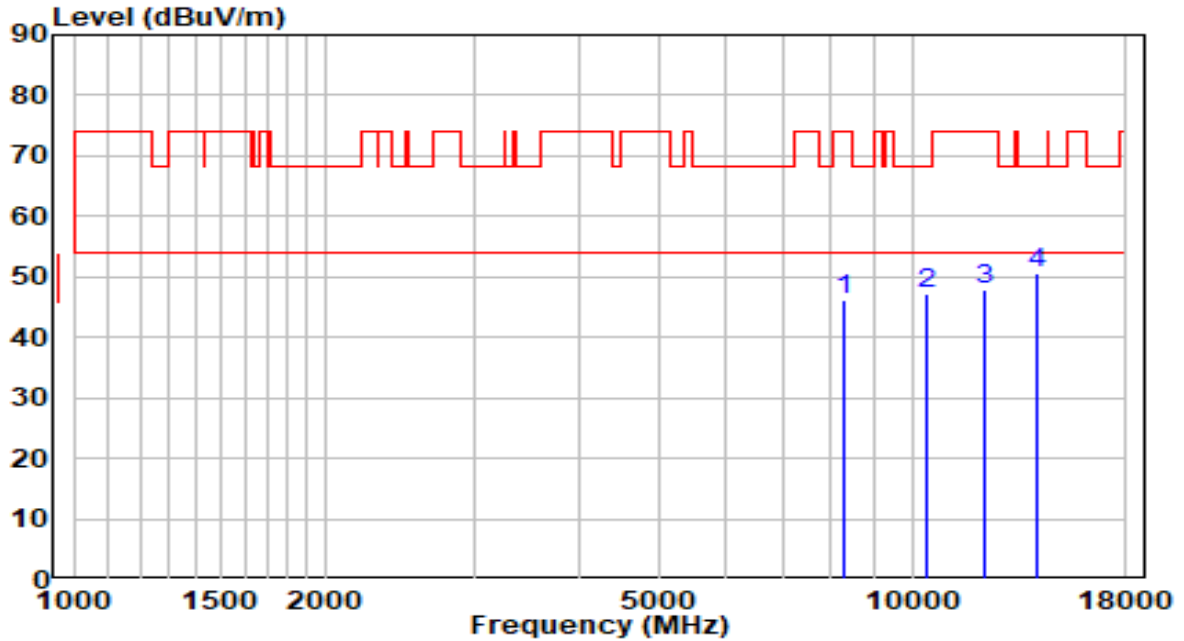


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8301.500	33.84	12.48	46.32	-27.68	74.00	Peak
2	10401.000	30.54	16.73	47.27	-20.93	68.20	Peak
3	12228.500	30.07	17.86	47.93	-26.07	74.00	Peak
4	* 14081.500	29.01	21.49	50.51	-17.69	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

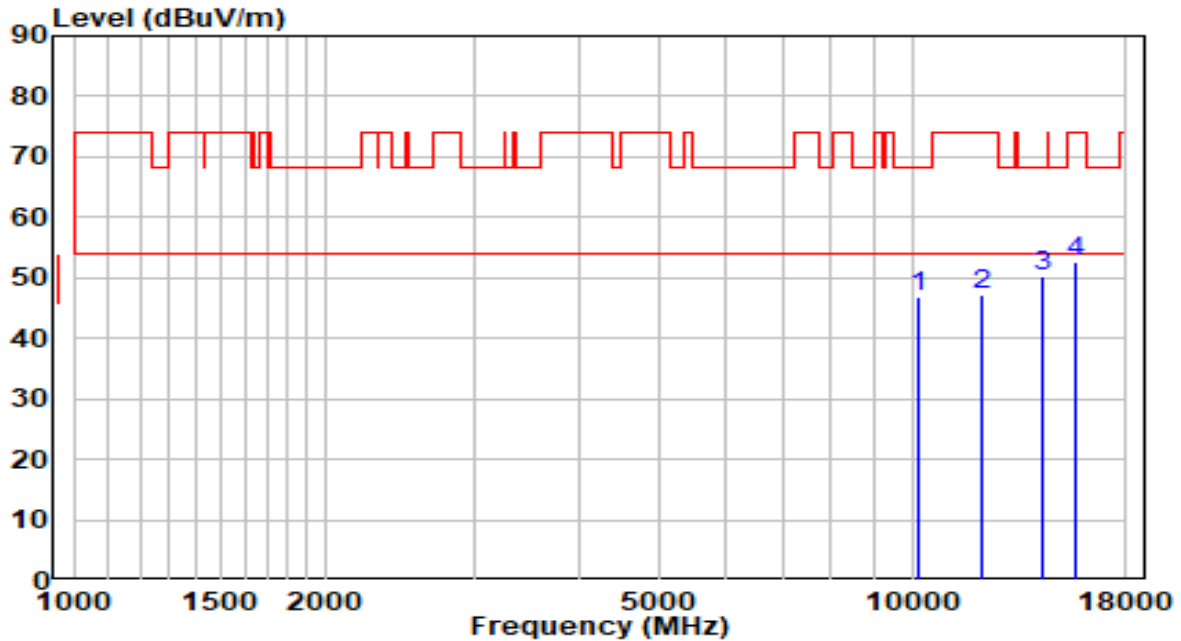


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10180.000	30.75	15.98	46.73	-21.47	68.20	Peak
2	12084.000	29.21	17.83	47.04	-26.96	74.00	Peak
3	* 14302.500	28.91	21.42	50.33	-17.87	68.20	Peak
4	15722.000	31.70	21.08	52.78	-21.22	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

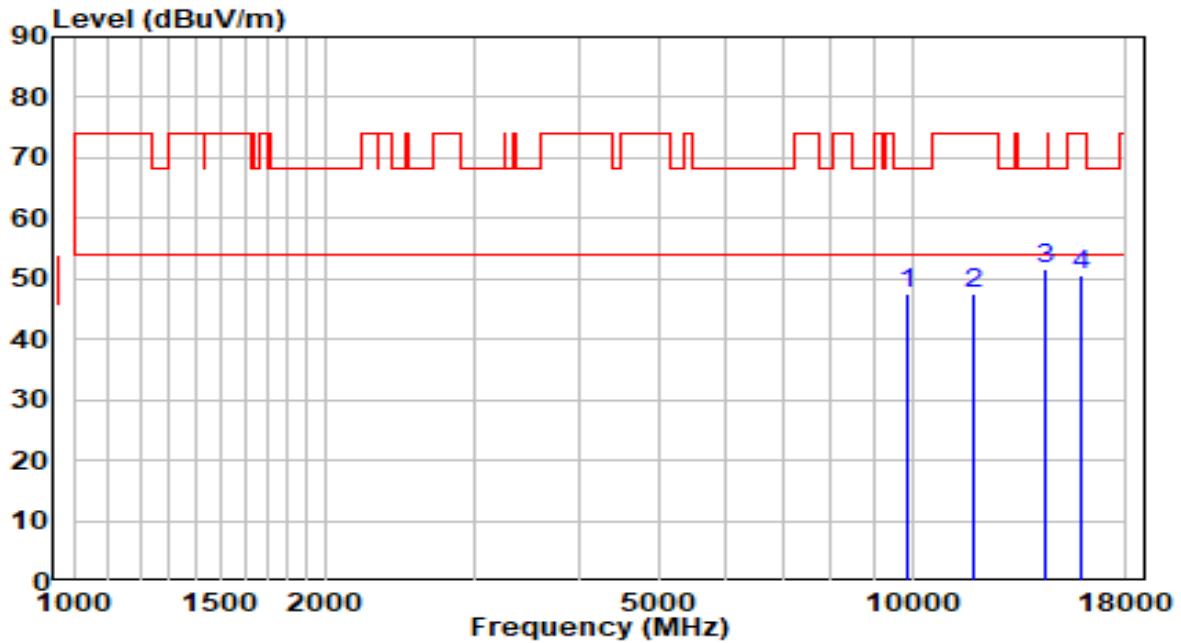


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9840.000	32.43	15.06	47.49	-20.71	68.20	Peak
2	11812.000	29.59	18.06	47.64	-26.36	74.00	Peak
3	* 14430.000	30.19	21.38	51.57	-16.63	68.20	Peak
4	15909.000	29.77	20.76	50.53	-23.47	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

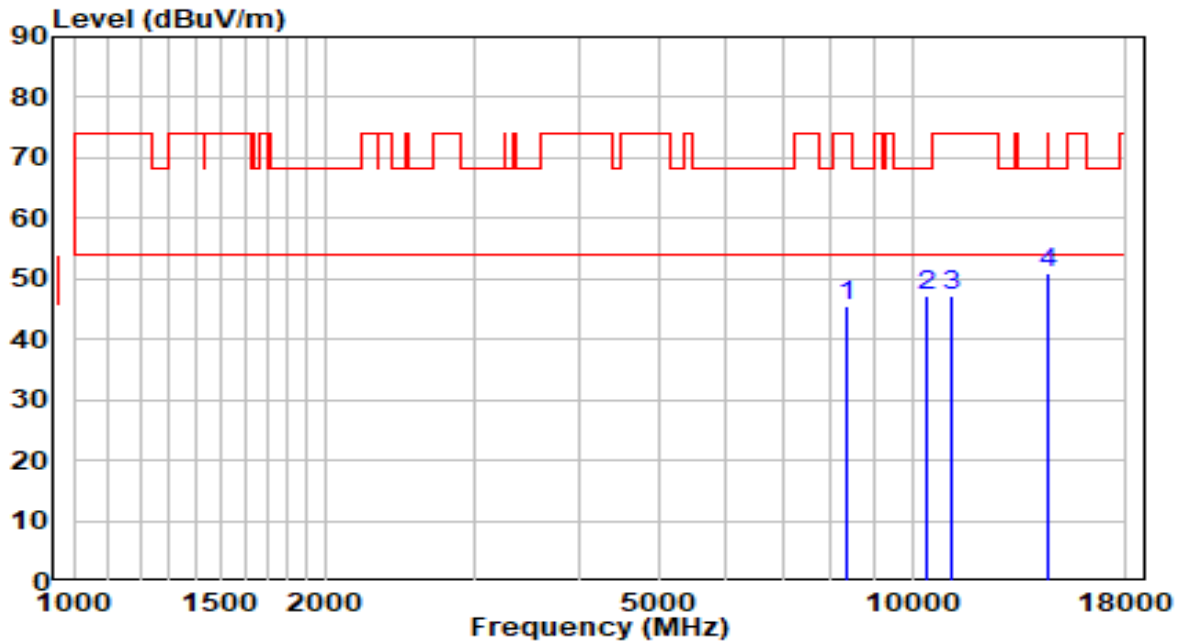


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8369.500	33.07	12.47	45.55	-28.45	74.00	Peak
2	10401.000	30.51	16.73	47.25	-20.95	68.20	Peak
3	11106.500	29.39	17.92	47.32	-26.68	74.00	Peak
4	* 14515.000	29.53	21.36	50.89	-17.31	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

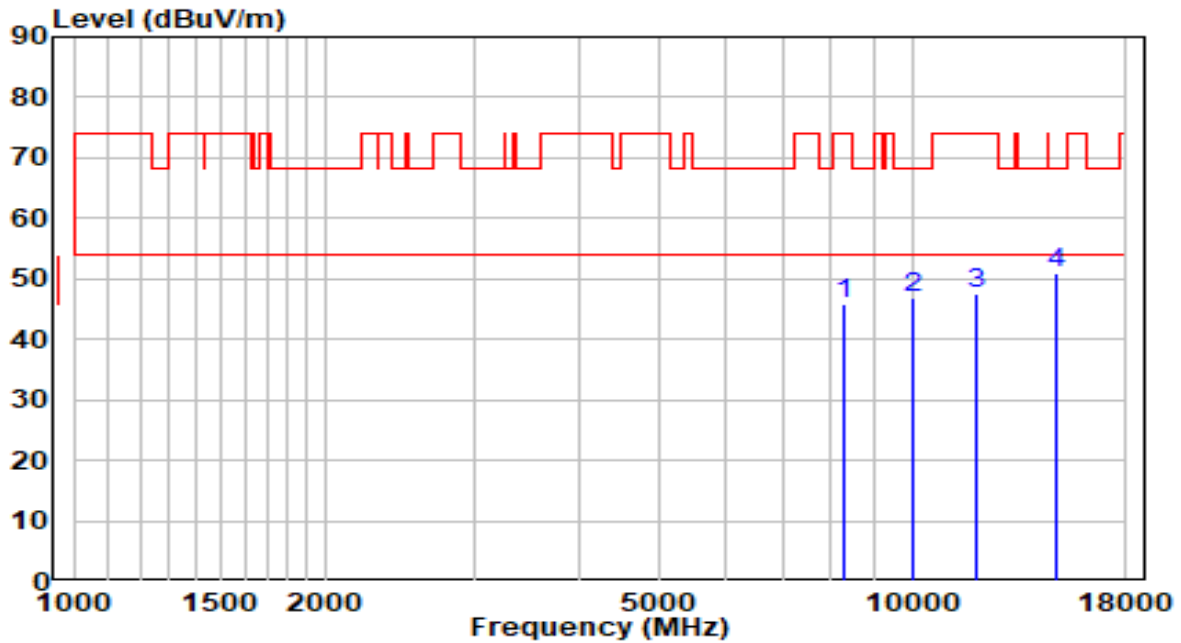


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8301.500	33.30	12.48	45.79	-28.21	74.00	Peak
2	10010.000	31.57	15.39	46.97	-21.23	68.20	Peak
3	11897.000	29.67	17.95	47.62	-26.38	74.00	Peak
4	* 14872.000	29.40	21.46	50.85	-17.35	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

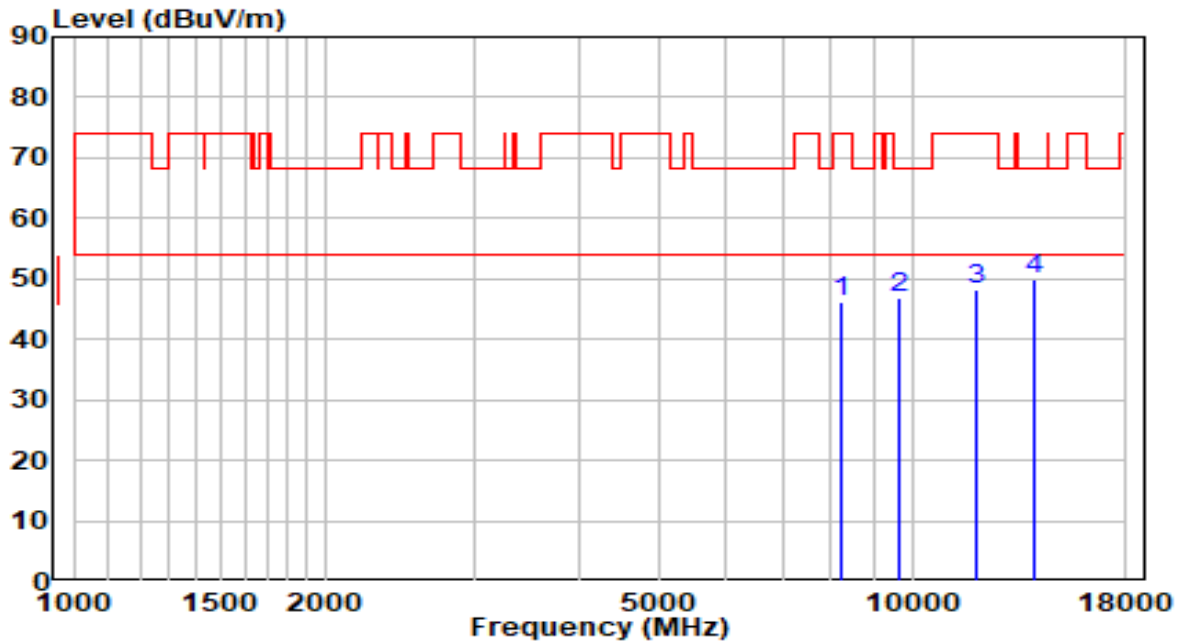


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8208.000	33.59	12.50	46.09	-27.91	74.00	Peak
2	9619.000	32.28	14.64	46.92	-21.28	68.20	Peak
3	11905.500	30.27	17.94	48.20	-25.80	74.00	Peak
4	* 13979.500	28.60	21.48	50.08	-18.12	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

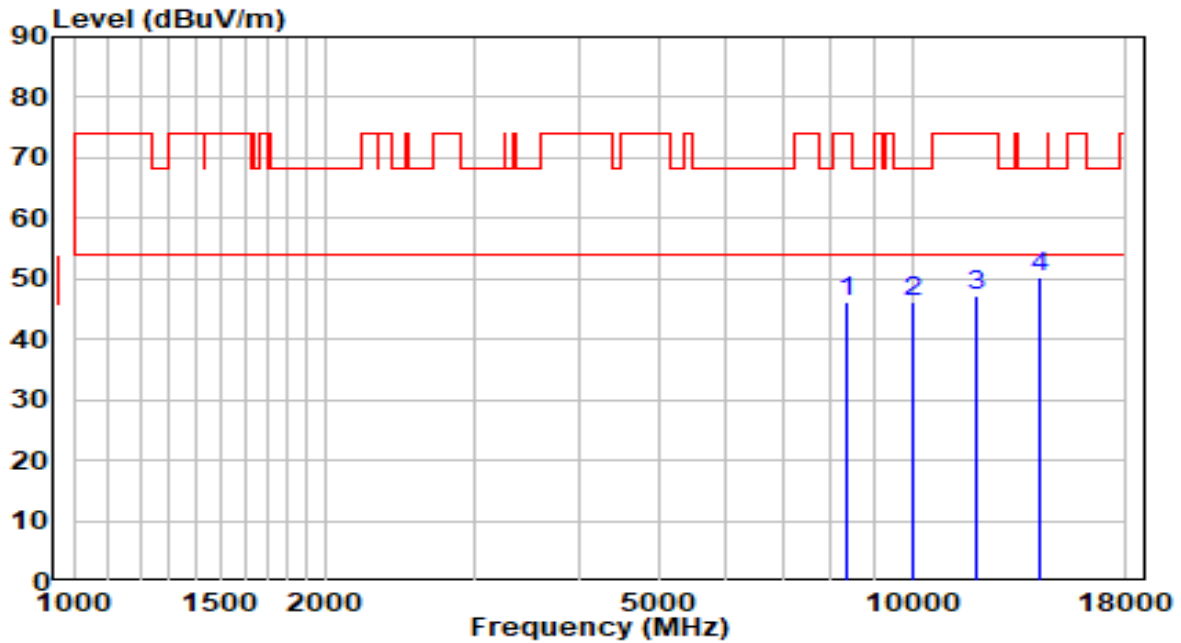


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8369.500	33.81	12.47	46.28	-27.72	74.00	Peak
2	10010.000	30.81	15.39	46.21	-21.99	68.20	Peak
3	11922.500	29.34	17.92	47.25	-26.75	74.00	Peak
4	* 14166.500	28.74	21.47	50.21	-17.99	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

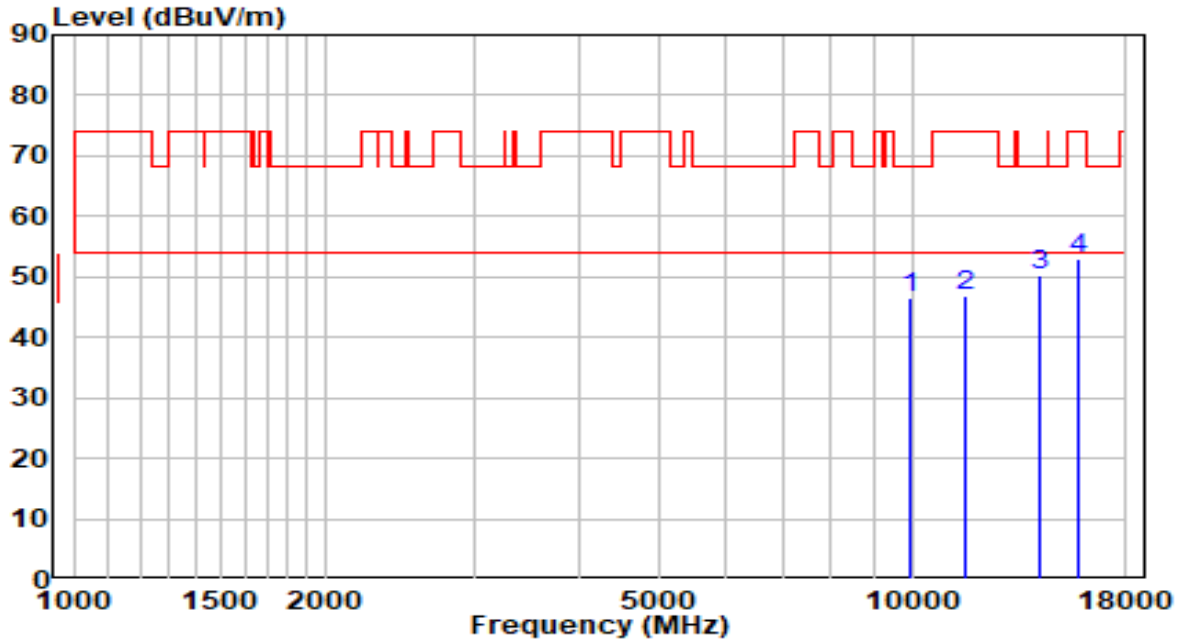


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9959.000	31.38	15.28	46.66	-21.54	68.20	Peak
2	11574.000	28.40	18.36	46.76	-27.24	74.00	Peak
3	* 14200.500	28.74	21.45	50.19	-18.01	68.20	Peak
4	15730.500	31.91	21.06	52.98	-21.02	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

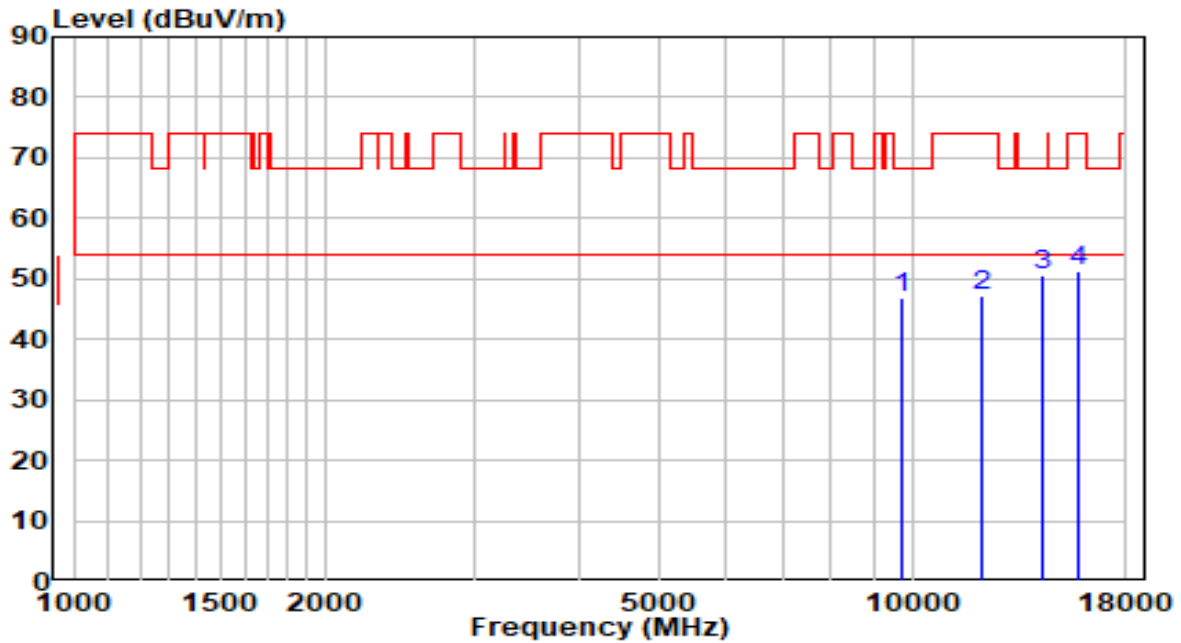


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	32.23	14.79	47.01	-21.19	68.20	Peak
2	12152.000	29.44	17.85	47.29	-26.71	74.00	Peak
3	* 14319.500	29.32	21.41	50.73	-17.47	68.20	Peak
4	15747.500	30.28	21.03	51.31	-22.69	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

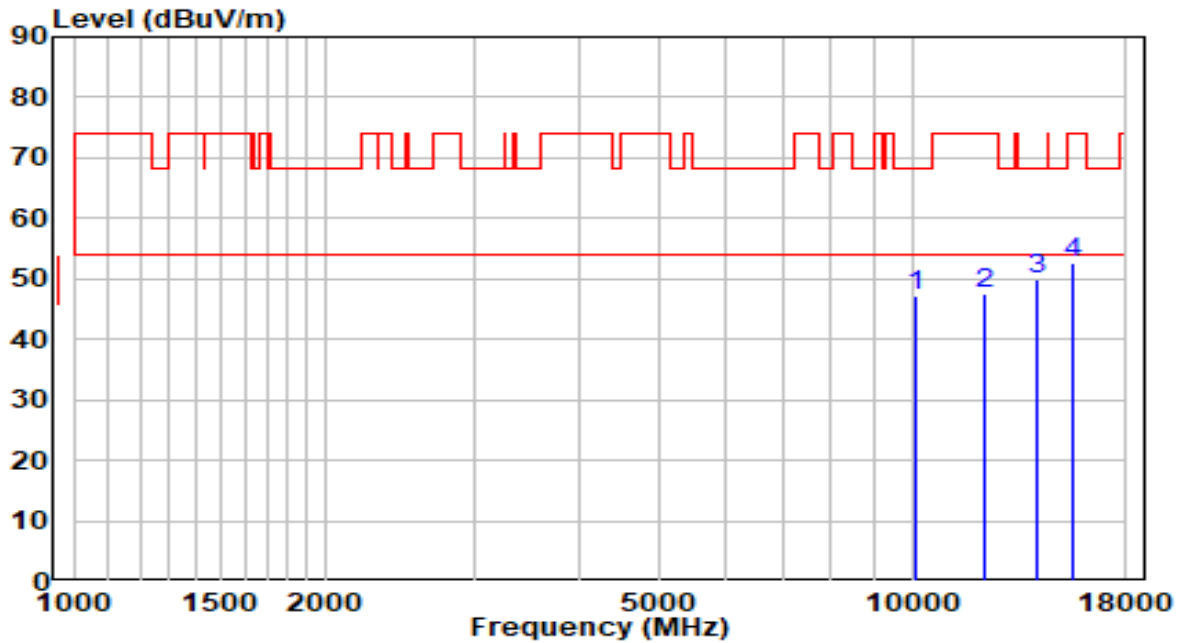


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10095.000	31.38	15.68	47.07	-21.13	68.20	Peak
2	12220.000	29.72	17.86	47.58	-26.42	74.00	Peak
3	* 14132.500	28.35	21.48	49.82	-18.38	68.20	Peak
4	15535.000	31.37	21.39	52.76	-21.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

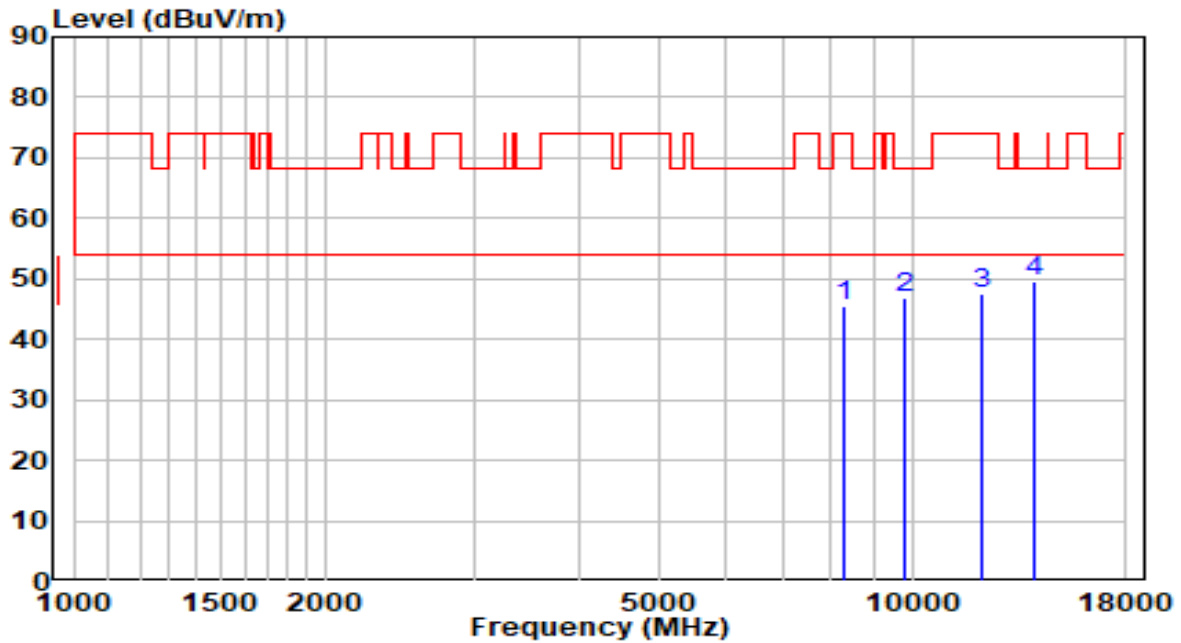


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8267.500	33.09	12.49	45.58	-28.42	74.00	Peak
2	9831.500	31.69	15.04	46.73	-21.47	68.20	Peak
3	12126.500	29.82	17.84	47.66	-26.34	74.00	Peak
4	* 13971.000	28.14	21.46	49.60	-18.60	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

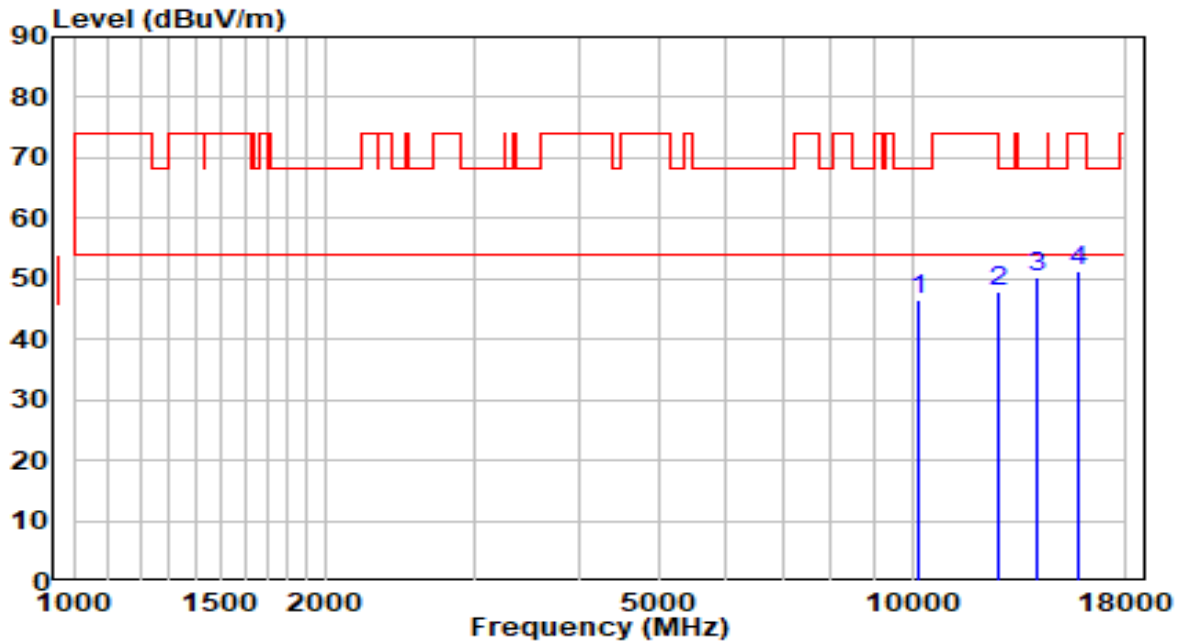


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10188.500	30.67	16.00	46.68	-21.52	68.20	Peak
2	12645.000	29.57	18.31	47.87	-26.13	74.00	Peak
3	* 14081.500	28.90	21.49	50.39	-17.81	68.20	Peak
4	15739.000	30.28	21.05	51.32	-22.68	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

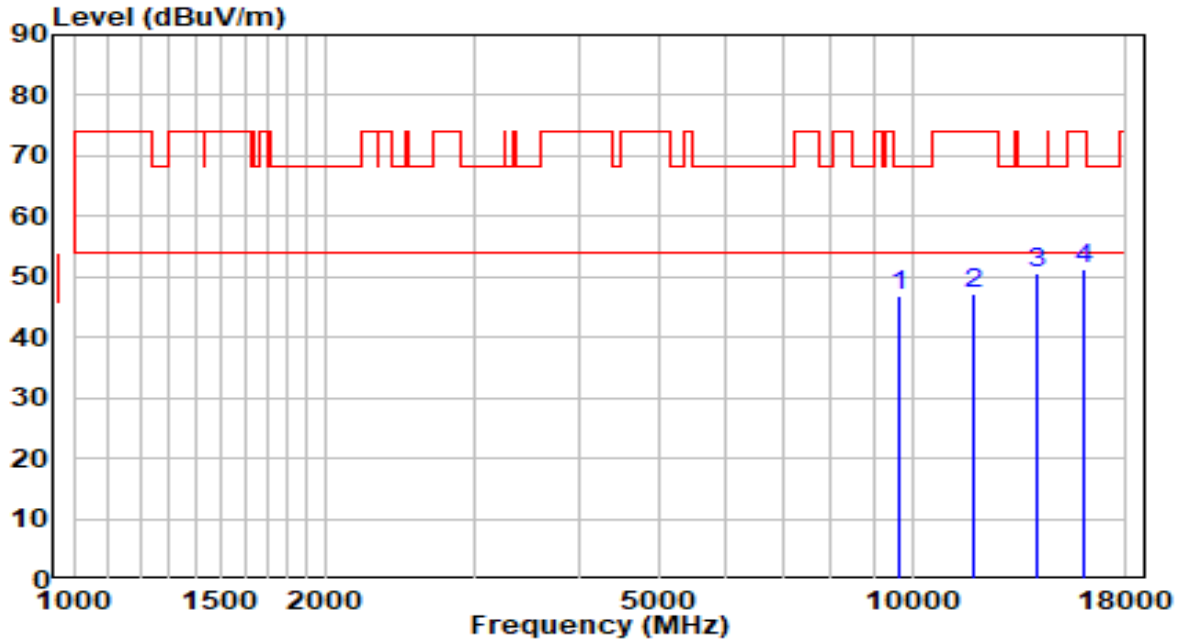


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9636.000	32.03	14.68	46.70	-21.50	68.20	Peak
2	11812.000	29.05	18.06	47.11	-26.89	74.00	Peak
3	* 14056.000	28.94	21.50	50.44	-17.76	68.20	Peak
4	15977.000	30.66	20.65	51.30	-22.70	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

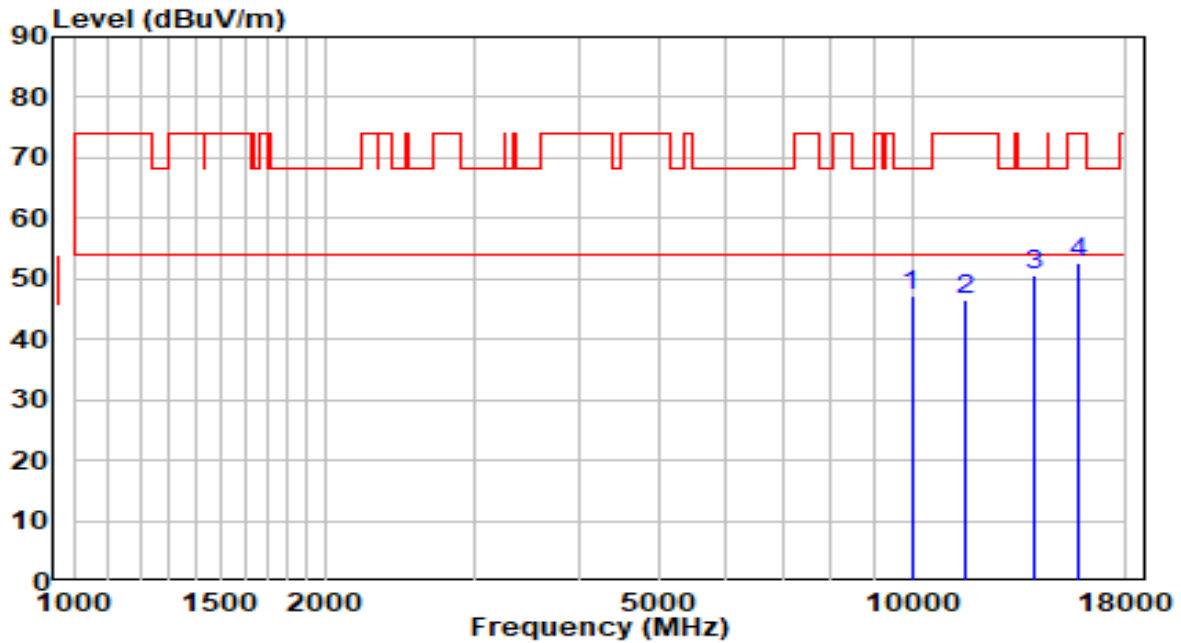


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9984.500	31.76	15.33	47.09	-21.11	68.20	Peak
2	11574.000	28.31	18.36	46.67	-27.33	74.00	Peak
3	* 13971.000	29.19	21.46	50.65	-17.55	68.20	Peak
4	15730.500	31.58	21.06	52.64	-21.36	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

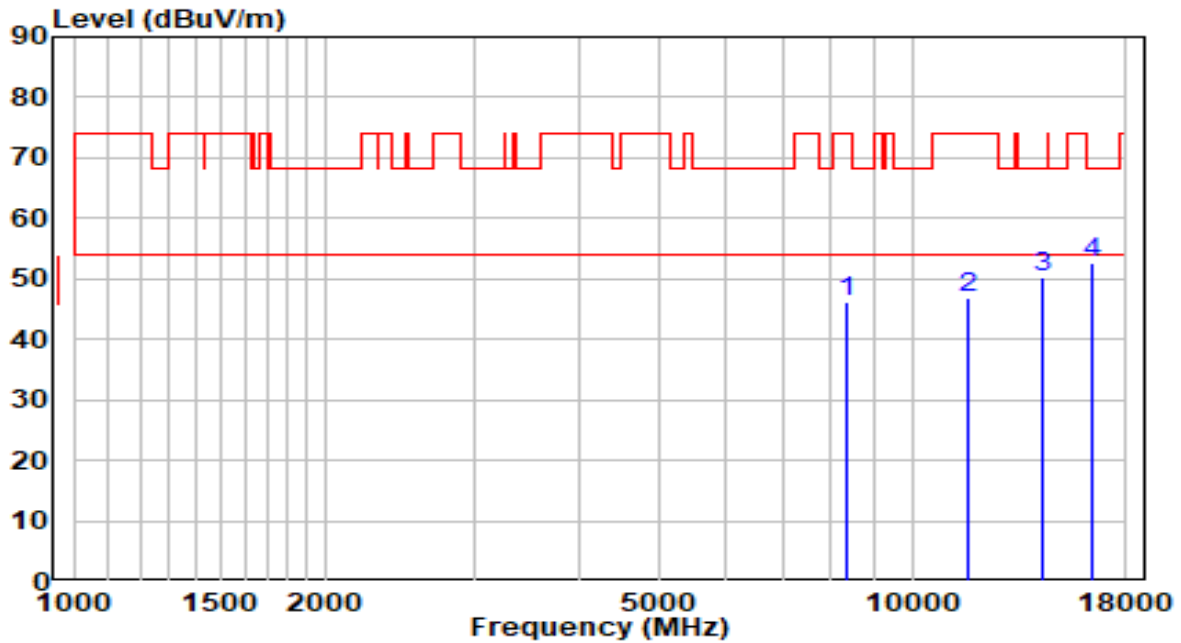


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	33.60	12.48	46.08	-27.92	74.00	Peak
2	11684.500	28.52	18.22	46.74	-27.26	74.00	Peak
3	14285.500	28.68	21.43	50.11	-18.09	68.20	Peak
4	* 16368.000	31.01	21.60	52.61	-15.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

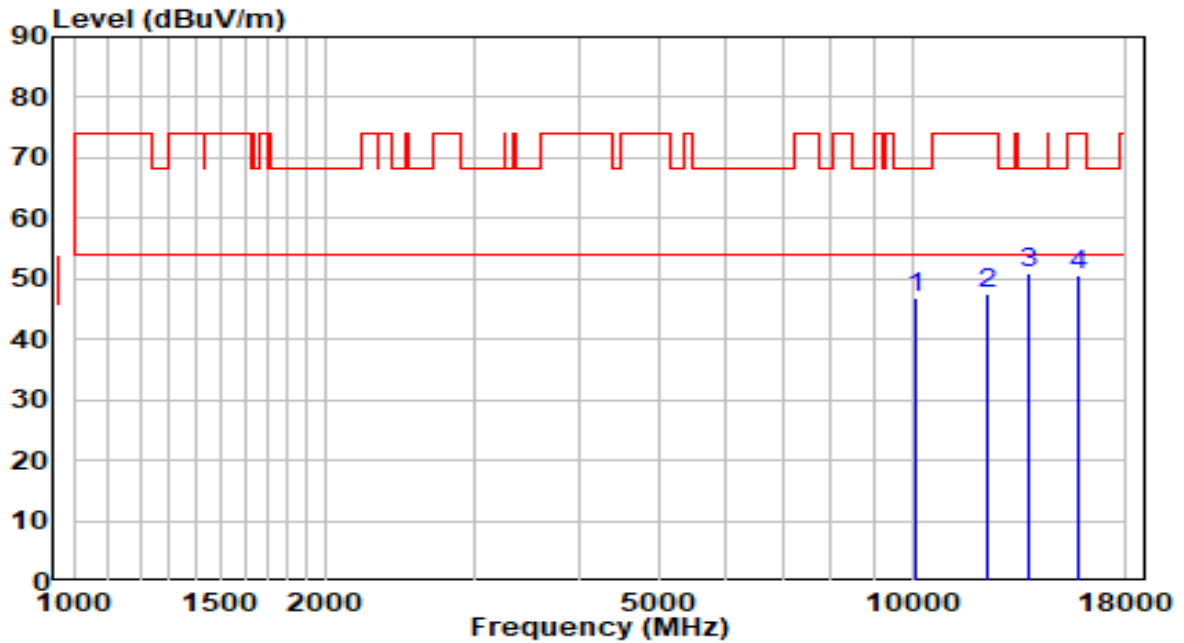


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10112.000	31.19	15.74	46.94	-21.26	68.20	Peak
2	12322.000	29.79	17.87	47.66	-26.34	74.00	Peak
3	* 13818.000	29.62	21.17	50.79	-17.41	68.20	Peak
4	15747.500	29.74	21.03	50.77	-23.23	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

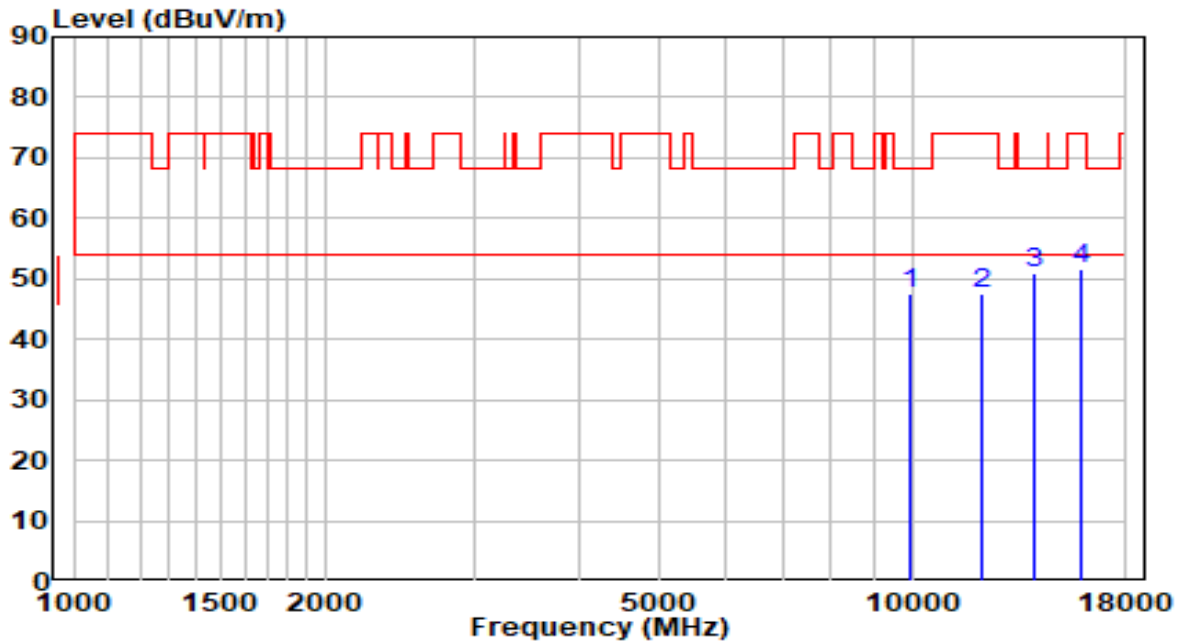


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9942.000	32.46	15.25	47.71	-20.49	68.20	Peak
2	12118.000	29.84	17.84	47.68	-26.32	74.00	Peak
3	* 13971.000	29.53	21.46	50.99	-17.21	68.20	Peak
4	15951.500	30.82	20.69	51.51	-22.49	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

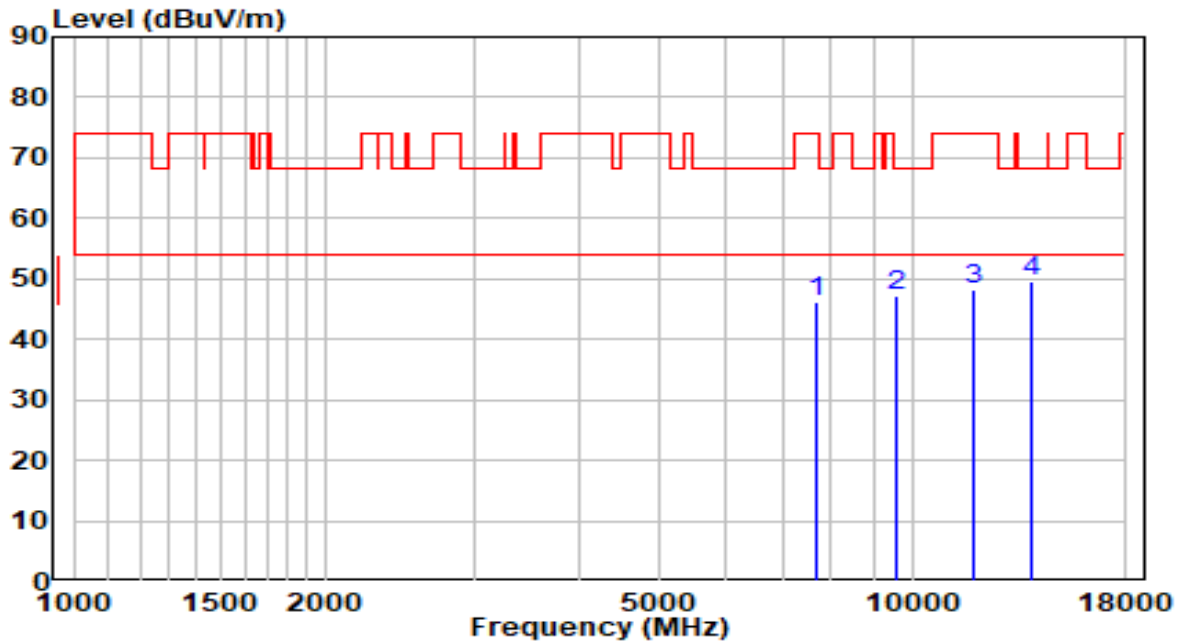


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	34.11	11.98	46.10	-27.90	74.00	Peak
2	9576.500	32.72	14.56	47.29	-20.91	68.20	Peak
3	11837.500	30.10	18.02	48.12	-25.88	74.00	Peak
4	* 13852.000	28.42	21.23	49.65	-18.55	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

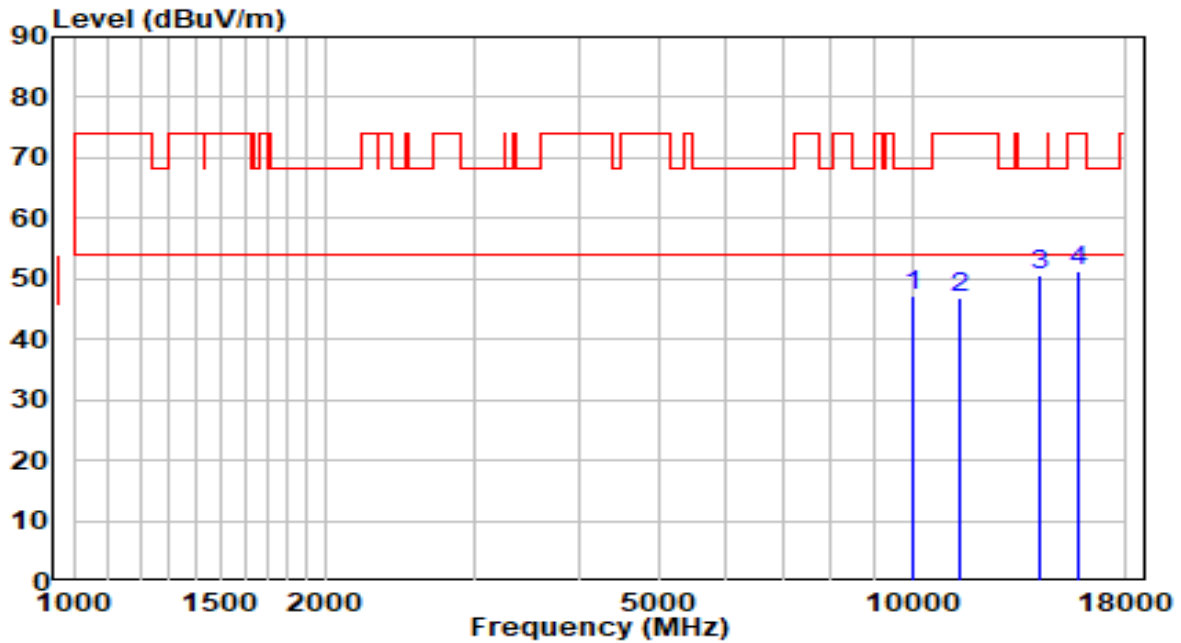


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10027.000	31.86	15.45	47.31	-20.89	68.20	Peak
2	11412.500	28.53	18.33	46.87	-27.13	74.00	Peak
3	* 14175.000	29.28	21.46	50.74	-17.46	68.20	Peak
4	15824.000	30.30	20.91	51.20	-22.80	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

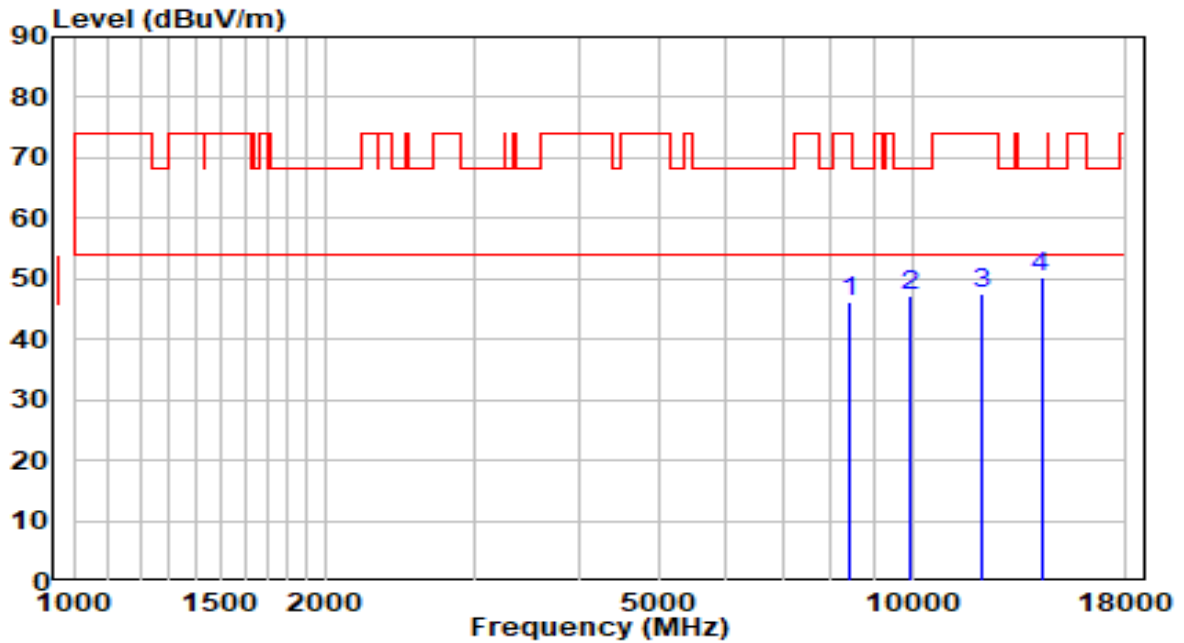


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8437.500	33.69	12.46	46.16	-27.84	74.00	Peak
2	9959.000	31.86	15.28	47.14	-21.06	68.20	Peak
3	12092.500	29.79	17.84	47.63	-26.37	74.00	Peak
4	* 14251.500	28.84	21.44	50.27	-17.93	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

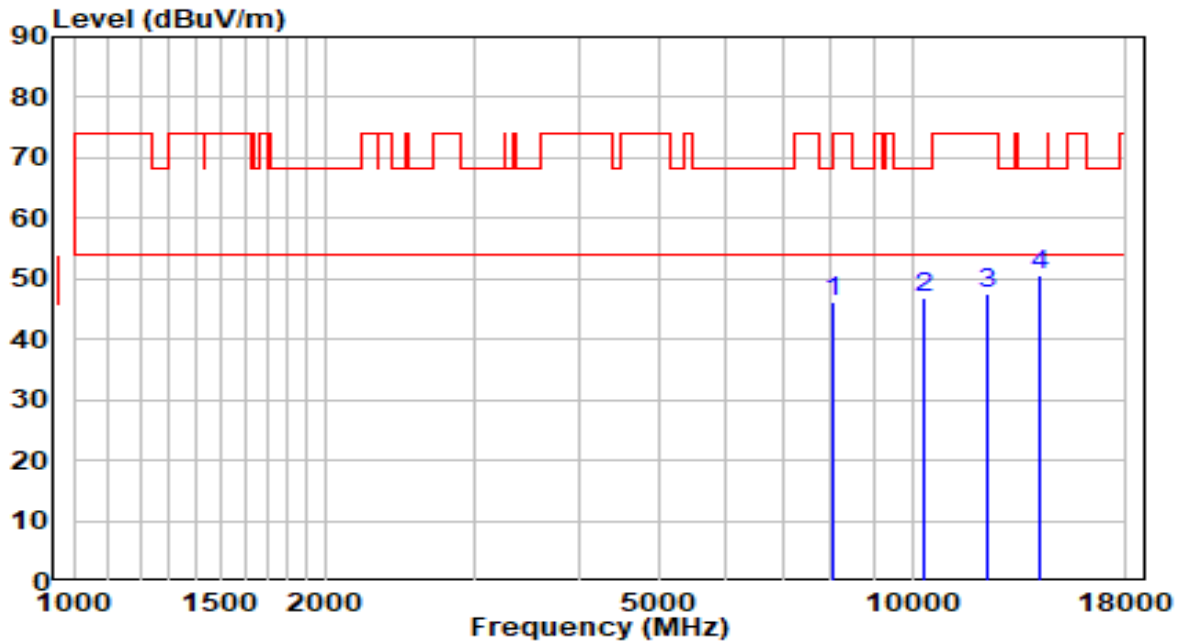


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8072.000	33.61	12.52	46.12	-27.88	74.00	Peak
2	10316.000	30.55	16.44	46.99	-21.21	68.20	Peak
3	12271.000	29.70	17.87	47.57	-26.43	74.00	Peak
4	* 14158.000	29.03	21.47	50.49	-17.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

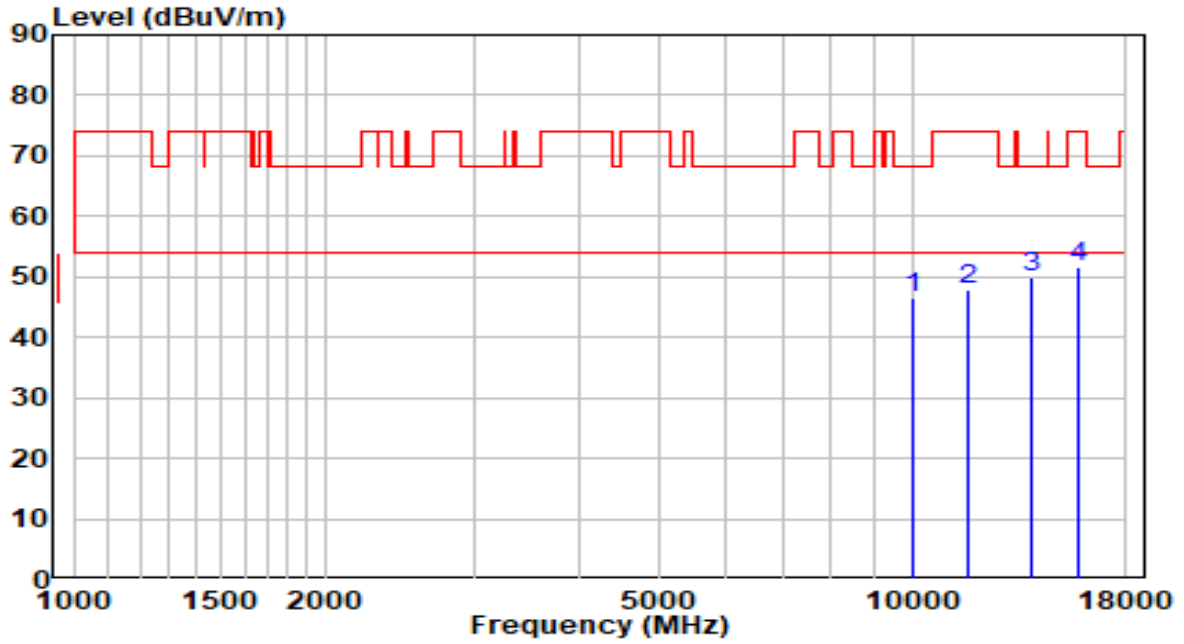


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10052.500	31.12	15.54	46.66	-21.54	68.20	Peak
2	11659.000	29.62	18.25	47.87	-26.13	74.00	Peak
3	* 13928.500	28.45	21.38	49.83	-18.37	68.20	Peak
4	15739.000	30.58	21.05	51.63	-22.37	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

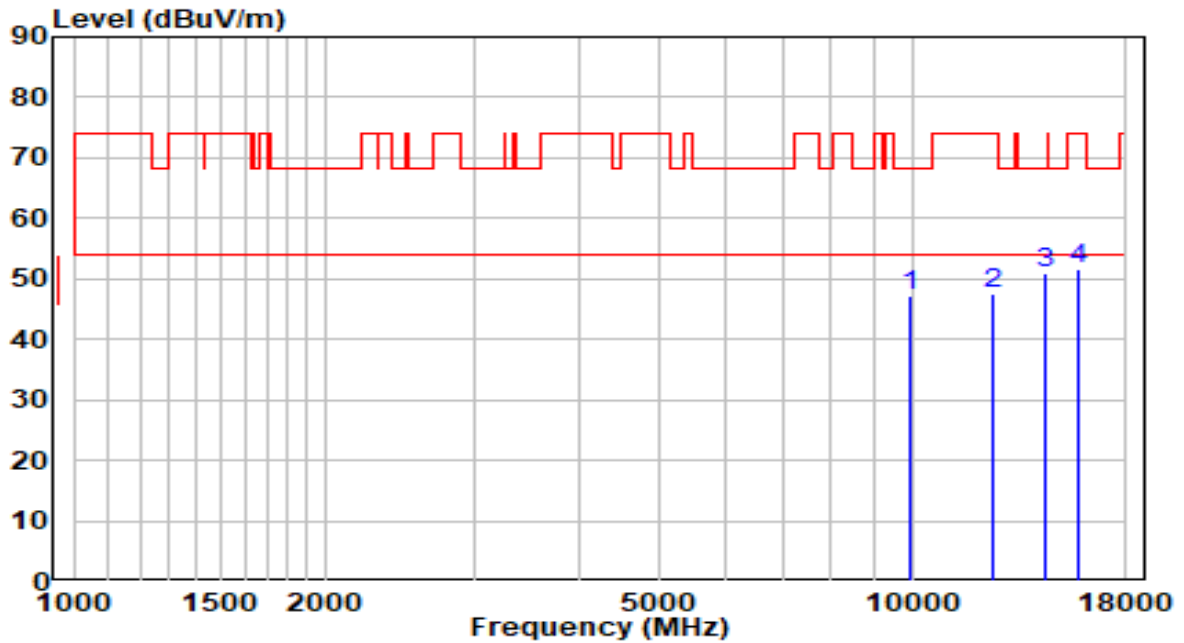


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9967.500	31.92	15.30	47.22	-20.98	68.20	Peak
2	12509.000	29.61	17.93	47.54	-26.46	74.00	Peak
3	* 14379.000	29.42	21.39	50.82	-17.38	68.20	Peak
4	15764.500	30.71	21.01	51.72	-22.28	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

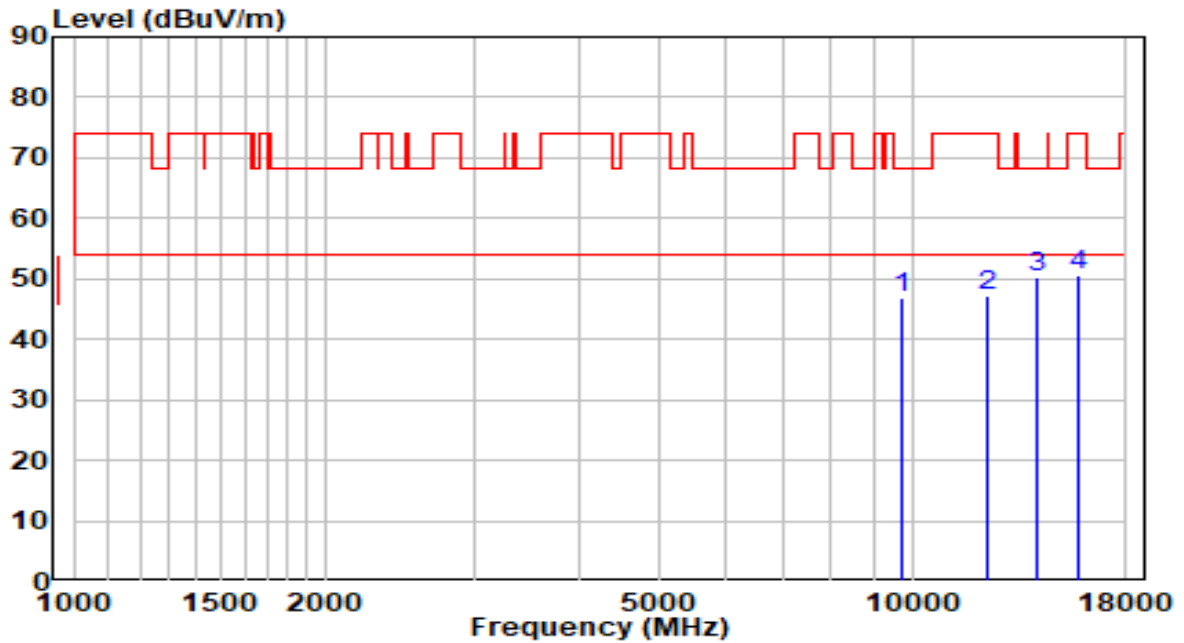


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9721.000	32.20	14.84	47.03	-21.17	68.20	Peak
2	12296.500	29.45	17.87	47.32	-26.68	74.00	Peak
3	* 14132.500	28.85	21.48	50.33	-17.87	68.20	Peak
4	15807.000	29.81	20.93	50.75	-23.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

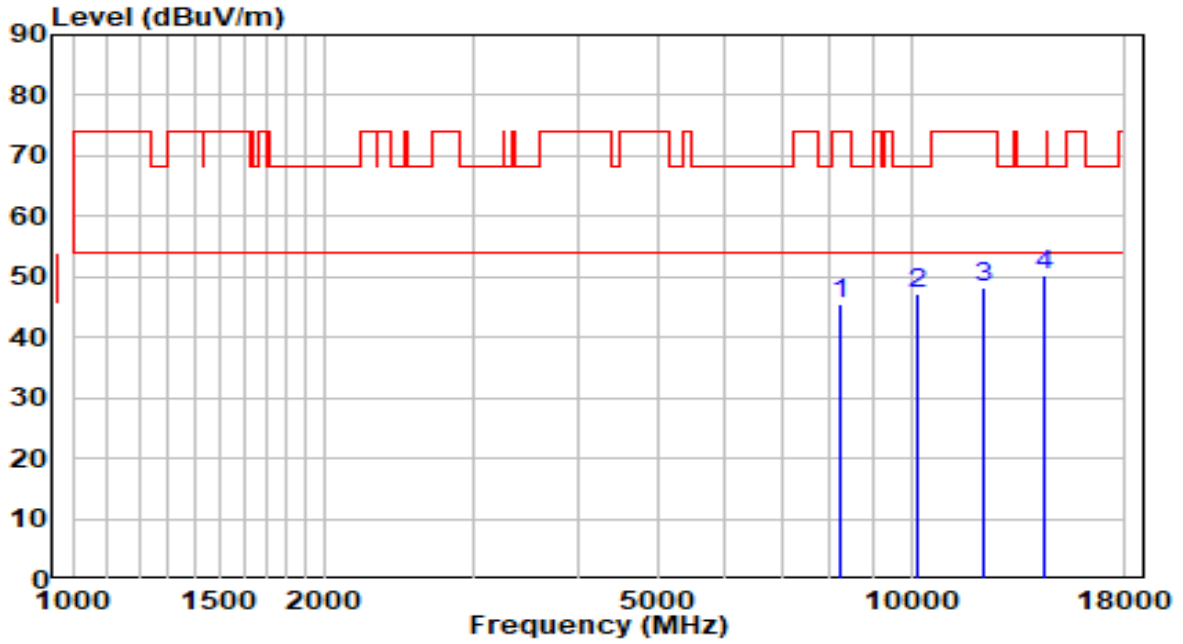


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8242.000	33.12	12.49	45.62	-28.38	74.00	Peak
2	10205.500	31.01	16.06	47.08	-21.12	68.20	Peak
3	12211.500	30.42	17.86	48.28	-25.72	74.00	Peak
4	* 14430.000	29.03	21.38	50.41	-17.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

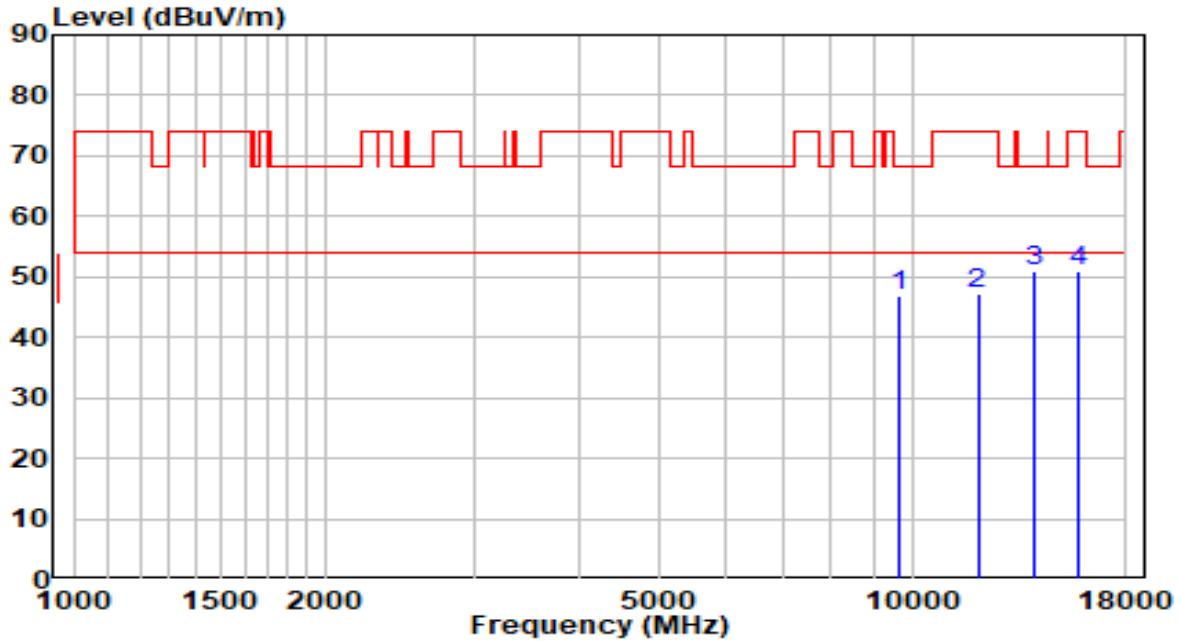


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9661.500	32.04	14.72	46.76	-21.44	68.20	Peak
2	11973.500	29.47	17.85	47.32	-26.68	74.00	Peak
3	* 14005.000	29.27	21.52	50.79	-17.41	68.20	Peak
4	15824.000	30.13	20.91	51.04	-22.96	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

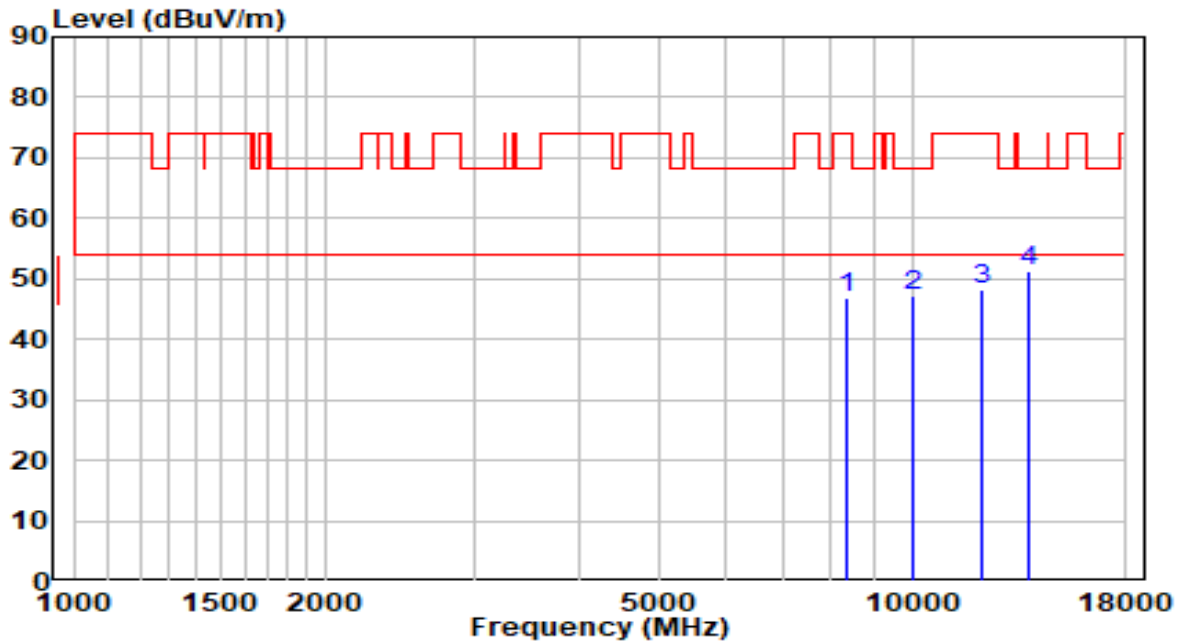


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8335.500	34.25	12.48	46.73	-27.27	74.00	Peak
2	10001.500	31.72	15.37	47.08	-21.12	68.20	Peak
3	12075.500	30.47	17.83	48.30	-25.70	74.00	Peak
4	* 13818.000	30.01	21.17	51.18	-17.02	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

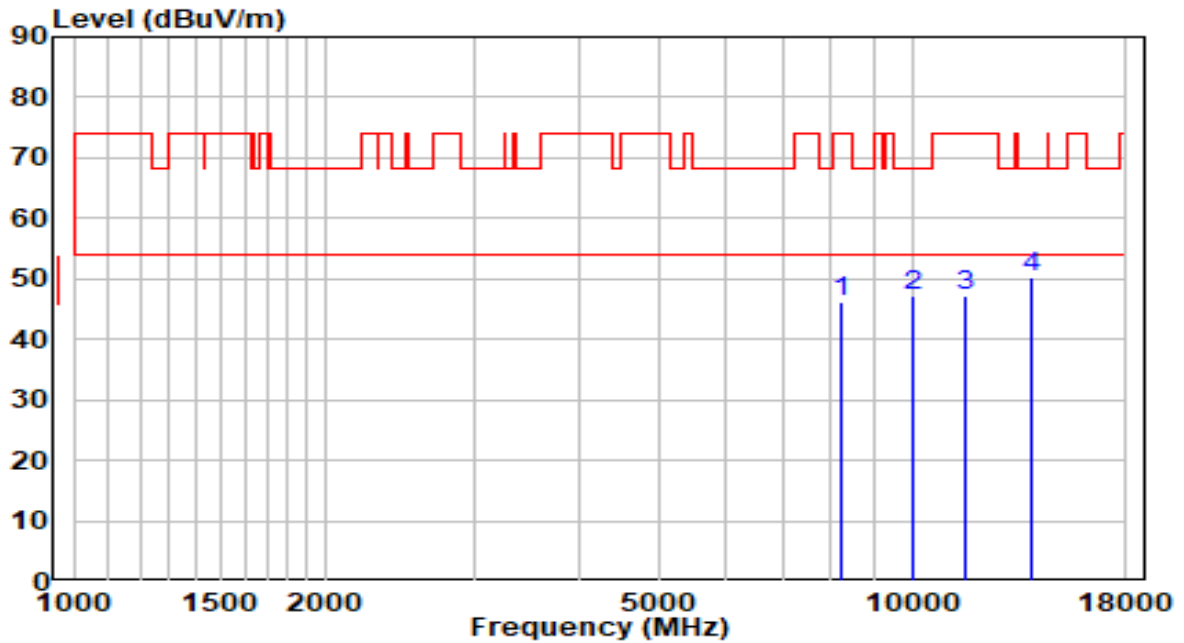


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8259.000	33.73	12.49	46.23	-27.77	74.00	Peak
2	10018.500	31.64	15.42	47.06	-21.14	68.20	Peak
3	11591.000	28.92	18.34	47.25	-26.75	74.00	Peak
4	* 13877.500	28.84	21.28	50.12	-18.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

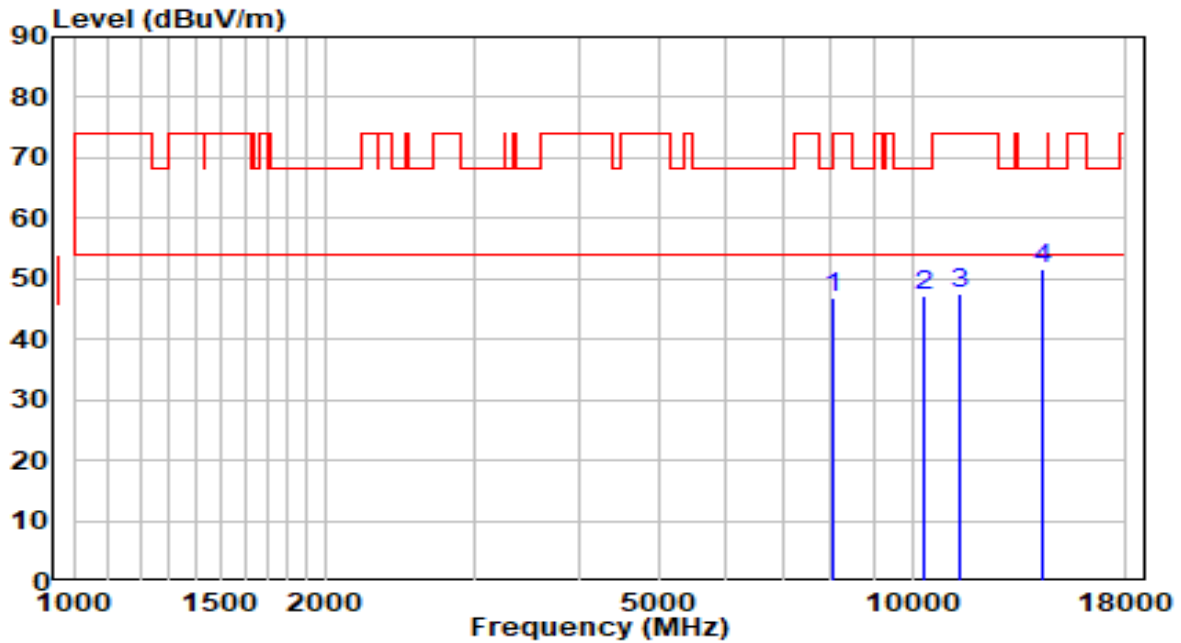


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8055.000	34.40	12.52	46.92	-27.08	74.00	Peak
2	10324.500	30.86	16.47	47.33	-20.87	68.20	Peak
3	11412.500	29.09	18.33	47.42	-26.58	74.00	Peak
4	* 14285.500	30.03	21.43	51.45	-16.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

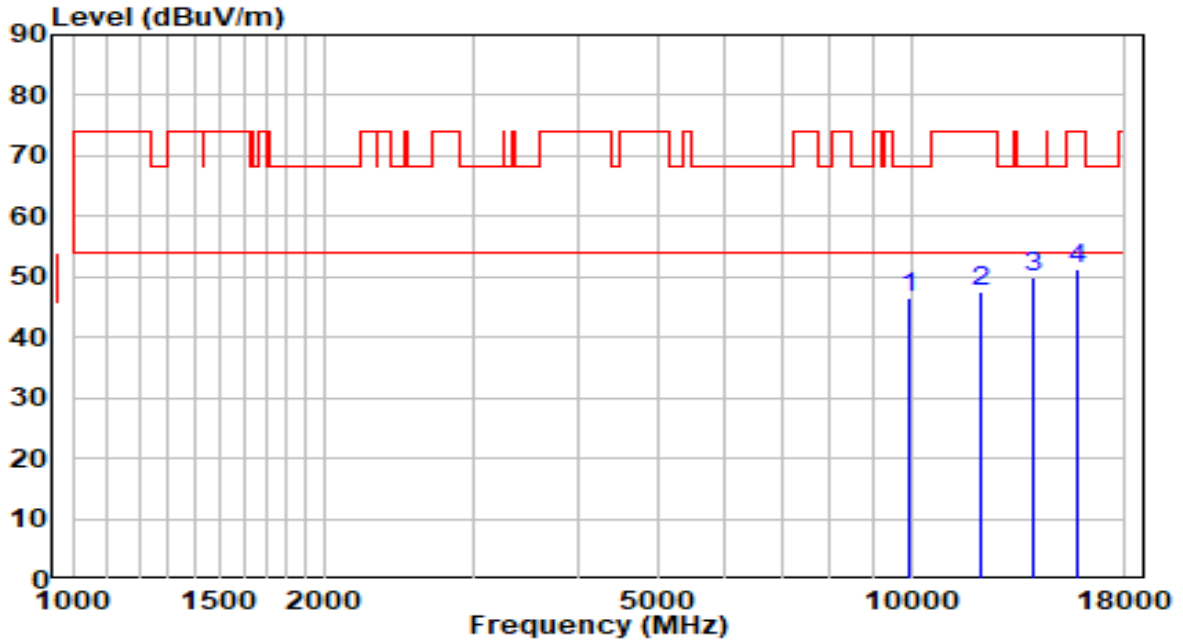


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	31.28	15.25	46.54	-21.66	68.20	Peak
2	12075.500	29.70	17.83	47.53	-26.47	74.00	Peak
3	* 13996.500	28.40	21.51	49.91	-18.29	68.20	Peak
4	15798.500	30.45	20.95	51.40	-22.60	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

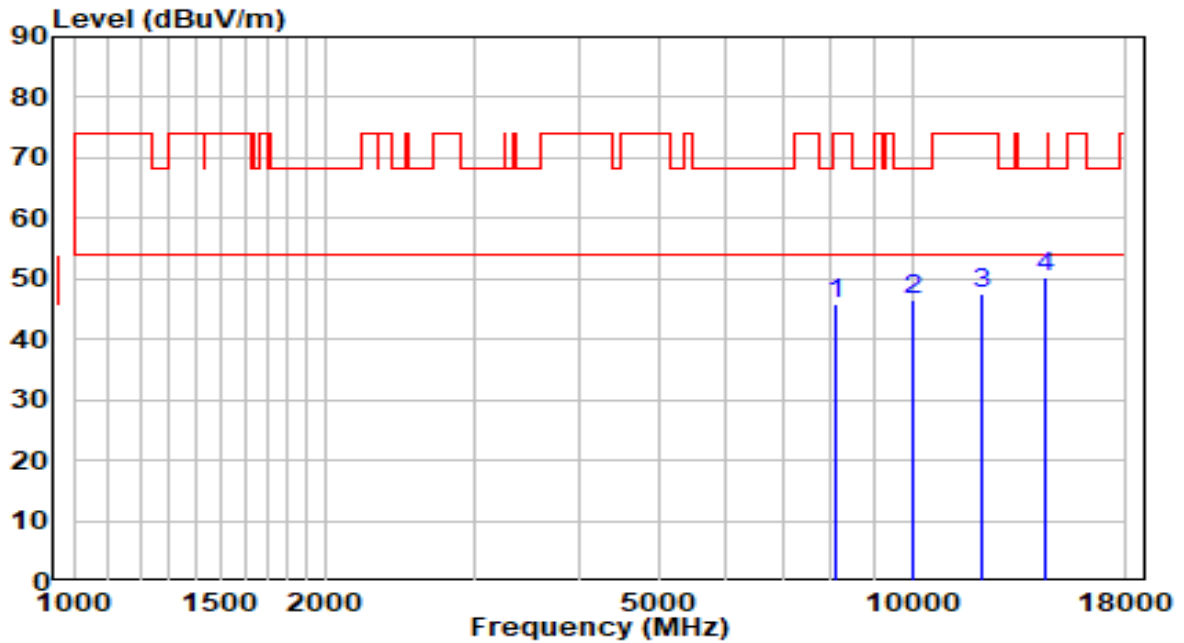


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8114.500	33.31	12.51	45.82	-28.18	74.00	Peak
2	10018.500	31.26	15.42	46.68	-21.52	68.20	Peak
3	12109.500	29.83	17.84	47.67	-26.33	74.00	Peak
4	* 14421.500	28.94	21.38	50.32	-17.88	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

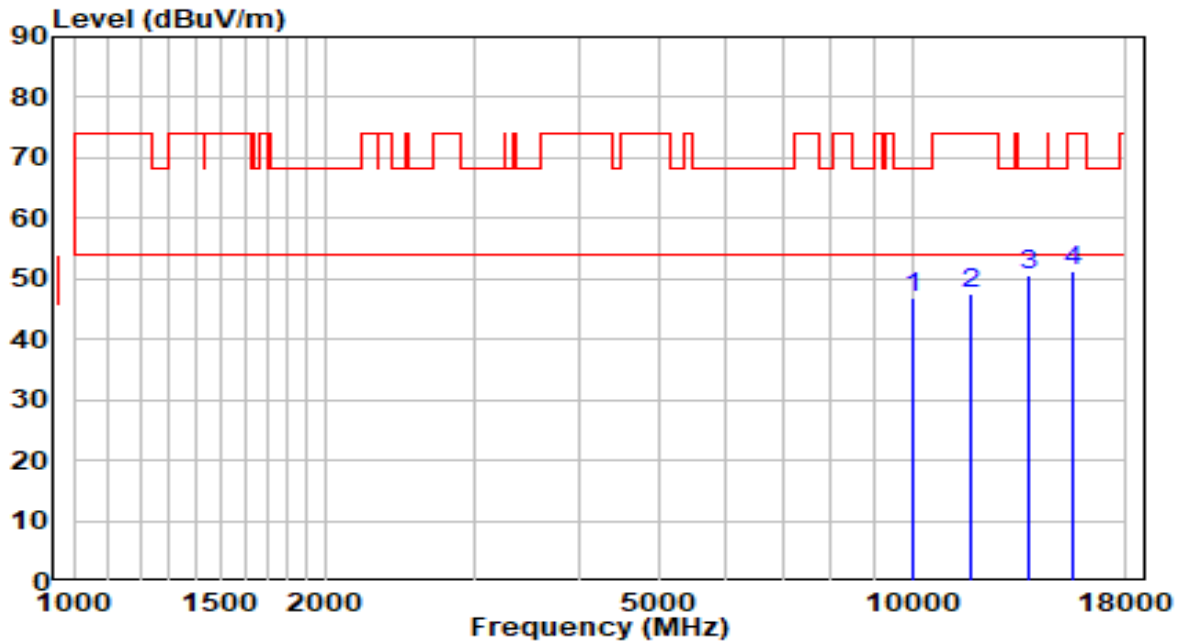


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10018.500	31.52	15.42	46.94	-21.26	68.20	Peak
2	11710.000	29.28	18.19	47.46	-26.54	74.00	Peak
3	* 13750.000	29.44	21.04	50.48	-17.72	68.20	Peak
4	15560.500	29.91	21.35	51.26	-22.74	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

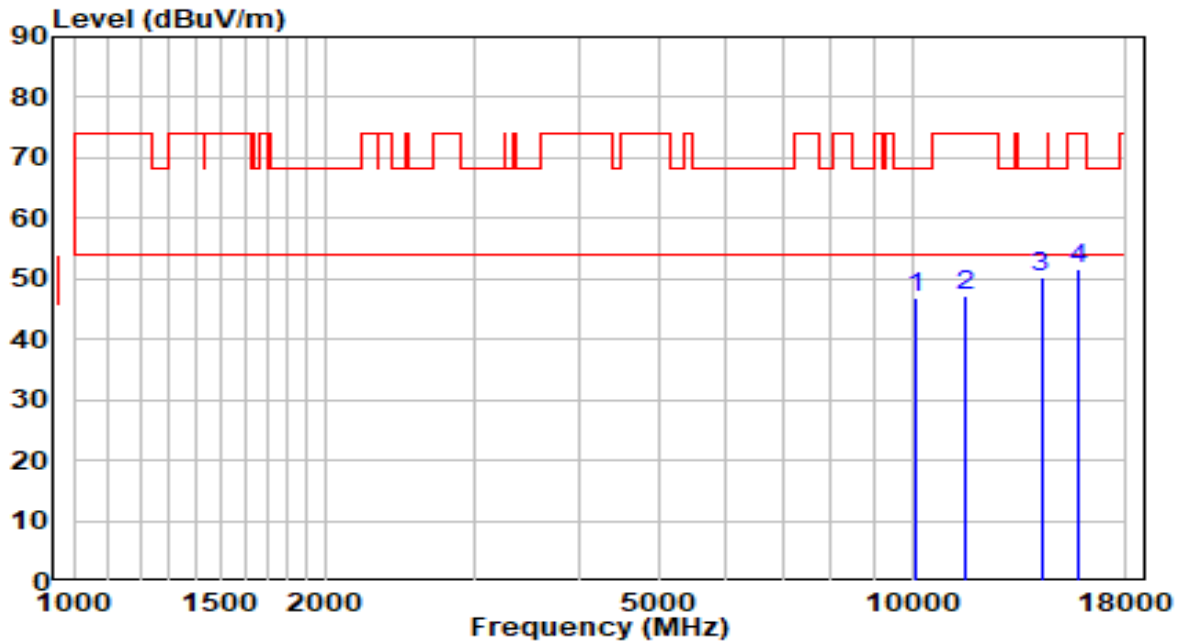


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10095.000	31.31	15.68	47.00	-21.20	68.20	Peak
2	11582.500	28.97	18.35	47.32	-26.68	74.00	Peak
3	* 14251.500	28.74	21.44	50.17	-18.03	68.20	Peak
4	15756.000	30.50	21.02	51.52	-22.48	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

The Worst Case of Radiated Emission below 1GHz:

EUT	Streaming Media Player	Date of Test	2021-07-19
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25°C /46.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

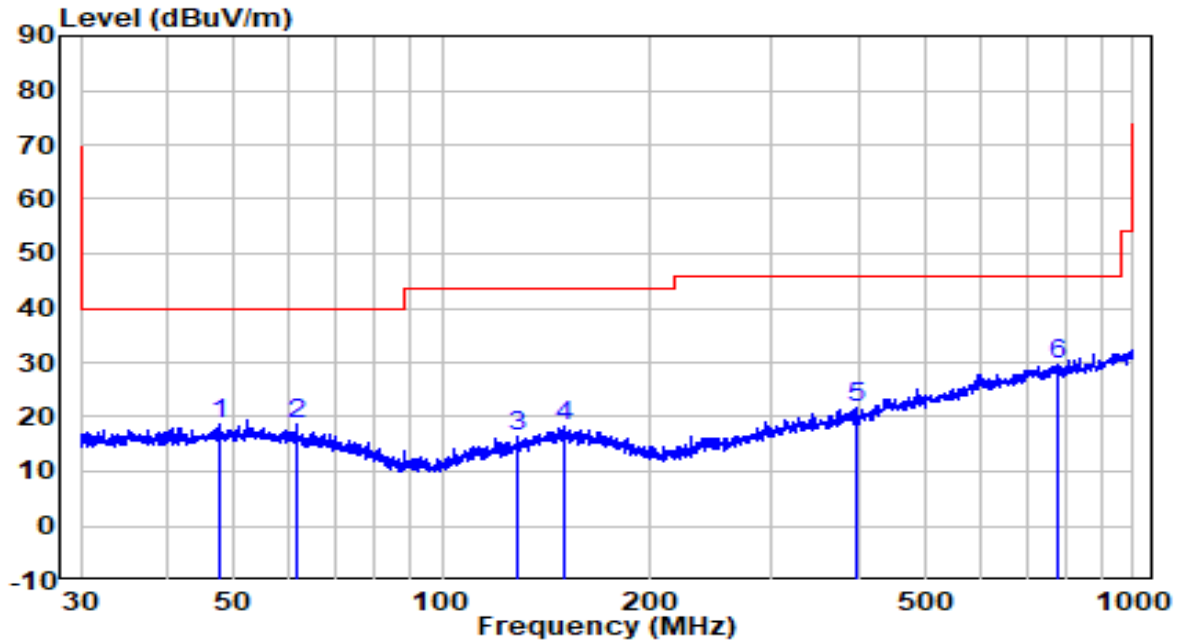


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	47.742	-3.34	21.94	18.60	-21.40	40.00	Peak
2	61.670	-0.86	19.67	18.80	-21.20	40.00	Peak
3	128.789	0.06	16.40	16.46	-27.04	43.50	Peak
4	150.011	2.44	15.98	18.41	-25.09	43.50	Peak
5	396.937	-2.45	24.01	21.56	-24.44	46.00	Peak
6	* 778.241	-0.71	30.33	29.62	-16.38	46.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Streaming Media Player	Date of Test	2021-07-19
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25°C /46.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

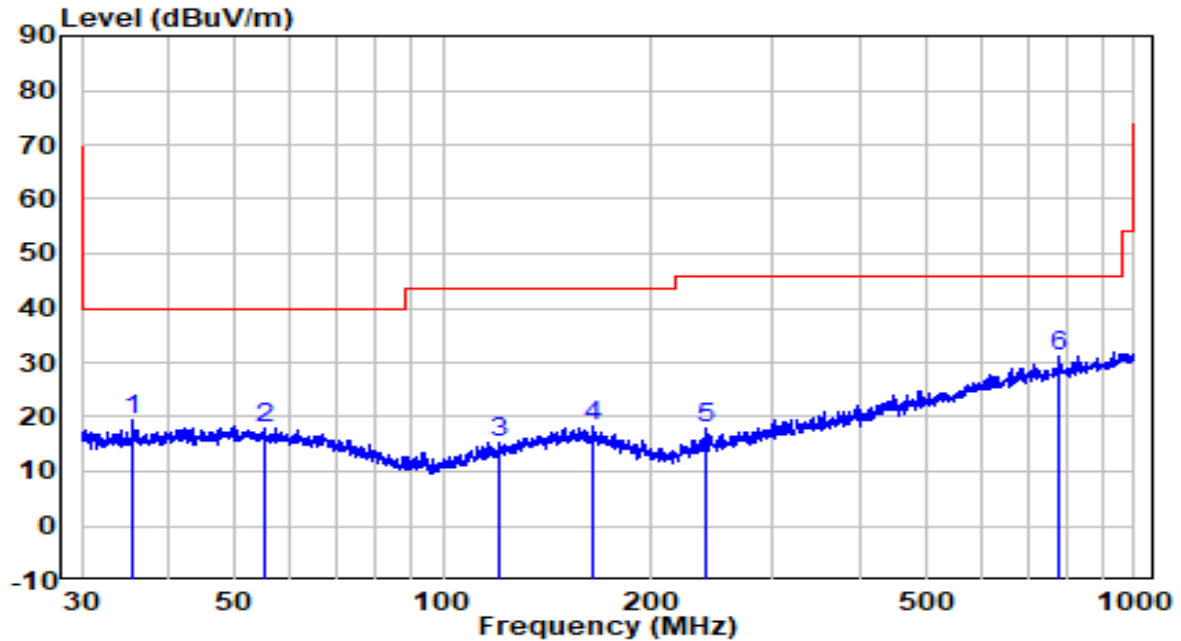

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	35.437	-0.16	19.47	19.31	-20.69	40.00	Peak
2	55.027	-3.17	21.12	17.95	-22.05	40.00	Peak
3	120.911	-1.85	17.15	15.30	-28.20	43.50	Peak
4	164.330	1.70	16.46	18.16	-25.34	43.50	Peak
5	240.830	-2.24	20.23	17.99	-28.01	46.00	Peak
6	* 780.975	0.88	30.35	31.23	-14.77	46.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

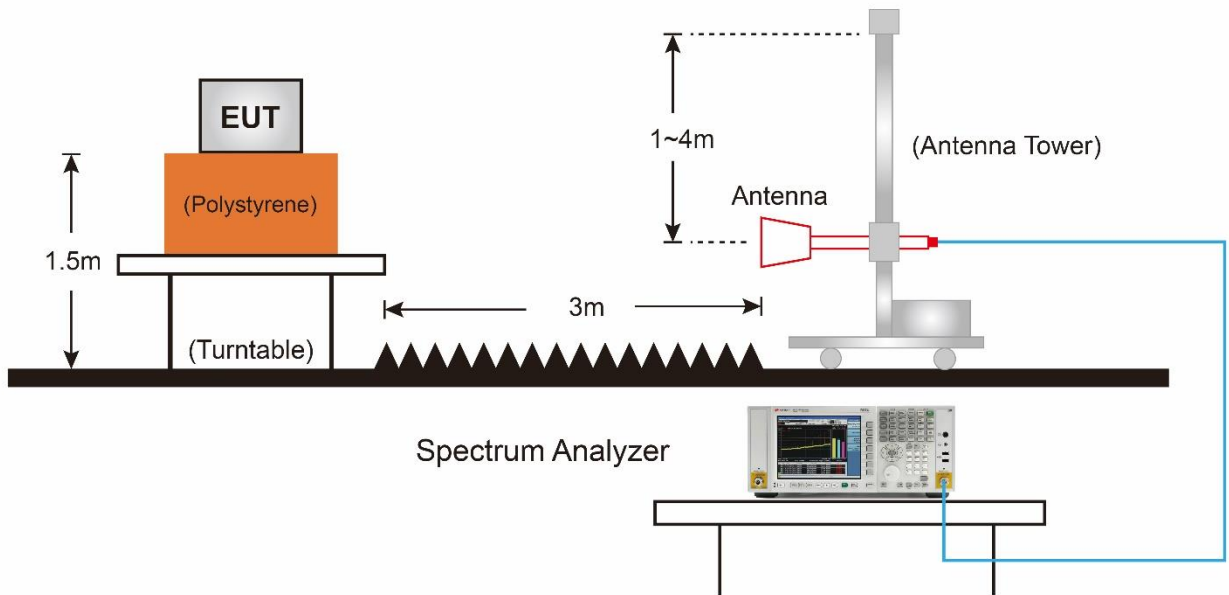

7.9.5. Test Result

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

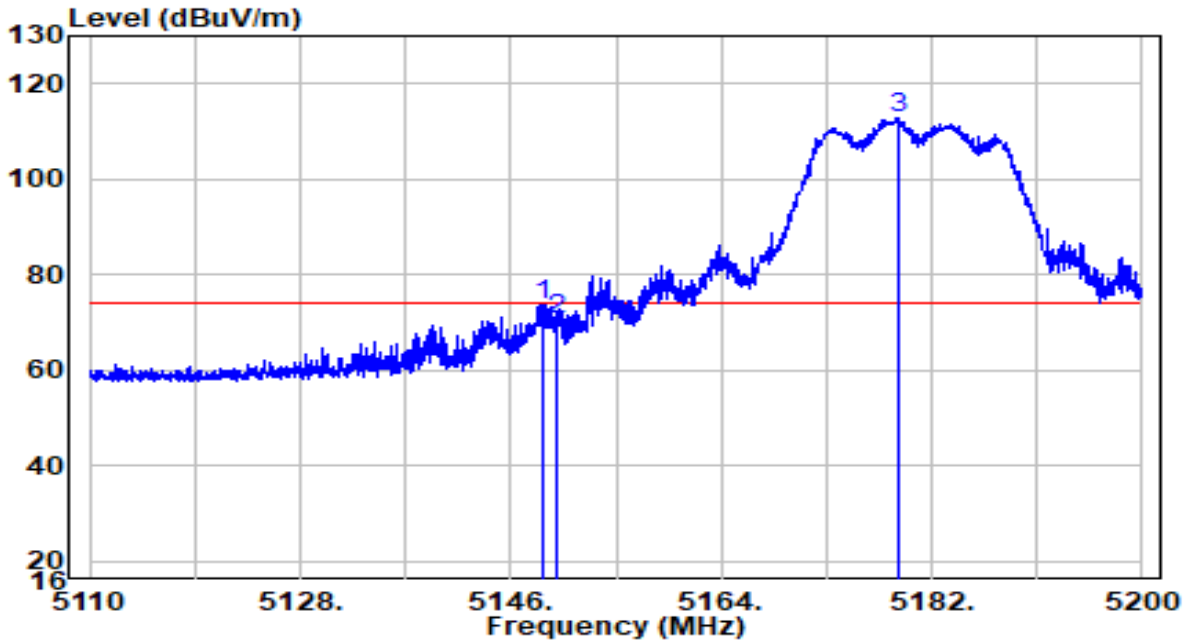


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.745	53.68	19.90	73.58	-0.42	74.00	Peak
2	5150.000	50.76	19.91	70.67	-3.33	74.00	Peak
3	* 5179.120	92.96	19.94	112.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

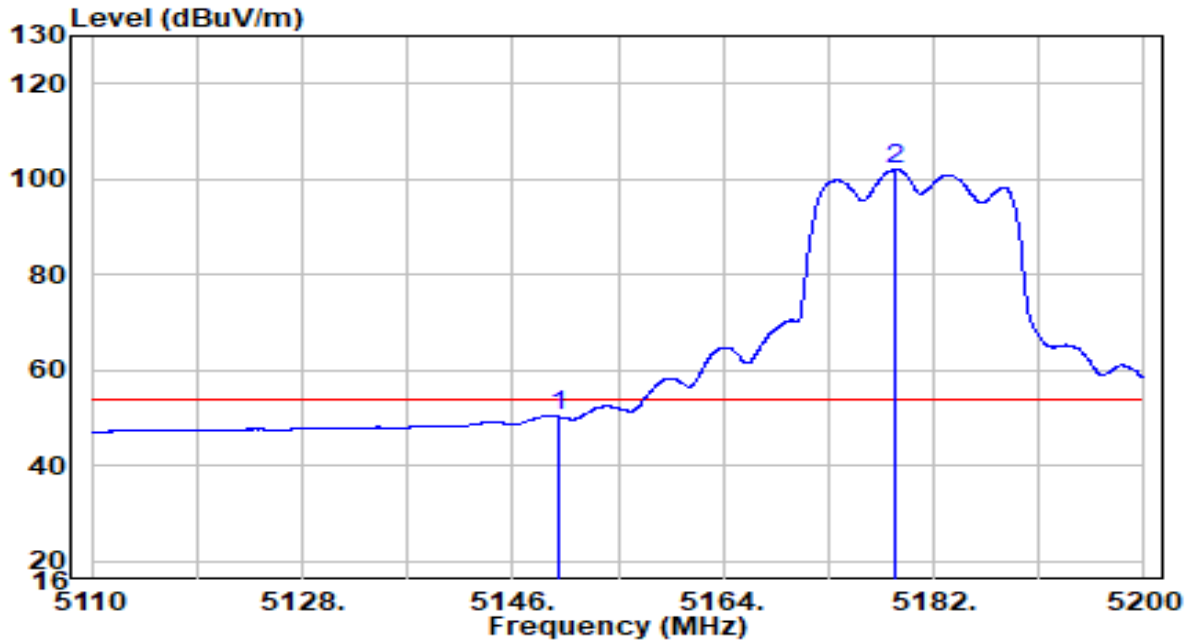


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.35	19.91	50.26	-3.74	54.00	Average
2	* 5178.760	82.09	19.94	102.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

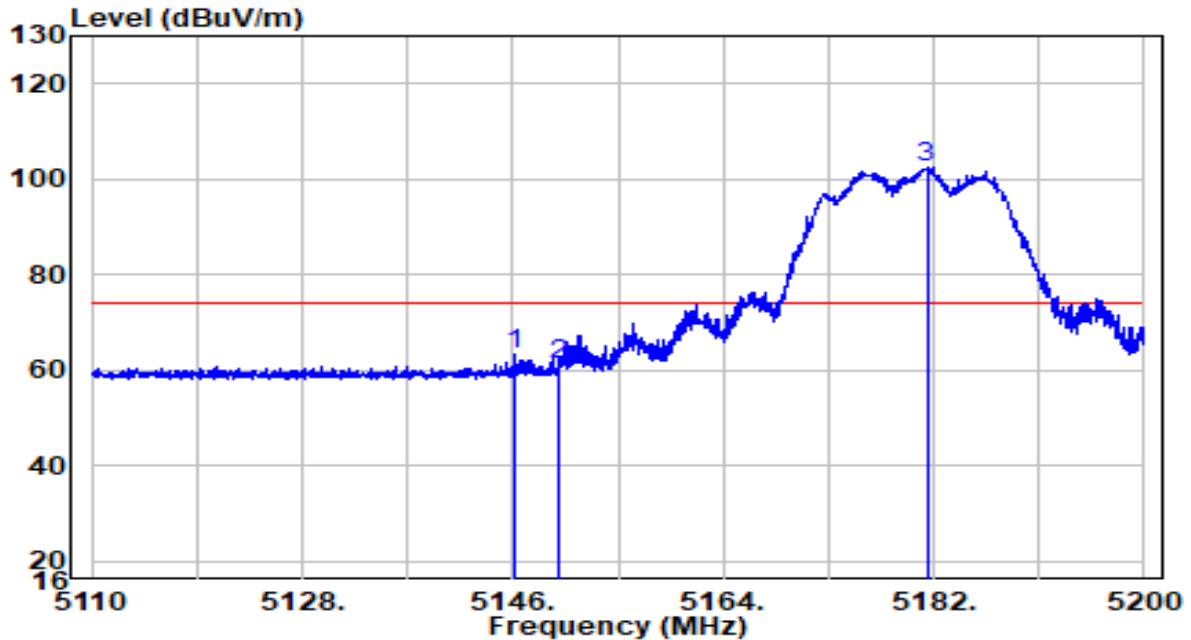


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.225	43.35	19.90	63.25	-10.75	74.00	Peak
2	5150.000	41.31	19.91	61.22	-12.78	74.00	Peak
3	* 5181.415	82.46	19.94	102.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

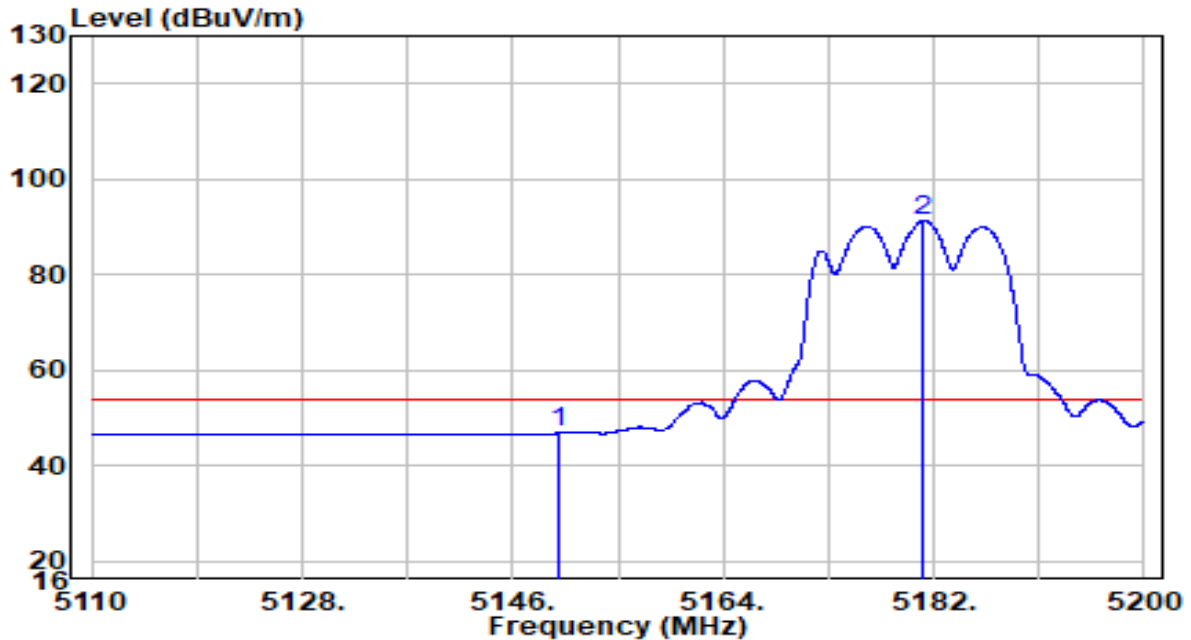


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	26.92	19.91	46.83	-7.17	54.00	Average
2	* 5181.055	71.35	19.94	91.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

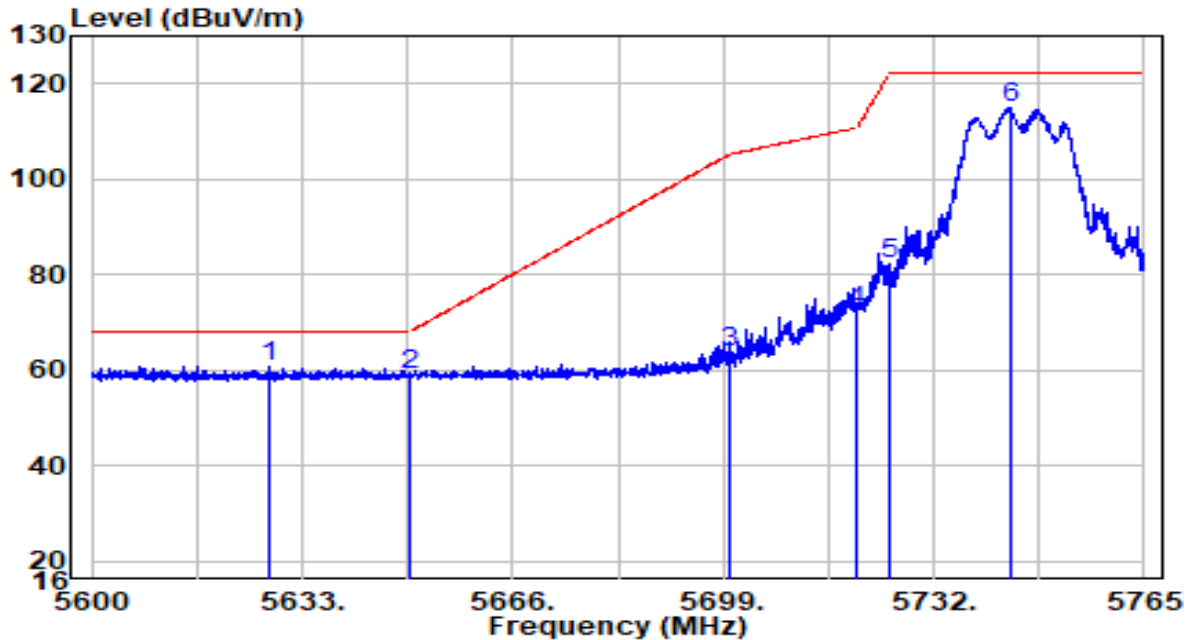


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5627.967	40.05	20.68	60.74	-7.46	68.20	Peak
2	5650.000	38.07	20.76	58.83	-9.37	68.20	Peak
3	5700.000	42.84	20.92	63.76	-41.44	105.20	Peak
4	5720.000	51.56	20.98	72.54	-38.26	110.80	Peak
5	5725.000	61.28	21.00	82.27	-39.93	122.20	Peak
6	* 5743.962	93.91	21.06	114.97	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

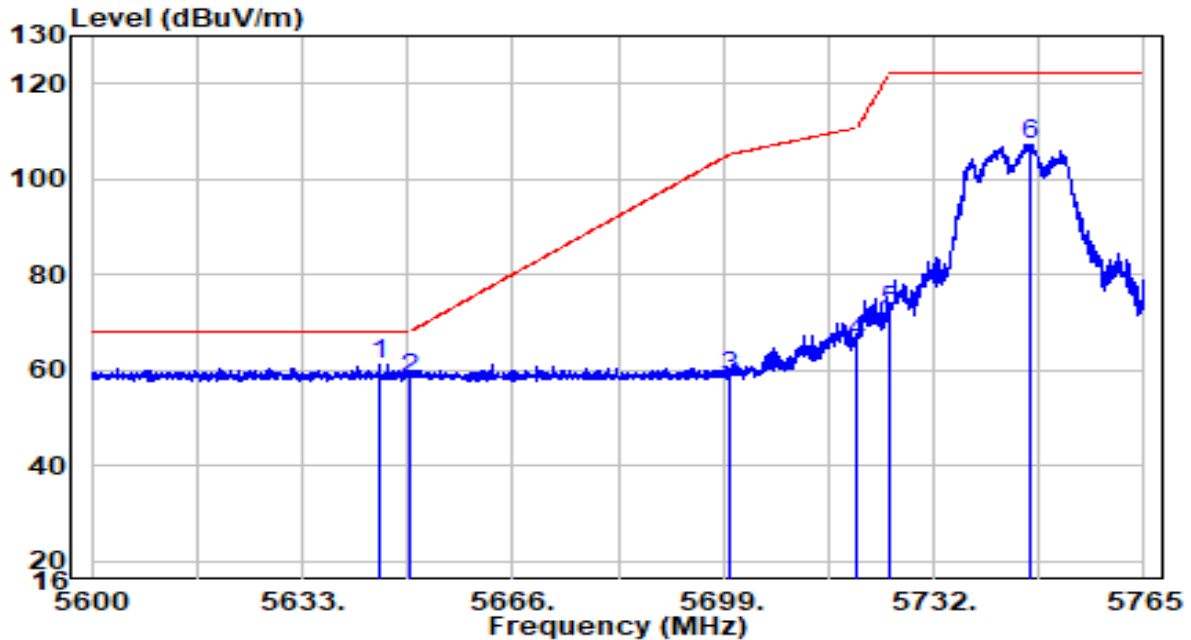


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5645.127	40.48	20.74	61.22	-6.98	68.20	Peak
2	5650.000	37.40	20.76	58.16	-10.04	68.20	Peak
3	5700.000	37.76	20.92	58.68	-46.52	105.20	Peak
4	5720.000	45.06	20.98	66.05	-44.75	110.80	Peak
5	5725.000	51.35	21.00	72.35	-49.85	122.20	Peak
6	5747.015	86.34	21.07	107.41	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

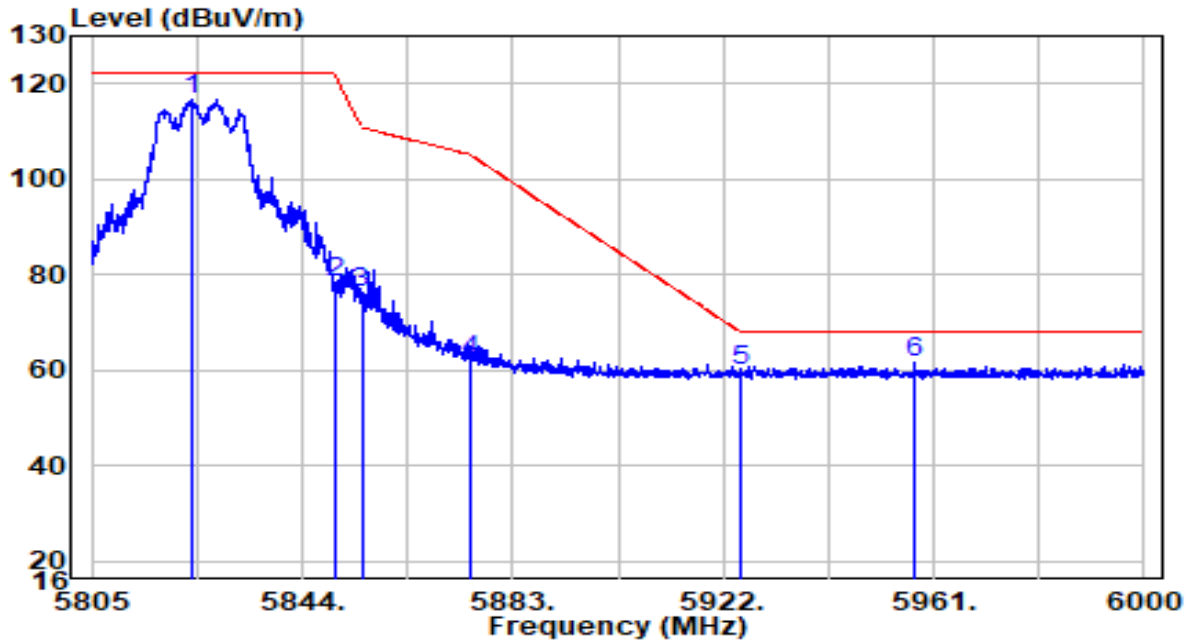


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5823.428	95.39	21.32	116.71	N/A	N/A	Peak
2	5850.000	56.99	21.40	78.39	-43.81	122.20	Peak
3	5855.000	54.85	21.42	76.27	-34.53	110.80	Peak
4	5875.000	40.44	21.49	61.92	-43.28	105.20	Peak
5	5925.000	38.09	21.65	59.74	-8.46	68.20	Peak
6	5957.587	39.88	21.75	61.63	-6.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

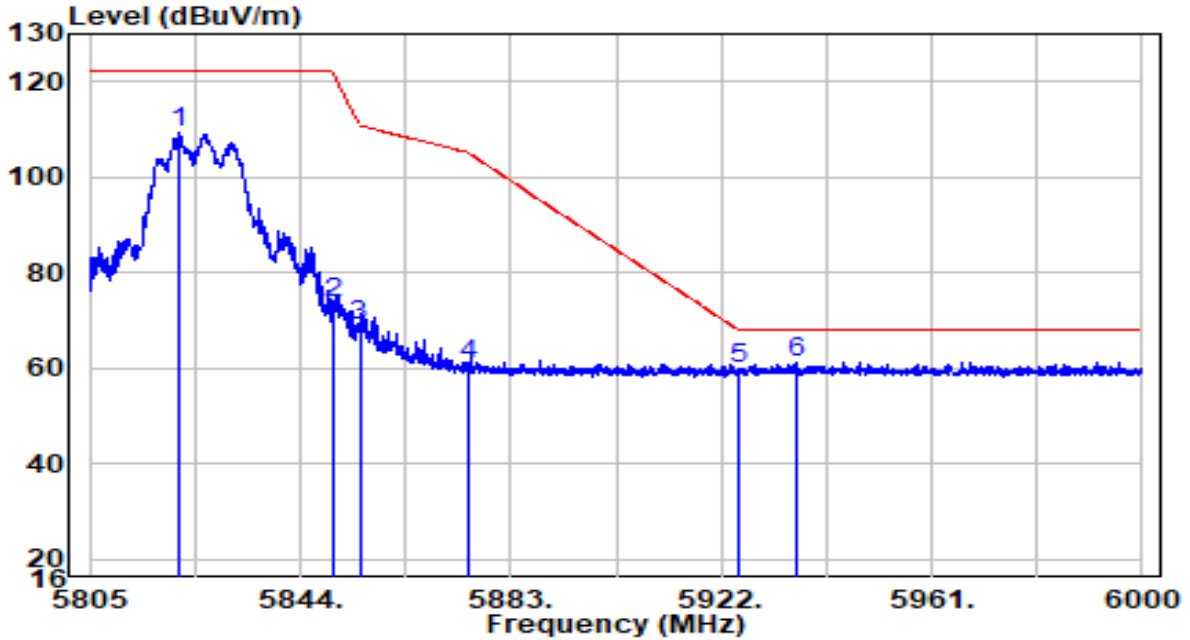


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5821.478	87.85	21.31	109.16	N/A	N/A	Peak
2	5850.000	52.30	21.40	73.70	-48.50	122.20	Peak
3	5855.000	47.54	21.42	68.96	-41.84	110.80	Peak
4	5875.000	39.35	21.49	60.84	-44.36	105.20	Peak
5	5925.000	38.27	21.65	59.92	-8.28	68.20	Peak
6	* 5936.138	39.45	21.68	61.13	-7.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

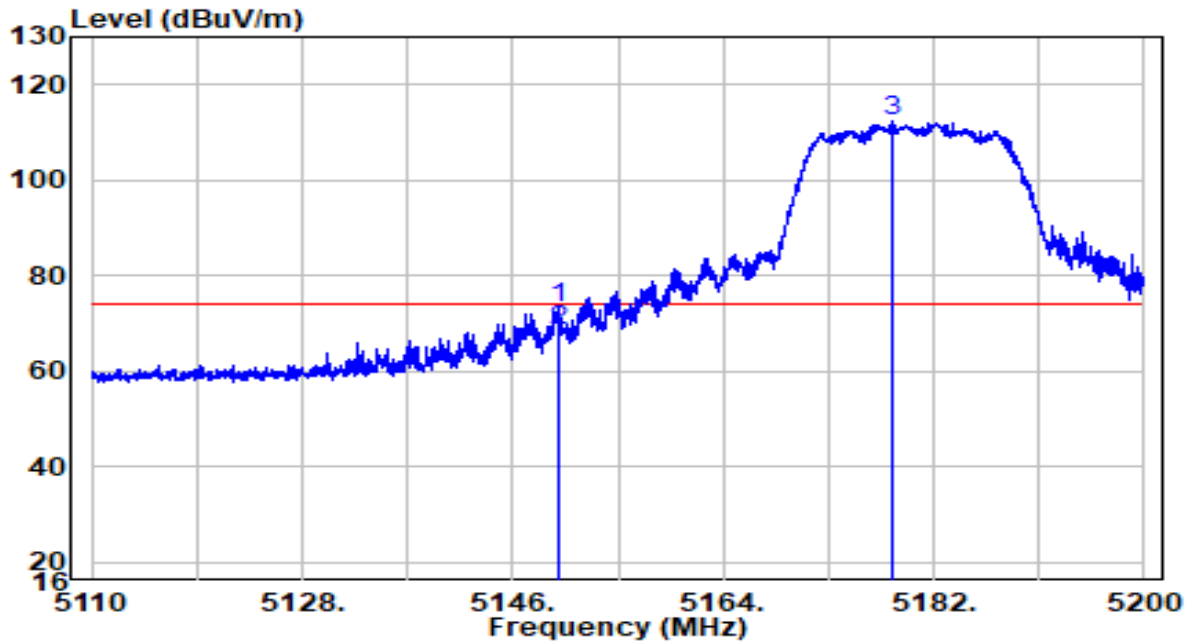


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.915	53.28	19.91	73.18	-0.82	74.00	Peak
2	5150.000	48.41	19.91	68.31	-5.69	74.00	Peak
3	* 5178.400	92.55	19.94	112.48	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

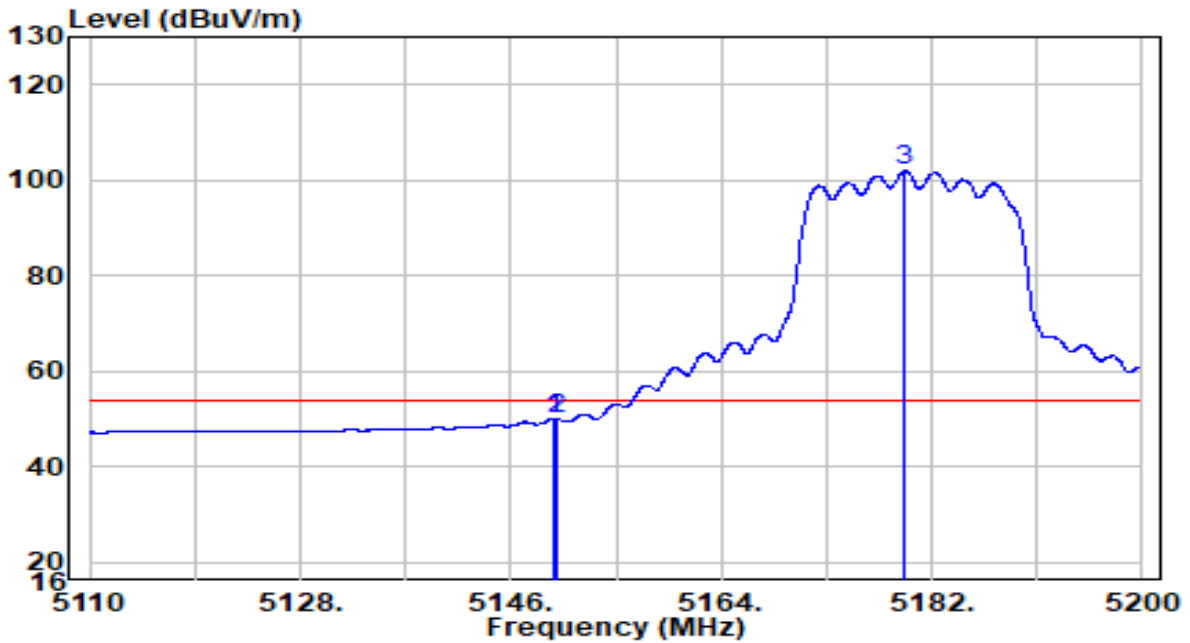


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.735	30.18	19.91	50.08	-3.92	54.00	Average
2	5150.000	30.15	19.91	50.06	-3.94	54.00	Average
3	* 5179.750	82.03	19.94	101.97	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

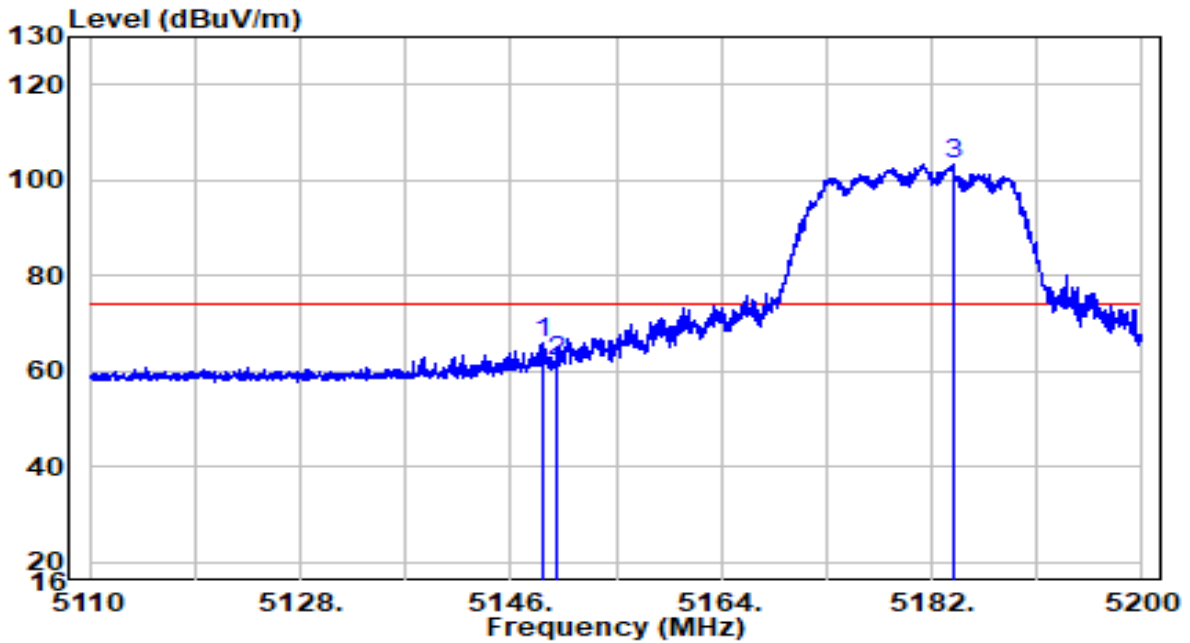


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.700	46.13	19.90	66.04	-7.96	74.00	Peak
2	5150.000	42.03	19.91	61.93	-12.07	74.00	Peak
3	* 5183.890	83.42	19.94	103.36	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

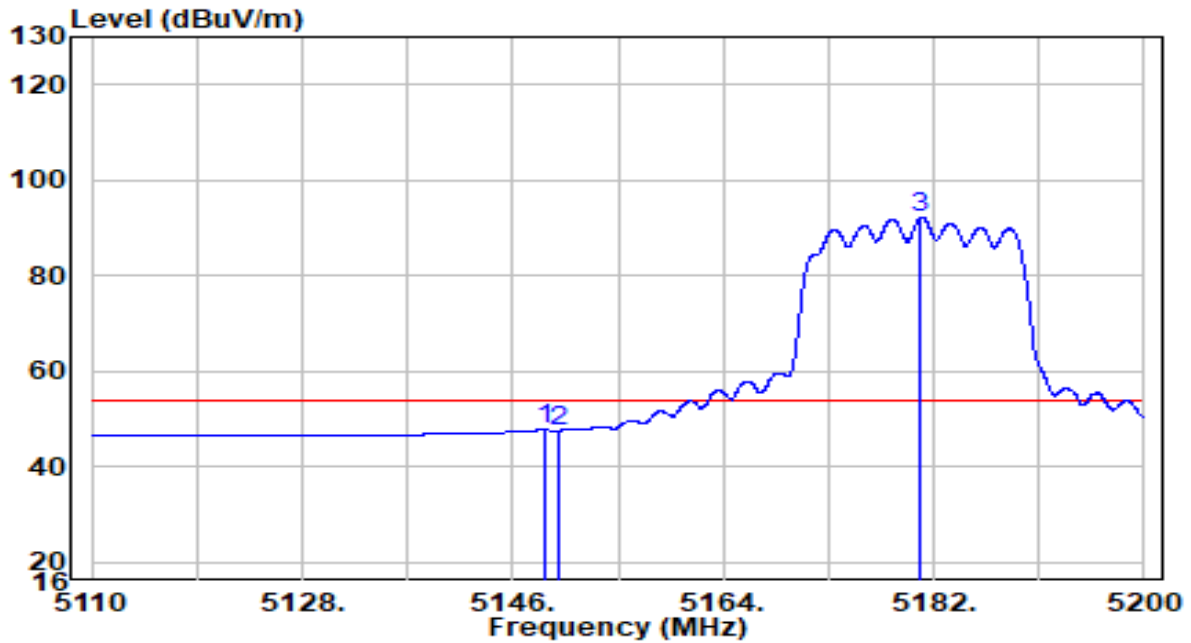


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.700	27.81	19.90	47.72	-6.28	54.00	Average
2	5150.000	27.62	19.91	47.53	-6.47	54.00	Average
3	* 5180.920	72.25	19.94	92.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

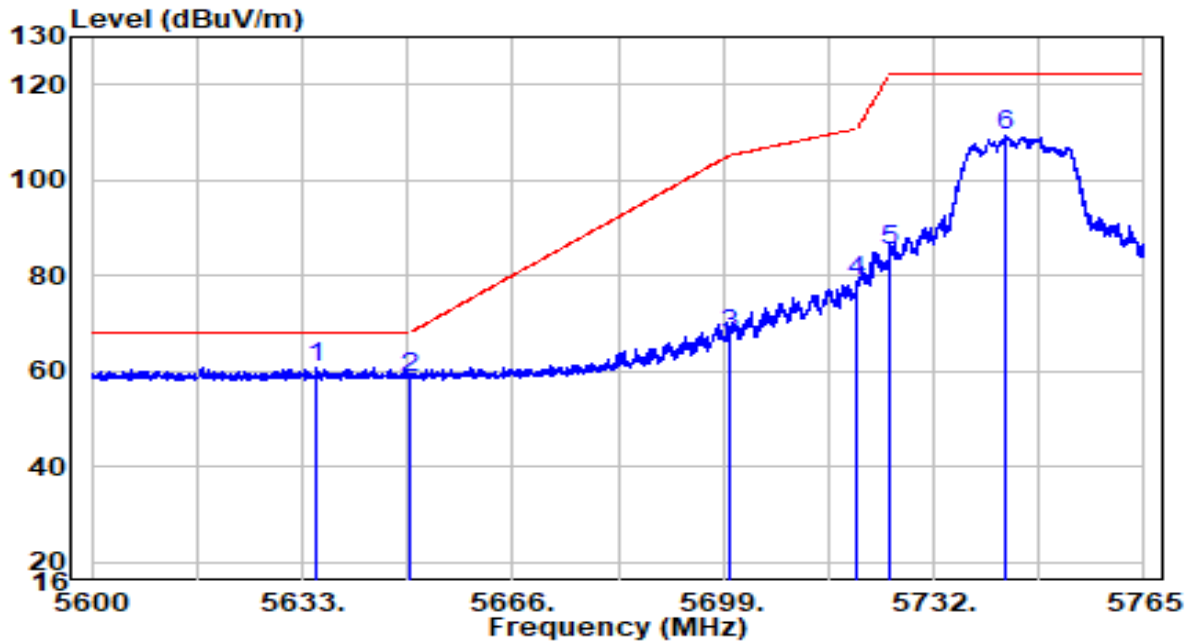


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5635.310	40.10	20.71	60.81	-7.39	68.20	Peak
2	5650.000	38.04	20.76	58.80	-9.40	68.20	Peak
3	5700.000	46.77	20.92	67.69	-37.51	105.20	Peak
4	5720.000	57.62	20.98	78.60	-32.20	110.80	Peak
5	5725.000	64.06	21.00	85.06	-37.14	122.20	Peak
6	5743.385	88.11	21.06	109.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

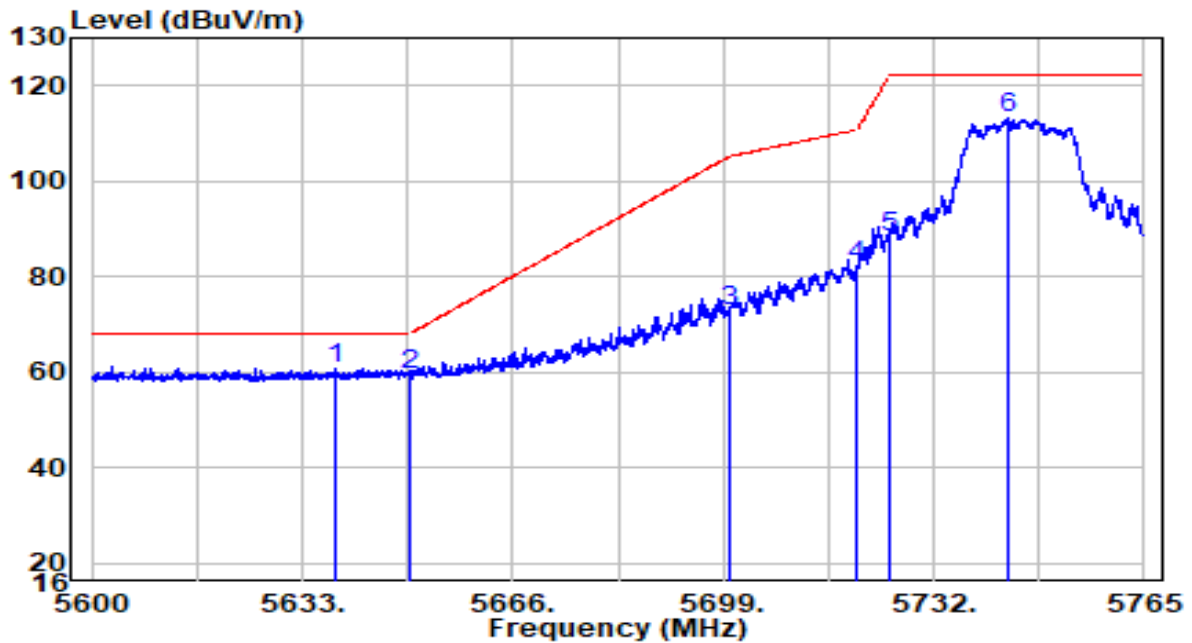


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	39.98	20.72	60.70	-7.50	68.20	Peak
2		38.63	20.76	59.39	-8.81	68.20	Peak
3		51.91	20.92	72.83	-32.37	105.20	Peak
4		61.18	20.98	82.16	-28.64	110.80	Peak
5		67.38	21.00	88.38	-33.82	122.20	Peak
6		92.19	21.06	113.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

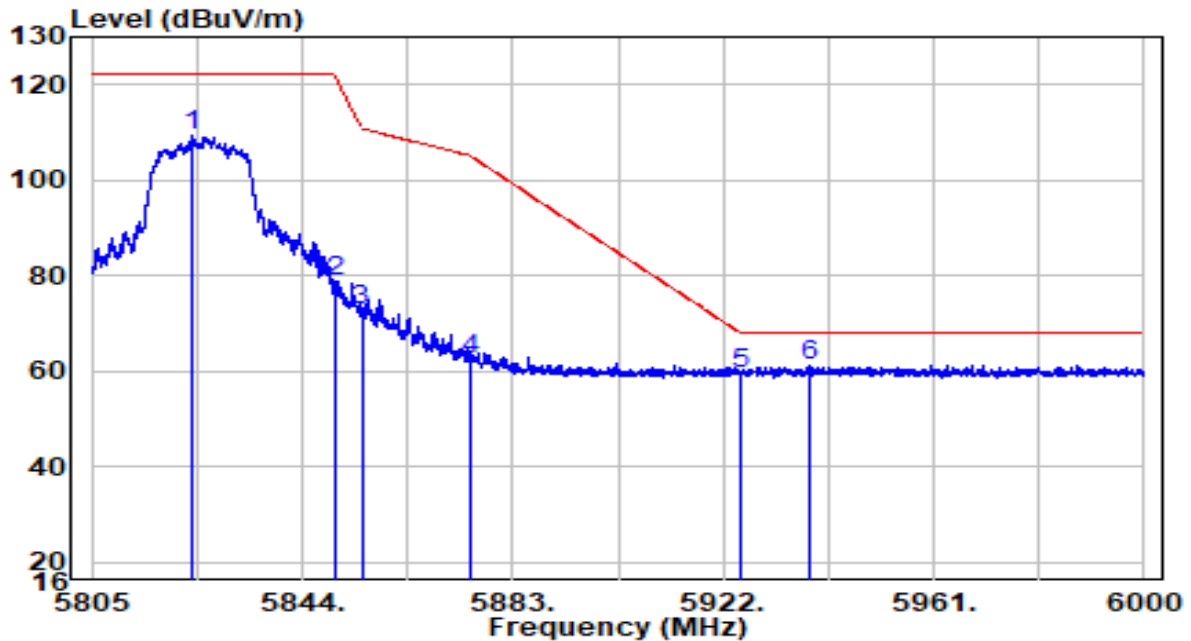


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5823.623	88.06	21.32	109.38	N/A	N/A	Peak
2	5850.000	57.57	21.40	78.97	-43.23	122.20	Peak
3	5855.000	51.41	21.42	72.84	-37.96	110.80	Peak
4	5875.000	40.85	21.49	62.34	-42.86	105.20	Peak
5	5925.000	37.97	21.65	59.61	-8.59	68.20	Peak
6	* 5937.893	39.42	21.69	61.10	-7.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

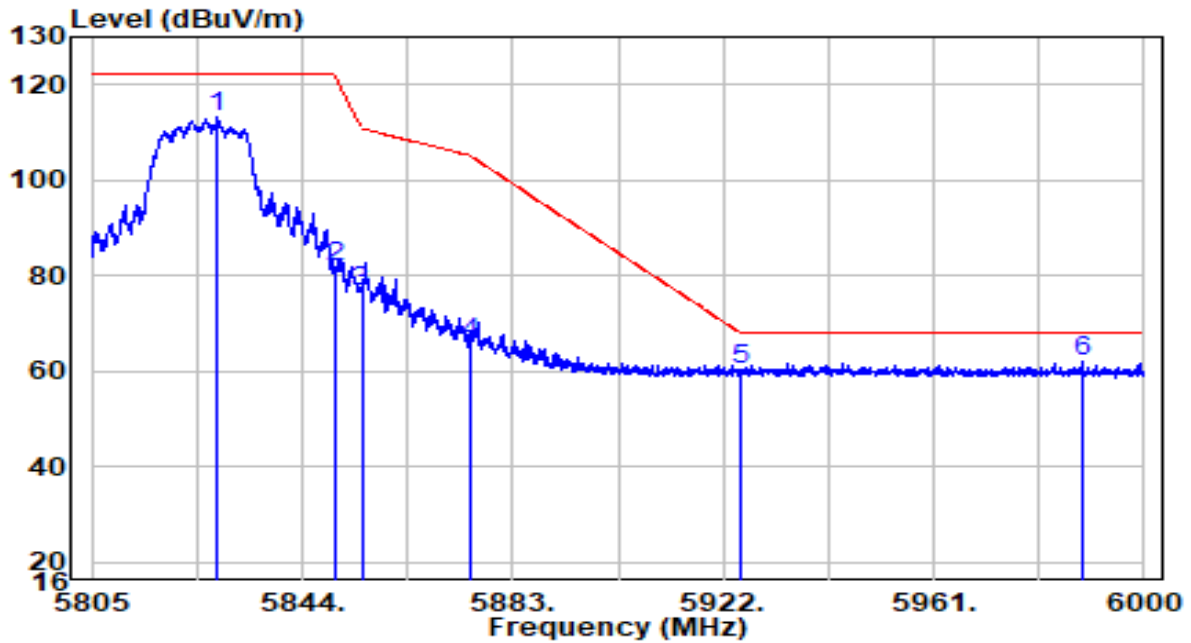


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5828.107	91.69	21.33	113.02	N/A	N/A	Peak
2	5850.000	60.41	21.40	81.82	-40.38	122.20	Peak
3	5855.000	55.28	21.42	76.70	-34.10	110.80	Peak
4	5875.000	44.31	21.49	65.80	-39.40	105.20	Peak
5	5925.000	38.47	21.65	60.12	-8.08	68.20	Peak
6	* 5988.397	40.17	21.85	62.03	-6.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

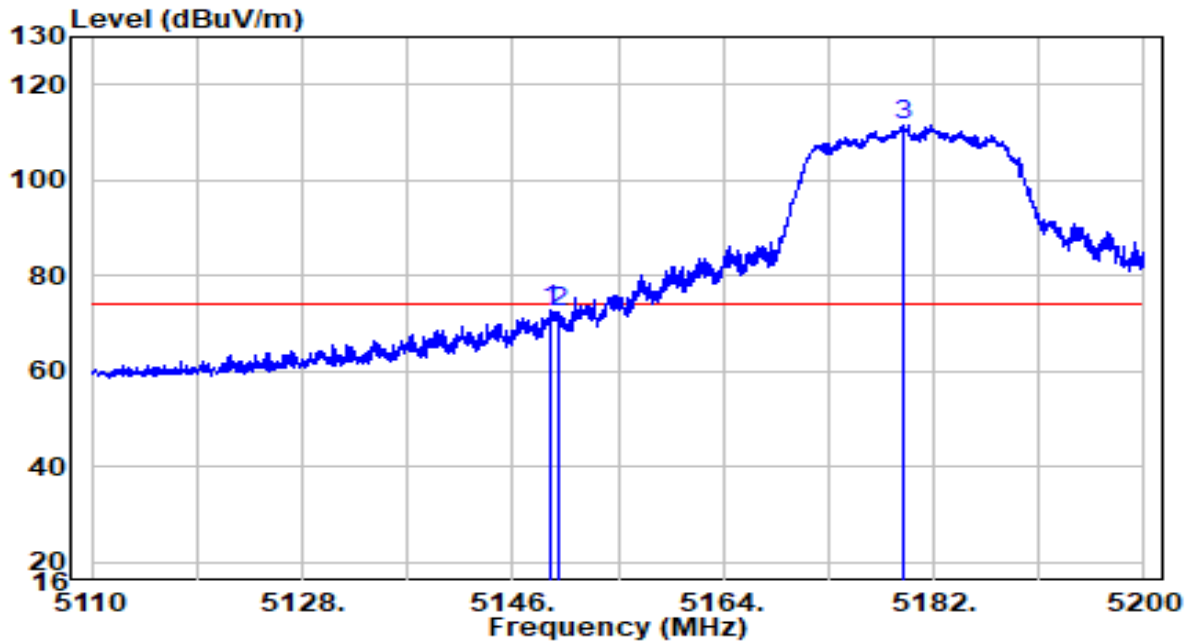


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.195	52.68	19.91	72.59	-1.41	74.00	Peak
2	5150.000	52.31	19.91	72.22	-1.78	74.00	Peak
3	* 5179.345	91.73	19.94	111.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

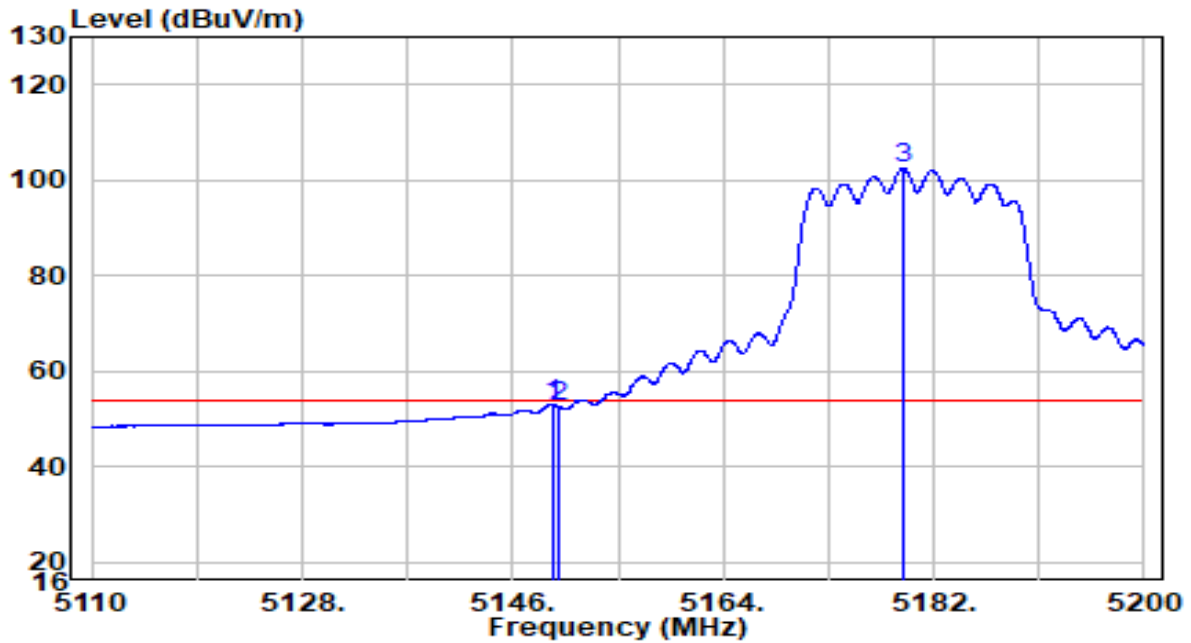


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.510	33.02	19.91	52.93	-1.07	54.00	Average
2	5150.000	32.64	19.91	52.55	-1.45	54.00	Average
3	* 5179.390	82.51	19.94	102.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

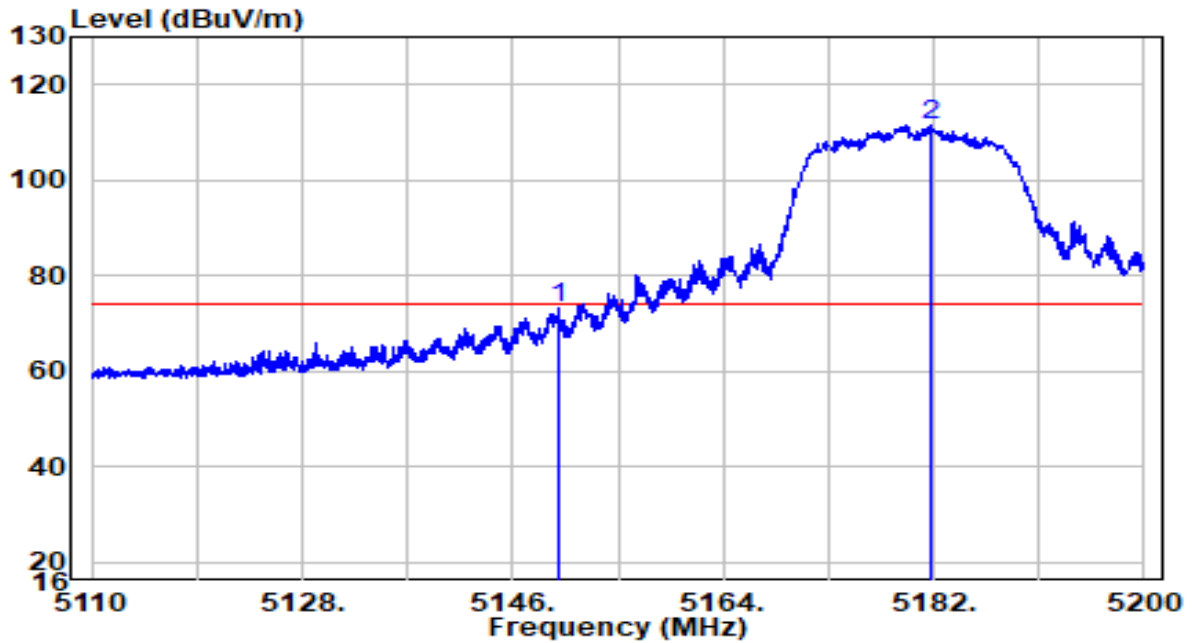


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	53.24	19.91	73.15	-0.85	74.00	Peak
2	* 5181.775	91.62	19.94	111.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

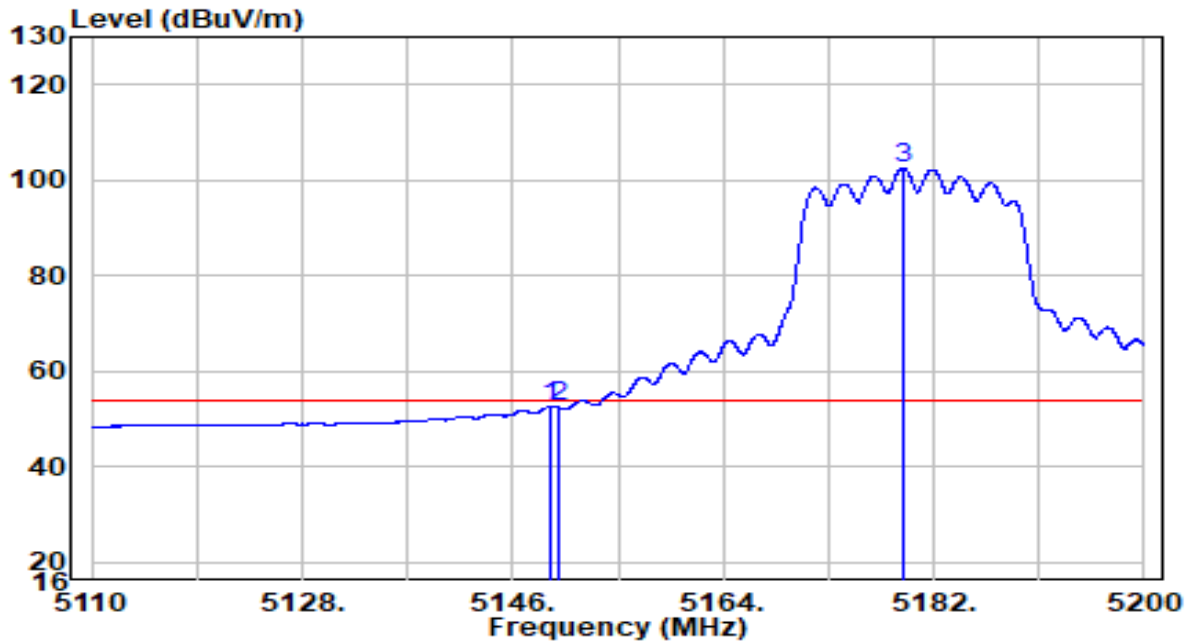


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.330	32.84	19.91	52.75	-1.25	54.00	Average
2	5150.000	32.45	19.91	52.36	-1.64	54.00	Average
3	* 5179.435	82.62	19.94	102.56	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

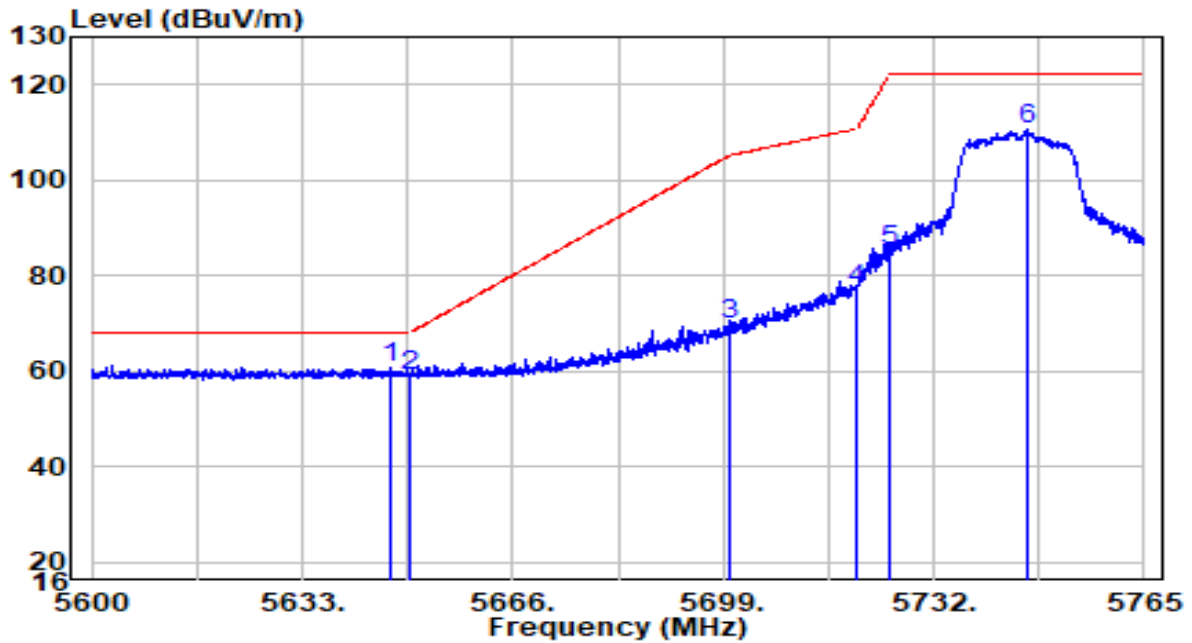


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5646.695	40.12	20.75	60.86	-7.34	68.20	Peak
2	5650.000	38.28	20.76	59.04	-9.16	68.20	Peak
3	5700.000	48.92	20.92	69.84	-35.36	105.20	Peak
4	5720.000	56.06	20.98	77.05	-33.75	110.80	Peak
5	5725.000	64.23	21.00	85.22	-36.98	122.20	Peak
6	5746.603	89.53	21.07	110.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

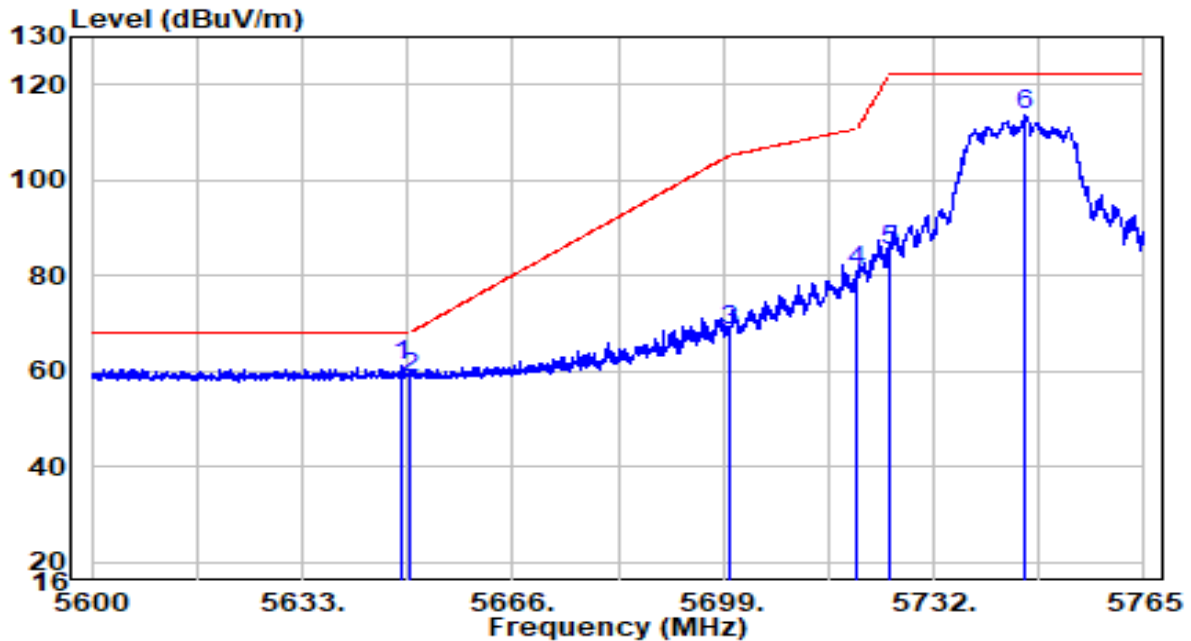


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5648.510	40.27	20.75	61.02	-7.18	68.20	Peak
2	5650.000	37.81	20.76	58.57	-9.63	68.20	Peak
3	5700.000	47.37	20.92	68.29	-36.91	105.20	Peak
4	5720.000	59.84	20.98	80.82	-29.98	110.80	Peak
5	5725.000	64.25	21.00	85.25	-36.95	122.20	Peak
6	5746.272	92.37	21.07	113.44	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

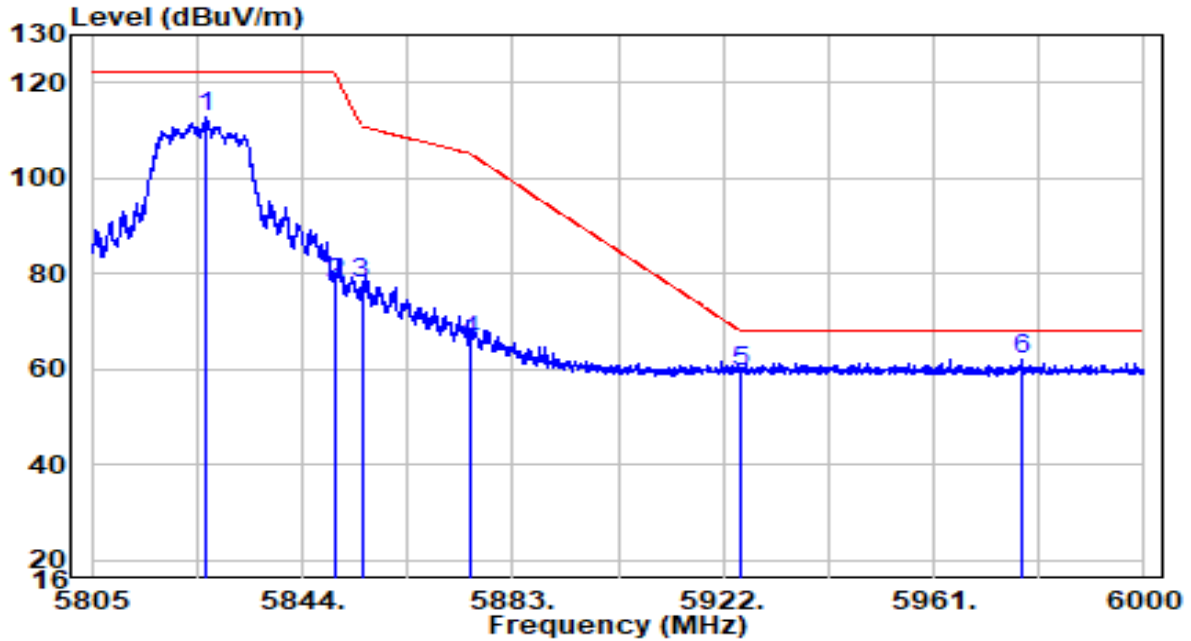


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5826.255	91.28	21.33	112.61	N/A	N/A	Peak
2	5850.000	56.74	21.40	78.14	-44.06	122.20	Peak
3	5855.000	56.68	21.42	78.10	-32.70	110.80	Peak
4	5875.000	44.59	21.49	66.08	-39.12	105.20	Peak
5	5925.000	37.94	21.65	59.59	-8.61	68.20	Peak
6	* 5977.478	40.27	21.82	62.09	-6.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

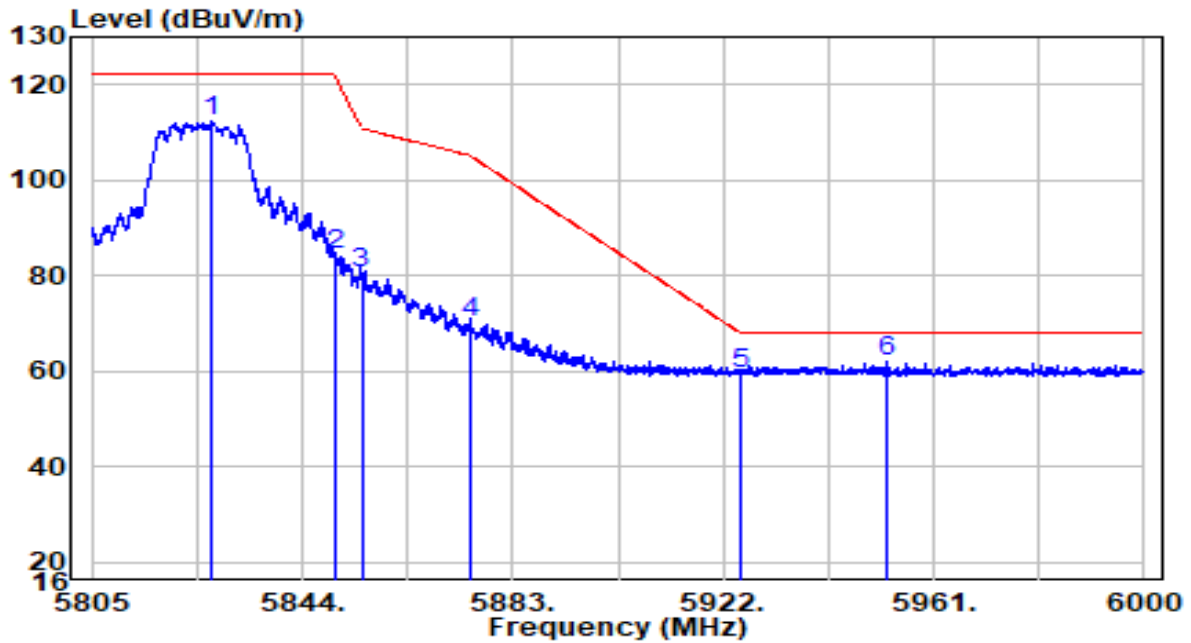


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5827.230	90.98	21.33	112.31	N/A	N/A	Peak
2	5850.000	63.07	21.40	84.47	-37.73	122.20	Peak
3	5855.000	58.90	21.42	80.32	-30.48	110.80	Peak
4	5875.000	48.61	21.49	70.09	-35.11	105.20	Peak
5	5925.000	37.61	21.65	59.25	-8.95	68.20	Peak
6	* 5952.518	40.14	21.74	61.87	-6.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

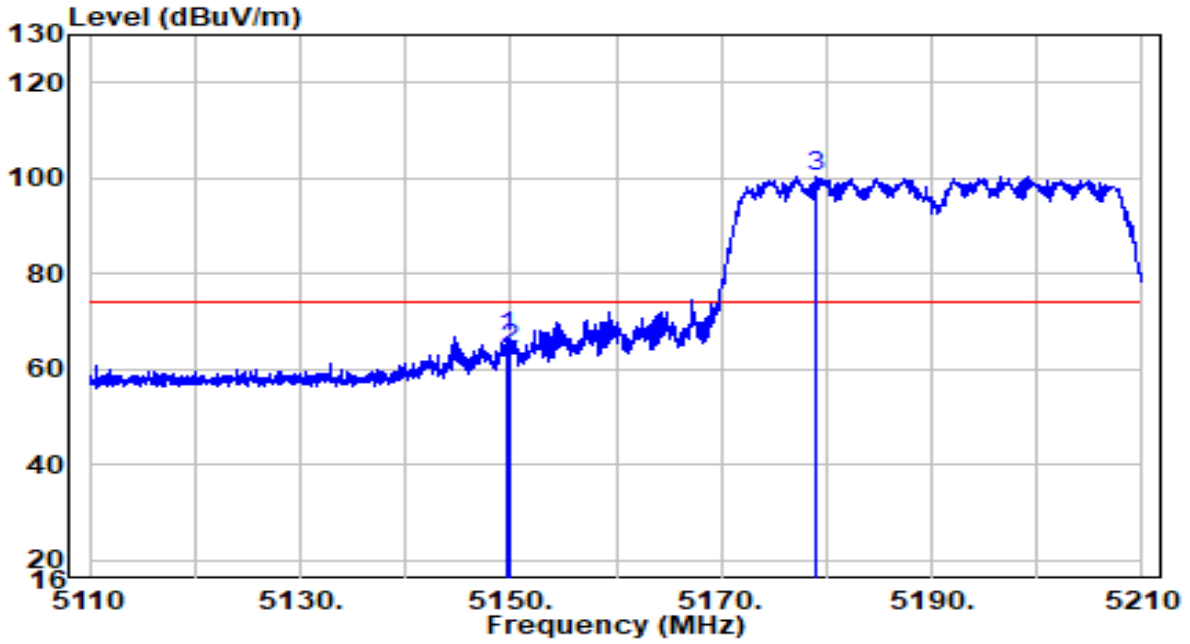


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.750	46.90	19.91	66.81	-7.19	74.00	Peak
2	5150.000	44.43	19.91	64.33	-9.67	74.00	Peak
3	* 5179.050	80.23	19.94	100.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

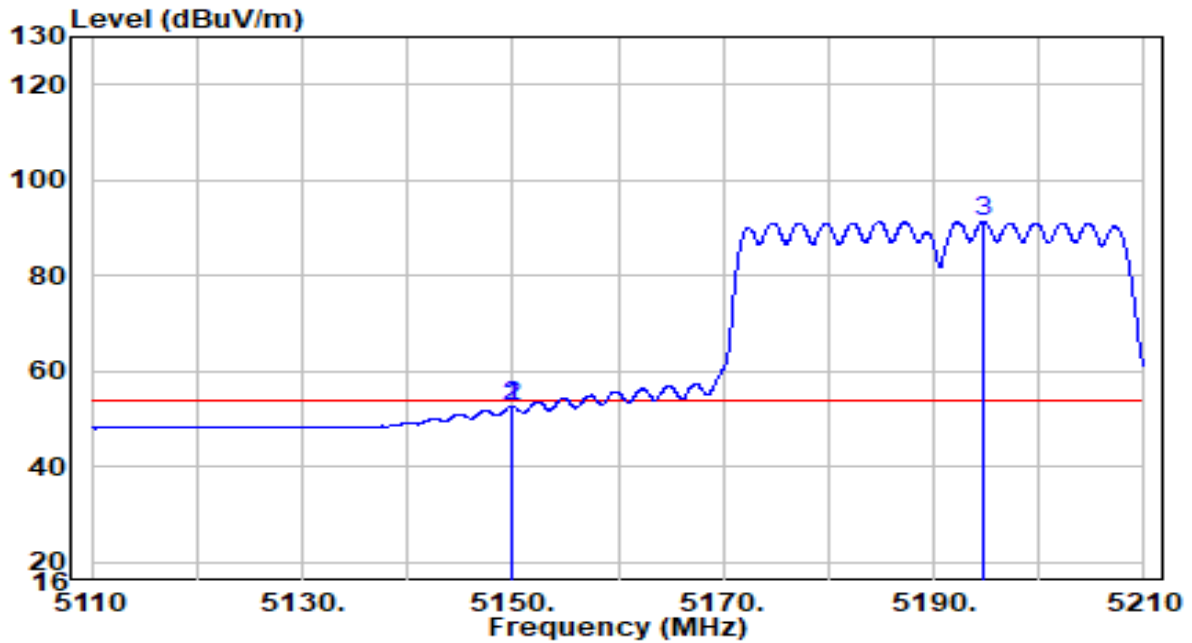


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.800	32.73	19.91	52.64	-1.36	54.00	Average
2	5150.000	32.70	19.91	52.61	-1.39	54.00	Average
3	* 5194.700	71.26	19.95	91.22	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

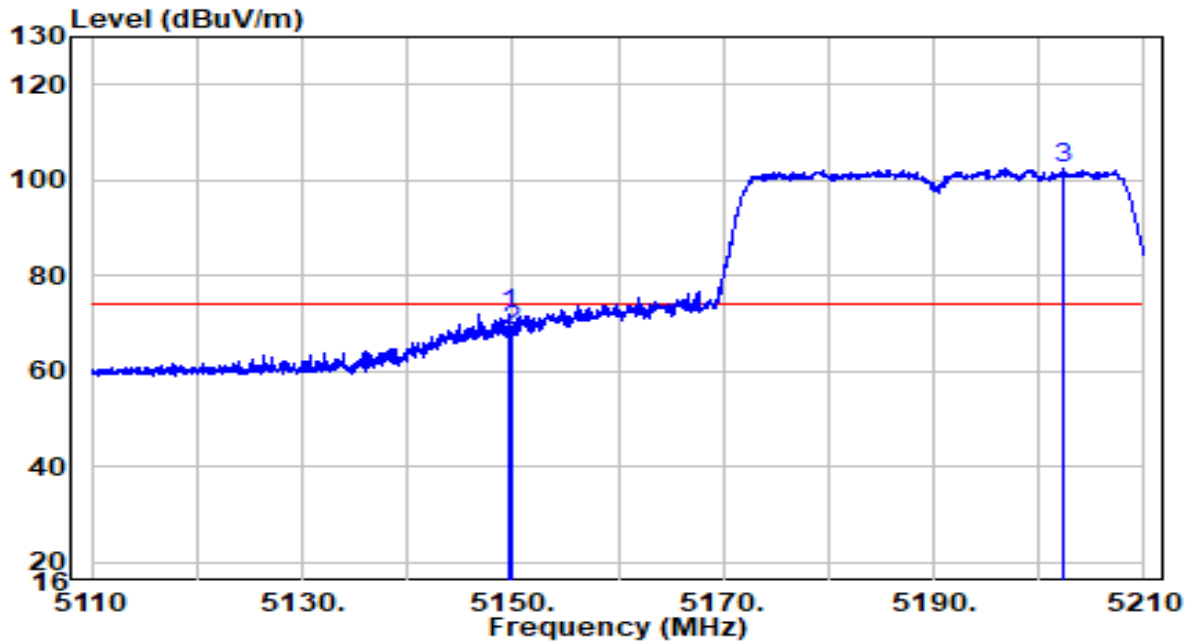


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.700	51.98	19.91	71.88	-2.12	74.00	Peak
2	5150.000	48.51	19.91	68.42	-5.58	74.00	Peak
3	* 5202.250	82.45	19.96	102.41	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

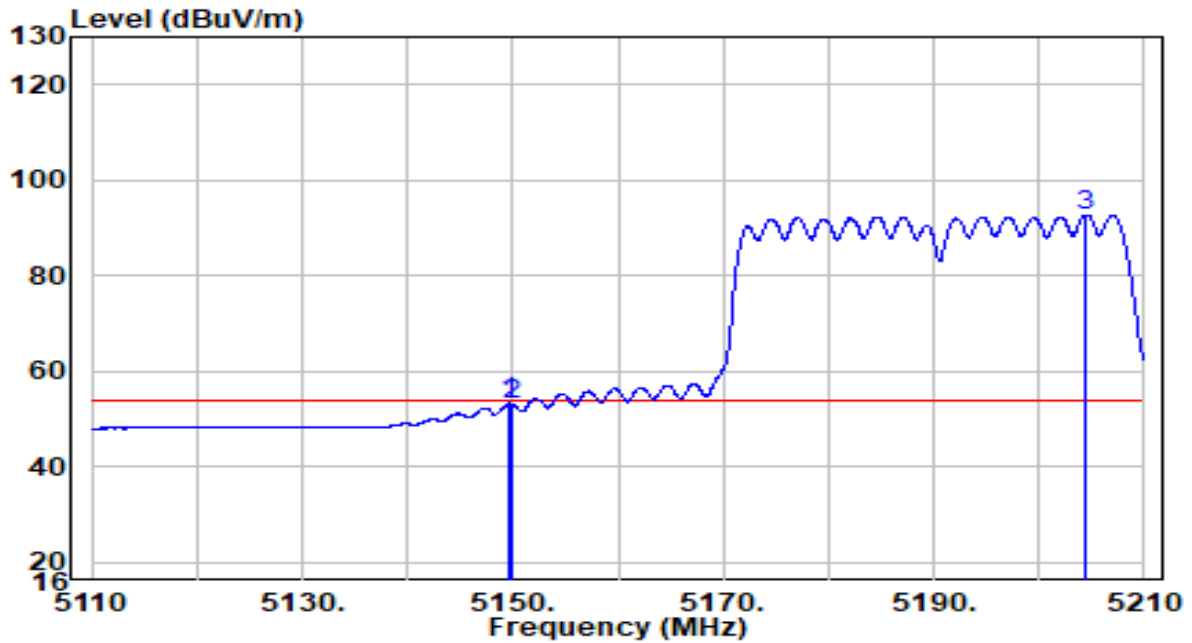


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.750	33.31	19.91	53.22	-0.78	54.00	Average
2	5150.000	33.10	19.91	53.01	-0.99	54.00	Average
3	* 5204.500	72.72	19.96	92.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

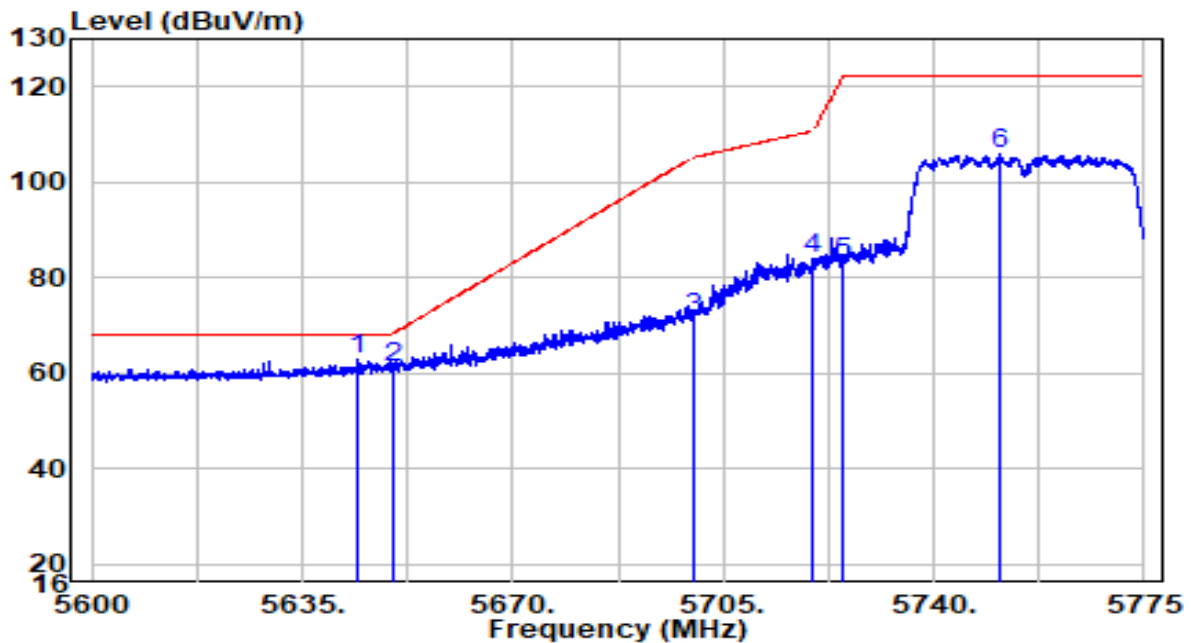


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5644.275	42.14	20.74	62.88	-5.32	68.20	Peak
2	5650.000	40.35	20.76	61.10	-7.10	68.20	Peak
3	5700.000	50.52	20.92	71.44	-33.76	105.20	Peak
4	5720.000	63.05	20.98	84.03	-26.77	110.80	Peak
5	5725.000	62.05	21.00	83.05	-39.15	122.20	Peak
6	5750.850	84.67	21.08	105.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

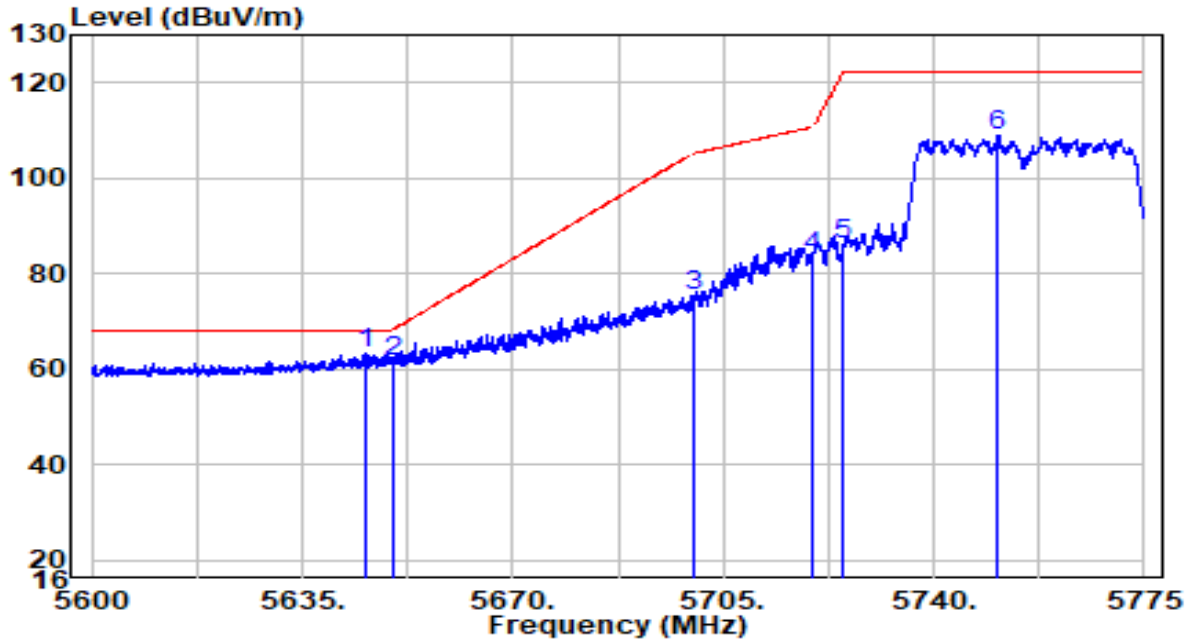


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5645.675	42.63	20.74	63.37	-4.83	68.20	Peak
2	5650.000	40.75	20.76	61.51	-6.69	68.20	Peak
3	5700.000	54.47	20.92	75.39	-29.81	105.20	Peak
4	5720.000	62.76	20.98	83.74	-27.06	110.80	Peak
5	5725.000	65.23	21.00	86.23	-35.97	122.20	Peak
6	5750.675	88.01	21.08	109.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

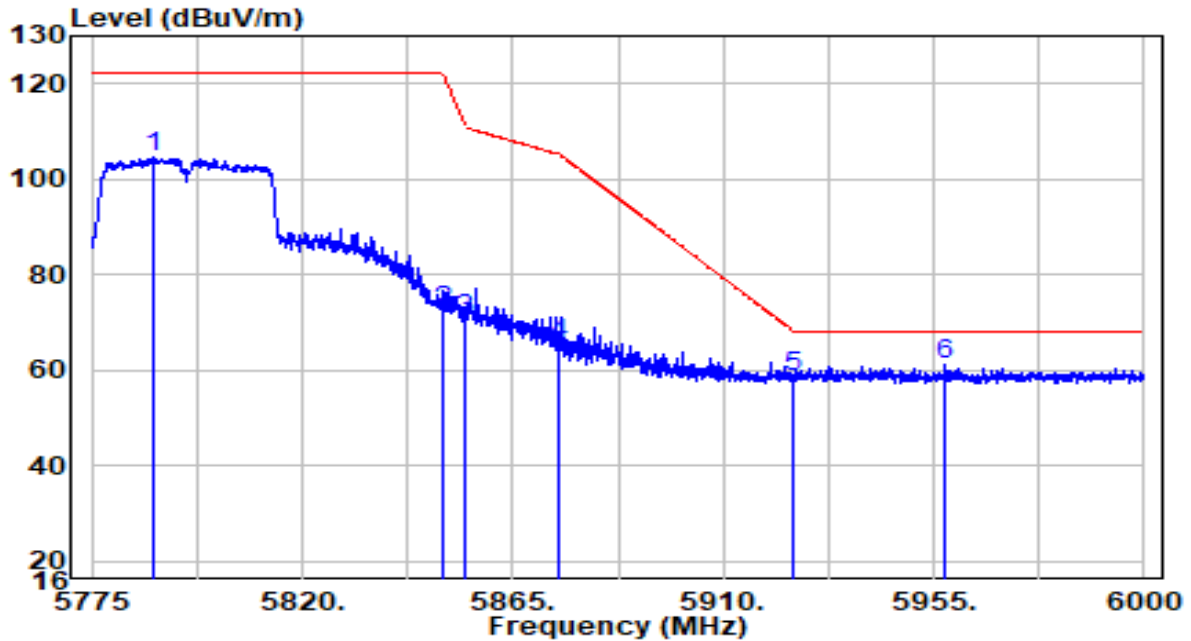


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5788.388	83.23	21.20	104.44	N/A	N/A	Peak
2	5850.000	51.09	21.40	72.49	-49.71	122.20	Peak
3	5855.000	49.02	21.42	70.44	-40.36	110.80	Peak
4	5875.000	44.15	21.49	65.63	-39.57	105.20	Peak
5	5925.000	37.09	21.65	58.74	-9.46	68.20	Peak
6	* 5957.587	39.47	21.75	61.23	-6.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

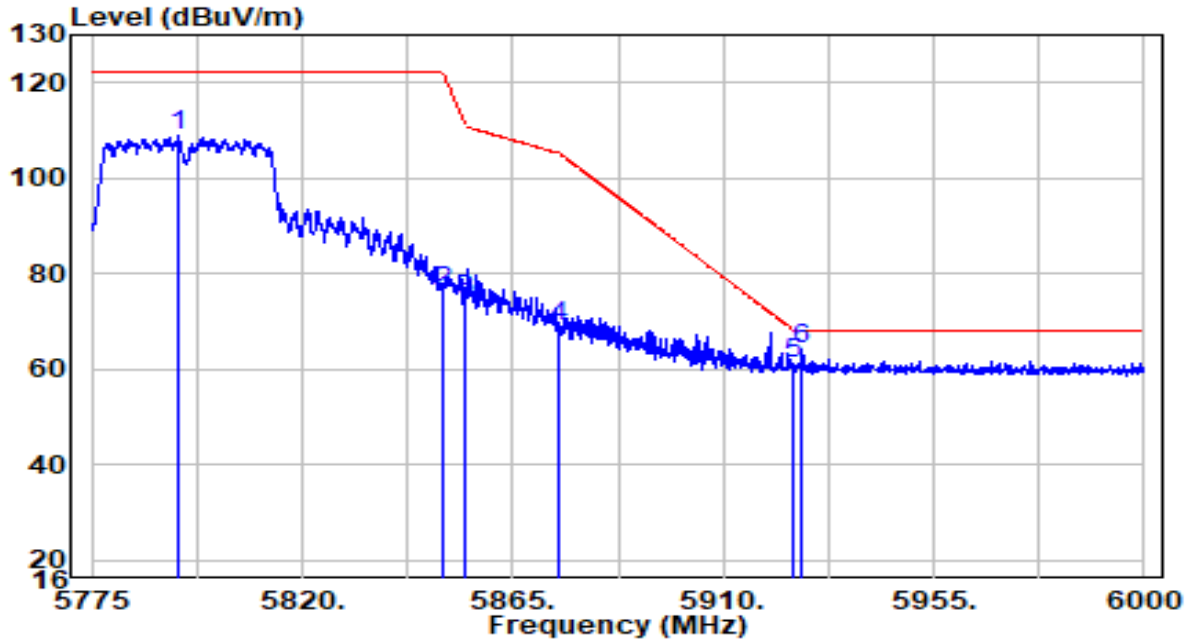


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5793.675	87.73	21.22	108.96	N/A	N/A	Peak
2	5850.000	54.66	21.40	76.07	-46.13	122.20	Peak
3	5855.000	53.25	21.42	74.67	-36.13	110.80	Peak
4	5875.000	47.48	21.49	68.97	-36.23	105.20	Peak
5	5925.000	39.41	21.65	61.06	-7.14	68.20	Peak
6	* 5926.763	42.49	21.65	64.14	-4.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

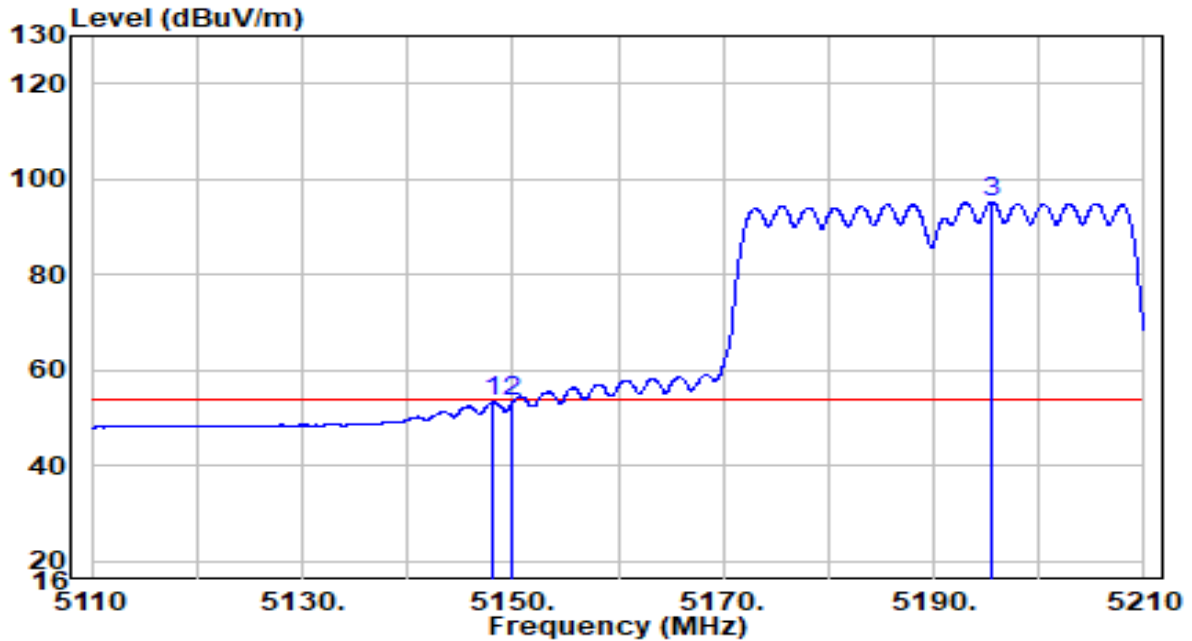


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.100	33.45	19.90	53.35	-0.65	54.00	Average
2	5150.000	33.37	19.91	53.28	-0.72	54.00	Average
3	* 5195.550	75.18	19.95	95.13	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

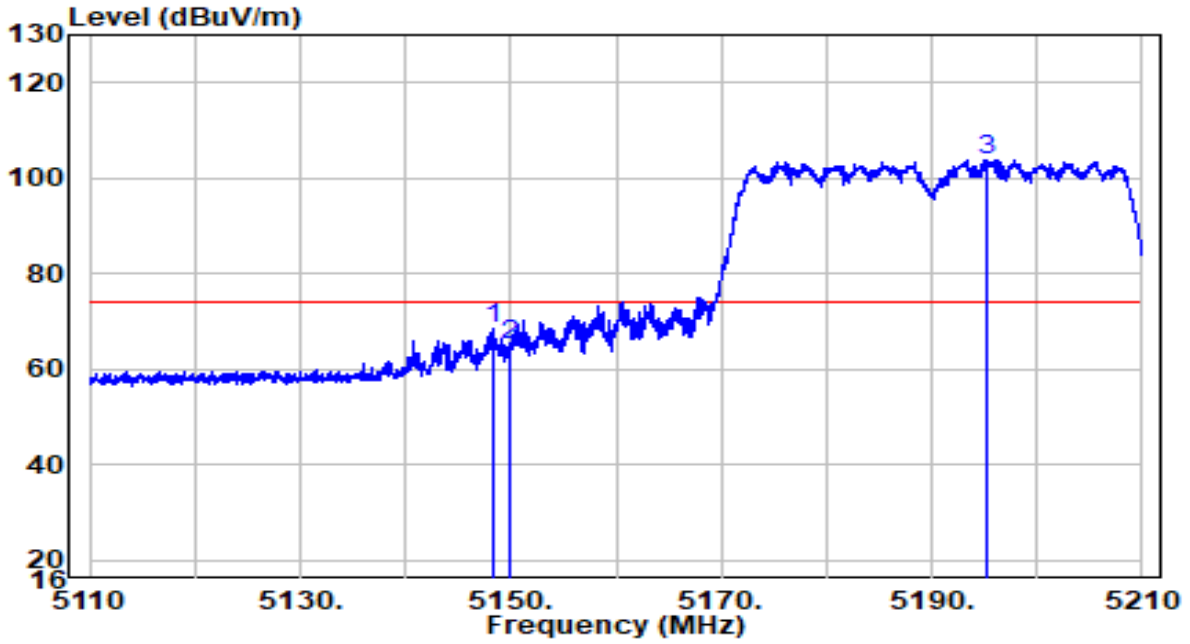


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.400	48.72	19.90	68.62	-5.38	74.00	Peak
2	5150.000	45.08	19.91	64.98	-9.02	74.00	Peak
3	* 5195.200	83.91	19.95	103.87	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

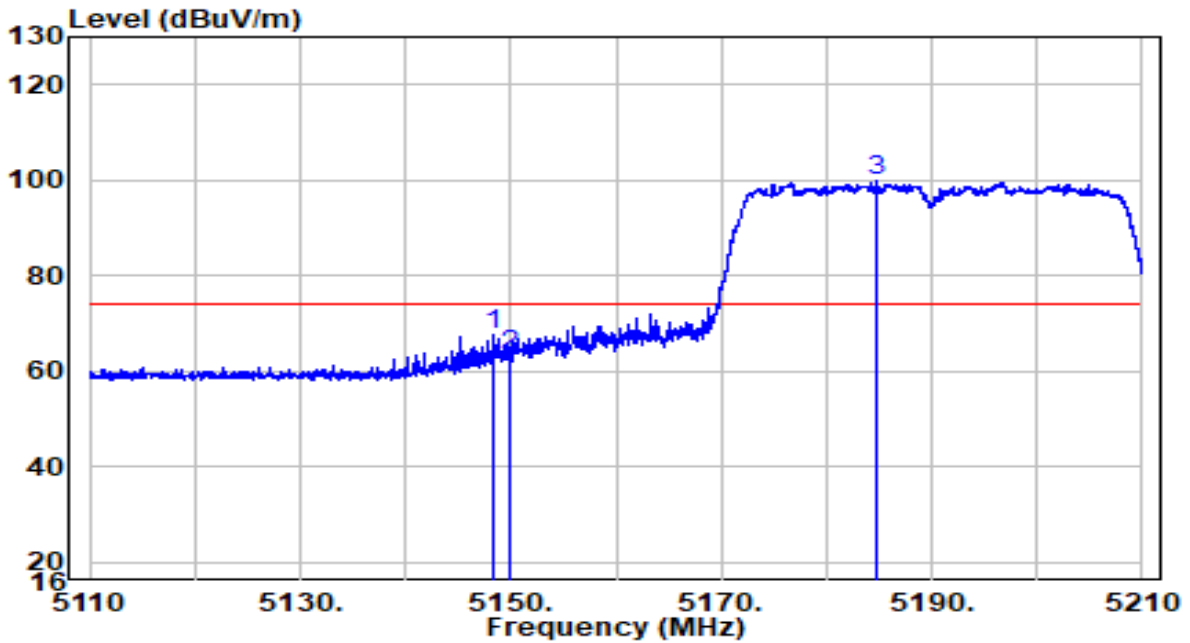


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.450	47.66	19.90	67.57	-6.43	74.00	Peak
2	5150.000	43.35	19.91	63.25	-10.75	74.00	Peak
3	* 5184.800	79.78	19.94	99.72	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

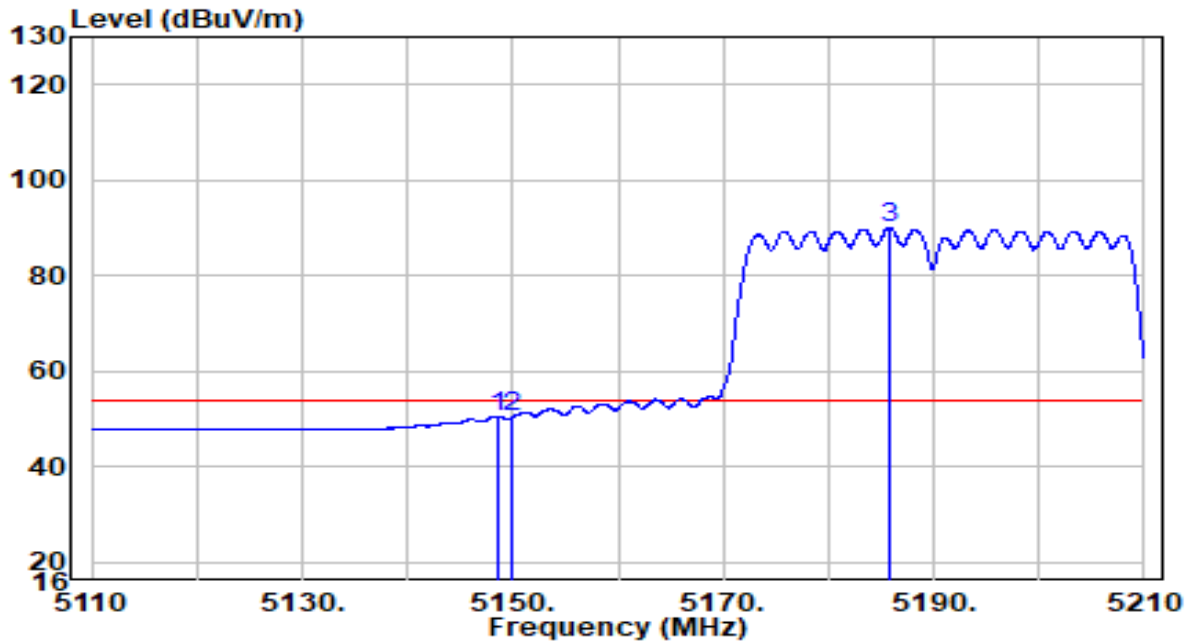


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.550	30.71	19.90	50.62	-3.38	54.00	Average
2	5150.000	30.40	19.91	50.31	-3.69	54.00	Average
3	* 5185.800	69.97	19.94	89.91	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

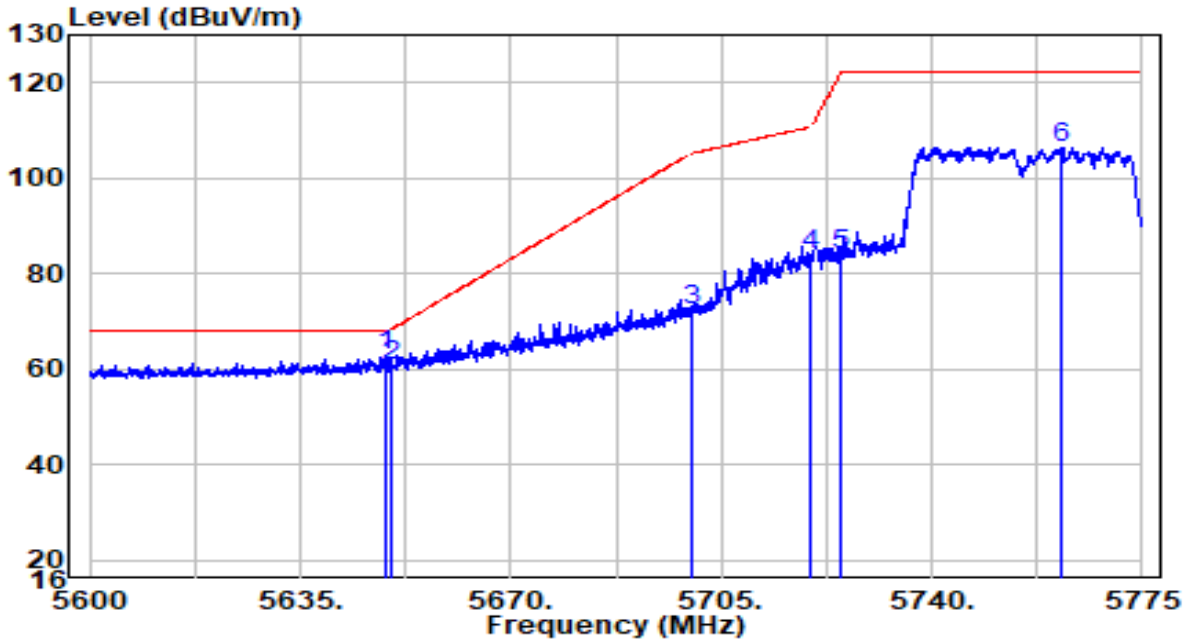


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5649.175	42.29	20.75	63.04	-5.16	68.20	Peak
2	5650.000	40.08	20.76	60.83	-7.37	68.20	Peak
3	5700.000	51.36	20.92	72.28	-32.92	105.20	Peak
4	5720.000	63.14	20.98	84.13	-26.67	110.80	Peak
5	5725.000	62.91	21.00	83.90	-38.30	122.20	Peak
6	5761.700	85.44	21.12	106.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

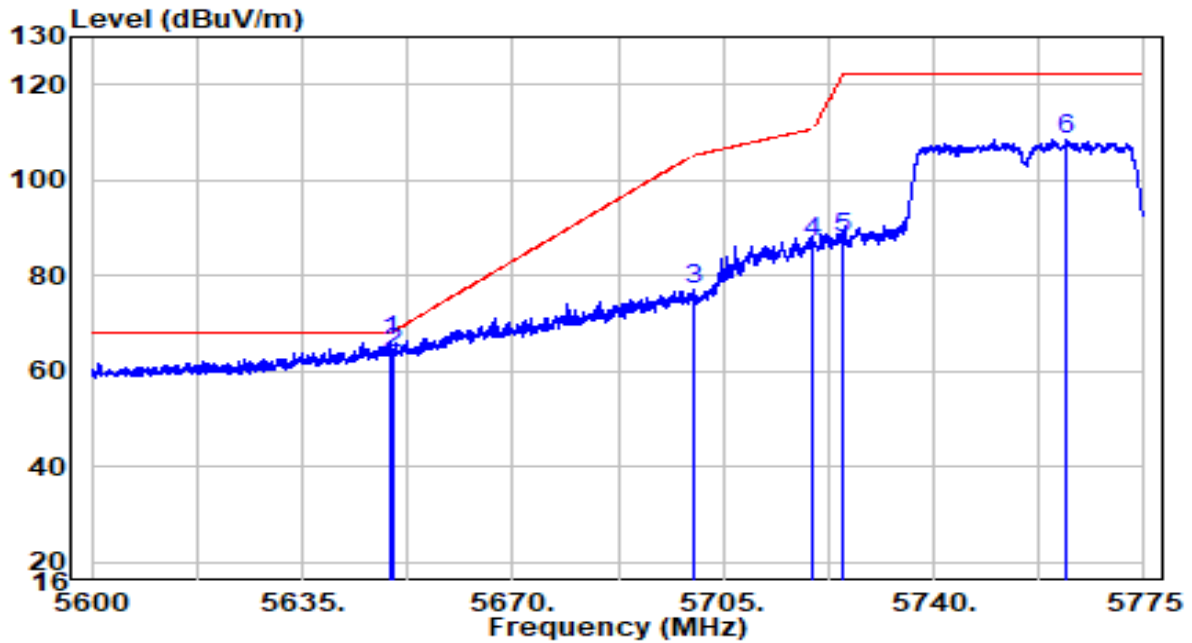


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5649.612	45.70	20.75	66.45	-1.75	68.20	Peak
2	5650.000	43.03	20.76	63.79	-4.41	68.20	Peak
3	5700.000	56.18	20.92	77.10	-28.10	105.20	Peak
4	5720.000	65.83	20.98	86.82	-23.98	110.80	Peak
5	5725.000	66.64	21.00	87.64	-34.56	122.20	Peak
6	5762.225	87.55	21.12	108.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

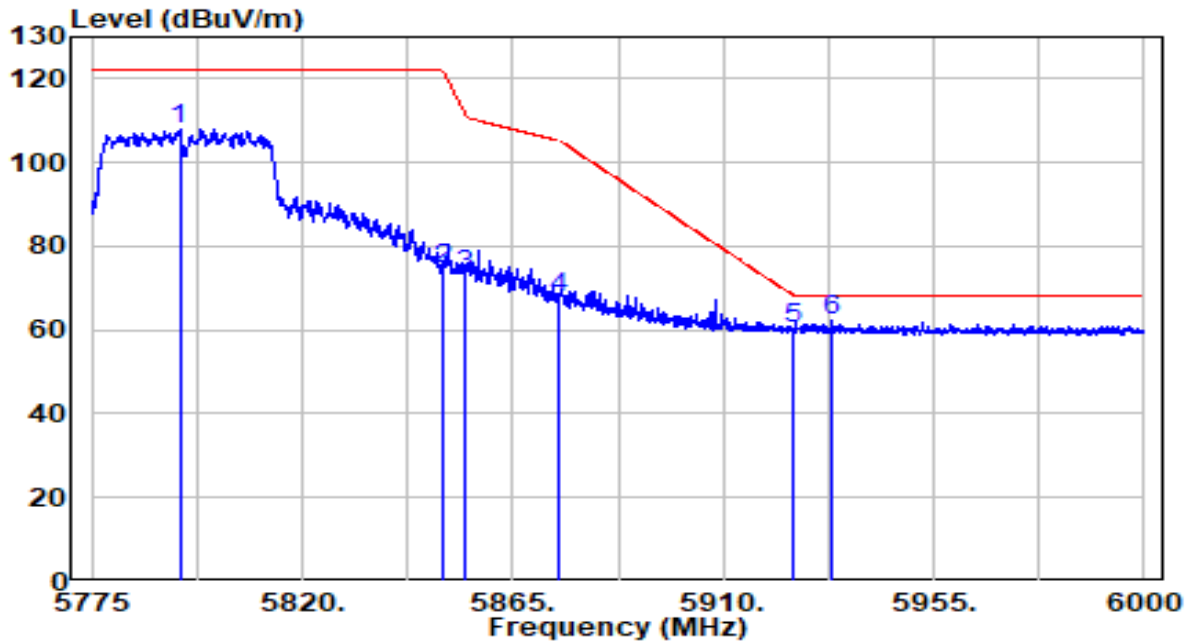


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5793.788	100.39	7.49	107.88	N/A	N/A	Peak
2	5850.000	66.59	7.78	74.37	-47.83	122.20	Peak
3	5855.000	65.33	7.78	73.11	-37.69	110.80	Peak
4	5875.000	59.57	7.93	67.50	-37.70	105.20	Peak
5	5925.000	52.36	8.17	60.53	-7.67	68.20	Peak
6	* 5933.175	54.26	8.24	62.50	-5.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

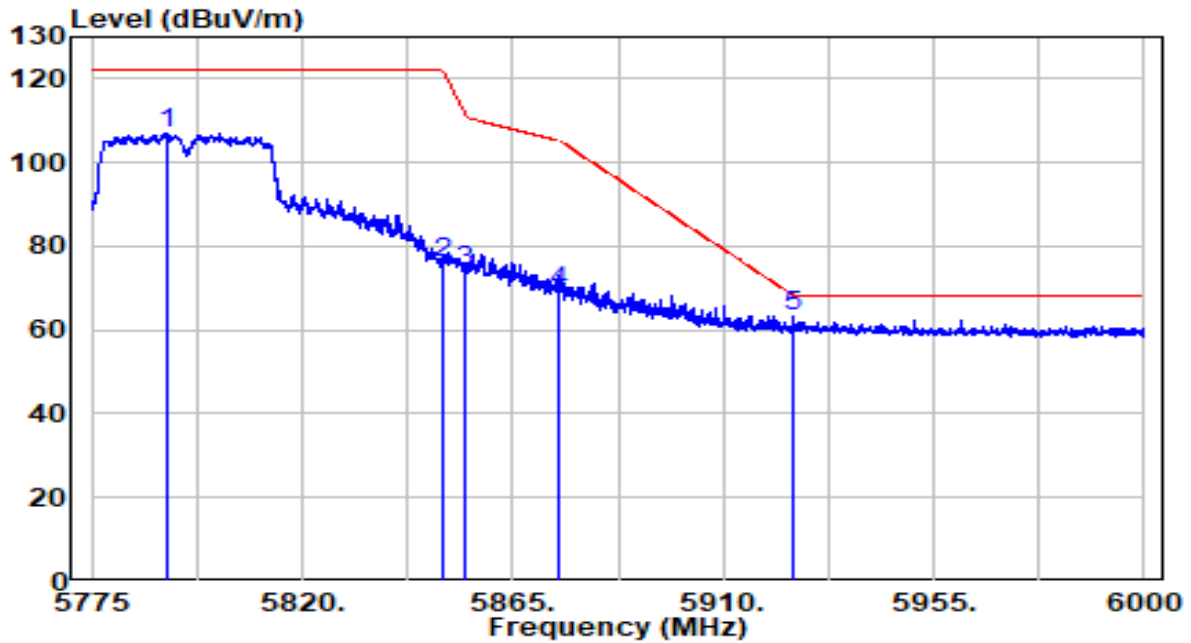


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5791.313	99.44	7.50	106.94	N/A	N/A	Peak
2	5850.000	68.02	7.78	75.80	-46.40	122.20	Peak
3	5855.000	66.16	7.78	73.94	-36.86	110.80	Peak
4	5875.000	61.00	7.93	68.93	-36.27	105.20	Peak
5	* 5925.000	54.97	8.17	63.14	-5.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

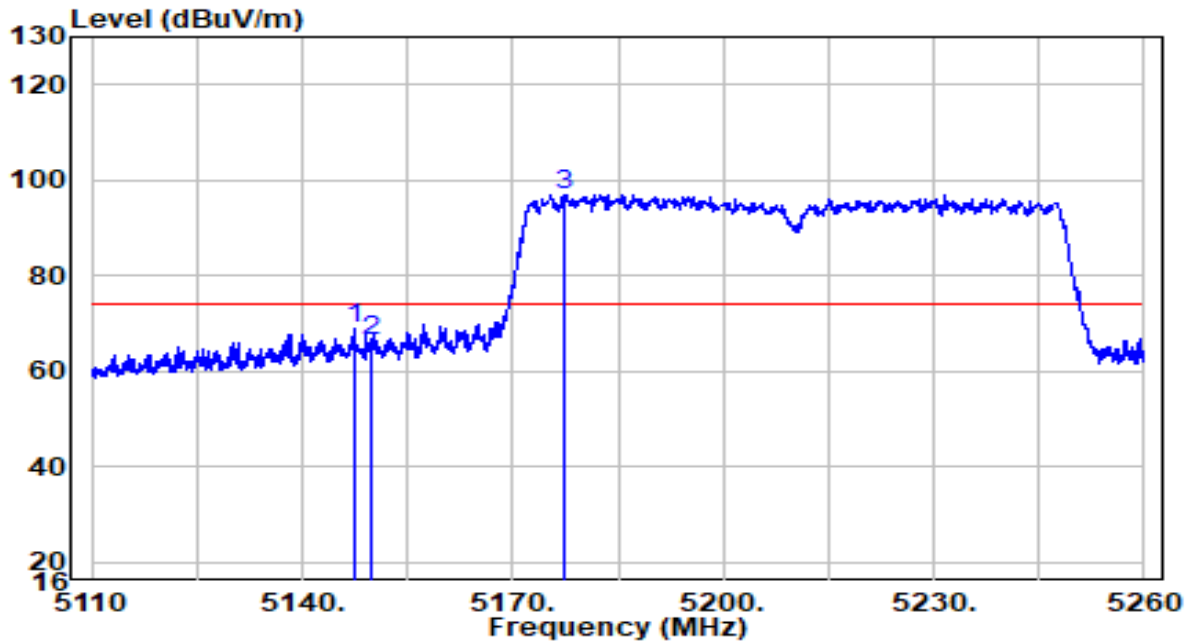


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.350	49.10	19.90	69.01	-4.99	74.00	Peak
2	5150.000	46.35	19.91	66.25	-7.75	74.00	Peak
3	* 5177.500	77.09	19.93	97.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

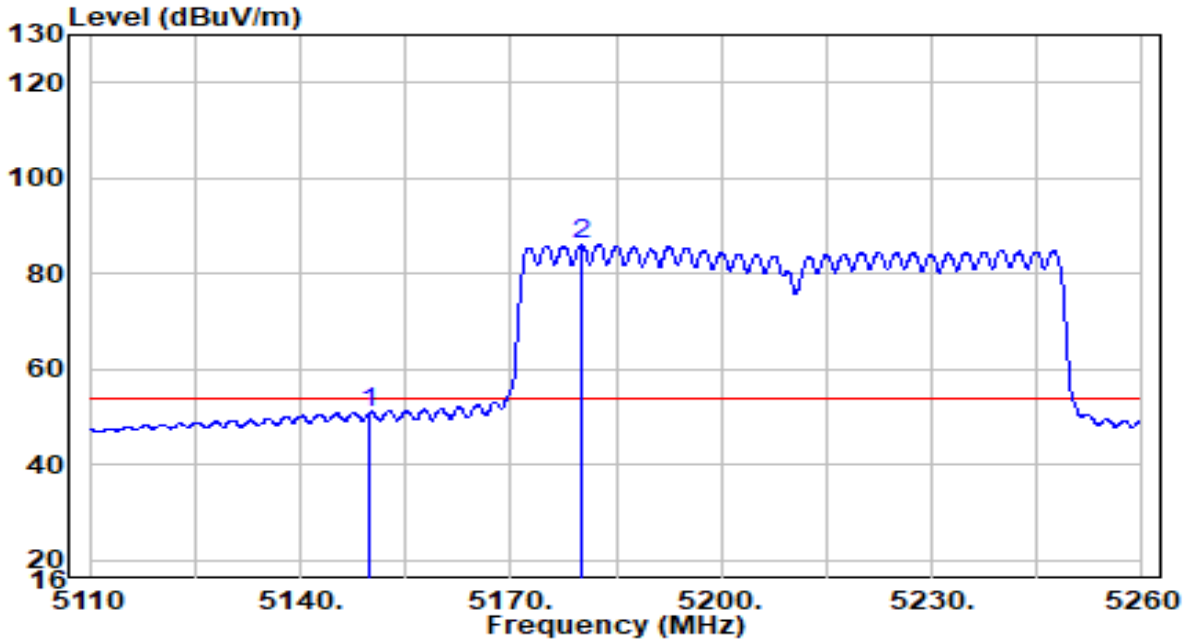


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	31.12	19.91	51.02	-2.98	54.00	Average
2	* 5180.125	66.04	19.94	85.98	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

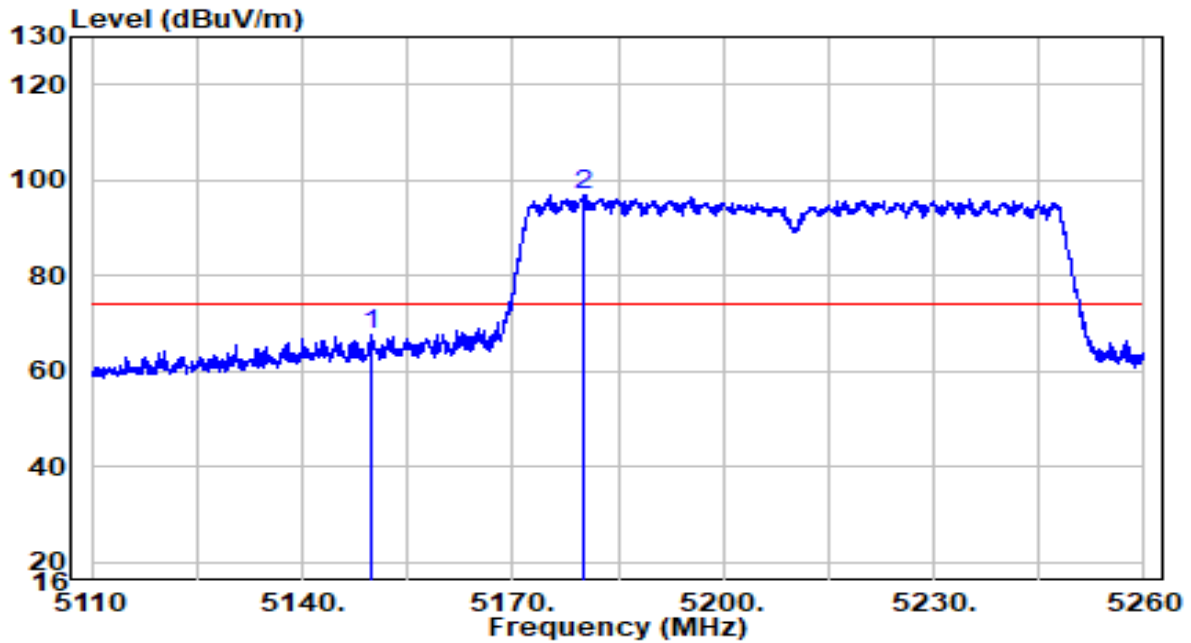


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	47.50	19.91	67.41	-6.59	74.00	Peak
2	* 5180.125	76.87	19.94	96.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

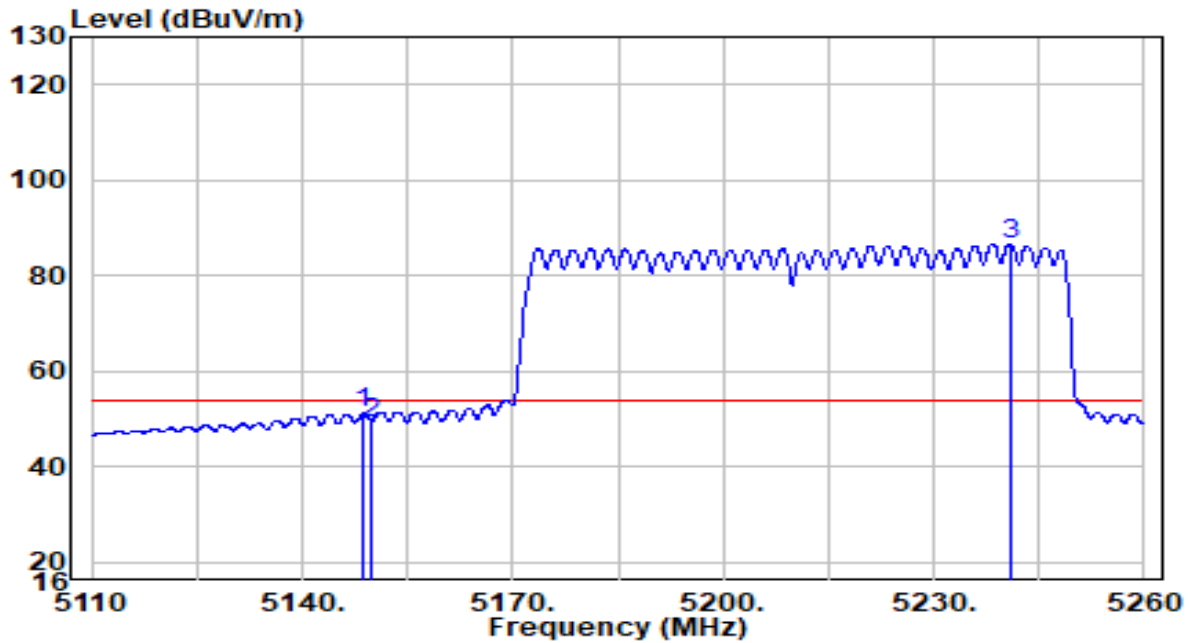


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.700	31.22	19.90	51.12	-2.88	54.00	Average
2	5150.000	29.39	19.91	49.30	-4.70	54.00	Average
3	* 5240.875	66.76	20.00	86.76	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

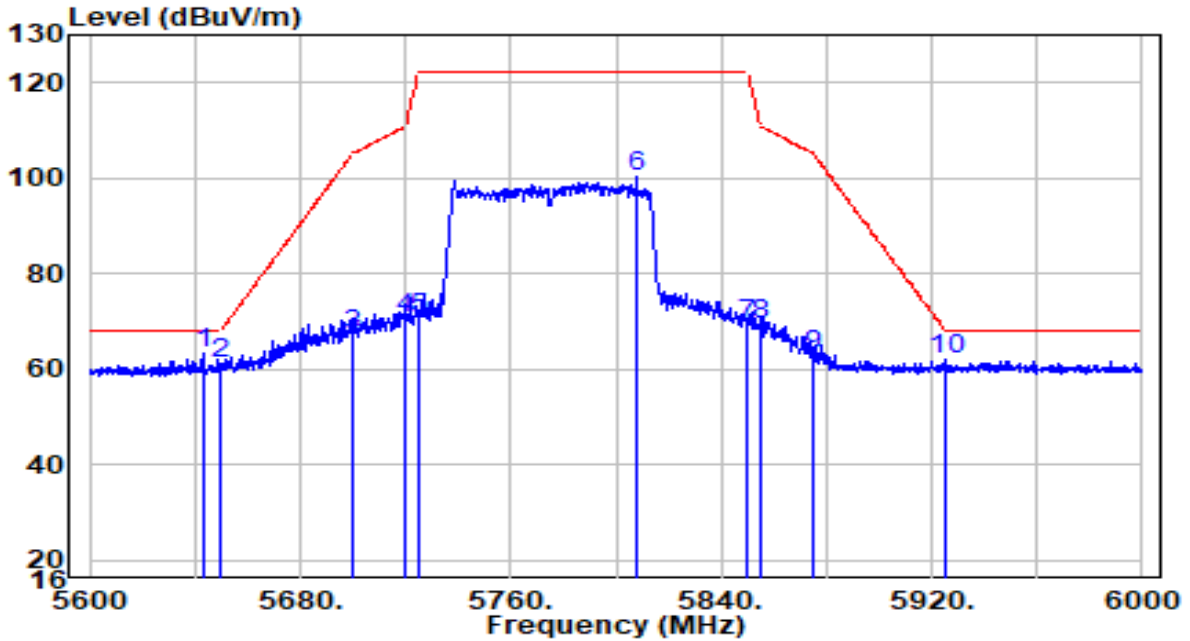


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5643.400	42.54	20.73	63.28	-4.92	68.20	Peak
2	5650.000	40.25	20.76	61.00	-7.20	68.20	Peak
3	5700.000	46.11	20.92	67.03	-38.17	105.20	Peak
4	5720.000	49.46	20.98	70.45	-40.35	110.80	Peak
5	5725.000	49.81	21.00	70.81	-51.39	122.20	Peak
6	5808.000	78.93	21.27	100.20	N/A	N/A	Peak
7	5850.000	48.02	21.40	69.42	-52.78	122.20	Peak
8	5855.000	47.84	21.42	69.26	-41.54	110.80	Peak
9	5875.000	41.28	21.49	62.76	-42.44	105.20	Peak
10	5925.000	40.33	21.65	61.98	-6.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Streaming Media Player	Date of Test	2021-07-09
Factor	BBHA 9120D (1GHz~18GHz)_2020	Temp. / Humidity	26°C/46.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

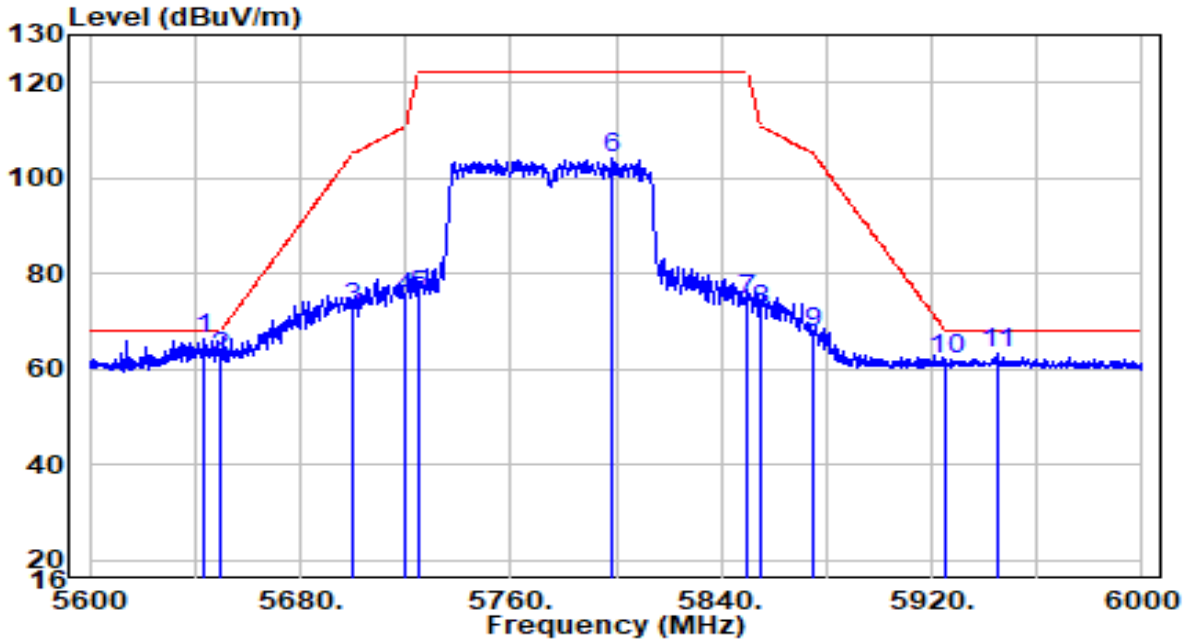

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5643.400	45.41	20.73	66.14	-2.06	68.20	Peak
2	5650.000	41.76	20.76	62.52	-5.68	68.20	Peak
3	5700.000	52.07	20.92	72.98	-32.22	105.20	Peak
4	5720.000	53.95	20.98	74.93	-35.87	110.80	Peak
5	5725.000	54.49	21.00	75.49	-46.71	122.20	Peak
6	5798.200	82.75	21.24	103.99	N/A	N/A	Peak
7	5850.000	53.02	21.40	74.43	-47.77	122.20	Peak
8	5855.000	51.05	21.42	72.47	-38.33	110.80	Peak
9	5875.000	46.14	21.49	67.63	-37.57	105.20	Peak
10	5925.000	40.33	21.65	61.98	-6.22	68.20	Peak
11	5945.000	41.54	21.71	63.25	-4.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

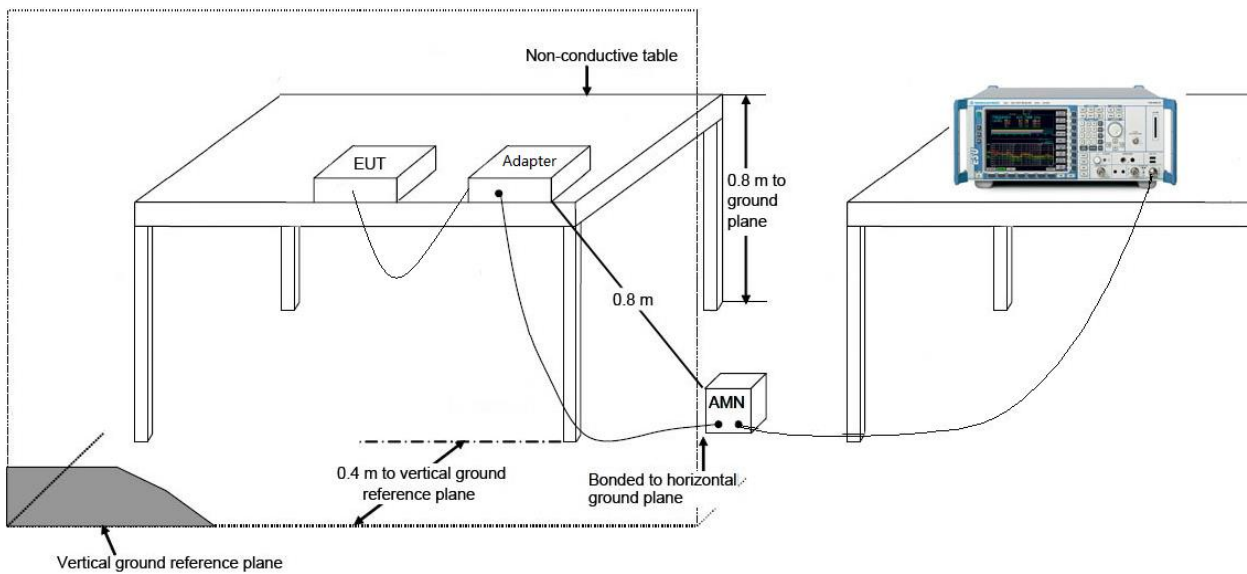

7.10.3. Test Result

EUT	Streaming Media Player	Date of Test	2021-07-19
Factor	CE_ENV216-L1 (Filter ON)_2020	Temp. / Humidity	22.2°C /62.3%
Polarity	Line1	Site / Test Engineer	SR2 / Eric
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

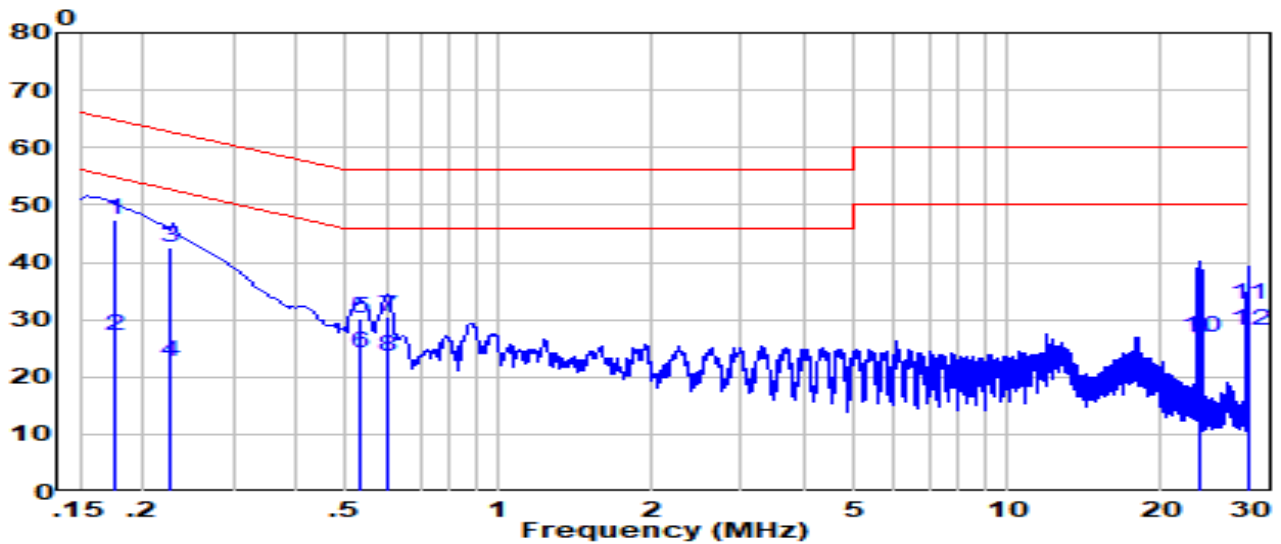


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 0.175	37.69	9.61	47.30	-17.42	64.72	QP
2	0.175	17.59	9.61	27.20	-27.52	54.72	Average
3	0.226	32.90	9.61	42.51	-20.09	62.60	QP
4	0.226	13.10	9.61	22.71	-29.89	52.60	Average
5	0.531	20.62	9.63	30.25	-25.75	56.00	QP
6	0.531	14.52	9.63	24.15	-21.85	46.00	Average
7	0.602	20.82	9.64	30.46	-25.54	56.00	QP
8	0.602	13.92	9.64	23.56	-22.44	46.00	Average
9	23.882	20.79	10.03	30.82	-19.18	50.00	QP
10	23.882	16.49	10.03	26.52	-23.48	50.00	Average
11	29.740	22.41	10.12	32.53	-27.47	60.00	QP
12	29.740	17.91	10.12	28.03	-21.97	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Streaming Media Player	Date of Test	2021-07-19
Factor	CE_ENV216-N (Filter ON)_2020	Temp. / Humidity	22.2°C /62.3%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

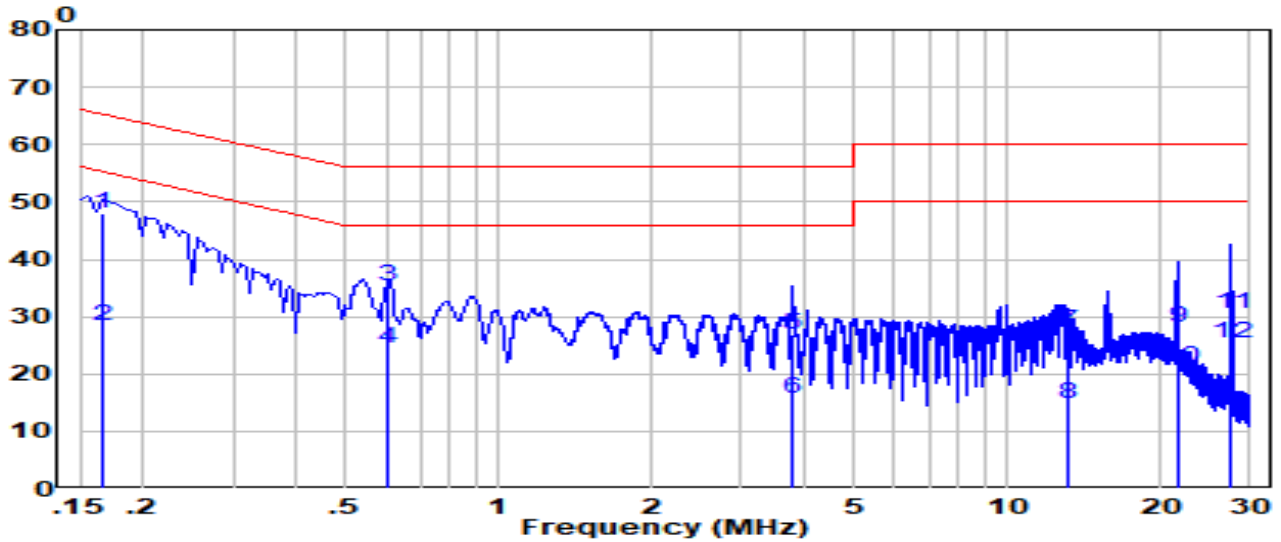

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 0.166	38.42	9.62	48.04	-17.12	65.16	QP
2	0.166	18.82	9.62	28.44	-26.72	55.16	Average
3	0.602	25.64	9.65	35.29	-20.71	56.00	QP
4	0.602	14.94	9.65	24.59	-21.41	46.00	Average
5	3.781	17.22	9.73	26.95	-29.05	56.00	QP
6	3.781	6.02	9.73	15.75	-30.25	46.00	Average
7	13.079	17.47	9.94	27.41	-32.59	60.00	QP
8	13.079	4.77	9.94	14.71	-35.29	50.00	Average
9	21.649	18.09	10.09	28.18	-31.82	60.00	QP
10	21.649	11.09	10.09	21.18	-28.82	50.00	Average
11	27.602	20.36	10.19	30.55	-29.45	60.00	QP
12	27.602	15.16	10.19	25.35	-24.65	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Streaming Media Player** is in compliance with Part 15E of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2106TW0004-Setup Photo" file.

Appendix B - External Photograph

Refer to " 2106TW0004-External Photo" file.

Appendix C - Internal Photograph

Refer to " 2106TW0004-Internal Photo" file.