

September 18, 2008

FCC ID : BKMDGE001  
Model : S4E96400011000  
Applicant : SEIKO EPSON Corporation


**Request for Modular Approval**

The modular transmitter (Model: S4E96400011000) is designed by SEIKO EPSON Corporation.

This modular transmitter can be equipped on any type of device, if the distance between the radiator and person's body keep at least 20cm or more. The modular transmitter complies the module basic requirement (Item 1 to 8) in FCC Part 15 Subpart C Section 15.212 as indicated below:

**[Module basic requirement]**


(1) Have its own RF shielding.: This modular transmitter has its own RF shielding. Please refer to the A1 Photo.

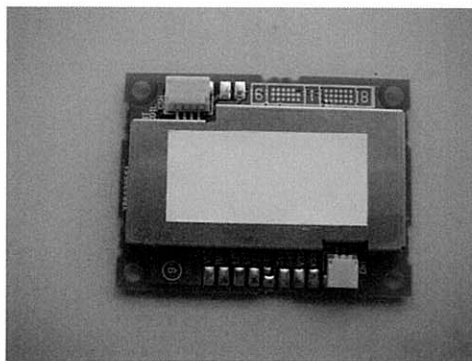

A1 Photo

- (2) The modular transmitter must have buffered modulation/data inputs.: Data input to Modular transmitter is controlled as not generating excessive data speed and abnormal modulation.
- (3) The modular transmitter must have its own power supply regulation.: The module can regulate Power Supply by itself. (See Schematic) The regulator model names are HA17431 manufactured by Renesas Technology Corp. and R1154N manufactured by Ricoh Company, Ltd.
- (4) The modular transmitter must comply with the antenna requirements of Section 15.203 and 15.204(c):. The antenna is connected to the module with unique connector and install inside of the end product. So, it is impossible for end users to disconnect it. Accordingly, it is complied.

- (5) The modular transmitter must be tested in a stand alone.: The modular transmitter has been performed the testing as a stand alone and then confirmed the compliance. Please refer to the Test report. (No. 28KE0185-HO-01)
- (6) The modular transmitter must be labeled with its own FCC ID, and, if the FCC ID is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module.: This modular transmitter is complied with this requirement. Please refer to the file of Label drawing and location.
- (7) The modular transmitter must comply with any specific rule or operating requirements applicable to the transmitter and the manufacturer must provide adequate instructions along with the module to explain any such requirements.: The necessary explanation to be complied with this requirement is contained in the manual.
- (8) The modular transmitter must comply with any applicable RF exposure requirements.: The modular transmitter complies with FCC radiation exposure requirement specified in the FCC Rules 15.247(i). Please refer to the RF exposure statement.



Norio Hama  
Project manager/Executive engineer  
IC Sensor ASSP Business Promotion Department