

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 12, 2022
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Hiromasa Sato
Mode	Tx 11a

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	Conducted Power							e.i.r.p.		
						26 dB EBW (B for FCC)	99 % OBW (B for ISED)	Result		Limit	Margin	Result		Limit	Margin
						[MHz]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5180	-0.39	3.46	9.89	0.00	5.94	-	16.818	12.96	19.77	23.97	11.01	18.90	77.62	29.97	11.07
5200	0.31	3.46	9.89	0.00	5.94	-	16.835	13.66	23.23	23.97	10.31	19.60	91.20	29.97	10.37
5240	0.95	3.46	9.89	0.00	5.94	-	16.853	14.30	26.92	23.97	9.67	20.24	105.68	29.97	9.73
5260	-0.28	3.46	9.89	0.00	5.94	19.775	16.824	13.07	20.28	23.96	10.89	19.01	79.62	29.97	10.96
5300	0.19	3.46	9.89	0.00	5.94	19.825	16.828	13.54	22.59	23.97	10.43	19.48	88.72	29.97	10.49
5320	0.43	3.47	9.89	0.00	5.94	19.852	16.841	13.79	23.93	23.97	10.18	19.73	93.97	29.97	10.24
5500	-0.38	3.49	9.89	0.00	6.29	19.649	16.818	13.00	19.95	23.64	10.64	19.29	84.92	29.97	10.68
5580	0.73	3.49	9.89	0.00	6.29	19.680	16.833	14.11	25.76	23.65	9.54	20.40	109.65	29.97	9.57
5700	0.77	3.51	9.89	0.00	6.29	19.721	16.833	14.17	26.12	23.65	9.48	20.46	111.17	29.97	9.51
5745	0.90	3.51	9.90	0.00	7.12	-	16.810	14.31	26.98	28.88	14.57	21.43	139.00	36.00	14.57
5785	0.51	3.51	9.90	0.00	7.12	-	16.820	13.92	24.66	28.88	14.96	21.04	127.06	36.00	14.96
5825	0.77	3.52	9.90	0.00	7.12	-	16.827	14.19	26.24	28.88	14.69	21.31	135.21	36.00	14.69

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for ISED)

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 12, 2022
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Hiomasa SATO
Mode	Tx 11n-20

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99 % OBW (B for ISSED) [MHz]	Conducted Power			e.i.r.p.				
								Result	Limit	Margin	Result	Limit	Margin		
								[dBm]	[mW]	[dB]	[dBm]	[mW]	[dB]		
5180	-1.11	3.46	9.89	0.00	5.94	-	17.860	12.24	16.75	23.97	11.73	18.18	65.77	29.97	11.79
5200	-1.15	3.46	9.89	0.00	5.94	-	17.830	12.20	16.60	23.97	11.77	18.14	65.16	29.97	11.83
5240	-0.33	3.46	9.89	0.00	5.94	-	17.804	13.02	20.04	23.97	10.95	18.96	78.70	29.97	11.01
5260	-0.84	3.46	9.89	0.00	5.94	20.913	17.815	12.51	17.82	23.97	11.46	18.45	69.98	29.97	11.52
5300	-0.93	3.46	9.89	0.00	5.94	20.901	17.867	12.42	17.46	23.97	11.55	18.36	68.55	29.97	11.61
5320	-0.71	3.47	9.89	0.00	5.94	20.804	17.867	12.65	18.41	23.97	11.32	18.59	72.28	29.97	11.38
5500	-1.69	3.49	9.89	0.00	6.29	20.540	17.804	11.69	14.76	23.68	11.99	17.98	62.81	29.97	11.99
5580	-1.27	3.49	9.89	0.00	6.29	20.539	17.836	12.11	16.26	23.68	11.57	18.40	69.18	29.97	11.57
5700	-0.37	3.51	9.89	0.00	6.29	20.757	17.817	13.03	20.09	23.68	10.65	19.32	85.51	29.97	10.65
5745	-1.22	3.51	9.90	0.00	7.12	-	17.822	12.19	16.56	28.88	16.69	19.31	85.31	36.00	16.69
5785	-0.65	3.51	9.90	0.00	7.12	-	17.867	12.76	18.88	28.88	16.12	19.88	97.27	36.00	16.12
5825	-1.05	3.52	9.90	0.00	7.12	-	17.845	12.37	17.26	28.88	16.51	19.49	88.92	36.00	16.51

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for ISSED)

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 12, 2022
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Hiomasa Sato
Mode	Tx 11ac-20

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	Conducted Power							e.i.r.p.		
						26 dB EBW (B for FCC)	99 % OBW (B for ISSED)	Result		Limit	Margin	Result		Limit	Margin
						[MHz]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5180	-0.65	3.46	9.89	0.00	5.94	-	17.837	12.70	18.62	23.97	11.27	18.64	73.11	29.97	11.33
5200	-0.26	3.46	9.89	0.00	5.94	-	17.840	13.09	20.37	23.97	10.88	19.03	79.98	29.97	10.94
5240	-0.52	3.46	9.89	0.00	5.94	-	17.858	12.83	19.19	23.97	11.14	18.77	75.34	29.97	11.20
5260	-0.53	3.46	9.89	0.00	5.94	20.947	17.834	12.82	19.14	23.97	11.15	18.76	75.16	29.97	11.21
5300	-0.37	3.46	9.89	0.00	5.94	20.983	17.840	12.98	19.86	23.97	10.99	18.92	77.98	29.97	11.05
5320	-0.46	3.47	9.89	0.00	5.94	20.946	17.839	12.90	19.50	23.97	11.07	18.84	76.56	29.97	11.13
5500	-1.05	3.49	9.89	0.00	6.29	20.830	17.826	12.33	17.10	23.68	11.35	18.62	72.78	29.97	11.35
5580	-0.51	3.49	9.89	0.00	6.29	20.828	17.830	12.87	19.36	23.68	10.81	19.16	82.41	29.97	10.81
5700	-0.55	3.51	9.89	0.00	6.29	20.848	17.827	12.85	19.28	23.68	10.83	19.14	82.04	29.97	10.83
5745	-1.44	3.51	9.90	0.00	7.12	-	17.821	11.97	15.74	28.88	16.91	19.09	81.10	36.00	16.91
5785	-1.10	3.51	9.90	0.00	7.12	-	17.821	12.31	17.02	28.88	16.57	19.43	87.70	36.00	16.57
5825	-1.56	3.52	9.90	0.00	7.12	-	17.819	11.86	15.35	28.88	17.02	18.98	79.07	36.00	17.02

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for ISSED)

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 12, 2022
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Hiromasa Sato
Mode	Tx 11n-40

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99 % OBW (B for ISED) [MHz]	Conducted Power			e.i.r.p.				
								Result	Limit	Margin	Result	Limit	Margin		
								[dBm]	[mW]	[dB]	[dBm]	[mW]	[dB]		
5190	-0.98	3.46	9.89	0.00	5.94	-	36.176	12.37	17.26	23.97	11.60	18.31	67.76	29.97	11.66
5230	-0.42	3.46	9.89	0.00	5.94	-	36.257	12.93	19.63	23.97	11.04	18.87	77.09	29.97	11.10
5270	-1.20	3.47	9.89	0.00	5.94	40.414	36.279	12.16	16.44	23.97	11.81	18.10	64.57	29.97	11.87
5310	-0.39	3.47	9.89	0.00	5.94	40.511	36.283	12.97	19.82	23.97	11.00	18.91	77.80	29.97	11.06
5510	-1.76	3.49	9.89	0.00	6.29	40.287	36.145	11.62	14.52	23.68	12.06	17.91	61.80	29.97	12.06
5550	-1.06	3.49	9.89	0.00	6.29	39.586	36.217	12.32	17.06	23.68	11.36	18.61	72.61	29.97	11.36
5670	-0.91	3.50	9.89	0.00	6.29	39.789	36.209	12.48	17.70	23.68	11.20	18.77	75.34	29.97	11.20
5755	-0.38	3.51	9.90	0.00	7.12	-	36.282	13.03	20.09	28.88	15.85	20.15	103.51	36.00	15.85
5795	-0.57	3.51	9.90	0.00	7.12	-	36.249	12.84	19.23	28.88	16.04	19.96	99.08	36.00	16.04

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for ISED)

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 12, 2022
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Hiomasa Sato
Mode	Tx 11ac-40

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99 % OBW (B for ISED) [MHz]	Conducted Power			e.i.r.p.				
								Result	Limit	Margin	Result	Limit	Margin		
								[dBm]	[mW]	[dB]	[dBm]	[mW]	[dB]		
5190	-1.20	3.46	9.89	0.00	5.94	-	36.322	12.15	16.41	23.97	11.82	18.09	64.42	29.97	11.88
5230	-1.40	3.46	9.89	0.00	5.94	-	36.371	11.95	15.67	23.97	12.02	17.89	61.52	29.97	12.08
5270	-0.70	3.47	9.89	0.00	5.94	40.883	36.340	12.66	18.45	23.97	11.31	18.60	72.44	29.97	11.37
5310	-1.01	3.47	9.89	0.00	5.94	40.855	36.331	12.35	17.18	23.97	11.62	18.29	67.45	29.97	11.68
5510	-1.66	3.49	9.89	0.00	6.29	40.919	36.307	11.72	14.86	23.68	11.96	18.01	63.24	29.97	11.96
5550	-0.92	3.49	9.89	0.00	6.29	40.934	36.318	12.46	17.62	23.68	11.22	18.75	74.99	29.97	11.22
5670	-0.89	3.50	9.89	0.00	6.29	40.758	36.300	12.50	17.78	23.68	11.18	18.79	75.68	29.97	11.18
5755	-0.19	3.51	9.90	0.00	7.12	-	36.308	13.22	20.99	28.88	15.66	20.34	108.14	36.00	15.66
5795	-1.01	3.51	9.90	0.00	7.12	-	36.305	12.40	17.38	28.88	16.48	19.52	89.54	36.00	16.48

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for ISED)

Maximum Conducted Output Power

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	April 12, 2022
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-80

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	Conducted Power							e.i.r.p.		
						26 dB EBW (B for FCC)	99 % OBW (B for ISSED)	Result		Limit	Margin	Result		Limit	Margin
						[MHz]	[MHz]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]
5210	-1.71	3.46	9.89	0.00	5.94	-	75.758	11.64	14.59	23.97	12.33	17.58	57.28	29.97	12.39
5290	-1.19	3.47	9.89	0.00	5.94	80.876	75.730	12.17	16.48	23.97	11.80	18.11	64.71	29.97	11.86
5530	-0.98	3.49	9.89	0.00	6.29	80.892	75.800	12.40	17.38	23.68	11.28	18.69	73.96	29.97	11.28
5775	-1.42	3.51	9.90	0.00	7.12	-	75.792	11.99	15.81	28.88	16.89	19.11	81.47	36.00	16.89

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1 W

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for ISSED)

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date April 12, 2022
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx 11a

5180 MHz

Mode	Rate Mbps	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11a	6	-1.26	0.00	-1.26	-
	9	-1.10	0.00	-1.10	-
	12	-0.88	0.00	-0.88	-
	18	-0.74	0.00	-0.74	-
	24	-0.53	0.00	-0.53	-
	36	-0.39	0.00	-0.39	*
	48	-0.64	0.00	-0.64	-
	54	-0.90	0.00	-0.90	-

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date April 12, 2022
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx 11n-20

5180 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n-20	0	-1.42	0.00	-1.42	-
	1	-1.35	0.00	-1.35	-
	2	-1.32	0.00	-1.32	-
	3	-1.63	0.00	-1.63	-
	4	-1.11	0.00	-1.11	*
	5	-1.29	0.00	-1.29	-
	6	-1.31	0.00	-1.31	-
	7	-1.14	0.00	-1.14	-

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date April 12, 2022
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx 11ac-20

5180 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11ac-20	0	-0.78	0.00	-0.78	-
	1	-0.68	0.00	-0.68	-
	2	-0.94	0.00	-0.94	-
	3	-0.89	0.00	-0.89	-
	4	-0.91	0.00	-0.91	-
	5	-1.17	0.00	-1.17	-
	6	-0.65	0.00	-0.65	*
	7	-1.10	0.00	-1.10	-
	8	-0.98	0.00	-0.98	-

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date April 12, 2022
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx 11n-40

5190 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11n-40	0	-1.36	0.00	-1.36	-
	1	-0.98	0.00	-0.98	*
	2	-1.41	0.00	-1.41	-
	3	-1.28	0.00	-1.28	-
	4	-1.41	0.00	-1.41	-
	5	-1.08	0.00	-1.08	-
	6	-1.06	0.00	-1.06	-
	7	-1.12	0.00	-1.12	-

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date April 12, 2022
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx 11ac-40

5190 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11ac-40	0	-1.57	0.00	-1.57	-
	1	-1.21	0.00	-1.21	-
	2	-1.35	0.00	-1.35	-
	3	-1.30	0.00	-1.30	-
	4	-1.20	0.00	-1.20	*
	5	-1.64	0.00	-1.64	-
	6	-1.57	0.00	-1.57	-
	7	-1.60	0.00	-1.60	-
	8	-1.63	0.00	-1.63	-
	9	-1.53	0.00	-1.53	-

* Worst rate

Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$

Maximum Conducted Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date April 12, 2022
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx 11ac-80

5210 MHz

Mode	MCS Number	Reading (timed average) [dBm]	Duty factor [dB]	Burst power [dBm]	Remarks
11ac-80	0	-2.00	0.00	-2.00	-
	1	-1.87	0.00	-1.87	-
	2	-2.02	0.00	-2.02	-
	3	-1.76	0.00	-1.76	-
	4	-2.06	0.00	-2.06	-
	5	-1.94	0.00	-1.94	-
	6	-1.99	0.00	-1.99	-
	7	-1.99	0.00	-1.99	-
	8	-2.10	0.00	-2.10	-
	9	-1.71	0.00	-1.71	*

* Worst rate


Sample Calculation:

$$\text{Burst power} = \text{Reading (timed average)} + \text{Duty factor}$$


Burst rate confirmation

Test place Shonan EMC Lab. No.5 Shielded Room
 Date April 12, 2022
 Temperature / Humidity 24 deg. C / 49 % RH
 Engineer Hiromasa Sato
 Mode Tx


11a 36 Mbps

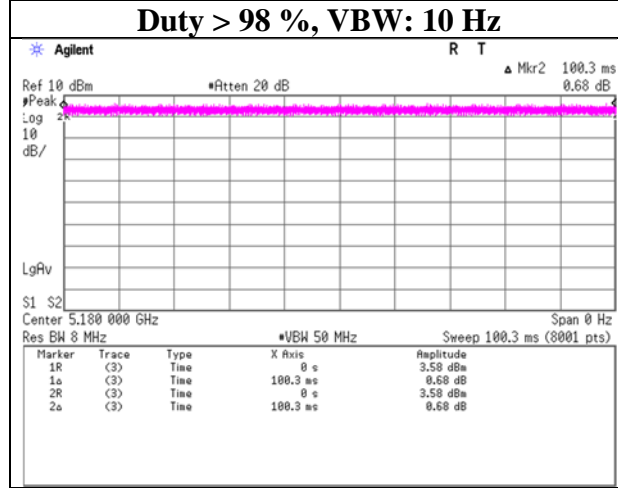

11n-20 MCS 4

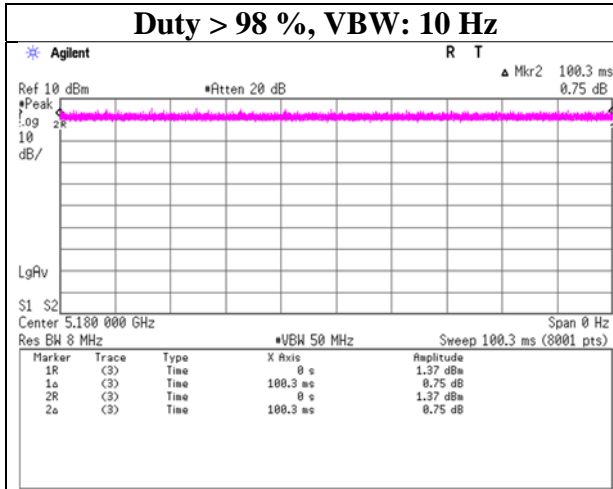

11ac-20 MCS 6

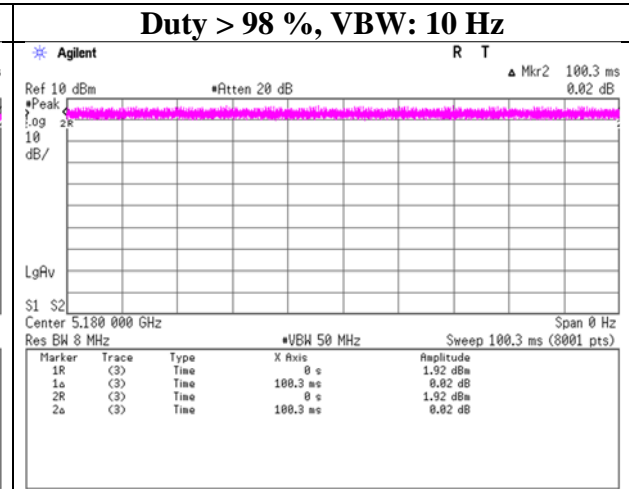


Burst rate confirmation

Test place Shonan EMC Lab. No.5 Shielded Room
 Date April 12, 2022
 Temperature / Humidity 24 deg. C / 49 % RH
 Engineer Hiromasa Sato
 Mode Tx


11n-40 MCS 1

Duty > 98 %, VBW: 10 Hz

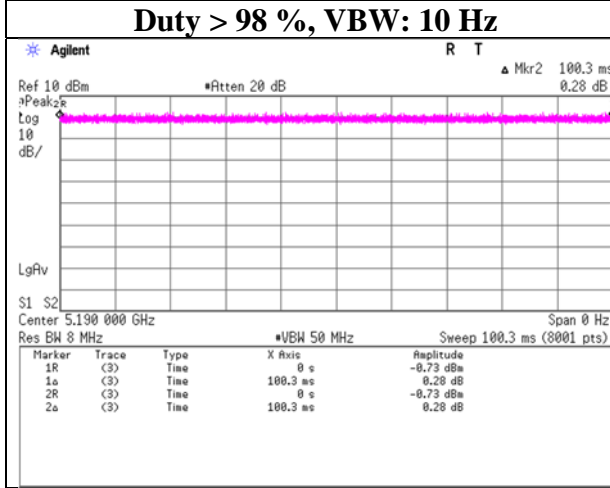


11ac-40 MCS 4

Duty > 98 %, VBW: 10 Hz

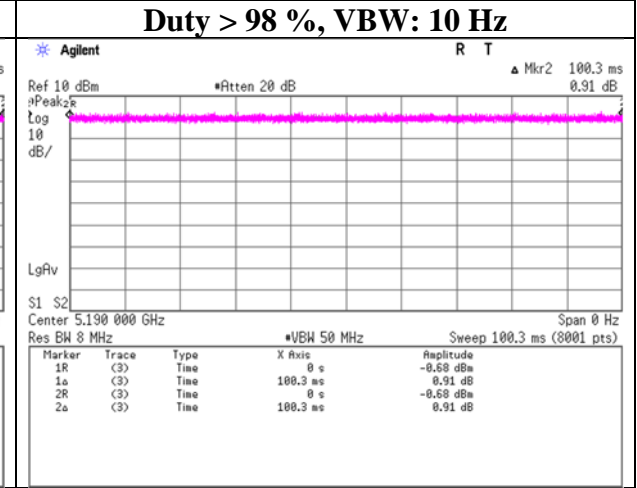

11ac-80 MCS 9

Duty > 98 %, VBW: 10 Hz

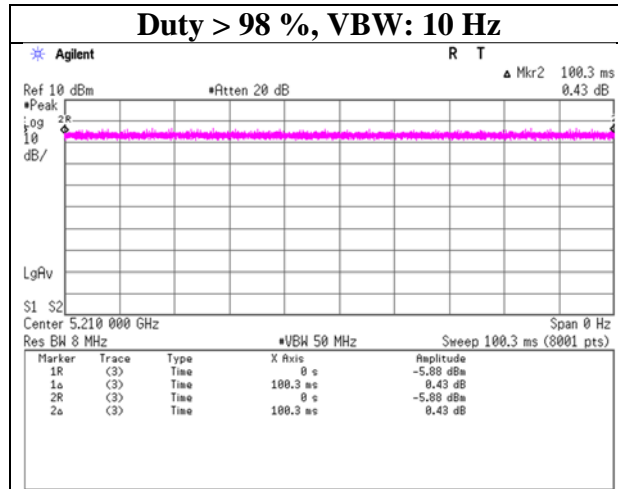

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiomasa Sato
Mode	Tx 11a

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-10.60	3.46	9.89	0.00	5.94	0.00	2.75	11.00	8.25	8.69	17.00	8.31
5200	-11.07	3.46	9.89	0.00	5.94	0.00	2.28	11.00	8.72	8.22	17.00	8.78
5240	-9.30	3.46	9.89	0.00	5.94	0.00	4.05	11.00	6.95	9.99	17.00	7.01
5260	-10.21	3.46	9.89	0.00	5.94	0.00	3.14	11.00	7.86	9.08	17.00	7.92
5300	-9.54	3.47	9.89	0.00	5.94	0.00	3.82	11.00	7.18	9.76	17.00	7.24
5320	-10.06	3.47	9.89	0.00	5.94	0.00	3.30	11.00	7.70	9.24	17.00	7.76
5500	-10.24	3.49	9.89	0.00	6.29	0.00	3.14	10.71	7.57	9.43	17.00	7.57
5580	-9.75	3.49	9.89	0.00	6.29	0.00	3.63	10.71	7.08	9.92	17.00	7.08
5700	-9.32	3.51	9.89	0.00	6.29	0.00	4.08	10.71	6.63	10.37	17.00	6.63
5745	-19.45	3.51	9.90	0.00	7.12	6.99	0.95	28.88	27.93	8.07	36.00	27.93
5785	-18.80	3.51	9.90	0.00	7.12	6.99	1.60	28.88	27.28	8.72	36.00	27.28
5825	-18.28	3.52	9.90	0.00	7.12	6.99	2.13	28.88	26.75	9.25	36.00	26.75

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for ISED)

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	May 20, 2022	May 24, 2022
Temperature / Humidity	20 deg. C / 40 % RH	25 deg. C / 46 % RH
Engineer	Hiromasa Sato	Shiro Kobayashi
Mode	Tx 11n-20	

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-12.70	3.46	9.89	0.00	5.94	0.00	0.65	11.00	10.35	6.59	17.00	10.41
5200	-13.08	3.46	9.89	0.00	5.94	0.00	0.27	11.00	10.73	6.21	17.00	10.79
5240	-11.76	3.46	9.89	0.00	5.94	0.00	1.59	11.00	9.41	7.53	17.00	9.47
5260	-12.45	3.46	9.89	0.00	5.94	0.00	0.90	11.00	10.10	6.84	17.00	10.16
5300	-12.01	3.47	9.89	0.00	5.94	0.00	1.35	11.00	9.65	7.29	17.00	9.71
5320	-12.36	3.47	9.89	0.00	5.94	0.00	1.00	11.00	10.00	6.94	17.00	10.06
5500	-13.35	3.49	9.89	0.00	6.29	0.00	0.03	10.71	10.68	6.32	17.00	10.68
5580	-11.88	3.49	9.89	0.00	6.29	0.00	1.50	10.71	9.21	7.79	17.00	9.21
5700	-11.62	3.51	9.89	0.00	6.29	0.00	1.78	10.71	8.93	8.07	17.00	8.93
5745	-22.50	3.51	10.22	0.00	7.12	6.99	-1.78	28.88	30.66	5.34	36.00	30.66
5785	-21.95	3.51	10.22	0.00	7.12	6.99	-1.23	28.88	30.11	5.89	36.00	30.11
5825	-22.08	3.52	10.22	0.00	7.12	6.99	-1.35	28.88	30.23	5.77	36.00	30.23

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for ISED)

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-20

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-10.44	3.46	9.89	0.00	5.94	0.00	2.91	11.00	8.09	8.85	17.00	8.15
5200	-10.25	3.46	9.89	0.00	5.94	0.00	3.10	11.00	7.90	9.04	17.00	7.96
5240	-9.82	3.46	9.89	0.00	5.94	0.00	3.53	11.00	7.47	9.47	17.00	7.53
5260	-10.86	3.46	9.89	0.00	5.94	0.00	2.49	11.00	8.51	8.43	17.00	8.57
5300	-10.34	3.47	9.89	0.00	5.94	0.00	3.02	11.00	7.98	8.96	17.00	8.04
5320	-10.80	3.47	9.89	0.00	5.94	0.00	2.56	11.00	8.44	8.50	17.00	8.50
5500	-11.76	3.49	9.89	0.00	6.29	0.00	1.62	10.71	9.09	7.91	17.00	9.09
5580	-11.36	3.49	9.89	0.00	6.29	0.00	2.02	10.71	8.69	8.31	17.00	8.69
5700	-10.49	3.51	9.89	0.00	6.29	0.00	2.91	10.71	7.80	9.20	17.00	7.80
5745	-21.57	3.51	9.90	0.00	7.12	6.99	-1.17	28.88	30.05	5.95	36.00	30.05
5785	-20.30	3.51	9.90	0.00	7.12	6.99	0.10	28.88	28.78	7.22	36.00	28.78
5825	-20.08	3.52	9.90	0.00	7.12	6.99	0.33	28.88	28.55	7.45	36.00	28.55

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for ISED)

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	May 20, 2022	May 24, 2022
Temperature / Humidity	20 deg. C / 40 % RH	25 deg. C / 46 % RH
Engineer	Hiomasa Sato	Shiro Kobayashi
Mode	Tx 11n-40	

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-15.61	3.46	9.89	0.00	5.94	0.00	-2.26	11.00	13.26	3.68	17.00	13.32
5230	-14.51	3.46	9.89	0.00	5.94	0.00	-1.16	11.00	12.16	4.78	17.00	12.22
5270	-15.98	3.47	9.89	0.00	5.94	0.00	-2.62	11.00	13.62	3.32	17.00	13.68
5310	-14.41	3.47	9.89	0.00	5.94	0.00	-1.05	11.00	12.05	4.89	17.00	12.11
5510	-15.47	3.49	9.89	0.00	6.29	0.00	-2.09	10.71	12.80	4.20	17.00	12.80
5550	-13.69	3.49	9.89	0.00	6.29	0.00	-0.31	10.71	11.02	5.98	17.00	11.02
5670	-14.17	3.50	9.89	0.00	6.29	0.00	-0.78	10.71	11.49	5.51	17.00	11.49
5755	-24.84	3.51	10.22	0.00	7.12	6.99	-4.12	28.88	33.00	3.00	36.00	33.00
5795	-25.18	3.52	10.22	0.00	7.12	6.99	-4.45	28.88	33.33	2.67	36.00	33.33

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for ISED)

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiomasa Sato
Mode	Tx 11ac-40

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-14.77	3.46	9.89	0.00	5.94	0.00	-1.42	11.00	12.42	4.52	17.00	12.48
5230	-13.98	3.46	9.89	0.00	5.94	0.00	-0.63	11.00	11.63	5.31	17.00	11.69
5270	-14.30	3.47	9.89	0.00	5.94	0.00	-0.94	11.00	11.94	5.00	17.00	12.00
5310	-14.12	3.47	9.89	0.00	5.94	0.00	-0.76	11.00	11.76	5.18	17.00	11.82
5510	-14.72	3.49	9.89	0.00	6.29	0.00	-1.34	10.71	12.05	4.95	17.00	12.05
5550	-14.42	3.49	9.89	0.00	6.29	0.00	-1.04	10.71	11.75	5.25	17.00	11.75
5670	-14.43	3.50	9.89	0.00	6.29	0.00	-1.04	10.71	11.75	5.25	17.00	11.75
5755	-23.66	3.51	9.90	0.00	7.12	6.99	-3.26	28.88	32.14	3.86	36.00	32.14
5795	-23.77	3.51	9.90	0.00	7.12	6.99	-3.37	28.88	32.25	3.75	36.00	32.25

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for ISED)

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-80

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5210	-18.55	3.46	9.89	0.00	5.94	0.00	-5.20	11.00	16.20	0.74	17.00	16.26
5290	-18.74	3.47	9.89	0.00	5.94	0.00	-5.38	11.00	16.38	0.56	17.00	16.44
5530	-16.35	3.49	9.89	0.00	6.29	0.00	-2.97	10.71	13.68	3.32	17.00	13.68
5775	-27.73	3.51	9.90	0.00	7.12	6.99	-7.33	28.88	36.21	-0.21	36.00	36.21

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction


PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for ISED)

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 20, 2022
Temperature / Humidity 20 deg. C / 40 % RH
Engineer Hiromasa Sato
Mode Tx 11a


11a

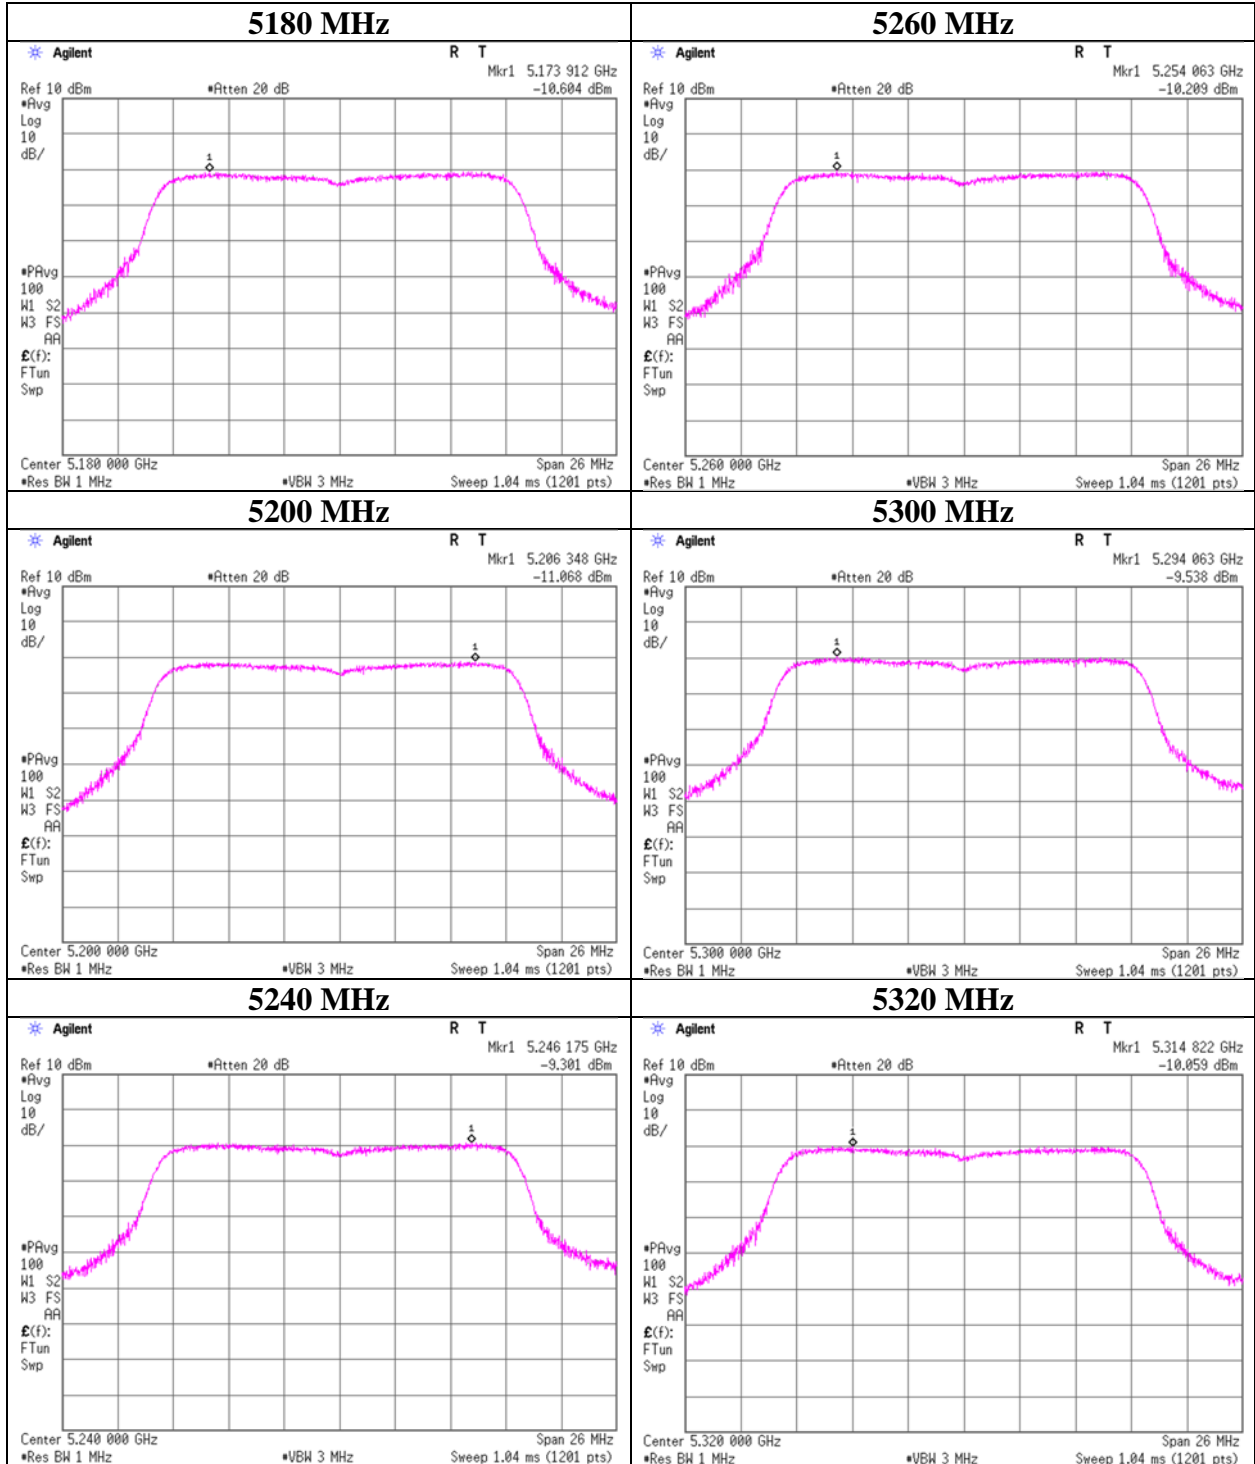

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11a


11a

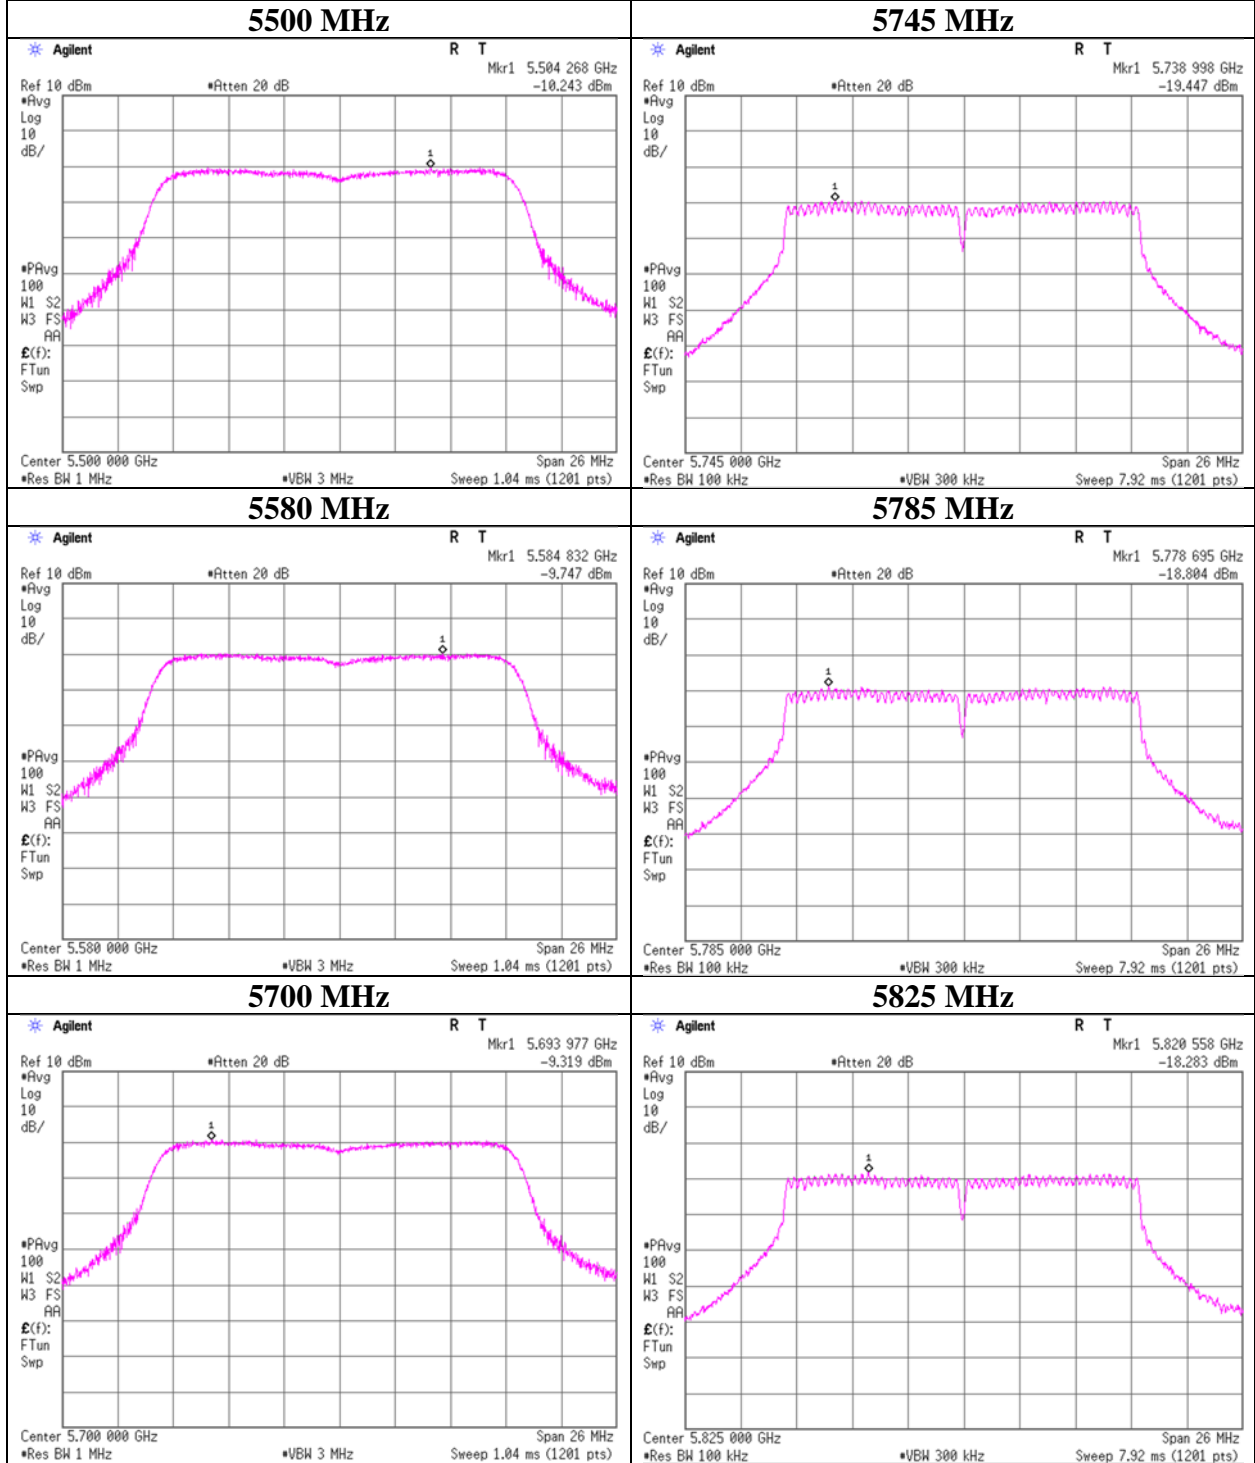

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11n-20


11n-20

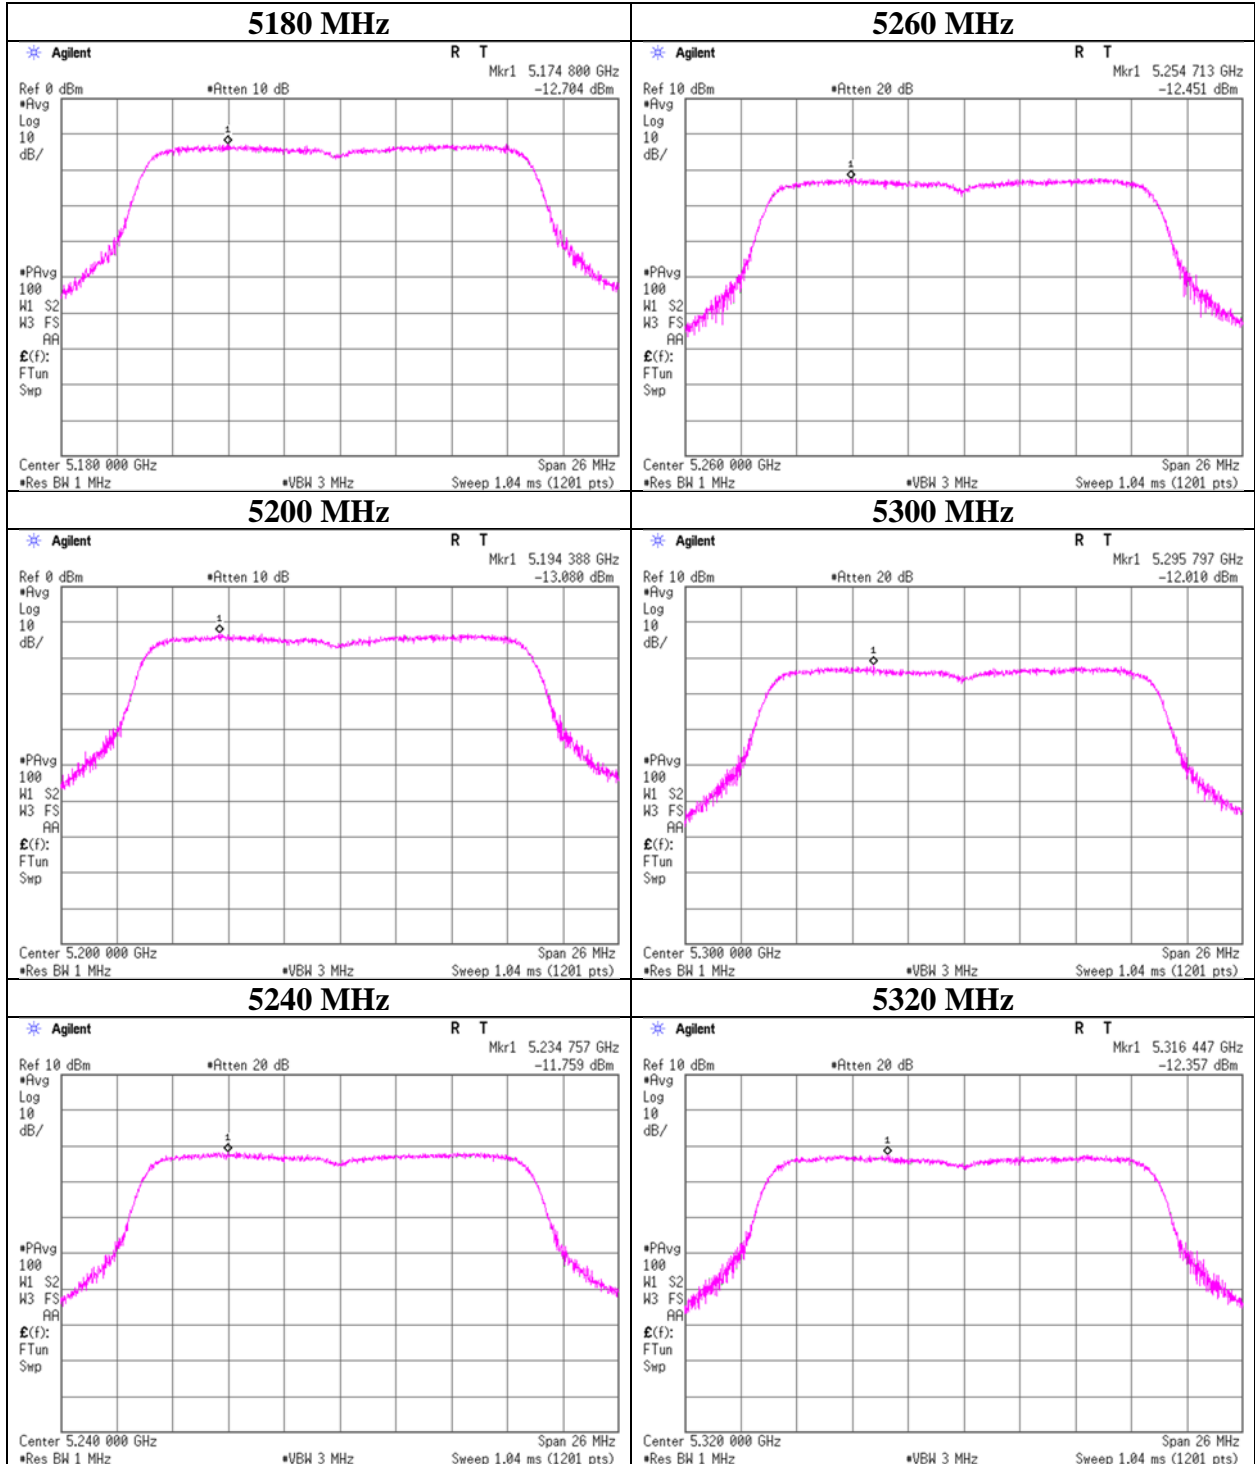

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	May 20, 2022	May 24, 2022
Temperature / Humidity	20 deg. C / 40 % RH	25 deg. C / 46 % RH
Engineer	Hiromasa Sato	Shiro Kobayashi
Mode	Tx 11n-20	


11n-20

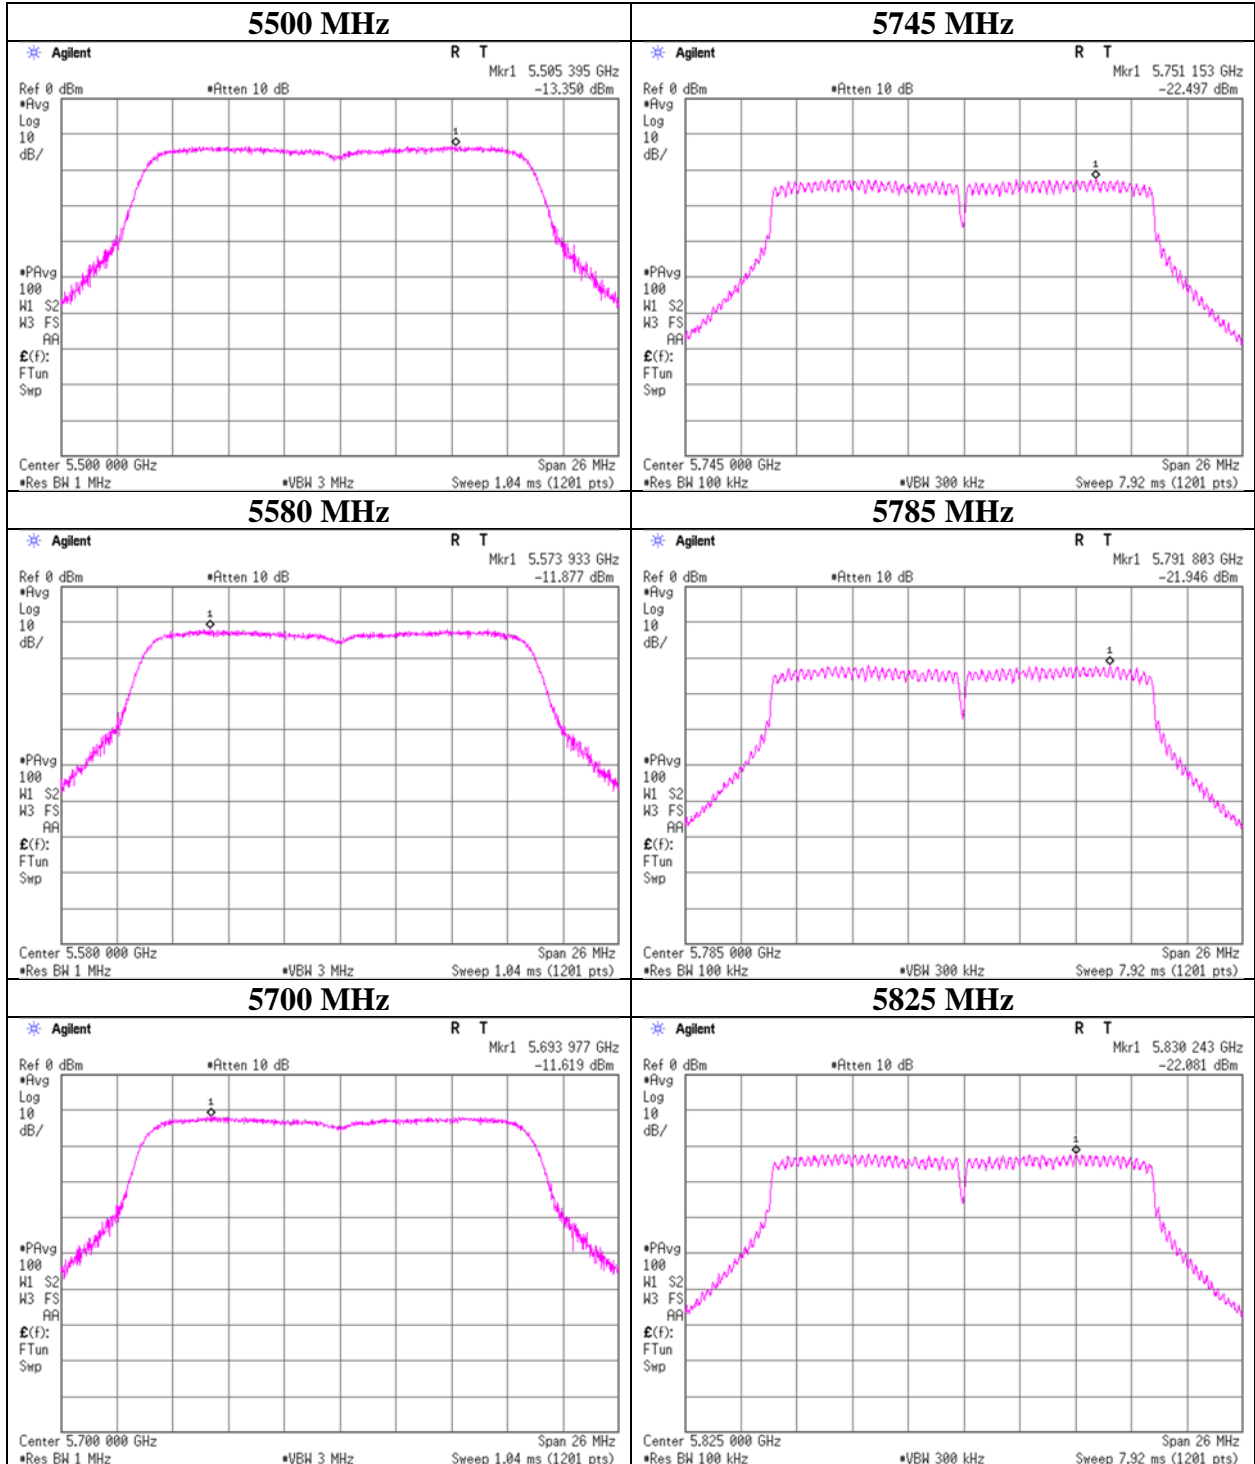

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-20


11ac-20

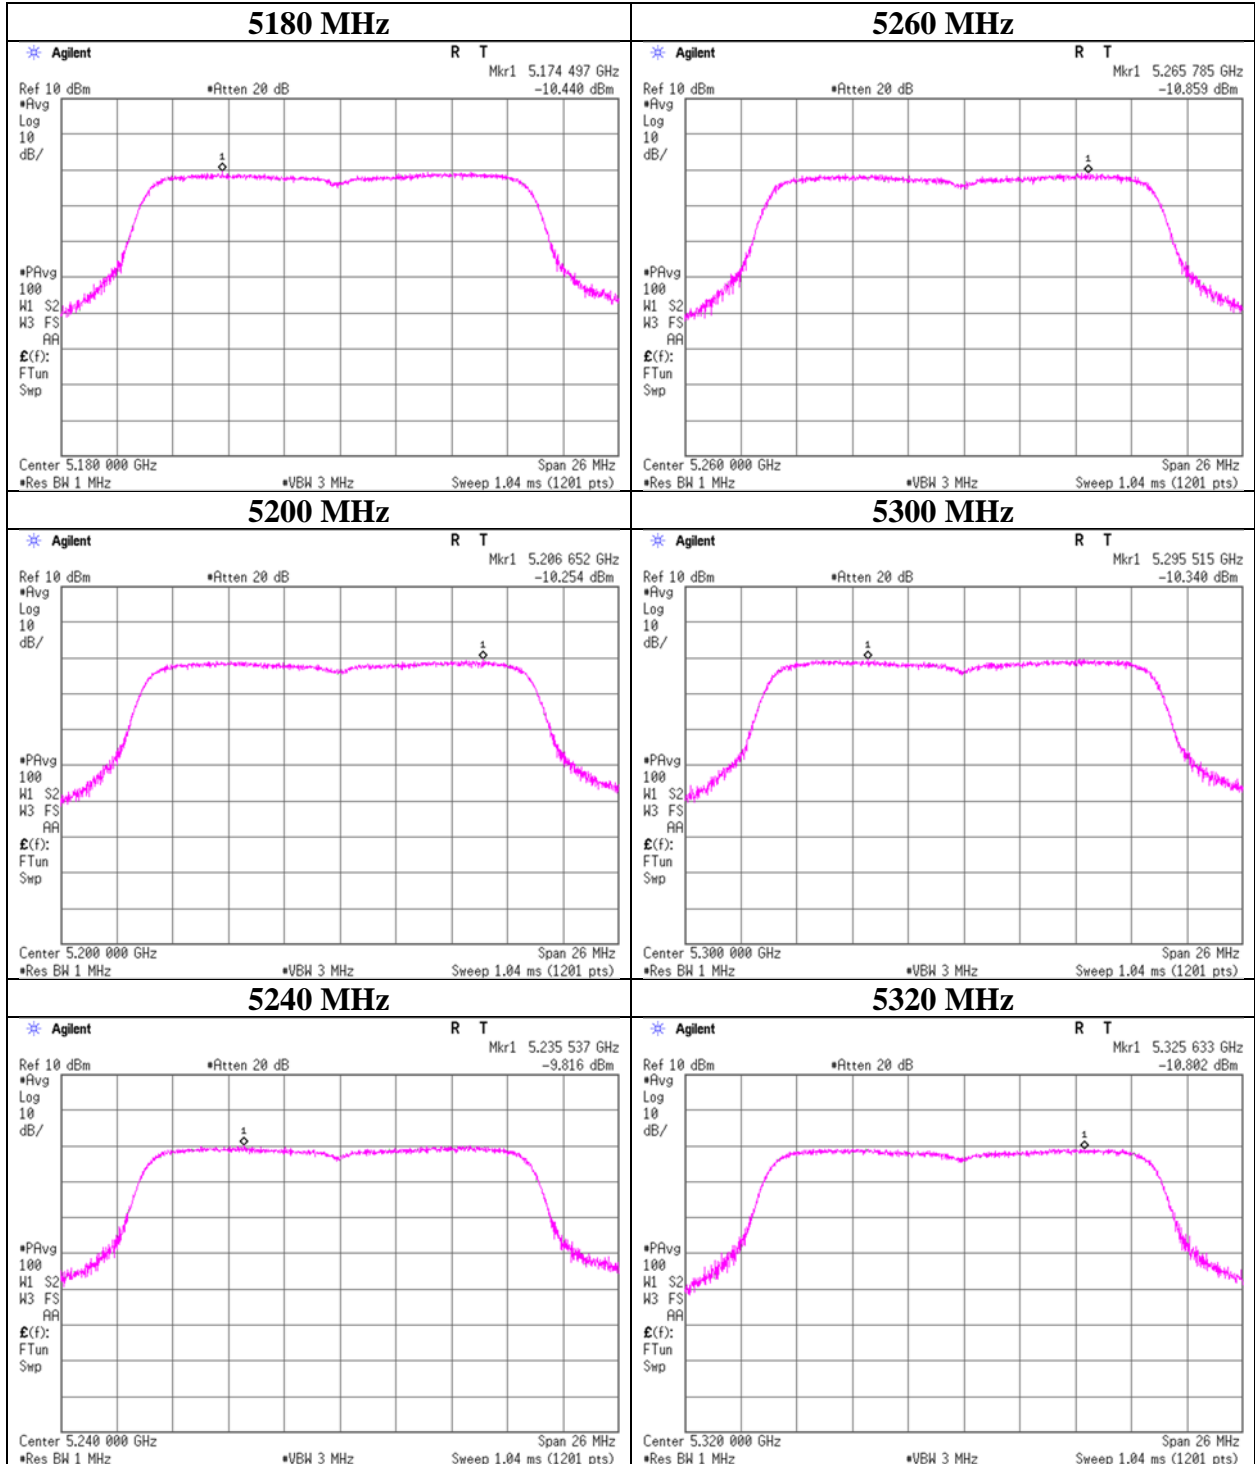

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-20


11ac-20

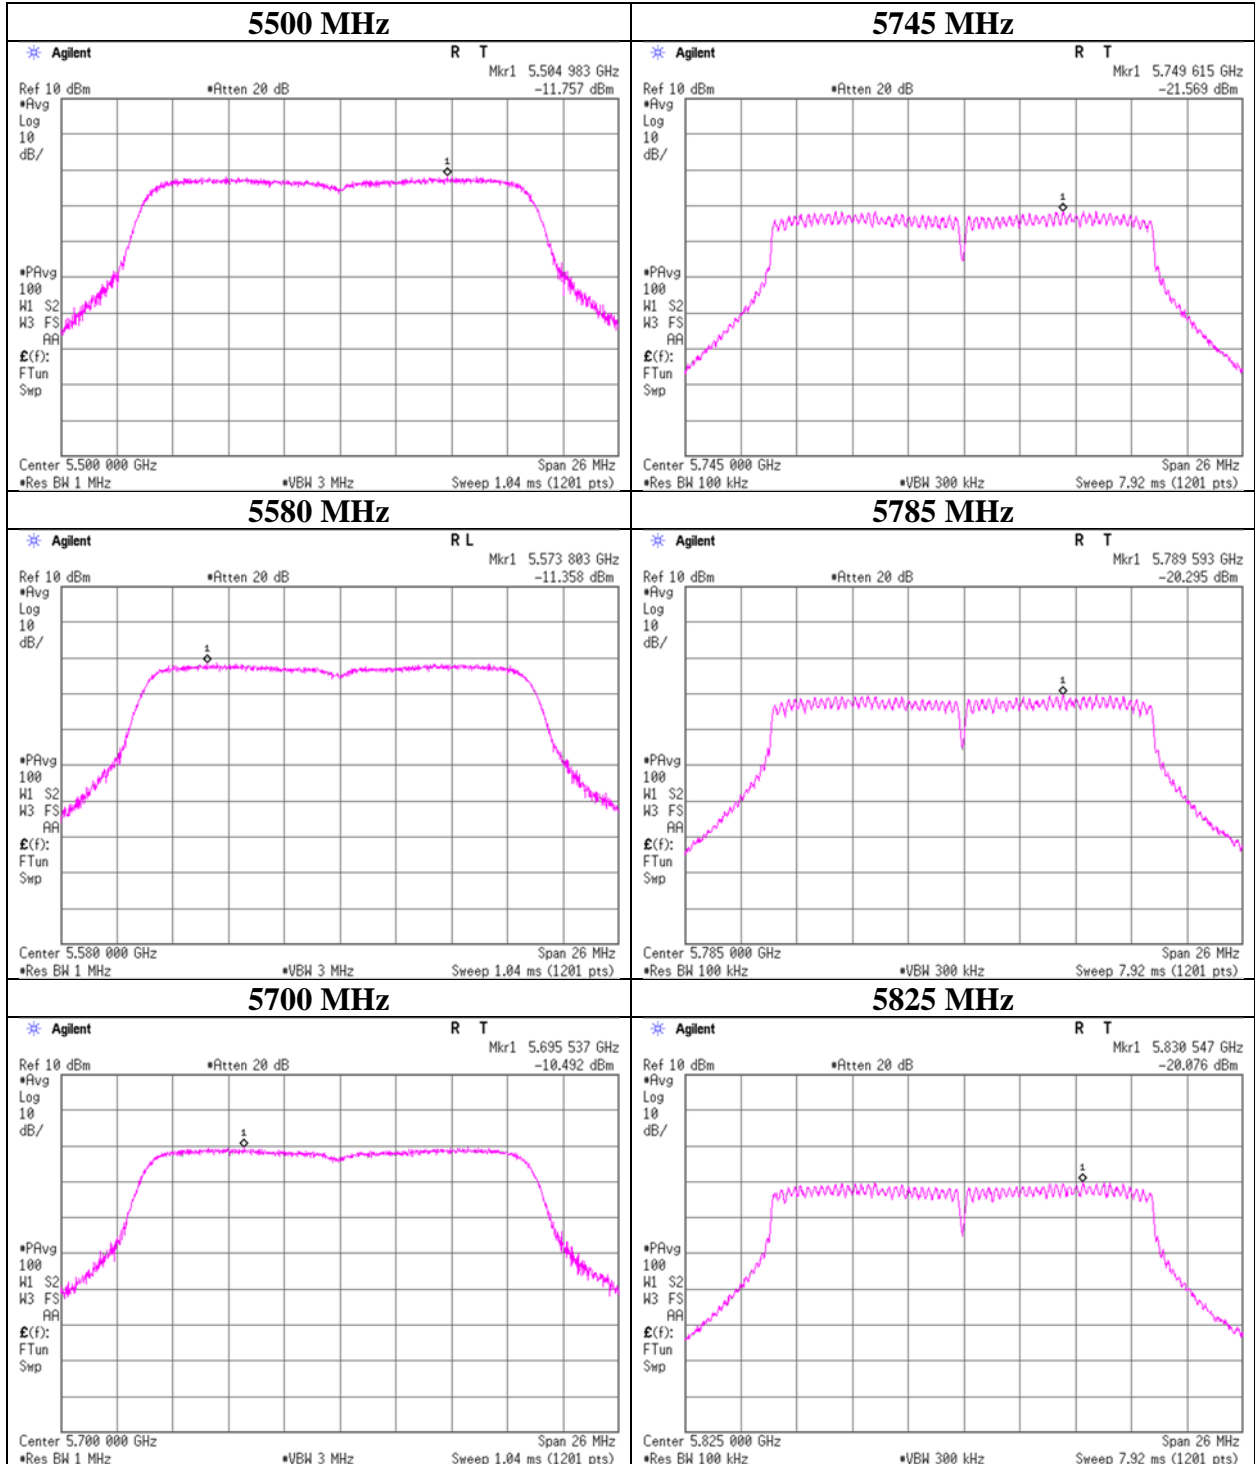

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11n-40


11n-40

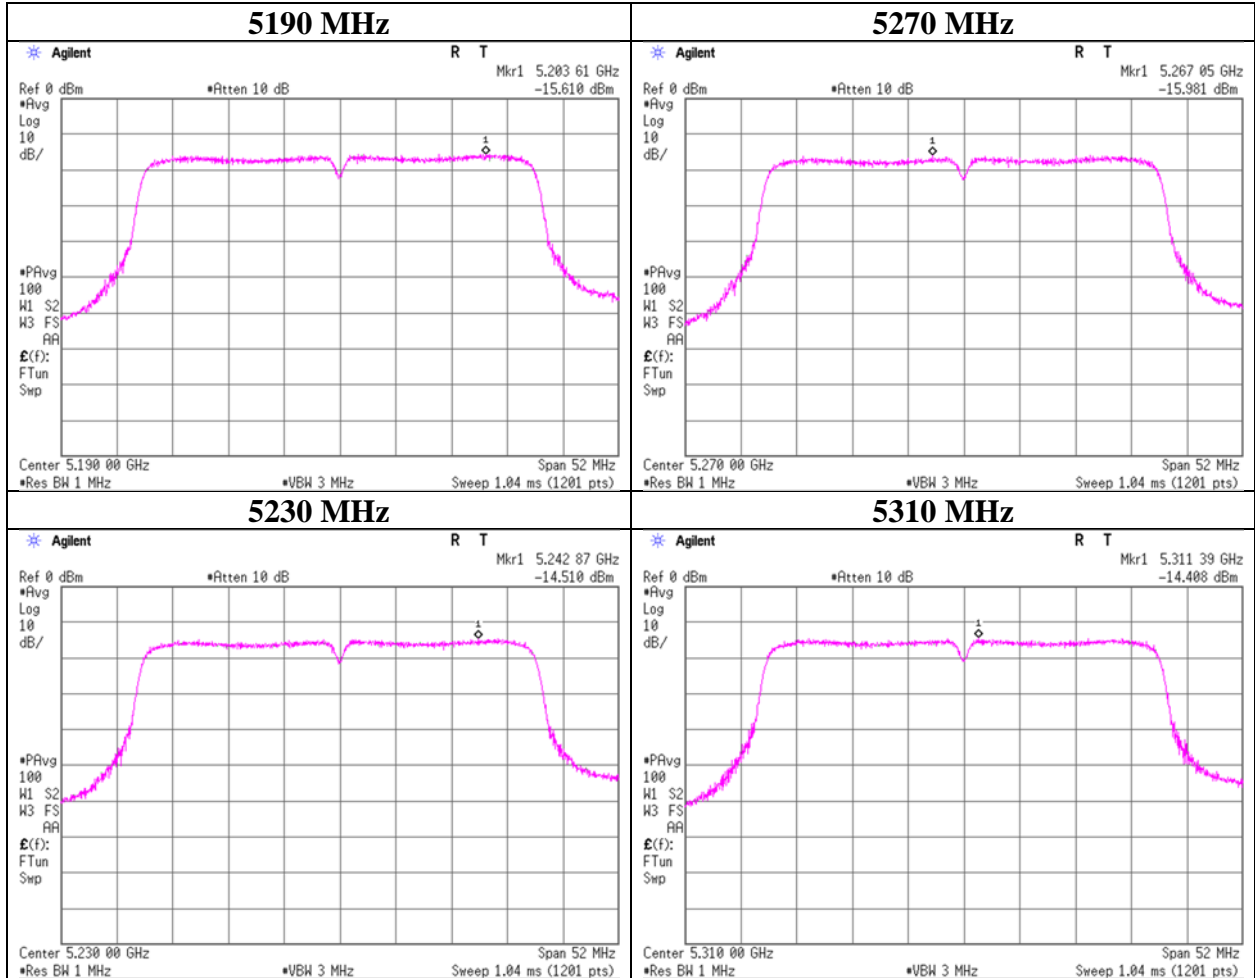

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	May 20, 2022	May 24, 2022
Temperature / Humidity	20 deg. C / 40 % RH	25 deg. C / 46 % RH
Engineer	Hiromasa Sato	Shiro Kobayashi
Mode	Tx 11n-40	


11n-40

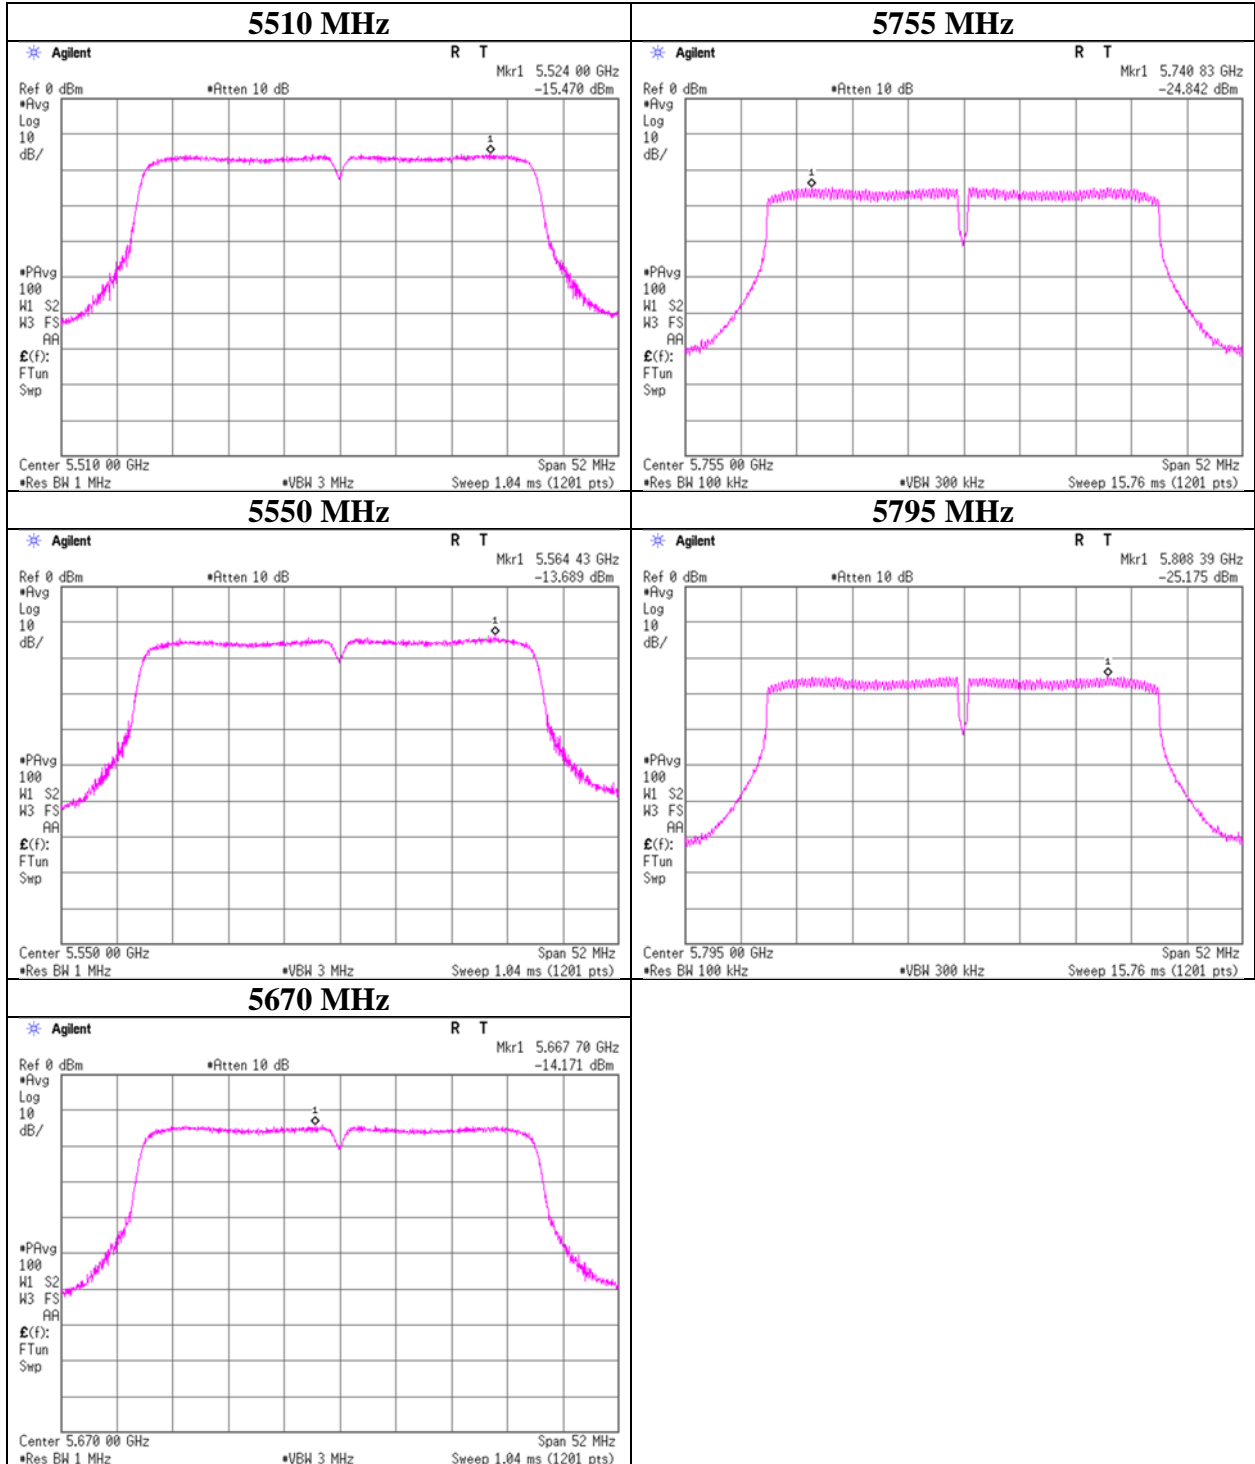

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-40


11ac-40

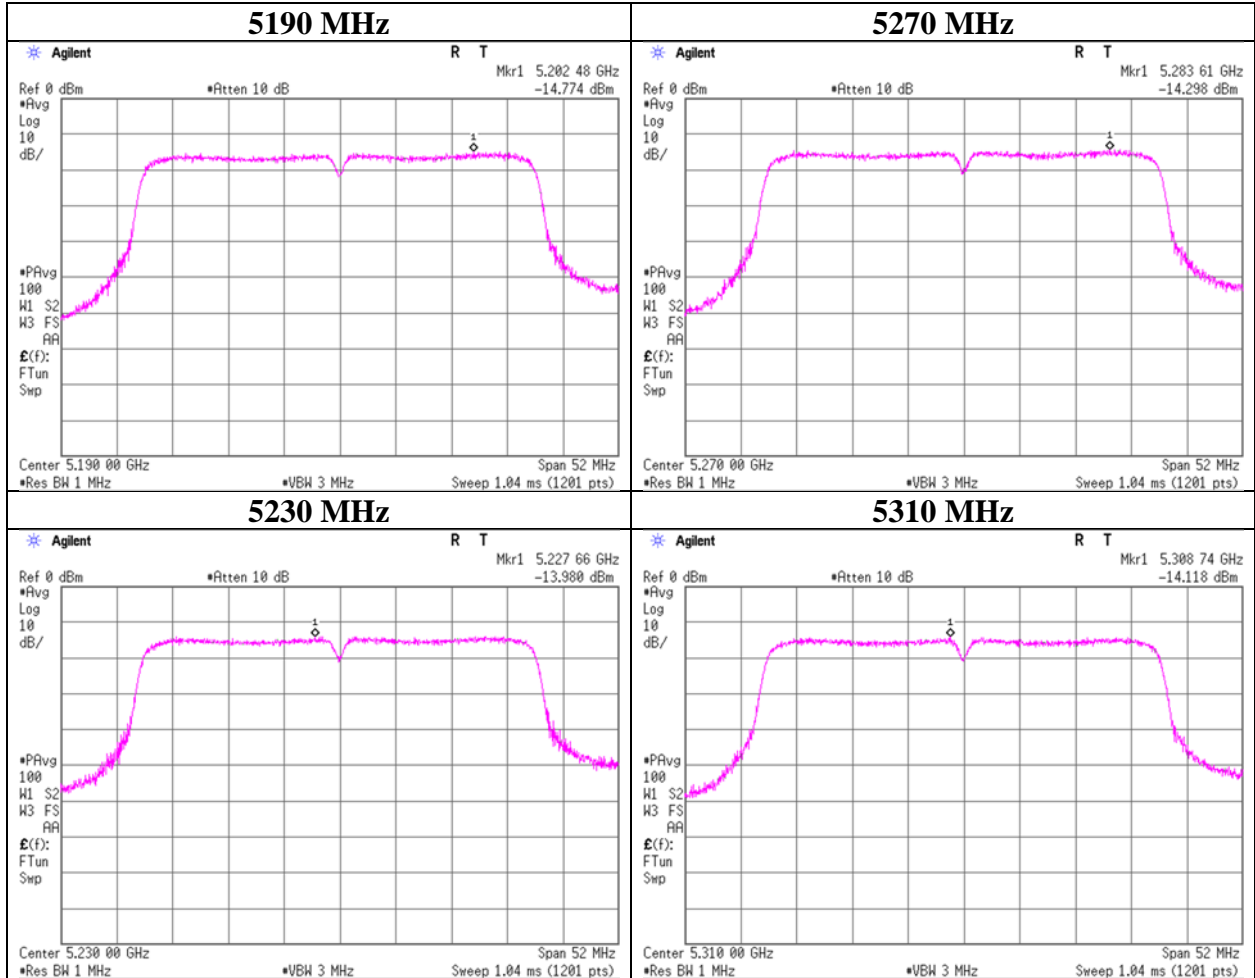

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.5 Shielded Room
Date May 20, 2022
Temperature / Humidity 20 deg. C / 40 % RH
Engineer Hiromasa Sato
Mode Tx 11ac-40


11ac-40

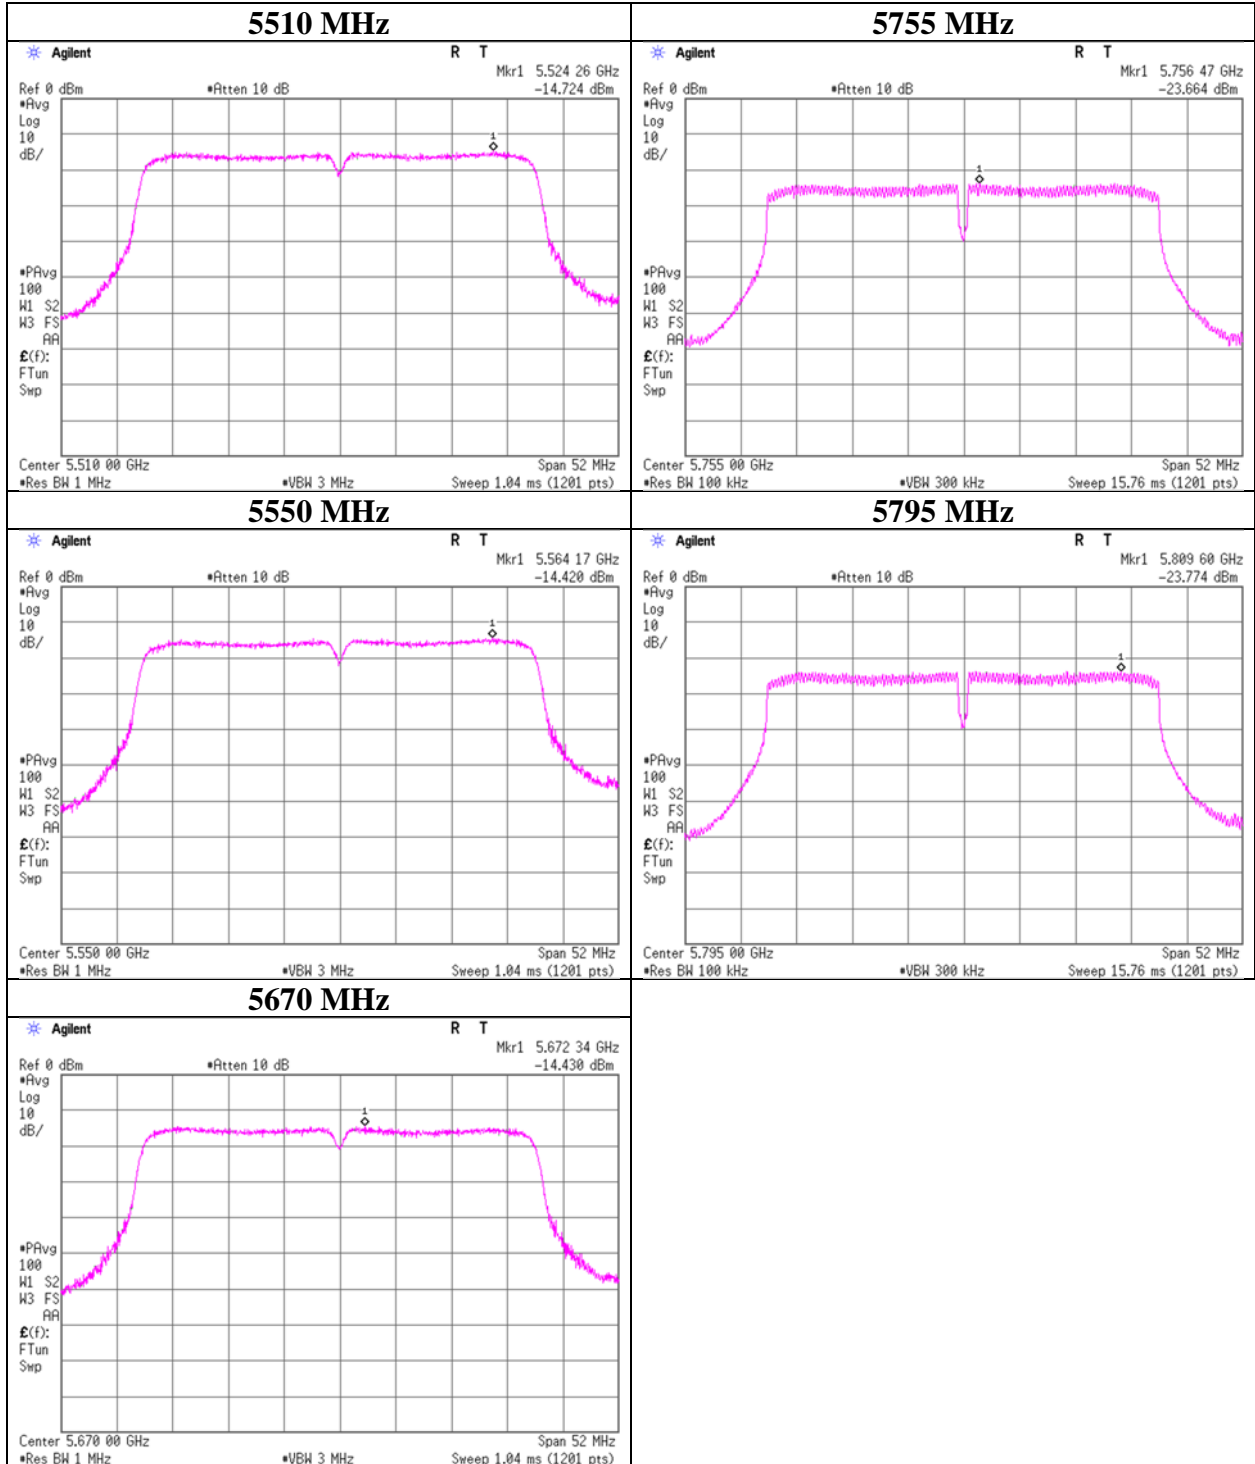

Maximum Power Spectral Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	May 20, 2022
Temperature / Humidity	20 deg. C / 40 % RH
Engineer	Hiromasa Sato
Mode	Tx 11ac-80

11ac-80

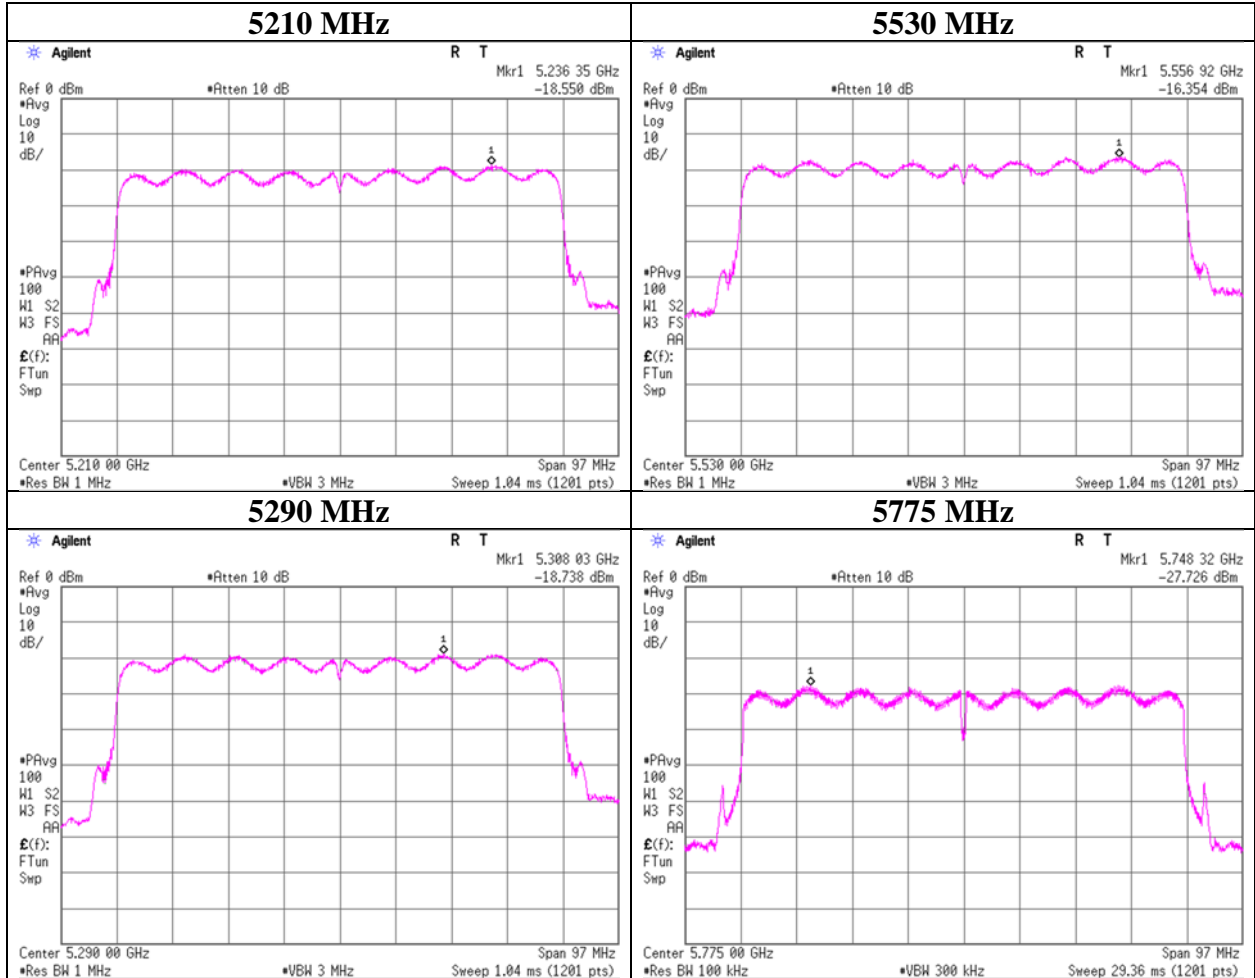

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome (1 GHz -6.4 GHz)
Mode	Tx 11a 5180 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	47.60	31.91	17.22	39.76	2.42	59.39	73.9	14.5	108	11	-
Hori.	5150.000	AV	34.60	31.91	17.22	39.76	2.42	46.39	53.9	7.5	108	11	VBW:10 Hz
Vert.	5150.000	PK	48.76	31.91	17.22	39.76	2.42	60.55	73.9	13.3	142	234	-
Vert.	5150.000	AV	34.89	31.91	17.22	39.76	2.42	46.68	53.9	7.2	142	234	VBW:10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome (1 GHz -6.4 GHz)
Mode	Tx 11a 5320 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	47.04	31.62	17.36	39.80	2.42	58.64	73.9	15.2	216	7	-
Hori.	5350.000	AV	34.35	31.62	17.36	39.80	2.42	45.95	53.9	7.9	216	7	VBW:10 Hz
Vert.	5350.000	PK	48.96	31.62	17.36	39.80	2.42	60.56	73.9	13.3	113	252	-
Vert.	5350.000	AV	35.39	31.62	17.36	39.80	2.42	46.99	53.9	6.9	113	252	VBW:10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
Mode Tx 11a 5320 MHz

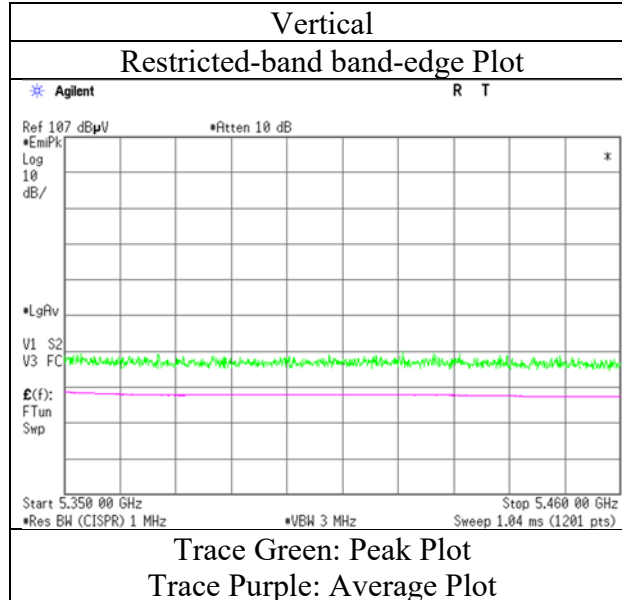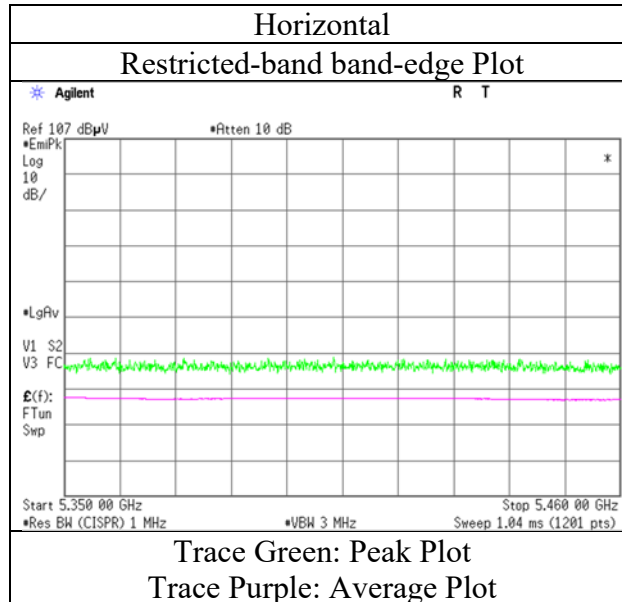

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
 (1 GHz -6.4 GHz)
Mode Tx 11a 5500 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	46.43	31.84	17.45	39.82	2.42	58.32	73.9	15.5	388	347	-
Hori.	5460.000	AV	33.72	31.84	17.45	39.82	2.42	45.61	53.9	8.2	388	347	VBW:10 Hz
Vert.	5460.000	PK	47.24	31.84	17.45	39.82	2.42	59.13	73.9	14.7	145	238	-
Vert.	5460.000	AV	33.95	31.84	17.45	39.82	2.42	45.84	53.9	8.0	145	238	VBW:10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	46.90	31.85	17.45	39.82	2.42	58.80	-36.43	-27.0	9.4	388	347	-
Vert.	5470.000	PK	49.90	31.85	17.45	39.82	2.42	61.80	-33.43	-27.0	6.4	145	238	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome
Mode	Tx 11a 5500 MHz

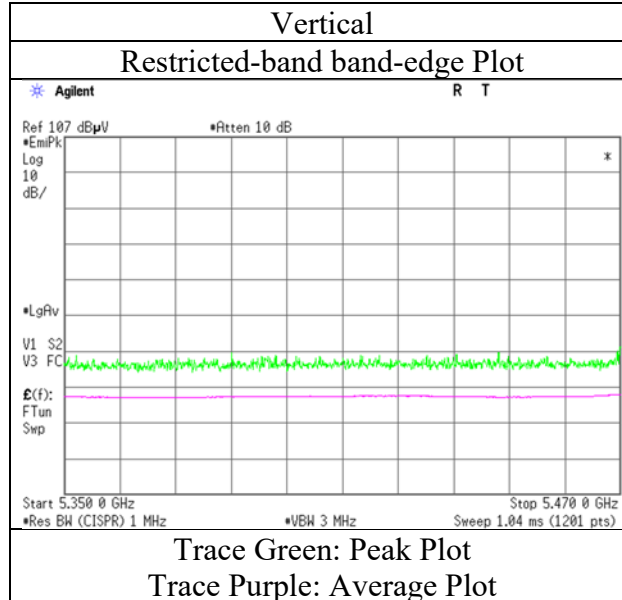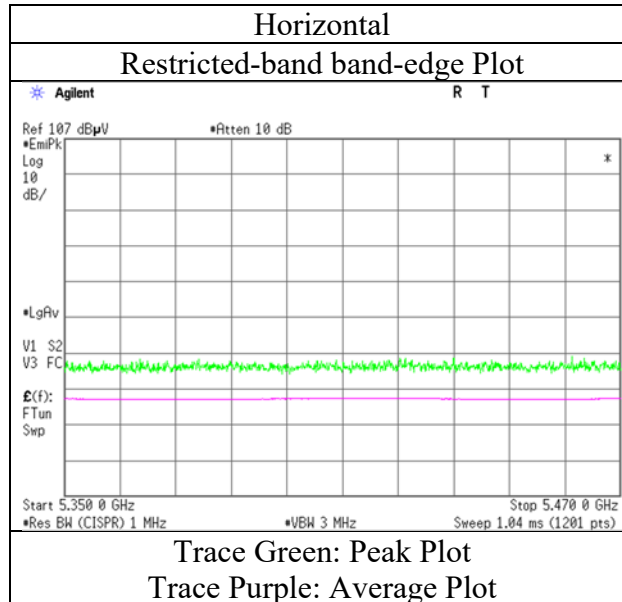

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
 (1 GHz -6.4 GHz)
Mode Tx 11a 5700 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	47.05	32.27	17.63	39.89	2.42	59.48	-35.75	-27.0	8.7	101	3	-
Vert.	5725.000	PK	50.53	32.27	17.63	39.89	2.42	62.96	-32.27	-27.0	5.2	102	244	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome
Mode	Tx 11a 5700 MHz

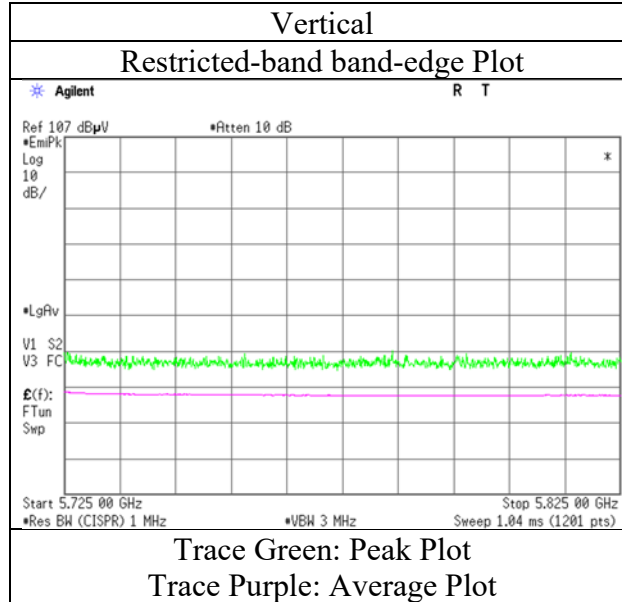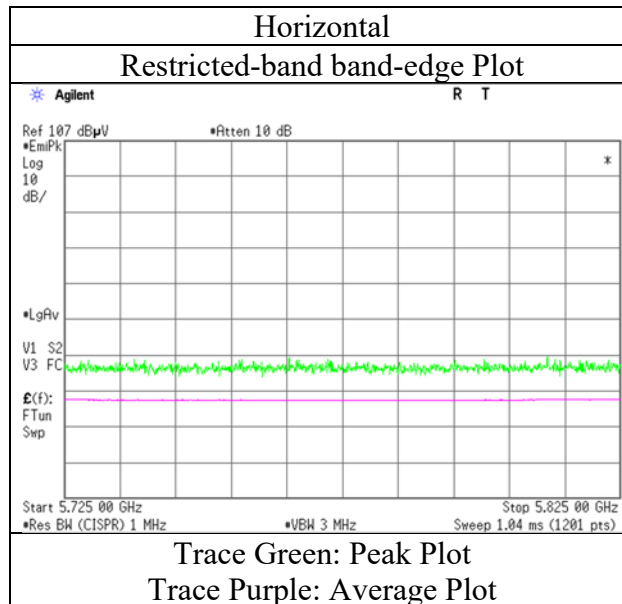

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 3 1 1 1
Date May 18, 2022 May 1, 2022 May 7, 2022 May 8, 2022
Temperature / Humidity 22 deg.C, 44 %RH 20 deg.C, 46 %RH 21 deg.C, 47 %RH 21 deg.C, 51 %RH
Engineer Shiro Kobayashi Miku Ikudome Miku Ikudome Miku Ikudome
(30 MHz -1 GHz) (1 GHz -10 GHz) (10 GHz -26.5 GHz) (26.5 GHz -40 GHz)
Mode Tx 11a 5745 MHz

(below 1 GHz and above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	156.486	QP	30.57	15.18	7.85	32.06	0.00	21.54	43.5	21.9	182	172	-
Hori.	1499.975	PK	48.71	24.91	13.84	39.14	2.42	50.74	73.9	23.1	245	346	-
Hori.	11490.000	PK	48.18	37.82	11.15	39.65	-9.54	47.96	73.9	25.9	241	263	-
Hori.	1499.975	AV	40.08	24.91	13.84	39.14	2.42	42.11	53.9	11.7	245	346	-
Hori.	11490.000	AV	36.24	37.82	11.15	39.65	-9.54	36.02	53.9	17.8	241	263	VBW:10 Hz
Vert.	37.256	QP	33.92	15.97	6.60	32.16	0.00	24.33	40.0	15.6	100	128	-
Vert.	56.127	QP	35.03	9.19	6.71	32.15	0.00	18.78	40.0	21.2	100	103	-
Vert.	61.935	QP	41.96	7.76	6.52	32.14	0.00	24.10	40.0	15.9	100	142	-
Vert.	66.280	QP	47.32	7.07	6.56	32.14	0.00	28.81	40.0	11.1	100	113	-
Vert.	68.655	QP	38.51	6.78	6.71	32.14	0.00	19.86	40.0	20.1	100	143	-
Vert.	71.589	QP	50.54	6.50	6.91	32.14	0.00	31.81	40.0	8.1	100	102	-
Vert.	119.998	QP	43.79	13.06	7.26	32.10	0.00	32.01	43.5	11.4	100	146	-
Vert.	199.998	QP	34.14	16.76	7.87	32.02	0.00	26.75	43.5	16.7	100	258	-
Vert.	746.762	QP	33.42	20.52	10.45	31.70	0.00	32.69	46.0	13.3	116	301	-
Vert.	1499.972	PK	48.38	24.91	13.84	39.14	2.42	50.41	73.9	23.4	253	81	-
Vert.	11490.000	PK	51.32	37.82	11.15	39.65	-9.54	51.10	73.9	22.8	163	317	-
Vert.	1499.972	AV	40.26	24.91	13.84	39.14	2.42	42.29	53.9	11.6	253	81	-
Vert.	11490.000	AV	39.25	37.82	11.15	39.65	-9.54	39.03	53.9	14.8	163	317	VBW:10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz: 20log (3.96 m/ 3.0 m) = 2.42 dB

10 GHz - 40 GHz: 20log (1.0 m/ 3.0 m) = -9.54 dB

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	45.92	32.06	17.58	39.87	2.42	58.11	-37.12	-27.0	10.1	102	1	-
Hori.	5700.000	PK	46.19	32.19	17.62	39.89	2.42	58.53	-36.70	10.0	46.7	102	1	-
Hori.	5720.000	PK	47.43	32.25	17.63	39.89	2.42	59.84	-35.39	15.6	50.9	102	1	-
Hori.	5725.000	PK	50.84	32.27	17.63	39.89	2.42	63.27	-31.96	27.0	58.9	102	1	-
Hori.	17235.000	PK	43.00	40.23	14.27	38.80	-9.54	49.16	-46.07	-27.0	19.0	150	0	-
Vert.	5650.000	PK	46.27	32.06	17.58	39.87	2.42	58.46	-36.77	-27.0	9.7	109	236	-
Vert.	5700.000	PK	47.05	32.19	17.62	39.89	2.42	59.39	-35.84	10.0	45.8	109	236	-
Vert.	5720.000	PK	51.80	32.25	17.63	39.89	2.42	64.21	-31.02	15.6	46.6	109	236	-
Vert.	5725.000	PK	54.56	32.27	17.63	39.89	2.42	66.99	-28.24	27.0	55.2	109	236	-
Vert.	17235.000	PK	43.65	40.23	14.27	38.80	-9.54	49.81	-45.42	-27.0	18.4	150	0	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz: 20log (3.96 m/ 3.0 m) = 2.42 dB

10 GHz - 40 GHz: 20log (1.0 m/ 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome
Mode	Tx 11a 5745 MHz

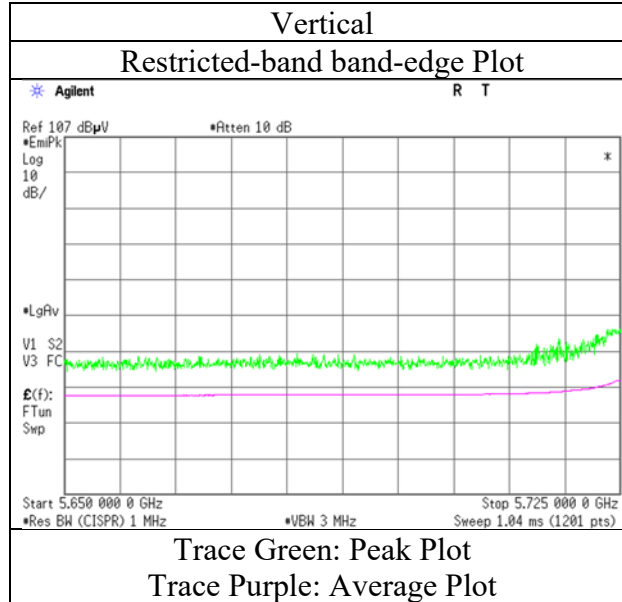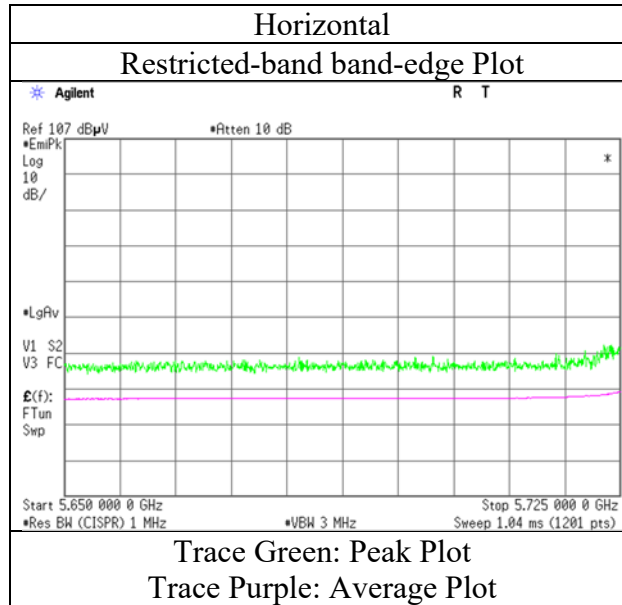

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome (1 GHz -6.4 GHz)
Mode	Tx 11a 5825 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	47.28	32.63	17.72	39.93	2.42	60.12	-35.11	27.0	62.1	185	32	-
Hori.	5855.000	PK	46.59	32.64	17.73	39.93	2.42	59.45	-35.78	15.6	51.3	185	32	-
Hori.	5875.000	PK	46.48	32.68	17.75	39.94	2.42	59.39	-35.84	10.0	45.8	185	32	-
Hori.	5925.000	PK	46.59	32.75	17.78	39.95	2.42	59.59	-35.64	-27.0	8.6	185	32	-
Vert.	5850.000	PK	47.75	32.63	17.72	39.93	2.42	60.59	-34.64	27.0	61.6	138	255	-
Vert.	5855.000	PK	46.97	32.64	17.73	39.93	2.42	59.83	-35.40	15.6	51.0	138	255	-
Vert.	5875.000	PK	46.38	32.68	17.75	39.94	2.42	59.29	-35.94	10.0	45.9	138	255	-
Vert.	5925.000	PK	46.63	32.75	17.78	39.95	2.42	59.63	-35.60	-27.0	8.6	138	255	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10[^](Electric Field Strength [dBuV/m] / 20) * 10[^](-6) * Distance : 3 [m])² / 30 * 10[^](3))



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
Mode Tx 11a 5825 MHz

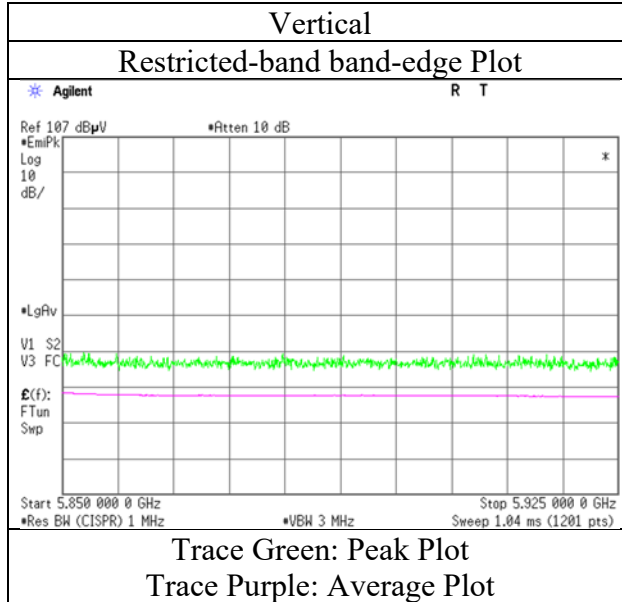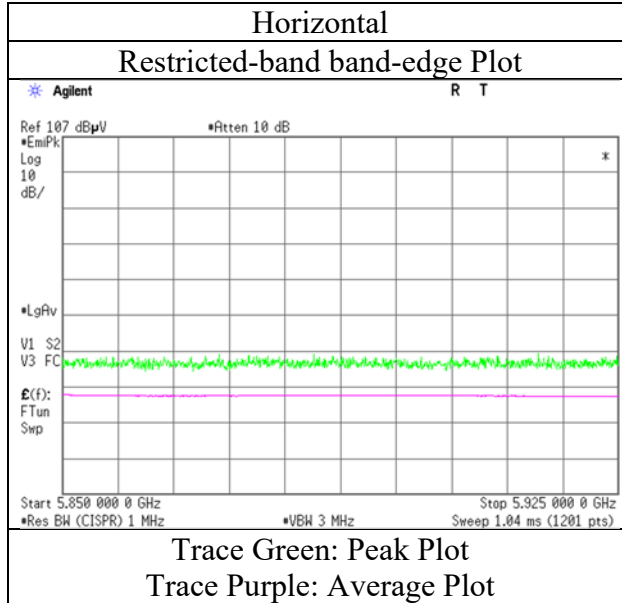

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome (1 GHz -6.4 GHz)
Mode	Tx 11ac-20 5180 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	46.58	31.91	17.22	39.76	2.42	58.37	73.9	15.5	146	4	-
Hori.	5150.000	AV	34.14	31.91	17.22	39.76	2.42	45.93	53.9	7.9	146	4	VBW:10 Hz
Vert.	5150.000	PK	46.78	31.91	17.22	39.76	2.42	58.57	73.9	15.3	139	246	-
Vert.	5150.000	AV	34.51	31.91	17.22	39.76	2.42	46.30	53.9	7.6	139	246	VBW:10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
 (1 GHz -6.4 GHz)
Mode Tx 11ac-20 5180 MHz

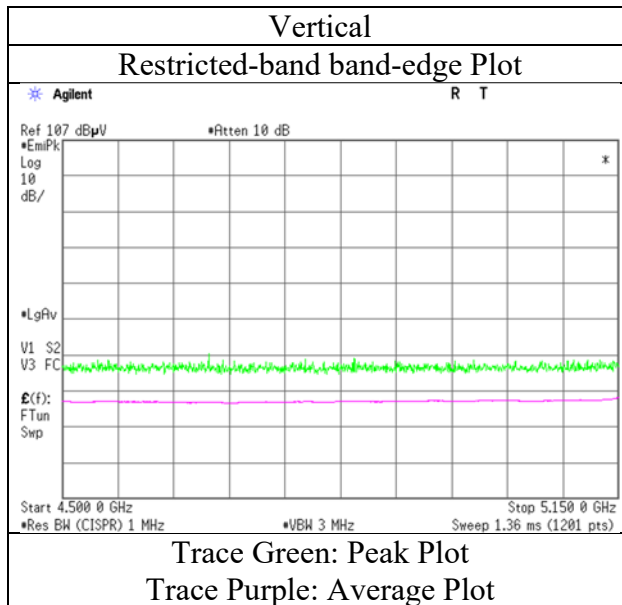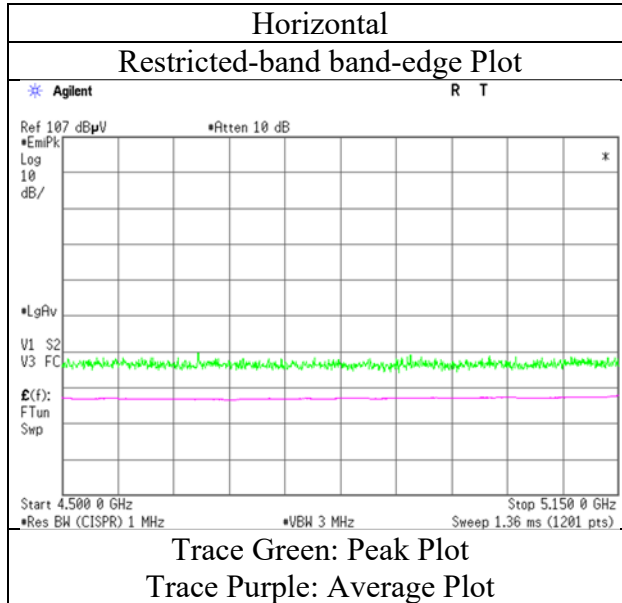

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome (1 GHz -6.4 GHz)
Mode	Tx 11ac-20 5320 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	46.72	31.62	17.36	39.80	2.42	58.32	73.9	15.5	102	6	-
Hori.	5350.000	AV	34.52	31.62	17.36	39.80	2.42	46.12	53.9	7.7	102	6	VBW:10 Hz
Vert.	5350.000	PK	50.18	31.62	17.36	39.80	2.42	61.78	73.9	12.1	136	234	-
Vert.	5350.000	AV	35.49	31.62	17.36	39.80	2.42	47.09	53.9	6.8	136	234	VBW:10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome
Mode	Tx 11ac-20 5320 MHz

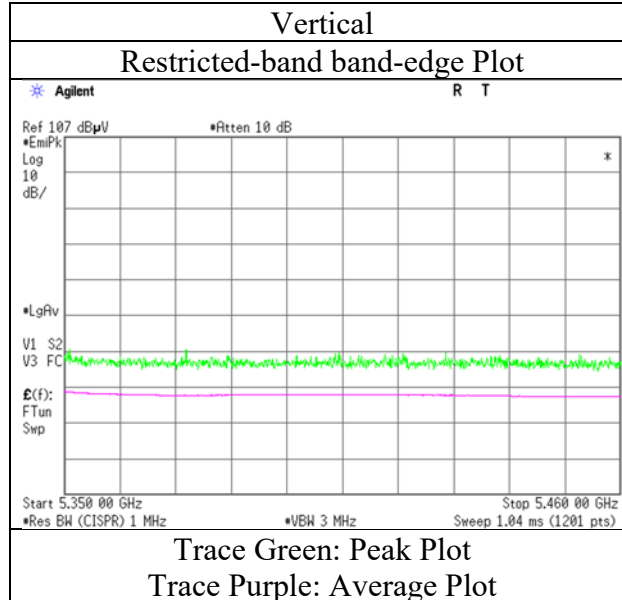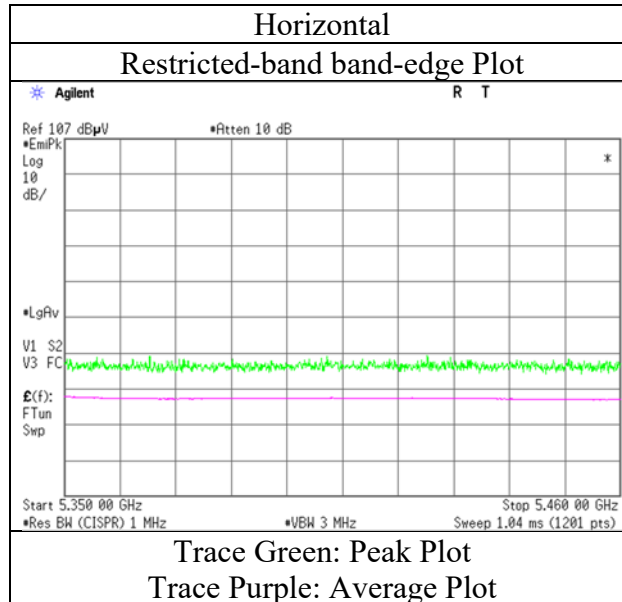

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
 (1 GHz -6.4 GHz)
Mode Tx 11ac-20 5500 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	45.33	31.84	17.45	39.82	2.42	57.22	73.9	16.6	117	207	-
Hori.	5460.000	AV	33.61	31.84	17.45	39.82	2.42	45.50	53.9	8.4	117	207	VBW: 10 Hz
Vert.	5460.000	PK	45.94	31.84	17.45	39.82	2.42	57.83	73.9	16.0	231	0	-
Vert.	5460.000	AV	33.78	31.84	17.45	39.82	2.42	45.67	53.9	8.2	231	0	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	45.99	31.85	17.45	39.82	2.42	57.89	-37.34	-27.0	10.3	117	207	-
Vert.	5470.000	PK	46.27	31.85	17.45	39.82	2.42	58.17	-37.06	-27.0	10.0	231	0	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome
Mode	Tx 11ac-20 5500 MHz

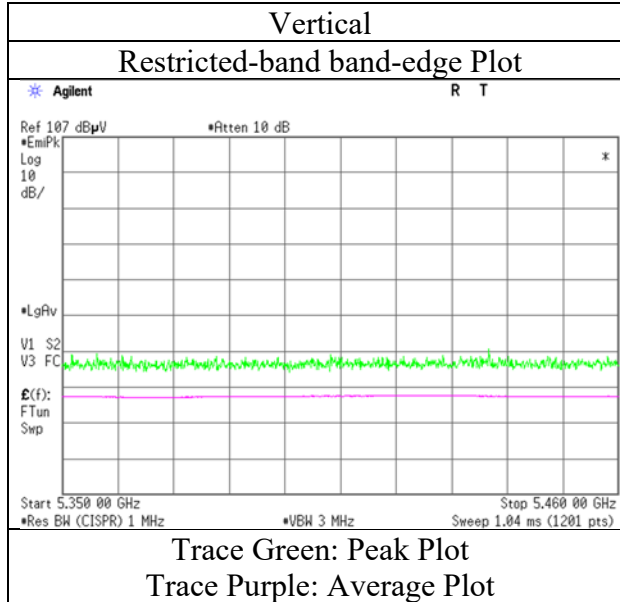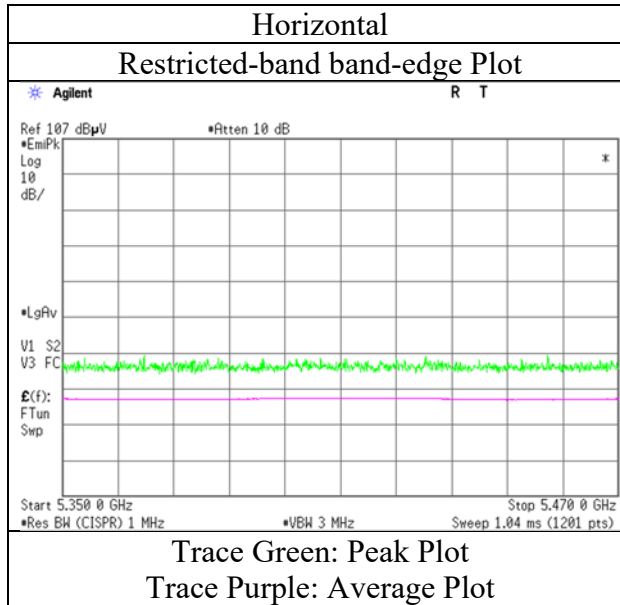

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 1, 2022
Temperature / Humidity 20 deg.C, 46 %RH
Engineer Miku Ikudome
 (1 GHz -6.4 GHz)
Mode Tx 11ac-20 5700 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	48.02	32.27	17.63	39.89	2.42	60.45	-34.78	-27.0	7.7	103	2	-
Vert.	5725.000	PK	49.24	32.27	17.63	39.89	2.42	61.67	-33.56	-27.0	6.5	119	231	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 1, 2022
Temperature / Humidity	20 deg.C, 46 %RH
Engineer	Miku Ikudome
Mode	Tx 11ac-20 5700 MHz

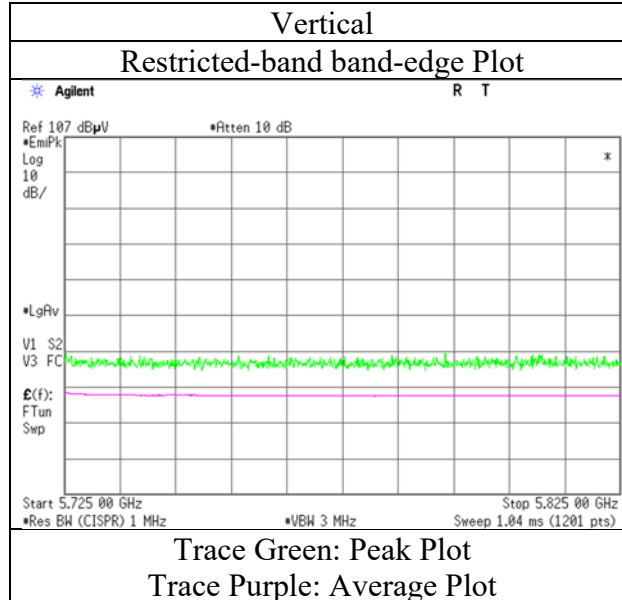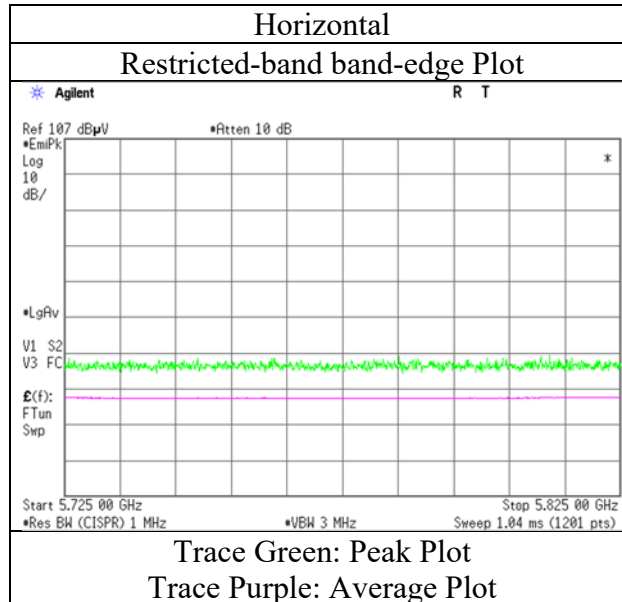

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi (1 GHz -6.4 GHz)
Mode	Tx 11ac-20 5745 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	46.26	32.06	17.63	39.87	2.42	58.50	-36.73	-27.0	9.7	218	27	-
Hori.	5700.000	PK	46.54	32.19	17.67	39.89	2.42	58.93	-36.30	10.0	46.3	218	27	-
Hori.	5720.000	PK	48.47	32.25	17.68	39.89	2.42	60.93	-34.30	15.6	49.9	218	27	-
Hori.	5725.000	PK	51.05	32.27	17.68	39.89	2.42	63.53	-31.70	27.0	58.7	218	27	-
Vert.	5650.000	PK	46.79	32.06	17.63	39.87	2.42	59.03	-36.20	-27.0	9.2	116	245	-
Vert.	5700.000	PK	46.67	32.19	17.67	39.89	2.42	59.06	-36.17	10.0	46.1	116	245	-
Vert.	5720.000	PK	50.27	32.25	17.68	39.89	2.42	62.73	-32.50	15.6	48.1	116	245	-
Vert.	5725.000	PK	53.14	32.27	17.68	39.89	2.42	65.62	-29.61	27.0	56.6	116	245	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-20 5745 MHz

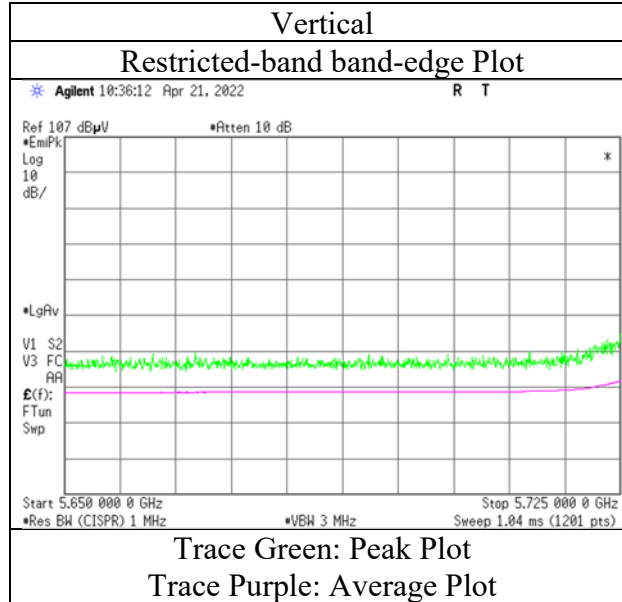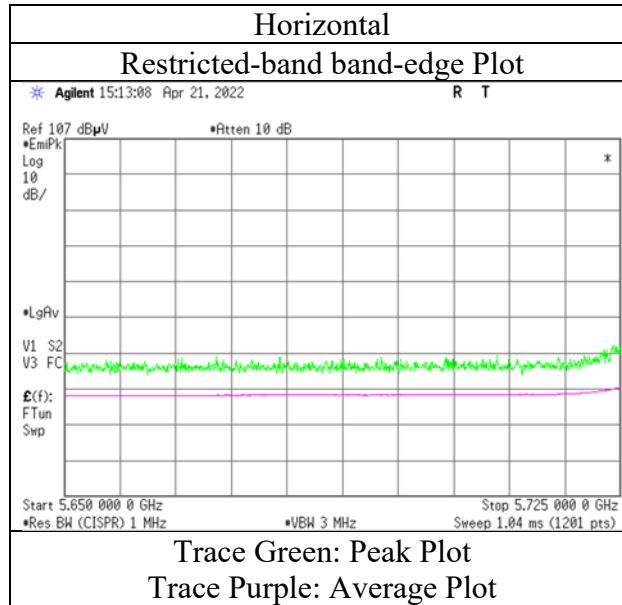

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi (1 GHz -6.4 GHz)
Mode	Tx 11ac-20 5825 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	47.73	32.63	17.76	39.93	2.42	60.61	-34.62	27.0	61.6	214	30	-
Hori.	5855.000	PK	46.58	32.64	17.77	39.93	2.42	59.48	-35.75	15.6	51.3	214	30	-
Hori.	5875.000	PK	46.49	32.68	17.79	39.94	2.42	59.44	-35.79	10.0	45.7	214	30	-
Hori.	5925.000	PK	46.11	32.75	17.82	39.95	2.42	59.15	-36.08	-27.0	9.0	214	30	-
Vert.	5850.000	PK	47.77	32.63	17.76	39.93	2.42	60.65	-34.58	27.0	61.5	116	243	-
Vert.	5855.000	PK	46.98	32.64	17.77	39.93	2.42	59.88	-35.35	15.6	50.9	116	243	-
Vert.	5875.000	PK	46.45	32.68	17.79	39.94	2.42	59.40	-35.83	10.0	45.8	116	243	-
Vert.	5925.000	PK	46.32	32.75	17.82	39.95	2.42	59.36	-35.87	-27.0	8.8	116	243	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10[^](Electric Field Strength [dBuV/m] / 20) * 10^{^-}(6) * Distance : 3 [m])² / 30 * 10[^](3))



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
Mode Tx 11ac-20 5825 MHz

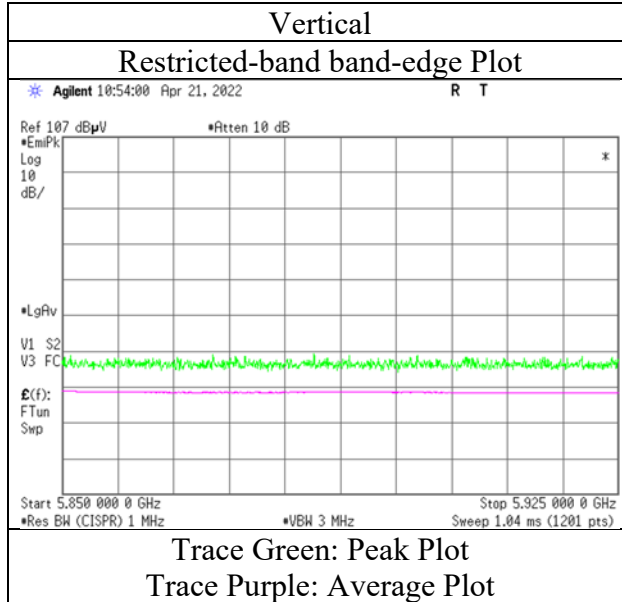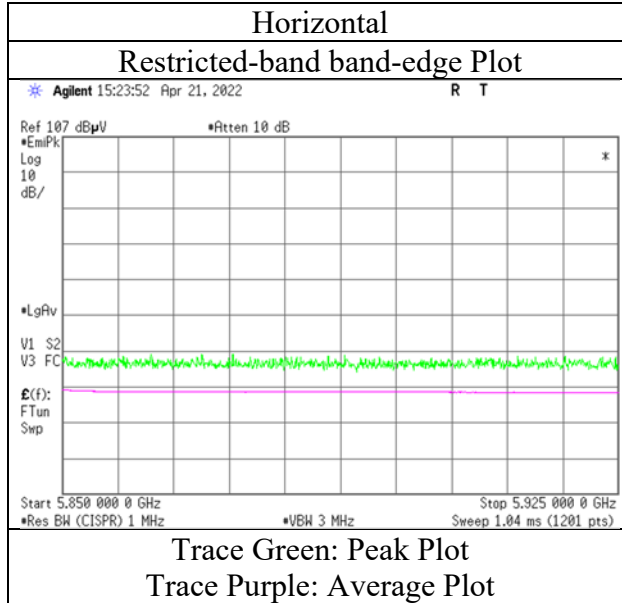

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-40 5190 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	48.09	31.91	17.27	39.76	2.42	59.93	73.9	13.9	102	12	-
Hori.	5150.000	AV	36.26	31.91	17.27	39.76	2.42	48.10	53.9	5.8	102	12	VBW: 10 Hz
Vert.	5150.000	PK	49.79	31.91	17.27	39.76	2.42	61.63	73.9	12.2	125	239	-
Vert.	5150.000	AV	37.72	31.91	17.27	39.76	2.42	49.56	53.9	4.3	125	239	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-40 5310 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	53.47	31.62	17.41	39.80	2.42	65.12	73.9	8.7	247	7	-
Hori.	5350.000	AV	39.12	31.62	17.41	39.80	2.42	50.77	53.9	3.1	247	7	VBW: 10 Hz
Vert.	5350.000	PK	56.58	31.62	17.41	39.80	2.42	68.23	73.9	5.6	119	238	-
Vert.	5350.000	AV	41.36	31.62	17.41	39.80	2.42	53.01	53.9	0.8	119	238	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-40 5310 MHz

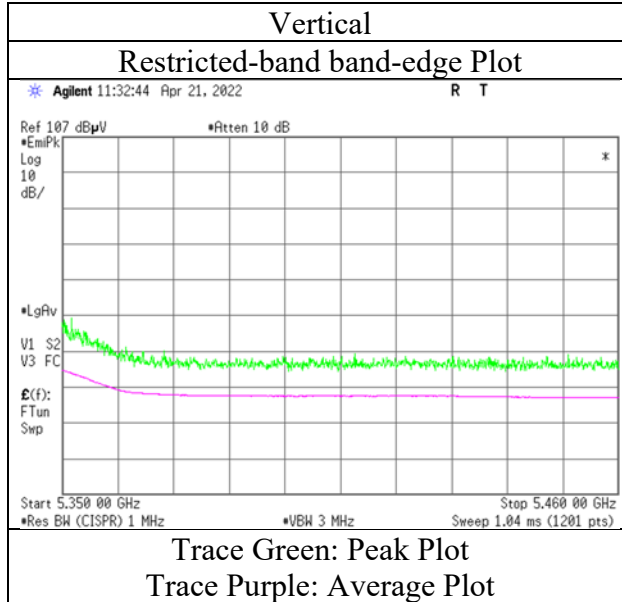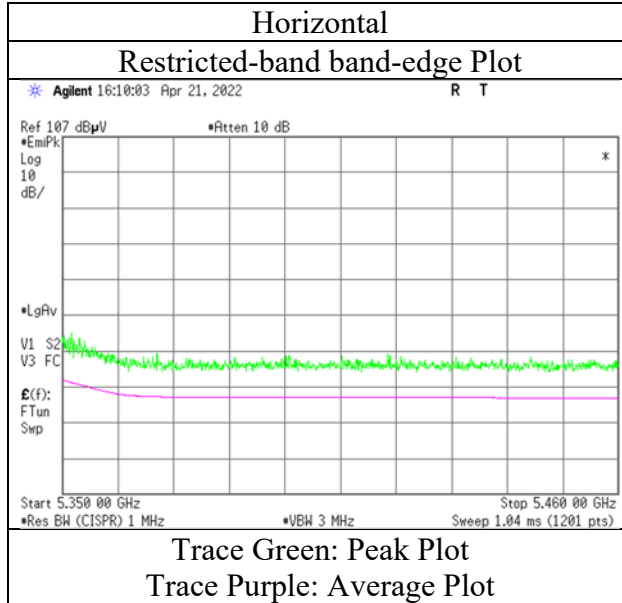

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-40 5510 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5460.000	PK	48.61	31.84	17.50	39.82	2.42	60.55	73.9	13.3	215	6	-
Hori.	5460.000	AV	34.25	31.84	17.50	39.82	2.42	46.19	53.9	7.7	215	6	VBW: 10 Hz
Vert.	5460.000	PK	50.71	31.84	17.50	39.82	2.42	62.65	73.9	11.2	153	242	-
Vert.	5460.000	AV	35.25	31.84	17.50	39.82	2.42	47.19	53.9	6.7	153	242	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	50.74	31.85	17.50	39.82	2.42	62.69	-32.54	-27.0	5.5	215	6	-
Vert.	5470.000	PK	53.29	31.85	17.50	39.82	2.42	65.24	-29.99	-27.0	2.9	153	242	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-40 5510 MHz

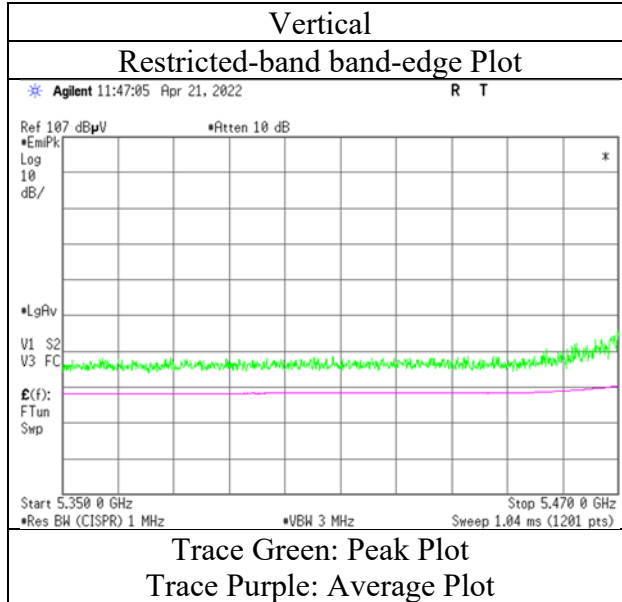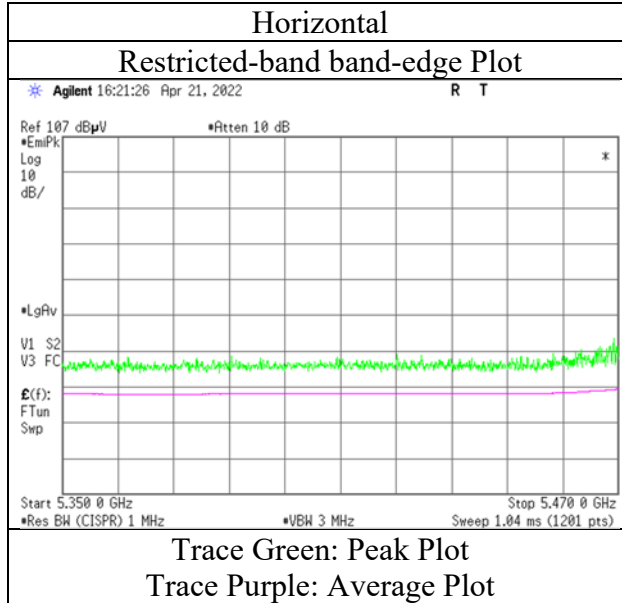

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi (1 GHz -6.4 GHz)
Mode	Tx 11ac-40 5670 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5725.000	PK	46.24	32.27	17.68	39.89	2.42	58.72	-36.51	-27.0	9.5	100	12	-
Vert.	5725.000	PK	47.17	32.27	17.68	39.89	2.42	59.65	-35.58	-27.0	8.5	138	240	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
Mode Tx 11ac-40 5670 MHz

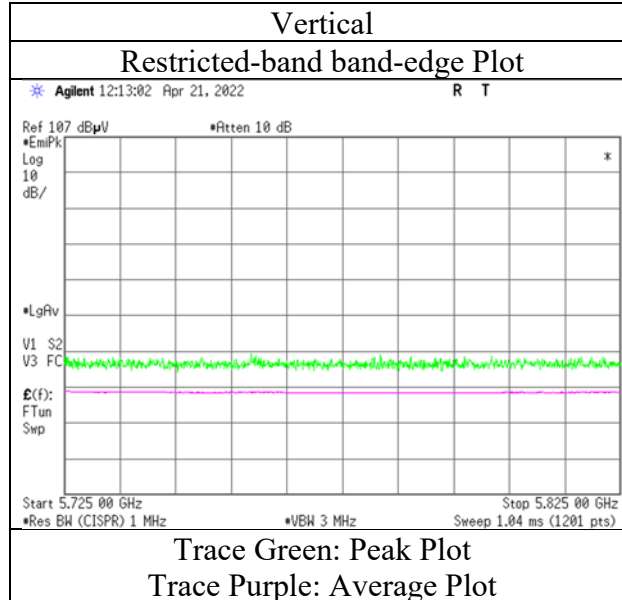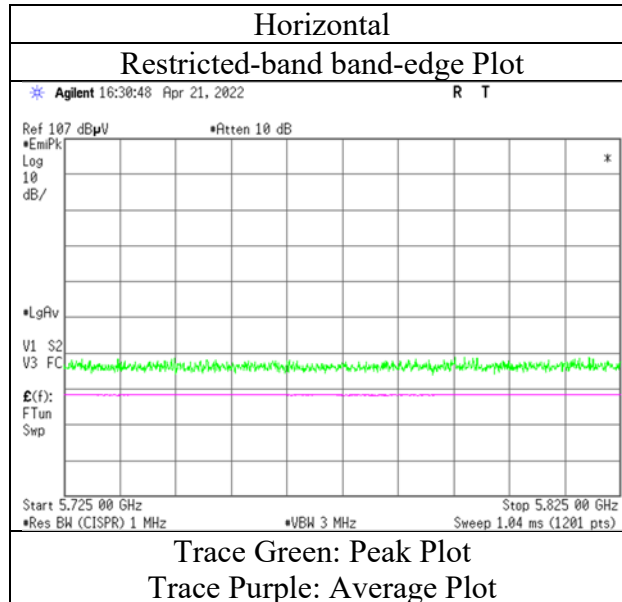

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi (1 GHz -6.4 GHz)
Mode	Tx 11ac-40 5755 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	46.28	32.06	17.63	39.87	2.42	58.52	-36.71	-27.0	9.7	224	30	-
Hori.	5700.000	PK	46.64	32.19	17.67	39.89	2.42	59.03	-36.20	10.0	46.2	224	30	-
Hori.	5720.000	PK	51.27	32.25	17.68	39.89	2.42	63.73	-31.50	15.6	47.1	224	30	-
Hori.	5723.625	PK	53.36	32.26	17.68	39.89	2.42	65.83	-29.40	23.8	53.1	224	30	-
Hori.	5725.000	PK	52.10	32.27	17.68	39.89	2.42	64.58	-30.65	27.0	57.6	224	30	-
Vert.	5650.000	PK	46.23	32.06	17.63	39.87	2.42	58.47	-36.76	-27.0	9.7	117	247	-
Vert.	5700.000	PK	48.12	32.19	17.67	39.89	2.42	60.51	-34.72	10.0	44.7	117	247	-
Vert.	5720.000	PK	53.95	32.25	17.68	39.89	2.42	66.41	-28.82	15.6	44.4	117	247	-
Vert.	5723.500	PK	55.75	32.26	17.68	39.89	2.42	68.22	-27.01	23.5	50.5	117	247	-
Vert.	5725.000	PK	54.72	32.27	17.68	39.89	2.42	67.20	-28.03	27.0	55.0	117	247	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG((10^(Electric Field Strength [dBuV/m] / 20) * 10^(-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-40 5755 MHz

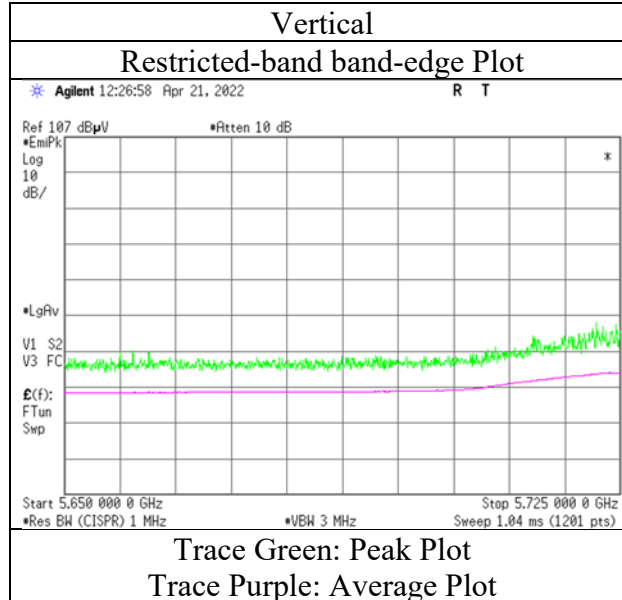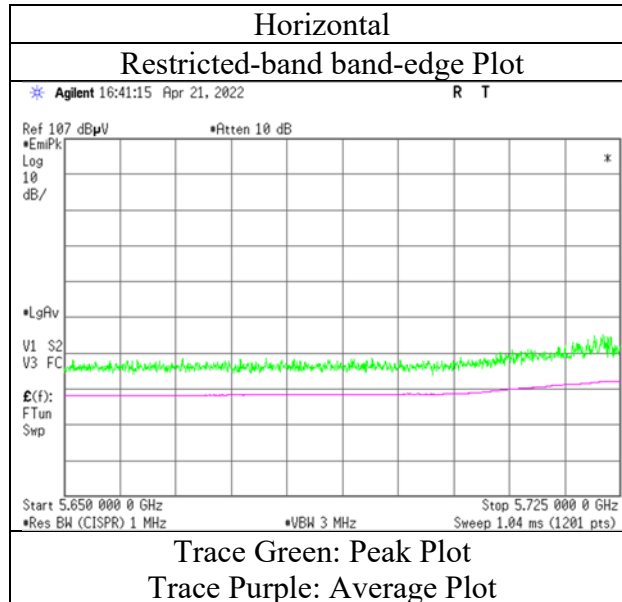

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi (1 GHz -6.4 GHz)
Mode	Tx 11ac-40 5795 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5850.000	PK	46.75	32.63	17.76	39.93	2.42	59.63	-35.60	27.0	62.6	220	28	-
Hori.	5855.000	PK	46.50	32.64	17.77	39.93	2.42	59.40	-35.83	15.6	51.4	220	28	-
Hori.	5875.000	PK	46.15	32.68	17.79	39.94	2.42	59.10	-36.13	10.0	46.1	220	28	-
Hori.	5925.000	PK	45.33	32.75	17.82	39.95	2.42	58.37	-36.86	-27.0	9.8	220	28	-
Vert.	5850.000	PK	46.80	32.63	17.76	39.93	2.42	59.68	-35.55	27.0	62.5	113	244	-
Vert.	5855.000	PK	46.73	32.64	17.77	39.93	2.42	59.63	-35.60	15.6	51.2	113	244	-
Vert.	5875.000	PK	46.31	32.68	17.79	39.94	2.42	59.26	-35.97	10.0	45.9	113	244	-
Vert.	5925.000	PK	46.04	32.75	17.82	39.95	2.42	59.08	-36.15	-27.0	9.1	113	244	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG((10[^](Electric Field Strength [dBuV/m] / 20) * 10[^](-6) * Distance : 3 [m])² / 30 * 10[^](3))



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
Mode Tx 11ac-40 5795 MHz

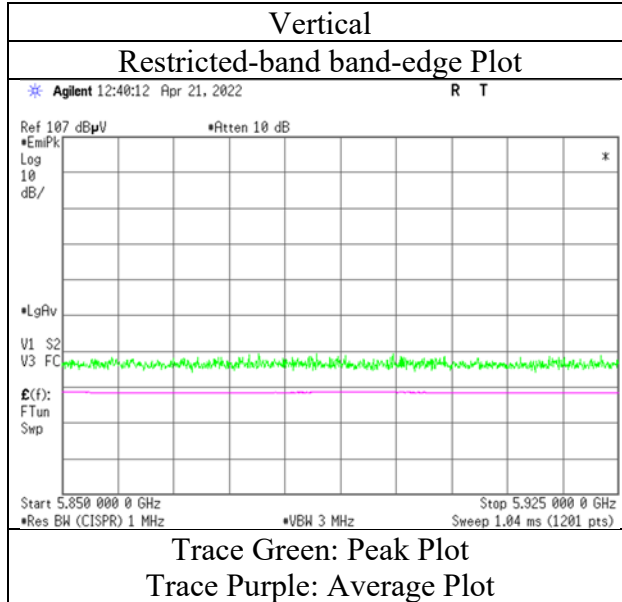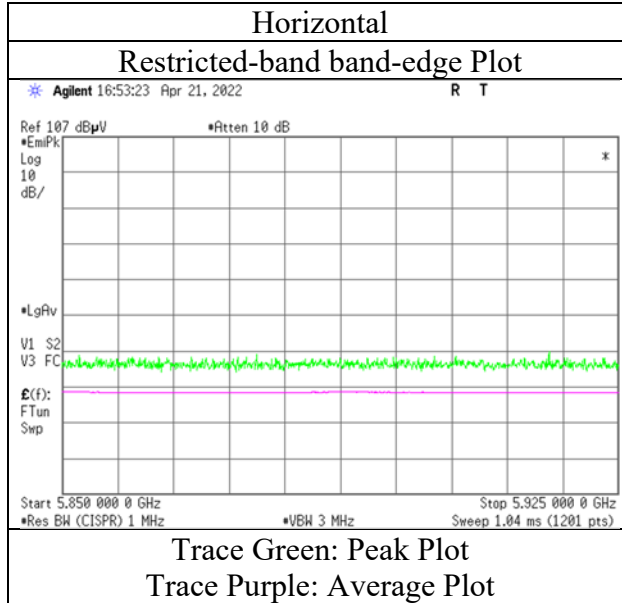

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-80 5210 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5150.000	PK	47.75	31.91	17.27	39.76	2.42	59.59	73.9	14.3	101	13	-
Hori.	5150.000	AV	35.78	31.91	17.27	39.76	2.42	47.62	53.9	6.2	101	13	VBW: 10 Hz
Vert.	5150.000	PK	49.70	31.91	17.27	39.76	2.42	61.54	73.9	12.3	114	242	-
Vert.	5150.000	AV	36.97	31.91	17.27	39.76	2.42	48.81	53.9	5.0	114	242	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi (1 GHz -6.4 GHz)
Mode	Tx 11ac-80 5210 MHz

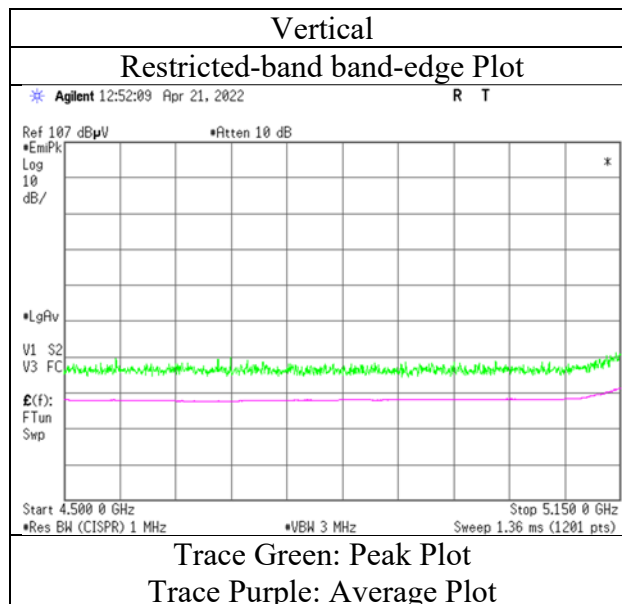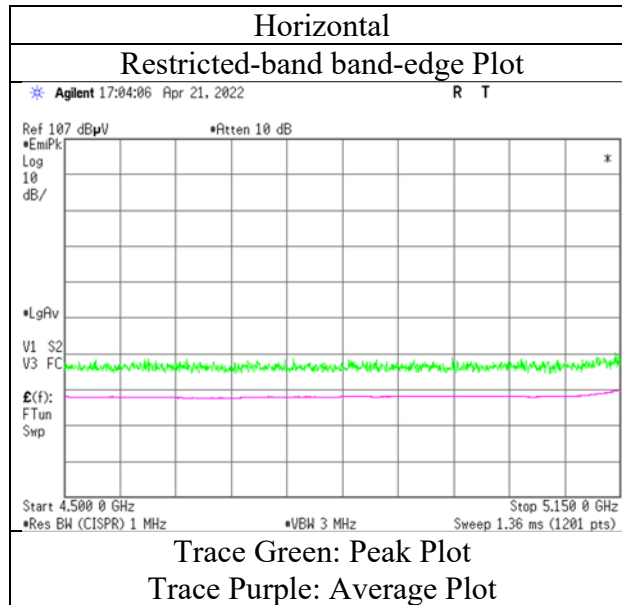

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-80 5290 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5350.000	PK	48.68	31.62	17.41	39.80	2.42	60.33	73.9	13.5	100	16	-
Hori.	5352.235	PK	49.31	31.62	17.41	39.80	2.42	60.96	73.9	12.9	100	16	-
Hori.	5350.000	AV	36.55	31.62	17.41	39.80	2.42	48.20	53.9	5.7	100	16	VBW: 10 Hz
Hori.	5352.235	AV	36.75	31.62	17.41	39.80	2.42	48.40	53.9	5.5	100	16	VBW: 10 Hz
Vert.	5350.000	PK	50.98	31.62	17.41	39.80	2.42	62.63	73.9	11.2	114	237	-
Vert.	5352.383	PK	52.12	31.62	17.41	39.80	2.42	63.77	73.9	10.1	114	237	-
Vert.	5380.230	PK	53.30	31.68	17.44	39.81	2.42	65.03	73.9	8.8	114	237	-
Vert.	5350.000	AV	39.16	31.62	17.41	39.80	2.42	50.81	53.9	3.0	114	237	VBW: 10 Hz
Vert.	5352.383	AV	39.46	31.62	17.41	39.80	2.42	51.11	53.9	2.7	114	237	VBW: 10 Hz
Vert.	5380.230	AV	36.39	31.68	17.44	39.81	2.42	48.12	53.9	5.7	114	237	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : $20\log(3.96\text{ m} / 3.0\text{ m}) = 2.42\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-80 5290 MHz

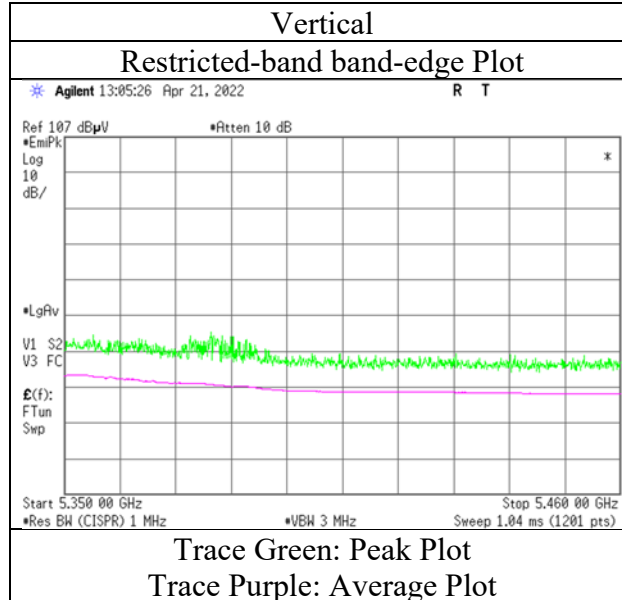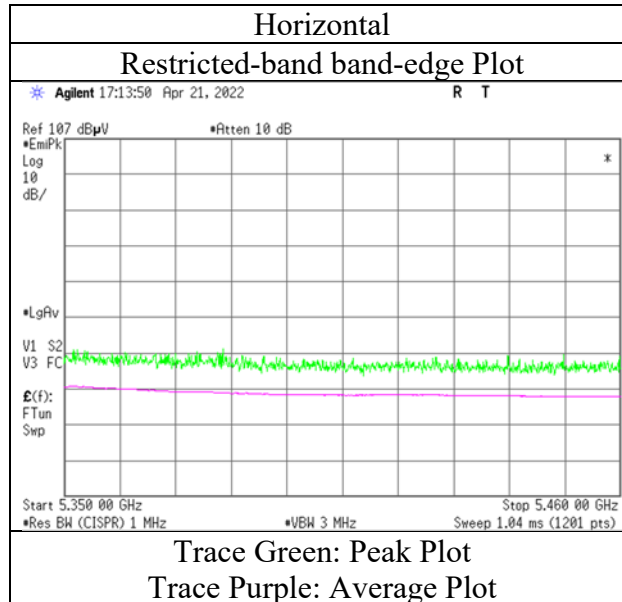

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-80 5530 MHz

(above 1 GHz Inside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5442.408	PK	51.81	31.80	17.48	39.82	2.42	63.69	73.9	10.2	106	15	-
Hori.	5460.000	PK	50.68	31.84	17.50	39.82	2.42	62.62	73.9	11.2	106	15	-
Hori.	5442.408	AV	34.38	31.80	17.48	39.82	2.42	46.26	53.9	7.6	106	15	VBW: 10 Hz
Hori.	5460.000	AV	35.35	31.84	17.50	39.82	2.42	47.29	53.9	6.6	106	15	VBW: 10 Hz
Vert.	5443.000	PK	52.44	31.81	17.48	39.82	2.42	64.33	73.9	9.5	119	243	-
Vert.	5460.000	PK	53.16	31.84	17.50	39.82	2.42	65.10	73.9	8.8	119	243	-
Vert.	5443.000	AV	35.47	31.81	17.48	39.82	2.42	47.36	53.9	6.5	119	243	VBW: 10 Hz
Vert.	5460.000	AV	36.13	31.84	17.50	39.82	2.42	48.07	53.9	5.8	119	243	VBW: 10 Hz

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m/ 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m/ 3.0 m) = -9.54 dB

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5470.000	PK	53.41	31.85	17.50	39.82	2.42	65.36	-29.87	-27.0	2.8	106	15	-
Hori.	5725.000	PK	46.55	32.27	17.68	39.89	2.42	59.03	-36.20	-27.0	9.2	106	15	-
Vert.	5470.000	PK	55.47	31.85	17.50	39.82	2.42	67.42	-27.81	-27.0	0.8	119	243	-
Vert.	5725.000	PK	46.85	32.27	17.68	39.89	2.42	59.33	-35.90	-27.0	8.8	119	243	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG((10 ^ (Electric Field Strength [dBuV/m] / 20) * 10 ^ (-6) * Distance : 3 [m]) ^ 2 / 30 * 10 ^ 3)



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m/ 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m/ 3.0 m) = -9.54 dB

Radiated Spurious Emission

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-80 5530 MHz

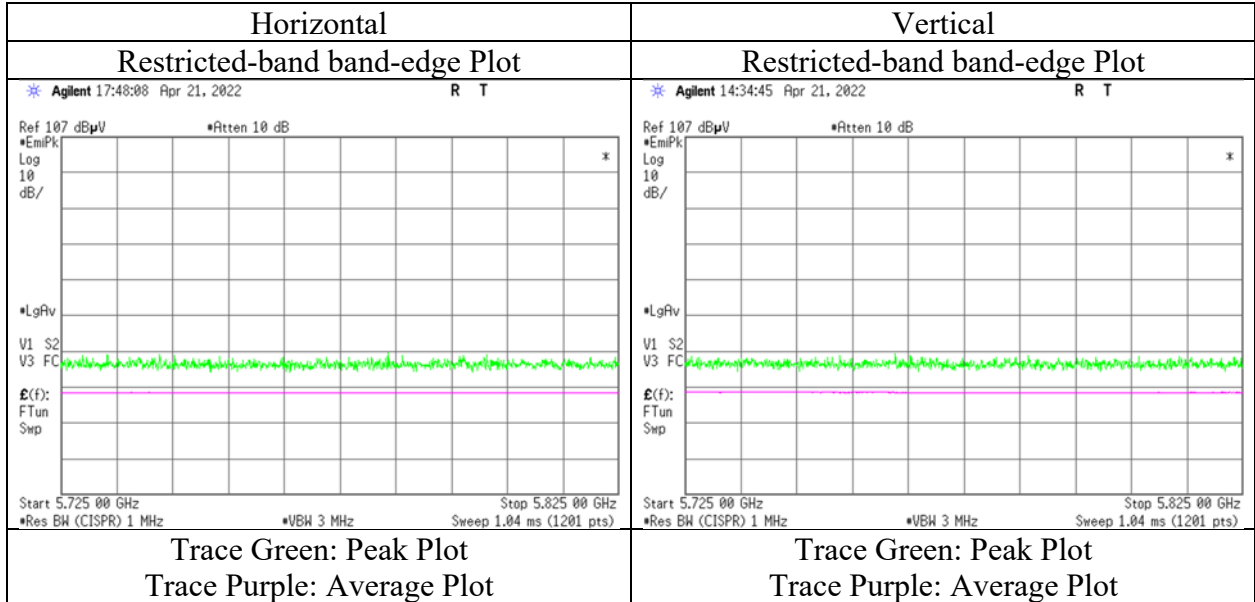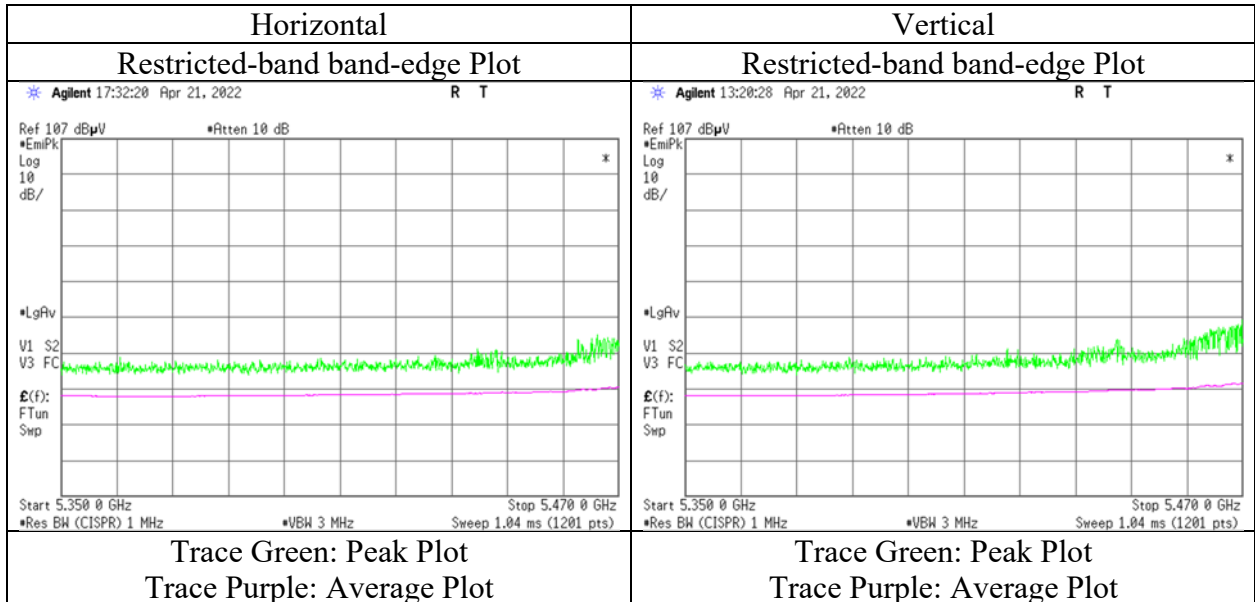

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber 1
Date May 5, 2022
Temperature / Humidity 20 deg.C, 40 %RH
Engineer Shiro Kobayashi
 (1 GHz -6.4 GHz)
Mode Tx 11ac-80 5775 MHz

(Calculation) (above 1 GHz Outside of the restricted band)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Result (EIRP) [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	5650.000	PK	45.93	32.06	17.63	39.87	2.42	58.17	-37.06	-27.0	10.0	222	29	-
Hori.	5700.000	PK	49.52	32.19	17.67	39.89	2.42	61.91	-33.32	10.0	43.3	222	29	-
Hori.	5720.000	PK	52.95	32.25	17.68	39.89	2.42	65.41	-29.82	15.6	45.4	222	29	-
Hori.	5722.563	PK	54.66	32.26	17.68	39.89	2.42	67.13	-28.10	21.4	49.4	222	29	-
Hori.	5725.000	PK	54.65	32.27	17.68	39.89	2.42	67.13	-28.10	27.0	55.1	222	29	-
Hori.	5850.000	PK	52.60	32.63	17.76	39.93	2.42	65.48	-29.75	27.0	56.7	222	29	-
Hori.	5852.492	PK	51.28	32.63	17.76	39.93	2.42	64.16	-31.07	21.3	52.3	222	29	-
Hori.	5855.000	PK	51.41	32.64	17.77	39.93	2.42	64.31	-30.92	15.6	46.5	222	29	-
Hori.	5866.288	PK	54.04	32.66	17.77	39.93	2.42	66.96	-28.27	12.4	40.6	222	29	-
Hori.	5875.000	PK	48.27	32.68	17.79	39.94	2.42	61.22	-34.01	10.0	44.0	222	29	-
Hori.	5925.000	PK	46.66	32.75	17.82	39.95	2.42	59.70	-35.53	-27.0	8.5	222	29	-
Vert.	5650.000	PK	48.09	32.06	17.63	39.87	2.42	60.33	-34.90	-27.0	7.9	109	246	-
Vert.	5700.000	PK	50.88	32.19	17.67	39.89	2.42	63.27	-31.96	10.0	41.9	109	246	-
Vert.	5720.000	PK	55.11	32.25	17.68	39.89	2.42	67.57	-27.66	15.6	43.2	109	246	-
Vert.	5722.035	PK	57.17	32.26	17.68	39.89	2.42	69.64	-25.59	20.2	45.7	109	246	-
Vert.	5725.000	PK	55.82	32.27	17.68	39.89	2.42	68.30	-26.93	27.0	53.9	109	246	-
Vert.	5850.000	PK	52.73	32.63	17.76	39.93	2.42	65.61	-29.62	27.0	56.6	109	246	-
Vert.	5851.125	PK	53.44	32.63	17.76	39.93	2.42	66.32	-28.91	24.4	53.3	109	246	-
Vert.	5855.000	PK	51.40	32.64	17.77	39.93	2.42	64.30	-30.93	15.6	46.5	109	246	-
Vert.	5866.204	PK	53.30	32.66	17.77	39.93	2.42	66.22	-29.01	12.4	41.4	109	246	-
Vert.	5875.000	PK	49.26	32.68	17.79	39.94	2.42	62.21	-33.02	10.0	43.0	109	246	-
Vert.	5925.000	PK	46.77	32.75	17.82	39.95	2.42	59.81	-35.42	-27.0	8.4	109	246	-

Result [dBuV/m] = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Result (EIRP [dBm]) = 10 * LOG ((10^(Electric Field Strength [dBuV/m] / 20) * 10^(-6) * Distance : 3 [m]) ^ 2 / 30 * 10^(-3))



*Other frequency noises omitted in this report were not seen or have enough margin (more than 20 dB).

Distance factor : 1 GHz - 10 GHz : 20log (3.96 m / 3.0 m) = 2.42 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission


Test place	Shonan EMC Lab.
Semi Anechoic Chamber	1
Date	May 5, 2022
Temperature / Humidity	20 deg.C, 40 %RH
Engineer	Shiro Kobayashi
Mode	Tx 11ac-80 5775 MHz

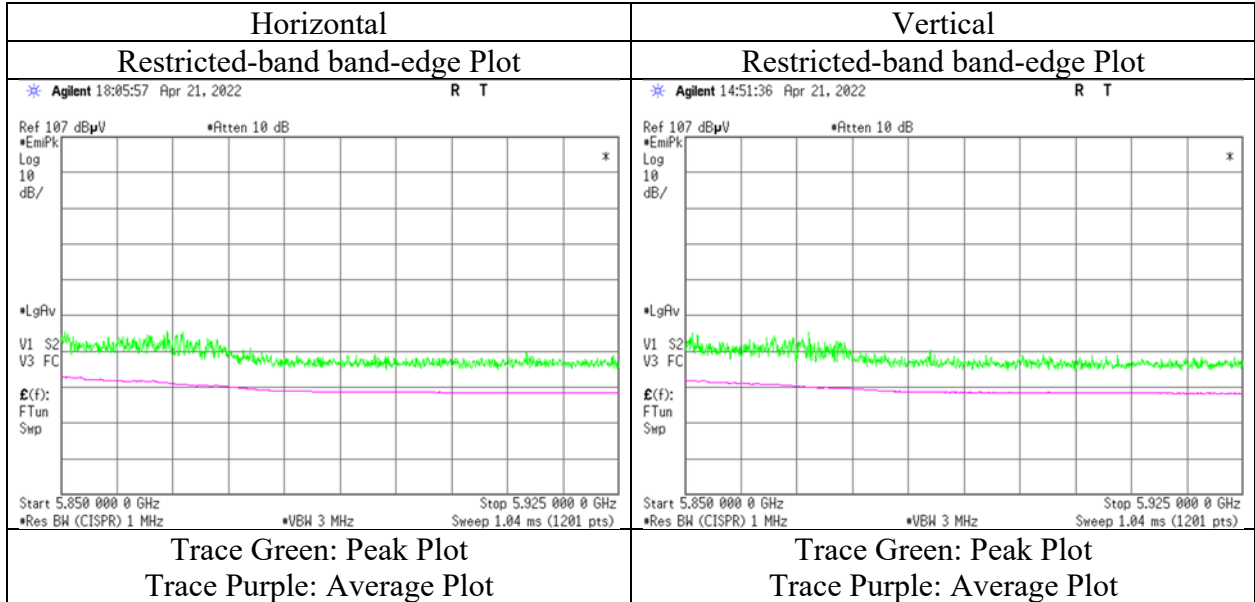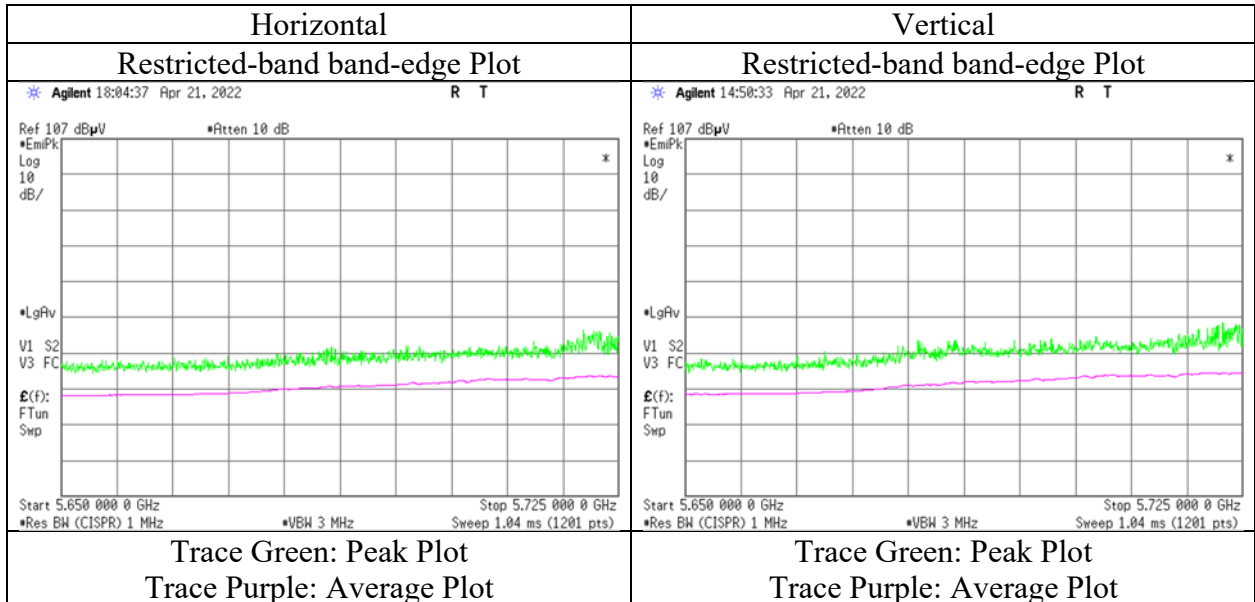

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Conducted Output Power)


Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	3	1	1	1
Date	May 18, 2022	May 1, 2022	May 7, 2022	May 8, 2022
Temperature / Humidity	22 deg.C, 44 %RH	20 deg.C, 46 %RH	21 deg.C, 47 %RH	21 deg.C, 51 %RH
Engineer	Shiro Kobayashi	Miku Ikudome	Miku Ikudome	Miku Ikudome
Mode	(30 MHz -1 GHz) Tx 11a 5745 MHz	(1 GHz -10 GHz)	(10 GHz -26.5 GHz)	(26.5 GHz -40 GHz)

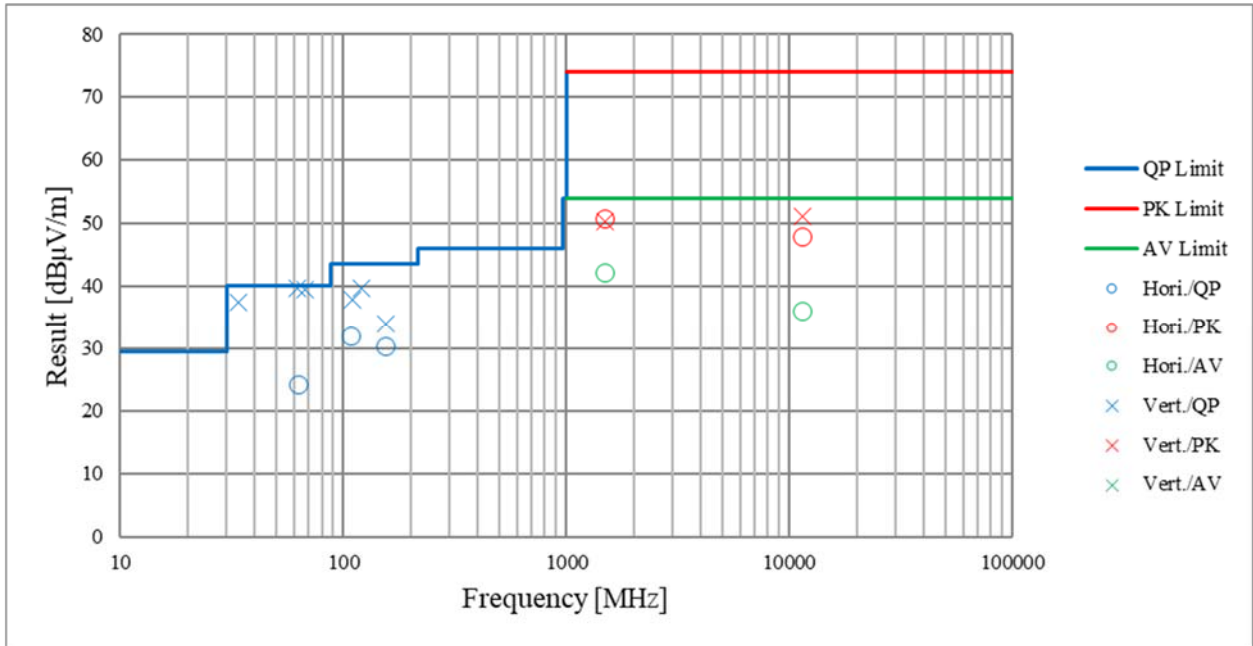

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place Shonan EMC Lab. No.5 Shielded Room
 Date May 17, 2022
 Temperature / Humidity 25 deg. C / 48 % RH
 Engineer Hiromasa Sato
 Mode Tx 11a 5745 MHz

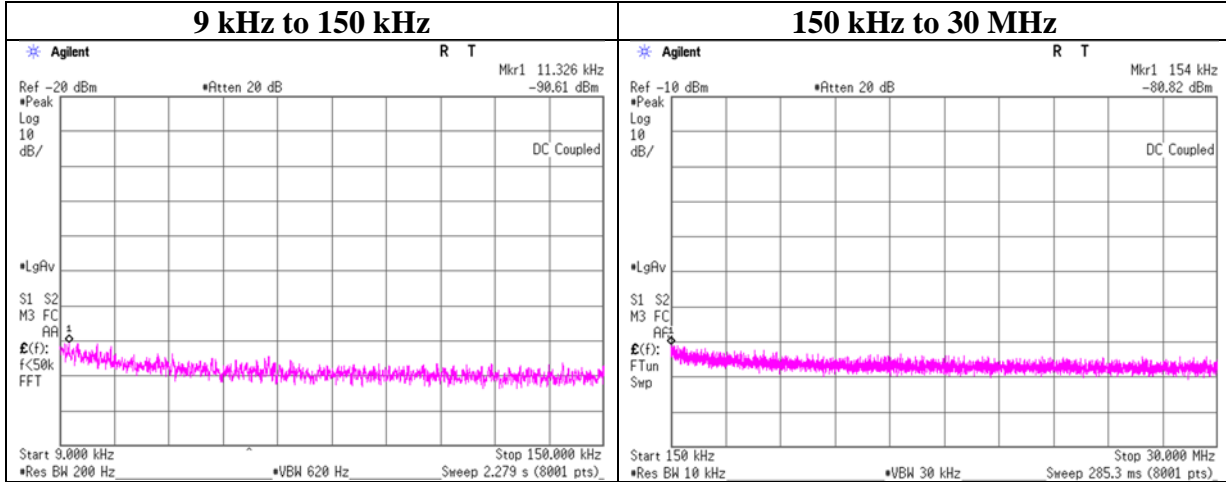

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.326	-90.61	2.99	9.81	7.12	1	-70.7	300	6.0	-9.4	46.5	55.9	-
154.000	-80.82	2.99	9.81	7.12	1	-60.9	300	6.0	0.4	23.8	23.4	-

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP[dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

APPENDIX 2: Test Instruments

Test Equipment [1/2]

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	-	-	-
RE	KAT10-S2	144892	Attenuator	Keysight Technologies Inc	8490D 010	6036	2021/10/07	12
RE	KBA-01	146343	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	1748	2021/06/12	12
RE	KFL-15	144938	Highpass Filter	MICRO-TRONICS	HPM50112	7	2021/10/05	12
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	KSA-08	145089	Spectrum Analyzer	Keysight Technologies Inc	E4446A	MY46180525	2021/10/13	12
RE	SAEC-01(SVSWR)	145561	Semi-Anechoic Chamber	TDK	SAEC-01(SVSWR)	1	2021/05/09	12
RE	SAEC-03(NSA)	145565	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	2022/04/15	12
RE	SAF-03	145126	Pre Amplifier	SONOMA	310N	290213	2022/02/24	12
RE	SAF-04	145127	Pre Amplifier	Toyo Corporation	TPA0118-36	2072554	2021/05/17	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2022/03/03	12
RE	SAF-10	145129	Pre Amplifier	Toyo Corporation	HAP26-40W	10	2022/03/03	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2021/10/05	12
RE	SAT6-13	167094	Attenuator	JFW	50HF-006N	-	2022/02/21	12
RE	SCC-C1/C2/C3/C4/C5/C10/SRSE-03	145171	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-271(RF Selector)	2022/04/20	12
RE	SCC-G05	145039	Coaxial Cable	Junkosha	J12J102207-00	APR-30-15-037	2022/01/06	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2022/03/03	12
RE	SCC-G41	151617	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S006	2022/01/06	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2021/05/18	12
RE	SCC-G62	196985	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803650/2	2022/03/08	12
RE	SCC-G68	200008	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575616/4	2021/07/06	12
RE	SHA-01	145383	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-725	2022/03/01	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2021/06/14	12
RE	SHA-06	145514	Horn Antenna	ETS-Lindgren	3160-10	00092383	2021/06/14	12
RE	SHA-08	194683	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	694	2022/03/01	12
RE	SJM-21	207278	Measuring Tool, Tape Measure	ASKUL	-	-	-	-
RE	SLA-01	145531	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	UHALP9108A	UHALP 9108-A 0888	2021/06/12	12
RE	SOS-20	191837	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
RE	SOS-23	191840	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12

Test Equipment [2/2]

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SRENT-15	160899	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46185516	2022/02/02	12
RE	STR-09	213530	Test Receiver	Rohde & Schwarz	ESW44	103068	2022/01/17	12
RE	STS-01	145792	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997812	2021/09/14	12
RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2021/09/14	12
AT	SAT10-14	154591	Attenuator	Weinschel Corp.	54A-10	81595	2022/04/01	12
AT	SAT10-15	160493	Attenuator	Weinschel Corp.	54A-10	83406	2021/12/07	12
AT	SCC-G63	196946	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803411/2	2022/03/01	12
AT	SCC-G65	196942	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803416/2	2022/03/01	12
AT	SOS-27	191845	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/01/25	12
AT	SRENT-22	202830	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250036	2021/12/01	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission

AT: Antenna Terminal Conducted test