

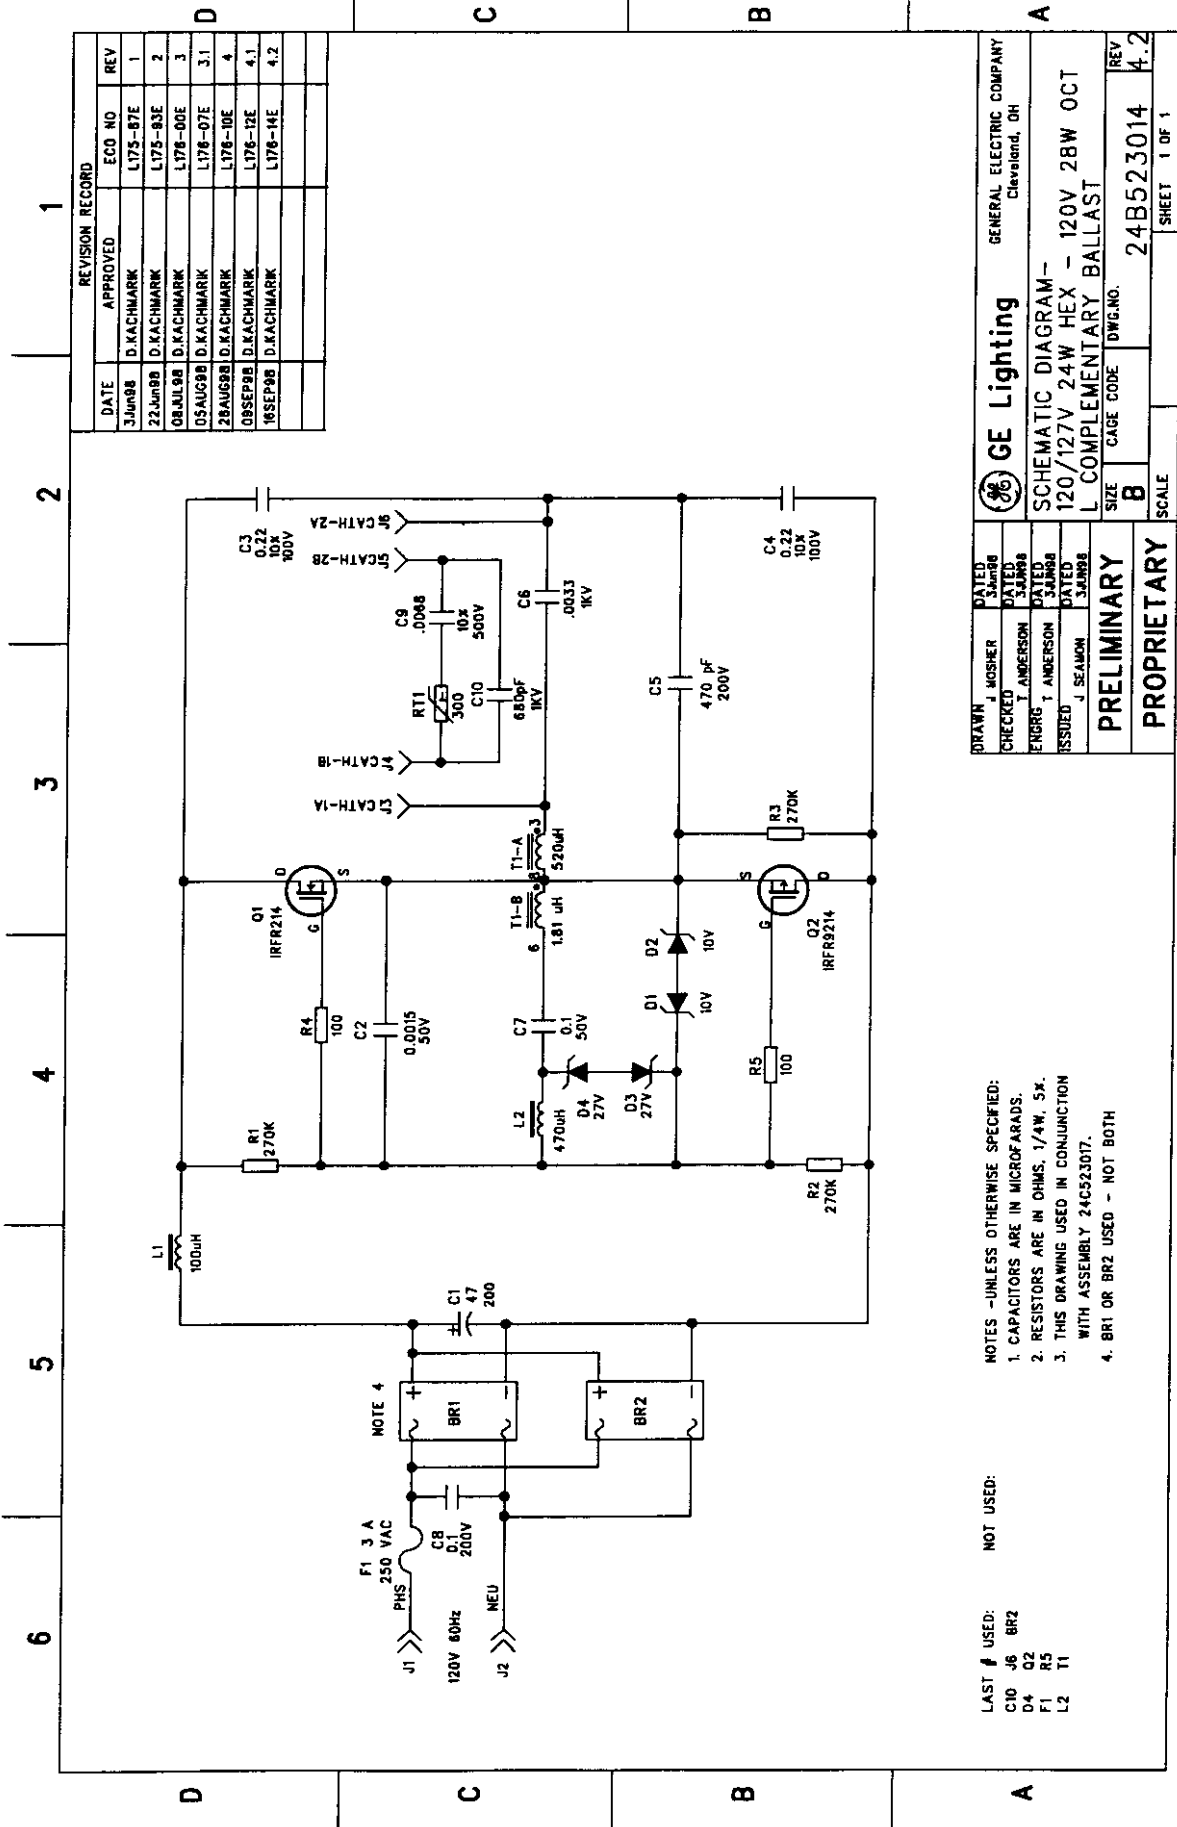


Exhibit D Schematic Diagram
 Model # FLE28QBX
 FCC ID: BLD28OLS-2

Parameter	Min.	Nom.	Max.
Input:			
Voltage {Vac}	108	120	132
Current {A}	0.410	0.433	0.450
Power {W}	27.0	27.6	28.2
Power Factor	0.47	0.48	0.49
THD {%}	167%	169%	170%
Output:			
Oper. Freq. {KHz}	-	96.0	-
Lamp Power {W}	24.5	25.2	25.9

NOTES: 1. Product Model: FLE28QBX/SPX27 - Biax™ Electronic Compact Fluorescent Bulb
Ballast P/N: PL24C523017 Rev. 4.2

2. FCC ID: BLD28OLS-2

3. Data taken at 1Ω source impedance.

				 GE Lighting GENERAL ELECTRIC CO Cleveland, OH	
				FLE28QBX/SPX27 "L-Complementary" System Electrical Parameters	
REV	ECO NO	DATE	APPROVAL	SIZE A	PRELIMINARY PROPRIETARY
DRAWN: J. BOYLE			16-OCT-98	ENGRG: J. BOYLE	
CHECKED:			ISSUED:		
			SHEET 1 OF 1		