

FCC PART 15.247

TEST REPORT

For

TOMY International Inc.

1111 W. 22nd. Street, Suite 320, Oak Brook, Illinois 60523, USA

FCC ID: BMWTFY7500C

Report Type: Original Report	Product Type: Baby Monitor (Baby)
Test Engineer: Ares Liu <i>Ares Liu</i>	
Report Number: R1DG111207001-00	
Report Date: 2012-01-06	
Merry Zhao <i>Merry Zhao</i>	
Reviewed By: EMC Engineer	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
STANDARD APPLICABLE	9
TEST DATA	9
FCC §15.203 – ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) - CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	23

APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	27
APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE	27
TEST DATA	27
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(d) - BAND EDGES TESTING	33
APPLICABLE STANDARD	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST PROCEDURE	33
TEST DATA	34

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *TOMY International, Inc.*'s product, model number: *Y7500C (FCC ID: BMWTFY7500C)* (the "EUT") in this report was a *Baby Monitor (Baby)*, which was measured approximately: 7.5 cm (L) x 5.7 cm (W) x 12.4 cm (H), rated input voltage: DC 5V charging from adapter.

Adapter Information: Switching Adapter
Model No.: SSA-6P-05 US 050 100;
Input: 100-240V~50/60Hz 200 mA;
Output: 5V DC 1000 mA

** All measurement and test data in this report was gathered from production sample serial number: 1112071 (Assigned by BACL, Shenzhen). The EUT was received on 2011-12-07.*

Objective

This report is prepared on behalf of *TOMY International, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the parent part with FCC ID: BMWTFY7500P.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

EUT Exercise Software


No Exercise Software.

Equipment Modifications

Add flimsy copper metal skin on the VBM1142-BU PCBA double-face local shielding RF radiation.
See the following photos



Block Diagram of Test Setup

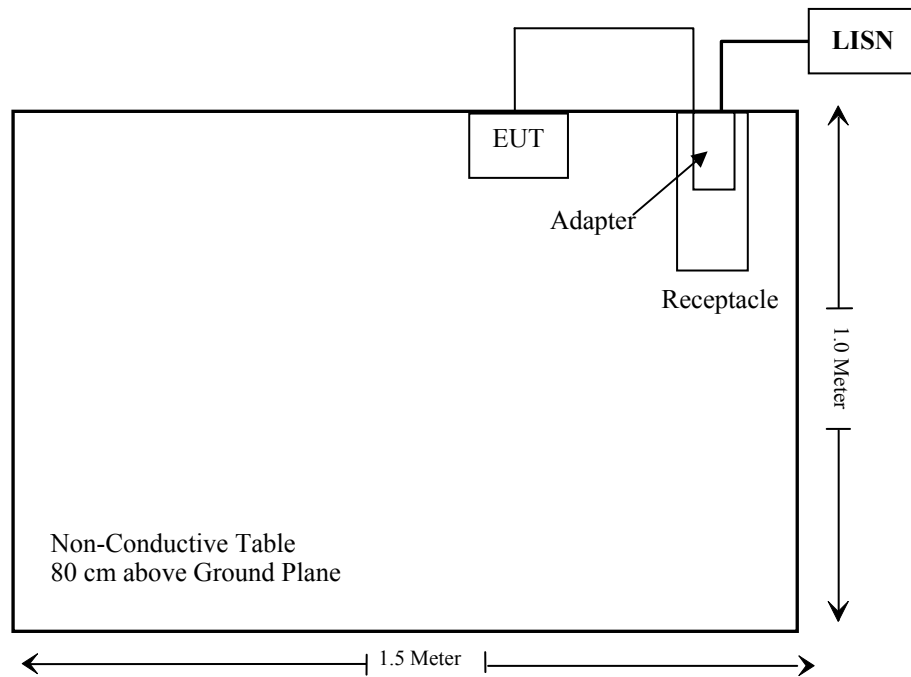

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally **numeric** gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2403	-1.5	0.71	16.03	40.09	20	0.0056	1
2440.5	-1.5	0.71	16.49	44.57	20	0.0063	1
2478	-1.5	0.71	16.46	44.26	20	0.0062	1

Result: The device meets FCC MPE limit at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT used two integral antenna permanently soldered to main board, the gain is -1.5 dBi, which fully in accordance to section 15.203, please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) - CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB ($k=2$, 95% level of confidence).

EUT Setup

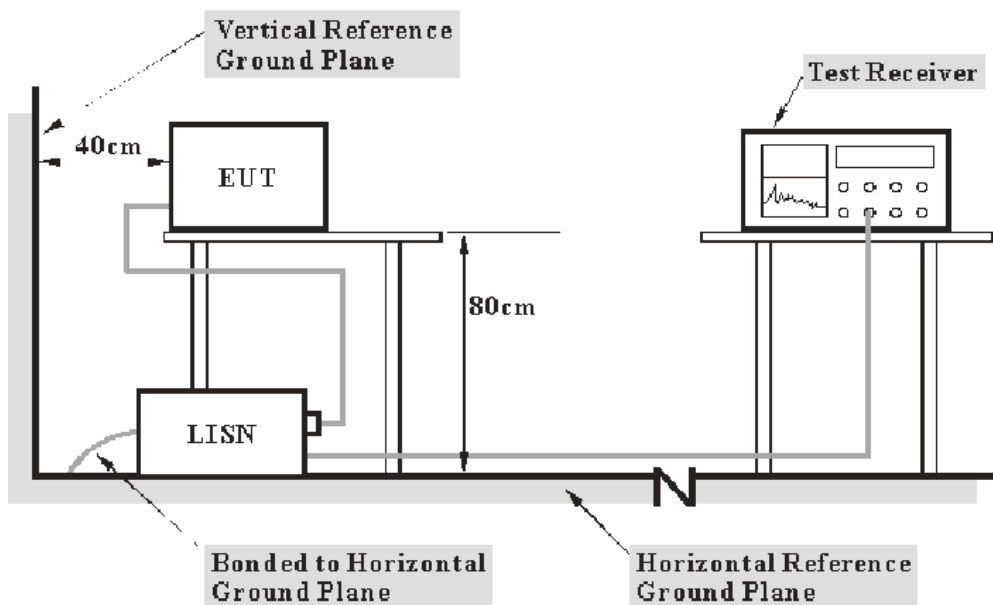

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

6.59 dB at 0.415 MHz in the **Line** conducted mode

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa


The testing was performed by Ares Liu on 2011-12-26.

Test Mode: Operating

AC 120 V, 60 Hz, Line:

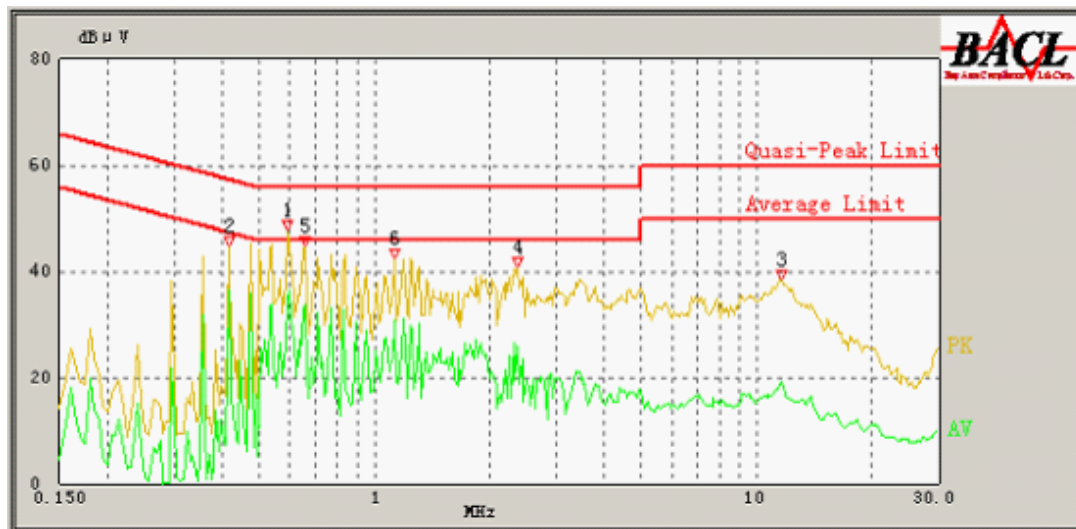

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.415	51.84	21.10	58.43	6.59	QP
0.590	34.83	18.10	46.00	11.17	Ave.
0.415	36.41	21.10	48.43	12.02	Ave.
0.655	33.87	15.93	46.00	12.13	Ave.
0.655	41.57	15.93	56.00	14.43	QP
1.125	30.87	11.10	46.00	15.13	Ave.
0.590	39.68	18.10	56.00	16.32	QP
2.370	25.97	11.10	46.00	20.03	Ave.
1.125	32.97	11.10	56.00	23.03	QP
2.370	25.75	11.10	56.00	30.25	QP
11.635	19.28	11.10	50.00	30.72	Ave.
11.580	28.73	11.10	60.00	31.27	QP

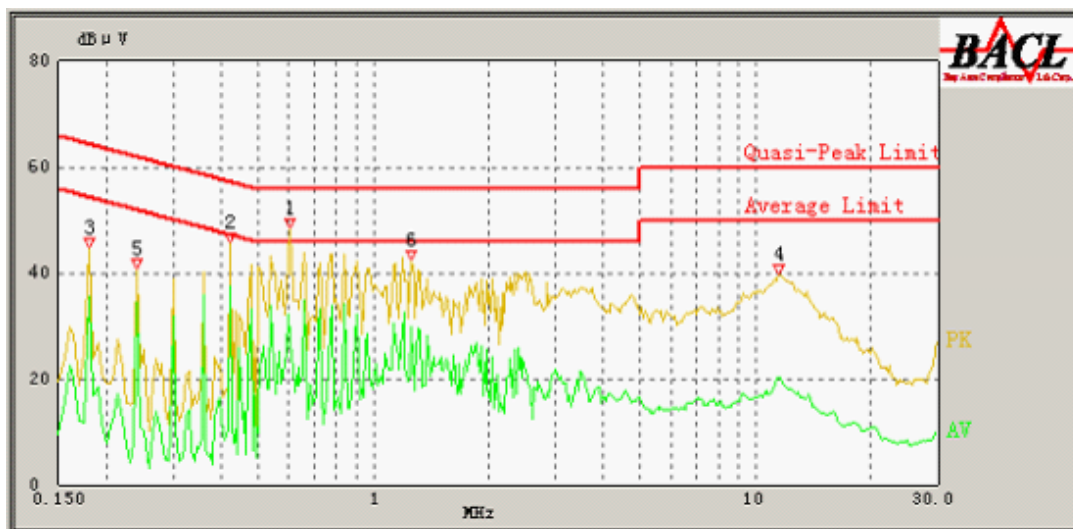AC 120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.420	50.24	22.10	58.29	8.05	QP
0.420	37.52	22.10	48.29	10.77	Ave.
0.240	52.16	25.10	63.43	11.27	QP
0.180	52.72	25.10	65.14	12.42	QP
1.260	29.94	11.10	46.00	16.06	Ave.
1.255	38.81	11.10	56.00	17.19	QP
0.240	34.64	25.10	53.43	18.79	Ave.
0.180	35.37	25.10	55.14	19.77	Ave.
0.610	23.66	16.80	46.00	22.34	Ave.
0.605	32.59	16.95	56.00	23.41	QP
11.440	30.23	11.10	60.00	29.77	QP
11.525	20.23	11.10	50.00	29.77	Ave.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB ($k=2$, 95% level of confidence).

EUT Setup

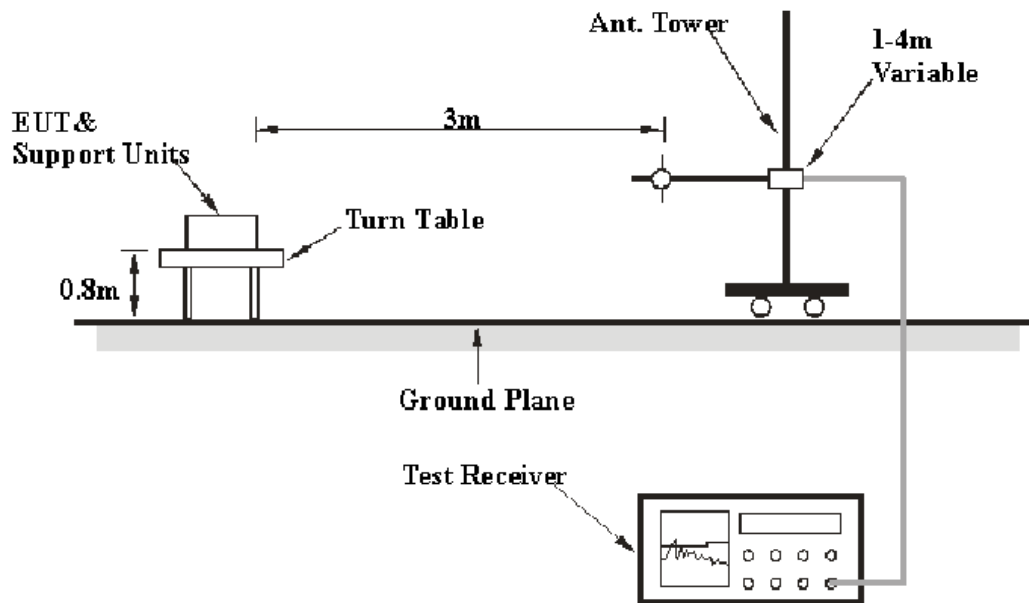

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Electro-Mechanics	Horn Antenna	3116	9510-2270	2011-10-11	2012-10-10
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:


4.06 dB at 4956 MHz in the Vertical polarization at High channel

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Ares Liu on 2011-12-22.

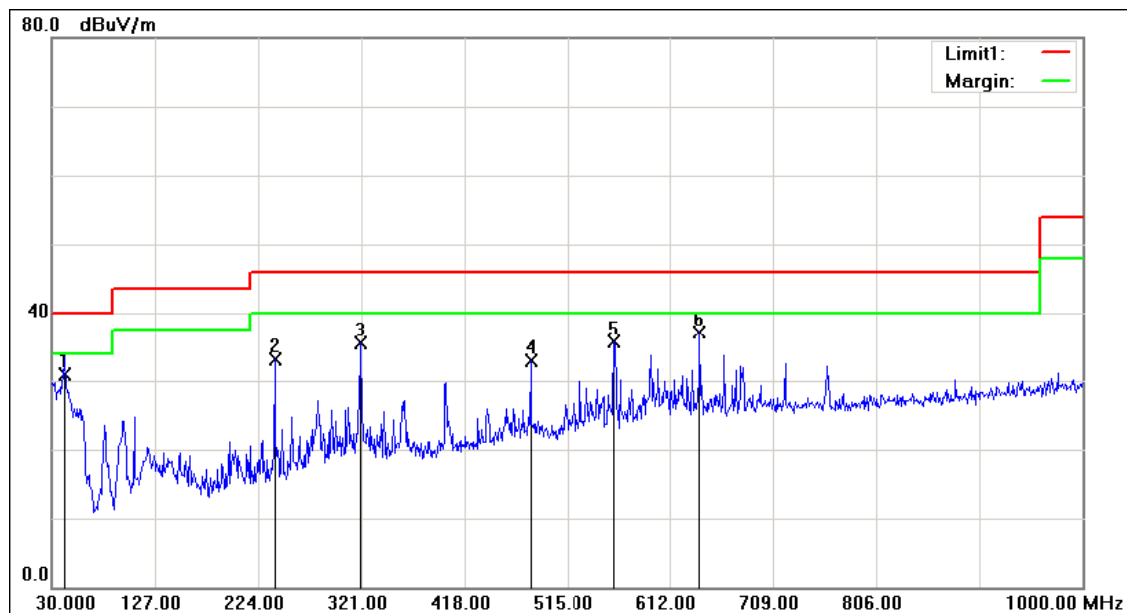30MHz - 1GHz:*Test Mode: Transmitting**Vertical*

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Ant. Polarity (H/V)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
640.1300	37.20	V	1.78	46.00	8.80
42.6100	30.98	V	-7.38	40.00	9.02
559.6200	35.72	V	0.18	46.00	10.28
320.0300	35.54	V	-4.37	46.00	10.46
239.5200	33.11	V	-6.83	46.00	12.89
480.0800	32.98	V	-0.53	46.00	13.02

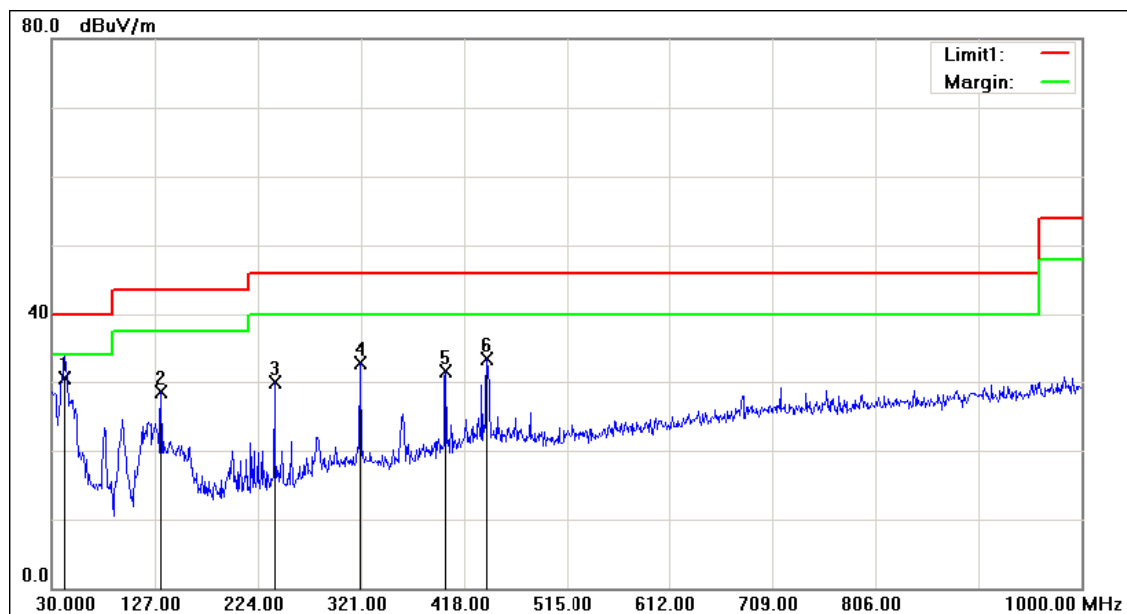Horizontal

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Ant. Polarity (H/V)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
41.6400	30.56	H	-6.71	40.00	9.44
439.3400	33.26	H	-1.68	46.00	12.74
320.0300	32.77	H	-4.37	46.00	13.23
400.5400	31.45	H	-2.51	46.00	14.55
132.8200	28.60	H	-5.47	43.50	14.90
239.5200	29.83	H	-6.83	46.00	16.17

1 – 25 GHz:

Indicated		Detector (PK/Ave.)	Antenna	Correction Factor			FCC Part 15.247/15.209/15.205							
Frequency	Receiver Reading		Polar (H/V)	Ant.	Cable	Pre-Amp.	Cord.	Limit	Margin	Comment				
(MHz)	(dBμV)			Factor	Loss	Gain	Amp.	(dBμV/m)	(dB)					
(dB/m)											(dB)	(dB)	(dBμV/m)	(dB)
Low Channel (2403 MHz)														
2275.5	23.48	Ave.	H	28.3	3.7	8.6	46.88	54	7.12	spurious				
2226.5	23.26	Ave.	V	28.3	3.7	8.6	46.66	54	7.34	spurious				
4806	14.96	Ave.	H	32.6	5.7	7.4	45.86	54	8.14	harmonic				
4806	14.38	Ave.	V	32.6	5.7	7.4	45.28	54	8.72	harmonic				
2275.6	19.04	Ave.	V	28.3	3.7	8.6	42.44	54	11.56	spurious				
2387	17	Ave.	H	29.7	3.7	8.5	41.9	54	12.1	spurious				
2275.5	37.61	PK	H	28.3	3.7	8.6	61.01	74	12.99	spurious				
4806	29.51	PK	H	32.6	5.7	7.4	60.41	74	13.59	harmonic				
4806	28.83	PK	V	32.6	5.7	7.4	59.73	74	14.27	harmonic				
2275.6	35.7	PK	V	28.3	3.7	8.6	59.1	74	14.9	spurious				
2226.5	35.25	PK	V	28.3	3.7	8.6	58.65	74	15.35	spurious				
2381	13.45	Ave.	V	29.7	3.7	8.5	38.35	54	15.65	spurious				
2387	30.09	PK	H	29.7	3.7	8.5	54.99	74	19.01	spurious				
2381	29.01	PK	V	29.7	3.7	8.5	53.91	74	20.09	spurious				
Middle Channel (2440.5 MHz)														
4880	15.52	Ave.	H	32.6	5.7	7.4	46.42	54	7.58	harmonic				
4880	14.96	Ave.	V	32.6	5.7	7.4	45.86	54	8.14	harmonic				
2216	38.8	PK	H	28.3	3.7	8.6	62.2	74	11.8	spurious				
2216	17.46	Ave.	V	28.3	3.7	8.6	40.86	54	13.14	spurious				
2216	36.96	PK	V	28.3	3.7	8.6	60.36	74	13.64	spurious				
2216	16.54	Ave.	H	28.3	3.7	8.6	39.94	54	14.06	spurious				
4880	28.77	PK	V	32.6	5.7	7.4	59.67	74	14.33	harmonic				
4880	28.59	PK	H	32.6	5.7	7.4	59.49	74	14.51	harmonic				
High Channel (2478 MHz)														
4956	16.87	Ave.	H	32.6	5.7	7.4	47.77	54	6.23	harmonic				
2205	17.12	Ave.	H	28.3	3.7	8.6	40.52	54	13.48	spurious				
4956	19.04	Ave.	V	32.6	5.7	7.4	49.94	54	4.06	harmonic				
4956	35.1	PK	H	32.6	5.7	7.4	66	74	8	harmonic				
2205	41.39	PK	H	28.3	3.7	8.6	64.79	74	9.21	spurious				
4956	32.17	PK	V	32.6	5.7	7.4	63.07	74	10.93	harmonic				
2206	37.66	PK	V	28.3	3.7	8.6	61.06	74	12.94	spurious				
2206	17.01	Ave.	V	28.3	3.7	8.6	40.41	54	13.59	spurious				
2491	13.47	Ave.	H	29.7	3.7	8.5	38.37	54	15.63	spurious				
2493	13.42	Ave.	V	29.7	3.7	8.5	38.32	54	15.68	spurious				
2491	29.72	PK	H	29.7	3.7	8.5	54.62	74	19.38	spurious				
2493	28.72	PK	V	29.7	3.7	8.5	53.62	74	20.38	spurious				

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in Operating mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


* The testing was performed by Ares Liu on 2012-01-06.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
2411	2.01	≥ 1.41	Pass

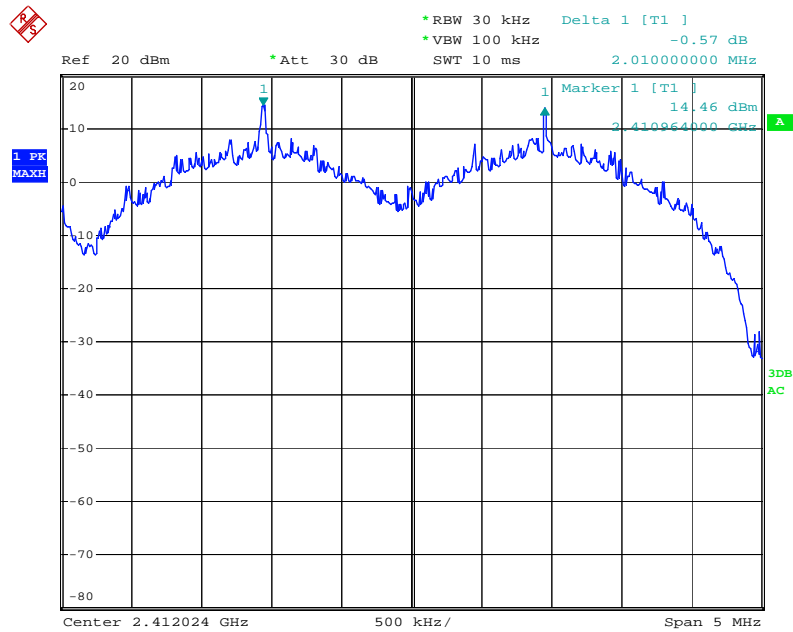

Date: 6.JAN.2012 12:17:13

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Ares Liu on 2012-01-06.

Test Result: Compliance.

Please refer to following tables and plots

Frequency (MHz)	20 dB Bandwidth (MHz)
2460.5	2.11



FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa


The testing was performed by Ares Liu on 2011-12-29.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	16	≥ 15

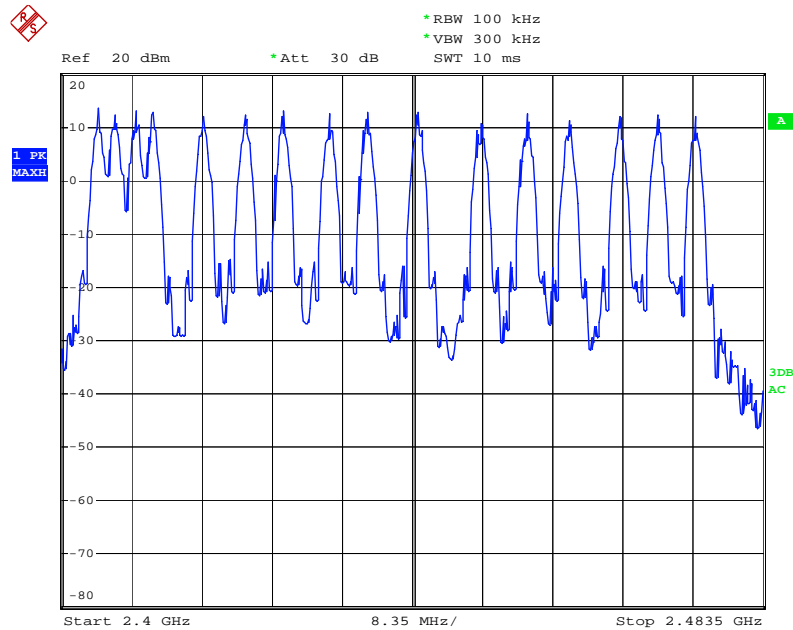Number of Hopping Channels

Date: 29.DEC.2011 12:37:13

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time= Pulse time*16*0.4*(15/5)

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


The testing was performed by Ares Liu on 2011-12-29.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
2449	19.5	0.374	0.4	Pass
Note: Dwell time= Pulse time*16*0.4*(15/5)				

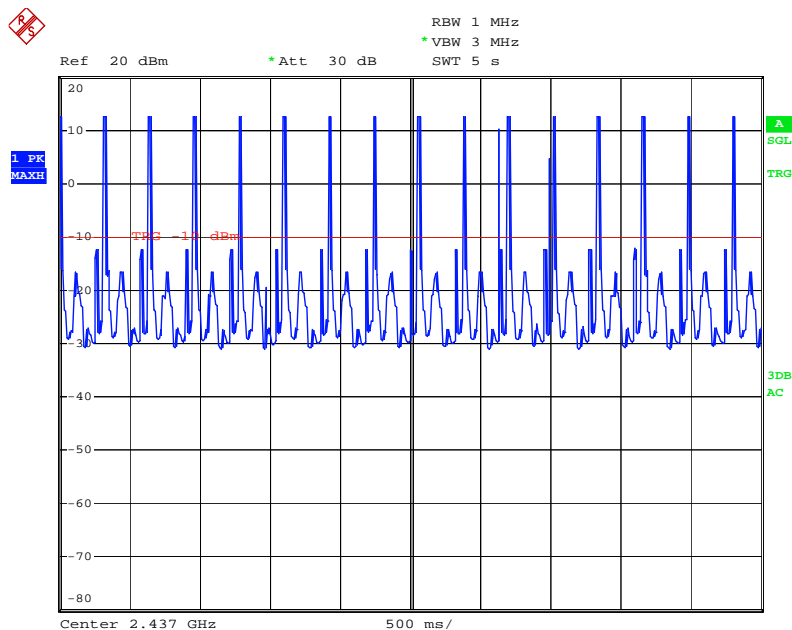

Date: 29.DEC.2011 16:15:55

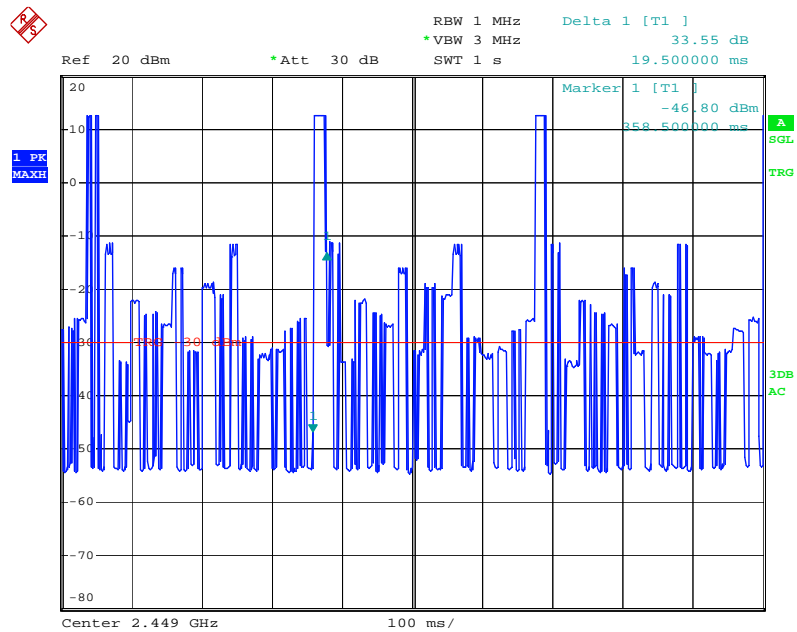

Date: 29.DEC.2011 17:10:38

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.

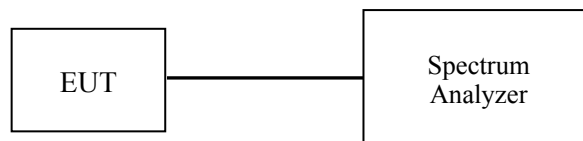

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Ares Liu on 2011-12-29.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Frequency (MHz)	Conducted Output Power		Part 15.247 Limit (mW)
	(dBm)	(mW)	
2403	16.03	40.09	125
2440.5	16.49	44.57	125
2478	16.46	44.26	125

Low Channel

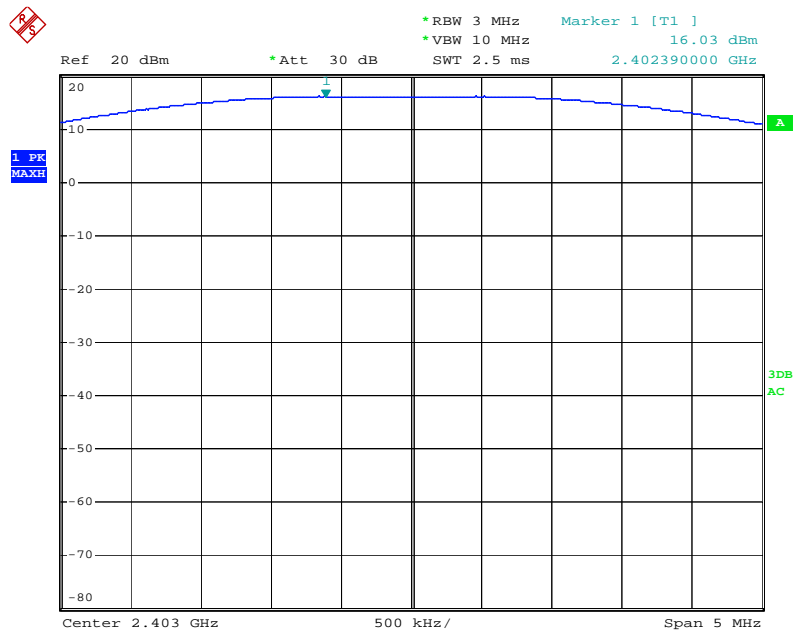


Date: 29.DEC.2011 11:08:53

Middle Channel

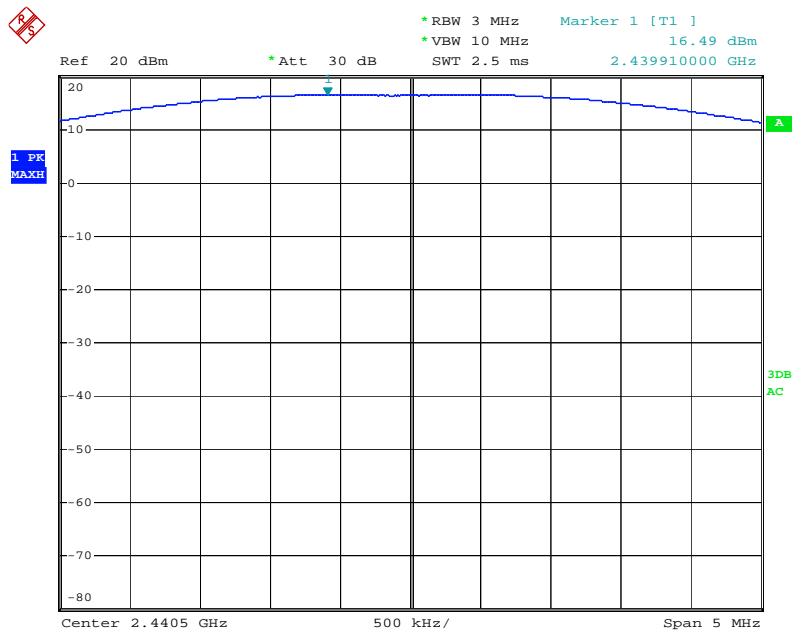

Date: 29.DEC.2011 11:08:33

High Channel

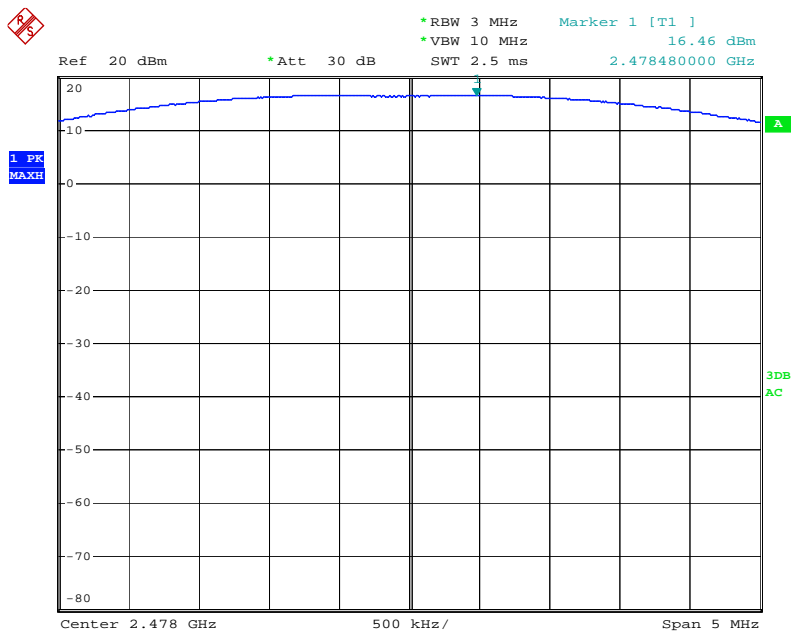

Date: 29.DEC.2011 11:09:40

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

*The testing was performed by Ares Liu on 2011-12-29.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)
2386.6	62.54	20
2494.4	59.72	20

Band Edge: Left Side

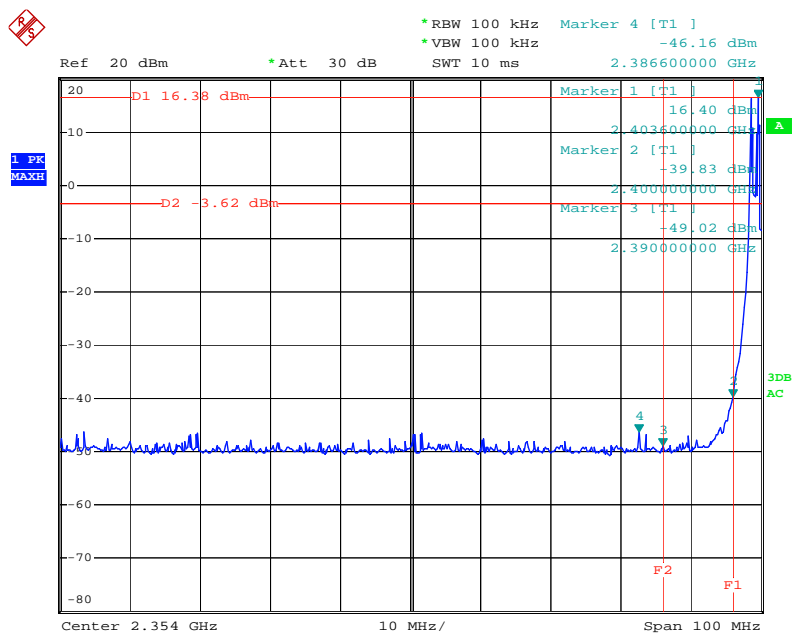

Date: 29.DEC.2011 15:05:19

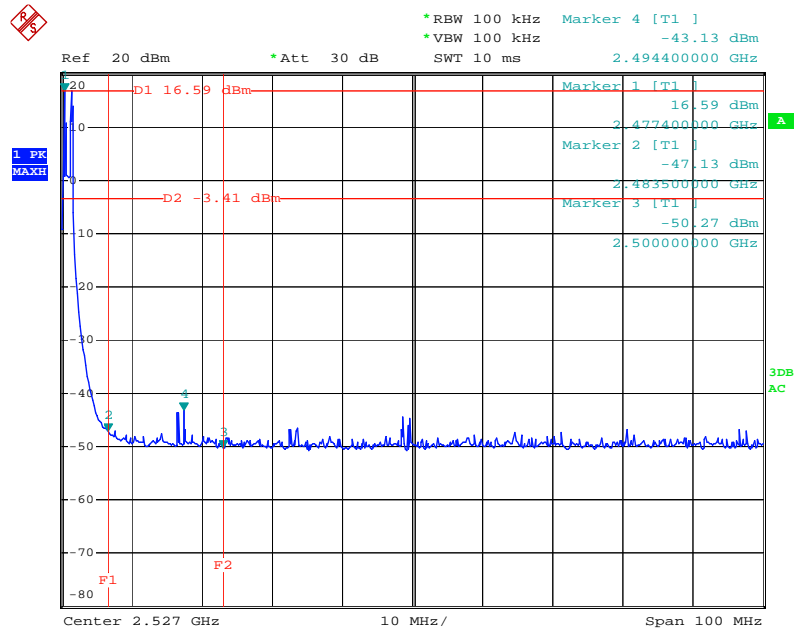Band Edge: Right Side

Date: 29.DEC.2011 15:07:26

******* END OF REPORT *******