



**FCC TEST REPORT**  
*for*  
**THALES ATM, INC.**  
**GLIDESLOPE**  
**Model #: 098786-0001**

# **GARWOOD LABORATORIES, INC.**

**TESTING AND ENGINEERING SERVICES**



## **EMC TEST REPORT**

**47 CFR Ch.1 (10-1-03 Edition)**  
**Parts 2, 15, & 87**

### **Report for:**

**THALES ATM, INC.**  
**Glideslope**  
**Model Number: 098786-0001**

Prepared For: Thales ATM, Inc.  
23501 West 84<sup>th</sup> Street  
Shawnee, KS 66227

Prepared By: Garwood Laboratories, Inc  
7829 Industry Avenue  
Pico Rivera, CA 90660

Created: January 28, 2008



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 3 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### RESPONSIBLE SIGNATURES

*This report is intended for the use by the organization to whom it is addressed, and will not be made available to any other parties without the expressed written consent of the aforementioned organization. This report shall not be reproduced, except in full, without the written approval of Garwood Laboratories, Inc.*

WRITTEN BY:	REVIEWED BY:	REVIEWED BY:
 Stephen Heyman Technical Writer	 William Flower Quality Manager	 Don Bennett Lab Manager - San Clemente

### DOCUMENT HISTORY

Revision	Issue Date	Description Of Modifications	Revised By	Approved By
NC	January 28, 2008	Initial release		
1	March 31, 2008	Split the GlideSlope and the Localizer into separate FCC reports, added peripherals and setup drawing, and corrected various typos.		
2	April 28, 2008	Corrected typos.		
3	March 2, 2009	Add limit lines to plots		



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 4 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### CLIENT INFORMATION

<i>Purchase Order</i>	T95208
<i>Quote Number</i>	GLIQ2900-E
<i>Company Name</i>	Thales ATM, Inc.
<i>Address</i>	23501 West 84 <sup>th</sup> Street
<i>City, State Zip</i>	Shawnee, KS 66227
<i>Contact Name</i>	Kevin L. McGahee
<i>Phone</i>	913-422-2739
<i>Fax</i>	N/A

### GARWOOD INFORMATION

<i>EMC Test Laboratory</i>	Garwood Laboratories, Inc.
<i>Address</i>	950 Calle Negocio
<i>City, State, Zip Code</i>	San Clemente, CA 92673
<i>Phone</i>	(949) 361-9189
<i>Fax</i>	(949) 361-9597
<i>Web Site</i>	www.garwoodlabs.com
<i>Contact Name</i>	Don Bennett
<i>Title</i>	EMI/EMC Manager
<i>E-Mail Address</i>	donb@garwoodlabs.com

### TESTING INFORMATION

<i>Test Personnel</i>	Rod Gayutin – Test Engineer
<i>Test Dates</i>	3, 4, 5, 7 6 December 2007



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 5 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

# Accreditations and Certifications

The Open Area Test Site (OATS) and measurement facilities used to collect the test data are located at Garwood Laboratories, Incorporated test facility in Pico Rivera, California. The test facility is recognized, certified, or accredited by the following organizations:



This site has been registered and fully described in a report filed with the **Federal Communications Commission (FCC)**. The acceptance letter from the FCC is maintained in our files. Designation Number: US1035. The current accreditation is effective through June 30, 2008. **Garwood Laboratories** is an authorized test laboratory for the DoC process.



TESTING CERTS #0741.01, #0741.02, #0741.03

The **American Association for Laboratory Accreditation** is an independent organization that provides third-party accreditation to calibration and testing laboratories. A2LA is a signatory on two Mutual Recognition Arrangements, the International Laboratory Accreditation Cooperation (ILAC) and the Asia Pacific Laboratory Accreditation Cooperation (APLAC). **Garwood Laboratories'** accredited A2LA scope includes a full offering of test methods under Mil-Std-461 and RTCA DO-160, European commercial requirements, Telcordia/NEBS, Mil-Std-810, Mil-Std-202 and many other electromagnetic and environmental test standards. The certification is valid through June 30, 2008.



**Garwood Laboratories, Inc.** has been assessed in accordance with ISO 17025 and with ITI's assessment criteria. Based upon this assessment, Technology International (Europe), Ltd. has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC). The scope of the approval was provided on a Schedule of Assessment supplied with a certificate and is available upon request. Cert 07-051, through June 14, 2008.



The **National Voluntary Laboratory Accreditation Program** is an organization formed under NIST that provides third-party accreditation to calibration and testing laboratories. NVLAP is a signatory on two Mutual Recognition Arrangements, the International Laboratory Accreditation Cooperation (ILAC) and the Asia Pacific Laboratory Accreditation Cooperation (APLAC). **Garwood Laboratories'** accredited NVLAP scope includes a full offering of electromagnetic effects test methods under Mil-Std-461 and RTCA DO-160, European commercial requirements, Telcordia/NEBS, and many other electromagnetic test standards. The certification is valid through March 31, 2008.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 6 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### TABLE OF CONTENTS

<i>MEASUREMENT / TECHNICAL REPORT SUMMARY</i> .....	7
<i>1. GENERAL INFORMATION</i> .....	8
<i>1.1 Product Description</i> .....	8
<i>1.2 Test Procedures</i> .....	8
<i>1.3 Tested System Description</i> .....	8
<i>1.4 Block Diagram of EUT</i> .....	9
<i>2. PRODUCT LABELING</i> .....	10
<i>2.1 FCC Compliance Labeling</i> .....	10
<i>2.2 Location of Label on EUT</i> .....	10
<i>2.3 Information to the User</i> .....	10
<i>3. SYSTEM TEST CONFIGURATION</i> .....	11
<i>3.1 Justification</i> .....	11
<i>3.2 EUT Exercise Software/Equipment</i> .....	11
<i>3.3 Special Accessories</i> .....	11
<i>3.4 Equipment Modifications</i> .....	11
<i>4. SUMMARY OF TEST RESULTS</i> .....	12
<i>4.1 RF Power Output Test Summary</i> .....	12
<i>4.2 Modulation Characteristics Test Summary</i> .....	13
<i>4.3 Occupied Bandwidth Test Summary</i> .....	14
<i>4.4 Spurious Emissions At Antenna Terminals Test Summary</i> .....	15
<i>4.5 Field Strength of Spurious Radiation Test Summary</i> .....	16
<i>4.6 Frequency Stability Test Summary</i> .....	17
<i>5. TEST MEASUREMENT PHOTOS</i> .....	18
<i>6. DETAILED TEST RESULTS</i> .....	20
<i>6.1 RF Power Output Test Results</i> .....	20
<i>6.2 Occupied Bandwidth Test Results</i> .....	22
<i>6.3 Spurious Emissions Test Results</i> .....	27
<i>6.4 Spurious Emissions At Antenna Terminals Test Results</i> .....	29
<i>APPENDIX A - TEST EQUIPMENT USED</i> .....	30
<i>APPENDIX B - ATTACHMENTS</i> .....	31



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 7 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### MEASUREMENT / TECHNICAL REPORT SUMMARY

<b>Type of Authorization</b>	47 CFR Ch.1 (10-1-03 Edition)
<b>Applicable FCC Rules</b>	<p>PART 2 - FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS</p> <p>Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 (10-1-03 Edition). The following subparts are applicable to the results in this test report:</p> <p>Part 2, Subpart J – Equipment Authorization Process (Certification)</p> <p>Paragraph 2.1046 – RF power output.</p> <p>Paragraph 2.1047 – Modulation Characteristics.</p> <p>Paragraph 2.1049 – Occupied bandwidth.</p> <p>Paragraph 2.1051 –Spurious emissions at antenna terminals.</p> <p>Paragraph 2.1053 –Field strength of spurious radiation.</p> <p>Paragraph 2.1055 –Frequency Stability.</p> <p>PART 15 – RADIO FREQUENCY DEVICES</p> <p>Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 (10-1-03 Edition), Part 15, Subpart C – Intentional Radiators</p> <p>PART 87 – AVIATION DEVICES</p> <p>Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 (10-1-03 Edition), Part 87, Subpart D – Technical Requirements</p>



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 8 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 1.0 GENERAL INFORMATION

#### 1.1 Product Description

<b>Equipment Under Test</b>	Glideslope
<b>Model Number</b>	098786-0001
<b>Description</b>	The Glideslope subsystem radiates from the ground providing elevation (vertical) guidance for a landing aircraft. The signal is transmitted to a visual display on the aircraft's VOR-LOC receiver, to assist the aircraft in easily finding the runway centerline. The ground-to-aircraft signal depicts the aircraft's approach position relative to the runway centerline.
<b>Clock Frequencies</b>	<i>Please consult the manufacturer for the EUT's operating frequencies.</i>

Refer to the products data sheet, which has been included as an Attachment to this report for additional details about the EUT.

#### 1.2 Test Procedures

The Glideslope was tested to Part 2, Subpart J of test standard 47 CFR Ch.1 (10-1-03 Edition). Part 87, Subpart D. and Part 15, Subpart C was verified pursuant to the procedures in Part 2, Subpart J (Ref: Part 15, Subpart C, Section 15.201 and Part 87, Subpart D, section 87.147).


#### 1.3 Tested System Description

The Tested System was configured with all typical terminations and operated to generate the maximum emissions during the test.

<b>Item No.</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Identification Numbers</b>
1.	Thales ATM	Remote Status Control Unit	<b>Model #:</b> 098767-0002 <b>Serial #:</b> 003
2.	Acer	RMS (Laptop Computer)	<b>Model #:</b> 708180-0001 <b>Serial #:</b> N/A

## FCC TEST REPORT FOR THALES ATM, INC.

### Test Setup

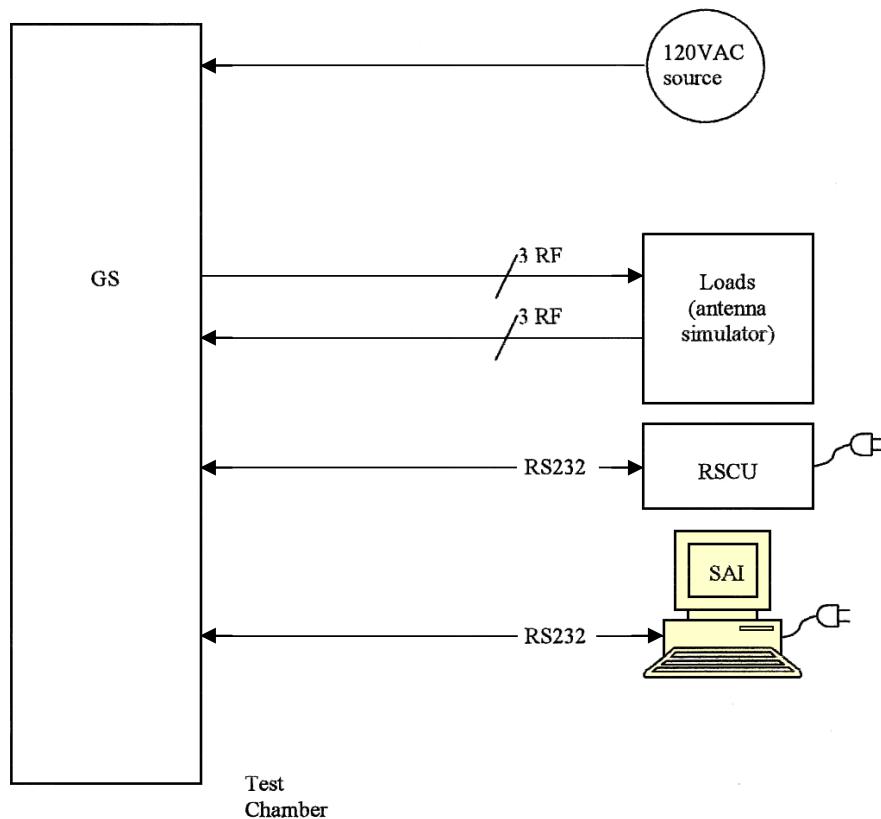

### 1.4 Block Diagram of EUT

The manufacturer has all block diagrams, circuit layout and component information on file at the manufacturing facility.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 10 of 31

---

## FCC TEST REPORT FOR THALES ATM, INC.

---

## 2.0 PRODUCT LABELING

### 2.1 FCC Compliance Labeling

The manufacturer (or importer) is responsible for having the compliance label produced, and for having it affixed to each unit that is marketed or imported. See the FCC website and applicable FCC documentation for labeling information

### 2.2 Location of Label on EUT

The label shall be located in a conspicuous location on the device. When the device is so small or for such use that it is not practicable to place the compliance label on it, the information required should be placed in a prominent location in the instruction manual or pamphlet supplied to the user. Alternatively, the label can be placed on the container in which the device is marketed.

### 2.3 Information to the User

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



# **GARWOOD LABORATORIES, INC.**

**7829 Industry Avenue, Pico Rivera, CA 90660**

**Phone: 888-427-4111 Fax: 562-949-8757**

***"Excellence Built  
On Integrity"***

**Report No: FR2900BSC**

**Revision No: 3**

**Page No: 11 of 31**

---

## **FCC TEST REPORT FOR THALES ATM, INC.**

---

### **3.0 SYSTEM TEST CONFIGURATION**

#### **3.1 Justification**

The EUT was used in a system configured for testing in a typical fashion, as a customer would normally use it.

#### **3.2 EUT Exercise Software/Equipment**

The Glideslope was connected to power, activated, and then operated continuously per its normal functional parameters. A customer-supplied program, pre-installed into the EUTs was run continuously testing.

#### **3.3 Special Accessories**

The EUT requires no special accessories to comply with the 47 CFR Ch.1, Part 87, Subpart D limits and requirements.

#### **3.4 Equipment Modifications**

No modifications were made to achieve the required specification limit.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 12 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 4.0 SUMMARY OF TEST RESULTS

#### 4.1 RF Power Output Test Summary

##### 4.1.1 Test Description

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted.

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The R.F. power output was measured at the antenna terminals by connecting a directional coupler to the antenna port and measuring the output power with a spectrum analyzer. The directional coupler had an impedance of  $50\Omega$  to match the impedance of the standard antenna and had a  $50\Omega$  load for termination.

##### 4.1.2 RF Power Output Test Summary

Localizer Channel (MHz)	Frequency (MHz)	PdBm	Pmw	P <sub>pk</sub> (Watts)	P <sub>carr ave</sub> (Watts)	Modulation
110.7 MHz	330.2 MHz	40.05	10,115	10.11	3.11	80%
110.1 MHz	334.4 MHz	39.77	9,484	9.5	2.93	80%

The specifications of Paragraph 2.1046 and applicable Parts of 87 are met. There are no deviations to the specifications. Refer to Section 6.1 for data sheet and test plots.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 13 of 31

---

## FCC TEST REPORT FOR THALES ATM, INC.

---

### 4.2 Modulation Characteristics Test Summary

#### 4.2.1 Test Description

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed shall be submitted.

The R.F. output was coupled to a Spectrum Analyzer and a modulation meter. The spectrum analyzer was used to observe the R.F. spectrum with the transmitter operating in its various modes.

#### 4.2.2 Test Summary Table for RF Power Output

The Glideslope transmitter incorporates a unique 90 and 150 Hz modulation scheme solely for use in the aviation services. Therefore, no modulation characteristics were measured for the Glideslope. The specifications of 2.1047 and applicable paragraphs of Part 87 are met. There are no deviations to the specifications.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 14 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 4.3 Occupied Bandwidth Test Summary

#### 4.3.1 Test Description

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

#### 4.3.2 Test Summary Table for Occupied Bandwidths

Glideslope:

Signal	Center Frequency (MHz)	Occupied Bandwidth (kHz)
CRS	330.2	1.5
CLR	330.2	1.5
Combined	330.2	10
CRS	334.4	1.5
CLR	334.4	1.5
Combined	334.4	10

Data was taken for the different signal paths. The Glideslope produced no deviations to the specifications. Requirements of 2.1049 and applicable parts of Paragraph 87 were met. Refer to Section 6.2 for data sheet and test plots.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 15 of 31

---

## FCC TEST REPORT FOR THALES ATM, INC.

---

### 4.4 Spurious Emissions At Antenna Terminals Test Summary

#### 4.4.1 Test Description

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna.

The R.F. output was coupled to a Spectrum Analyzer. The spectrum analyzer was used to observe the R.F. spectrum with the transmitter operated in all of the available modes. The frequency spectrum from 0 to 5 GHz was observed and plots produced of the frequency spectrum.

#### 4.4.2 Test Summary Table for Spurious Emissions At Antenna Terminals

Glideslope:

Frequency (MHz)	Spurious Frequency (MHz)	Level Below Carrier (dB)
334.4	668.8	60.27
	1003.2	66.1
	1337.6	65.83
	1672	65.35
	2006.4	64.85
	2340.8	64.55
	2675.2	64.69
	3009.6	64.33
	3344	64.99

There are no deviations to the specifications. Data was taken per 2.1051 and applicable parts of Part 87.135. Requirements of 2.1051 and applicable parts of Paragraph 87 were met. Refer to Section 6.3 for data sheet and test plots.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 16 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 4.5 Field Strength of Spurious Radiation Test Summary

#### 4.5.1 Test Description

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

The transmitter was placed on a wooden turntable 0.1 meters above the ground plane and at a distance of 3 meters from the antenna. The transmitter was activated and the frequency spectrum of the fundamental was observed. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude emission. The amplitude of the fundamental frequency was measured and recorded. The frequency spectrum was then searched for spurious emissions generated from the transmitter. The amplitude of each spurious emission was maximized by raising and lowering the FSM antenna and rotating the turntable before data was recorded. A log periodic antenna was used for frequencies of 200 MHz to 5 GHz and pyramidal horn antennas were used for frequencies of 5 GHz to 40 GHz. Emission levels were measured and recorded from the spectrum analyzer in dB $\mu$ V.

#### 4.5.2 Field Strength of Spurious Radiation Test Summary

*Note: The table limit calculation for table 4.5.2 was constructed using the following equations.  $E=[5.5 * (PG)^{1/2}] / d$ , values of  $P=10.1$ ,  $G=1.64$ ,  $d=3$ . This results in a value of  $7.64E6$  uV. Converting to dB $\mu$ V required calculation of  $20 * \log(7.64E6)$  resulting in 137.45 dB $\mu$ V. Using the emission mask requirement of  $43 + 10 \log P$  ( $43 + 10 \log(10.1) = 53.05$  dB) produces the limit of 84.4 dB $\mu$ V ( $137.45 - 53.05 = 84.4$ ).*

Frequency (MHz)	FSM Horizontal (dB $\mu$ V)	FSM Vertical (dB $\mu$ V)	CFS Horizontal @ 3m (dB $\mu$ V/m)	CFS Vertical @ 3m (dB $\mu$ V/m)	Limit
668.8	62.5	63.73	58.61	59.84	84.4
1003.2	41.58	39.27	40.17	37.86	84.4
1337.6	44.44	44.79	38.39	38.74	84.4
1672	46.2	45.89	42.64	42.33	84.4
2006.4	47.17	46.66	46.49	45.98	84.4
2340.8	53.9	50.01	54.07	50.18	84.4
2675.2	46.04	45.71	47.01	46.68	84.4
3009.6	46.48	45.85	48.98	48.35	84.4
3344	46.74	45.65	49.54	48.45	84.4

There are no deviations to the specifications. Specifications of Paragraph 2.1053 and 87.139 were met. Refer to Section 6.4 for data sheet and test plots.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 17 of 31

---

## FCC TEST REPORT FOR THALES ATM, INC.

---

### 4.6 Frequency Stability Test Summary

#### 4.6.1 Test Description

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability the frequency stability shall be measured with variation of primary supply voltage as follows:

1. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
2. For hand carried, batteries powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
3. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

#### 4.6.2 Frequency Stability Test Summary

*No Frequency Stability test was performed on the Glideslope per the customer's request. The test data will be supplied by the customer, and will be attached in the Appendix of this test report*



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 18 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 5.0 TEST MEASUREMENT PHOTOS



Glideslope Test Setup Photo



Glideslope Test Setup Photo



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 19 of 31

---

## FCC TEST REPORT FOR THALES ATM, INC.

---



**Glideslope Test Setup Photo**



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 20 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 6.0 – DETAILED TEST RESULTS

**General Comments** Section 6 pertains to the detailed test results for each of the test types applied to the EUT as summarized in section 4. All test equipment information is located in Appendix A.


#### 6.1 RF Power Output Test Results


##### Part 2.1046 RF Power Output

EUT: Glide Slope

LOC Channel (MHz)	Frequency	PdBm	Pmw	P <sub>pk</sub> (Watts)	P <sub>carr ave.</sub> (Watts)	Modulation
110.7MHz	330.2MHz	40.05	10,115	10.11	3.11	80%
110.1MHz	334.4MHz	39.77	9,484	9.5	2.93	80%

##### Test Configuration:

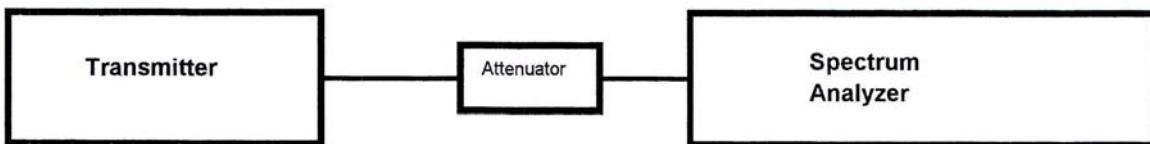



Testing services  
since 1954

# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC


Revision No: 3

Page No: 21 of 31


## FCC TEST REPORT FOR THALES ATM, INC.

### Section 2.1046: RF Output Power

Output Power 330.2MHz modulated @ 80%

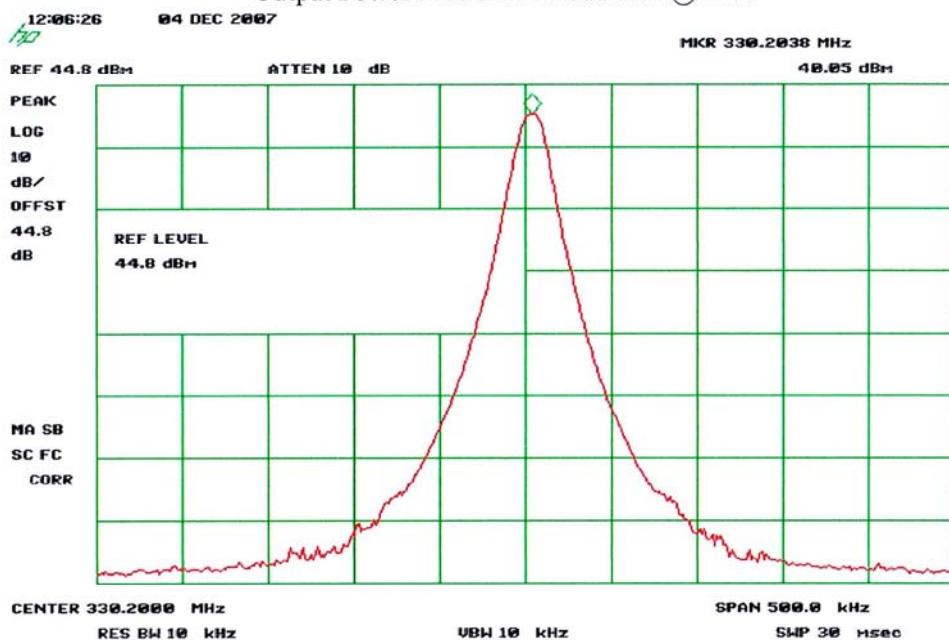

Output Power 334.4MHz modulated @ 80%

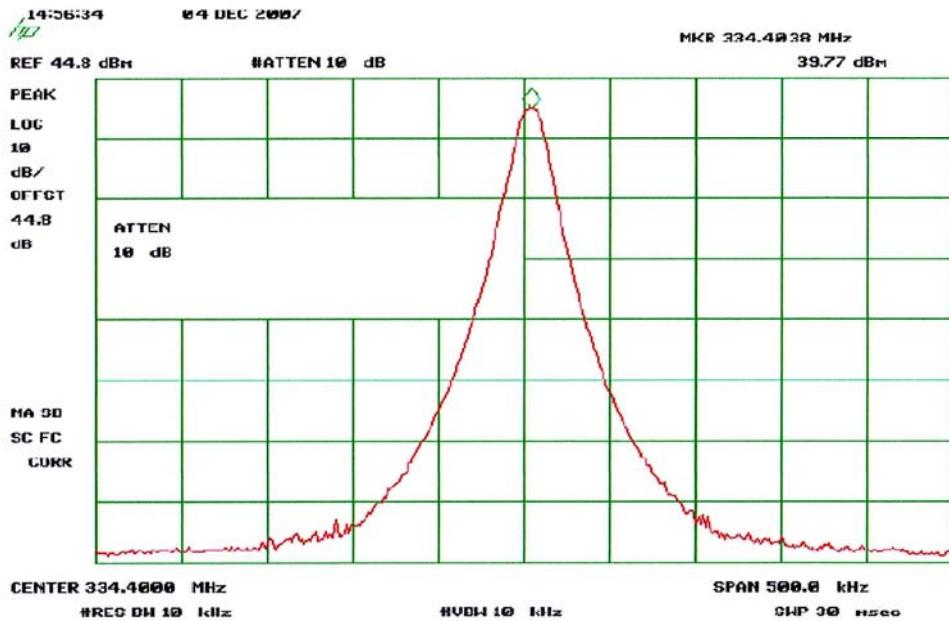



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 22 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 6.2 Occupied Bandwidth Test Results


#### Part 2.1049 Occupied Bandwidth


EUT: Glide Slope

Results:

		Center Frequency (MHz)	Occupied Bandwidth (kHz)
Signal	CRS	330.2	1.5
	CLR	330.2	1.5
	Combined	330.2	10
	CRS	334.4	1.5
	CLR	334.4	1.5
	Combined	334.4	10

#### Test Configuration:

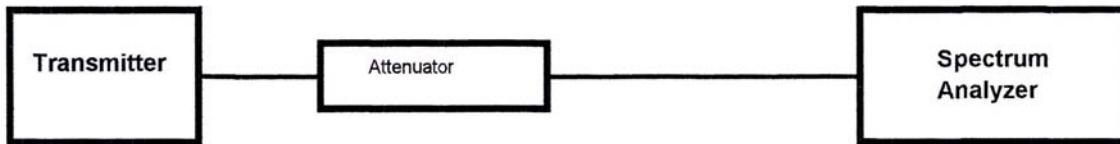



Testing services  
since 1954

# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 23 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### Section 2.1049: Occupied Bandwidth

Figure 1: Occupied Bandwidth Combined @ 330.2MHz



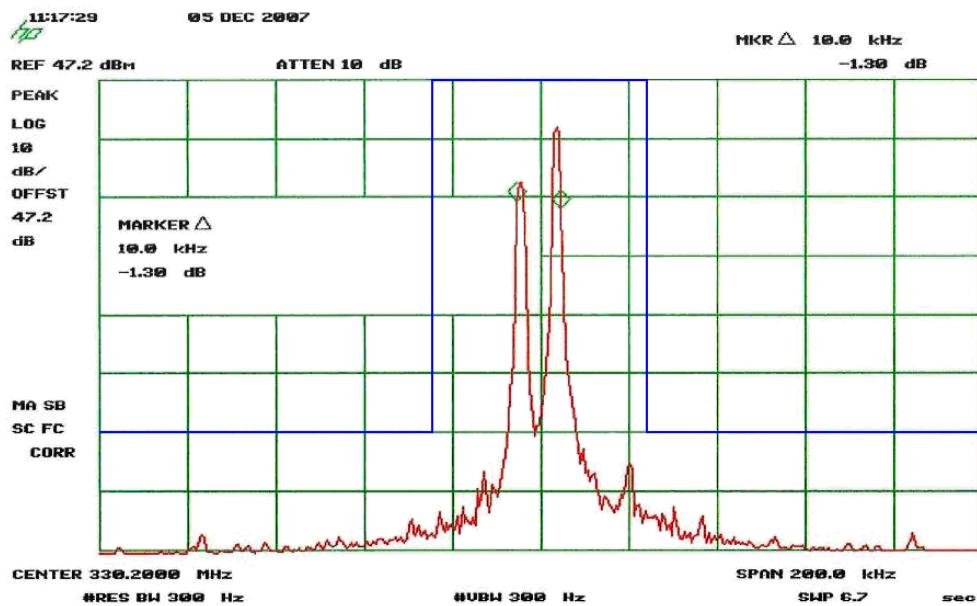


Figure 2: Occupied Bandwidth CLR @ 330.2MHz

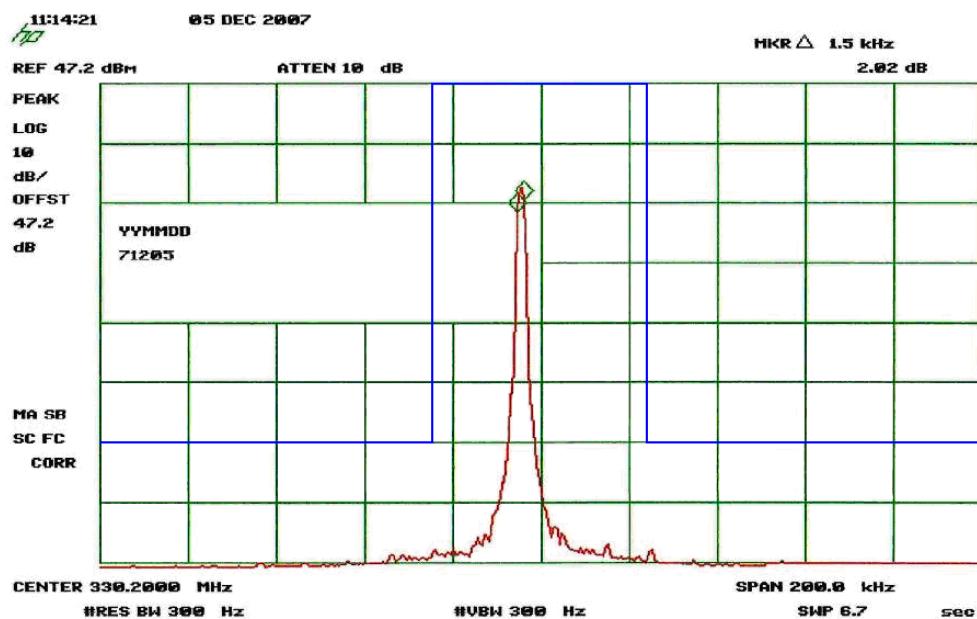



Testing services  
since 1954

# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"


Report No: FR2900BSC

Revision No: 3

Page No: 24 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

Figure 3: Occupied Bandwidth CRS @ 330.2MHz

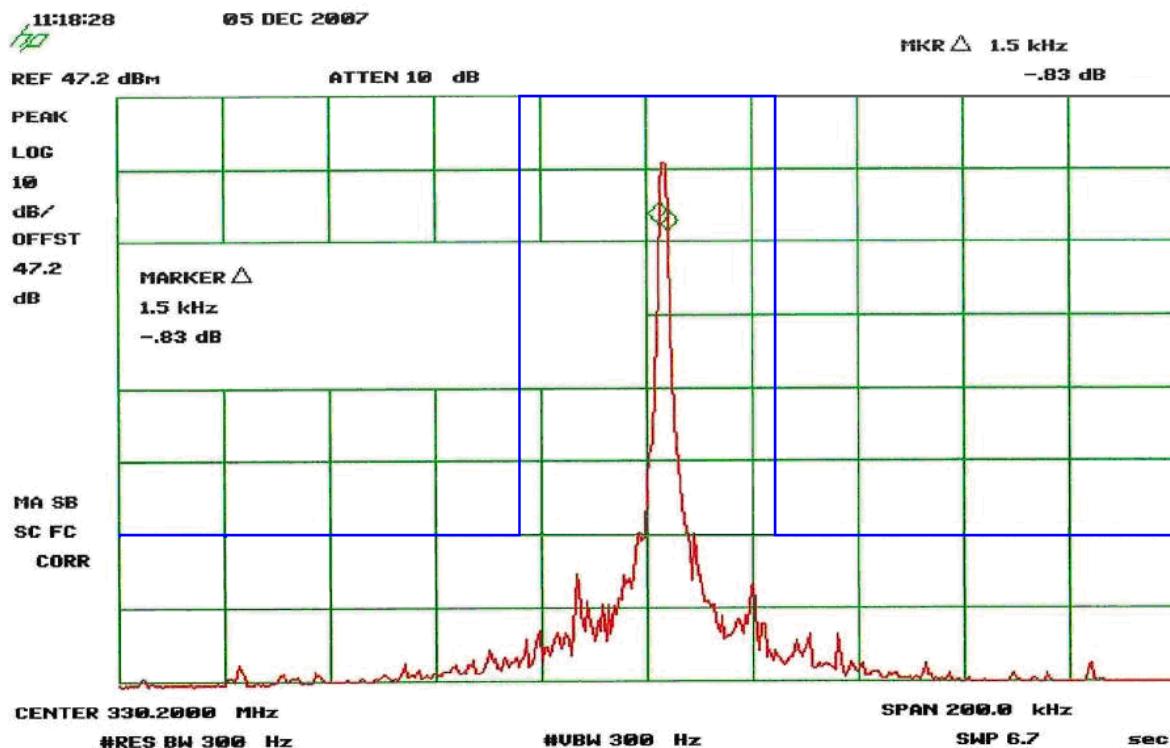



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 25 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

Figure 4: Occupied Bandwidth Combined @ 334.4MHz


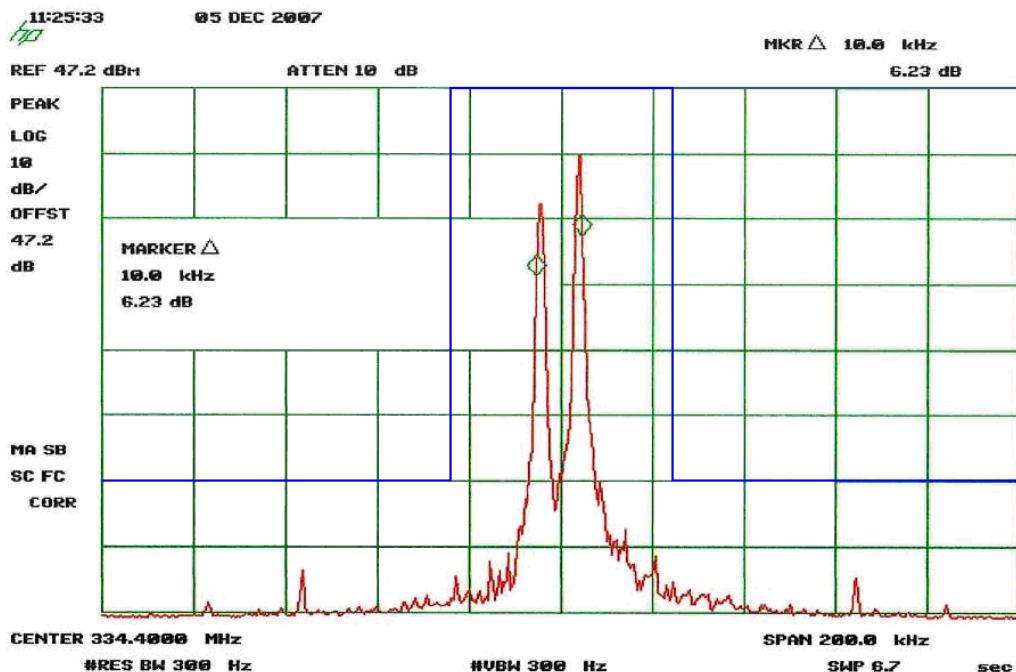


Figure 5: Occupied Bandwidth CRS @ 334.4MHz



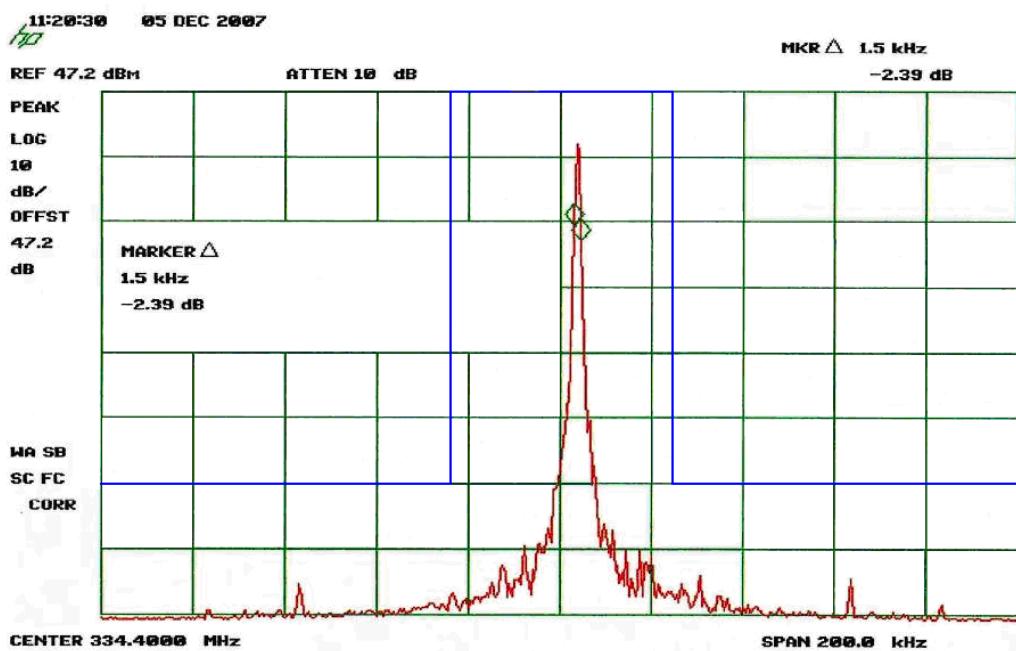

# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"


Report No: FR2900BSC

Revision No: 3

Page No: 26 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

Figure 6: Occupied Bandwidth CLR @ 334.4MHz

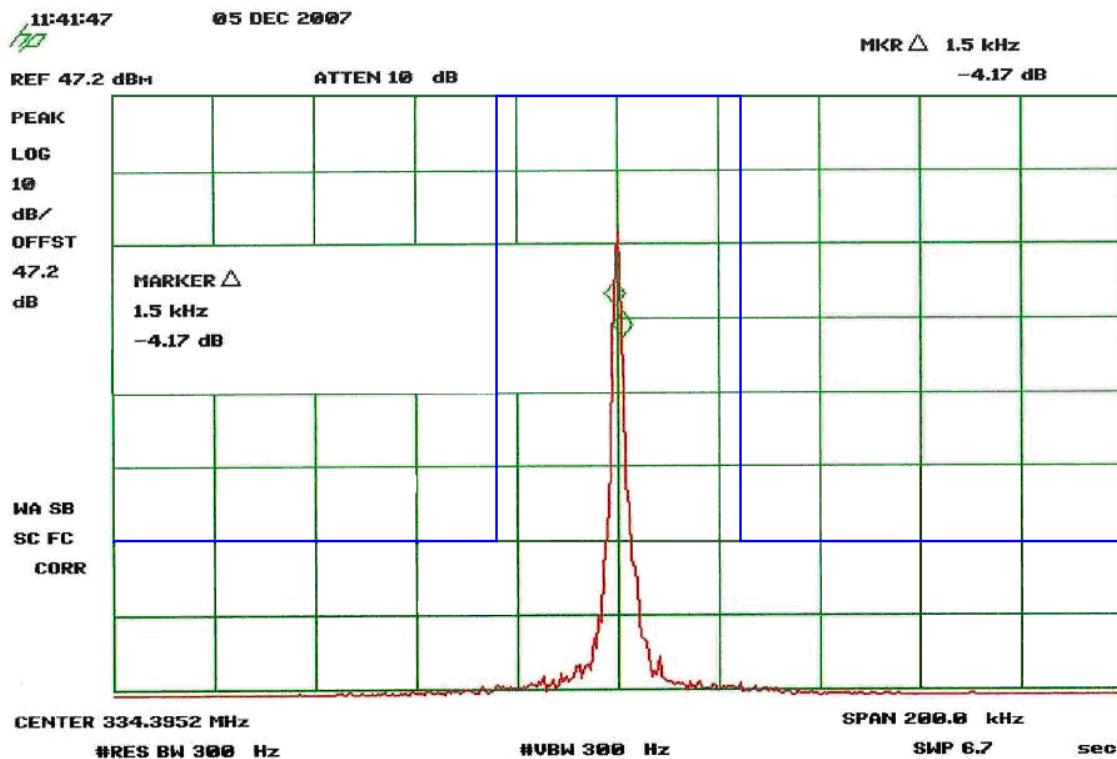



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 27 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 6.3 Spurious Emissions At Antenna Terminals Test Results


#### Glideslope

##### Part 2.1051 Spurious Emissions

EUT: Glide Slope

Frequency (MHz)	Spurious Frequency (MHz)	Level Below Carrier (dB)
334.4	668.8	60.27
	1003.2	66.1
	1337.6	65.83
	1672	65.35
	2006.4	64.85
	2340.8	64.55
	2675.2	64.69
	3009.6	64.33
	3344	64.99

##### Test Configuration:





Testing services  
since 1954

# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757


"Excellence Built  
On Integrity"

Report No: FR2900BSC  
Revision No: 3  
Page No: 28 of 31


## FCC TEST REPORT FOR THALES ATM, INC.

### Section 2.1051: Spurious Response @ Antenna Terminals

Spurious Response @ 334.4MHz

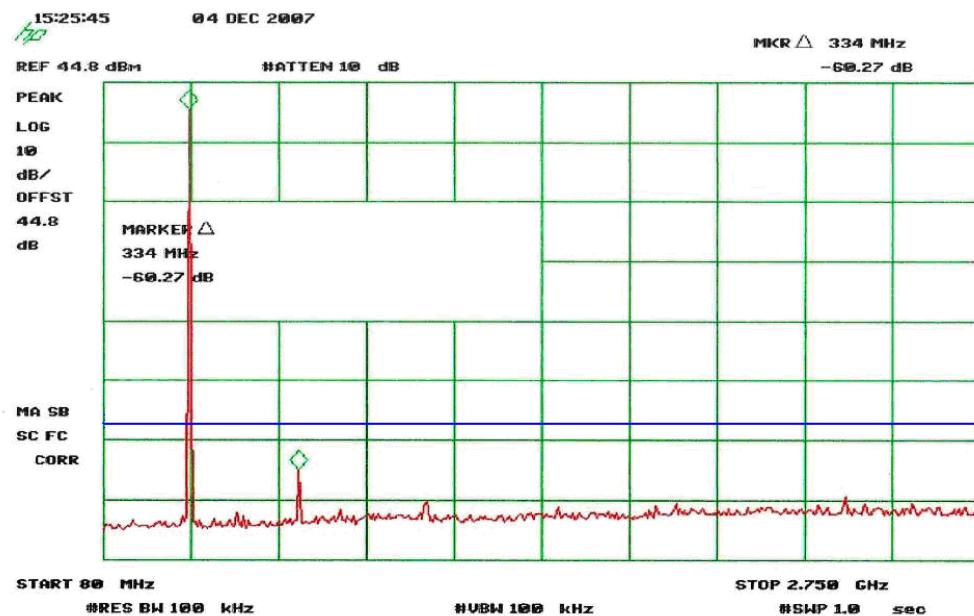

Range 1: 80MHz to 2.75GHz

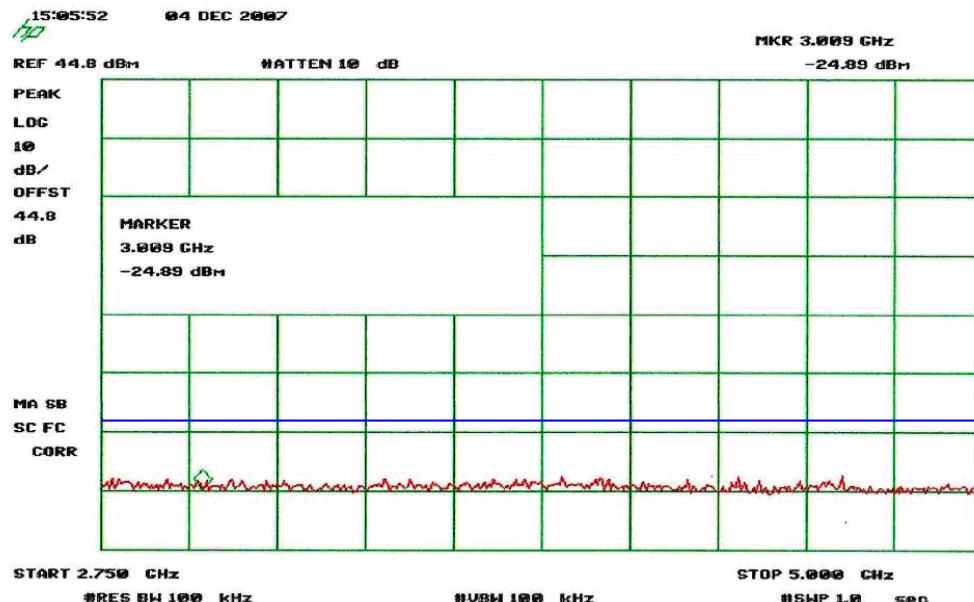

Range 2: 2.75GHz to 5GHz



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

"Excellence Built  
On Integrity"

Report No: FR2900BSC

Revision No: 3

Page No: 29 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### 6.4 Field Strength of Spurious Radiation Test Results

#### Glideslope

Part 2.1053 Field Strength Spurious Response

EUT: Glide Slope

Channel 334.4

Frequency (MHz)	FSM Horizontal (dBuV)	FSM Vertical (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Amp. Gain (dB)	CFS Horizontal @ 3m (dBuV/m)	CFS Vertical @ 3m (dBuV/m)	CFS Vertical @ 3m (dBuV/m)	Limit Vertical degrees	Horizontal degrees	Height meters	Height meters	Vertical Azimuth degrees
668.8	62.5	63.73	21.25	2.5	27.64	58.61	59.84	59.84	84.4	1.1	180	1.2	180
1003.2	41.58	39.27	23.4	2.8	27.61	40.17	37.86	37.86	84.4	1.1	180	1.1	180
1337.6	44.44	44.79	24.66	3.2	33.91	38.39	38.74	38.74	84.4	1.7	180	1.1	175
1672	46.2	45.89	26.3	3.5	33.36	42.64	42.33	42.33	84.4	1	180	1.2	170
2006.4	47.17	46.66	28.41	3.8	32.89	46.49	45.98	45.98	84.4	1.2	180	1.1	135
2340.8	53.9	50.01	29.12	4	32.95	54.07	50.18	50.18	84.4	1.2	180	1.2	180
2675.2	46.04	45.71	28.92	4.3	33.25	47.01	46.68	46.68	84.4	1.2	180	1.2	180
3009.6	46.48	45.85	30.7	4.3	32.5	48.98	48.35	48.35	84.4	1.4	180	1.3	180
3344	46.74	45.65	31.3	4.5	33	49.54	48.45	48.45	84.4	1.4	180	1.4	180

Ambient

Calculations made are as follows:

CFS = Calculated Field Strength


FSM = Field Strength Measurement

CFS = FSM+Antenna Factor+r-Cable Loss - Pre Amplifier Gain

CFS = 62.5 + 21.25 +2.5 - 27.64

CFS = 58.81

Test Configuration:





# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 30 of 31

## FCC TEST REPORT FOR THALES ATM, INC.

### APPENDIX A - TEST EQUIPMENT USED

The absolute performance calibration of equipment requiring calibration is performed on an as needed basis in accordance with ANSI/NCSL Z540-1-1994. The test equipment is capable of making measurements within tolerances of at least +/- 2dB amplitude and +/- 2% frequency deviation. Equipment certifications showing traceability to NIST (National Institute of Standards and Technology) are maintained on file at Garwood Laboratories, Inc. Pico Rivera, California. All equipment is checked and verified for proper operation before and after each series of tests.

#### A.1 Specific Equipment Used

Asset Number	Description	Manufacturer	Model Number	Serial Number	Calibration Due Date
20033	Pre Amplifier	Hewlett Packard	8447D	2443A03585	30-Aug-09
20090	Signal Generator	Marconi	2024	112257/58	18-Jul-08
40129	Spectrum Analyzer	Hewlett Packard	8593A	3044A0083	10-Oct-09
20003	Pre Amplifier	Hewlett Packard	8449B	3008A00357	12-Apr-09
N/A	Attenuator (10dB)	Narda	766-10	103758	UWCE
N/A	Attenuator (6dB)	Narda	766-6	105487	UWCE
8511	DRG Horn Antenna	Ailtech	3115	9607-4882	8-Jun-08
20089	Biconolog Antenna	AH Systems Inc.	SAS-521F-2	166	2-Jul-08
7940	Attenuator (20dB)	Pasternack	PE7021-20	N/A	8-Jan-08
7941	Attenuator (40dB)	Pasternack	PE7021-40	N/A	8-Jan-08

\*UWCE = Use With Calibrated Equipment.



# GARWOOD LABORATORIES, INC.

7829 Industry Avenue, Pico Rivera, CA 90660

Phone: 888-427-4111 Fax: 562-949-8757

*"Excellence Built  
On Integrity"*

Report No: FR2900BSC

Revision No: 3

Page No: 31 of 31

---

## FCC TEST REPORT FOR THALES ATM, INC.

---

### APPENDIX B -ATTACHMENTS

#### INDEX OF ATTACHMENTS

<i>Description of Contents</i>	<i>Page No.</i>
	- - - -