

Report No.: SZEM140300127801

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 52

FCC REPORT

Application No: SZEM1403001278RF

Applicant: Philips Consumer Lifestyle

Manufacturer:IDT Technology limitedFactory:IDT Technology limited

Product Name: Personal Activity Monitor

Model No.(EUT): DL8725

Add Model No.: DL8725/XX ("X" can be A-Z or 0-9)

Trade Mark: Philips

FCC ID: BOUDL8725

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-03-31

Date of Test: 2014-04-03 to 2014-04-12

Date of Issue: 2014-05-04

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140300127801

Page: 2 of 52

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r01	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: DL8725, DL8725/XX ("X" can be A-Z or 0-9)

Only the Model DL8725 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on exterior printing.



Report No.: SZEM140300127801

Page: 3 of 52

3 Contents

			Page
1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3		ONTENTS	
4		ENERAL INFORMATION	
	4 1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	7
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	EQUIPMENT LIST	8
5	TE	EST RESULTS AND MEASUREMENT DATA	11
	5.1	Antenna Requirement	11
	5.2	CONDUCTED EMISSIONS	
	5.3	CONDUCTED PEAK OUTPUT POWER	
	5.4	6DB OCCUPY BANDWIDTH	19
	5.5	Power Spectral Density	22
	5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	25
	5.7	Spurious RF Conducted Emissions	27
	5.8	RADIATED SPURIOUS EMISSION	
	5.8	8.1 Spurious Emissions	
	5.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	43-52



Report No.: SZEM140300127801

Page: 4 of 52

4 General Information

4.1 Client Information

Applicant:	Philips Consumer Lifestyle
Address of Applicant:	5/F., Philips Electronics Building, 5 Science Park East Avenue, Hong Kong
Manufacturer:	IDT Technology limited
Address of Manufacturer:	Block C, 9/F., Kaiser Estate, Phase 1, 41Man YueStreet, Hunghom, Kowloon, Hong Kong.
Factory:	IDT Technology limited
Address of Factory:	Chentian industrial Estate Xixiang, BaoAn, ShenZhen, PRC

4.2 General Description of EUT

Product Name:	Personal Activity Monitor
Model No.:	DL8725, DL8725/XX ("X" can be A-Z or 0-9)
Trade Mark:	Philips
	·
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK
Number of Channel:	40
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
EUT Function:	Personal Activity Monitor
Antenna Type:	Integral
Antenna Gain:	-1.5dBi
Power Supply:	USB Charge
. , ,	3.7V 60mAh (Li-ion Rechargeable Battery)
Test Voltage:	AC 120V 60Hz
	DC 3.7V battery fully charged
USB Cable:	10cm (Unshield)



Report No.: SZEM140300127801

Page: 5 of 52

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz





Report No.: SZEM140300127801

Page: 6 of 52

4.3 Test Environment

Operating Environment:		
Temperature:	22.0 °C	
Humidity:	52 % RH	
Atmospheric Pressure:	1010 mbar	

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Adapter	Supply by SGS	N/A

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140300127801

Page: 7 of 52

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM140300127801

Page: 8 of 52

4.10 Equipment List

	Conducted Emission	n			
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24



Report No.: SZEM140300127801

Page: 9 of 52

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04



Report No.: SZEM140300127801

Page: 10 of 52

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140300127801

Page: 11 of 52

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.5dBi.





Report No.: SZEM140300127801

Page: 12 of 52


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz	Hz		
Limit:	Francisco (MIII-)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		
Test Procedure:	The mains terminal distur room.	bance voltage test was	s conducted in a shid	elded
	 The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded. The tabletop EUT was place ground reference plane. A placed on the horizontal ground reference plane. A reference plane in the EUT shall be 0.4 m vertical ground reference plane. The LISN unit under test and bonded mounted on top of the ground between the closest points the EUT and associated en the EUT and associated en the closest points and all of the in ANSI C63.10: 2009 on corrected 	etwork) which provides bles of all other units of SN 2, which was bondene way as the LISN 1 for the way as the LISN 1 for the way as the LISN 1 for the outlet strip was used ISN provided the rating coded upon a non-metallished for floor-standing arround reference plane, the a vertical ground reference plane was bonded to the I 1 was placed 0.8 m from the vertical ground reference plane. The sof the LISN 1 and the quipment was at least 0 the the provided the relative the strip was been such that the provided to the the provided that the provided the the the provided that the provided that the provided the the provided that the provided	s a 50Ω/50μH + 5Ω lift the EUT were do to the ground or the unit being do to connect multiple gof the LISN was not contained the connect multiple ground and the boundary of the boundary of the plane for LISNs his distance was EUT. All other units 0.8 m from the LISN we positions of	he was ear ne he of 2.



Report No.: SZEM140300127801

Page: 13 of 52

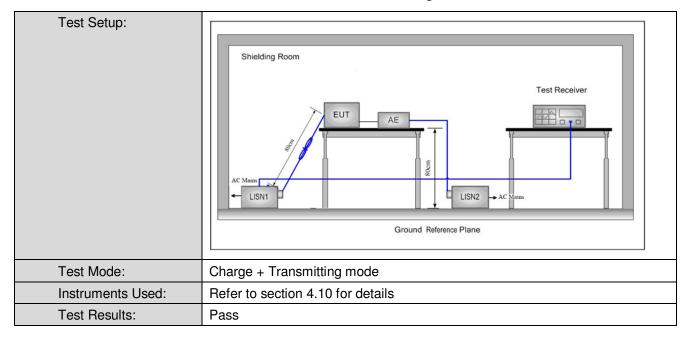



Report No.: SZEM140300127801


Page: 14 of 52

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



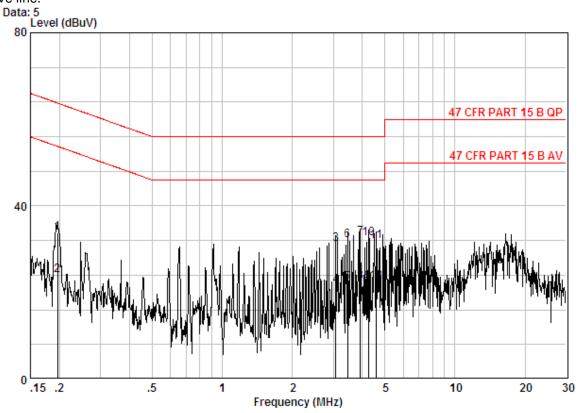

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 1278RF Test mode : Charge + TX


			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.19654	0.02	9.70	24.15	33.87	63.76	-29.89	QP
2		0.19654	0.02	9.70	14.28	24.00	53.76	-29.76	Average
3		3.074	0.02	9.85	21.31	31.18	56.00	-24.82	QP
4		3.074	0.02	9.85	11.63	21.50	46.00	-24.50	Average
5		3.454	0.02	9.86	12.28	22.16	46.00	-23.84	Average
6		3.454	0.02	9.86	22.19	32.07	56.00	-23.93	QP
7	@	3.922	0.02	9.87	22.82	32.71	56.00	-23.29	QP
8		3.922	0.02	9.87	12.58	22.47	46.00	-23.53	Average
9	@	4.247	0.01	9.88	12.64	22.54	46.00	-23.46	Average
10		4.247	0.01	9.88	22.54	32.43	56.00	-23.57	QP
11		4.574	0.01	9.89	22.02	31.93	56.00	-24.07	QP
12		4.574	0.01	9.89	12.47	22.37	46.00	-23.63	Average



Report No.: SZEM140300127801

Page: 15 of 52

Neutral line:

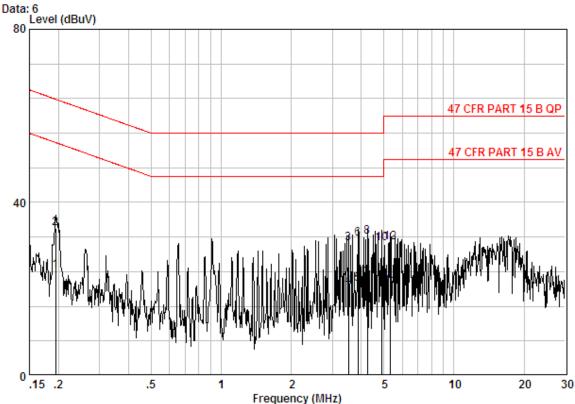

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 1278RF Test mode : Charge + TX


_	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19447	0.02	9.70	14.58	24.30	53.84	-29.54	Average
2	0.19447	0.02	9.70	24.25	33.97	63.84	-29.87	QP
3	3.528	0.02	9.86	20.69	30.57	56.00	-25.43	QP
4	3.528	0.02	9.86	10.63	20.51	46.00	-25.49	Average
5	3.860	0.02	9.87	11.24	21.13	46.00	-24.87	Average
6	3.860	0.02	9.87	21.80	31.69	56.00	-24.31	QP
7	4.247	0.01	9.88	12.58	22.48	46.00	-23.52	Average
8	4.247	0.01	9.88	22.15	32.05	56.00	-23.95	QP
9	4.900	0.01	9.90	10.47	20.38	46.00	-25.62	Average
10	4.900	0.01	9.90	20.59	30.50	56.00	-25.50	QP
11	5.305	0.01	9.92	10.65	20.58	50.00	-29.42	Average
12	5.305	0.01	9.92	20.91	30.84	60.00	-29.16	QP

Notes:

The following Quasi-Peak and Average measurements were performed on the EUT

2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

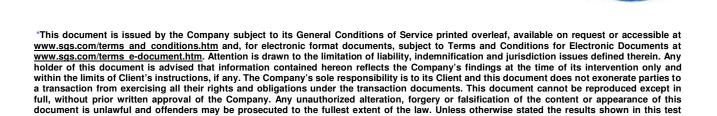




Report No.: SZEM140300127801

Page: 16 of 52

5.3 Conducted Peak Output Power

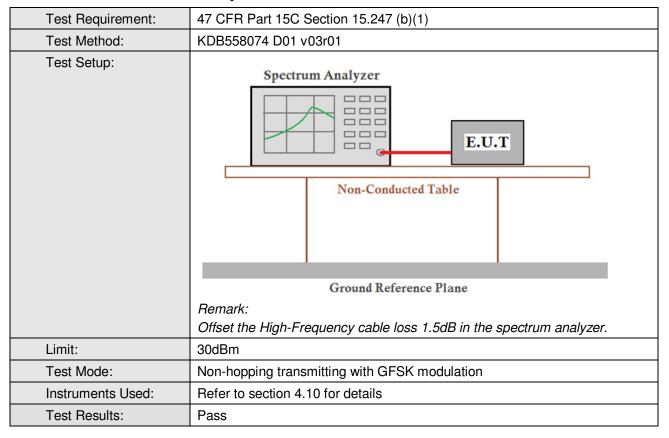

Measurement Data

GFSK mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	-0.00	30.00	Pass				
Middle	-1.31	30.00	Pass				
Highest	-2.71	30.00	Pass				




Report No.: SZEM140300127801


Page: 17 of 52

Test plot as follows:

Test mode: GFSK Test channel: Lowest

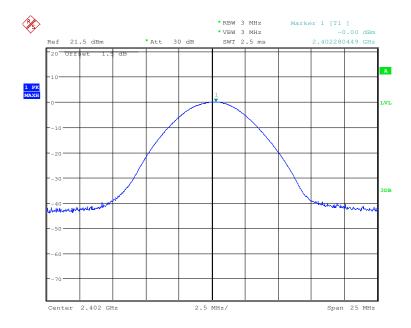

Test mode: GFSK Test channel: Middle

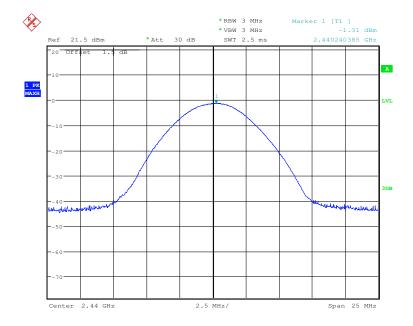




Report No.: SZEM140300127801

Page: 18 of 52

Test mode: GFSK Test channel: Highest

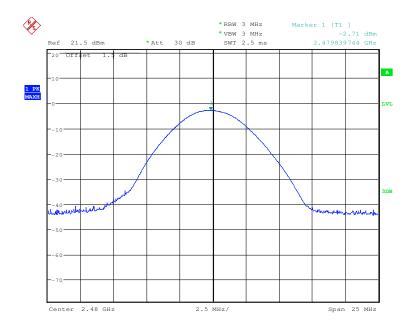




Report No.: SZEM140300127801

Page: 19 of 52

5.4 6dB Occupy Bandwidth

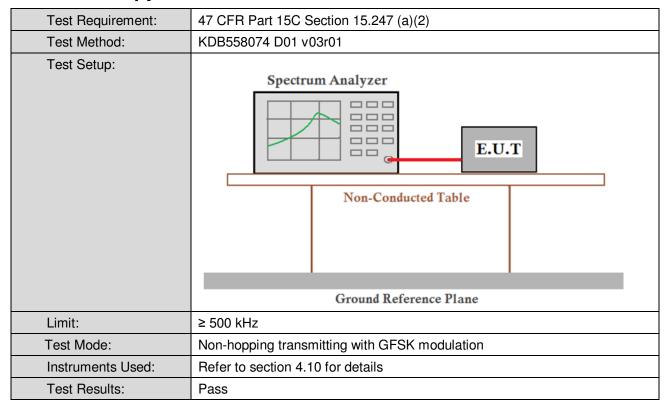

Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.754807692296	≥500	Pass
Middle	0.716346153832	≥500	Pass
Highest	0.735576923028	≥500	Pass




Report No.: SZEM140300127801


Page: 20 of 52

Test plot as follows:

Test mode: GFSK Test channel: Lowest

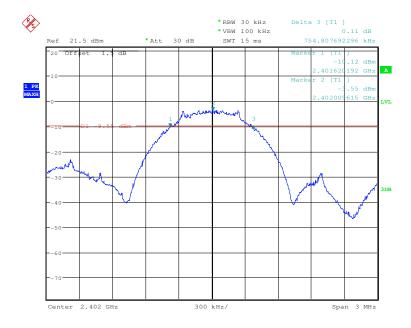

Test mode: GFSK Test channel: Middle

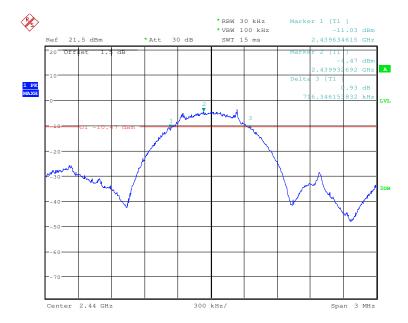




Report No.: SZEM140300127801

Page: 21 of 52

Test mode: GFSK Test channel: Highest

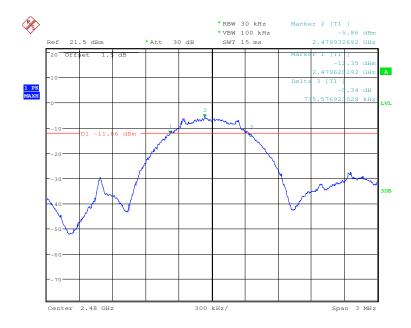




Report No.: SZEM140300127801

Page: 22 of 52

5.5 Power Spectral Density

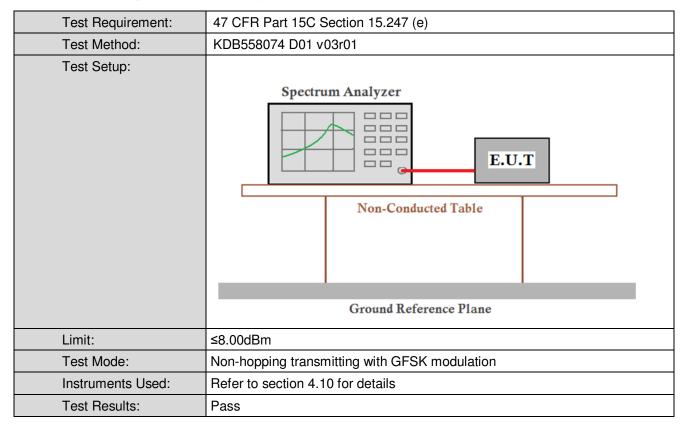

Measurement Data

GFSK mode							
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	-0.40	≤8.00	Pass				
Middle	-1.78	≤8.00	Pass				
Highest	-3.25	≤8.00	Pass				




Report No.: SZEM140300127801


Page: 23 of 52

Test plot as follows:

Test mode: GFSK Test channel: Lowest

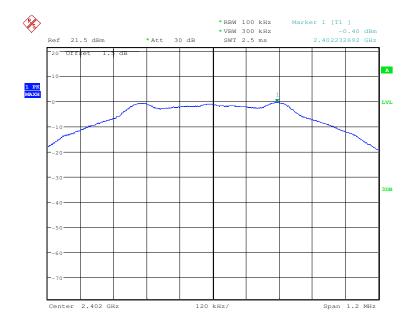



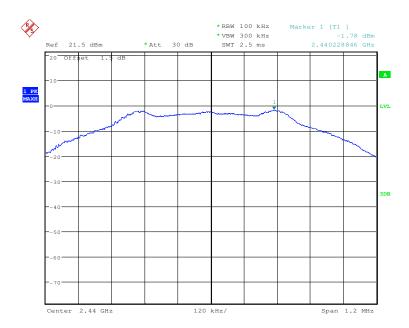




Report No.: SZEM140300127801

Page: 24 of 52

Test mode: GFSK Test channel: Highest

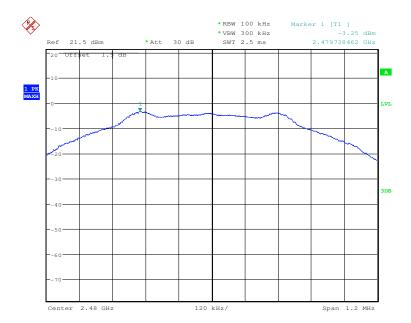



Report No.: SZEM140300127801

Page: 25 of 52

5.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	KDB558074 D01 v03r01			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Non-hopping and hopping transmitting with GFSK modulation			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			






Report No.: SZEM140300127801


Page: 26 of 52

Test plot as follows:

Test mode: GFSK Test channel: Lowest

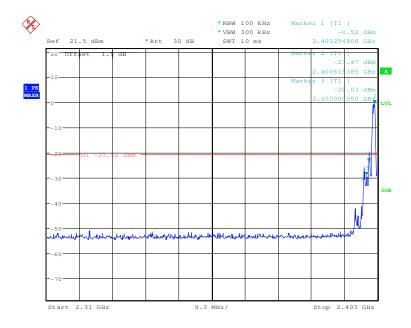

Test mode: GFSK Test channel: Highest

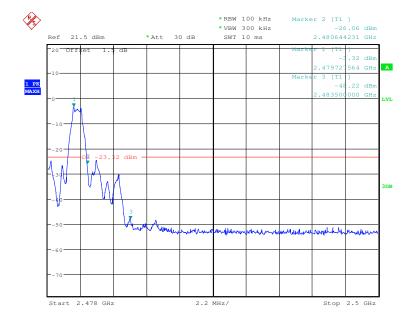



Report No.: SZEM140300127801

Page: 27 of 52

5.7 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01 v03r01					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test Mode:	Non-hopping transmitting with GFSK modulation					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					




Report No.: SZEM140300127801

Page: 28 of 52

Test mode: GFSK Test channel: Lowest

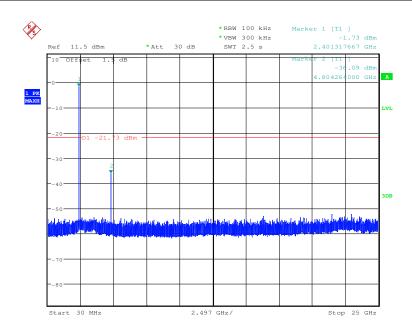


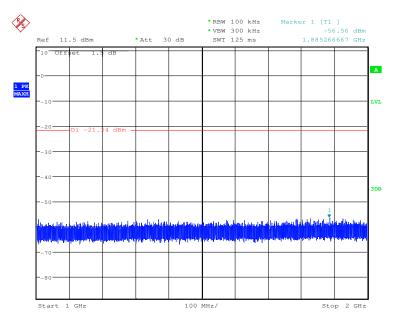




Report No.: SZEM140300127801

Page: 29 of 52

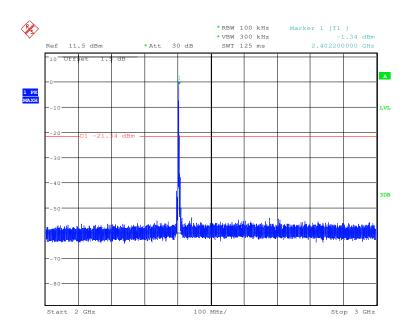


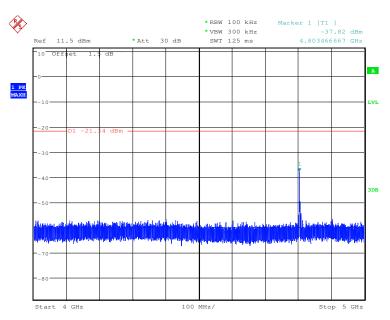




Report No.: SZEM140300127801

Page: 30 of 52

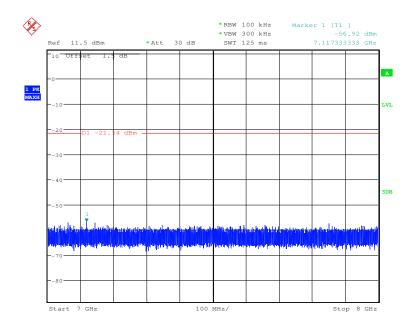


Test mode: GFSK Test channel: Middle

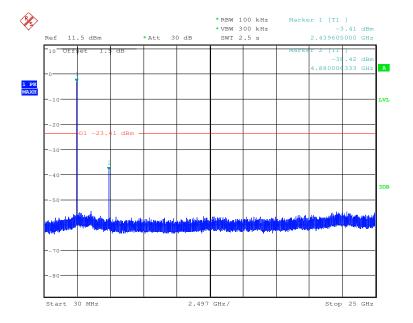




Report No.: SZEM140300127801

Page: 31 of 52

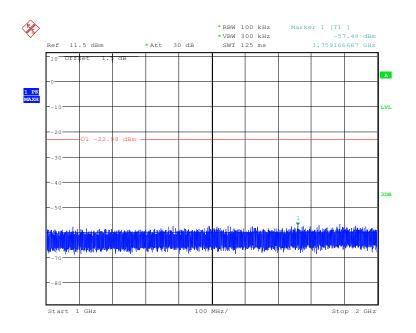


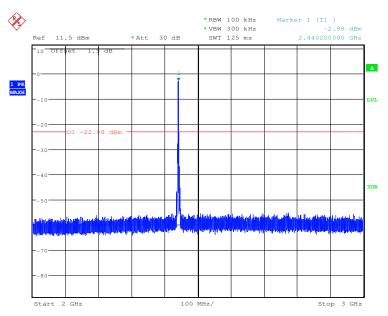




Report No.: SZEM140300127801

Page: 32 of 52

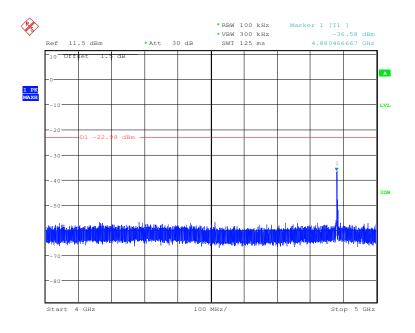

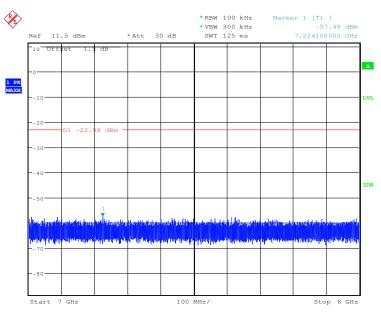





Report No.: SZEM140300127801

Page: 33 of 52

Test mode: GFSK Test channel: Highest

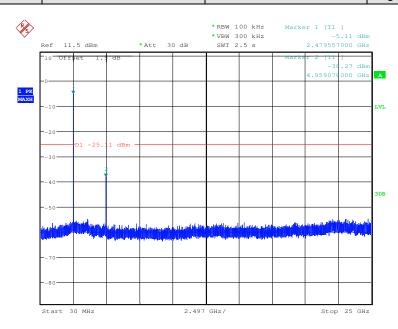


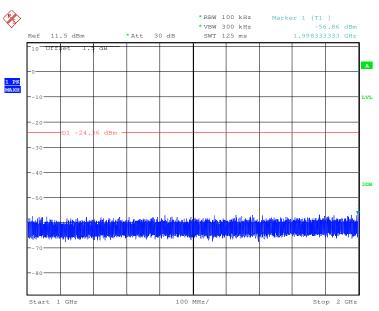




Report No.: SZEM140300127801

Page: 34 of 52

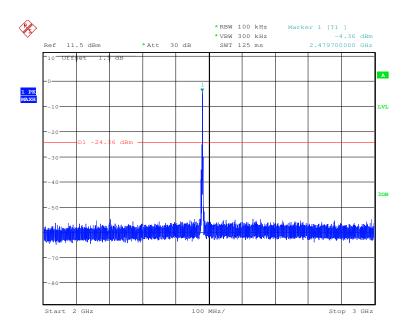


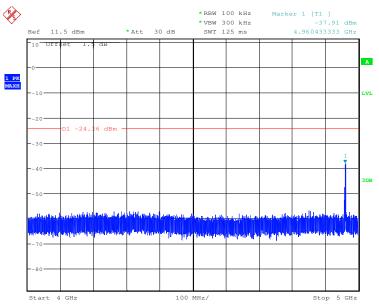



Report No.: SZEM140300127801

Page: 35 of 52

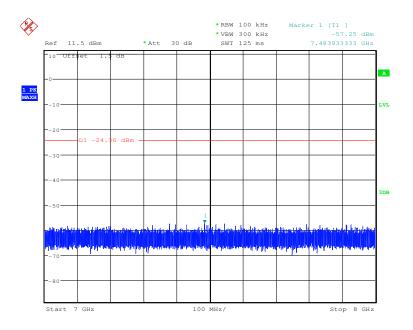

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.





Report No.: SZEM140300127801

Page: 36 of 52


5.8 Radiated Spurious Emission

5.8.1 Spurious Emiss	ions								
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark		
	0.009MHz-0.090MH	Z	Peak	10kHz	10kHz		Peak	9	
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz		Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	Z	30kHz	Quasi-peak		
	0.110MHz-0.490MH	Z	Peak	10kHz	Z	30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	Z	30kHz	Average		
	0.490MHz -30MHz 30MHz-1GHz Above 1GHz		Quasi-peak	10kHz	Z	30kHz	Quasi-peak		
			Quasi-peak	100 kH	lz	300kHz	Quasi-peak		
			Peak	1MHz	<u>-</u>	3MHz	Peak		
			Peak	1MHz	-	10Hz	Average		
Limit:			eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (n		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-		300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-		30		
	1.705MHz-30MHz		30	-	-		30		
	30MHz-88MHz		100	40.0	40.0 Quasi-peak		3		
	88MHz-216MHz		150	43.5 Q		uasi-peak	3		
	216MHz-960MHz		200	46.0 C		uasi-peak	3		
	960MHz-1GHz	500		54.0	54.0 Quasi-peak54.0 Average		3		
	Above 1GHz 500		500	54.0			3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						n		
Test Setup:									



Report No.: SZEM140300127801

Page: 37 of 52

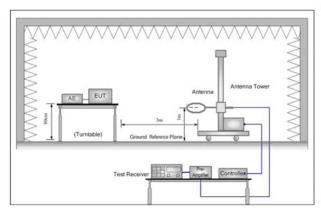

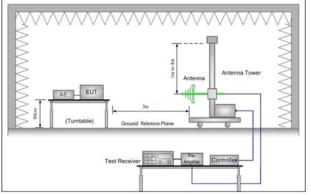


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

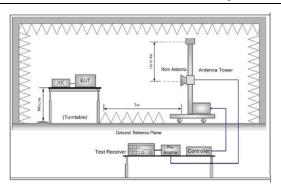


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse



Report No.: SZEM140300127801

Page: 38 of 52


	case.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test	Non-hopping transmitting mode with GFSK modulation.
Mode:	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM140300127801

Page: 39 of 52

Radiated Emission below 1GHz							
30MHz~1GHz (QP)							
Test mode: Charge + Transmitting mode Vertical							

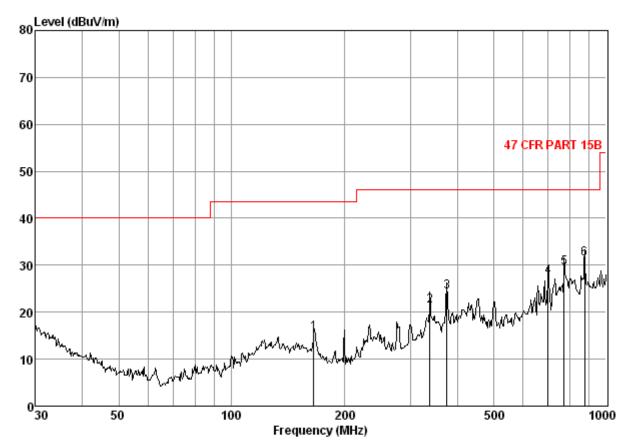

Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 1278RF Test Mode: Charge+TX


	Freq	CableA		_	Read Level Level			Over Limit	Remark
	MHz	d₿	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB	
1 2 3 4 5 6	165. 49 338. 40 375. 94 699. 30 771. 45 875. 25	2. 02 2. 13 2. 90 3. 12	9.50 10.46 11.49 16.80 18.17 19.47	26.70 26.97 27.41 27.33	35. 57 37. 64 35. 25 35. 57	15.58 21.35 24.29 27.54 29.53 31.27	46.00 46.00 46.00 46.00	-24.65 -21.71 -18.46 -16.47	



Report No.: SZEM140300127801

Page: 40 of 52

Test mode:	Charge + Transmitting mode	Horizontal
------------	----------------------------	------------

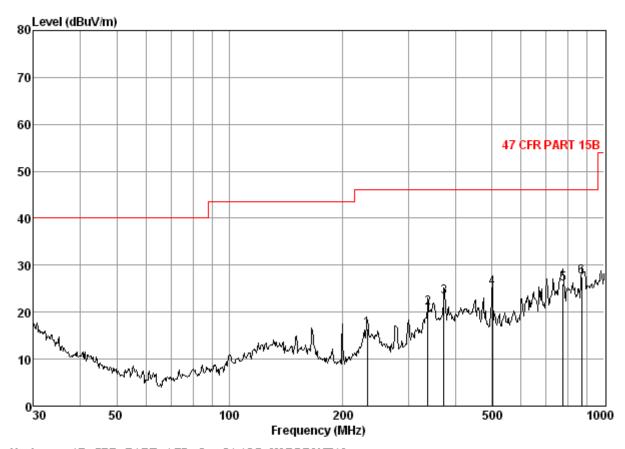

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 1278RF Test Mode: Charge+TX

	Freq			eAntenna Preamp Read ss Factor Factor Level					Remark
	MHz	d₿	_dB/m	dB	dBu₹	$\overline{\text{dBuV/m}}$	dBuV/m	dB	
1 2 3 4 5 6	233. 35 338. 40 373. 31 502. 94 776. 88 869. 13	2. 02 2. 13 2. 60 3. 14	10. 46 11. 41 13. 52 17. 92	26. 58 26. 70 26. 95 27. 69 27. 32 26. 92	35. 18 36. 58 36. 80 32. 39	20. 96 23. 17 25. 23 26. 13	46.00 46.00 46.00 46.00	-25.04 -22.83 -20.77 -19.87	



Report No.: SZEM140300127801

Page: 41 of 52

Transmitte	Transmitter Emission above 1GHz								
Test mode:	(GFSK	Test	Test channel: Lo		Lowest Rema		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3010.828	5.07	33.40	40.31	47.52	45.68	74	-28.32	Vertical	
3844.279	6.26	33.61	40.93	47.13	46.07	74	-27.93	Vertical	
4804.000	7.44	34.70	41.63	48.38	48.89	74	-25.11	Vertical	
7206.000	8.72	35.88	39.87	45.37	50.10	74	-23.90	Vertical	
9608.000	9.68	37.30	37.80	42.39	51.57	74	-22.43	Vertical	
12272.340	11.40	39.18	38.39	39.77	51.96	74	-22.04	Vertical	
2995.538	5.05	33.38	40.30	47.51	45.64	74	-28.36	Horizontal	
3943.392	6.38	33.74	41.00	46.94	46.06	74	-27.94	Horizontal	
4804.000	7.44	34.70	41.63	47.58	48.09	74	-25.91	Horizontal	
7206.000	8.72	35.88	39.87	45.95	50.68	74	-23.32	Horizontal	
9608.000	9.68	37.30	37.80	42.56	51.74	74	-22.26	Horizontal	
11994.380	11.28	38.90	38.28	40.48	52.38	74	-21.62	Horizontal	

Test mode:		GFSK	Test	channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3010.828	5.07	33.40	40.31	46.70	44.86	74	-29.14	Vertical
4128.280	6.61	34.17	41.14	47.30	46.94	74	-27.06	Vertical
4880.000	7.48	34.59	41.68	48.63	49.02	74	-24.98	Vertical
7320.000	8.87	35.93	39.77	44.87	49.90	74	-24.10	Vertical
9760.000	9.74	37.46	37.66	42.19	51.73	74	-22.27	Vertical
11963.890	11.26	38.87	38.26	41.01	52.88	74	-21.12	Vertical
2818.011	4.92	33.14	40.17	46.94	44.83	74	-29.17	Horizontal
3598.087	5.90	33.32	40.74	47.79	46.27	74	-27.73	Horizontal
4880.000	7.48	34.59	41.68	47.90	48.29	74	-25.71	Horizontal
7320.000	8.87	35.93	39.77	46.67	51.70	74	-22.30	Horizontal
9760.000	9.74	37.46	37.66	42.54	52.08	74	-21.92	Horizontal
12117.140	11.33	39.02	38.32	40.89	52.92	74	-21.08	Horizontal



Report No.: SZEM140300127801

Page: 42 of 52

Test mode:		GFSK	Test	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3200.502	5.35	33.32	40.45	45.44	43.66	74	-30.34	Vertical
4288.958	6.81	34.59	41.25	45.60	45.75	74	-28.25	Vertical
4960.000	7.53	34.46	41.74	45.93	46.18	74	-27.82	Vertical
7440.000	9.01	35.98	39.67	42.97	48.29	74	-25.71	Vertical
9920.000	9.81	37.63	37.53	39.73	49.64	74	-24.36	Vertical
12117.140	11.33	39.02	38.32	40.54	52.57	74	-21.43	Vertical
3128.013	5.24	33.35	40.40	45.86	44.05	74	-29.95	Horizontal
4234.716	6.74	34.45	41.21	46.45	46.43	74	-27.57	Horizontal
4960.000	7.53	34.46	41.74	47.33	47.58	74	-26.42	Horizontal
7440.000	9.01	35.98	39.67	45.40	50.72	74	-23.28	Horizontal
9920.000	9.81	37.63	37.53	41.82	51.73	74	-22.27	Horizontal
12086.330	11.32	38.99	38.31	40.93	52.93	74	-21.07	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM140300127801

Page: 43 of 52

5.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2009	ANSI C63.10 2009							
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
	Above IGHZ	74.0	Peak Value						
Test Setup:									

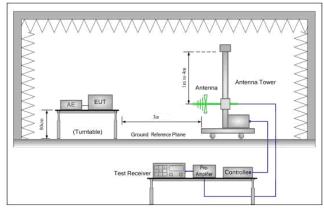

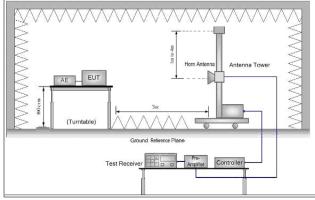


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel



Report No.: SZEM140300127801

Page: 44 of 52

	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with GFSK modulation. Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM140300127801

45 of 52 Page:

Test plot as follows:

Restricted bands	Restricted bands around fundamental frequency								
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical			

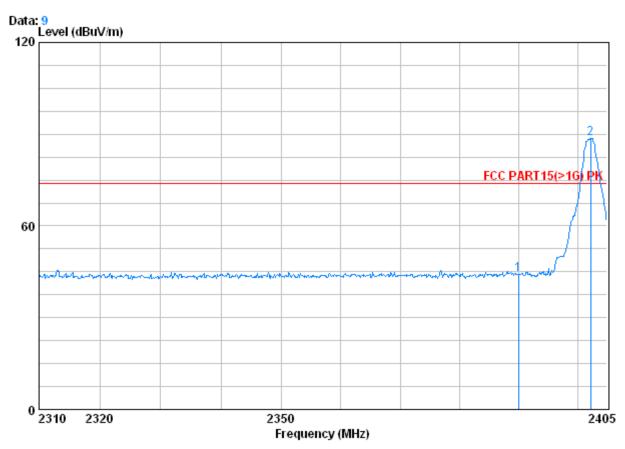

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. :1278RF Mode : 2402

			CableAntenna		Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	48.39	44.03	74.00	-29.97
2	<u> </u>	2402.245	2.98	32.51	39.86	92.98	88.62	74.00	14.62
_	0	2.02.010	2.50	02.01	~~.~~				






Report No.: SZEM140300127801

Page: 46 of 52

Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal

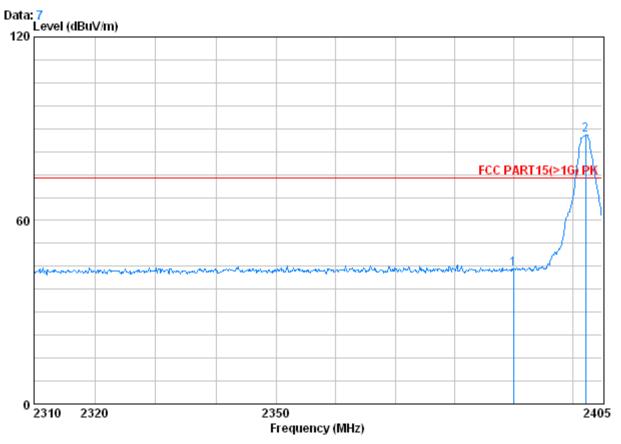

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1278RF Mode : 2402


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	48.36	44.01	74.00	-29.99
2	X	2402.245	2.98	32.51	39.86	92.30	87.93	74.00	13.93



Report No.: SZEM140300127801

Page: 47 of 52

Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Vertical

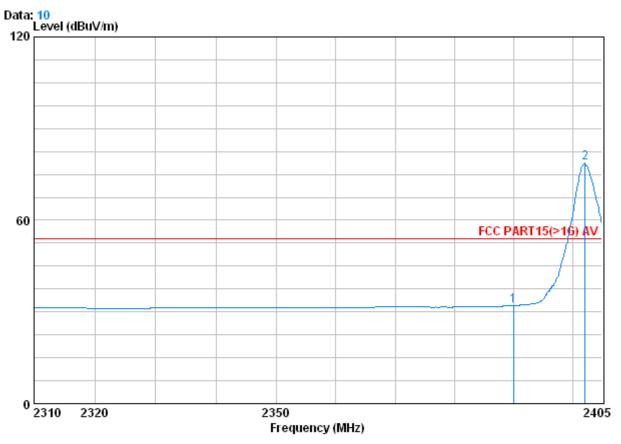

Condition : FCC PART15(>1G) AV 3m VERTICAL


Job No. : 1278RF Mode : 2402


	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 @	2390.000 2402.150			39.85 39.86				



Report No.: SZEM140300127801

Page: 48 of 52



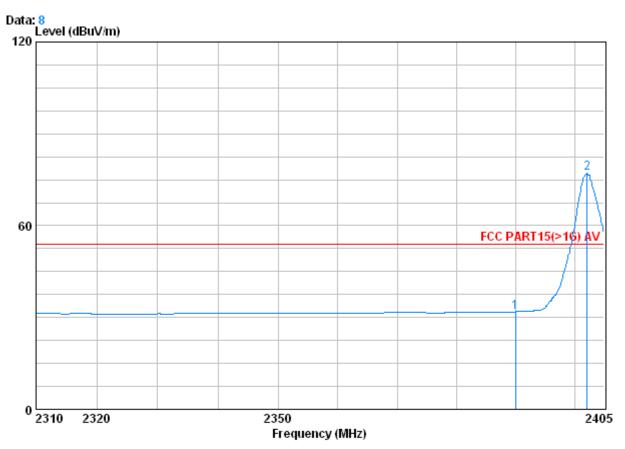

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1278RF Mode : 2402


	. = . = =	Freq			Preamp Factor			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0		2390.000 2402.150			39.85 39.86				



Report No.: SZEM140300127801

Page: 49 of 52

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Vertical
	O O					

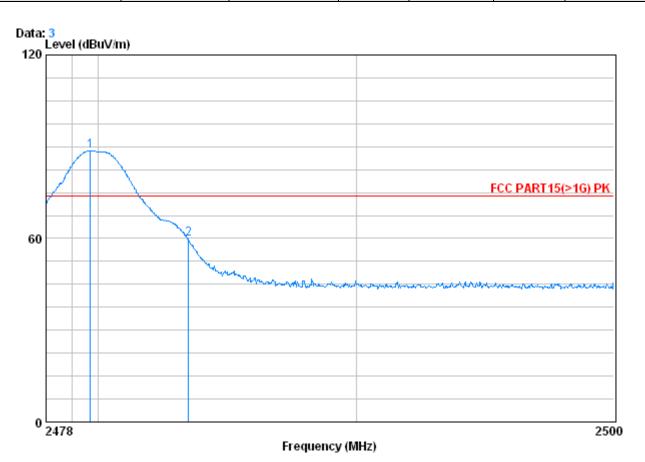

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 1278RF Mode : 2480


	 Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2479.716	3.03	32.67	39.92	92.85	88.63	74.00	14.63
2	2483.500	3.03	32.67	39.92	63.91	59.69	74.00	-14.31



Report No.: SZEM140300127801

Page: 50 of 52

Test mode: GFSK Test channel: Highest Remark: Peak Horizontal

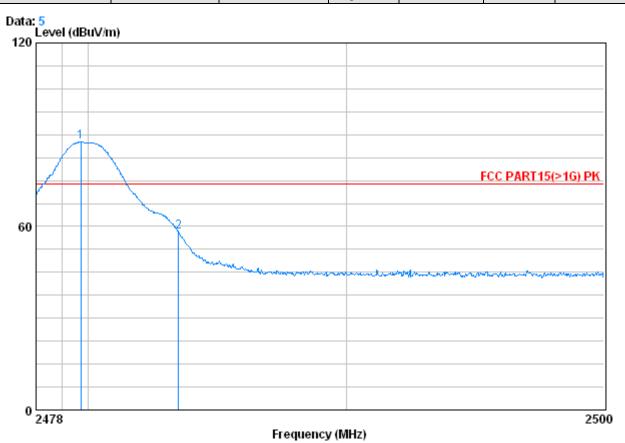

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 1278RF Mode : 2480


		Cablei	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2479.738	3.03	32.67	39.92	91.80	87.58	74.00	13.58
2	2483.500	3.03	32.67	39.92	62.41	58.19	74.00	-15.81



Report No.: SZEM140300127801

Page: 51 of 52

Test mode:	GFSK	Test channel:	Highest	Remark:	Average	Vertical
	O., O					

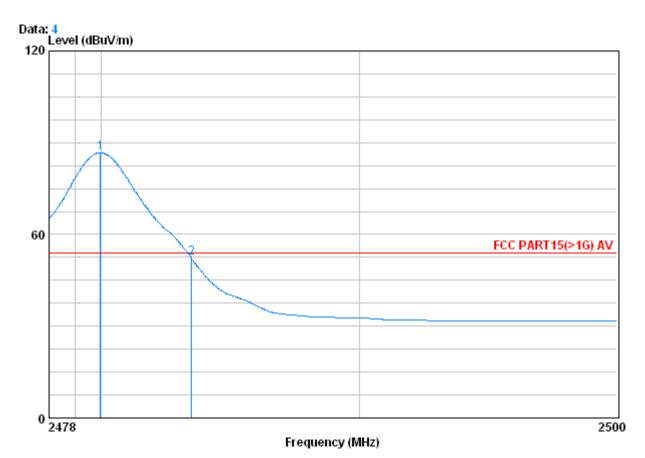

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1278RF Mode : 2480

> 1 2


	Freq				Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
L @	2479.980 2483.500						54.00 54.00	



Report No.: SZEM140300127801

Page: 52 of 52

Test mode:	GFSK	Test channel:	Highest	Remark:	Average	Horizontal
	O., O					

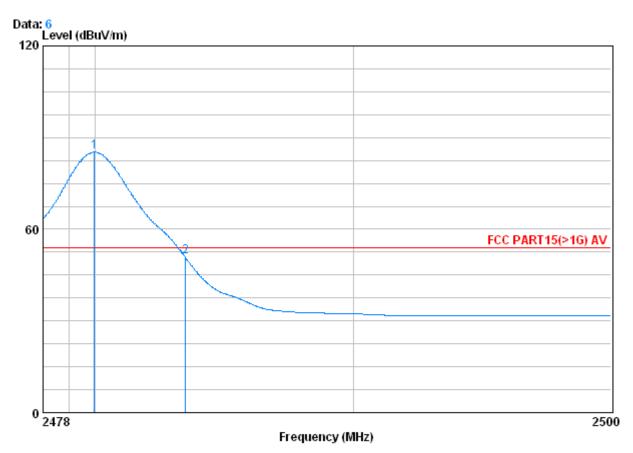

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1278RF Mode : 2480

	 Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @ 2	2479.980 2483.500			39.92 39.92				

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."