

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM120800437901 Page: 1 of 74

# **FCC REPORT**

Application No:	SZEM1208004379RF
Applicant:	Philips Consumer Lifestyle
Manufacturer:	Philips Consumer Lifestyle
Factory:	Yusan Technology (Shenzhen) Limited
Product Name:	BT Receiver
Model No.(EUT):	AEA2000/37
FCC ID:	BOUPHAEA2000
Standards:	47 CFR Part 15, Subpart C (2011)
Date of Receipt:	2012-08-06
Date of Test:	2012-08-09 to 2012-08-15
Date of Issue:	2012-08-20
Test Result:	PASS *

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



#### Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM120800437901 Page: 2 of 74

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 3 of 74

### 3 Contents

1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3		ONTENTS	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	Test Environment	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6	Test Facility	7
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.10	TEST INSTRUMENTS LIST	
5	TE	EST RESULTS AND MEASUREMENT DATA	10
5	<b>TE</b> 5.1		
5		EST RESULTS AND MEASUREMENT DATA Antenna Requirement Conducted Emissions	
5	5.1	ANTENNA REQUIREMENT	
5	5.1 5.2	Antenna Requirement Conducted Emissions	
5	5.1 5.2 5.3	Antenna Requirement Conducted Emissions Conducted Peak Output Power	
5	5.1 5.2 5.3 5.4	Antenna Requirement Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth	
5	5.1 5.2 5.3 5.4 5.5	Antenna Requirement Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation	
5	5.1 5.2 5.3 5.4 5.5 5.6	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number	
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time	10 11 15 22 28 35 38 38 44
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20DB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions	10 11 15 22 28 35 38 
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Duty Cycle Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence	10 11 15 22 28 35 38 38 44 44 51 55 61
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Duty Cycle Spurious RF Conducted Emissions	10 11 15 22 28 35 38 38 44 44 51 55 61
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.12	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Duty Cycle Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence	10 11 15 22 28 35 38 38 38 38 38 38 38 55 55 61 61 62
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.12 5.12	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Duty Cycle Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	10 11 15 22 28 35 38 44 51 55 61 62 



Report No.: SZEM120800437901 Page: 4 of 74

# 4 General Information

#### 4.1 Client Information

Applicant:	Philips Consumer Lifestyle
Address of Applicant:	5/F, Philips Electronics Building 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Manufacturer:	Philips Consumer Lifestyle
Address of Manufacturer:	5/F, Philips Electronics Building 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Factory:	Yusan Technology(shenzhen) Limited
Address of Factory:	Haoyi Technology Park, Nan Huan Road, Shajing West, Baoan Shenzhen, Guang Dong P.R. China

#### 4.2 General Description of EUT

Name:	BT Receiver
Model No.:	AEA2000/37
Trade Mark:	PHILIPS
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	[255, 255]
Test Software of EUT:	CSR blue suite
Antenna Type	Integral
Antenna Gain	0dBi
Power Supply:	Adapter MODEL: AS030-090-EA033 INPUT: 100-240V~50/60Hz 0.15A OUTPUT: 9.0V === 0.33A
Test Voltage:	120V ~ 60Hz



Report No.: SZEM120800437901 Page: 5 of 74

Operation F	- requency each	of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 6 of 74

### 4.3 Test Environment

Operating Environment	
Temperature:	26.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1002 mbar

### 4.4 Description of Support Units

The EUT has been tested independent unit.

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM120800437901 Page: 7 of 74

### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

#### 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM120800437901 Page: 8 of 74

### 4.10 Test Instruments List

tem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-11-26
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
13	Band filter	Amindeon	82346	SEL0094	2013-05-17
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2012-10-23
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2012-10-27
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2012-10-23
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04



Report No.: SZEM120800437901 Page: 9 of 74

	Conducted Emission				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2012-10-23
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2013-5-17
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	SEL0162	2012-11-11
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	SEL0163	2012-11-11
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	SEL0164	2012-11-11
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-5-17
8	Coaxial Cable	SGS	N/A	SEL0025	2013-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2012-10-23
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2012-10-27
11	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24

RF c	onnected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd))
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2012-10-23
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2012-10-27
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2012-10-23
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
8	Band filter	amideon	82346	SEL0094	2013-05-17
9	POWER METER	R & S	NRVS	SEL0144	2012-10-23
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2012-11-29



Report No.: SZEM120800437901 Page: 10 of 74

# 5 Test results and Measurement Data

mm

#### 5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	
responsible party shall be u antenna that uses a unique so that a broken antenna ca electrical connector is proh 15.247(b) (4) requirement: The conducted output powe antennas with directional ga section, if transmitting ante power from the intentional u (b)(2), and (b)(3) of this sec	I be designed to ensure that no antenna other than that furnished by the used with the device. The use of a permanently attached antenna or of an e coupling to the intentional radiator, the manufacturer may design the unit an be replaced by the user, but the use of a standard antenna jack or ibited. er limit specified in paragraph (b) of this section is based on the use of ains that do not exceed 6 dBi. Except as shown in paragraph (c) of this nnas of directional gain greater than 6 dBi are used, the conducted output radiator shall be reduced below the stated values in paragraphs (b)(1), ction, as appropriate, by the amount in dB that the directional gain of the
antenna exceeds 6 dBi.	
EUT Antenna:	
-	on the main PCB and no consideration of replacement. The best case gain
of the antenna is 0dBi.	




Report No.: SZEM120800437901 Page: 11 of 74

Test Deminentert		207		
Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:		Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		
Test Procedure:	<ul> <li>* Decreases with the logarithm of the frequency.</li> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to</li> </ul>		e linear e ot the T was rear The f the s of N 2.	

#### 5.2 Conducted Emissions



Report No.: SZEM120800437901 Page: 12 of 74

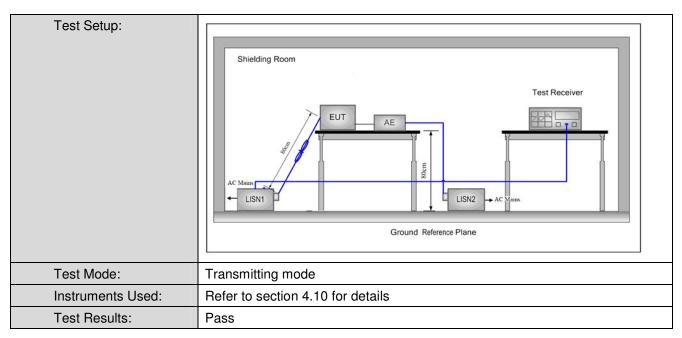


#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Report No.: SZEM120800437901 Page: 13 of 74

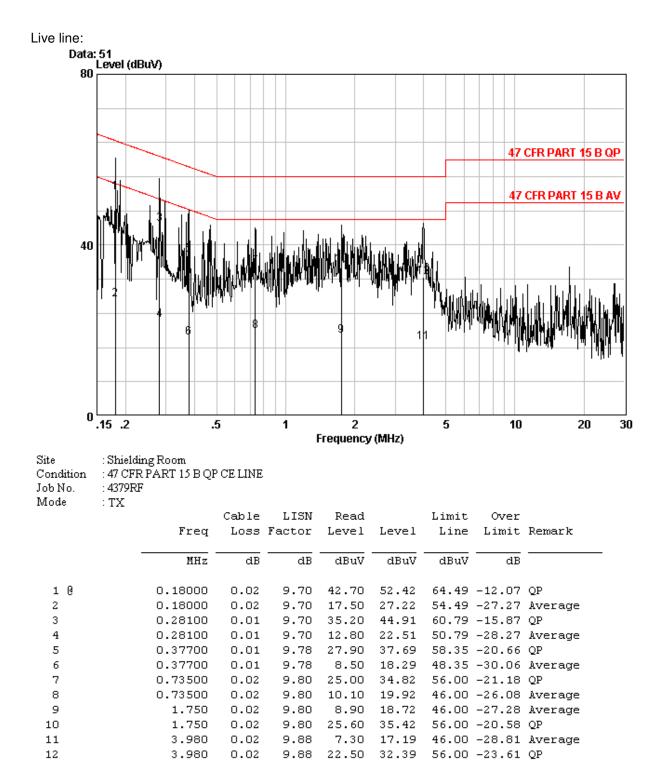



Report No.: SZEM120800437901 Page: 14 of 74

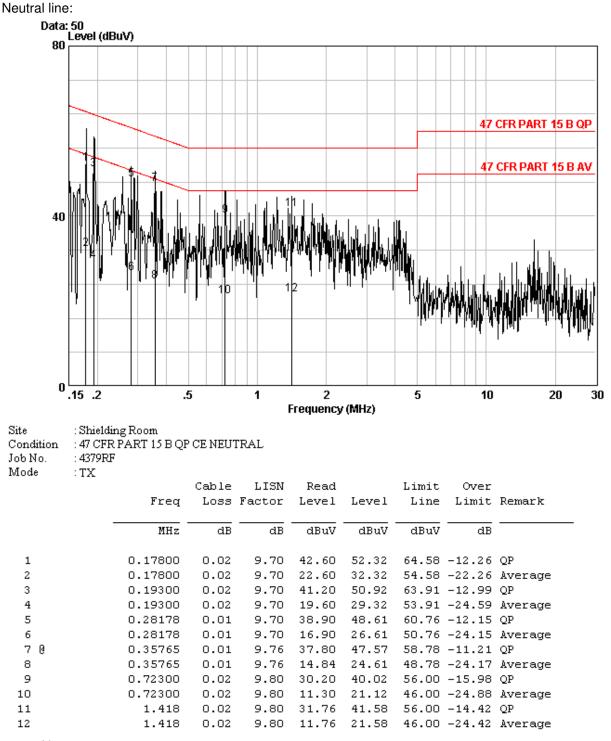

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM120800437901 Page: 15 of 74

#### 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	30dBm	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	




Report No.: SZEM120800437901 Page: 16 of 74

Measurement Data				
GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	9.29	30.00	Pass	
Middle	9.28	30.00	Pass	
Highest	8.75	30.00	Pass	
	π/4DQPSK mo	ode		
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	7.95	30.00	Pass	
Middle	7.64	30.00	Pass	
Highest	7.07	30.00	Pass	
	8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	8.27	30.00	Pass	
Middle	8.02	30.00	Pass	
Highest	7.61	30.00	Pass	

#### Measurement Data




Report No.: SZEM120800437901 Page: 17 of 74

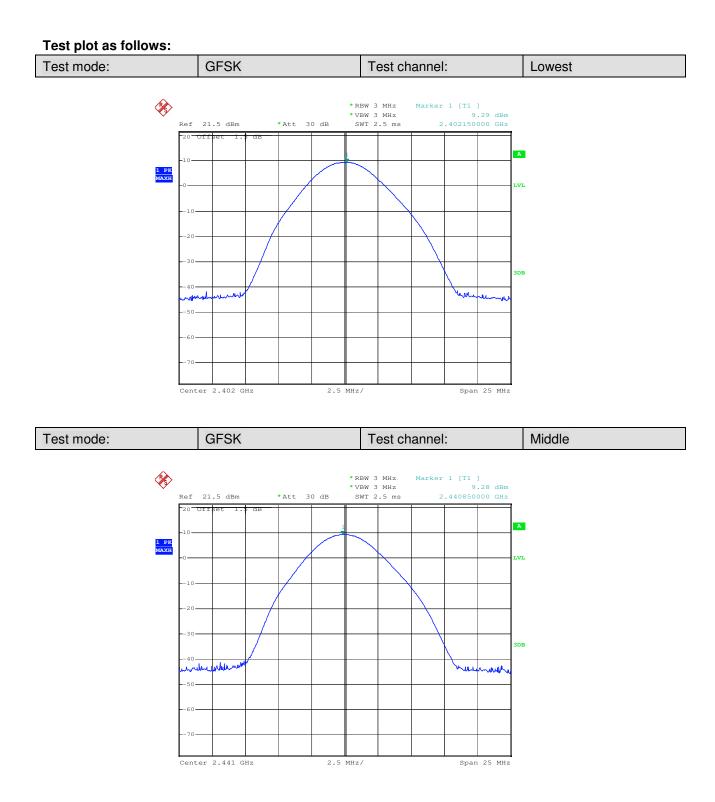




Report No.: SZEM120800437901 Page: 18 of 74

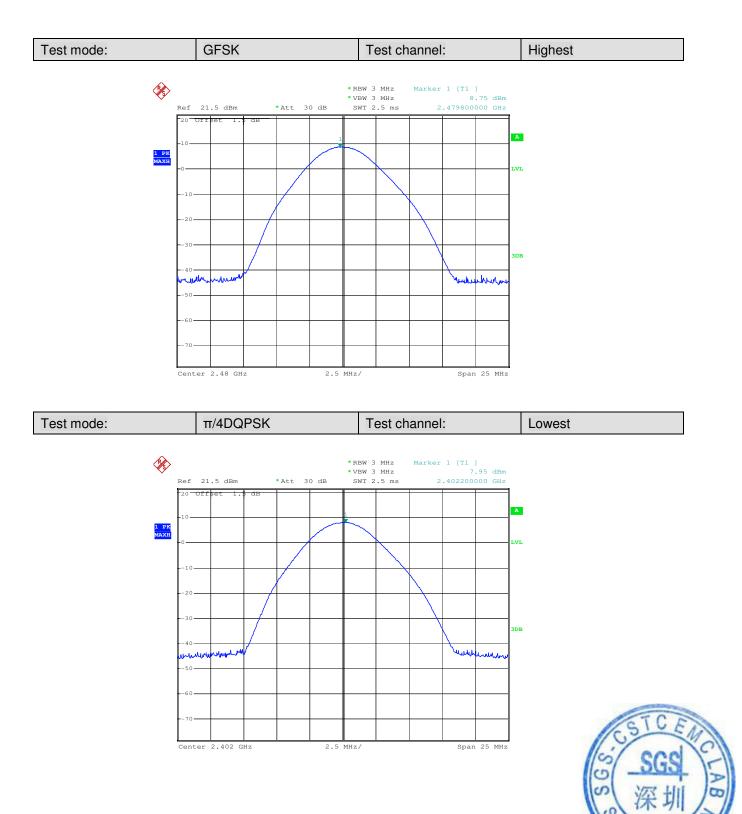




Report No.: SZEM120800437901 Page: 19 of 74

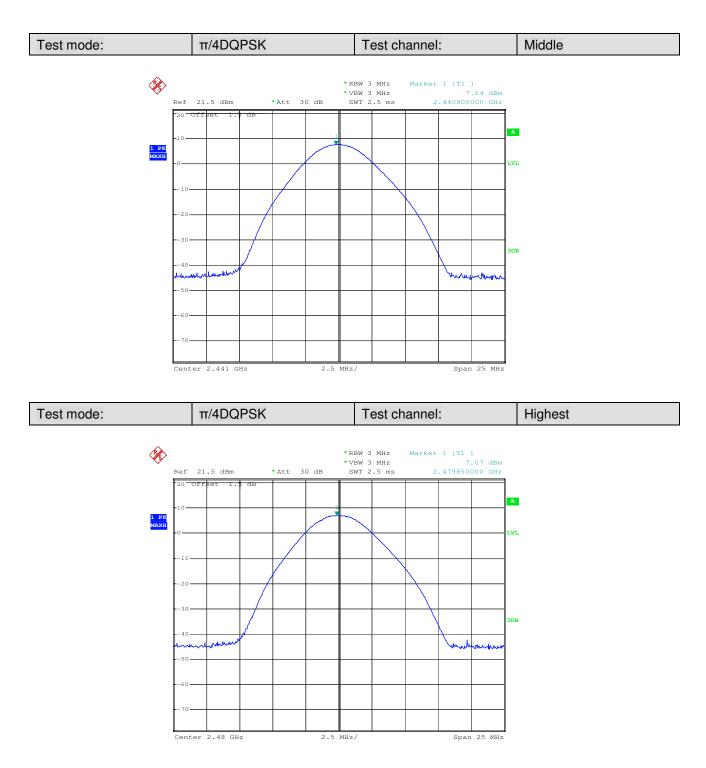




Report No.: SZEM120800437901 Page: 20 of 74

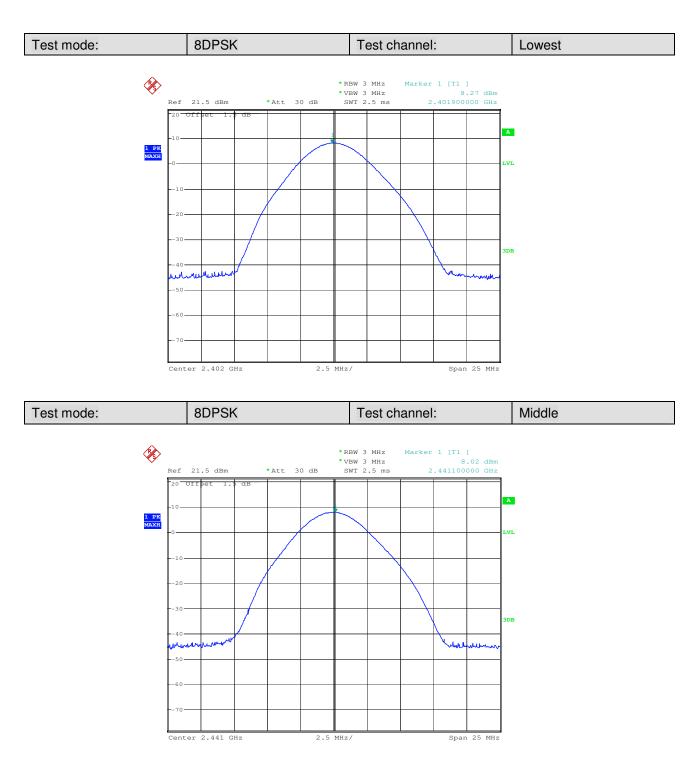



Report No.: SZEM120800437901 Page: 21 of 74

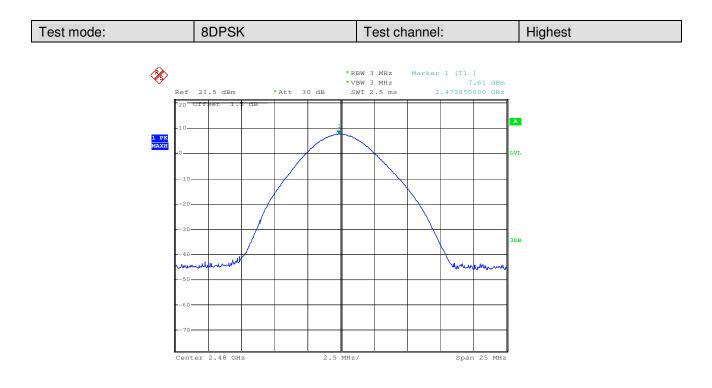

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 22 of 74

#### 5.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	NA	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	

#### **Measurement Data**

Test channel	20dB Occupy Bandwidth (kHz)		
rest channer	GFSK	π/4DQPSK	8DPSK
Lowest	798	1200	1200
Middle	834	1218	1206
Highest	834	1218	1206




Report No.: SZEM120800437901 Page: 23 of 74

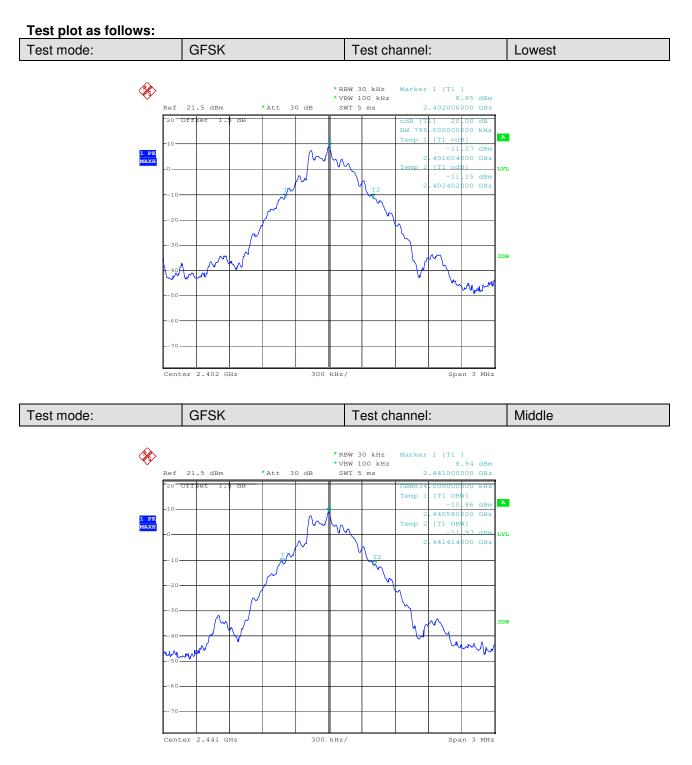




Report No.: SZEM120800437901 Page: 24 of 74

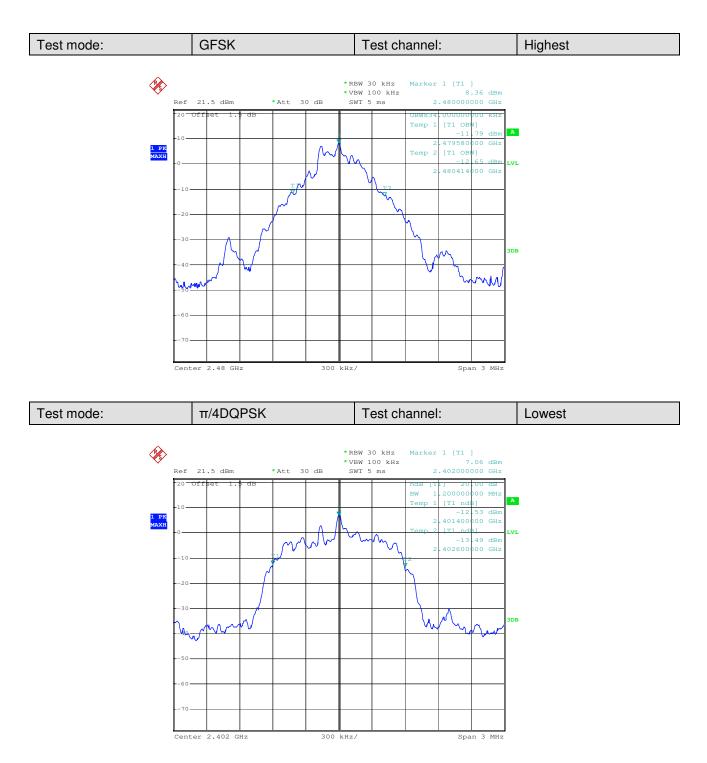




Report No.: SZEM120800437901 Page: 25 of 74

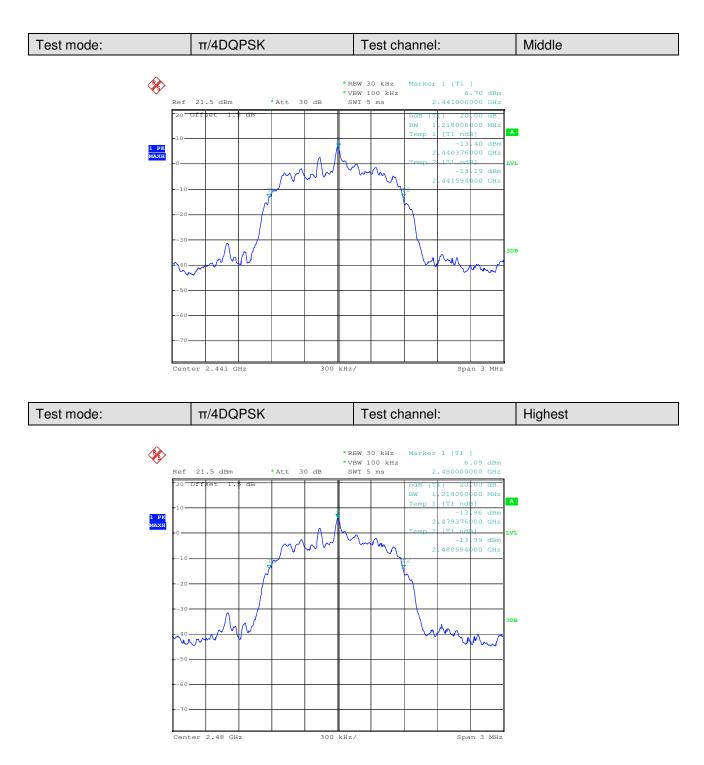




Report No.: SZEM120800437901 Page: 26 of 74

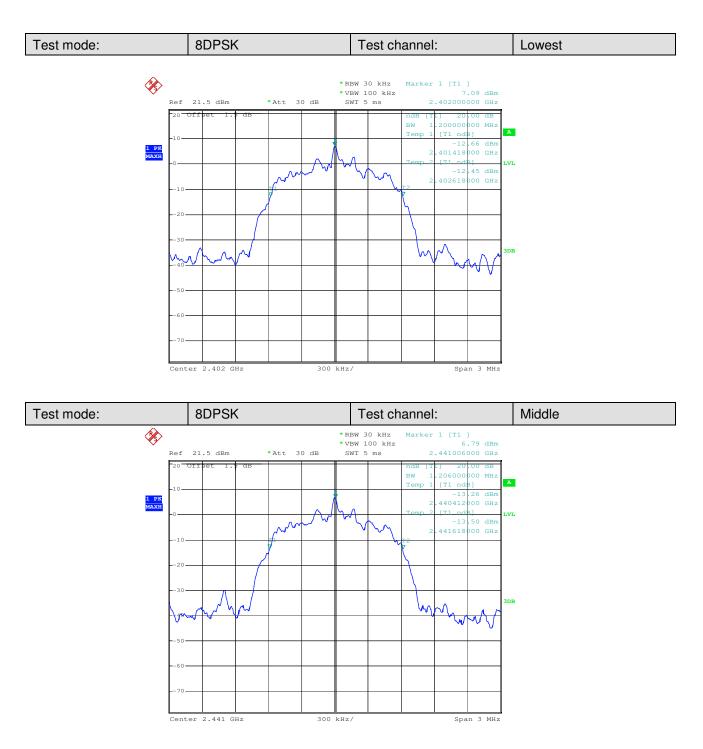



Report No.: SZEM120800437901 Page: 27 of 74

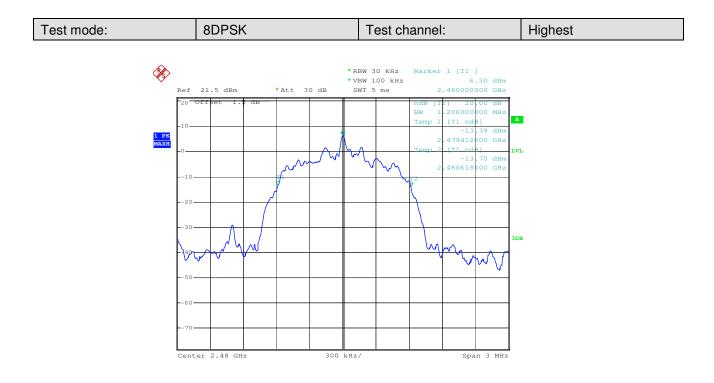



Report No.: SZEM120800437901 Page: 28 of 74

#### 5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	





Report No.: SZEM120800437901 Page: 29 of 74

#### **Measurement Data**

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1004	≥812	Pass
Middle	1005	≥812	Pass
Highest	1000	≥812	Pass
	π/4DQPSK m	ode	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1005	≥812	Pass
Middle	1004	≥812	Pass
Highest	1000	≥812	Pass
	8DPSK mo	de	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1004	≥812	Pass
Middle	1005	≥812	Pass
Highest	1005	≥812	Pass

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	834	556
π/4DQPSK	1218	812
8DPSK	1206	804




Report No.: SZEM120800437901 Page: 30 of 74






Report No.: SZEM120800437901 Page: 31 of 74

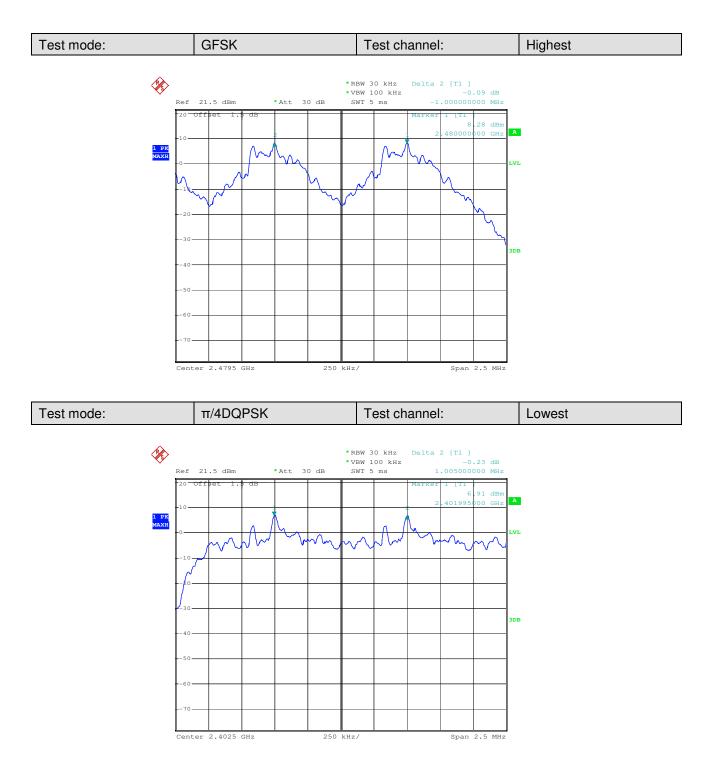




Report No.: SZEM120800437901 Page: 32 of 74

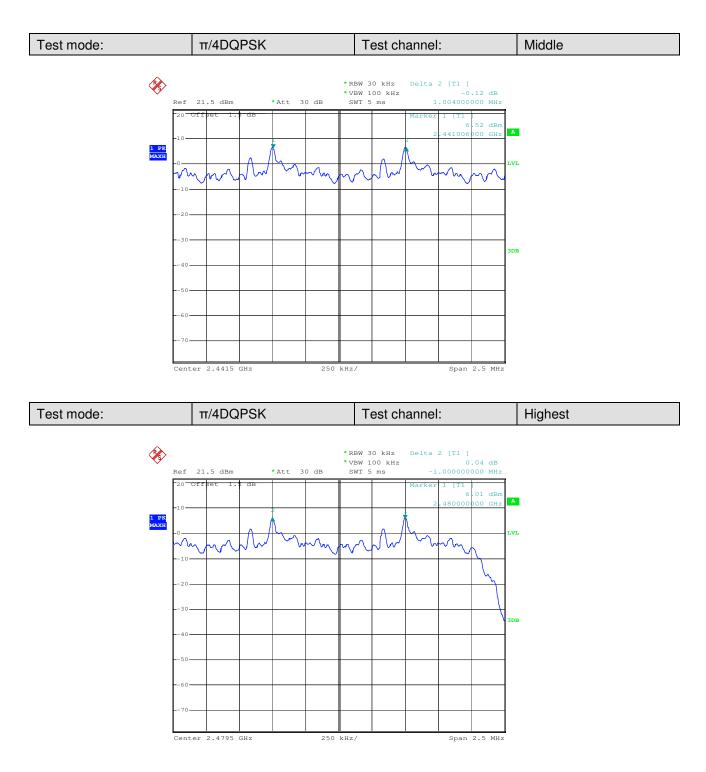




Report No.: SZEM120800437901 Page: 33 of 74

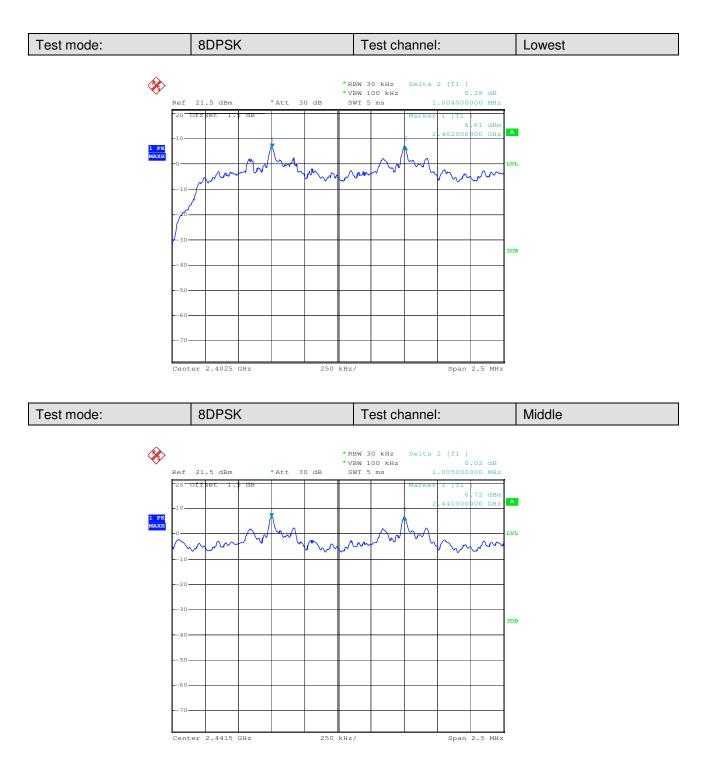



Report No.: SZEM120800437901 Page: 34 of 74

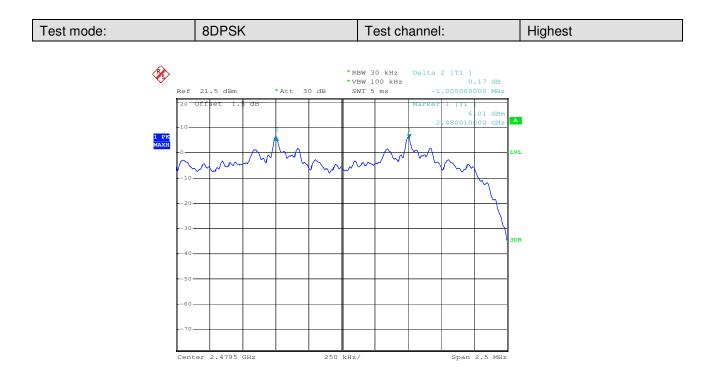



Report No.: SZEM120800437901 Page: 35 of 74

#### 5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	


#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800437901 Page: 36 of 74

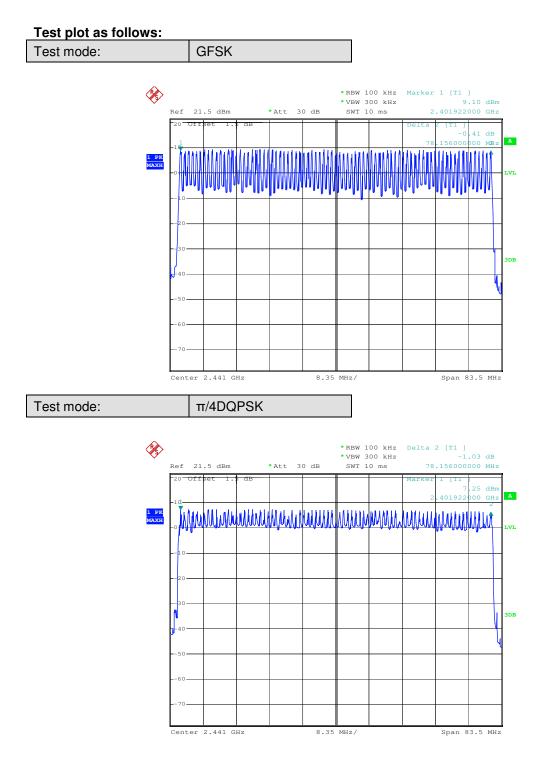



Report No.: SZEM120800437901 Page: 37 of 74

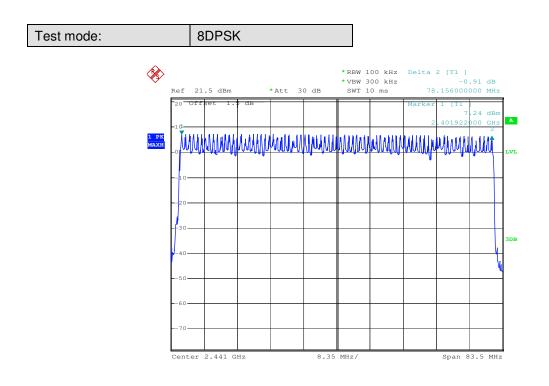



Report No.: SZEM120800437901 Page: 38 of 74

#### 5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table				
	Ground Reference Plane				
Instruments Used:	Refer to section 4.10 for details				
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.				
Limit:	0.4 Second				
Test Results:	Pass				

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)	
	DH1	0.1664	0.4	
GFSK	DH3	0.2848	0.4	
	DH1	0.3221	0.4	
	2-DH1	0.1712	0.4	
π/4DQPSK	2-DH3	0.2840	0.4	
	2-DH5	0.1957	0.4	
	3-DH1	0.1712	0.4	
8DPSK	3-DH3	0.2840	0.4	
	3-DH5	0.3259	0.4	

#### Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below


DH1 time slot=0.520(ms)\*(1600/ (2\*79))\*31.6=166.4 ms


DH3 time slot=1.780(ms)\*(1600/ (4\*79))\*31.6=284.8ms

DH5 time slot=3.020(ms)\*(1600/ (6\*79))\*31.6=322.1ms




Report No.: SZEM120800437901 Page: 39 of 74



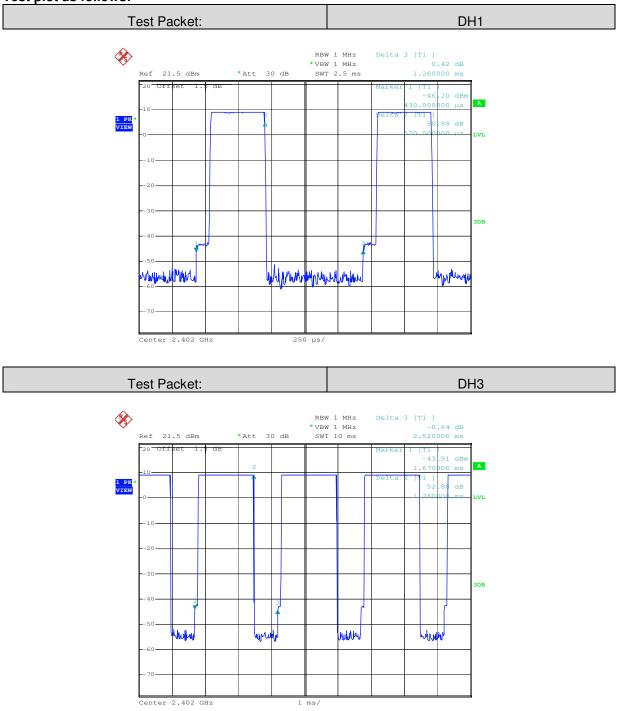




Report No.: SZEM120800437901 Page: 40 of 74

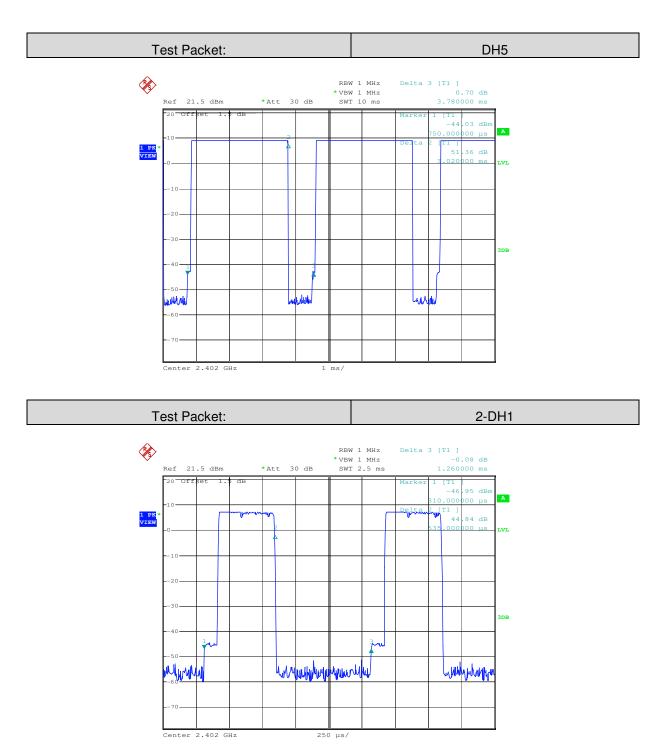




Report No.: SZEM120800437901 Page: 41 of 74

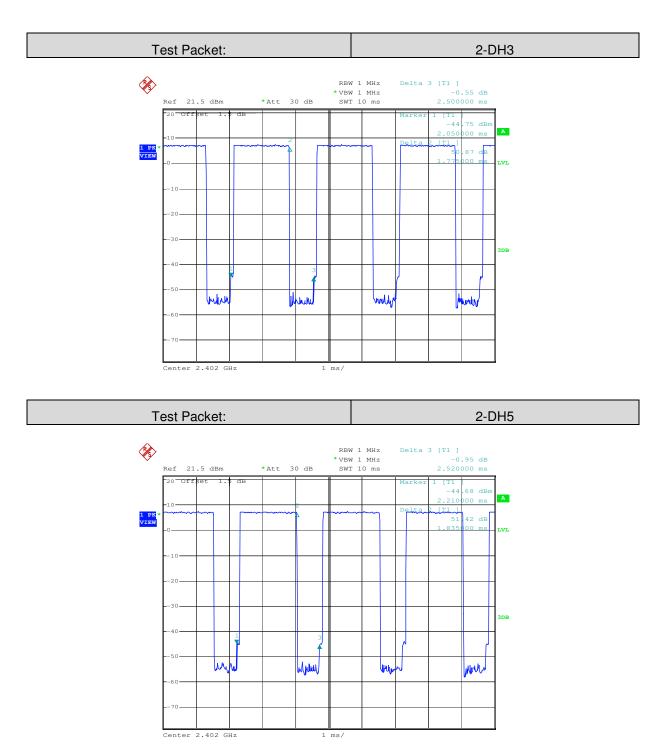




Report No.: SZEM120800437901 Page: 42 of 74

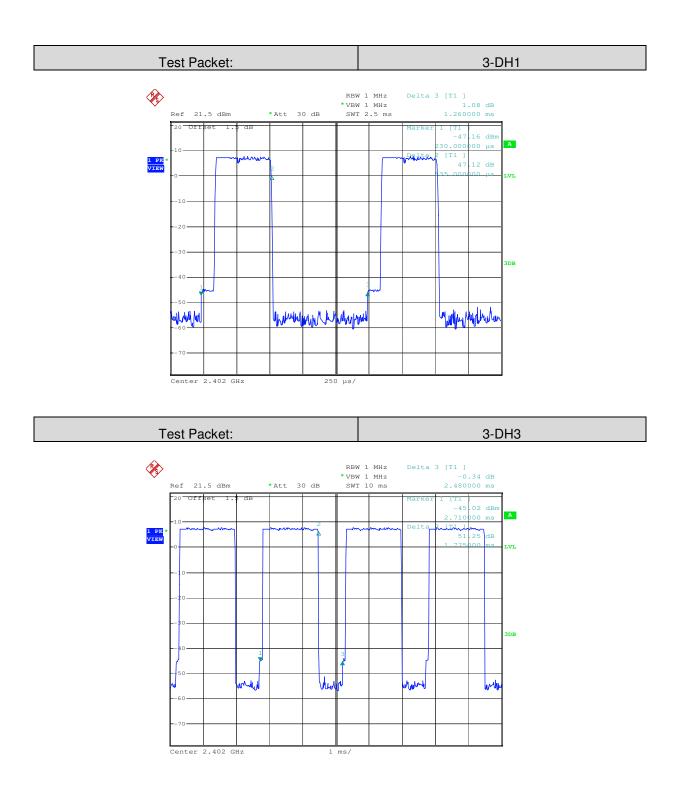



Report No.: SZEM120800437901 Page: 43 of 74

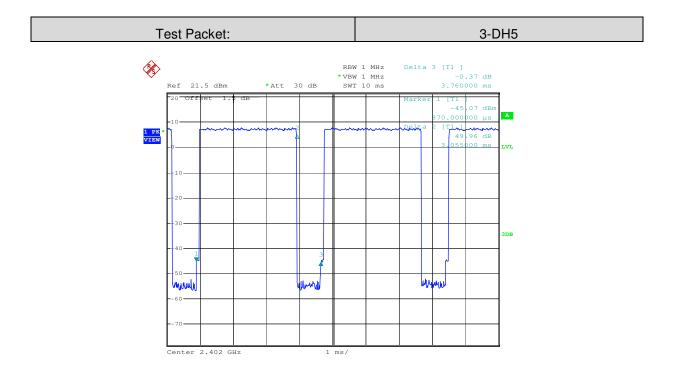

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 44 of 74


#### 5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:				
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type				
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800437901 Page: 45 of 74

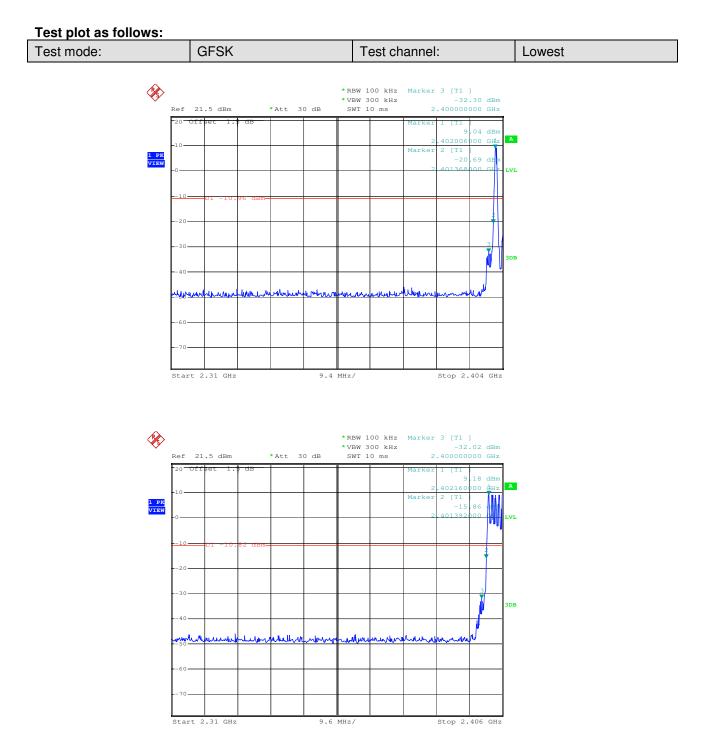




Report No.: SZEM120800437901 Page: 46 of 74

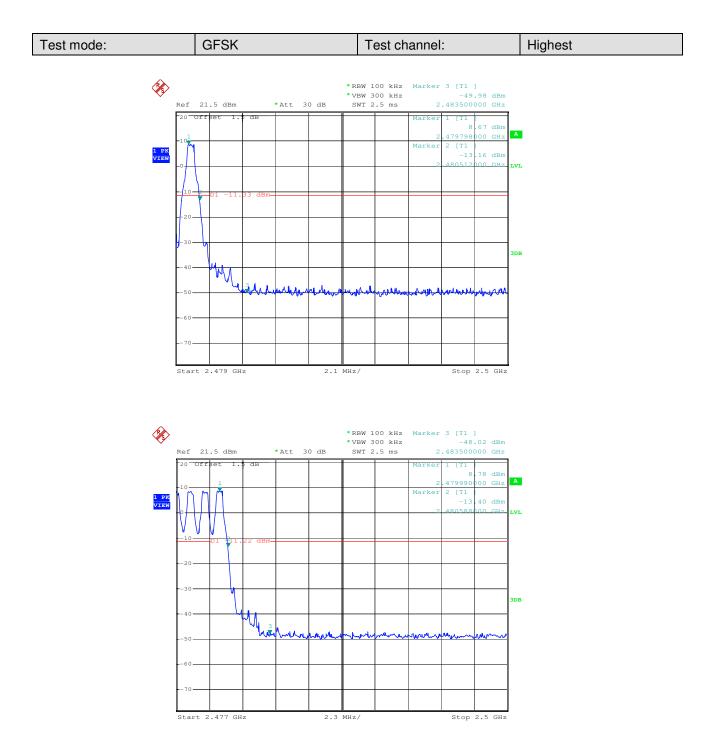

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800437901 Page: 47 of 74

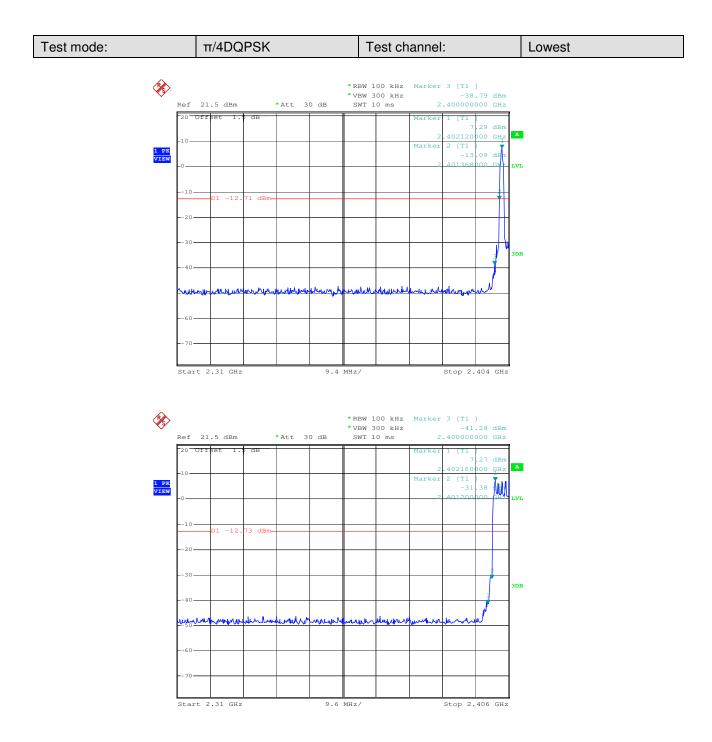

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800437901 Page: 48 of 74

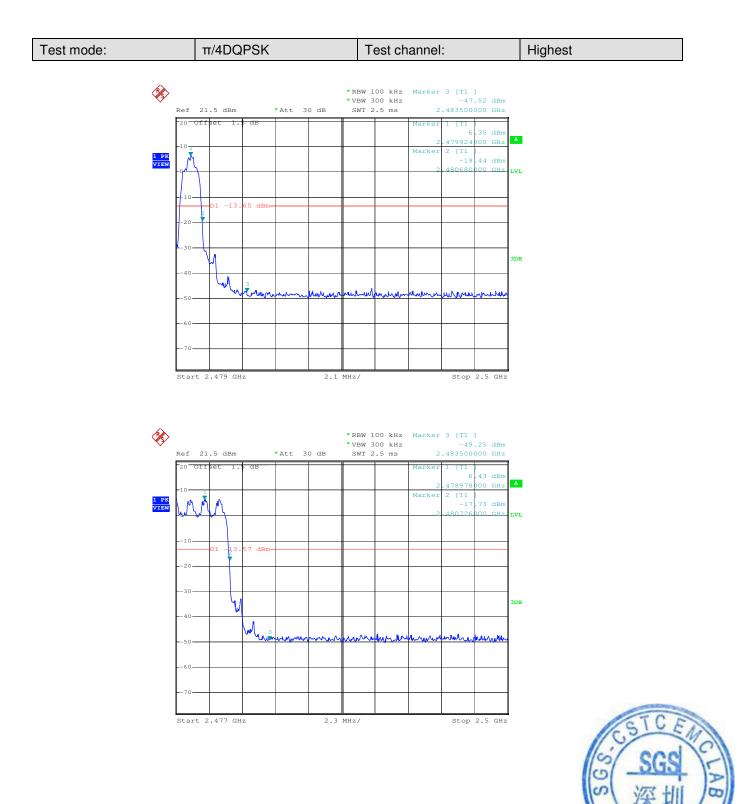




Report No.: SZEM120800437901 Page: 49 of 74

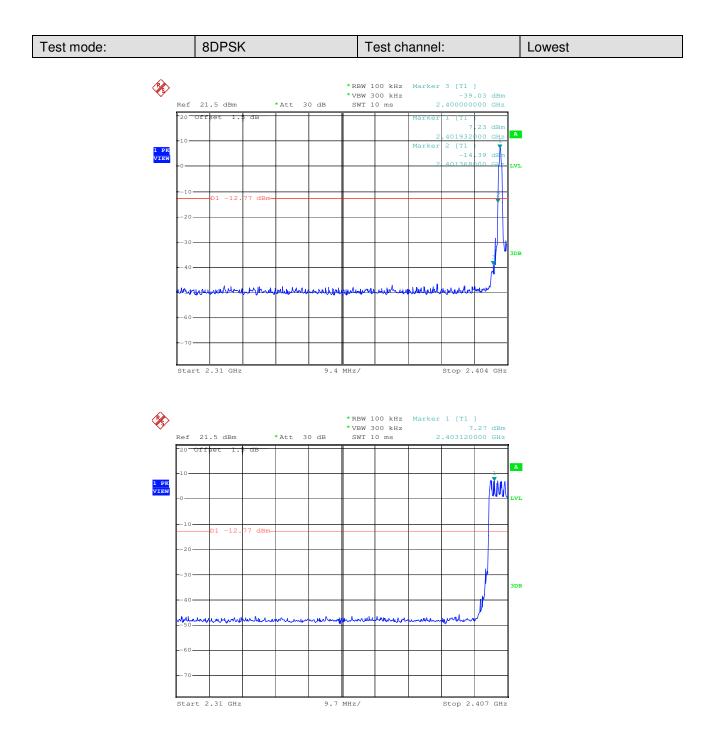

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 50 of 74

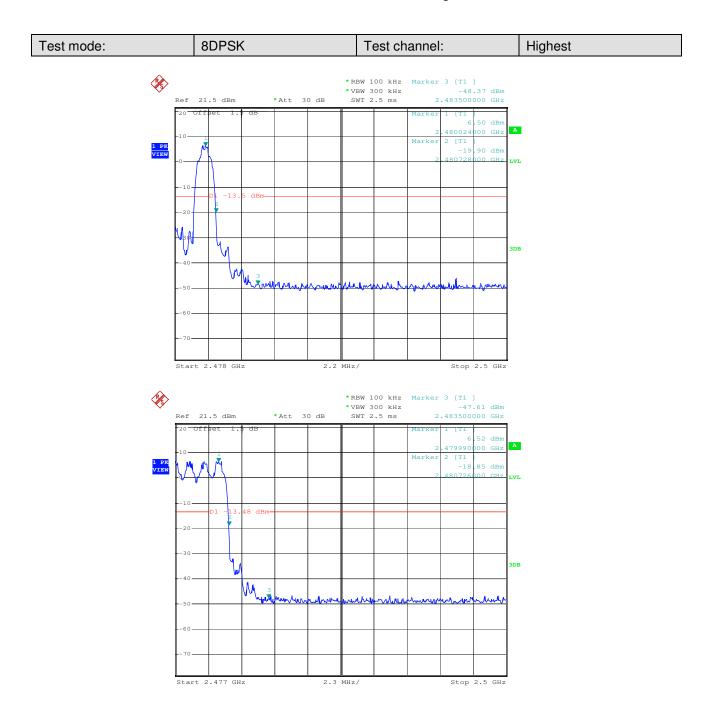

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 51 of 74

#### 5.9 Duty Cycle

Test Requirement:	FCC Part15 C Section 15.35
Test Method:	ANSI C63.10:2009
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Instruments Used:	Refer to section 4.10 for details
Limit:	N/A
Final Test Mode:	Through Pre-scan, find the worse case is GFSK modulation type

**Measurement Data** 

DH1
TX on: 400us=0.400ms
Duty Cycle=T <sub>on</sub> /T <sub>period</sub> =0.400ms/100ms=0.00400ms
PDCF=20*Log(Duty Cycle)=-47.96dB
DH3
TX on:1.665ms
Duty Cycle=T <sub>on</sub> /T <sub>period</sub> =1.665ms/100ms=0.01665ms
PDCF=20*Log(Duty Cycle)=-35.57dB
DH5
TX on:2.905ms
Duty Cycle=T <sub>on</sub> /T <sub>period</sub> =2.905ms/100ms=0.02905ms
PDCF=20*Log(Duty Cycle)=- 30.74dB


Remark:

Duty Cycle=On time/Period time or 100 milliseonds (Whichever is less)




Report No.: SZEM120800437901 Page: 52 of 74

#### Test plot as follows

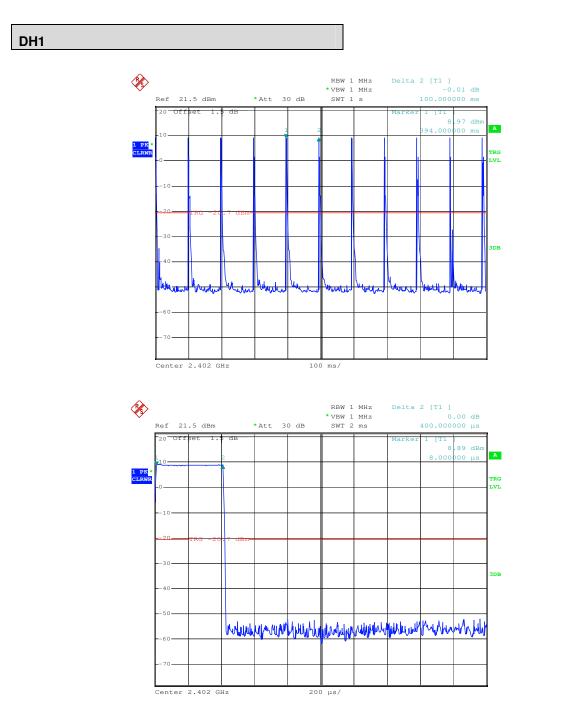




Report No.: SZEM120800437901 Page: 53 of 74

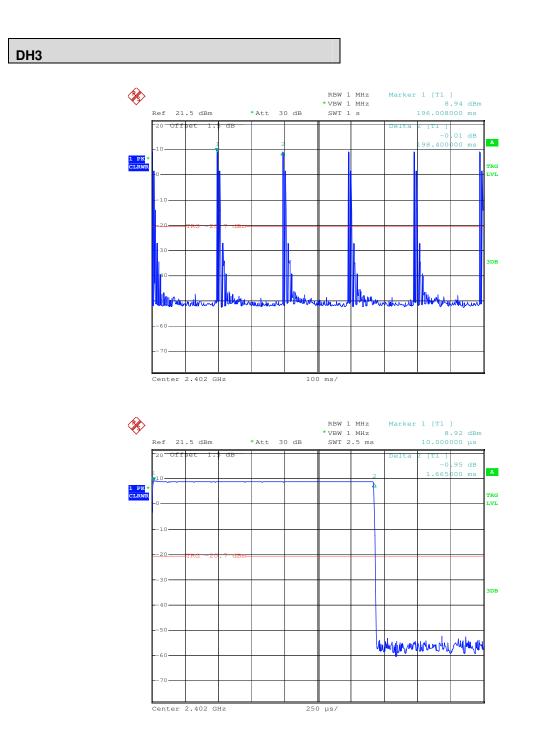



Report No.: SZEM120800437901 Page: 54 of 74

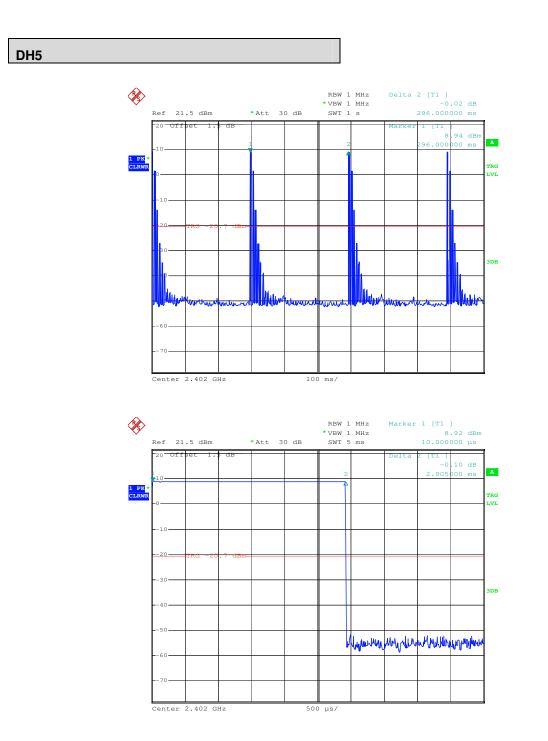



Report No.: SZEM120800437901 Page: 55 of 74


# **5.10Spurious RF Conducted Emissions**

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800437901 Page: 56 of 74

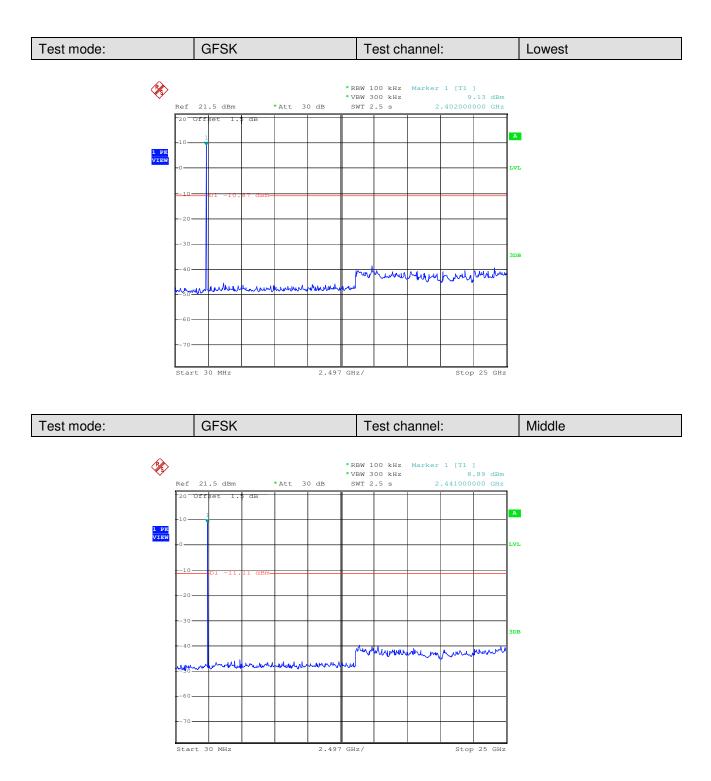




Report No.: SZEM120800437901 Page: 57 of 74

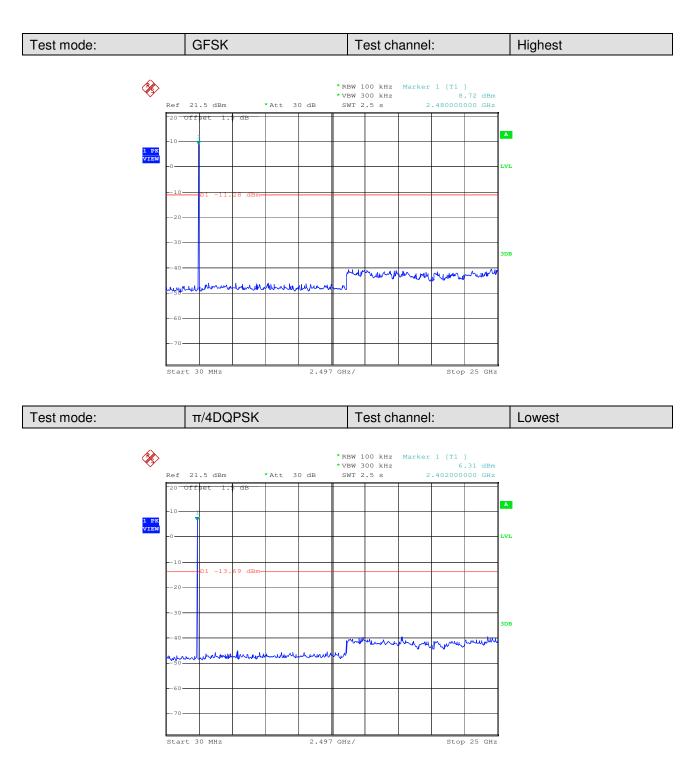




Report No.: SZEM120800437901 Page: 58 of 74

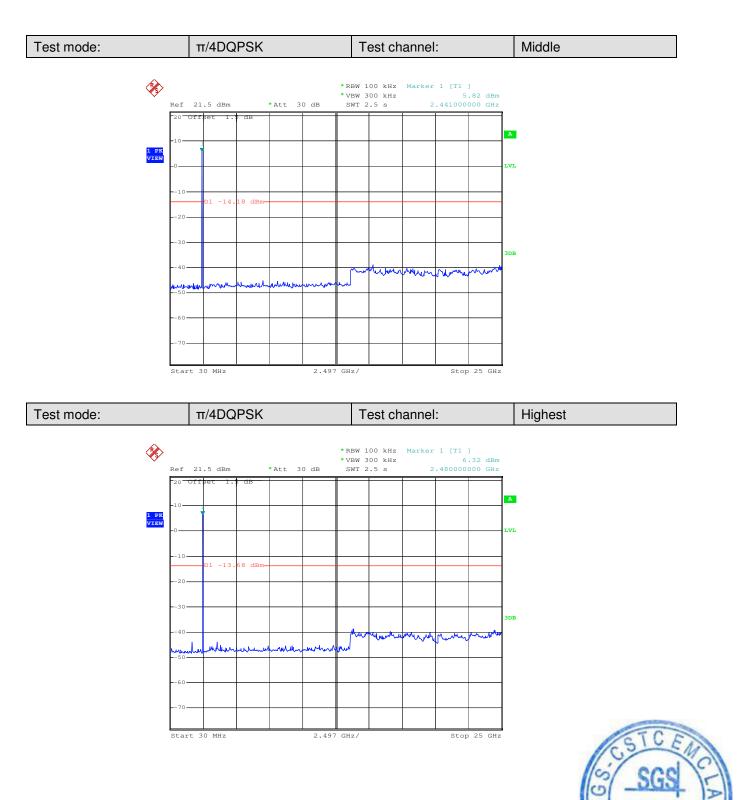




Report No.: SZEM120800437901 Page: 59 of 74

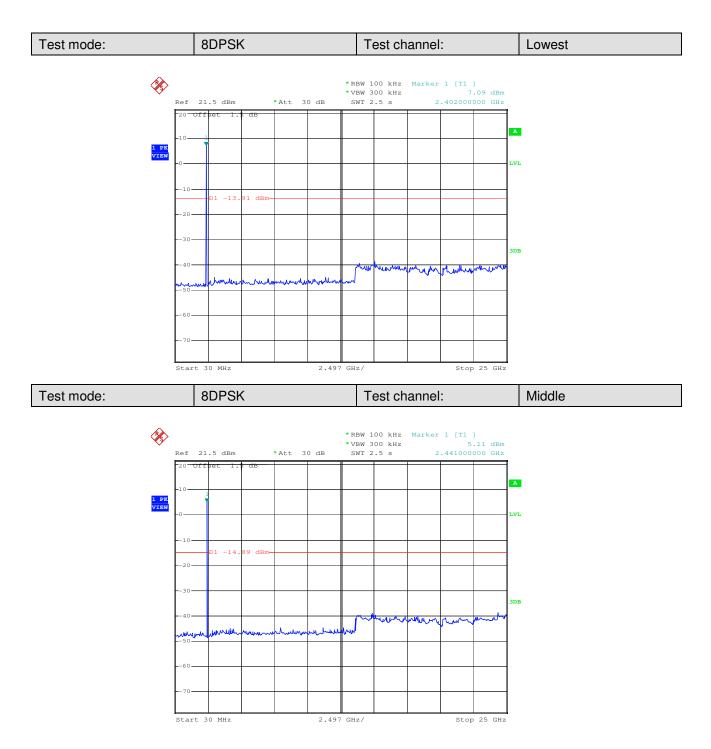




Report No.: SZEM120800437901 Page: 60 of 74

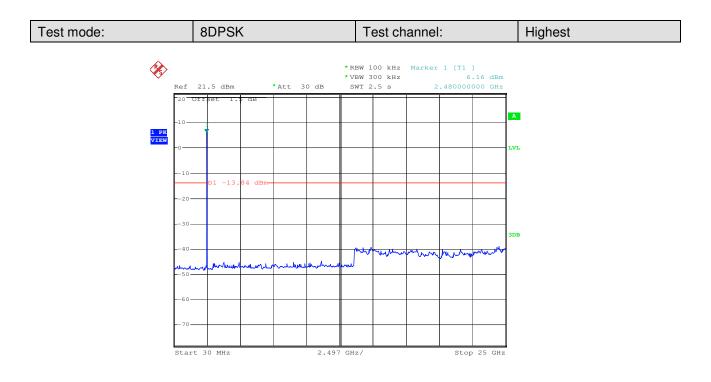



Report No.: SZEM120800437901 Page: 61 of 74

# 5.11 Pseudorandom Frequency Hopping Sequence

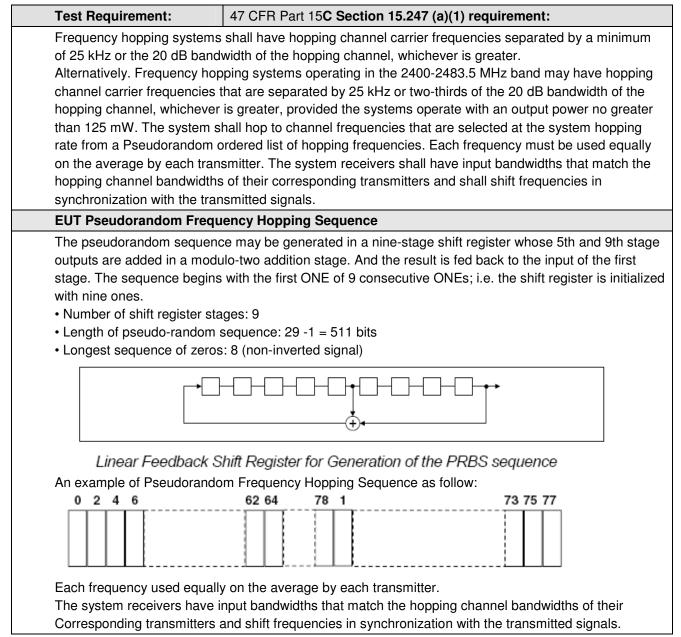



Report No.: SZEM120800437901 Page: 62 of 74


# **5.12 Radiated Spurious Emission**

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency Detector RBW VBW Remark								
	0.009MHz-0.090MH	Z	Peak	10kHz	z 30kHz	Peak			
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	: 3MHz	Peak			
			Peak	1MHz	10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz		500	54.0	Quasi-peak	3			
	Above 1GHz 500 54.0 Average 3								
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800437901 Page: 63 of 74

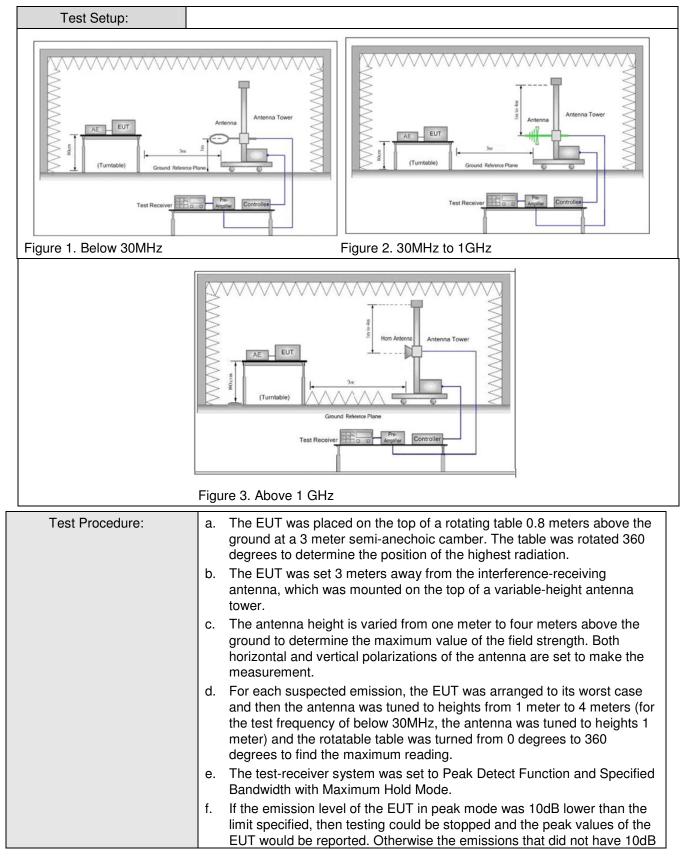



Report No.: SZEM120800437901 Page: 64 of 74


	<ul> <li>margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz).</li> <li>h. Repeat above procedures until all frequencies measured was complete.</li> </ul>				
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of				
	data type				
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				



Report No.: SZEM120800437901 Page: 65 of 74

#### 5.12.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)				
Test mode:	Transmitting	Vertical		

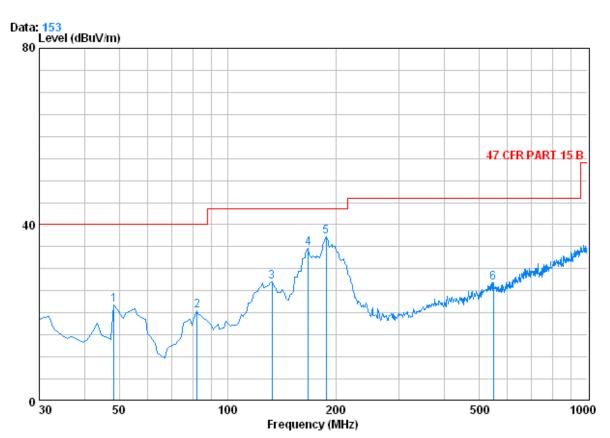


Condition : 47 CFR PART 15 B 3m 3142C VERTICAL Job No. : 4379RF Mode : TX

		CableA	ntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	48.430	0.78	8.47	27.29	39.88	21.83	40.00	-18.17
2	82.380	1.10	7.95	27.23	38.66	20.48	40.00	-19.52
3	132.820	1.29	7.82	26.99	44.93	27.04	43.50	-16.46
4	167.740	1.35	9.52	26.82	50.58	34.63	43.50	-8.87
50	188.110	1.38	10.06	26.74	52.66	37.36	43.50	-6.14
6	547.980	2.65	18.87	27.62	32.97	26.87	46.00	-19.13



Report No.: SZEM120800437901 Page: 66 of 74



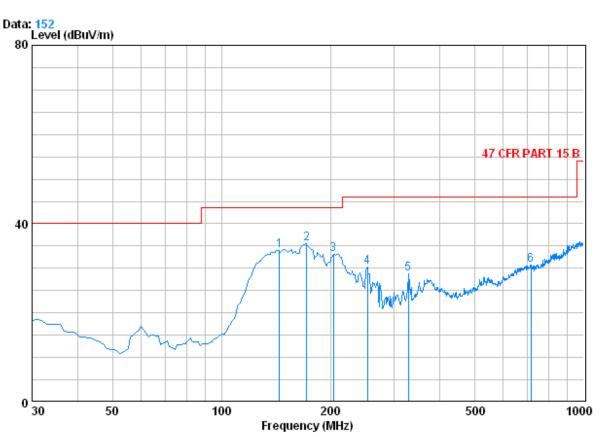

Condition : 47 CFR PART 15 B 3m 3142C HORIZONTAL Job No. : 4379RF

Mode	:	TΧ
------	---	----

 Freq		intenna Factor	-	Read Level	Level	Limit Line	Over Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
144.460 171.620 203.630 253.100 327.790 714.820	1.31 1.36 1.42 1.69 1.99 2.95	8.53 9.55 10.40 12.38 14.89 21.60	26.93 26.81 26.69 26.53 26.62 27.39	51.10 51.48 48.08 42.84 38.50 33.61	34.00 35.58 33.22 30.38 28.76 30.76	43.50 46.00 46.00	-9.50 -7.92 -10.28 -15.62 -17.24 -15.24



Report No.: SZEM120800437901 Page: 67 of 74

Worse case i	mode: (	GFSK(DH1)	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1593.340	2.58	28.84	39.39	58.20	50.23	74	-23.77	Vertical
4410.750	4.43	34.97	41.35	50.07	48.12	74	-25.88	Vertical
4804.000	4.69	34.70	41.63	54.94	52.70	74	-21.30	Vertical
7190.687	5.75	35.88	39.89	51.77	53.51	74	-20.49	Vertical
9441.913	6.03	37.14	37.94	48.57	53.80	74	-20.20	Vertical
11933.470	6.45	38.83	38.24	46.62	53.66	74	-20.34	Vertical
1244.726	2.35	27.63	39.25	49.77	40.50	74	-33.50	Horizontal
1593.340	2.58	28.84	39.39	55.20	47.23	74	-26.77	Horizontal
4804.000	4.69	34.70	41.63	56.29	54.05	74	-19.95	Horizontal
6347.466	5.22	36.12	40.63	50.51	51.22	74	-22.78	Horizontal
7206.000	5.77	35.88	39.87	55.37	57.15	74	-16.85	Horizontal
10916.260	6.20	38.47	37.83	46.94	53.78	74	-20.22	Horizontal

#### 5.12.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1	) Tes	Test channel: Middle		Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1170.959	2.30	27.51	39.21	49.94	40.54	74	-33.46	Vertical
1621.985	2.59	29.09	39.41	58.83	51.10	74	-22.90	Vertical
4882.000	4.72	34.59	41.68	54.69	52.32	74	-21.68	Vertical
6172.197	5.17	35.90	40.78	50.81	51.10	74	-22.90	Vertical
7323.000	5.92	35.93	39.77	59.08	61.16	74	-12.84	Vertical
9834.406	5.98	37.54	37.60	47.95	53.87	74	-20.13	Vertical
1621.985	2.59	29.09	39.41	55.62	47.89	74	-26.11	Horizontal
3249.760	3.53	33.30	40.48	53.53	49.88	74	-24.12	Horizontal
4882.000	4.72	34.59	41.68	53.59	51.22	74	-22.78	Horizontal
7323.000	5.92	35.93	39.77	54.35	56.43	74	-17.57	Horizontal
9251.580	6.08	36.89	38.11	48.65	53.51	74	-20.49	Horizontal
12086.330	6.49	38.99	38.31	46.42	53.59	74	-20.41	Horizontal



Report No.: SZEM120800437901 Page: 68 of 74

Worse case	mode:	GFSK(DH1)		Test channel:		Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1642.761	2.60	29.21	39.42	55.98	48.37	74	-25.63	Vertical
3308.185	3.58	33.28	40.52	55.53	51.87	74	-22.13	Vertical
4960.000	4.76	34.46	41.74	53.40	50.88	74	-23.12	Vertical
6494.564	5.26	36.28	40.50	51.72	52.76	74	-21.24	Vertical
9859.472	5.98	37.56	37.58	47.95	53.91	74	-20.09	Vertical
10999.950	6.22	38.50	37.86	46.55	53.41	74	-20.59	Vertical
1642.761	2.60	29.21	39.42	55.94	48.33	74	-25.67	Horizontal
3308.185	3.58	33.28	40.52	55.65	51.99	74	-22.01	Horizontal
4960.000	4.76	34.46	41.74	55.94	53.42	74	-20.58	Horizontal
5689.360	5.02	35.20	41.19	52.63	51.66	74	-22.34	Horizontal
7440.000	6.04	35.98	39.67	54.37	56.72	74	-17.28	Horizontal
10036.730	5.98	37.76	37.47	47.28	53.55	74	-20.45	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) Refer to section 5.9 for details, Average Value=Peak Value+PDCF; The worst PDCF is -30.74dB. So, only the peak measurements were shown in the report.





Report No.: SZEM120800437901 Page: 69 of 74

# 5.13Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chamber	r)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
		74.0	Peak Value					
Test Setup:								
Test Octup.								
Figure 1. 30MHz to 1GHz	Fig	ure 2. Above 1 GHz						



Report No.: SZEM120800437901 Page: 70 of 74

Test Procedure:a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was turned to heights from 1 meter to 4 meters and the rotatable table was turned to mode.f. Place a marker at the end of the restricted band. Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band. closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the lowest channel , the Highest channel. h. Repeat above procedures until all frequencies measured was complete.k. Non-hopping transmitting mode with all kind of modulation and all kind of data typeFinal Test Mode:Through Pre-scan, find the DH5 of date type is the worse case of GFSK modulation typeInstruments Used:Refer to section 4.10 for detailsTest Results:Pass		
data type       Final Test Mode:       Through Pre-scan, find the DH5 of date type is the worse case of GFSK modulation type       Instruments Used:     Refer to section 4.10 for details	Test Procedure:	<ul> <li>the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel.</li> <li>h. Repeat above procedures until all frequencies measured was</li> </ul>
GFSK modulation type Instruments Used: Refer to section 4.10 for details	Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	Final Test Mode:	
Test Results: Pass	Instruments Used:	Refer to section 4.10 for details
	Test Results:	Pass

#### Test plot as follows:




Mode

#### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120800437901 Page: 71 of 74

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
-----------------------------	---------------	--------	---------	------	----------

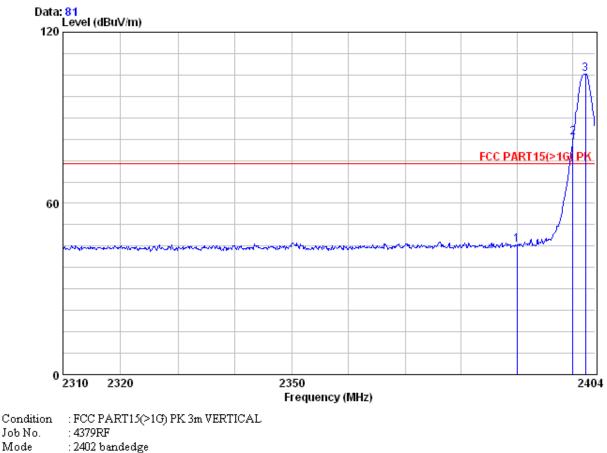


	Freq			Preamp Factor		Level	Limit Line		Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	49.80	45.44	74.00	-28.56	Peak
2 X	2400.000	2.98	32.51	39.86	87.26	82.89	74.00	8.89	Peak
30	2402.308	2.98	32.51	39.86	109.77	105.40	74.00	31.40	Peak



Report No.: SZEM120800437901 Page: 72 of 74

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
-----------------------------	---------------	--------	---------	------	------------

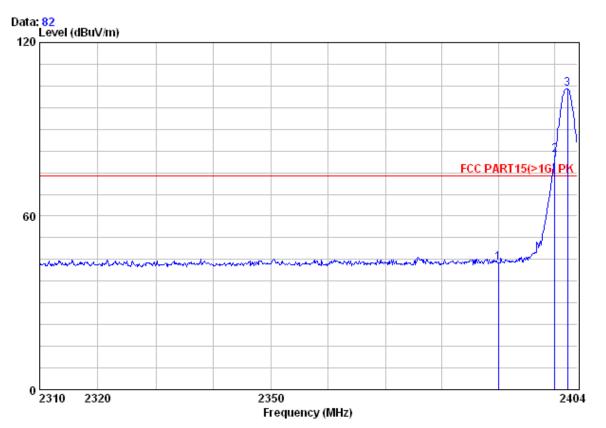

: FCC PART15(>1G) PK 3m HORIZONTAL Condition : 4379RF

Job No.


Mode : 2402 bandedge

	Freq			Preamp Factor		Level	Limit Line		Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2 X 3 X	2390.000 2400.000 2402.308	2.98	32.51	39.86	85.41	43.89 81.04 103.94	74.00	7.04	Peak



Report No.: SZEM120800437901 Page: 73 of 74

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	------------	---------------	---------	---------	------	----------	--

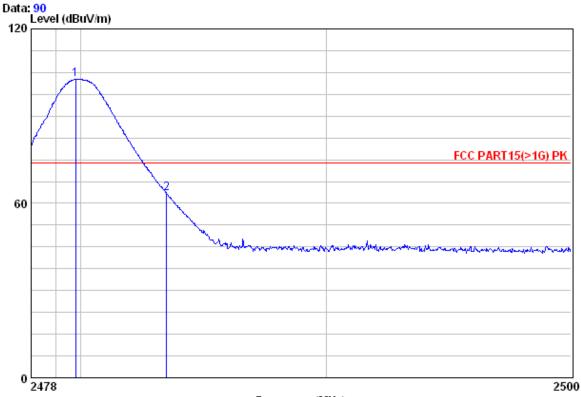

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 4379RF


Mode : 2480 bandedge

	Freq		Antenna Factor	-		Level	Limit Line		Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 X 2	2479.804 2483.500					102.59 63.59			
2	2100.000	0.00	02.01	02.24	001	00.02		10.11	reak



Report No.: SZEM120800437901 Page: 74 of 74

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

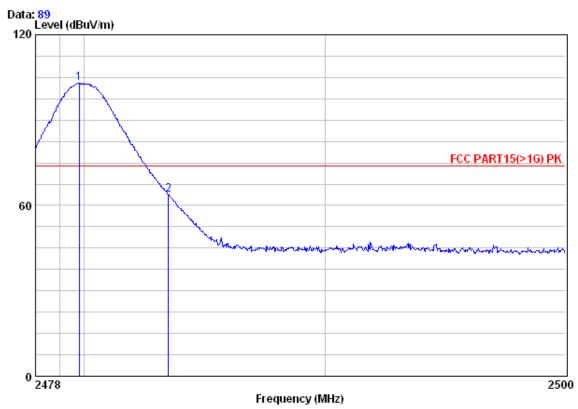

Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No. : 4379RF Mode : 2480 bandedge

101046	. 2460 Gandeuge Freq			Preamp Factor		Level	Limit Line		Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
10 2	2479.804 2483.500					102.87 63.66			

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Refer to section 5.9 for details, Average Value=Peak Value+PDCF; The worst PDCF is -30.74dB. So, only the peak measurements were shown in the report.