

CETECOM ICT Services GmbH

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Phone: +49 (0) 681-598-0 Fax:-9075
RSC-Laboratory



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Recognized by the Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463A-1 (IC)
Certification ID: DE 0001
Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)
The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 4-2934-01-02/08-FP
Type identification : SCD510 / SCD520
Applicant : Philips Consumer Lifestyle BV
FCC ID : BOUSCD520
IC Certification No : 135M-SCD520
Test standards : FCC Part 15, subpart D
Industry Canada RSS-213, Issue 2

Table of contents

1	General information.....	4
1.1	Notes	4
1.2	Testing laboratory	5
1.3	Details of applicant	5
1.4	Application details	5
2	Test standard/s:.....	6
3	Technical tests.....	7
3.1	Details of manufacturer.....	7
3.1.1	Test Item	7
3.2	Description of the tested Device	8
3.3	Test Environment.....	8
3.4	Other Comments	8
4	Statement of Compliance	9
4.1	Summary of Measurement Results	9
5	Measurements and results	10
5.1	Power Line Conducted Emissions.....	10
5.2	Coordination with fixed microwave.....	12
5.3	Digital Modulation Techniques.....	12
5.4	Labeling Requirements	12
5.5	Antenna Requirements	13
5.6	Channel Frequencies	13
5.7	Automatic Discontinuation of Transmission.....	14
5.8	Peak Power Output.....	15
5.9	Emission Bandwidth B	18
5.10	Power Spectral Density	21
5.11	In-Band Unwanted Emissions, Conducted.....	26
5.12	Out-of-Band Emissions, Conducted.....	29
5.13	Carrier Frequency Stability	35
5.14	Frame Repetition Stability	36
5.15	Frame Repetition Stability	36
5.16	Monitoring Threshold, Least Interfered Channel.....	37
5.17	Threshold Monitoring Bandwidth	39
5.18	Reaction Time and Monitoring Interval	40
5.19	Time and Spectrum Window Access Procedure	42
5.20	Acknowledgments and Transmission duration	44
5.21	Dual Access Criteria Check	45
5.22	Alternative monitoring interval	46
5.23	Spurious Emissions (Radiated)	46
5.24	Receiver Spurious Emissions	48
6	Test Setups.....	51
6.1	Frequency Measurements.....	51
6.2	Timing Measurements.....	51
6.3	Conducted Emission Test.....	51
6.4	Radiated Emission Test.....	52
6.5	Power Line Conducted Emissions Test.....	52
6.6	Monitoring Tests	53
7	Safety exposure levels	54

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**

8 Used Test Equipment	55
9 Photographs of the Test Set-up	56
10 Photographs of the EUT	58

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.


Test laboratory manager:

2008-08-21 **Marco Lenjoint**

Date

Name

Signature




Technical responsibility for area of testing:

2008-08-21 **Joachim Wolf**

Date

Name

Signature

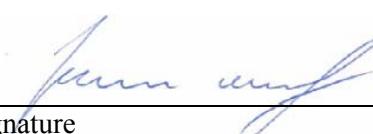

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: **Federal Motor Transport Authority (KBA)**
DAR registration number: **KBA-P 00070-97**

Testing location, if different from CETECOM ICT Services GmbH:

Name :

Street :

Town :

Country :

Phone :

Fax :

1.3 Details of applicant

Name:	Philips Consumer Lifestyle BV
Street:	Tussendiepen 4
Town:	9206AD Drachten
Country:	The Netherlands
Telephone:	/
Fax:	/
Contact:	Mr. F. Mous
E-mail:	/
Telephone:	+31 512 594329

1.4 Application details

Date of receipt of order: **2008-04-07**

Date of receipt of test item: **2008-04-07**

Date of start test: **2008-04-21**

Date of end test **2008-08-21**

**Persons(s) who have been
present during the test:**

2 Test standard/s:

FCC Part 15, subpart D

Isochronous UPCS Device 1920 – 1930 MHz

Industry Canada RSS-213, Issue 2

**2 GHz Licence-exempt Personal
Communication Service Devices (LE-PCS)**

3 Technical tests

3.1 Details of manufacturer

Name:	VTech
Street:	Xia Ling Bei Management Zone
Town:	Liaobu, Dongguan, Guangdong
Country:	China 511758

3.1.1 Test Item


Kind of test item	:	UPCS Base station
Type identification	:	SCD510 / SCD520
S/N serial number	:	0801000046, 0801000049, 0801000080
HW hardware status	:	-
SW software status	:	-
Tested to Radio Standards Specification (RSS) No.	:	RSS-213 Issue 2
Open Area Test Site Industry Canada Number	:	IC 3463A-1
Frequency Band [MHz]	:	1920 – 1930
Frequency Range (or fixed frequency)	:	1921.536 – 1928.448 MHz
Type of Modulation	:	Digital (Gaussian Frequency Shift Keying)
Number of channels	:	5 RF Channels, 5x12 = 60 TDMA Duplex Channels
Antenna information	:	2 permanently attached antennas, no ext. connector
RF Power [W] (max)	:	Conducted: 18.1 dBm, 64.5 mW Radiated EIRP: 17.3 dBm, 53.7 mW
Occupied Bandwidth (99% BW)	:	1.46 MHz
Emission Designator (TRC-43)	:	1M46F1E
Receiver Spurious (worst case)	:	-72 dBm
Transmitter Spurious (worst case)	:	-50 dBm
Power Supply	:	115 V AC
Temperature Range	:	0 °C to 40°C

FCC ID: BOUSCD520

IC: 135M-SCD520

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2008-08-21

Test engineer: Marco Lenjoint

3.2 Description of the tested Device

Model SCD510 is the same as Model SCD520 with the exception that SCD510 has no temperature sensor. To test the worst case, Model SCD520 was used for all tests.

3.3 Test Environment

Description	Shortcut	Unit	Value
Nominal Temperature	T_{nom}	°C	21 - 24
Nominal Humidity	H_{nom}	%	30 -50
Nominal Power Source	V_{nom}	V	115 V AC

3.4 Other Comments

4 Statement of Compliance

4.1 Summary of Measurement Results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

CFR 47 Part 15 UPCS

Name of test	FCC CFR 47 Paragraph	IC RSS-213 Paragraph	Verdict
Coordination with fixed microwave	15.307(b)	N/A	Complies
Digital Modulation Techniques	15.319(b)	6.1	Complies
Labeling requirements	15.19(a)(3)	RSS-GEN 5.2	Complies
Antenna requirements	15.317, 15.203	4.1(e)	Complies
Power Line Conducted Emission	15.107(a), 15.207(a)	6.3 RSS GEN 7.2.2	Complies
Emission Bandwidth	15.323(a)	6.4	Complies
In-band Emission	15.323(d)	6.7.2	Complies
Out-of-band Emissions	15.323(d)	6.7.1	Complies
Peak Transmit Power	15.319(c)(e), 15.31(e)	6.5	Complies
Power Spectral Density	15.319(d)	4.3.2.1	Complies
Automatic discontinuation of transmission	15.319(f)	4.3.4(a)	Complies
Carrier frequency stability	15.323(f)	6.2	Complies
Frame repetition stability	15.323(e)	4.3.4(c)	Complies
Frame period and jitter	15.323(e)	4.3.4(c)	Complies
Monitoring threshold, Least interfered channel	15.323(c)(2);(5); (9)	4.3.4(b)	Complies
Monitoring of intended transmit window and maximum reaction time	15.323(c)(1)	4.3.4	Complies
Threshold monitoring bandwidth	15.323(c)(7)	4.3.4	Complies
Reaction time and monitoring interval	15.323(c)(1);(5); (7)	4.3.4	Complies
Access criteria test interval	15.323(c)(4);(6)	4.3.4	Complies
Access criteria functional test	15.323(c)(4);(6)	4.3.4	Complies
Acknowledgments	15.323(c)(4)	4.3.4	Complies
Transmission duration	15.323(c)(3)	4.3.4	N/A ¹
Dual access criteria	15.323(c)(10)	4.3.4	N/A ¹
Alternative monitoring interval	15.323(c)(10);(11)	4.3.4	N/A ²
Spurious Emissions (Antenna Conducted)	15.323(d)	6.7.1	Complies ³
Spurious Emissions (Radiated)	15.319(g), 15.109(a), 15.209(a)	4.3.3 RSS-GEN 7.2.3	Complies ⁴
Receiver Spurious Emissions	N/A	6.8	Complies

¹Only applicable for EUT that can initiate a communication link

²The client declares that the tested equipment does not implement this provision

³The tested equipment has integrated antennas only

⁴Only requirement FCC 15.109 for unintentional radiators was tested radiated

5 Measurements and results

5.1 Power Line Conducted Emissions

Measurement Procedure:

ANSI C63.4-2003 using 50 μ H/50 ohms LISN.

Test Result: **Pass**

Measurement Data: **See attached graph, (Peak detector).**

Highest measured value (L1 and N):

All values were below the Average Limit even when measured with the Peak Detector.


Frequency	Detector	Measured value	Limit	Margin
MHz	Peak/QP/AV	dB μ V	dB μ V	dB
/	QP	/	/	/
/	AV	/	/	/
/	QP	/	/	/
/	AV	/	/	/

Requirement: FCC 15.207 (a)

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**

EUT: SCD520 (baby unit) + AC/DC adaptor (UD075040B)
Manufacturer: Philips Consumer Lifestyle
Operating Condition: transmitting to parent unit / battery charging
Test site: CETECOM ICT Services Room 006
Operator: Merten
Power Supply: AC 115 V
Comment:
Start of Test: 23.07.2008 / 11:13:39

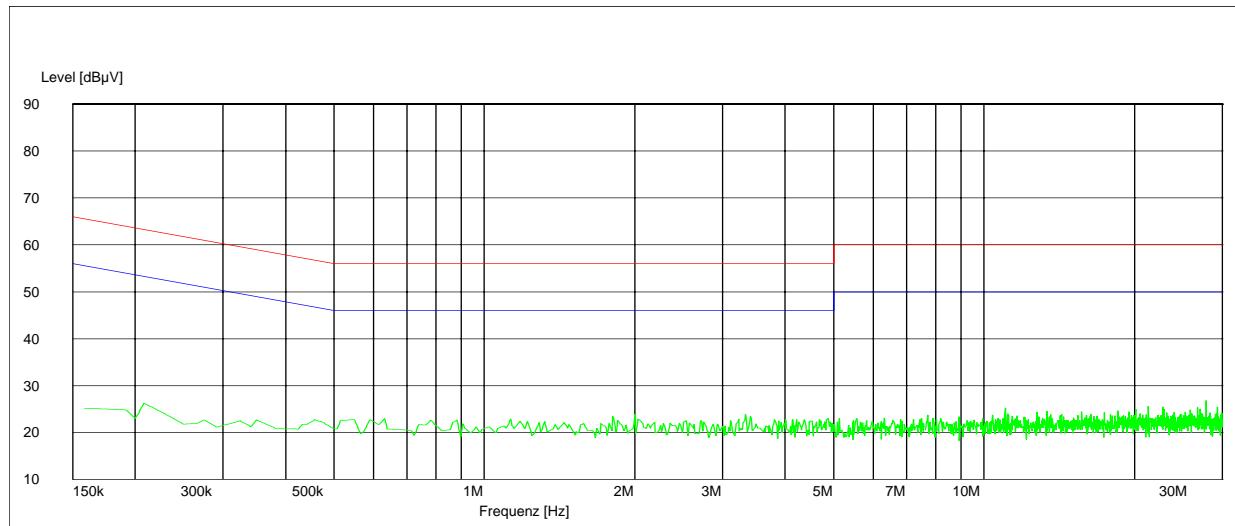

5.2 Coordination with fixed microwave

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:

Yes No

Requirement: FCC 15.307 (b):

Each application for certification of equipment operating under the provisions of this Subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

5.3 Digital Modulation Techniques

The tested equipment is based on DECT technology, the only difference is that the channel allocation is modified to operate in the 1920-1930 MHz band.

The EUT use Multi Carrier / Time Division Multiple Access / Time division duplex and Digital GFSK modulation.

For further details see the operational description provided by the applicant.

Requirement: FCC 15.319(b)

All transmissions must use only digital modulation techniques.

5.4 Labeling Requirements

See separate documents showing the label design and the placement of the label on the EUT.

Requirement: FCC 15.19

The FCC identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is to small:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipment.

5.5 Antenna Requirements

Does the EUT have detachable antenna(s)? Yes No

If detachable, is the antenna connector(s) non-standard? Yes No

The tested equipment has only integral antennas. The conducted tests were performed on a sample with a temporary antenna connector.

Requirements: FCC 15.203, 14.204, 15.317

5.6 Channel Frequencies

UPCS CHANNEL	FREQUENCY (MHz)
Upper Band Edge	1930.000
0 (Highest)	1928.448
1	1926.720
2	1924.992
3	1923.264
4 (Lowest)	1921.536
Lower Band Edge	1920.000

Requirement: FCC 15.303(d), (g)

Within 1920-1930 MHz band for isochronous devices.

5.7 Automatic Discontinuation of Transmission

Does the EUT transmit control and Signaling Information?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Type of EUT:	<input type="checkbox"/> Initiating device	<input checked="" type="checkbox"/> Responding device

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion device is established.

Number	Test	EUT Reaction	Verdict
1	Power removed from EUT	A	Pass
2	EUT switched Off	N/A	Pass
3	Hook-On by companion device	B	Pass
4	Hook-On by EUT	N/A	Pass
5	Power removed from companion device	B	Pass
6	Companion device switched Off	B	Pass

A – Connection breakdown, Cease of all transmissions

B – Connection breakdown, EUT transmits control and signaling information

C – Connection breakdown, companion device transmits control and signaling information

N/A – Not applicable (the EUT does not have an on/off switch and can not perform Hook-On)

Requirement: FCC 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provision is not intended to preclude transmission of control and signaling information or use or repetitive code used by certain digital modulation technologies to complete frame or burst intervals.

5.8 Peak Power Output

Measurement Procedure:

ANSI C63.17, clause 6.1.2.

Test Results: Pass

Measurement Data:

Maximum Conducted Output Power

Channel No.	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Radiated Output Power (dBm)	Maximum Antenna Gain (dBi)
4	1921.536	18.1	17.3	-0.8
2	1924.992	18.1	16.8	-1.3
0	1928.448	18.0	16.5	-1.5

The EIRP is calculated from the measured field strength by the formula in DA00-705.

For this test it was also checked that the input voltage variation of 85 and 115% of nominal value did not have any effect on the measured output power, neither radiated nor conducted.

Limit:

Conducted: $100 \mu\text{W} \times \text{SQRT}(B)$ where B is the measured Emission Bandwidth in Hz

FCC 15.319(c)(e): $20.8 = 20.8 \text{ dBm}$ (120 mW)

RSS-213, Issue 2: $20.6 = 20.6 \text{ dBm}$ (112 mW)


The antenna gain is below 3 dBi.

Requirements: FCC 15.319(f). RSS-213, Issue 2


Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.


Conducted Peak Output Power

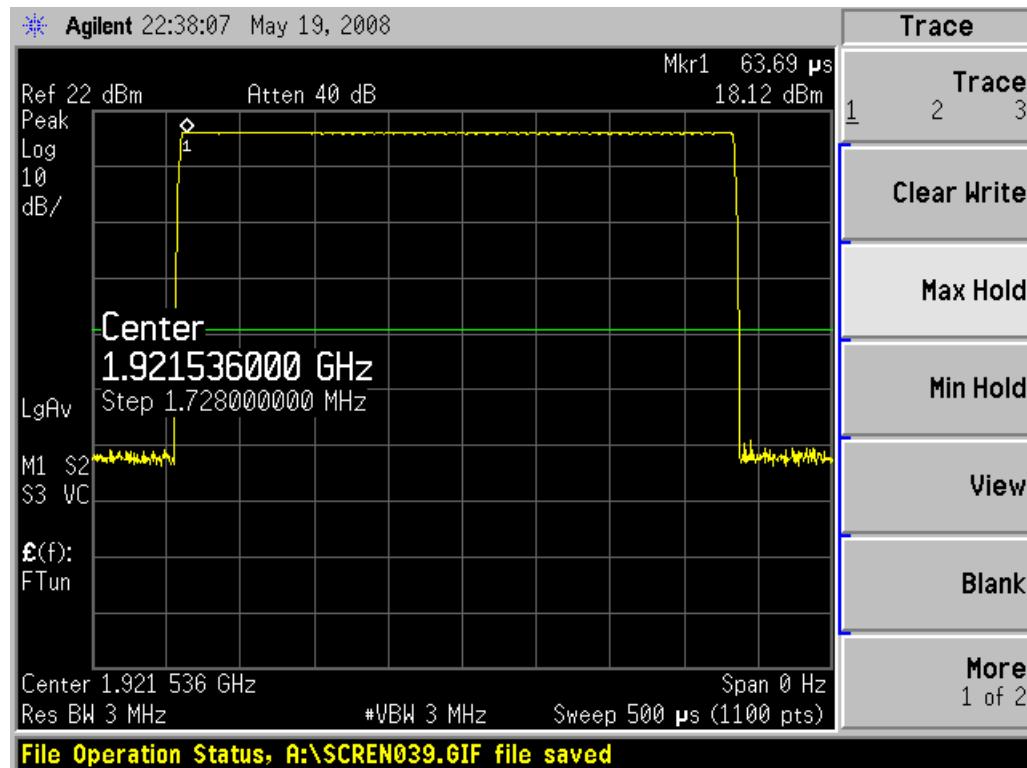

Lower Channel

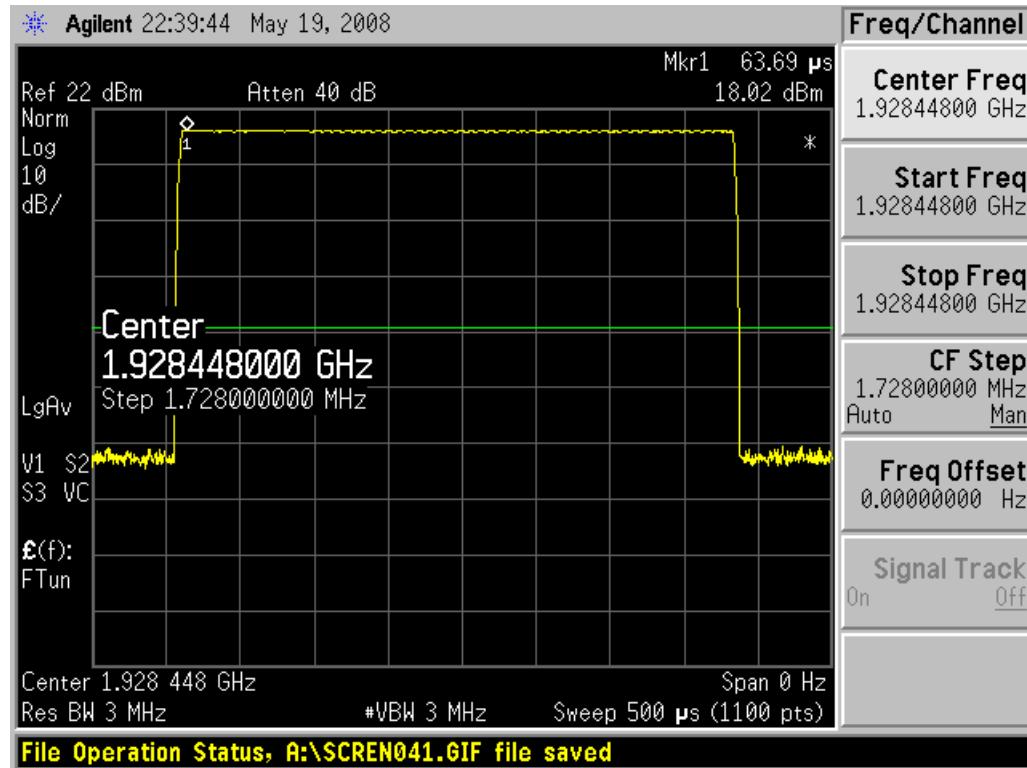

Upper Channel

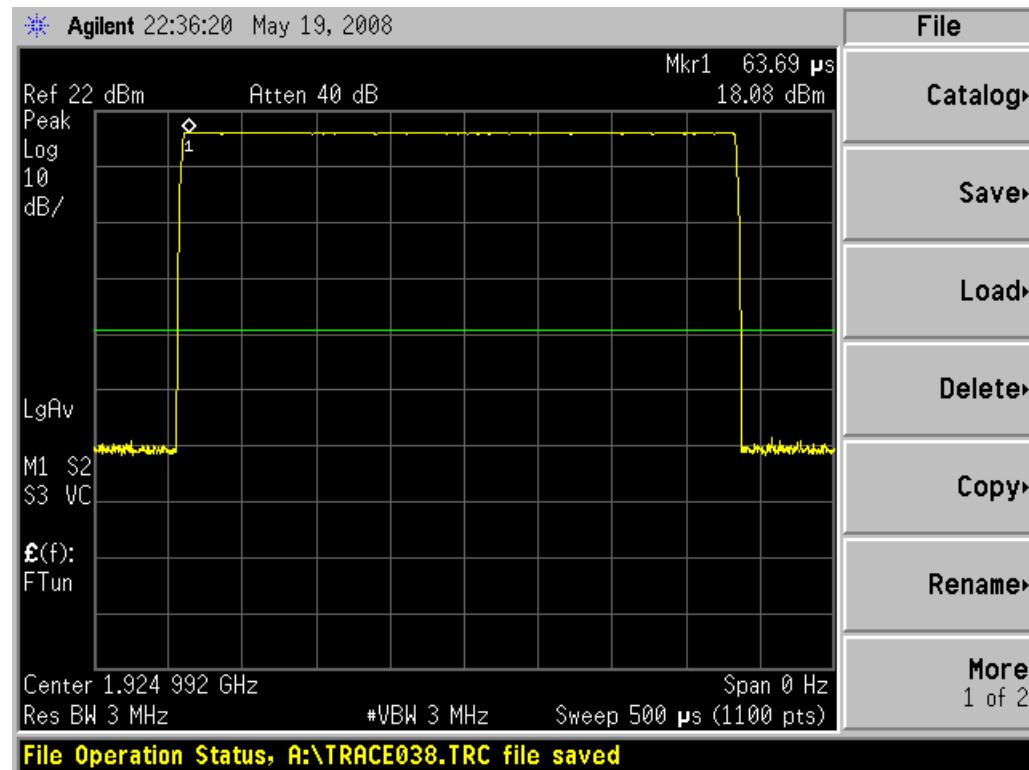

Middle Channel

5.9 Emission Bandwidth B

Measurement Procedure:

ANSI C63.17, clause 6.1.3.

Test Results: Pass

Measurement Data:

Channel No.	Frequency (MHz)	26 dB Bandwidth B (kHz)
4	1921.536	1460
0	1928.448	1438

Channel No.	Frequency (MHz)	20 dB Bandwidth B (kHz)
2	1924.992	1325

Channel No.	Frequency (MHz)	6 dB Bandwidth B (kHz)
4	1921.536	N/A
0	1928.448	N/A
Channel No.	Frequency (MHz)	12 dB Bandwidth B (kHz)
4	1921.536	N/A
0	1928.448	N/A

Requirement: FCC 15.323(a)

The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.


Requirement: RSS-213 Issue 2, clause 6.4

The 20 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.


No requirement for 6 dB and 12 dB Bandwidth. These values are only used for testing Monitoring Bandwidth if the Simple Compliance test fails (ANSI C63.17, clause 7.4).

CETECOM ICT Services GmbH

Test report no.: 4-2934-01-02/08-FP

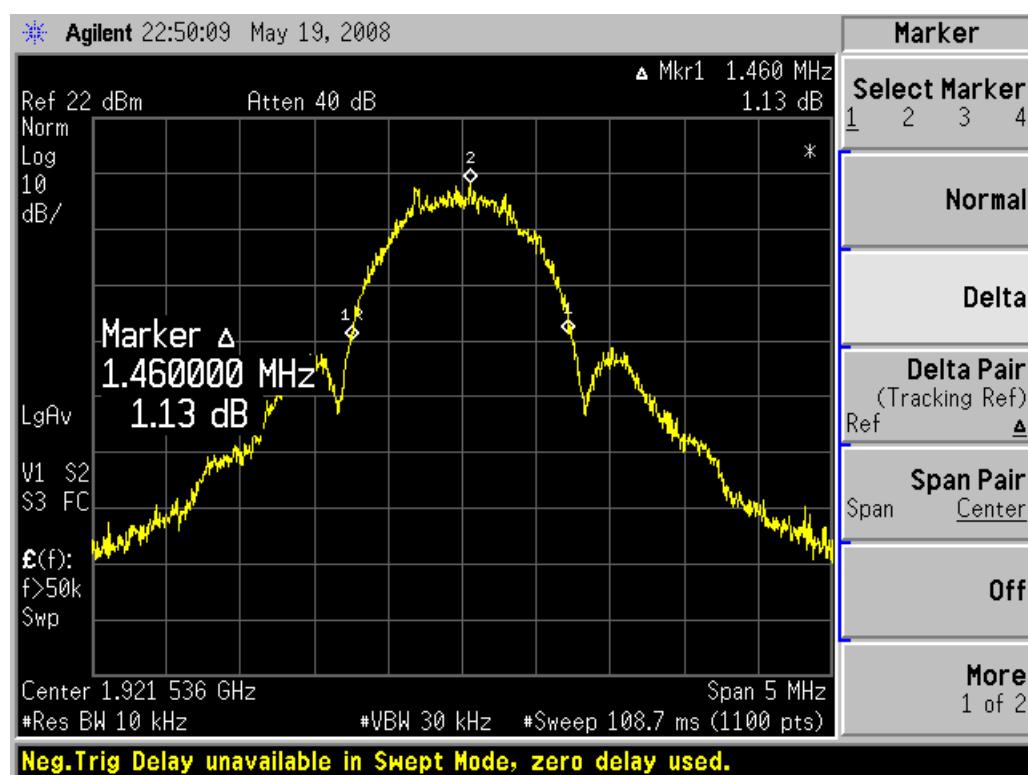

Emission Bandwidth B, Lower Channel

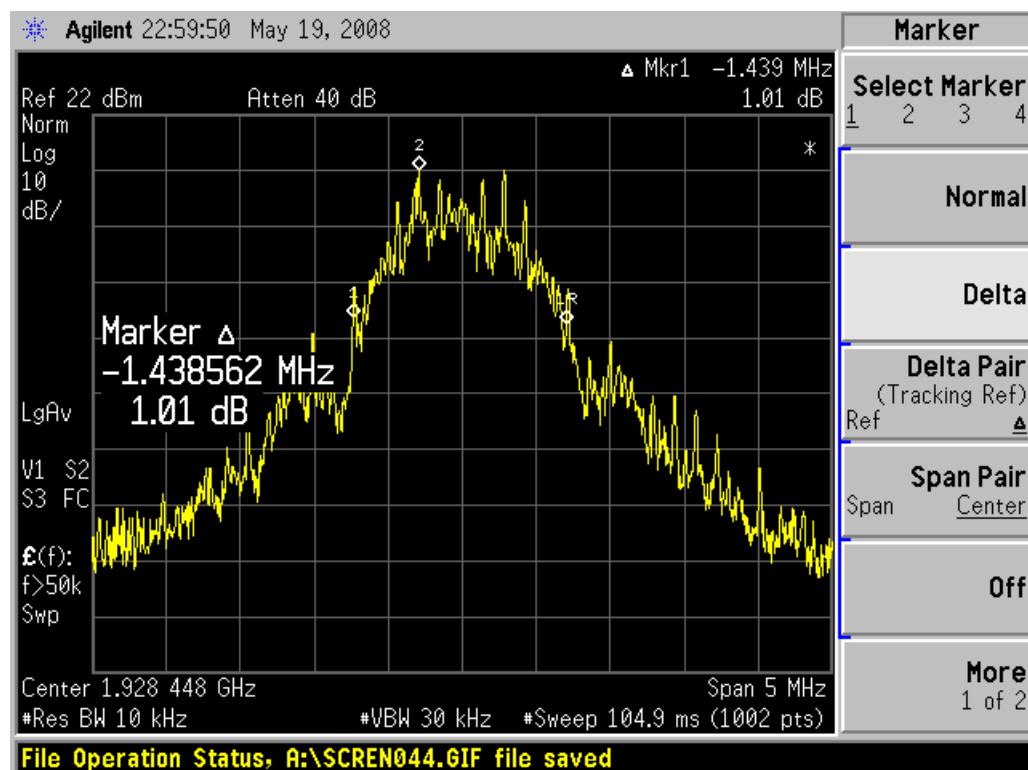

Emission Bandwidth B, Upper Channel

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**



20 dB Bandwidth B, Middle Channel

5.10 Power Spectral Density

Measurement Procedure:

ANSI C63.17, clause 6.1.5.

Test Results: Pass

Measurement Data:

Channel No.	Frequency (MHz)	Power Spectral Density (mW/3kHz)
4	1921.240	0.00106
0	1928.152	0.00101


Averaged over 1000 sweeps.

Requirement: FCC 15.319(d)


The Power Spectral Density shall be less than 3 mW (4.77 dBm) when averaged over at least 100 sweeps.

Power Spectral Density

Lower Channel:

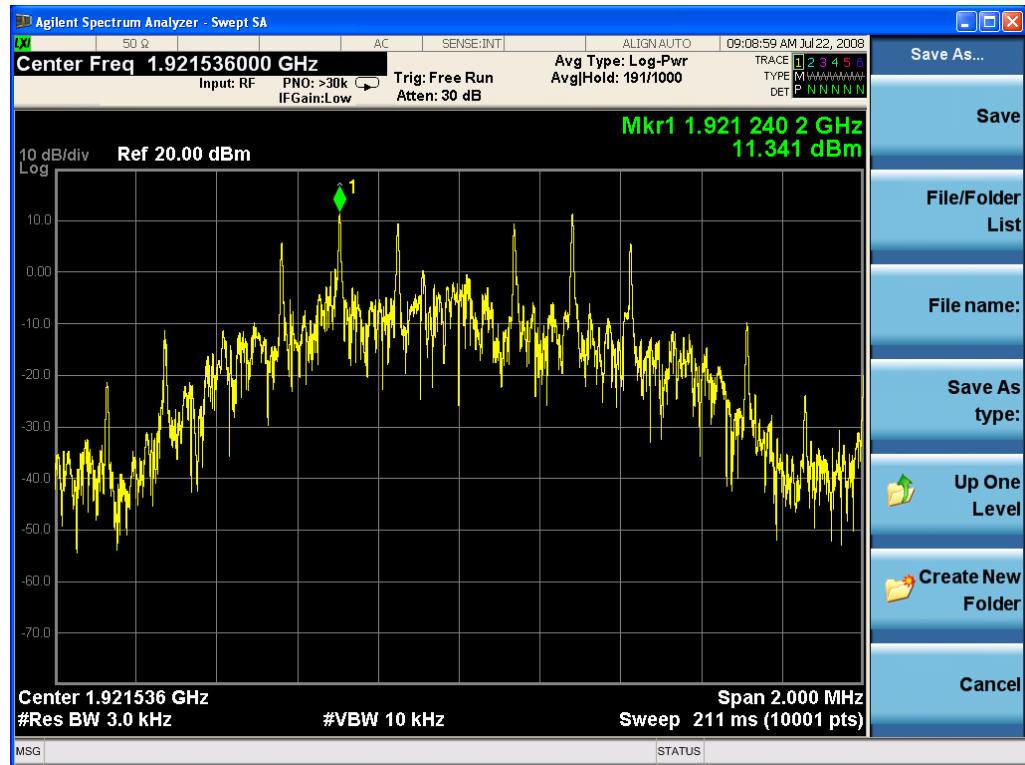


Overview

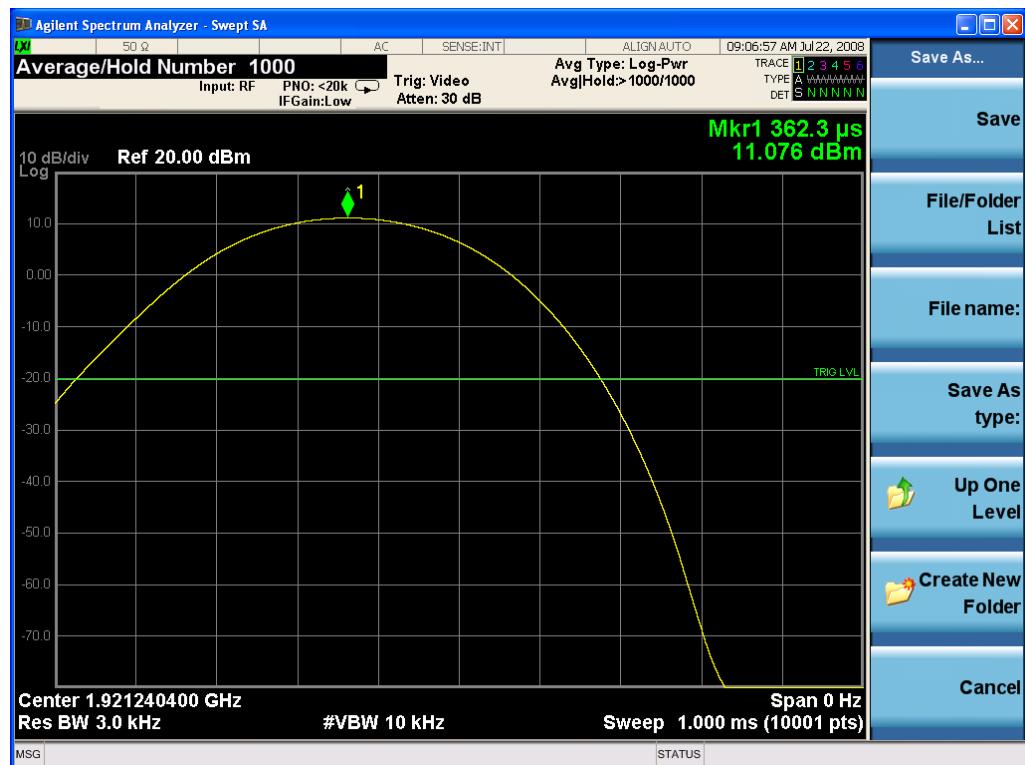

Averaged, 1000 Sweeps

CETECOM ICT Services GmbH


Test report no.: **4-2934-01-02/08-FP**

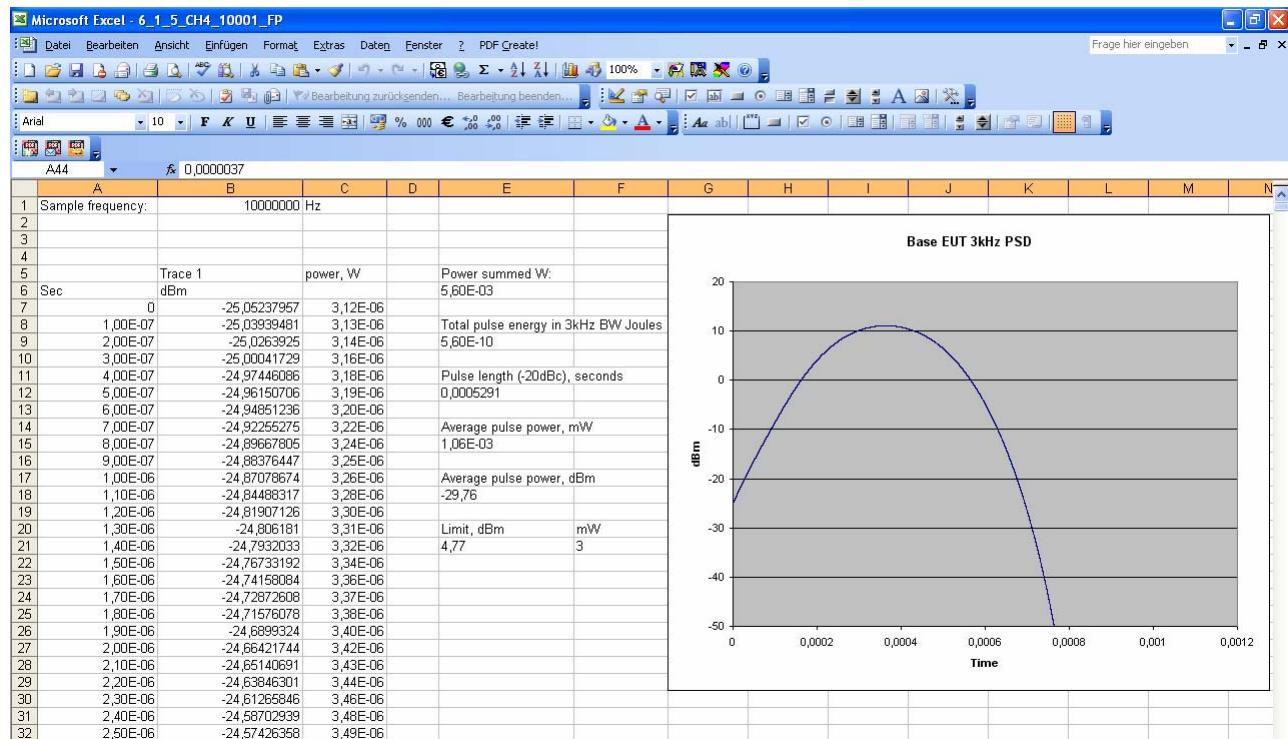


Screenshot of Excel file showing PSD calculations for base EUT, Lower Channel

Power Spectral Density

Upper Channel:

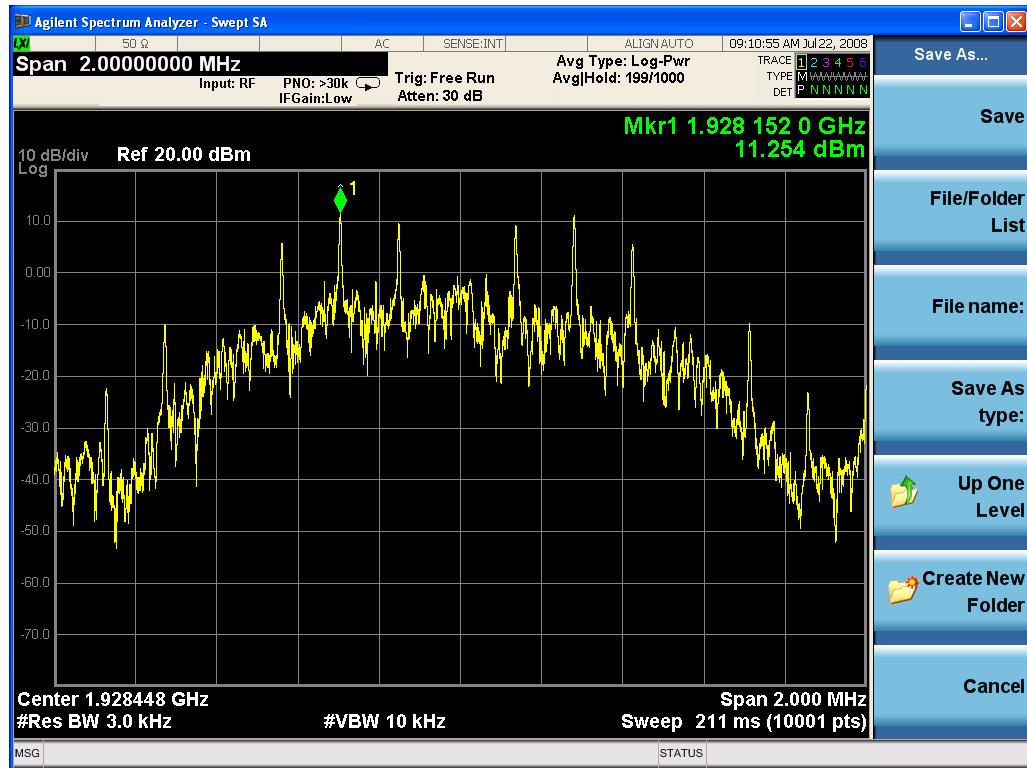


Overview

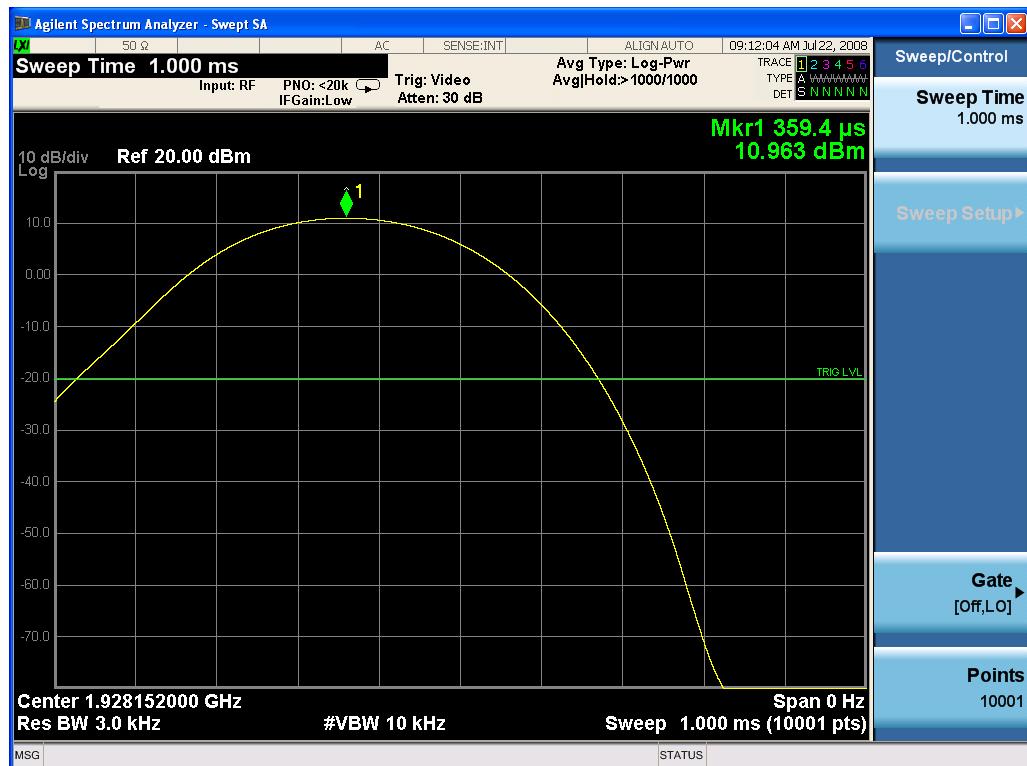

Averaged, 1000 Sweeps

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**

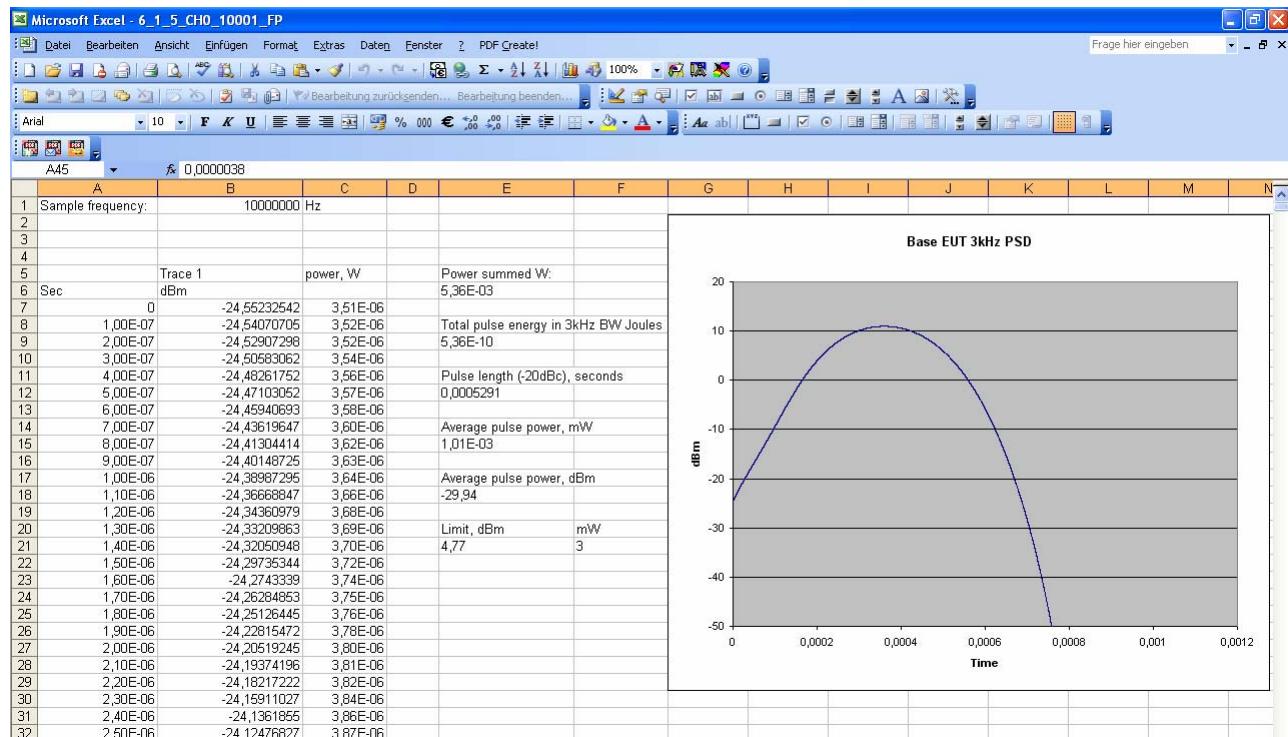

Screenshot of Excel file showing PSD calculations for base EUT, Upper Channel

5.11 In-Band Unwanted Emissions, Conducted

Measurement Procedure:

ANSI C63.17, clause 6.1.6.1.

Test Results: Pass


Measurement Data:

See plots.


Requirement: FCC 15.323(d)

$B < f2 \leq B$:	less than or equal to 30 dB below max. permitted peak power level
$2B < f2 \leq 3B$:	less than or equal to 50 dB below max. permitted peak power level
$3B < f2 \leq$ UPCS Band Edge:	less than or equal to 60 dB below max. permitted peak power level


In-Band Unwanted Emissions, Conducted

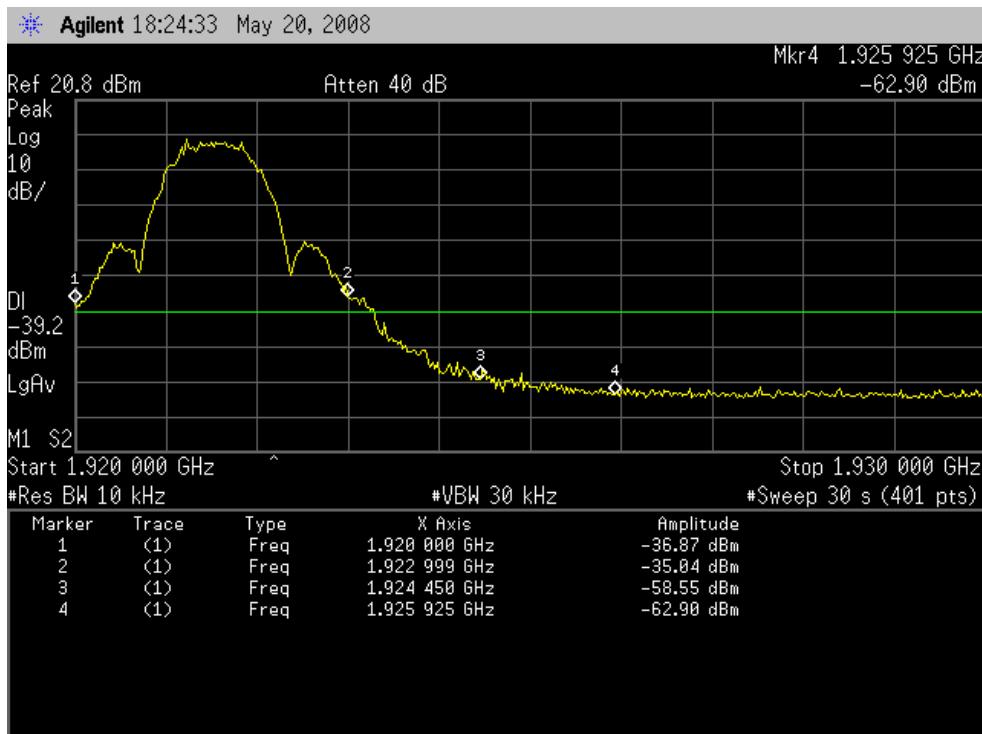

Lower Channel

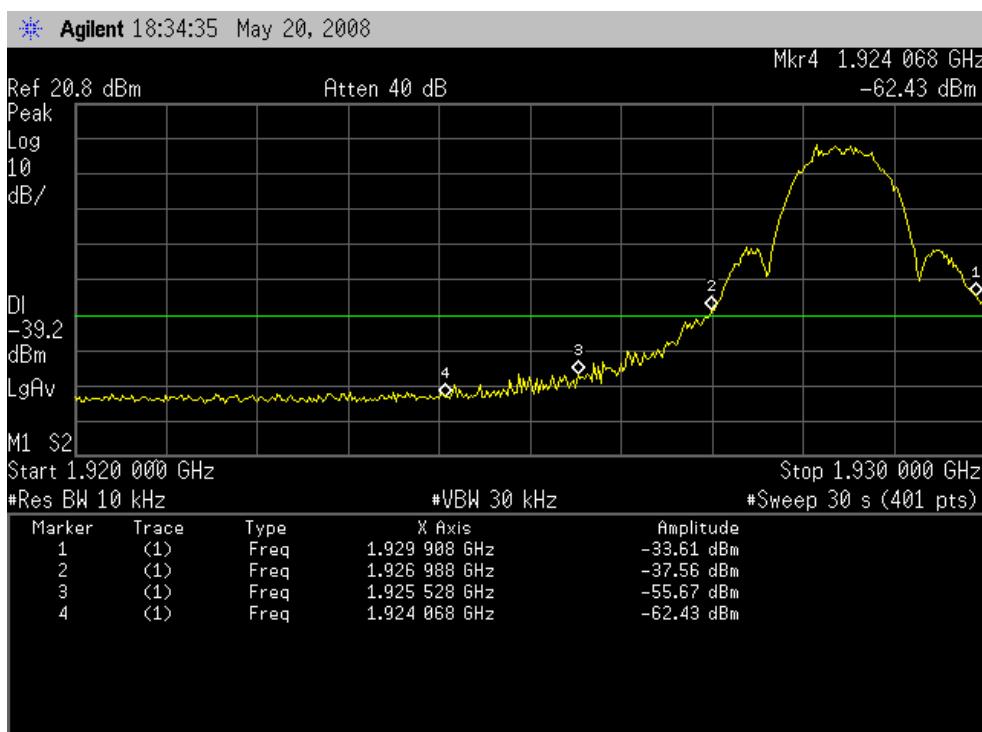

Upper Channel

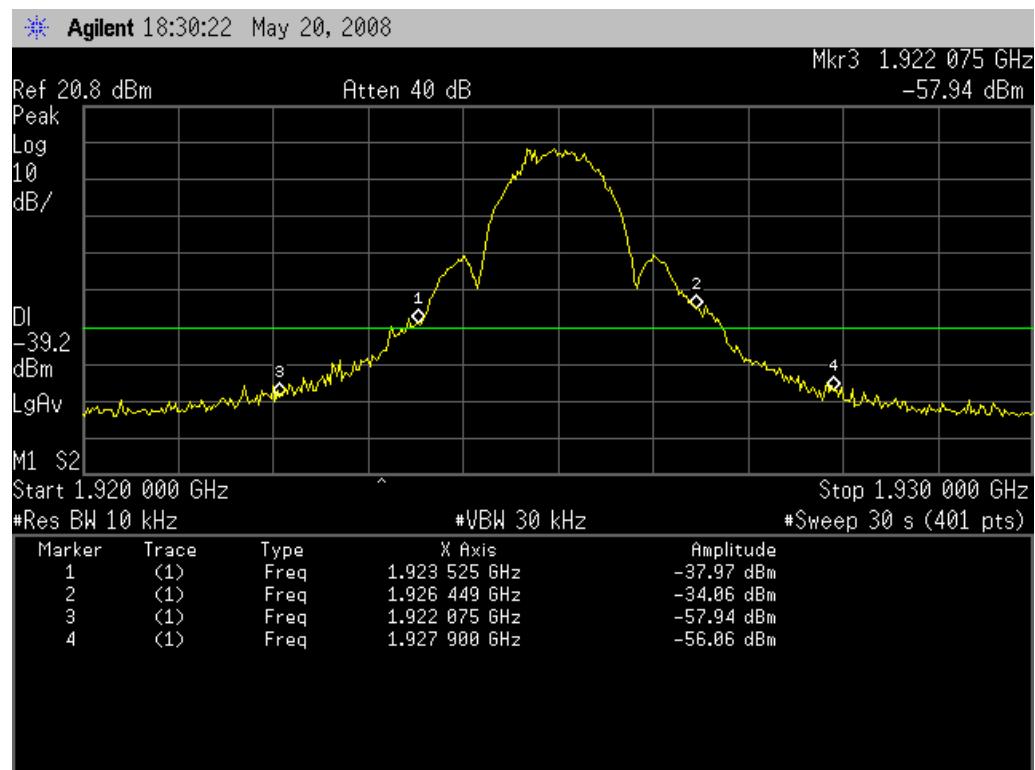

Middle Channel

The BS spurious in-band transmission level is below the indicated limit.

5.12 Out-of-Band Emissions, Conducted

Measurement Procedure:

ANSI C63.17, clause 6.1.6.2.

Test Results: Pass

Measurement Data:



See plots.

Requirement: FCC 15.323(d)

$f \leq 1.25$ MHz outside UPSCS band:	≤ -9.5 dBm
1.25 MHz $\leq f \leq 2.5$ MHz outside UPSCS band:	≤ -29.5 dBm
$f \geq 2.5$ MHz outside UPSCS band:	≤ -39.5 dBm

Out-of-Band Unwanted Emissions, Conducted

Lower Channel:

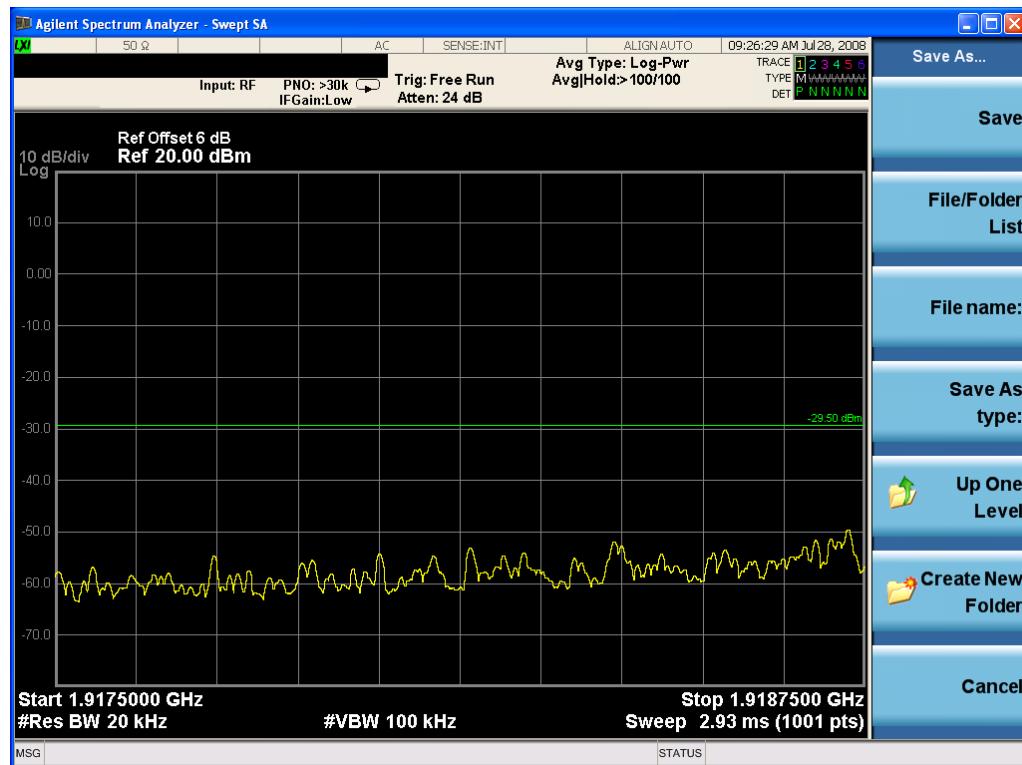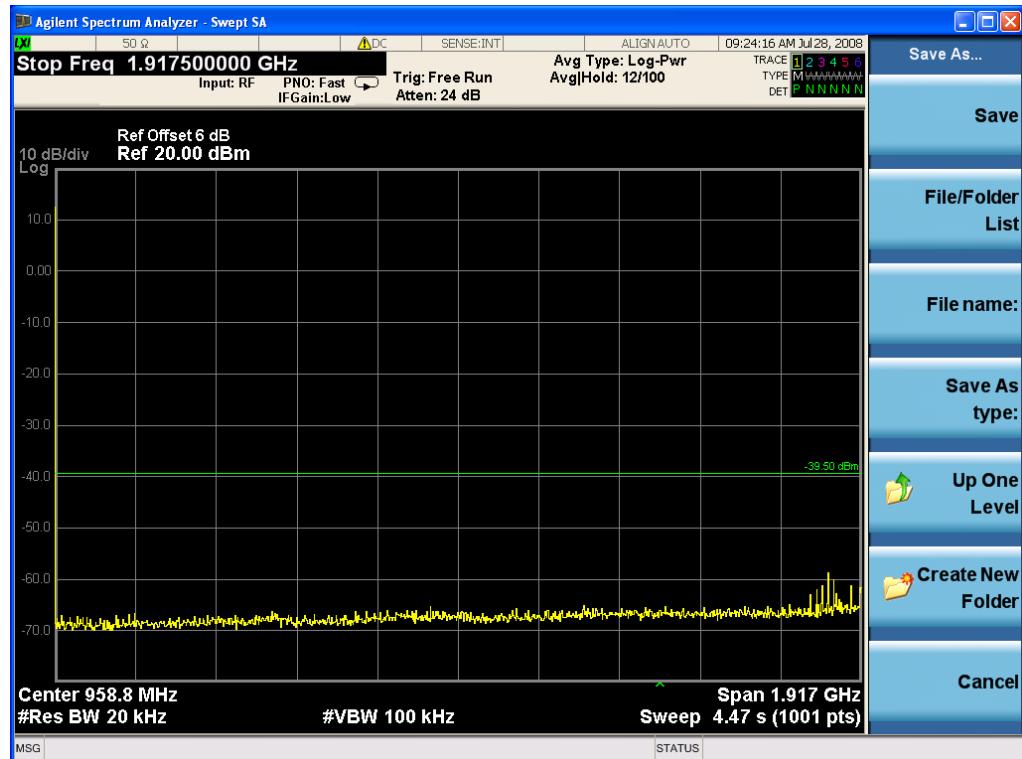



Out-of-Band Unwanted Emissions, Conducted





Upper Channel:




Out-of-Band Unwanted Emissions, Conducted

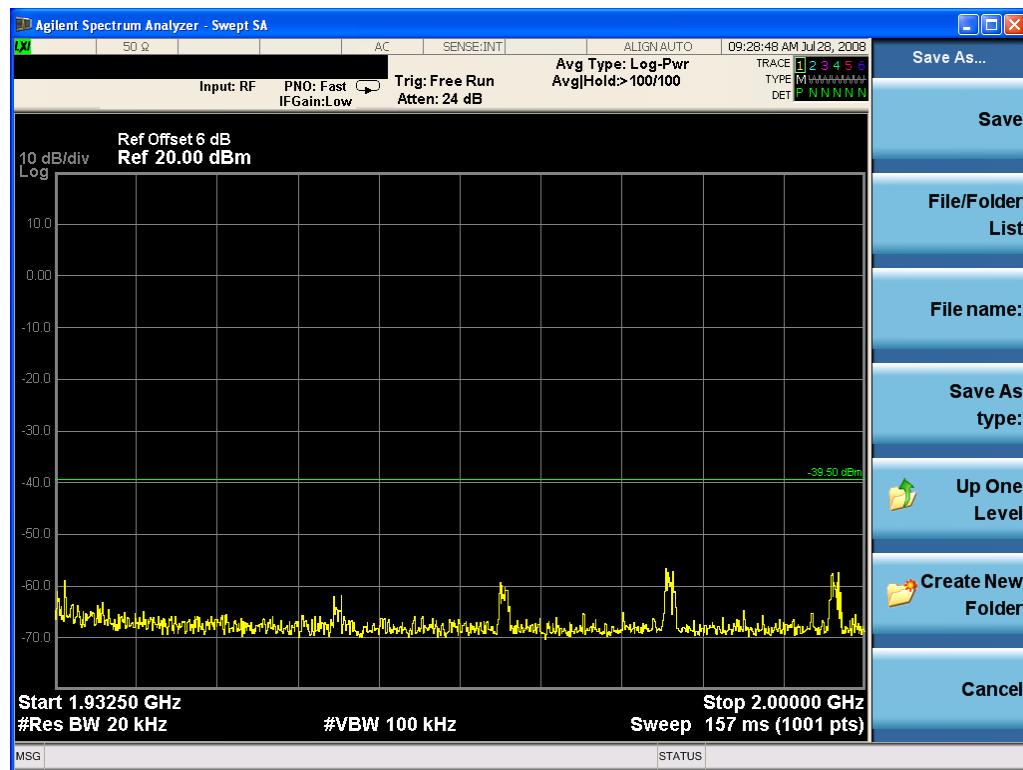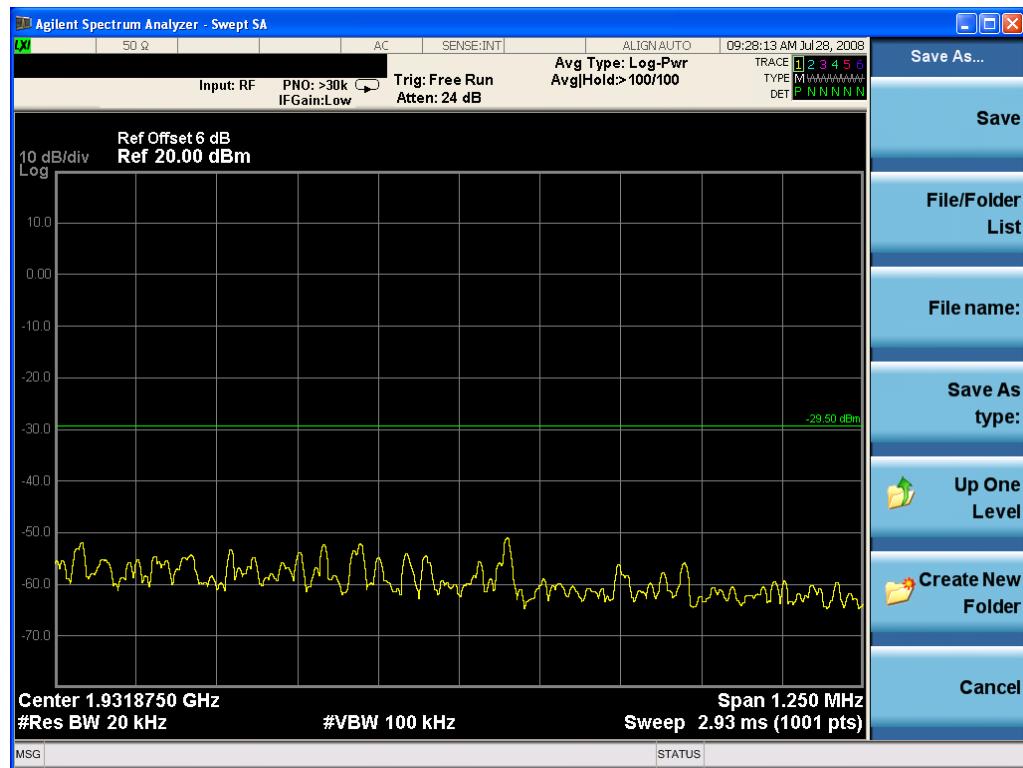


Out-of-Band Unwanted Emissions, Conducted

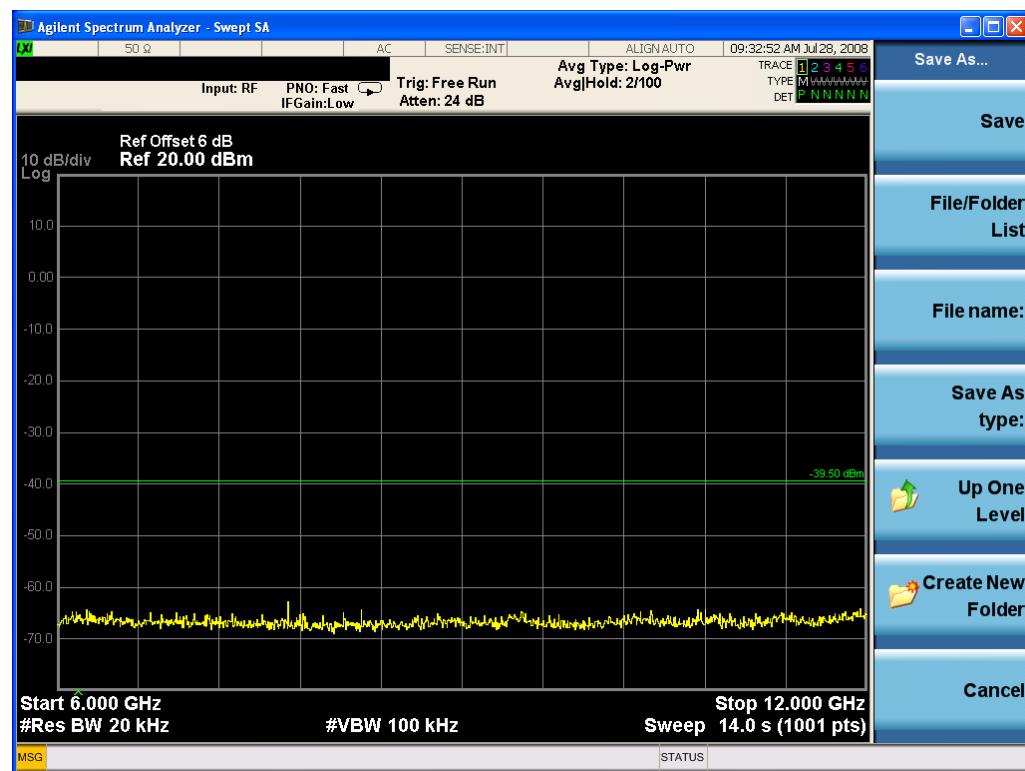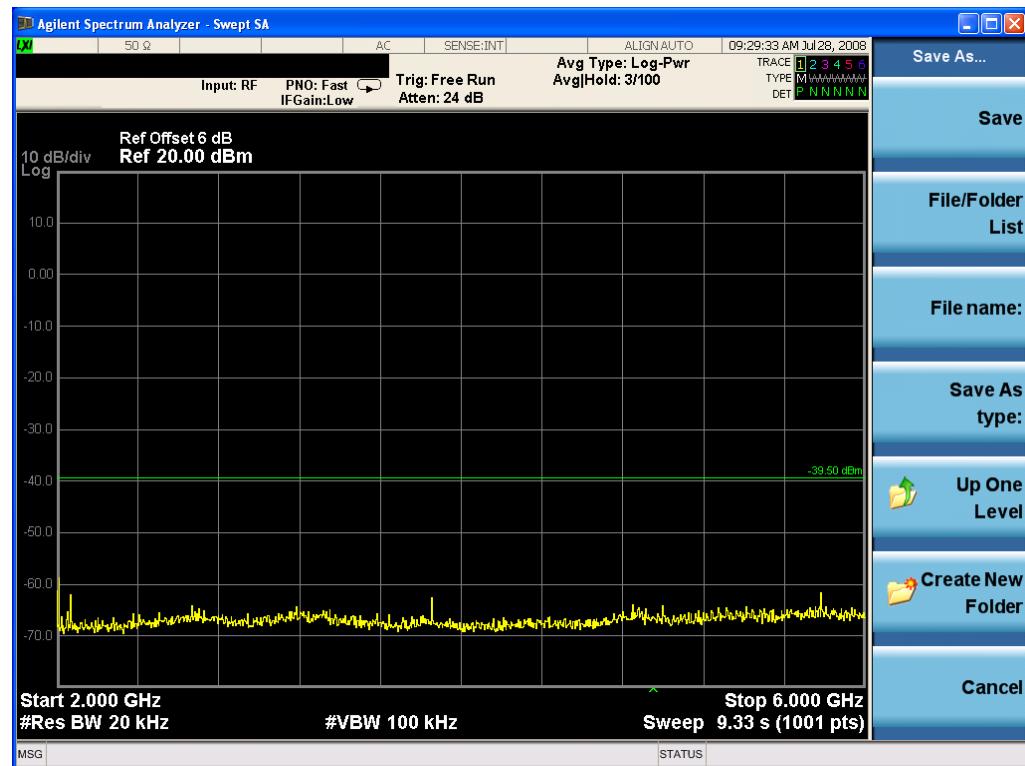

Out-of-Band Unwanted Emissions, Conducted

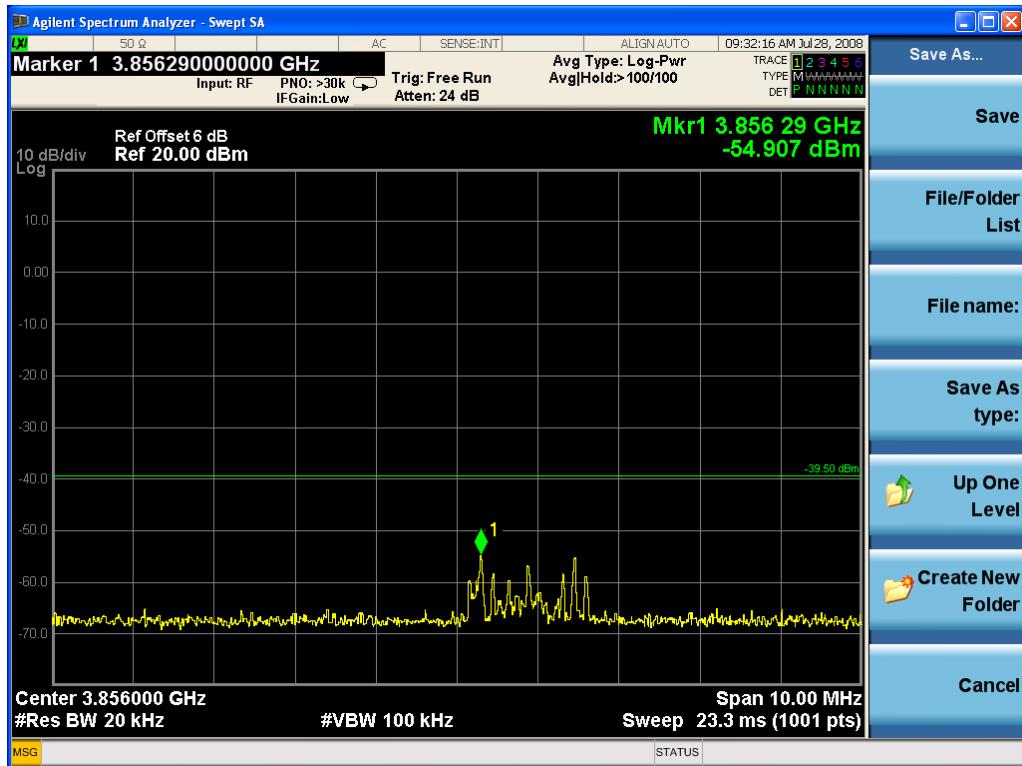

2nd Harmonic of Carrier

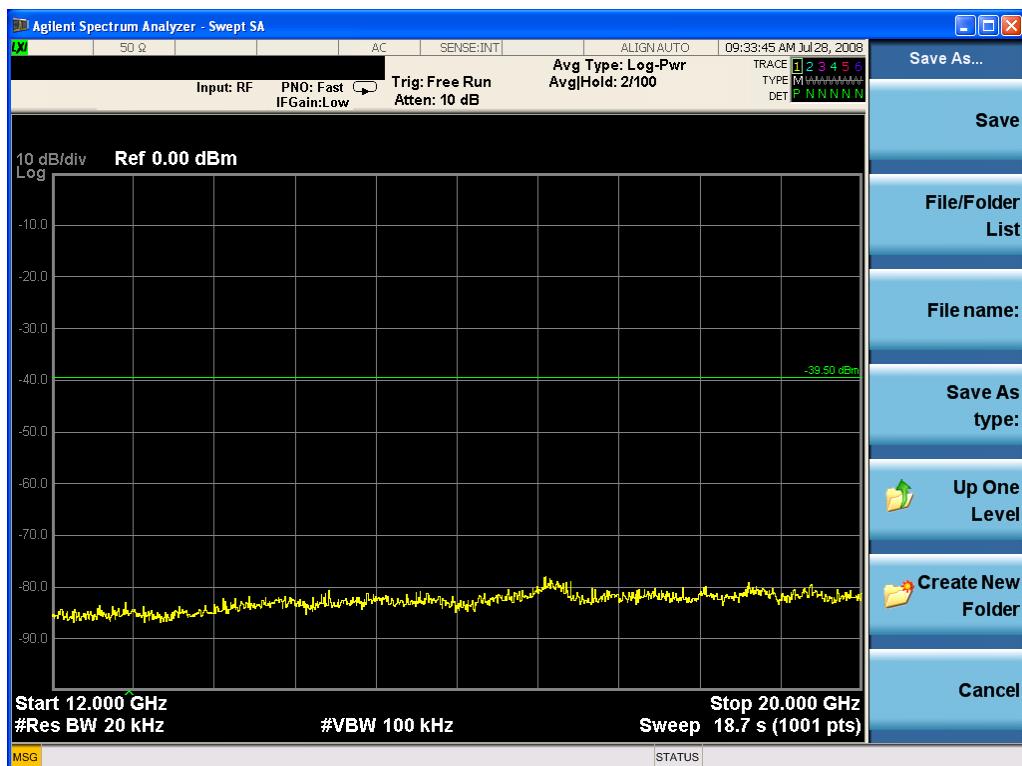

The BS spurious out-of-band transmission level is below the indicated limit.

5.13 Carrier Frequency Stability

Measurement Procedure:

ANSI C63.17, clause 6.2.1.

Test Results: Pass

Measurement Data:

The Frequency Stability is measured with the CMD65. The CMD65 was logged by a computer programmed to get the new readings as fast as possible (about 3 readings per second) over the noted time period or number of readings. The peak-to-peak difference was recorded and the mean value and deviation in ppm was calculated.

The Carrier Frequency Stability over power Supply Voltage and over Temperature is measured also with the CMD65.

Carrier Frequency Stability over Time at Nominal Temperature

Average Mean Carrier Frequency (MHz)	Max. Diff. (kHz)	Min. Diff. (kHz)	Mean Dev. (ppm)	Limit (ppm)
1924.988016	-10.49	-2.53	-3.38	±10

Deviation ppm = ((Max.Diff. – Mean.Diff.) / Mean Carrier Freq.) x 10⁶

Deviation (ppm) is calculated from 3000 readings with the CMD65.

Carrier Frequency Stability over Power Supply at Nominal Temperature

Voltage	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit (ppm)
115 V AC	1924.988016	Ref.	Ref.	±10
98 V AC	1924.984916	-3.1	-1.6	
132 V AC	1924.984440	-3.6	-1.8	

Deviation ppm = ((Mean – Measured frequency) / Mean) x 10⁶

Carrier Frequency Stability over Temperature

Temperature	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit (ppm)
T = +20°C	1924.988016	Ref.	Ref.	±10
T = 0°C	1924.990900	-2.9	-1.5	
T = +40°C	1924.982900	-5.0	-2.6	

Deviation ppm = ((Mean – Measured frequency) / Mean) x 10⁶

5.14 Frame Repetition Stability

Measurement Procedure:

ANSI C63.17, clause 6.2.2.

Test Results: Pass

Measurement Data:

The Frame Repetition Stability is measured with the CMD65. The Frame Repetition Stability is 3 times the standard deviation.

Carrier Frequency (MHz)	Mean (Hz)	Standard Deviation (ppm)	Frame Repetition Stability (ppm)
1924.992	100.000253	0.01251	0.03753

Limit:

Frame Repetition Stability	±10 ppm (TDMA)
----------------------------	----------------

Ref. FCC 15.323(e). ANSI C63.17, clause 6.2.2.

5.15 Frame Repetition Stability

Measurement Procedure:

ANSI C63.17, clause 6.2.3.

Test Results: Pass

Measurement Data:

The Frame Repetition Stability is measured with the CMD65

Carrier Frequency (MHz)	Frame Period (ms)	Max Jitter (μs)	3xStandard Deviation of Jitter (μs)
1924.992	10.000	0.0666	0.00972

Max Jitter = $(1/(Frame\ Period + Pk-Pk)/2) - (1/Frame\ Period)$, when Pk-Pk and Frame Period are in Hz.

$3 \times St.Dev.Jitter = 3 \times (1/(Frame\ Period + St.Dev)) - (1/St.Dev) \times 10^6$

Limit:

Frame Period	20 or 10 ms
Max Jitter	25 μs
3 times St.Dev. of Jitter	12.5 μs

Ref. FCC 15.323(e). ANSI C63.17, clause 6.2.3.

5.16 Monitoring Threshold, Least Interfered Channel

Monitoring Threshold limits:

Lower Threshold:

$$T_L = 15 \log B - 184 + 30 - P_{EUT} \quad (\text{dBm})$$

Upper Threshold:

$$T_U = 15 \log B - 184 + 50 - P_{EUT} \quad (\text{dBm})$$

B is measured Emission Bandwidth in Hz

P_{EUT} is measured Transmitter Power in dBm

Calculated values:

Lower Threshold	-79.6 dBm
Upper Threshold	-59.6 dBm

The Lower Threshold is applicable for systems which have defined less than 40 duplex system access channels. The Upper Threshold is applicable for systems with more than 40 duplex systems access channels and that implements the Least Interfered Channel Procedure (LIC).

Measurement Procedure:

The Upper Threshold is found by the procedure defined in ANSI C63.17 clause 7.3.1 or 7.3.2.

Least Interfered Channel Procedure NOT used:	
Lower Threshold	N/A
Least Interfered Channel Procedure used:	
Upper Threshold	-63.8 dBm

Least Interfered Channel (LIC) Procedure Test, FCC 15.323(b), (c)(2) and (c)(5)


ANSI C63.17 clause 7.3.3 ref.	Observation	Verdict
b) $f_1 T_L + 13 \text{ dB}, f_2 T_L + 6 \text{ dB}$	Transmission always on f_2	Pass
c) $f_1 T_L + 6 \text{ dB}, f_2 T_L + 13 \text{ dB}$	Transmission always on f_1	Pass
d) $f_1 T_L + 7 \text{ dB}, f_2 T_L$	Transmission always on f_2	Pass
e) $f_1 T_L, f_2$ at $T_L + 7 \text{ dB}$	Transmission always on f_1	Pass

Selected Channel Confirmation, FCC 15.323(c)(1) and (5)

ANSI C63.17 clause 7.3.4 ref.	Observation	Verdict
b) Shall not transmit on f_1	EUT transmits on f_2	Pass
d) Shall not transmit on f_2	EUT transmits on f_1	Pass

Limits:

Lower Threshold + 6 dB margin	-73.6 dBm
Upper Threshold + 6 dB margin	-53.6 dBm

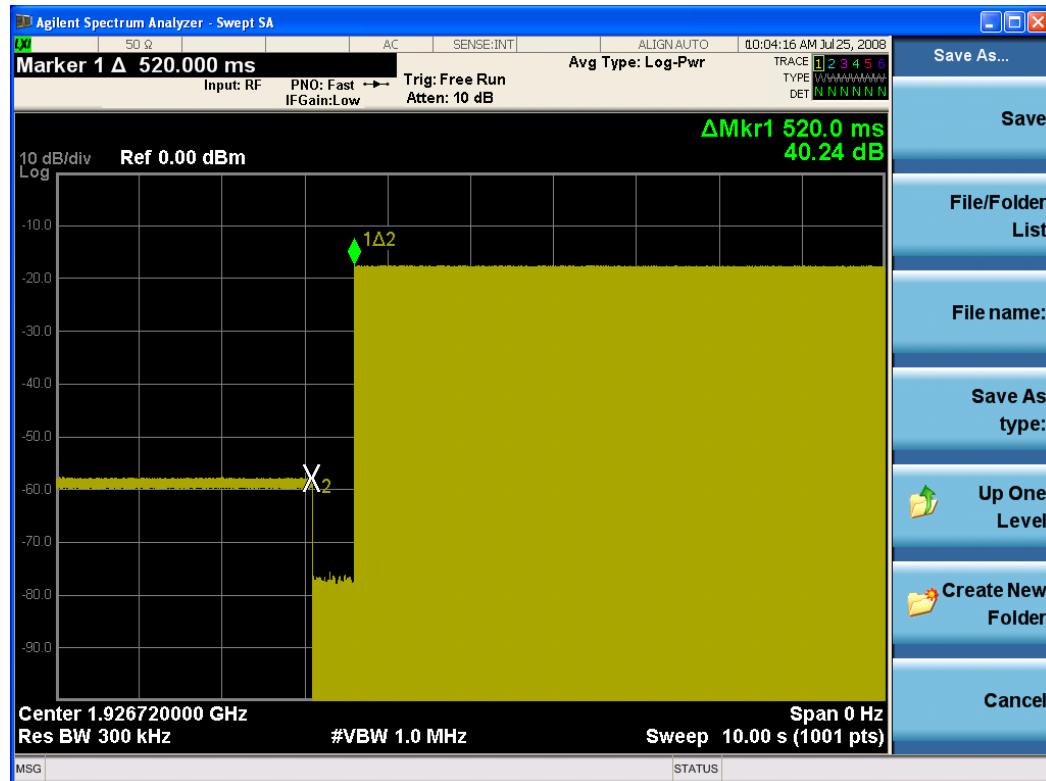

7.3.4 Selected Channel Confirmation, connection 520 ms after interferer removed

5.17 Threshold Monitoring Bandwidth

This test is only required if a dedicated monitoring receiver is used. If the test is not carried out the manufacturer shall declare and provide evidence that the monitoring is made through the radio receiver used for communication.

Measurement Procedure:

Simple Compliance Test, ANSI C63.17, clause 7.4.1

More Detailed Test, ANSI C63.17, clause 7.4.2

The test is passed if **either** the Simple Compliance Test or the More Detailed Test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

Test Results:

Test performed	Observation	Verdict
Simple Compliance Test, at $\pm 30\%$ of B	No transmissions	Pass
More Detailed Test, at -6 dB points	N/A	N/A
More Detailed Test, at -12 dB points	N/A	N/A

The More Detailed Test must be pass at both the -6dB and -12 dB points if the Simple Compliance Test fails.

Comment: The Simple Compliance Test was performed with the level $T_U + U_M + 10$ dB to check that the EUT did not transmit at all.

The tested EUT uses the same receiver for monitoring and communication, this test is therefore not required. However the test was performed nonetheless and the test is passed.

Limits: FCC 15.323(c)(7):

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

5.18 Reaction Time and Monitoring Interval

Measurement Procedure:

ANSI C63.17, clause 7.5

Test Results:

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels TU + UM to check that the EUT does not transmit. The level was raised 6 dB for part d) with 35 μ s pulses.

The pulses are synchronized with the EUT timeslots and applied centered within all timeslots.

Pulse Width, ref. to ANSI C63.17 clause 7.5	Observation	Verdict
c) > largest of 50 μ s and 50*SQRT(1.25/B)	No transmissions	Pass
d) > largest of 35 μ s and 35*SQRT(1.25/B) and with interference level raised 6 dB	No transmissions	Pass

Comment: Since B is larger than 1.25 MHz, the test was performed with pulse lengths of 50 μ s and 35 μ s.


Limits: FCC 15.323(c)(1), (5) and (7)

The maximum reaction time must be less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.


If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

CETECOM ICT Services GmbH

Test report no.: **4-2934-01-02/08-FP**

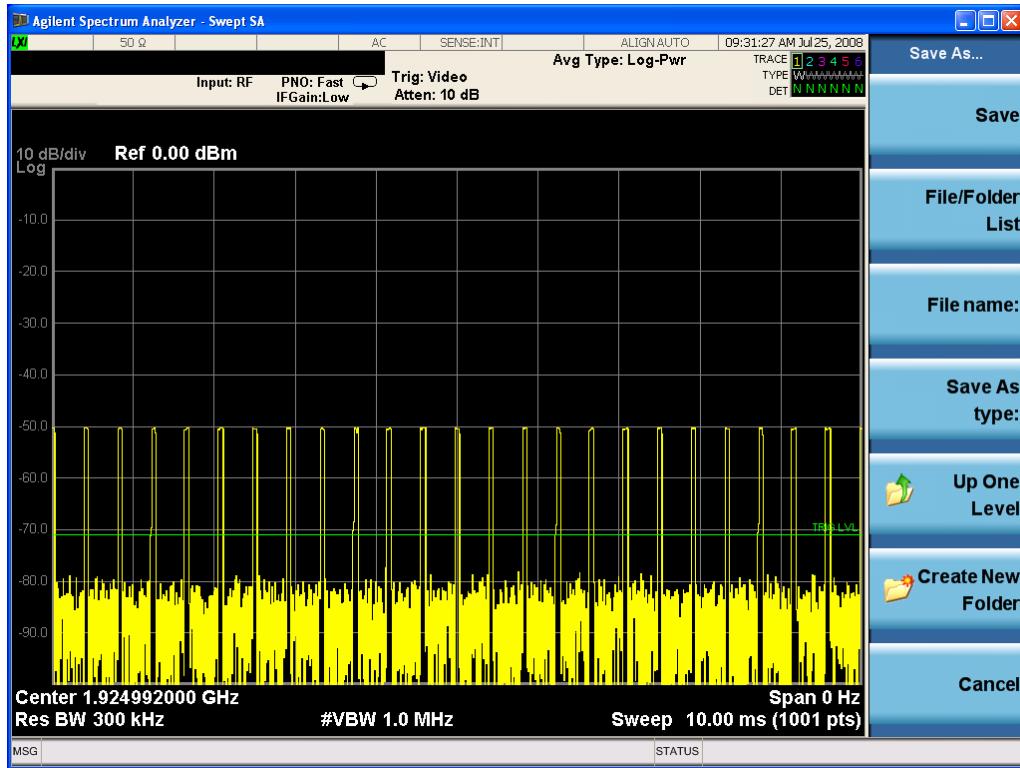

50 μs Pulses

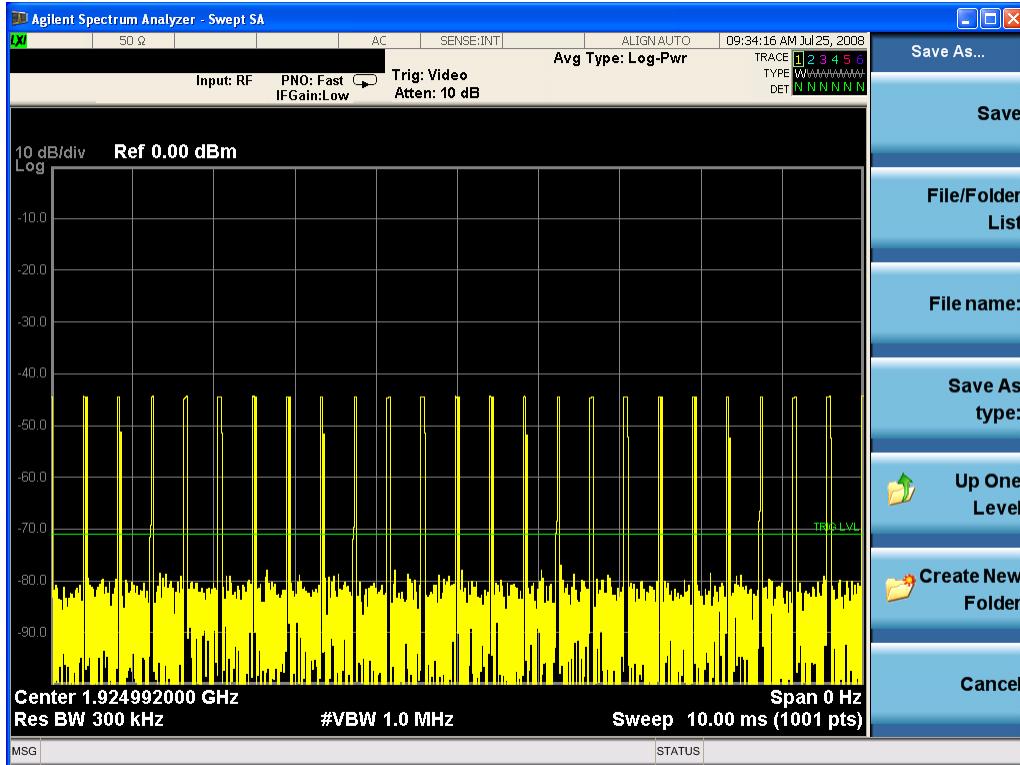

35 μs Pulses

5.19 Time and Spectrum Window Access Procedure

This requirement is only for EUTs which transmit unacknowledged control and signaling information

Measurement Procedure:

Timing for EUTs using control and signaling channel type transmissions: ANSI C63.17, clause 8.1

Test results:

Access Criteria, ref. to ANSI C63.17 clause 8.1.1	Observation	Verdict
b) Check that the EUT transmits on the interference free time slot	EUT transmits on the Interference free time slot	Pass
b) The EUT must terminate or pause in its repetitive transmission of the control and signalling channel on the open channel to repeat the access criteria not less frequently than every 30 s	Transmission stops every 5s	Pass

If FCC 15.323(c)(6) option Random Waiting Interval is NOT implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.2	Observation	Verdict
b) Check that the EUT changes to interference free time slot when interference is introduced on the time slot in use	EUT changes to the interference free time slot, and stay there	Pass

If FCC 15.323(c)(6) option Random Waiting Interval is implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.3	Observation	Verdict
b-d) Check that the EUT uses random waiting interval before continuing transmission on an interfered time slot	N/A	N/A

Comment: The tested EUT does not support the Random Waiting Interval option.

Limits:

FCC 15.323(c)(4):


Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time access criteria must be repeated.

FCC 15.323(c)(6):

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.


Access Criteria Check

8.1.1b):

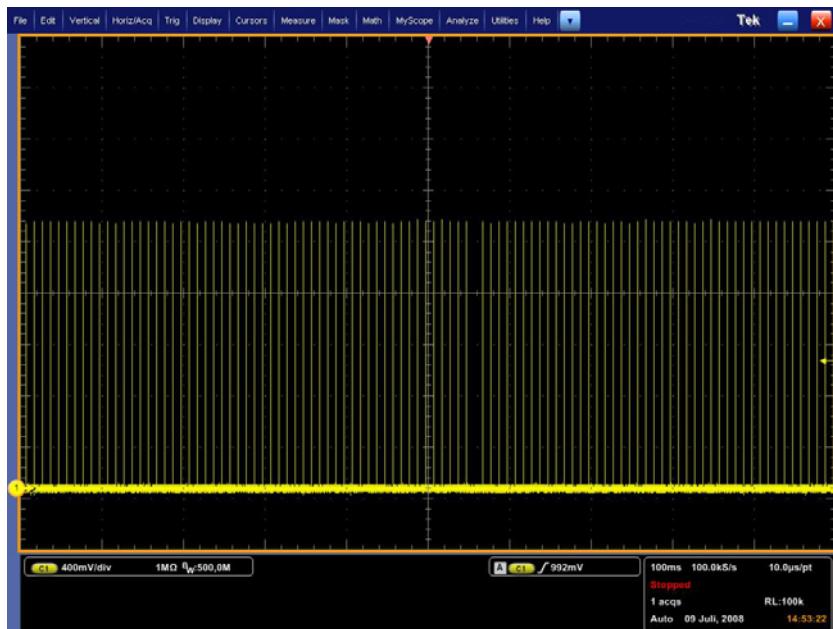

Capture of demodulated transmission of base EUT control and signaling transmissions. The base EUT pauses in its transmission of the control and signaling channel to repeat the access criteria every 5 seconds, meeting the requirement that it do so at least as often as every 30 seconds.

8.1.2b):

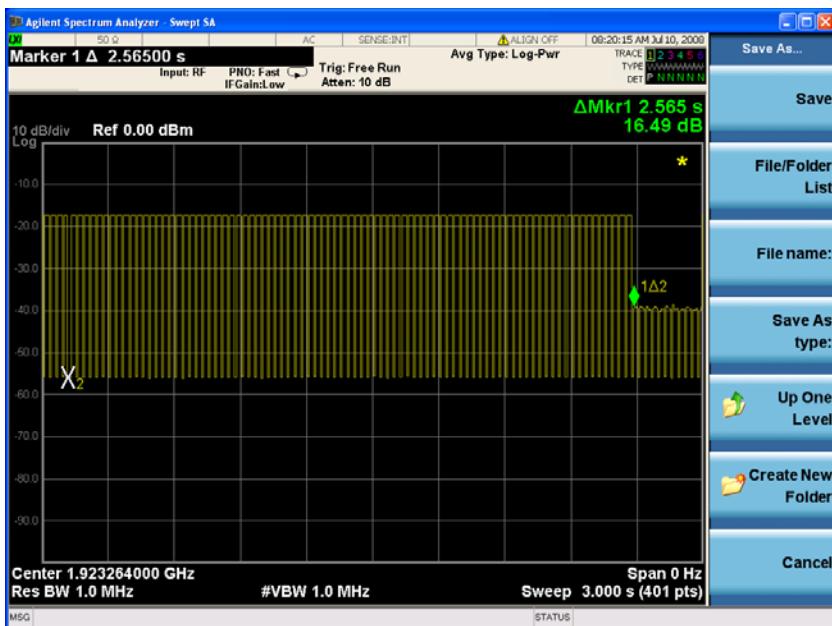

The sweep starts with the base EUT transmitting control and signaling information (the beacon) on 1923.264 MHz. The interference level of the initial profile is ($T_U - U_M$). The interference level on 1923.264 MHz is then raised to $- (T_U + U_M)$. After 2.56 seconds the base EUT moves transmission to a different carrier for which the access criteria are met, and the base EUT's transmit beacon signal reappears at a lower level on the display, visible still because the spectrum analyzer is set to 1 MHz RBW and the signal is only somewhat attenuated by the instruments selectivity at the new carrier frequency.

5.20 Acknowledgments and Transmission duration

Measurement Procedure:

Acknowledgments: ANSI C63.17, clause 8.2.1

Transmission Duration: ANSI C63.17, clause 8.2.2

During the test **Initial transmission without acknowledgments** the signal from the EUT to the companion device is blocked by circulators in addition to the tunable attenuator.

The test **Transmission time after loss of acknowledgments** is performed by cutting-off the signal from the companion device by a RF switch the time until the EUT stops transmitting.

The **Transmission Duration** test is performed by monitoring the slot in use and measuring the time until the EUT changes to a different slot.

Test Results:

Acknowledgments

Test ref. to ANSI C63.17 clause 8.2.1	Observation	Verdict
a) Initial transmission without acknowledgments	Only for initiating device	N/A
c) Transmission time after loss of acknowledgments	5s	Pass

Transmission Duration

Test ref. to ANSI C63.17 clause 8.2.2	Observation	Verdict
b) Transmission duration on same time and frequency window	Only for initiating device that controls which time slot is used	N/A

Comment: /

Limits: FCC 15.323(c)(3) and (4)

Occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which the time access criteria must be repeated.

5.21 Dual Access Criteria Check

Measurement Procedure:

EUTs that do not implement the Upper Threshold: ANSI C62.17, clause 8.3.1

EUTs that implement the Upper Threshold: ANSI C62.17, clause 8.3.2

This test is required for equipment that uses the access criteria in FCC 15.323(c)(10).

Test Results:

EUTs that do NOT implement the Upper Threshold:

Test ref. to ANSI C63.17 clause 8.3.1	Observation	Verdict
b) EUT is restricted to a single carrier f_i for TDMA systems. The test is pass if the EUT can set up a communication link.	N/A	N/A
c) d) No transmission on interference-free receive time/spectrum window. All transmit slots blocked	N/A	N/A
e) f) No transmission on interference-free transmit time/spectrum window. All transmit slots blocked	N/A	N/A

EUTs that implement the Upper Threshold:

Test ref. to ANSI C63.17 clause 8.3.2	Observation	Verdict
b) EUT is restricted to a single carrier f_i for TDMA systems. The test is pass if the EUT can set up a communication link.	N/A	N/A
c) d) Transmission on interference-free receive time/spectrum window.	N/A	N/A
e) f) Transmission on interference-free transmit time/spectrum window.	N/A	N/A
g) Transmission not possible on any time/spectrum window.	N/A	N/A

Comment: This test is only applicable for EUTs that can be an initiating device.

Limits: FCC 15.323(c)(10)

An initiating device may attempt to establish a duplex connection by monitoring both, its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

5.22 Alternative monitoring interval

Test procedure described in ANSI C63.17, clause 8.4.

This test is required if the EUT implements the provision of FCC 15.323(c)(11).

Test Result:

Not tested. The tested EUT does not implement this provision. See manufacturer's declaration.

5.23 Spurious Emissions (Radiated)

Measurement Procedure:

FCC 15.209, FCC 15.109

Test Result:


Tests for intentional radiators according to FCC 15.209 are not required when Out-of-Band Emission was tested conducted with a pass result.

Measurement Data:

See plots.

Requirement: FCC 15.109(b)

30 – 88 MHz:	90 μ V/m
88 – 216 MHz:	150 μ V/m
216 – 960 MHz:	210 μ V/m
960 – 1000 MHz:	300 μ V/m

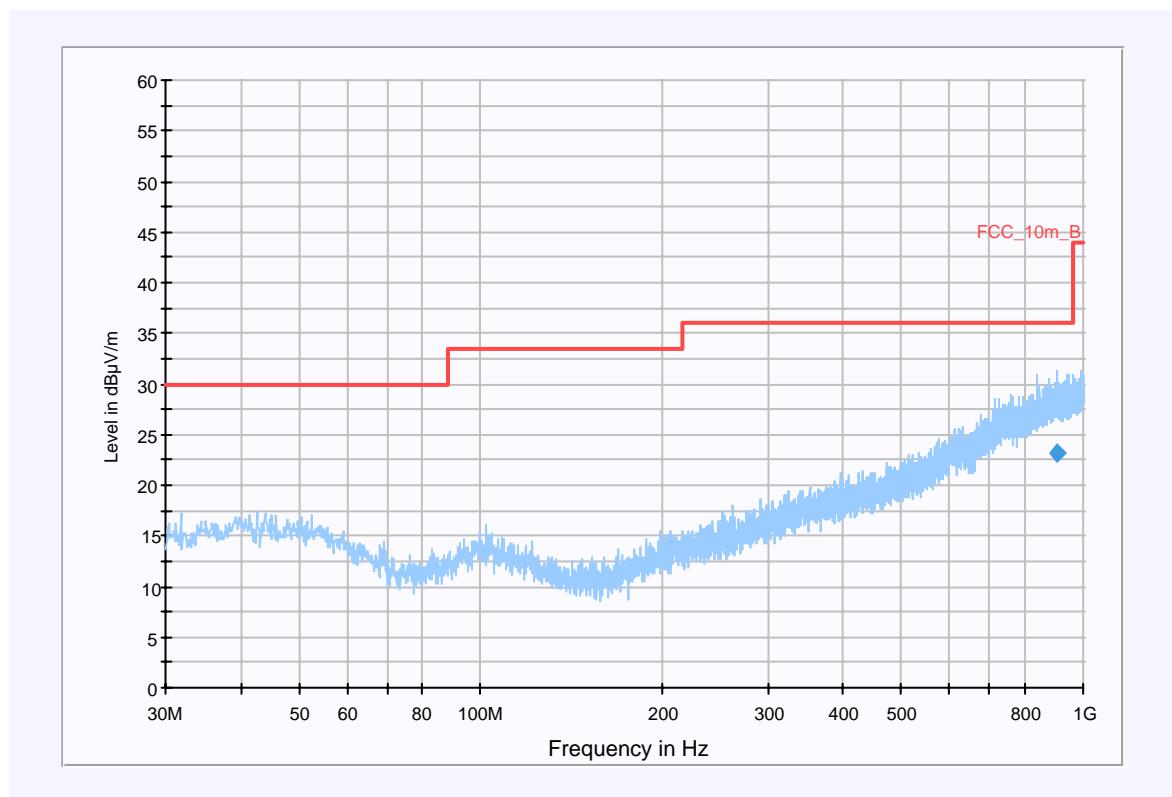

The radiated spurious emission of the unintentional radiator is below the indicated limit.

5.24 Receiver Spurious Emissions

Measurement Procedure:

Industry Canada RSS-213 paragraph 6.8 and RSS-GEN paragraphs 4.8 and 6.

Test results:

Frequency MHz	Carrier No.	Measured Value Conducted dBm	Conducted Limit dBm	Margin dB
30 - 1000	all	/	-57	/
> 1000	all	/	-53	/

The EUT transmits permanently control and signaling information. It was not possible to disable the transmitter of the EUT by software. The observed emission at 1.92153 GHz was caused by the transmitter part of the EUT.

Requirements: RSS-GEN Issue 2, clause 6


The measurement can be performed either radiated or conducted.

When measured conducted: No spurious signals appearing at the antenna terminals shall exceed 2 nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nW above 1 GHz.


When measured radiated: See table 1 in RSS-GEN Issue2, clause 6.

CETECOM ICT Services GmbH

Test report no.: 4-2934-01-02/08-FP

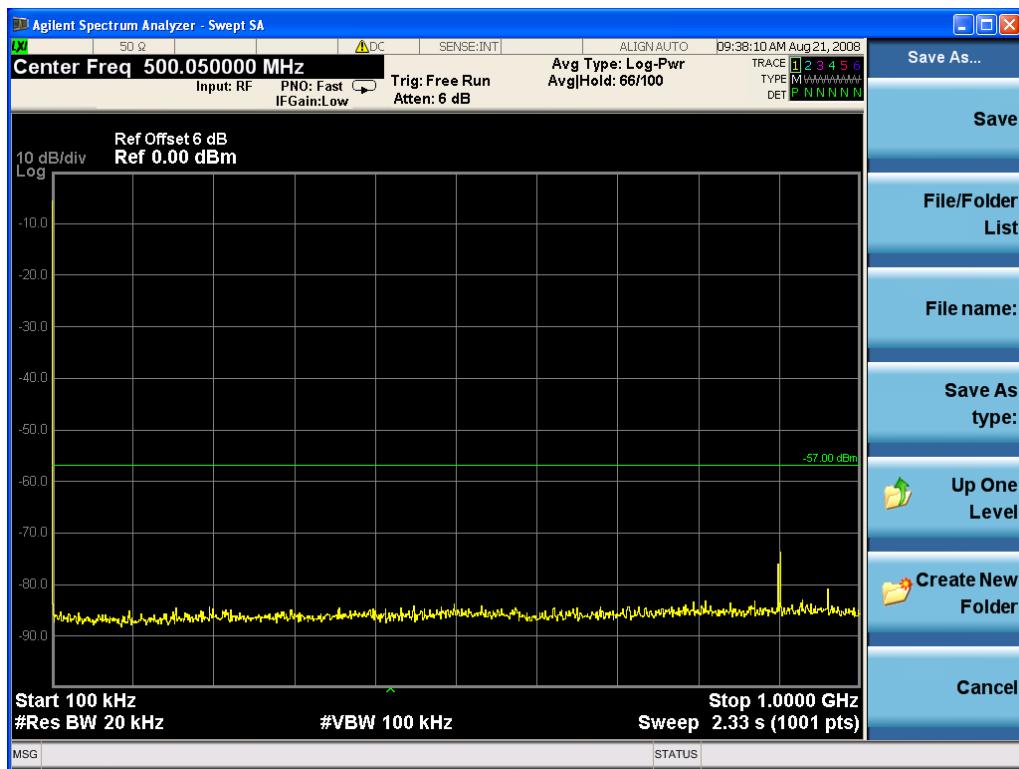

Receiver Spurious Emissions, Conducted, 100 kHz – 1 GHz

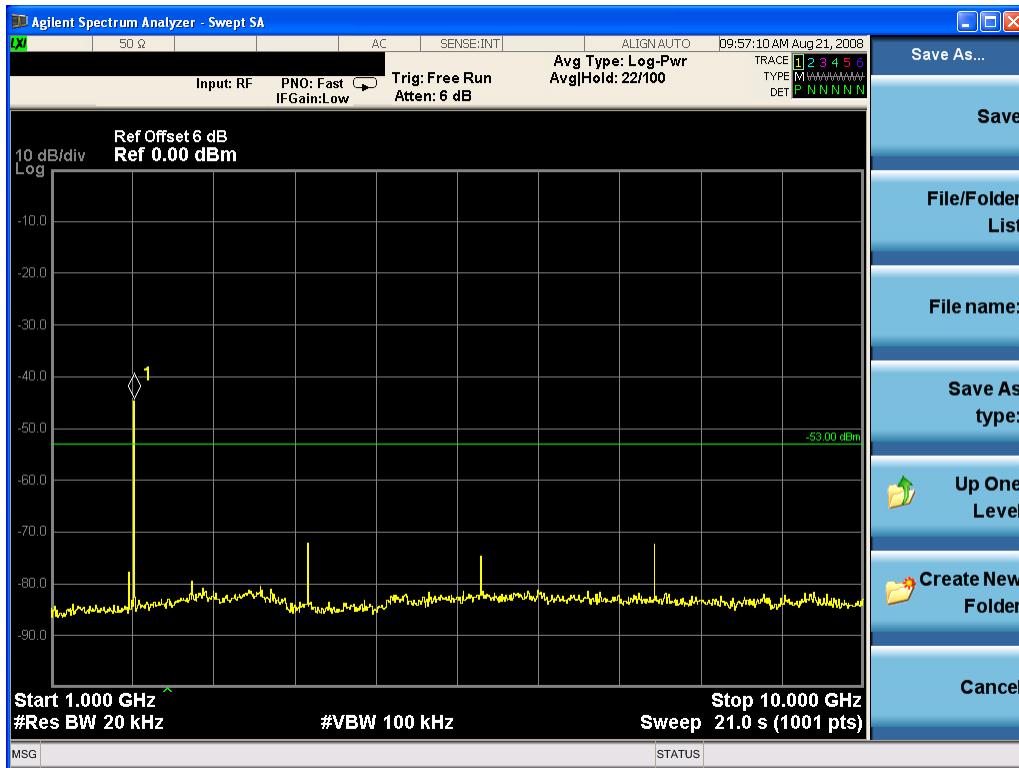

Receiver Spurious Emissions, Conducted, 1 GHz – 10 GHz

CETECOM ICT Services GmbH

Test report no.: 4-2934-01-02/08-FP



Receiver Spurious Emissions, Conducted, 10 GHz – 20 GHz



Emission is caused by the transmitter of the EUT which is not part of the receiver of the EUT

6 Test Setups

6.1 Frequency Measurements

Test Set-up 1:




This setup is used for measuring Carrier Frequency Stability at nominal and extreme temperatures.

For long term Frequency Stability, the EUT was in loopback-mode and was controlled with the CMD65, the modulation pattern was set to 01010101....

6.2 Timing Measurements


Test Set-up 2:



This setup is used for measuring Frame Repetition Stability, Frame Period and Jitter.

6.3 Conducted Emission Test

Test Set-up 3:

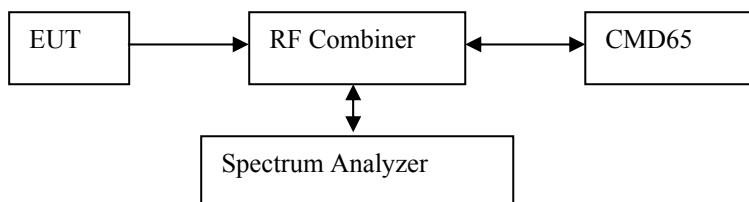

This setup is used for all conducted emission tests.

The EUT was in loopback-mode and was controlled with the CMD65, the modulation pattern was set to Pseudo-Random bit sequence to simulate normal speech.

6.4 Radiated Emission Test

Test Set-up 4:

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.


30 MHz - 200 MHz: Quasi Peak measurement, 120 KHz Bandwidth, bilog antenna

200MHz - 1GHz: Quasi Peak measurement, 120 KHz Bandwidth, bilog antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn


6.5 Power Line Conducted Emissions Test

Test Set-up 5:

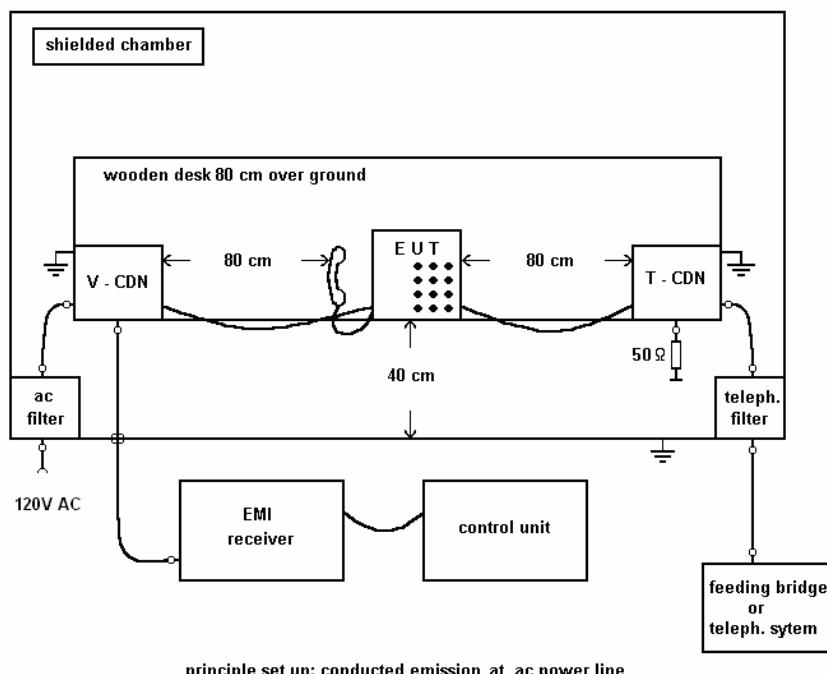

6.6 Monitoring Tests

Test Set-up 6:

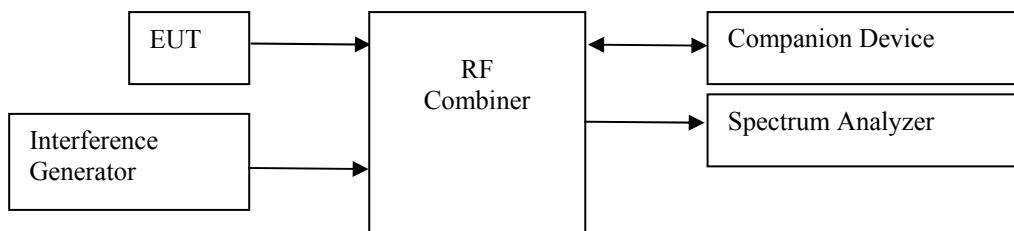

This test setup is used for all Monitoring and Time and Spectrum Access Procedure tests. The path loss from the signal generator to the EUT is measured with a power meter before the testing is started.

A clock signal is used to synchronize the Interference Generator to the start of the DECT frame, this signal always comes from the base station. If the EUT is a DECT Portable Part (i.e. a handset) the clock signal will come from the Companion Device.

7 Safety exposure levels

Prediction of MPE limit at a given distance:

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where: S = Power density
P = Power input to the antenna
G = Antenna gain
R = Distance to the center of radiation of the antenna

The table below is excerpted from Table 1B of 47 CFR 1.1310 titled “Limits for Maximum Permissible Exposure (MPE), Limits for General Population/Uncontrolled Exposure”

Frequency Range (MHz)	Power Density (mW/cm ²)	Averaging Time (minutes)
300 -1500	f/1500	30
1500 - 100000	1.0	30

where f = Frequency (MHz)

Prediction:

P Max power input to the antenna: 18.1 dBm
P Max power input to the antenna: 64.56mW
R Distance: 20 cm
G Maximum antenna gain: 3.00 dBi
G Maximum antenna gain: 2.0 numeric
S MPE limit for uncontrolled exposure: 1 mW/cm²

Calculated Power density: **0.0256 mW/cm²**

This prediction demonstrates the following:

The power density levels at a distance of 20 cm are below the maximum levels allowed by FCC regulations

8 Used Test Equipment

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
Radiated Emission in chamber F					
F-1	Control Computer	F+W		FW0502032	300003303
F-2	Trilog antenna	Schwarzbeck	VULB 9163	9163-295	---
F-3a	Amplifier	Veritech Microwave Inc.	0518C-138	- / -	- / -
F-4b	Switch	HP	3488A	- / -	300000368
F-5	EMI Test receiver	R&S	ESCI	100083	300003312
F-6	Turntable Controller	EMCO	1061 3M	1218	300000661
F-7	Tower Controller	EMCO	1051 Controller	1262	300000625
F-8	Tower	EMCO	1051 Tower	1262	300000625
F-9	Ultra Notch-Filter Rejected band Ch. 62	WRCD		9	
Power Line Conducted Emission in room 006					
I-1	RF Measurement receiver 9 kHz – 30 MHz	R&S	ESH3	881515/002	300002490
I-2	RF Measurement receiver 9 kHz – 30 MHz	R&S	ESH3	890174/002	300000296
I-3	Spectrum Monitor	R&S	EZM	883086/026	300001469
I-4	Spectrum Monitor	R&S	EZM	883720/006	300002219
I-5	Relay Matrix	R&S	PSU	879930/008	300001148
I-6	Relay Matrix	R&S	PSU	828628/007	300002475
I-7	Computer	F+W			300003330
I-8	Software	R&S	ES-K1 V1.8		
I-9	DC power supply	HP	6032A	2743A-02600	300001498
I-10	Two Line V-Network	R&S	ESH3-Z5	861189/014	300001458
I-11	Single Line V-Network	R&S	ESH3-Z6	893689/012	300001504
I-12	Single Line V-Network	R&S	ESH3-Z6	861406/005	300001518
I-13	4-Wire T-Network	R&S	EZ-10	828757/001	300000611
I-14	Loop antenna	R&S	HFH2-Z2	881058/42	300001477
Conducted					
1	Spectrum Analyzer	Agilent	E440A	MY46187582	- / -
2	Spectrum Analyzer	Agilent	N9020A	US46220229	300003805
3	Spectrum Analyzer	R&S	FSP30	100623	300003464
4	Signal Generator	R&S	SMU200A	101633	300003496
5	Oscilloscope	Tektronix	DPO 7254	B022702	300003573
6	Oscilloscope	Tektronix	DPO 4034	C020330	300003740
7	Counter	Philips	PM 6654C	316568/002	- / -
8	Signaling Unit	R&S	CMD 65	825486/005	300000103
9	Combiner	Anzac	DS-409-4	- / -	- / -
10	Step Attenuator	R&S	DPSP	860898/005	- / -
11	Detector	Hewlett Packard	HP 8473C	03690	- / -
12	Attenuator	Narda	4779-50	9101	- / -
13	Attenuator	Narda	4779-30	9305	- / -
14	Control PC	F+W	/	FW0712052	300003735

9 Photographs of the Test Set-up

Photo 1: Power Line Conducted Emission Test

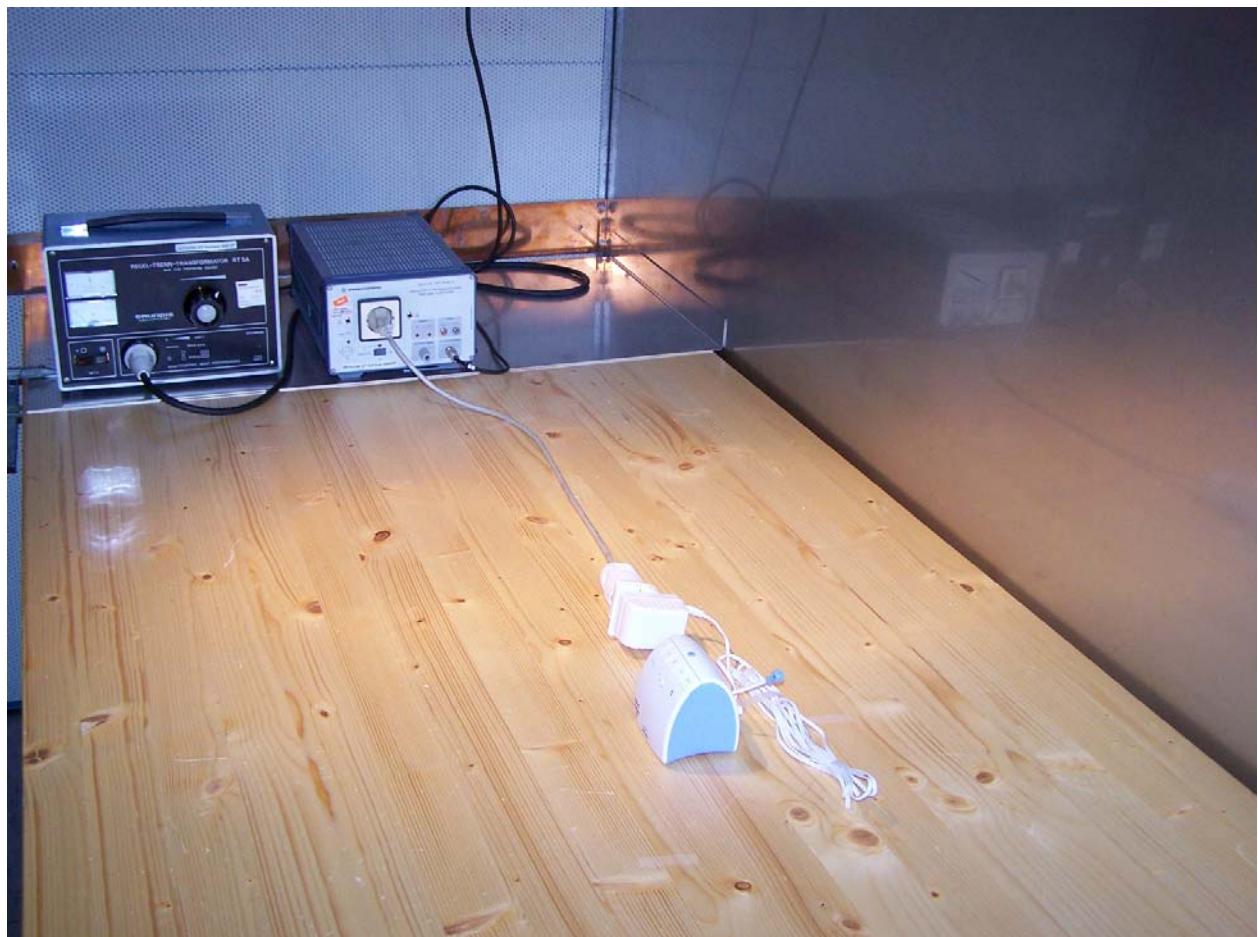


Photo 2: Radiated Emission and Antenna Gain Test



10 Photographs of the EUT

Photo 1:



Photo 2:



Photo 3:

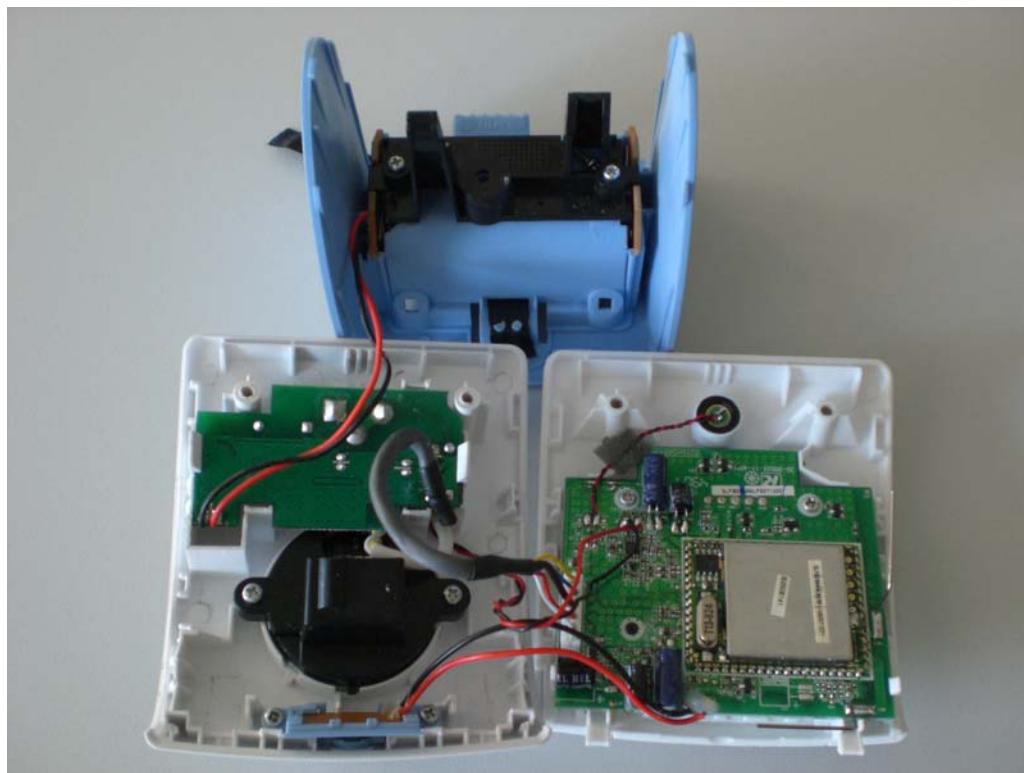


Photo 4:

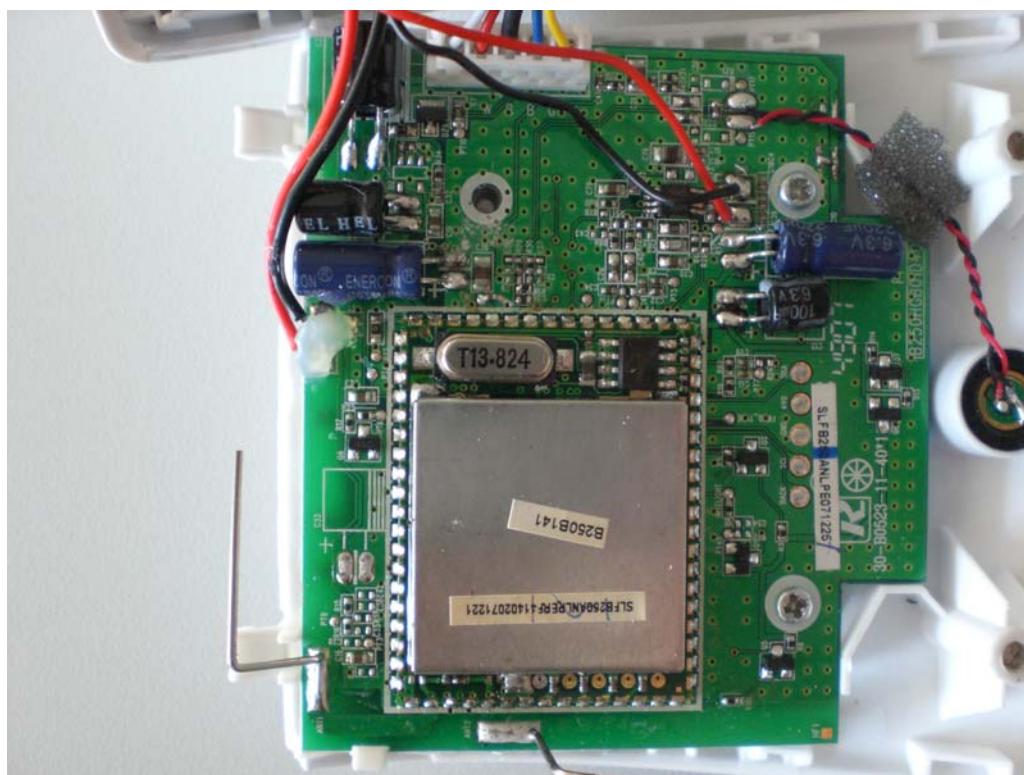


Photo 5:

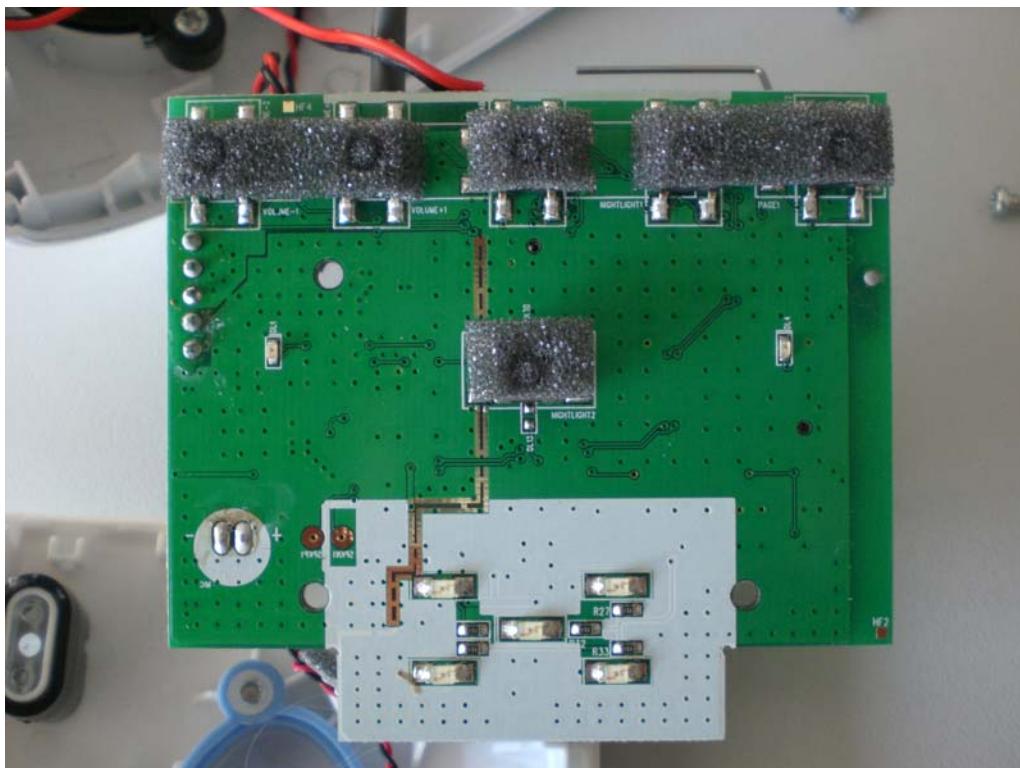


Photo 6:

