

TABLE OF CONTENTS

APPLICANT: PHILIPS CONSUMER ELECTRONICS COMPANY

FCC ID: BOUUSR-5RF

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST & TEST PROCEDURE  
PAGE 2.....TEST PROCEDURE CONTD.  
PAGE 3.....RADIATION INTERFERENCE TEST DATA  
PAGE 4.....CALCULATION OF DUTY CYCLE  
PAGE 5.....DUTY CYCLY PLOT - SMALL PULSES  
PAGE 6.....DUTY CYCLE PLOT - LARGE PULSES  
PAGE 7.....DUTY CYCLE PLOT  
PAGE 8.....OCCUPIED BANDWIDTH  
PAGE 9-10.....OCCUPIED BANDWIDTH PLOTS

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....CONFIDENTIALTIY LETTER  
EXHIBIT 2.....FCC ID LABEL SAMPLE  
EXHIBIT 3.....SKETCH OF FCC ID LABEL LOCATION  
EXHIBIT 4.....BLOCK DIAGRAM  
EXHIBIT 5A-4P.....SCHEMATICS  
EXHIBIT 6A-6RR.....INSTRUCTION MANUAL  
EXHIBIT 7A-7E.....OPERATIONAL DESCRIPTION  
EXHIBIT 8.....EXTERNAL FRONT VIEW PHOTOGRAPH  
EXHIBIT 9.....EXTERNAL REAR VIEW PHOTOGRAPH  
EXHIBIT 10.....INTERNAL COMPONENT VIEW PHOTOGRAPH  
EXHIBIT 11.....INTERNAL COPPER VIEW PHOTOGRAPH  
EXHIBIT 12.....TEST SET UP PHOTOGRAPH

APPLICANT: PHILIPS CONSUMER ELECTRONICS COMPANY  
FCC ID: BOUUSR-5RF

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/  
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter  
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,  
S/N 3008A00372 Cal. 8/31/01 Due 8/31/02
2. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057,  
Cal. 10/1/01 Due 10/1/02
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171  
Cal. 4/26/01 Due 4/26/03
4. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632  
Char. 3/15/00 Due 3/15/01
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409  
Char. 3/15/00 Due 3/15/01
6. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,  
1-18 GHz, S/N 2319 Cal. 4/27/99 Due 4/27/00
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20  
No Cal Required
8. Horn 40-60GHz: ATM Part #19-443-6R No Cal Required
9. Line Impedance Stabilization Network: Electro-Metrics Model  
EM-7820, w/NEMA Adapter S/N 2682 Cal. 3/16/01 Due 3/16/02
10. Temperature Chamber: Tenney Engineering Model TTTC, S/N 11717-7  
Char. 1/27/01 Due 1/27/02
11. Frequency Counter: HP Model 5385A, S/N 3242A07460  
Char. 11/20/00 Due 11/20/01
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545  
Char. 1/26/01 Due 1/26/02
13. X Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464  
Cal. 11/15/01 Due 11/15/02
15. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N  
9706-1211 Char. 6/10/00 Due 6/10/01
16. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153  
Char. 11/24/00 Due 11/24/01
17. AC Voltmeter: HP Model 400FL, S/N 2213A14499  
Cal. 10/9/01 Due 10/09/02
18. X Digital Multimeter: Fluke Model 77, S/N 43850817  
Cal. 11/16/00 Due 11/16/01
19. Oscilloscope: Tektronix Model 2230, S/N 300572  
Char. 2/1/01 Due 2/1/02

TEST PROCEDURE CONTINUED

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz. The ambient temperature of the UUT was 69°F with a humidity of 55%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	METER READING + ACF = FS
33	20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

Measurements were made by TIMCO ENGINEERING INC. at the registered open field test site located at 849 N.W. State Road 45, Newberry, FL 32669.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: PHILIPS CONSUMER ELECTRONICS COMPANY  
 FCC ID: BOUUSR-5RF  
 NAME OF TEST: RADIATION INTERFERENCE  
 RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE FUNDAMENTAL FREQUENCY= 80.28 dBuV/m dBuV/m. NO FUNDAMENTAL IS ALLOWED IN THE RESTRICTED BANDS.

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE HARMONICS AND SPURIOUS FREQUENCIES = 60.28 dBuV/m dBuV/m. SPURIOUS IN THE RESTRICTED BANDS MUST BE LESS THAN 54dBuV/m OR 15.209.

TEST DATA:

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m
418.00	57.9	H	2.85	16.98	12.25	65.48
836.00	19.9	H	4.07	24.36	12.25	36.08
1,254.00	17.0	H	2.22	26.13	12.25	33.10
1,672.00	** 19.0	H	2.66	28.32	12.25	37.73
2,090.00	22.6	v	3.07	28.63	12.25	42.05
2,508.00	10.2	v	3.41	29.01	12.25	30.37
2,926.00	8.1	v	3.74	30.51	12.25	30.10
3,344.00	9.8	v	4.14	30.94	12.25	32.63

SAMPLE CALCULATION OF LIMIT @ 303 MHz:

$(470 - 260)\text{Mhz} = 210 \text{ MHz}$   
 $(12500 - 3750)\text{uV/m} = 8750 \text{ uV/m}$   
 $8750\text{uV/m}/210\text{MHz} = 41.67 \text{ uV/m/MHz}$   
 $(303-260)\text{MHz} = 43 \text{ MHz}$   
 $43 \text{ MHz} * 41.67 \text{ uV/m/MHz} = 1791.81 \text{ uV/m}$   
 $(1791.81 + 3750)\text{uV/m} = 5541.81 \text{ uV/m limit @ 303 MHz}$

The transmitter ceases transmitting when the button is released.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: \_\_\_Joe Scoglio\_\_\_\_\_ DATE TESTED: November 16, 2001

Applicant: Philips Consumer Electronics Company  
 FCC ID: BOUUSR-5RF  
 Report #: T\P\CEC\1162U1\1162U1TestReport.doc  
 Page #: 3 of 10


APPLICANT: PHILIPS CONSUMER ELECTRONICS COMPANY

FCC ID: BOUUSR-5RF


CALCULATION OF DUTY CYCLE:

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero(0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train, which in this case is milliseconds. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100 millisecond Plot the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the UUT is on within 100 milliseconds. If the pulse train is longer than 100 milliseconds then this number is multiplied by 100 to determine the percentage ON TIME. If the pulse train is less than 100 milliseconds the total on-time is divided by the length of the pulse train and then multiplied by 100 to determine the percentage ON TIME. In this case there were 1 pulse 2.25 milliseconds long and 8 pulses .525 milliseconds short for a total of 44.4 milliseconds on time within either the 100 milliseconds or the pulse train. The average field strength is determined by multiplying the peak field strength by the percent on time. In this case the percentage ON time was 24.4%percent.


Duty Cycle Plot – Small Pulses

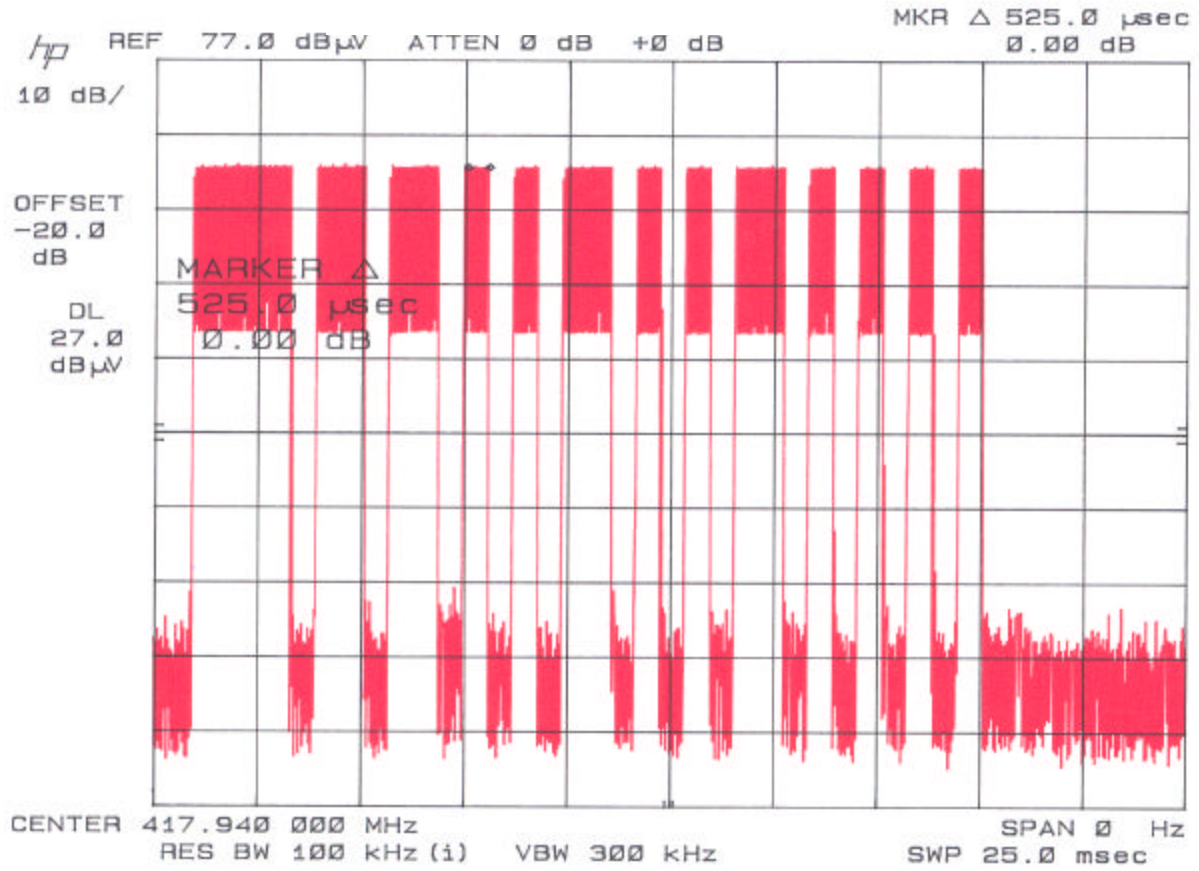

Duty Cycle Plot – Long Pulses

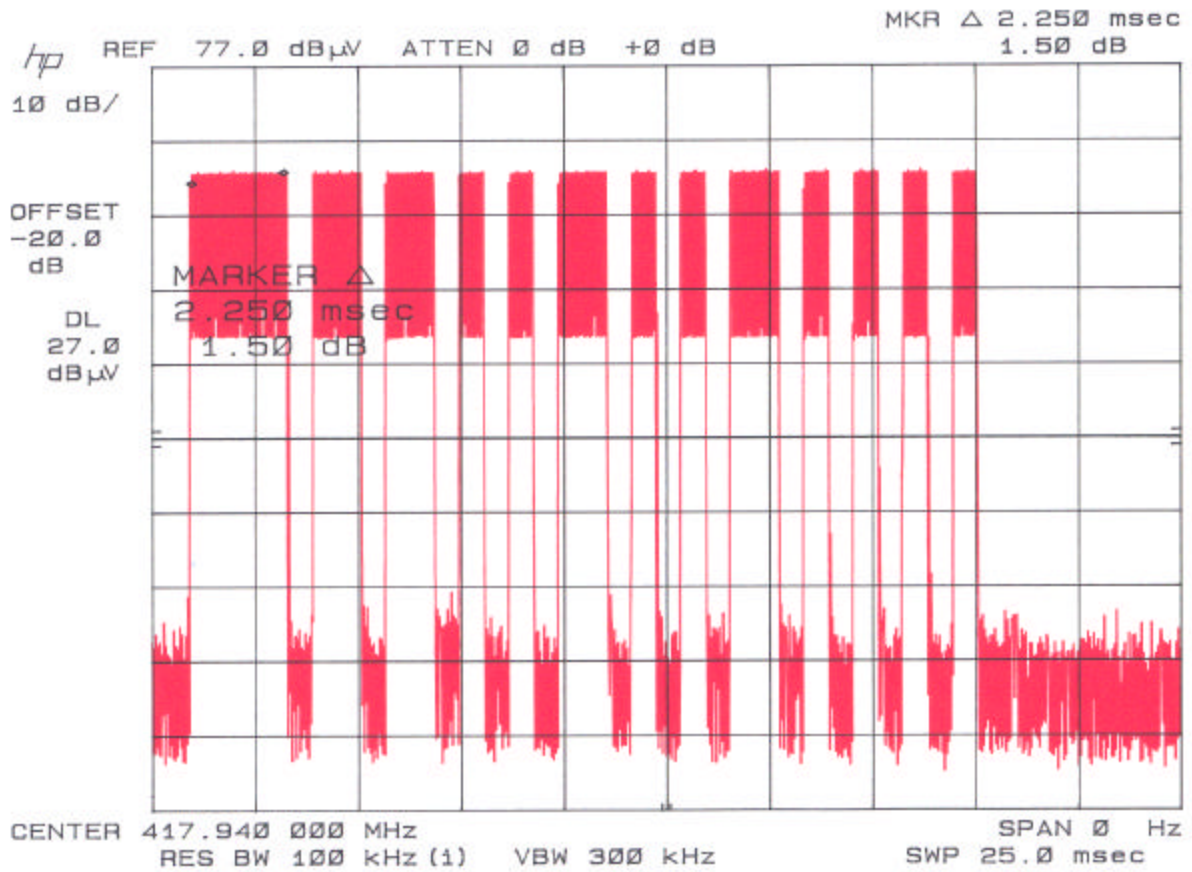

### Duty Cycle Plot

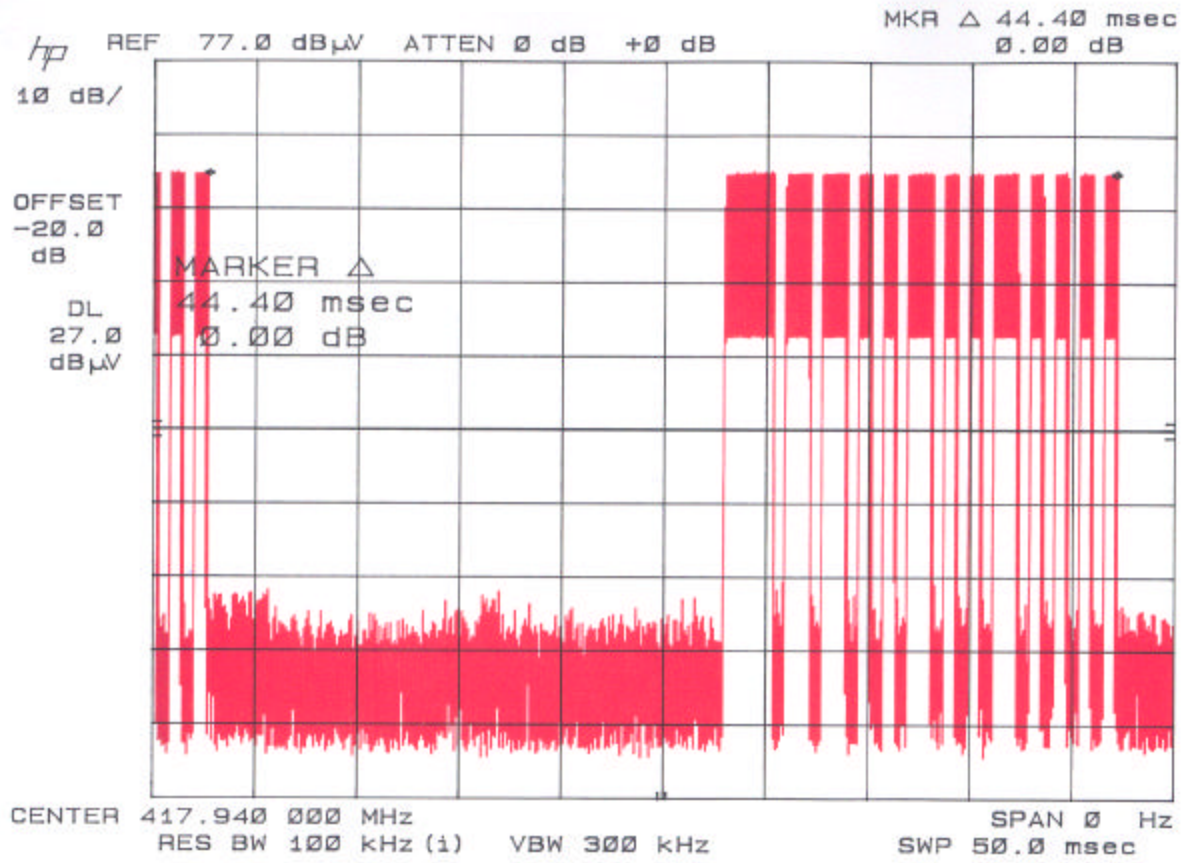



APPLICANT: PHILIPS CONSUMER ELECTRONICS COMPANY

FCC ID: BOUUSR-5RF

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.231(C)

REQUIREMENTS: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

$$418.00 \text{ MHz} * .0025 = 1.045 \text{ MHz}$$
$$1.045 \text{ MHz} / 2 = +/- 522.5$$

THE GRAPHS IN THE FOLLOWING PAGES REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.


METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the plot in exhibit 9 was generated. The vertical scale is set to 10 dB per division: the horizontal scale is set to 100 kHz per division.

TEST RESULTS: The unit meets the FCC requirements.

PERFORMED BY: Joe Scoglio

DATE: November 26, 2001

Occupied Bandwidth

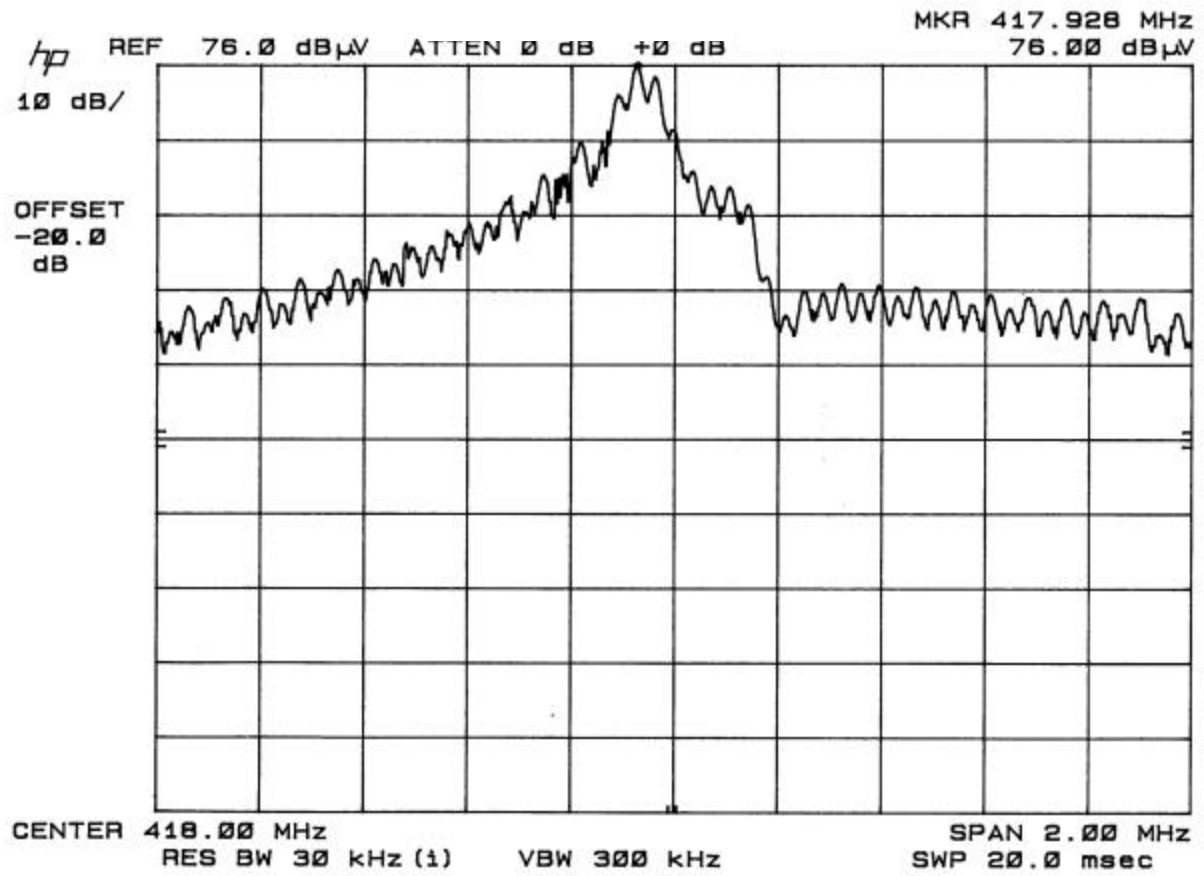

Occupied Bandwidth

