

FCC CERTIFICATION TEST REPORT FOR

Applicant	:	MOTREX Co., LTD.
Address	:	Seoyoung Bldg. 25, Hwangsaedul-ro 258beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea
Equipment under Test	:	Equipo de Audio y Video para Vehiculo
Model No.	:	MTXMO500ASU2i, MTXMO500ASP2i
Trade Mark	:	MOTREX
FCC ID	:	BP9-MO500ASP2I
Manufacturer	:	Skypine Electronics (ShenZhen)Co.,Ltd
Address	:	A1, A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City, Guangdong Province, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results	6
2.	General Test Information	7
2.1.	Description of EUT.....	7
2.2.	Device Capabilities	8
2.3.	Accessories of EUT	8
2.4.	Assistant equipment used for test.....	8
2.5.	Block diagram of EUT configuration for test	8
2.6.	Deviations of test standard	9
2.7.	Test environment conditions	9
2.8.	Test laboratory.....	9
2.9.	Measurement uncertainty	10
3.	Equipment Used During Test.....	11
4.	6 dB Bandwidth and 99% Bandwidth.....	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure.....	13
4.4.	Test result.....	14
4.5.	Original test data.....	15
5.	Conducted Peak Output Power	32
5.1.	Block diagram of test setup	32
5.2.	Limits	32
5.3.	Test procedure.....	32
5.4.	Test result.....	32
6.	Power Spectral Density	34
6.1.	Block diagram of test setup	34
6.2.	Limits	34
6.3.	Test procedure.....	34
6.4.	Test result.....	34
6.5.	Original Test Data.....	35
7.	Band Edge and Spurious Emissions (Conducted).....	44
7.1.	Block diagram of test setup	44
7.2.	Limits	44
7.3.	Test procedure.....	44
7.4.	Test Result	45
7.5.	Original test data.....	45
8.	Radiated Spurious Emissions.....	75

8.1.	Block diagram of test setup	75
8.2.	Limit	76
8.3.	Test procedure.....	77
8.4.	Test result.....	79
9.	Radiated Band Edge Compliance.....	86
9.1.	Block diagram of test setup	86
9.2.	Limit	86
9.3.	Test procedure.....	86
9.4.	Test result.....	86
10.	Power Line Conducted Emission.....	111
10.1.	Block diagram of test setup	111
10.2.	Power line conducted emission limits (Class B).....	111
10.3.	Test procedure.....	111
10.4.	Test result.....	112
11.	Antenna Requirements.....	113
11.1.	Limit.....	113
11.2.	Result	113

Test Report Declare

Applicant	:	MOTREX Co., LTD.
Address	:	Seoyoung Bldg. 25, Hwangsaoul-ro 258beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea
Equipment under Test	:	Equipo de Audio y Video para Vehiculo
Model No	:	MTXMO500ASU2i, MTXMO500ASP2i
Trade Mark	:	MOTREX
Manufacturer	:	Skypine Electronics (ShenZhen)Co.,Ltd
Address	:	A1,A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City,Guangdong Province,China

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C

Test procedure used: ANSI C63.10:2013, Apr. 2018, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-R21060707-2E02		
Date of Receipt:	Jun. 13, 2021	Date of Test:	Jun. 13, 2021 ~ Jul. 22, 2021

Prepared By:

Jacky Huang

Jacky Huang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jul. 22, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6 dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2)	Pass
Conducted Output Power	FCC 15.247 (b) (3)	Pass
Power Spectral Density	FCC 15.247 (e)	Pass
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d)	Pass
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
Power Line Conducted Emission	FCC 15.207	N/A
Antenna Requirement	FCC 15.203	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. General Test Information

2.1. Description of EUT

EUT* Name	: Equipo de Audio y Video para Vehiculo
Model Number	: MTXMO500ASU2i, MTXMO500ASP2i
Difference of models	: All models are identical except the appearance and control panel, therefore the test performed on the model MTXMO500ASU2i.
EUT function description	: Please reference user manual of this device
Power supply	: DC 12V
Radio Technology	: IEEE 802.11b/g/n
FCC Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: 6.5, 13, 19.5, 26, 39, 52, 58.5, 65 Mbps IEEE 802.11n HT40: 13.5, 27, 40.5, 54, 81, 108, 121.5, 135 Mbps
Antenna Gain	: Antenna 1: PK gain: 4.51 dBi Antenna 2: PK gain: 4.51 dBi
Sample Type	: Series production

Note: EUT is the abbreviation of equipment under test.

Antenna information			
	Ant1 gain	Ant2 gain	MIMO
IEEE 802.11b	4.51	4.51	/
IEEE 802.11g	4.51	4.51	/
IEEE 802.11n HT20	4.51	4.51	7.52
IEEE 802.11n HT40	4.51	4.51	7.52

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Device Capabilities

This device contains the following capabilities:

Bluetooth (BR, EDR), 802.11b/g/n WLAN, 802.11a/ac UNII

This device supports simultaneous transmission operations. The table below shows all configurations possible.

Simultaneous Transmission			
NO.	Simultaneous Transmission Configuration	Antenna 2 2.4G WIFI	Antenna 2 5.8G WIFI
1	Antenna 1 BT	Yes	Yes


2.3. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.5. Block diagram of EUT configuration for test



EUT was connected to control to provide by manufacturer, which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software "QRCT Qualcomm Radio Control Tool" provided by manufacturer to control EUT work in Continuous Tx mode, and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	12	1	LCH: CH1	2412
	12	1	MCH: CH6	2437
	12	1	HCH: CH11	2462
IEEE 802.11g	14	6	LCH: CH1	2412
	14	6	MCH: CH6	2437
	14	6	HCH: CH11	2462
IEEE 802.11n HT20	12	MCS 8	LCH: CH1	2412
	12	MCS 8	MCH: CH6	2437
	12	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	10	MCS 8	LCH: CH3	2422
	10	MCS 8	MCH: CH6	2437
	10	MCS 8	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.6. Deviations of test standard

No deviation

2.7. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.8. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.9. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3x10 ⁻⁸
Temperature	0.4 °C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz - 30 MHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☐RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jun. 01, 2021	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jun. 01, 2021	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 28, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	101472	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Jan. 19, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 28, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Sep. 30, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☒Radiation 2#chamber					

EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	1013 03	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
□ Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2 [®]	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
□ Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	43101180156 8-12#	Jul. 01, 2020	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6 dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

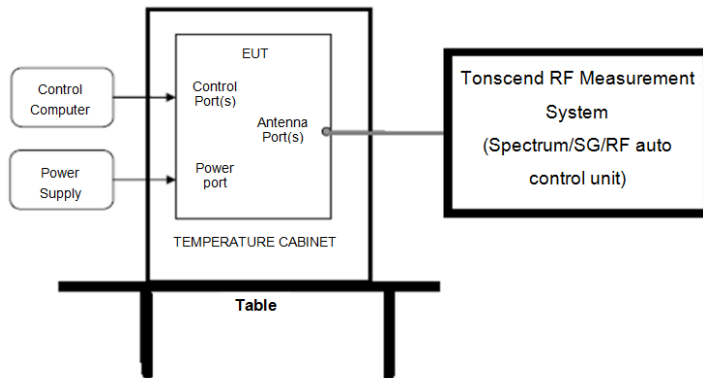

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW: 300 kHz

VBW: 1 MHz

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW: 100 kHz

VBW: 300 kHz

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test result


Test Mode	Test	Ant	6 dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	8.080	0.5	Pass
11B	2412	Ant2	8.120	0.5	Pass
11B	2437	Ant1	7.160	0.5	Pass
11B	2437	Ant2	8.120	0.5	Pass
11B	2462	Ant1	7.640	0.5	Pass
11B	2462	Ant2	8.120	0.5	Pass
11G	2412	Ant1	16.360	0.5	Pass
11G	2412	Ant2	16.400	0.5	Pass
11G	2437	Ant1	16.360	0.5	Pass
11G	2437	Ant2	16.000	0.5	Pass
11G	2462	Ant1	16.120	0.5	Pass
11G	2462	Ant2	16.040	0.5	Pass
11N20MIMO	2412	Ant1	16.600	0.5	Pass
11N20MIMO	2412	Ant2	16.960	0.5	Pass
11N20MIMO	2437	Ant1	16.920	0.5	Pass
11N20MIMO	2437	Ant2	16.840	0.5	Pass
11N20MIMO	2462	Ant1	16.480	0.5	Pass
11N20MIMO	2462	Ant2	17.000	0.5	Pass
11N40MIMO	2422	Ant1	36.240	0.5	Pass
11N40MIMO	2422	Ant2	35.840	0.5	Pass
11N40MIMO	2437	Ant1	35.840	0.5	Pass
11N40MIMO	2437	Ant2	35.440	0.5	Pass
11N40MIMO	2452	Ant1	35.680	0.5	Pass
11N40MIMO	2452	Ant2	35.840	0.5	Pass

Test Mode	Test	Ant	99% OBW [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	13.72	---	Pass
11B	2412	Ant2	13.28	---	Pass
11B	2437	Ant1	13.36	---	Pass
11B	2437	Ant2	13.04	---	Pass
11B	2462	Ant1	13.24	---	Pass
11B	2462	Ant2	13.00	---	Pass
11G	2412	Ant1	17.00	---	Pass
11G	2412	Ant2	16.56	---	Pass
11G	2437	Ant1	16.68	---	Pass
11G	2437	Ant2	16.48	---	Pass


11G	2462	Ant1	16.56	---	Pass
11G	2462	Ant2	16.44	---	Pass
11N20MIMO	2412	Ant1	17.88	---	Pass
11N20MIMO	2412	Ant2	17.68	---	Pass
11N20MIMO	2437	Ant1	17.72	---	Pass
11N20MIMO	2437	Ant2	17.64	---	Pass
11N20MIMO	2462	Ant1	17.68	---	Pass
11N20MIMO	2462	Ant2	17.64	---	Pass
11N40MIMO	2422	Ant1	36.24	---	Pass
11N40MIMO	2422	Ant2	36.16	---	Pass
11N40MIMO	2437	Ant1	36.08	---	Pass
11N40MIMO	2437	Ant2	36.16	---	Pass
11N40MIMO	2452	Ant1	36.16	---	Pass
11N40MIMO	2452	Ant2	36.08	---	Pass

4.5. Original test data


6 dB Bandwidth:

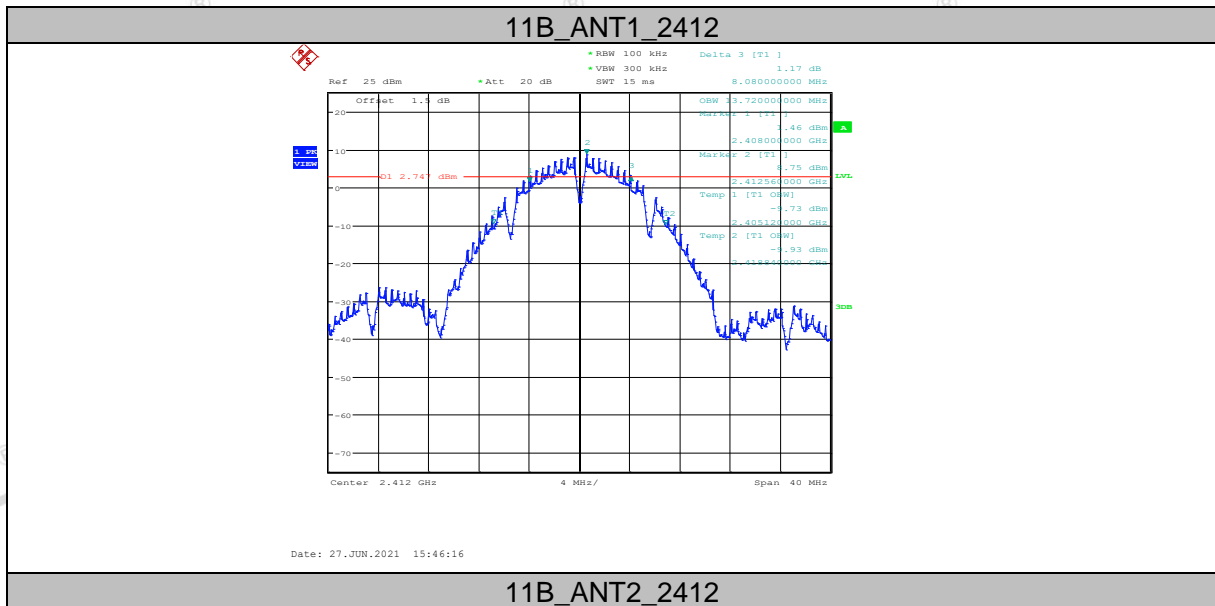


11B_ANT2_2412

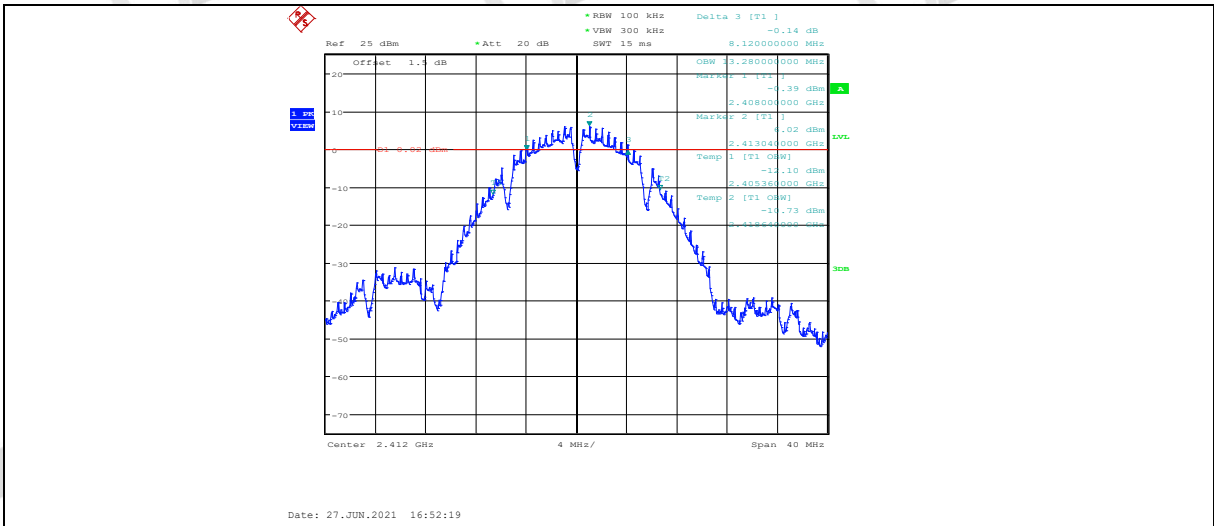


11B_ANT1_2437

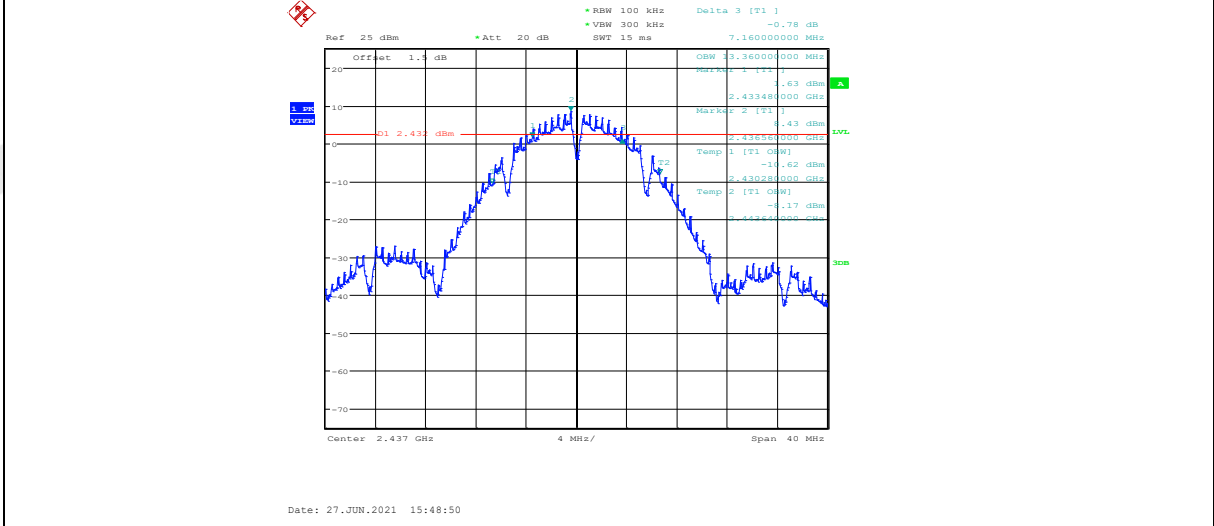


11B_ANT2_2437

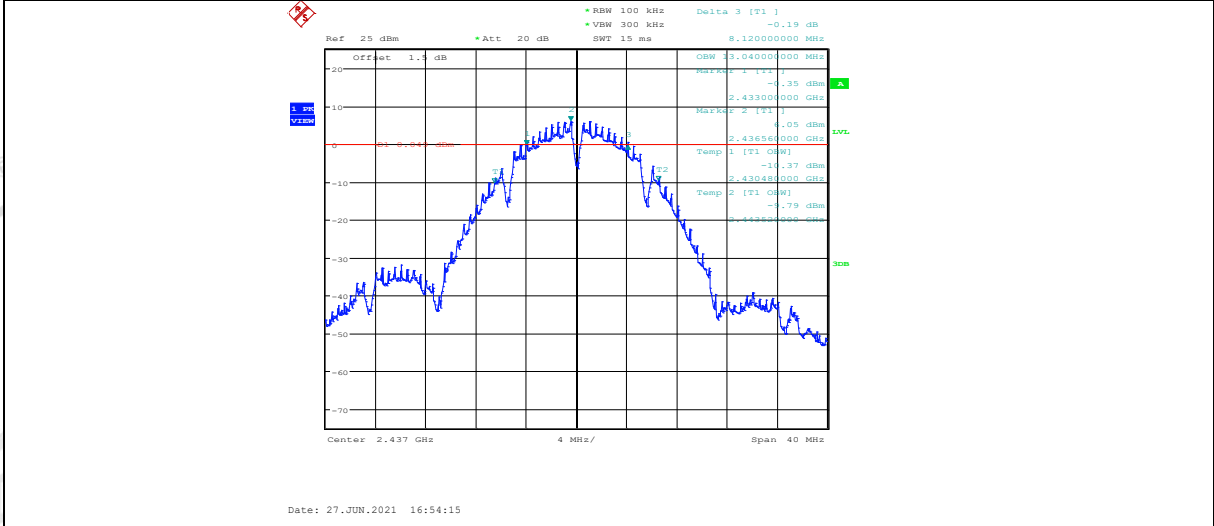


11B_ANT1_2462

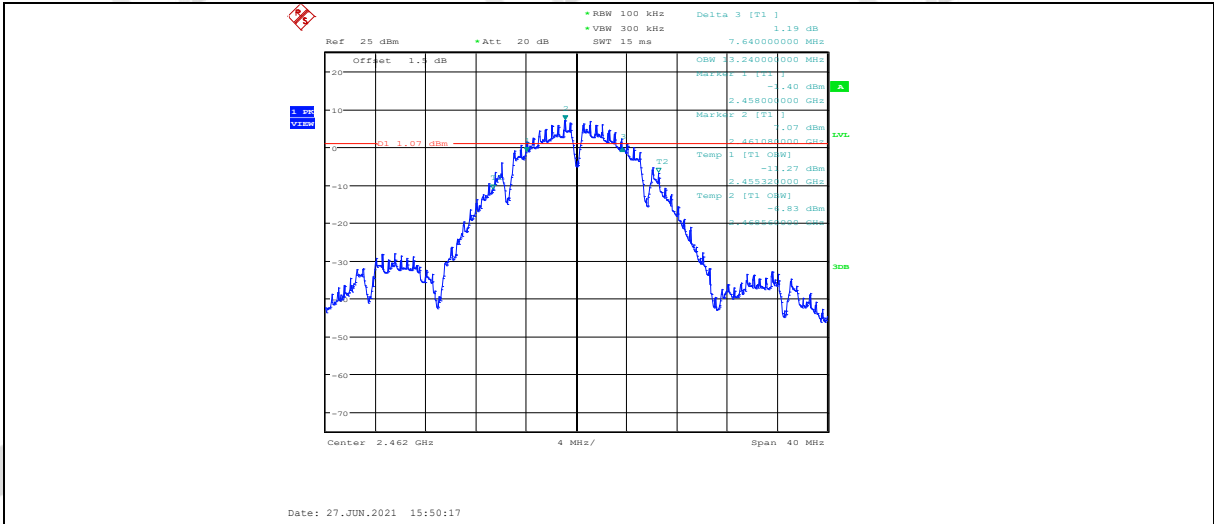


11B_ANT2_2462

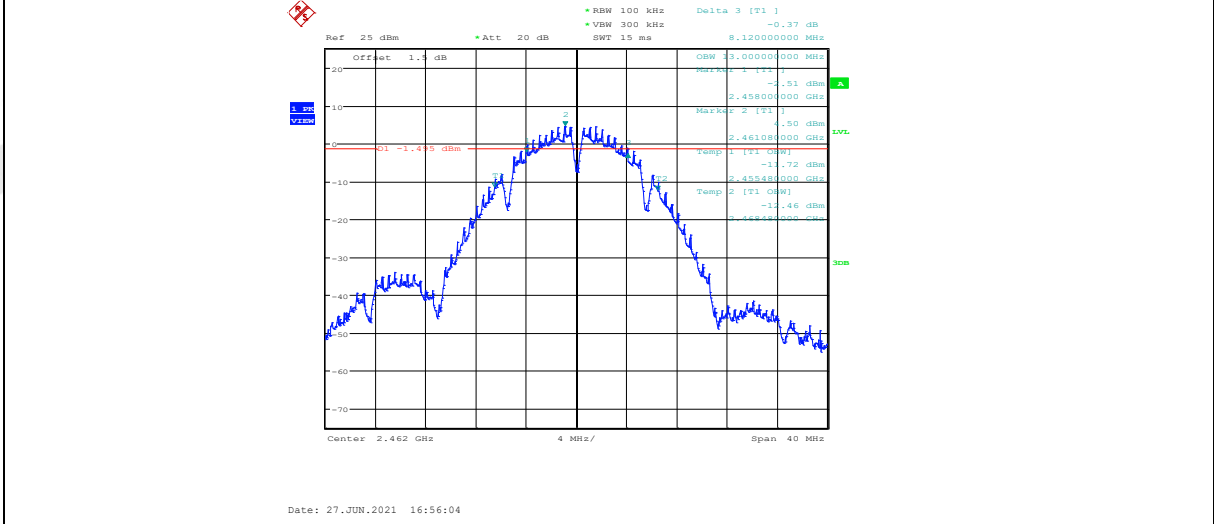


11G_ANT1_2412

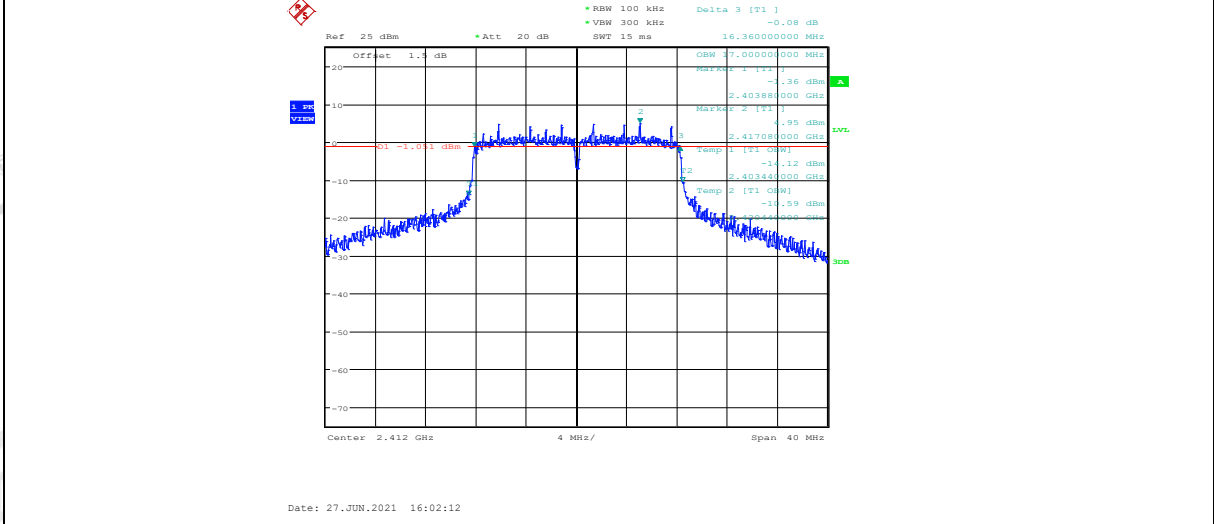


11G_ANT2_2412

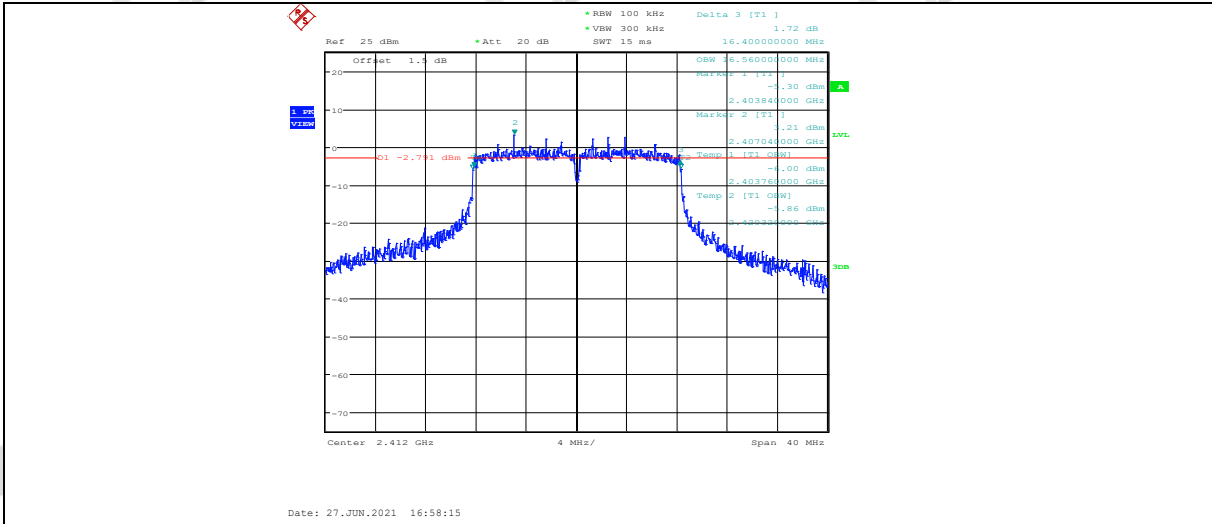


11G_ANT1_2437

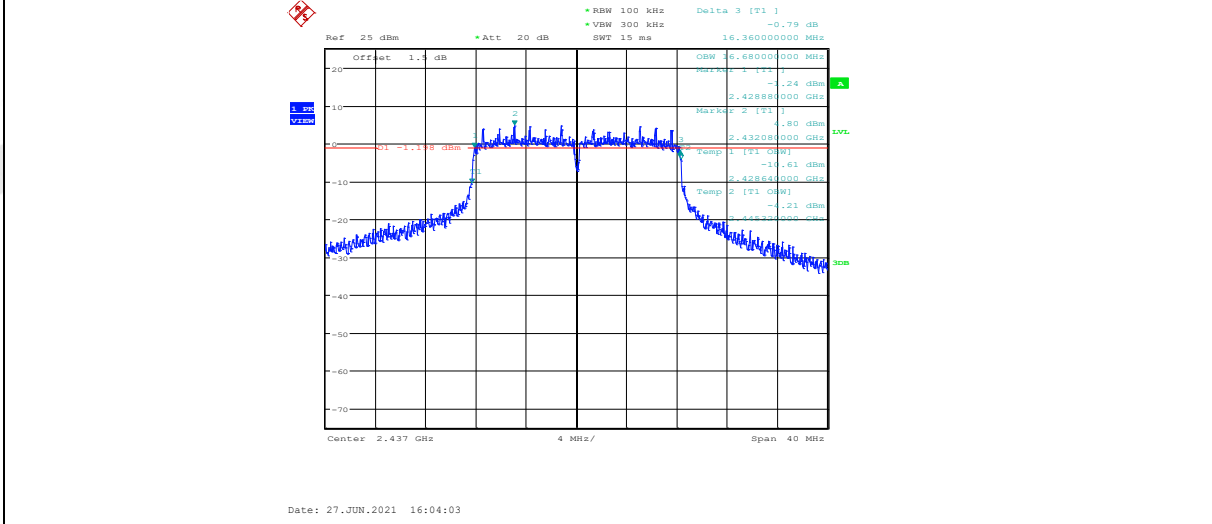


11G_ANT2_2437

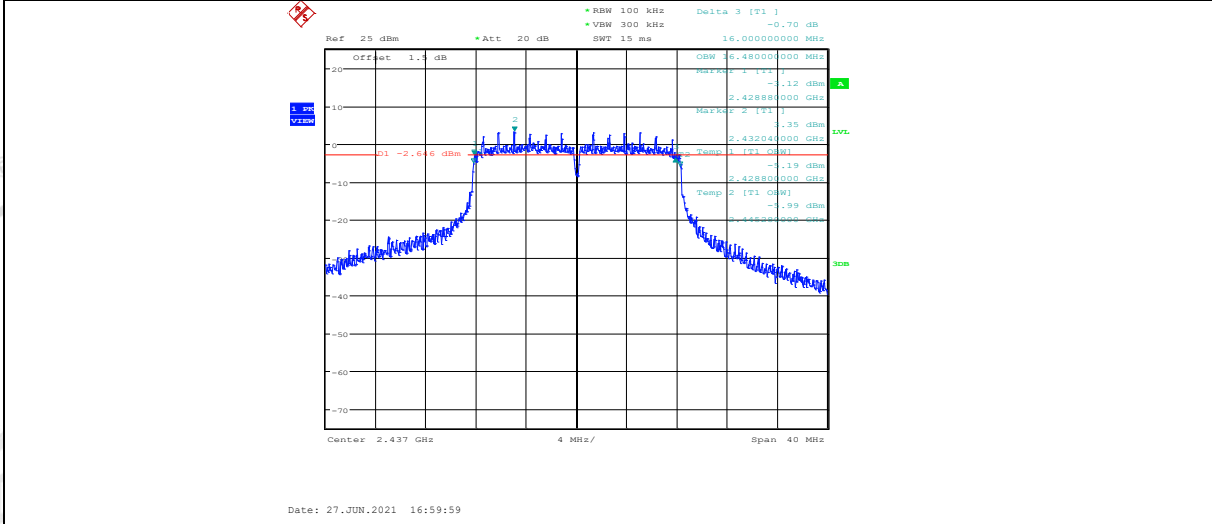


11G_ANT1_2462

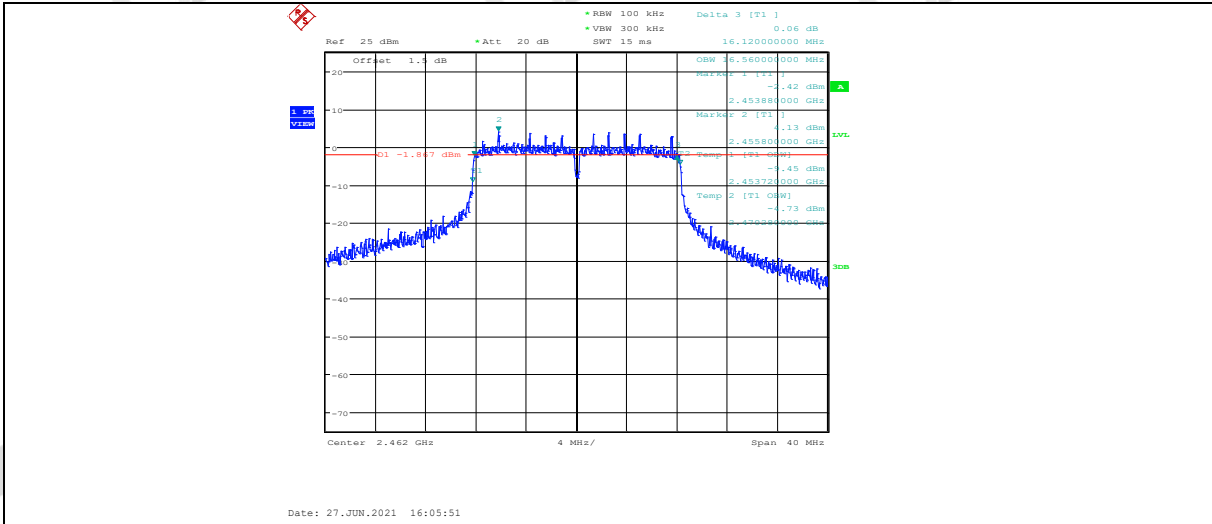


11G_ANT2_2462

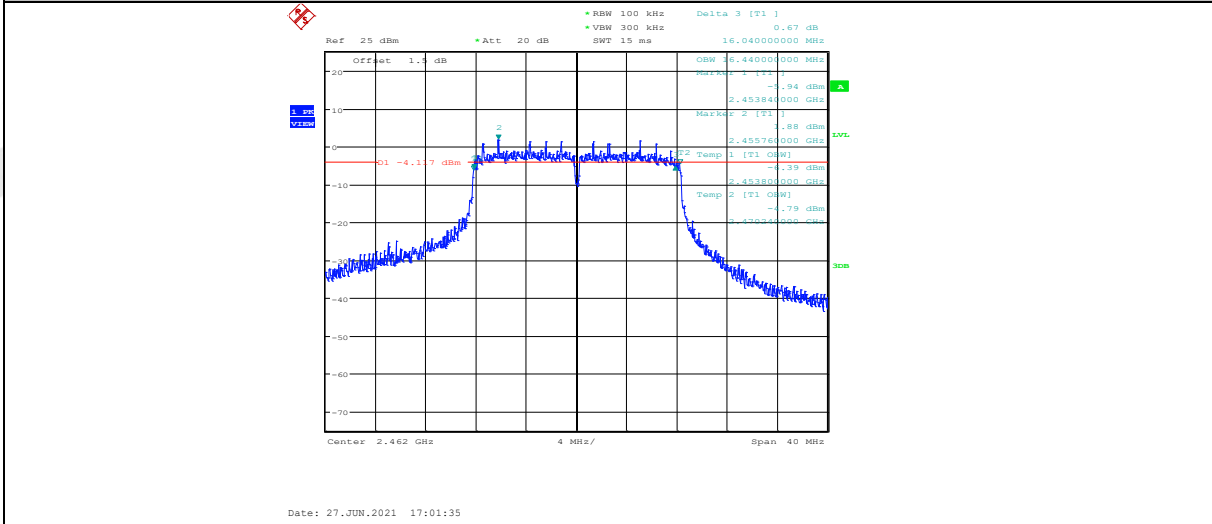


11N20MIMO_ANT1_2412

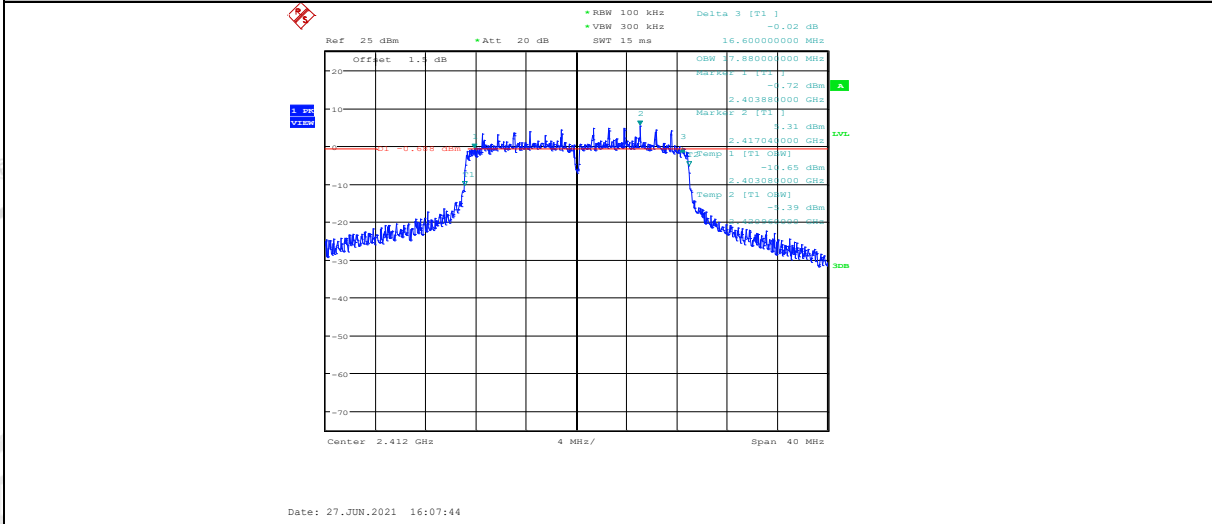


11N20MIMO_ANT2_2412

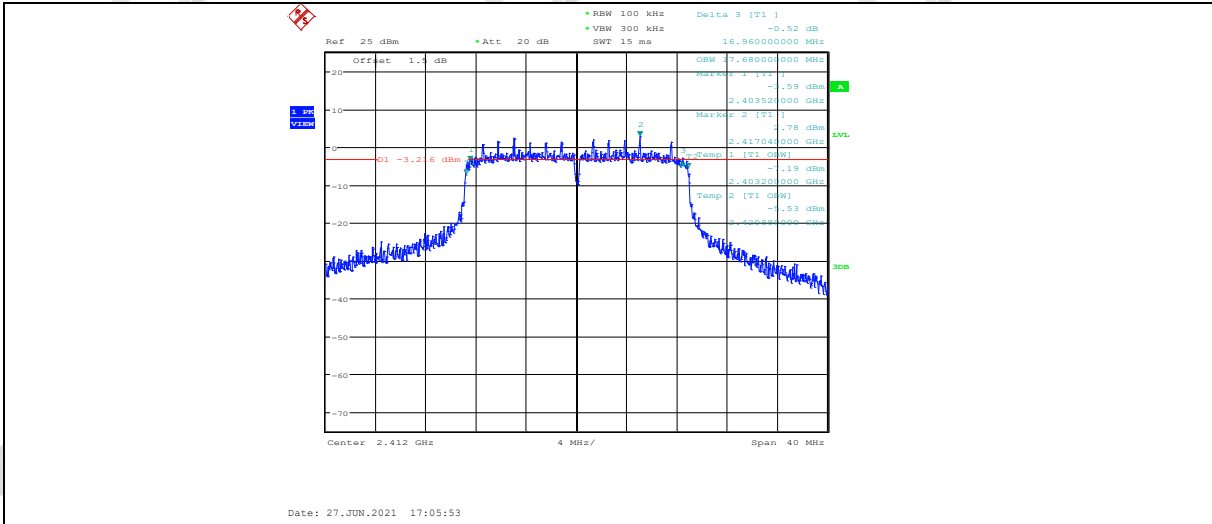


11N20MIMO_ANT1_2437

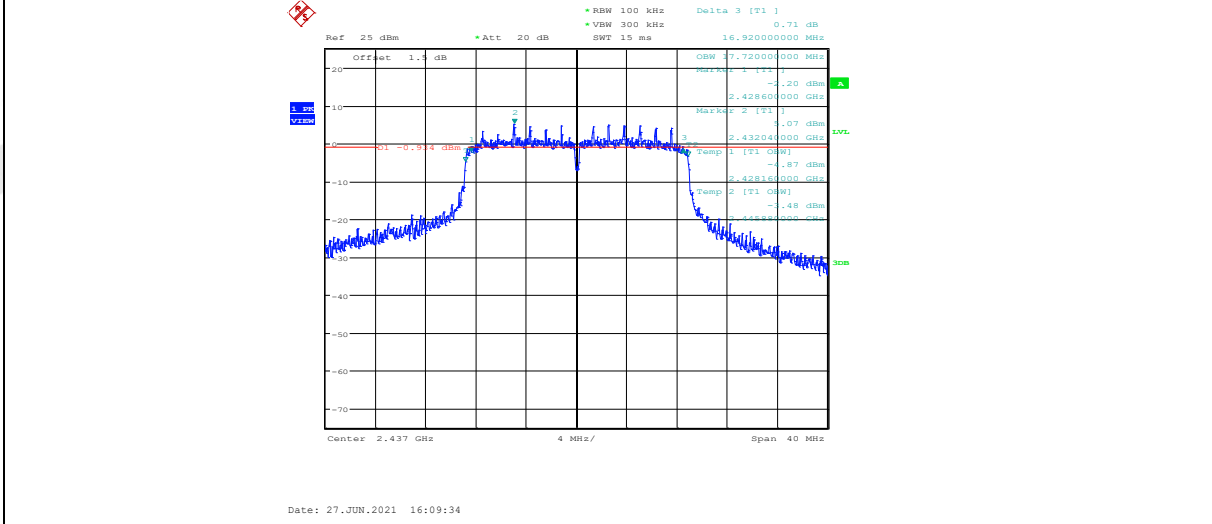


11N20MIMO_ANT2_2437

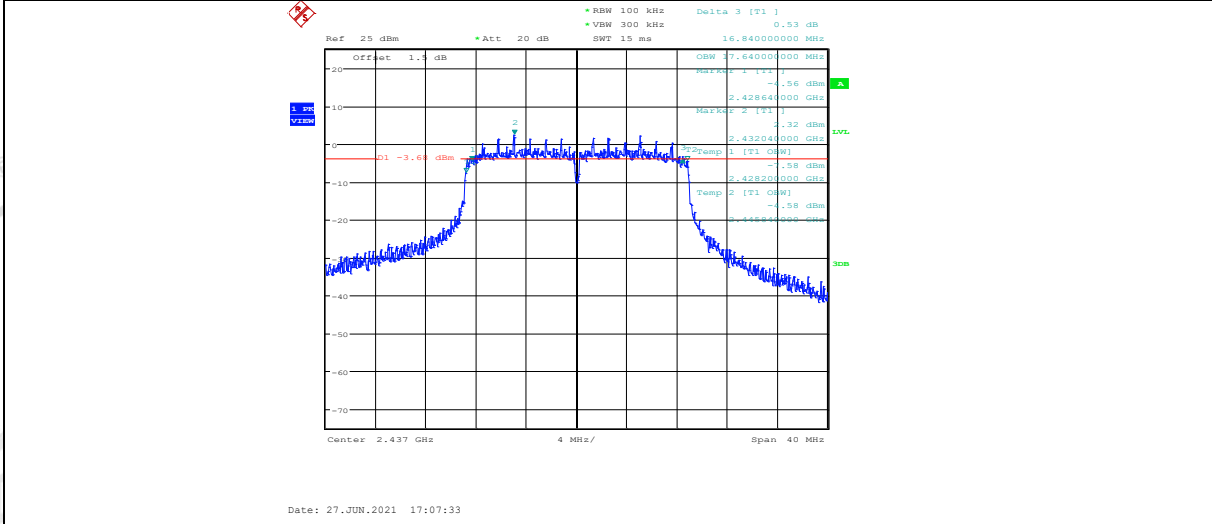


11N20MIMO_ANT1_2462

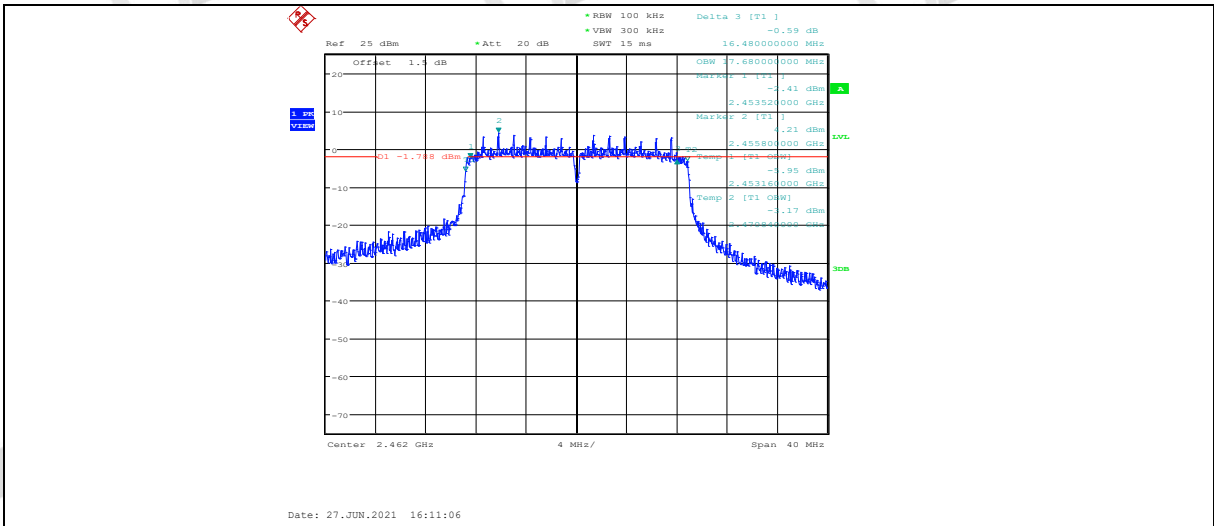


11N20MIMO_ANT2_2462

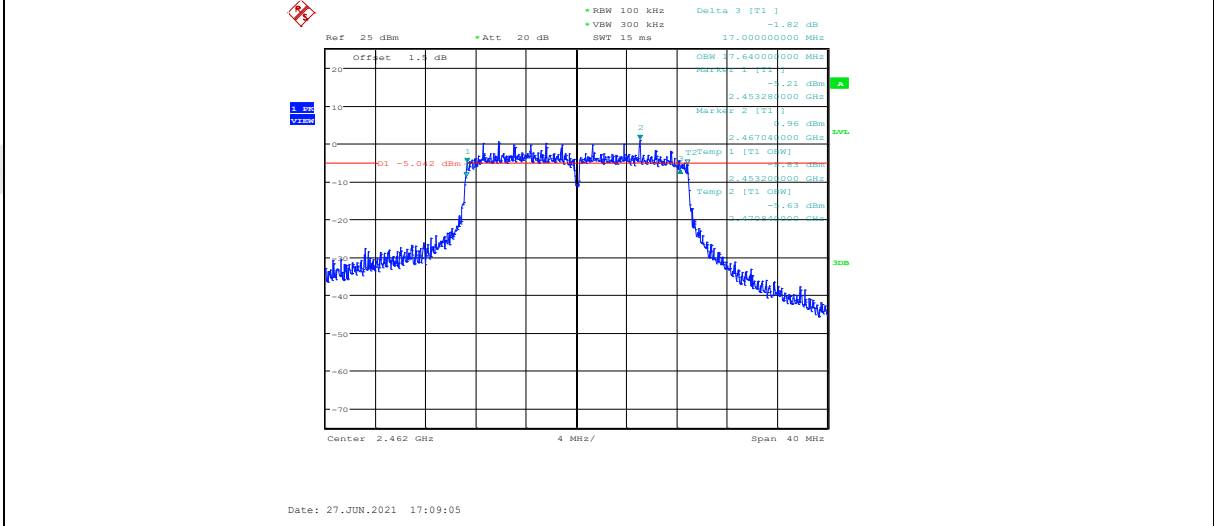


11N40MIMO_ANT1_2422

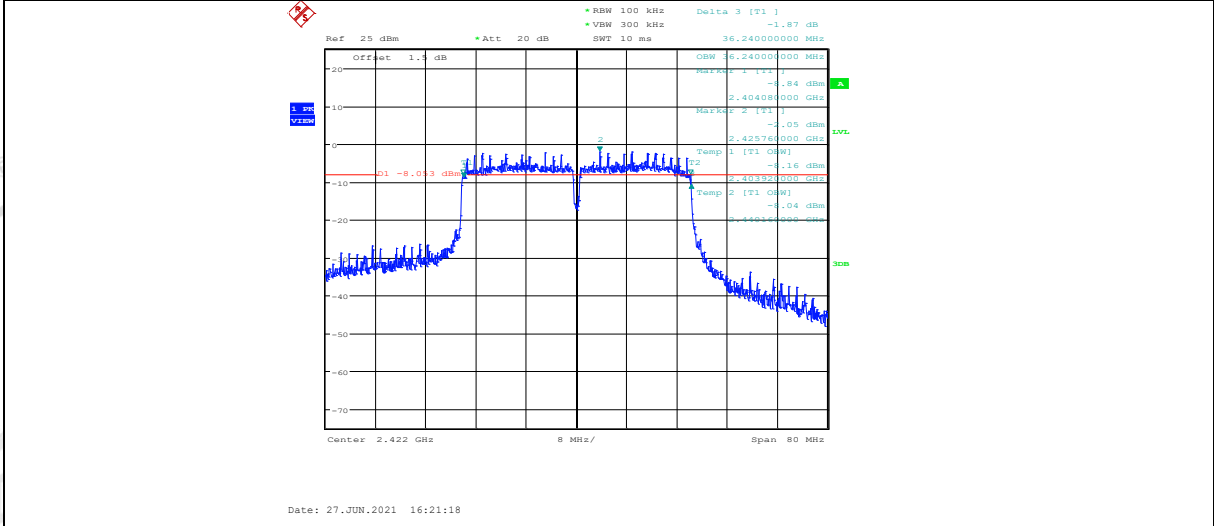


11N40MIMO_ANT2_2422

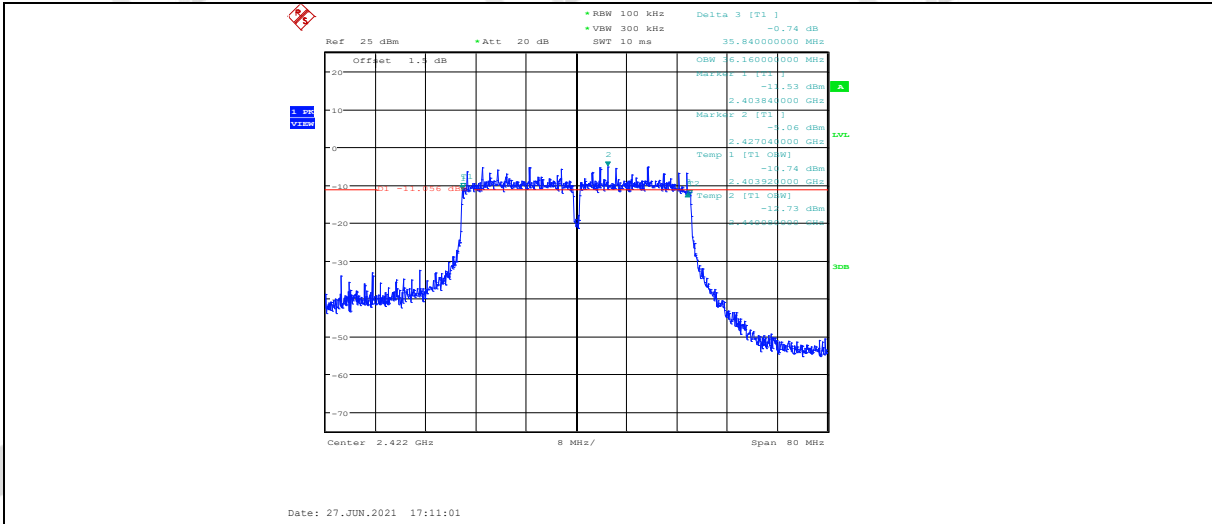


11N40MIMO_ANT1_2437

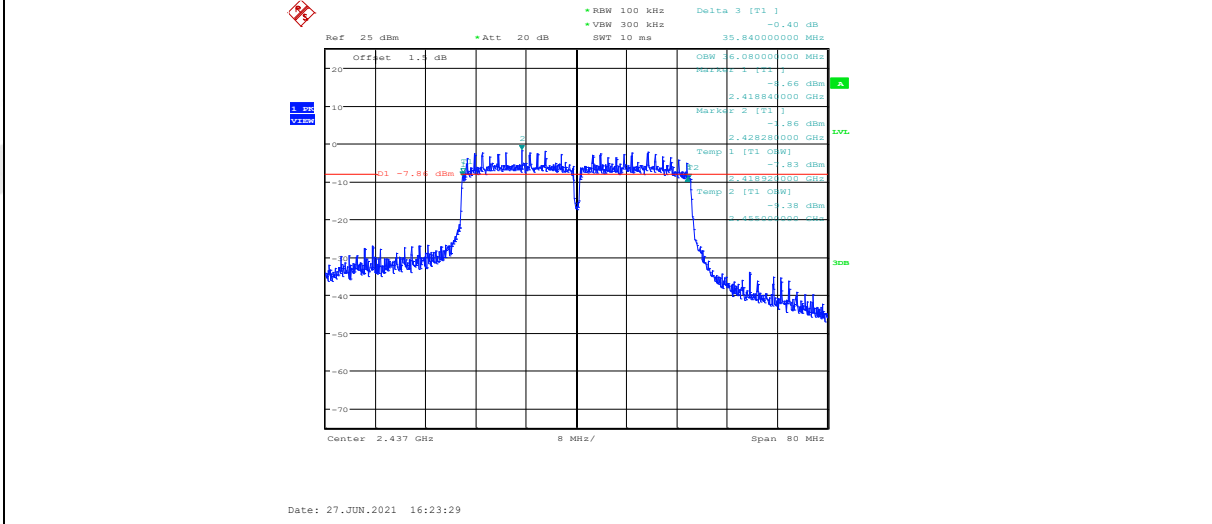


11N40MIMO_ANT2_2437

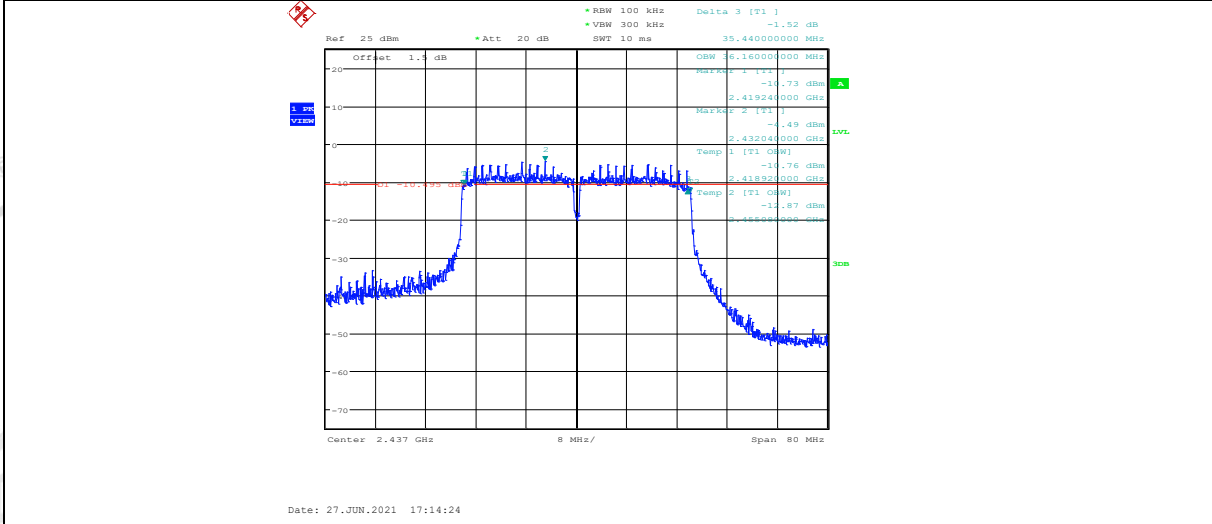

11N40MIMO_ANT1_2452

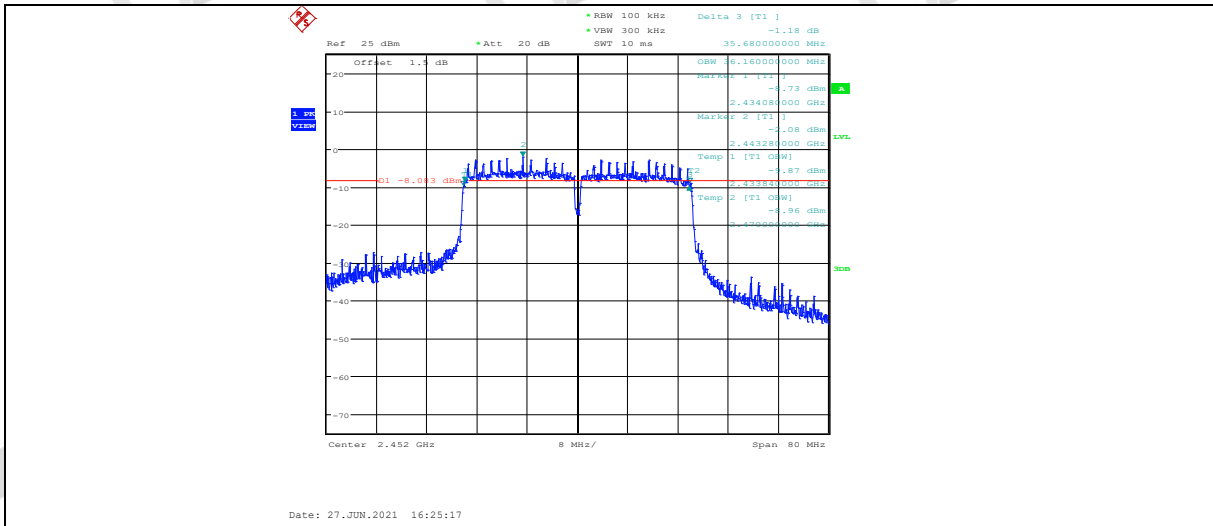


11N40MIMO_ANT2_2452

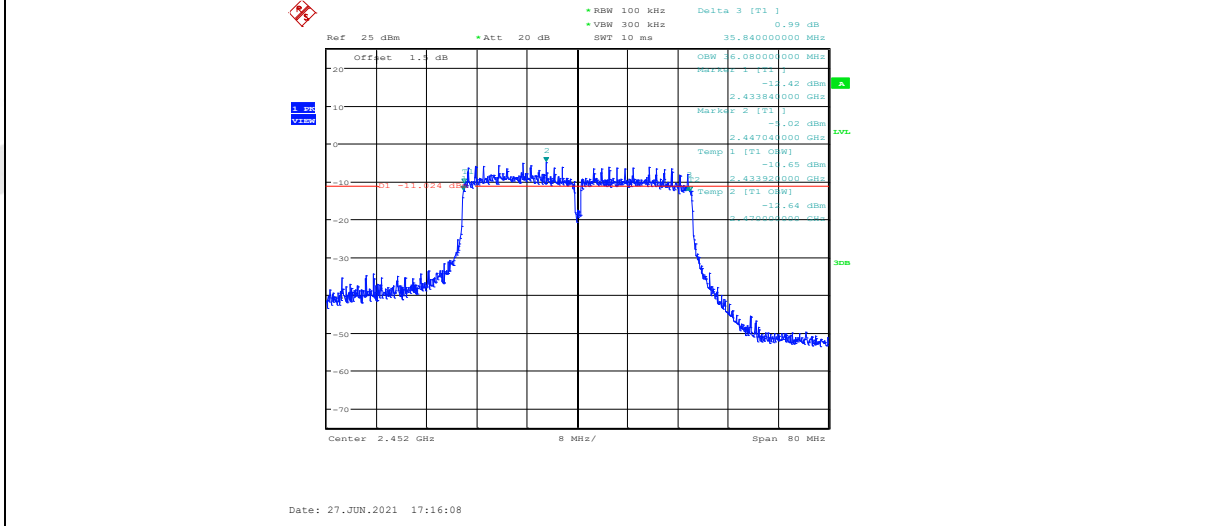


99% OBW:


11B_Ant1_2412

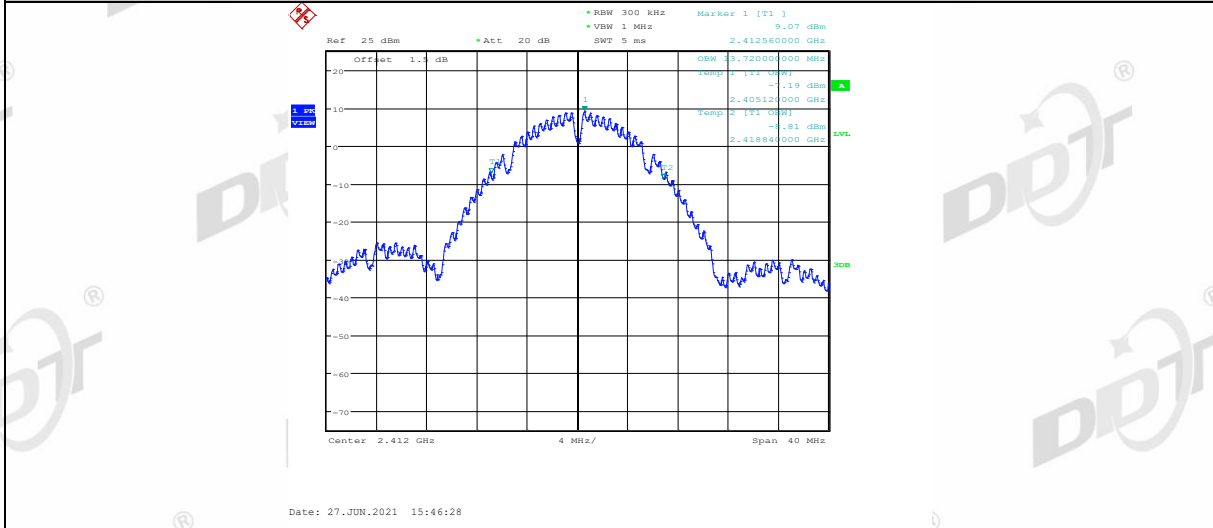


11B_Ant2_2412

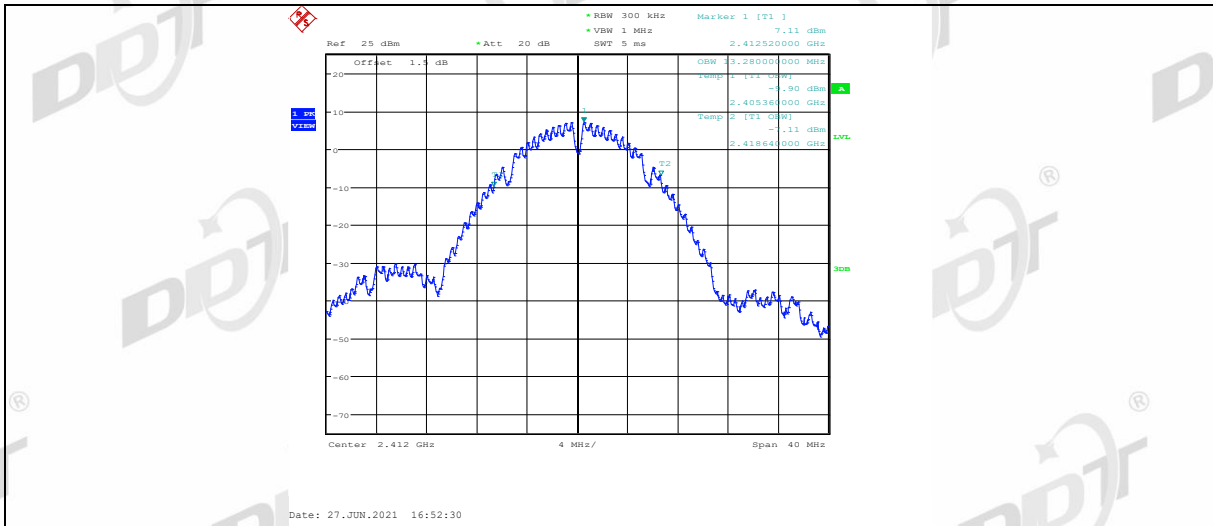


11B_Ant1_2437

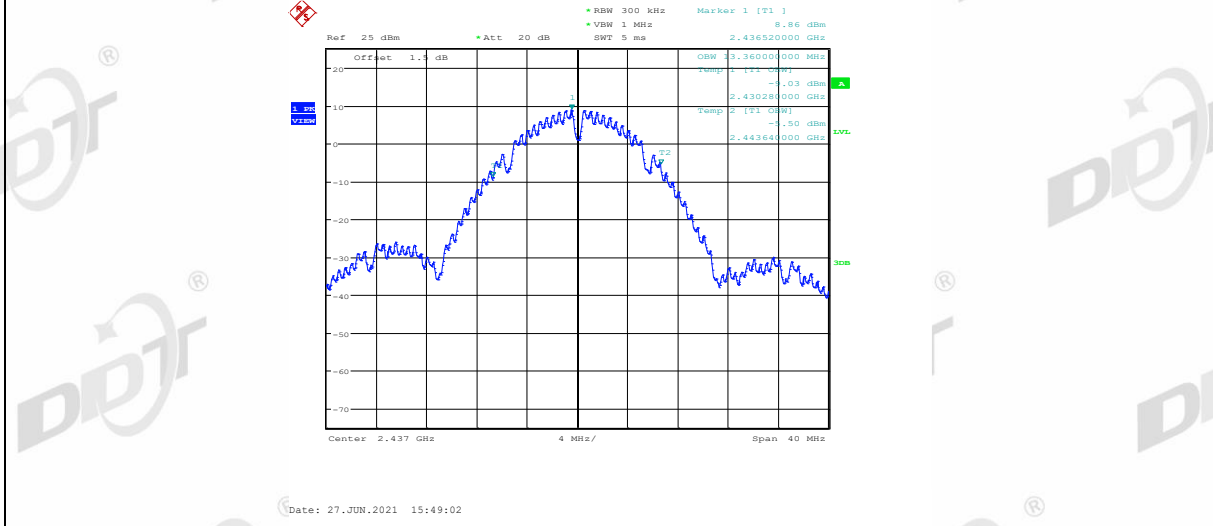


11B_Ant2_2437

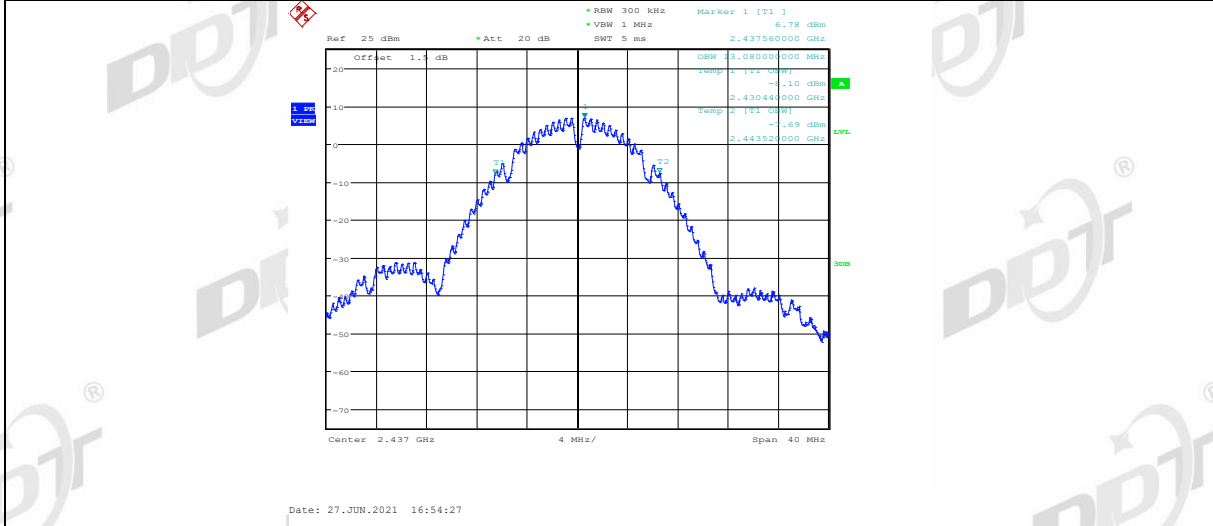


11B_Ant1_2462

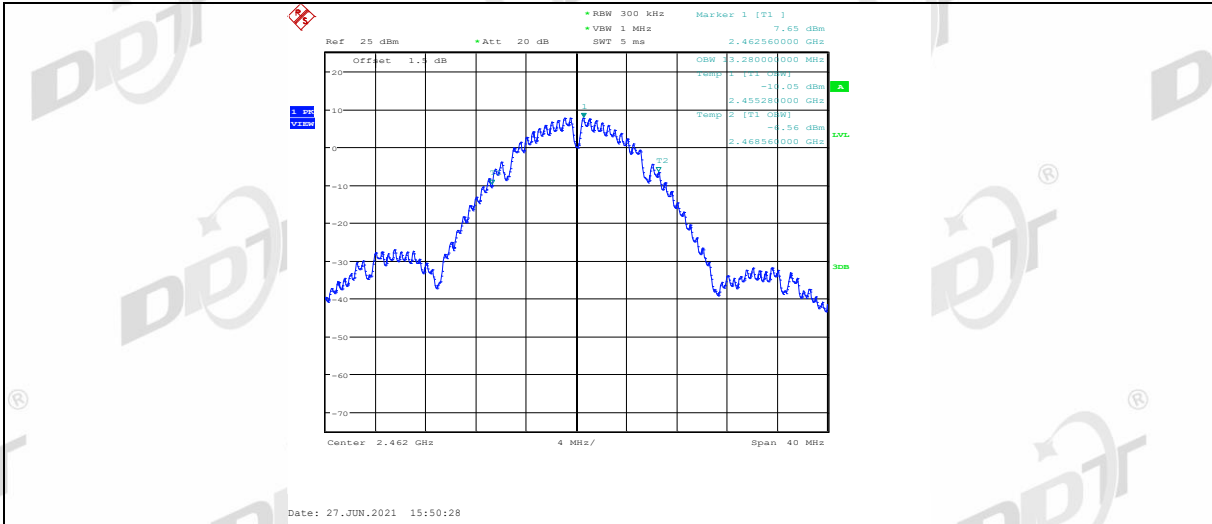


11B_Ant2_2462

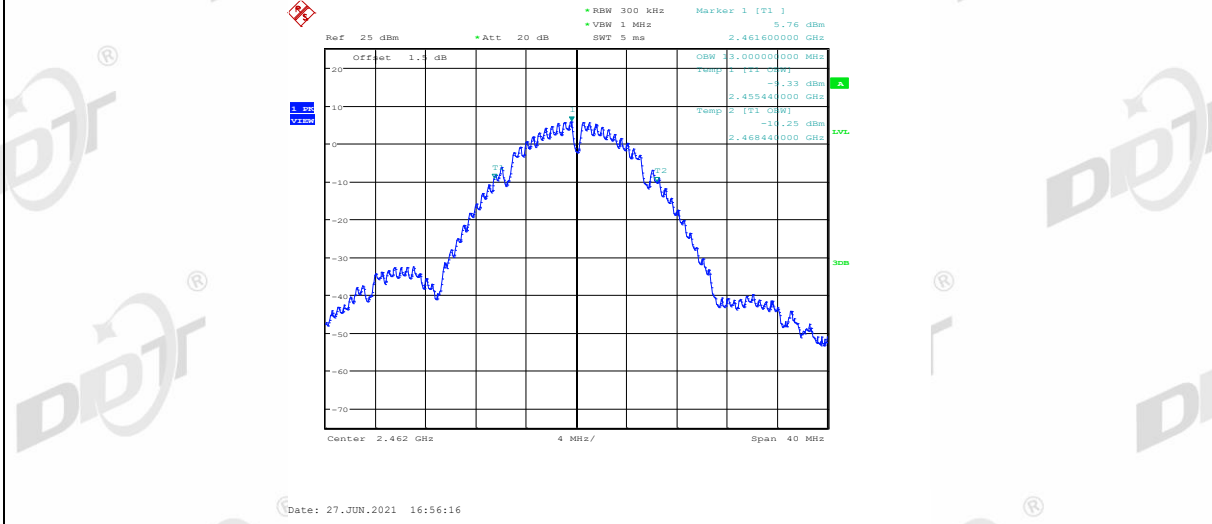


11G_Ant1_2412

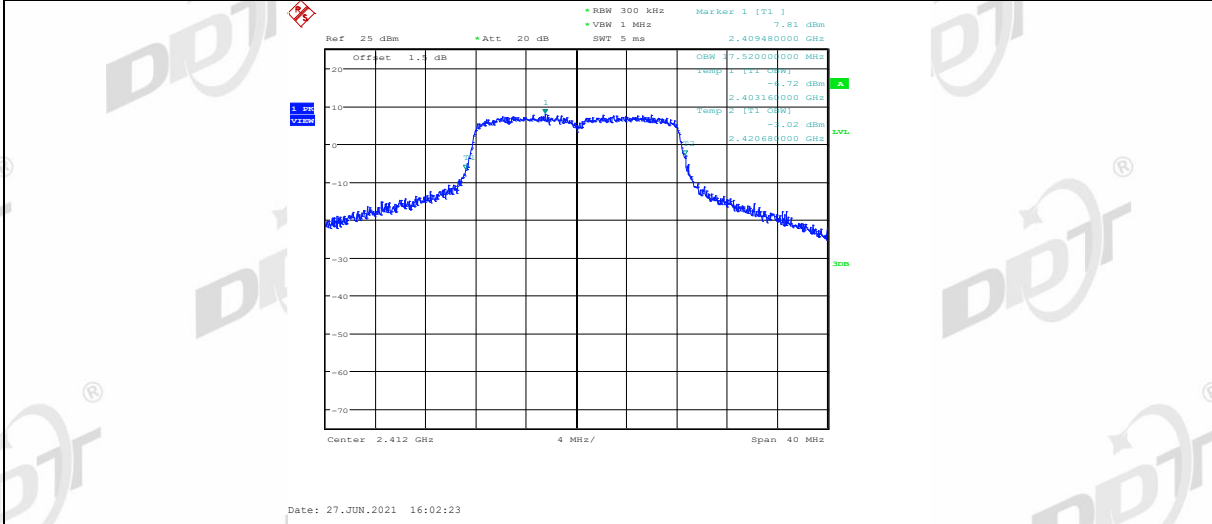


11G_Ant2_2412

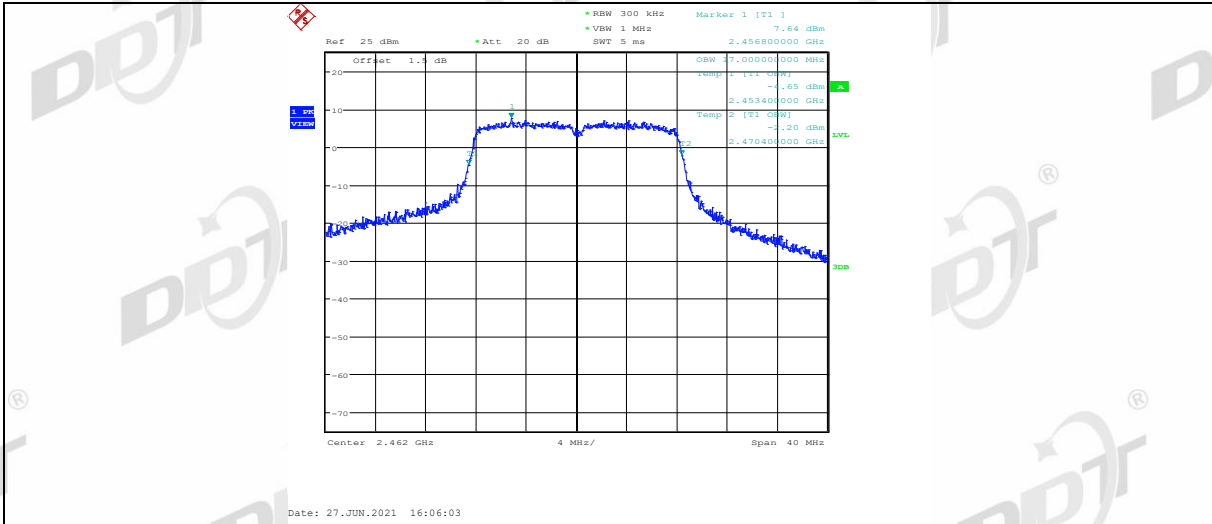


11G_Ant2_2462

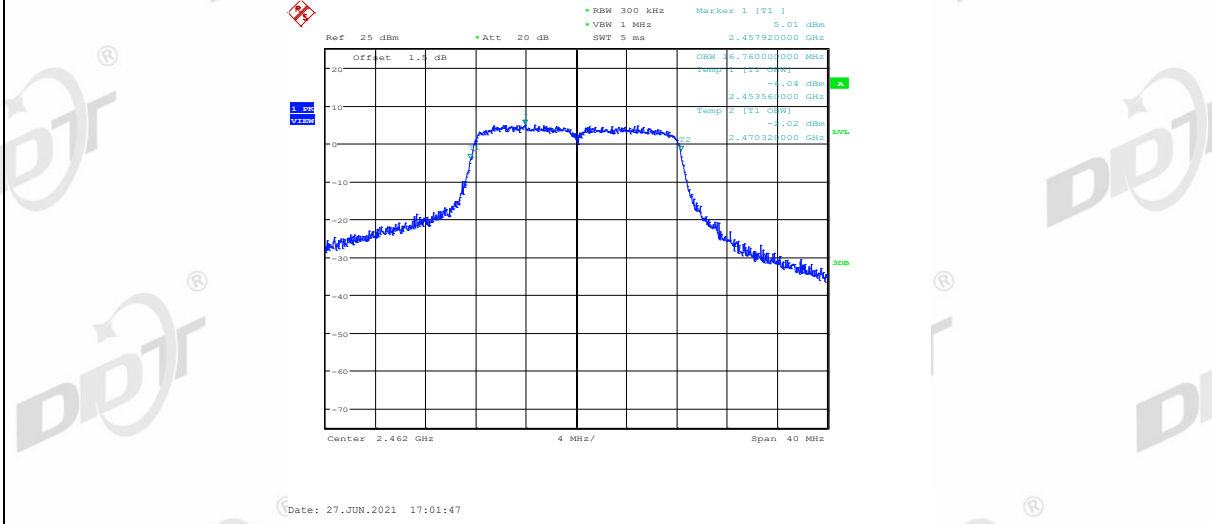


11N20MIMO_Ant1_2412

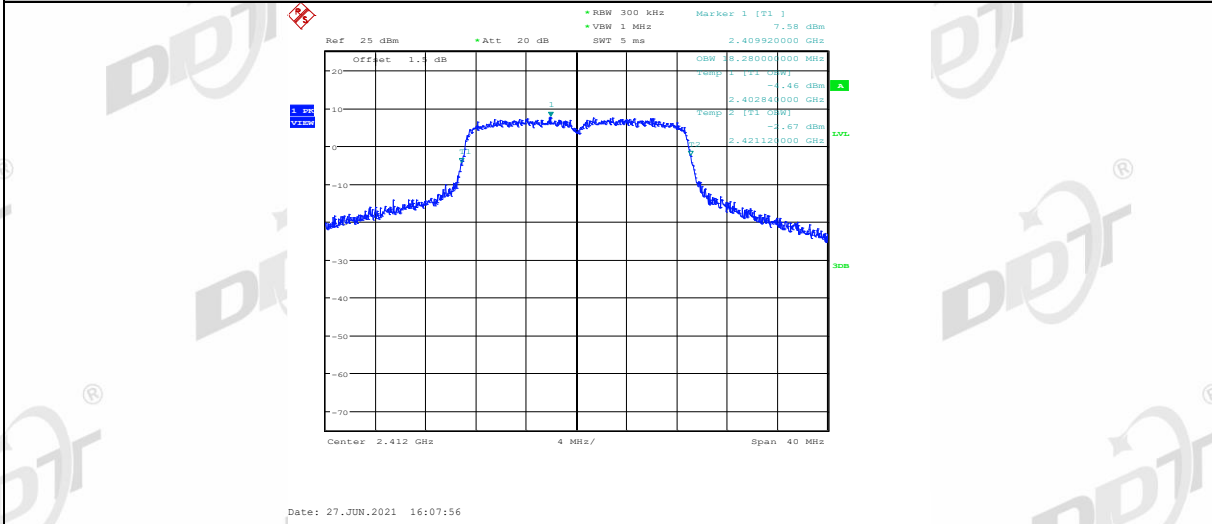


11N20MIMO_Ant2_2412

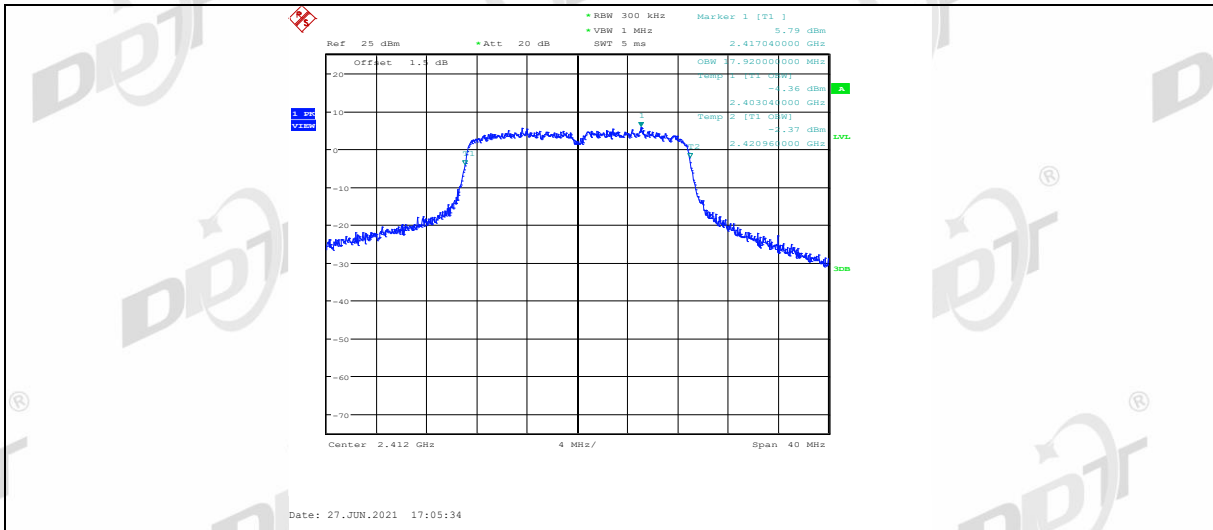


11N20MIMO_Ant1_2437

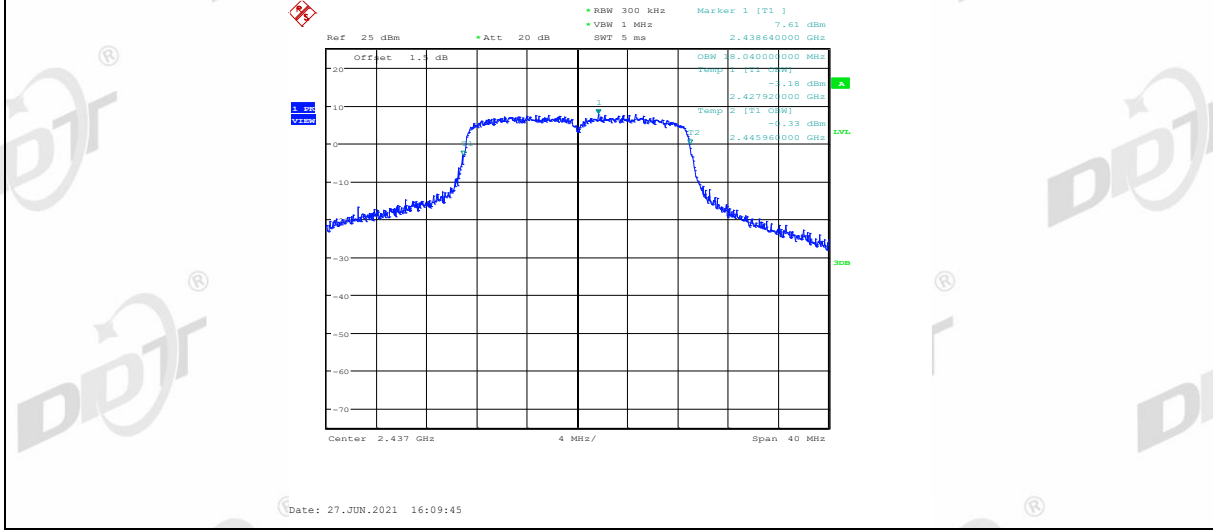


11N20MIMO_Ant2_2437

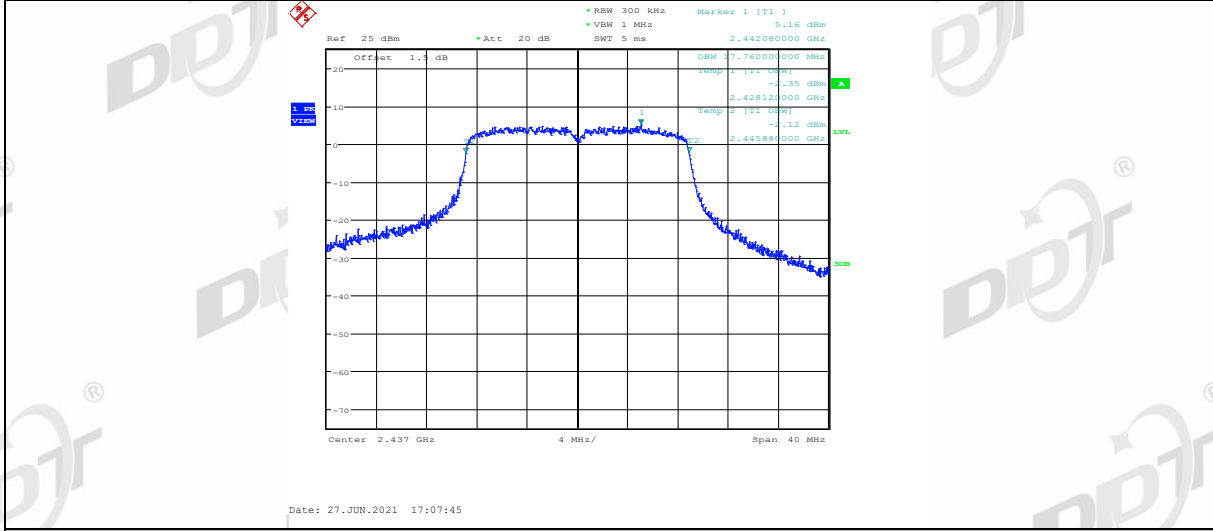


11N20MIMO_Ant1_2462

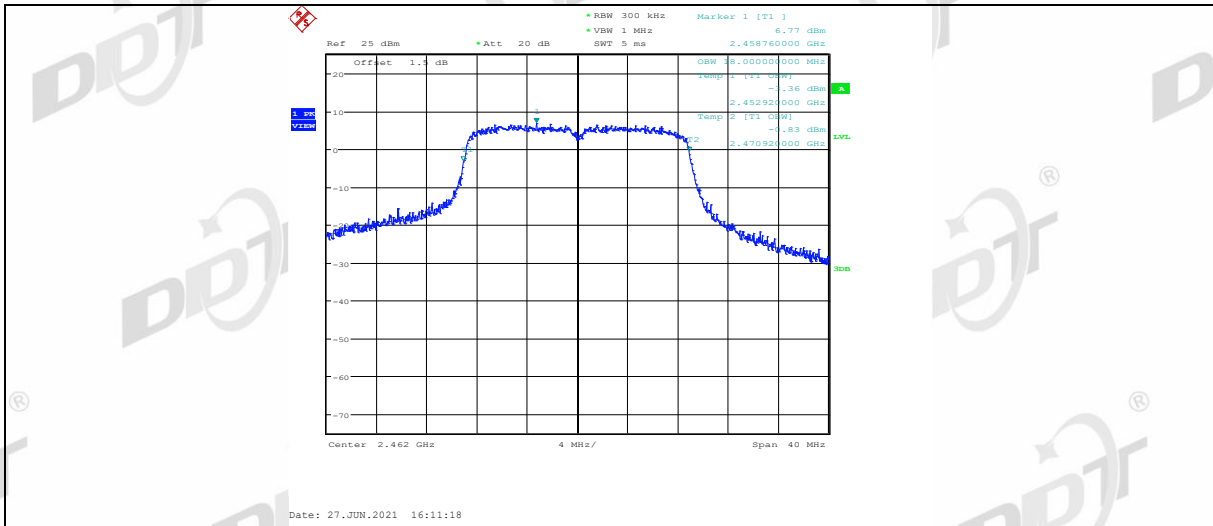


11N20MIMO_Ant2_2462

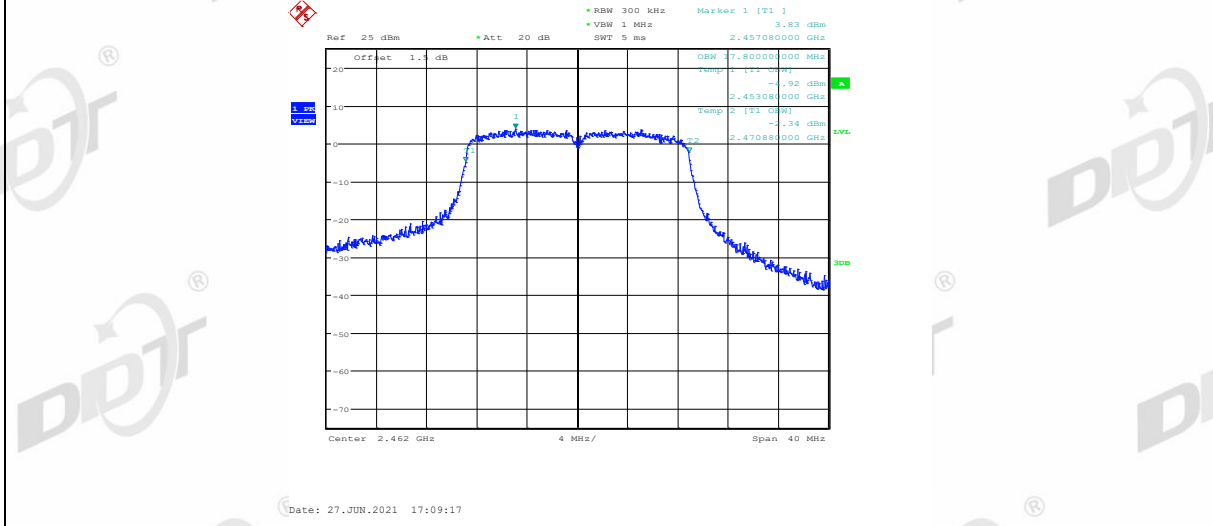


11N40MIMO_Ant1_2422

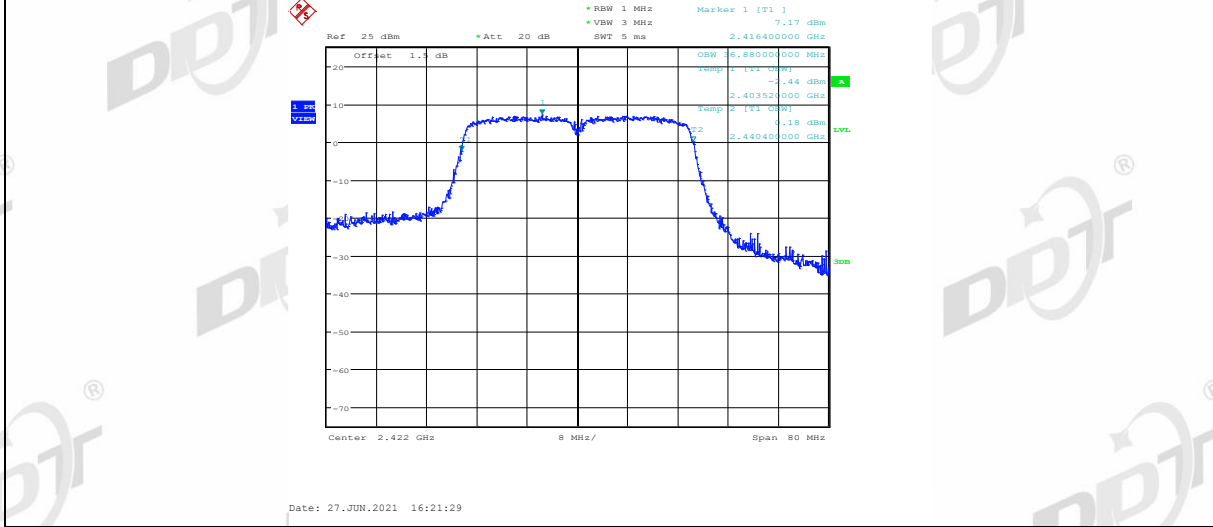


11N40MIMO_Ant2_2422

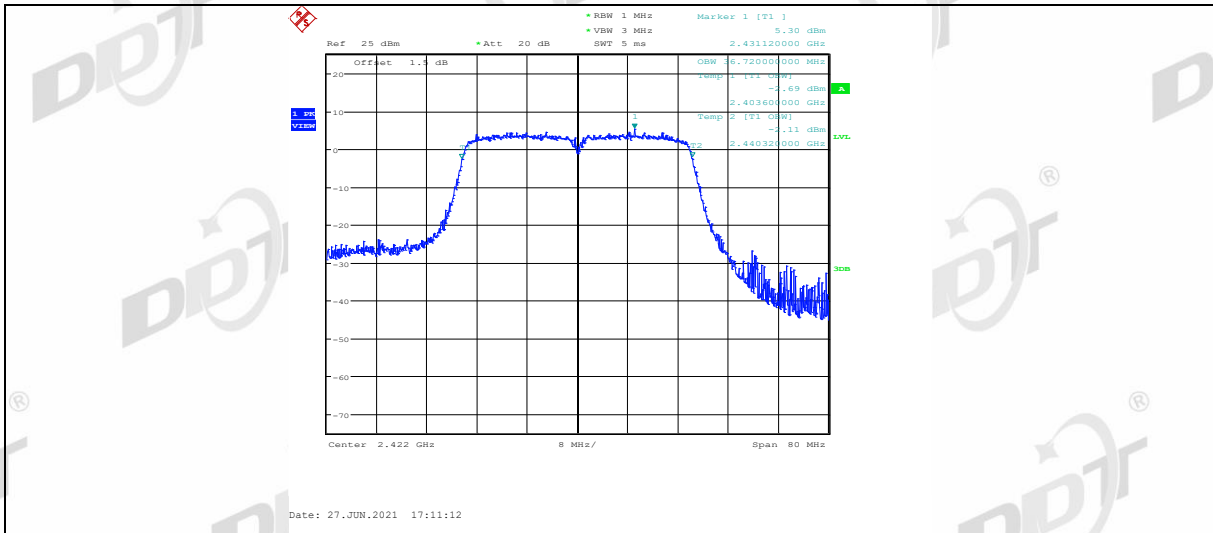


11N40MIMO_Ant1_2437

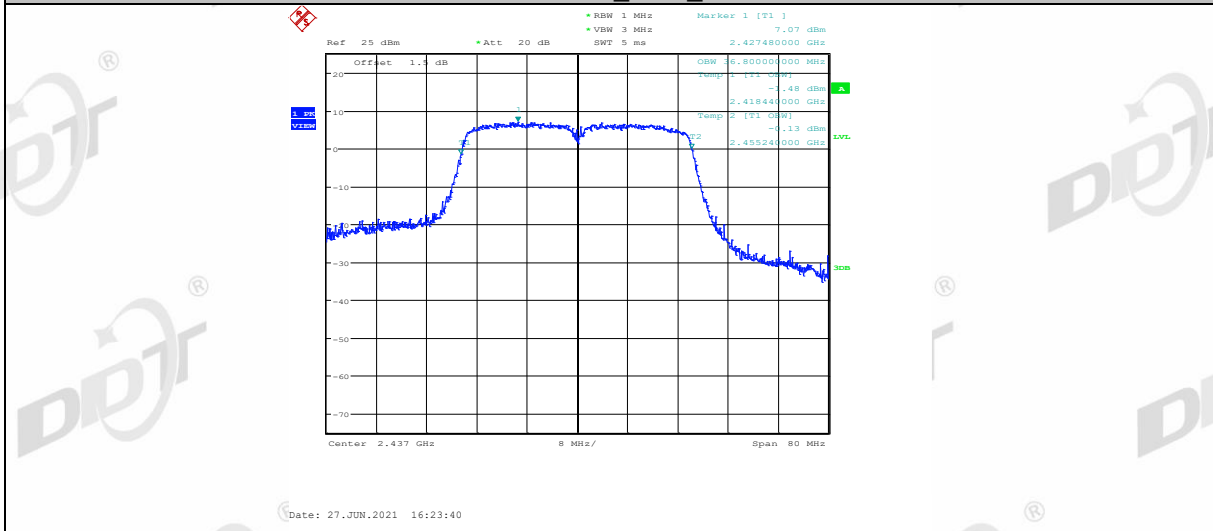


11N40MIMO_Ant2_2437

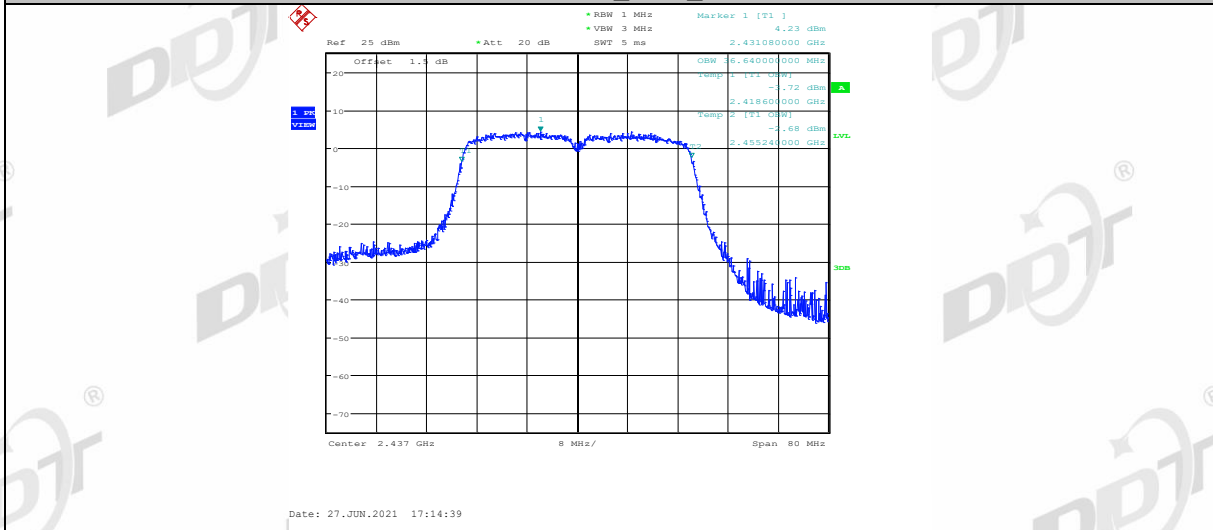

11N40MIMO_Ant1_2452

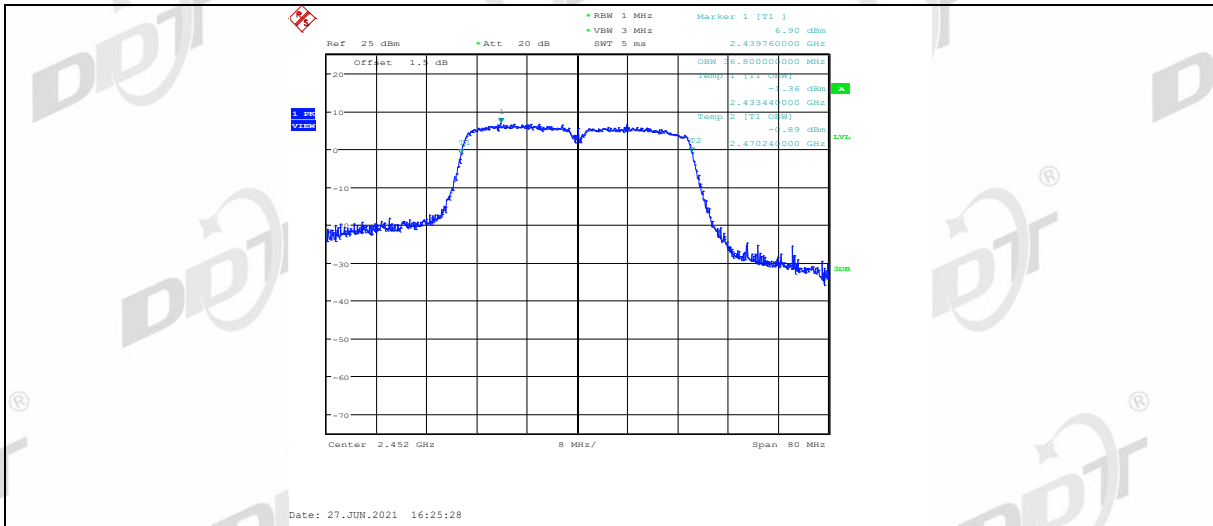

11N40MIMO Ant2_2452

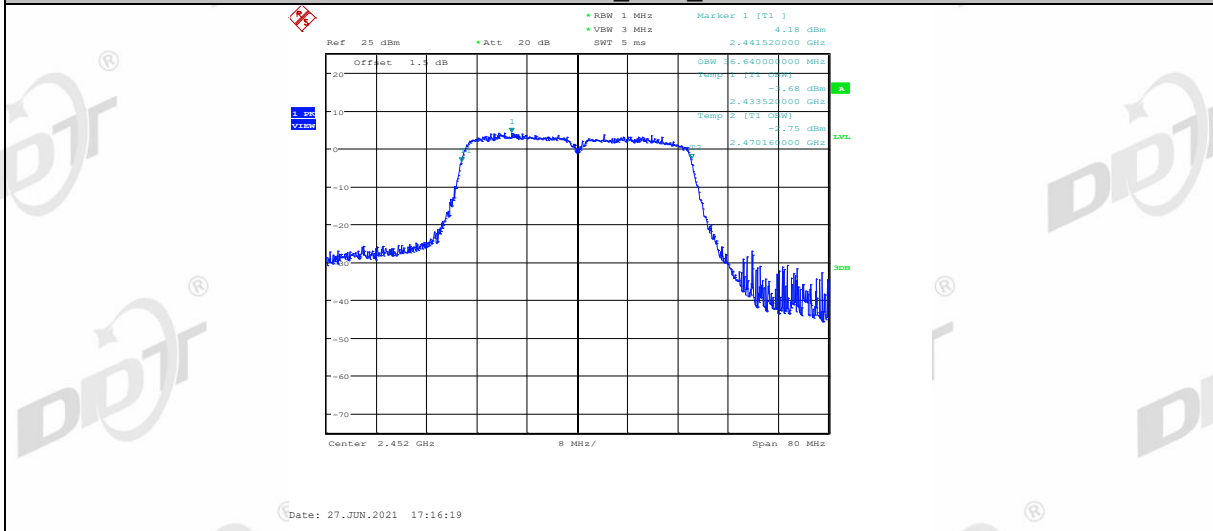

5. Conducted Peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the output power of each antenna port by power sensor.

5.4. Test result

Test Mode	Test Channel	Ant	Power [dBm]	Limit [dBm]	Verdict
11B	2412	ANT1	8.30	28.48	Pass
11B	2412	ANT2	7.15	28.48	Pass
11B	2437	ANT1	8.01	28.48	Pass
11B	2437	ANT2	6.38	28.48	Pass
11B	2462	ANT1	7.14	28.48	Pass
11B	2462	ANT2	5.61	28.48	Pass
11G	2412	ANT1	9.94	28.48	Pass
11G	2412	ANT2	8.74	28.48	Pass
11G	2437	ANT1	9.59	28.48	Pass
11G	2437	ANT2	8.11	28.48	Pass
11G	2462	ANT1	8.83	28.48	Pass
11G	2462	ANT2	7.25	28.48	Pass
11N20MIMO	2412	ANT1	7.05	28.48	Pass
11N20MIMO	2412	ANT2	5.94	28.48	Pass
11N20MIMO	2412	total	9.54	28.48	Pass
11N20MIMO	2437	ANT1	6.56	28.48	Pass
11N20MIMO	2437	ANT2	5.60	28.48	Pass
11N20MIMO	2437	total	9.12	28.48	Pass
11N20MIMO	2462	ANT1	6.01	28.48	Pass
11N20MIMO	2462	ANT2	4.42	28.48	Pass
11N20MIMO	2462	total	8.30	28.48	Pass

11N40MIMO	2422	ANT1	5.17	28.48	Pass
11N40MIMO	2422	ANT2	3.67	28.48	Pass
11N40MIMO	2422	total	7.49	28.48	Pass
11N40MIMO	2437	ANT1	5.20	28.48	Pass
11N40MIMO	2437	ANT2	4.03	28.48	Pass
11N40MIMO	2437	total	7.66	28.48	Pass
11N40MIMO	2452	ANT1	4.34	28.48	Pass
11N40MIMO	2452	ANT2	3.75	28.48	Pass
11N40MIMO	2452	total	7.07	28.48	Pass

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test result

Test Mode	Test Channel	Ant	PSD [dBm]	Limit [dBm/3kHz]	Verdict
11B	2412	ANT1	-14.47	8.00	Pass
11B	2412	ANT2	-16.40	8.00	Pass
11B	2437	ANT1	-15.80	8.00	Pass
11B	2437	ANT2	-16.82	8.00	Pass
11B	2462	ANT1	-15.97	8.00	Pass
11B	2462	ANT2	-17.07	8.00	Pass
11G	2412	ANT1	-16.55	8.00	Pass
11G	2412	ANT2	-17.66	8.00	Pass
11G	2437	ANT1	-17.31	8.00	Pass
11G	2437	ANT2	-18.44	8.00	Pass
11G	2462	ANT1	-16.95	8.00	Pass
11G	2462	ANT2	-19.87	8.00	Pass


11N20MIMO	2412	ANT1	-19.80	8.00	Pass
11N20MIMO	2412	ANT2	-20.78	8.00	Pass
11N20MIMO	2412	total	-17.25	8.00	Pass
11N20MIMO	2437	ANT1	-19.84	8.00	Pass
11N20MIMO	2437	ANT2	-21.42	8.00	Pass
11N20MIMO	2437	total	-17.55	8.00	Pass
11N20MIMO	2462	ANT1	-19.83	8.00	Pass
11N20MIMO	2462	ANT2	-22.74	8.00	Pass
11N20MIMO	2462	total	-18.04	8.00	Pass
11N40MIMO	2422	ANT1	-25.12	8.00	Pass
11N40MIMO	2422	ANT2	-24.79	8.00	Pass
11N40MIMO	2422	total	-21.94	8.00	Pass
11N40MIMO	2437	ANT1	-26.03	8.00	Pass
11N40MIMO	2437	ANT2	-27.39	8.00	Pass
11N40MIMO	2437	total	-23.65	8.00	Pass
11N40MIMO	2452	ANT1	-25.98	8.00	Pass
11N40MIMO	2452	ANT2	-26.40	8.00	Pass
11N40MIMO	2452	total	-23.17	8.00	Pass

6.5. Original Test Data

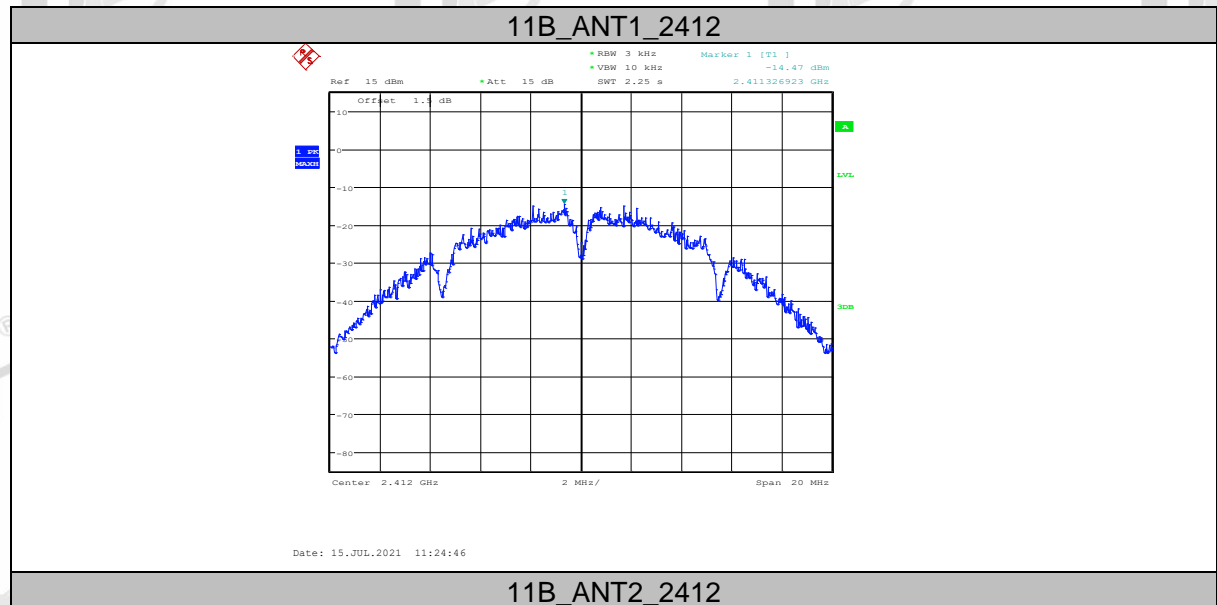


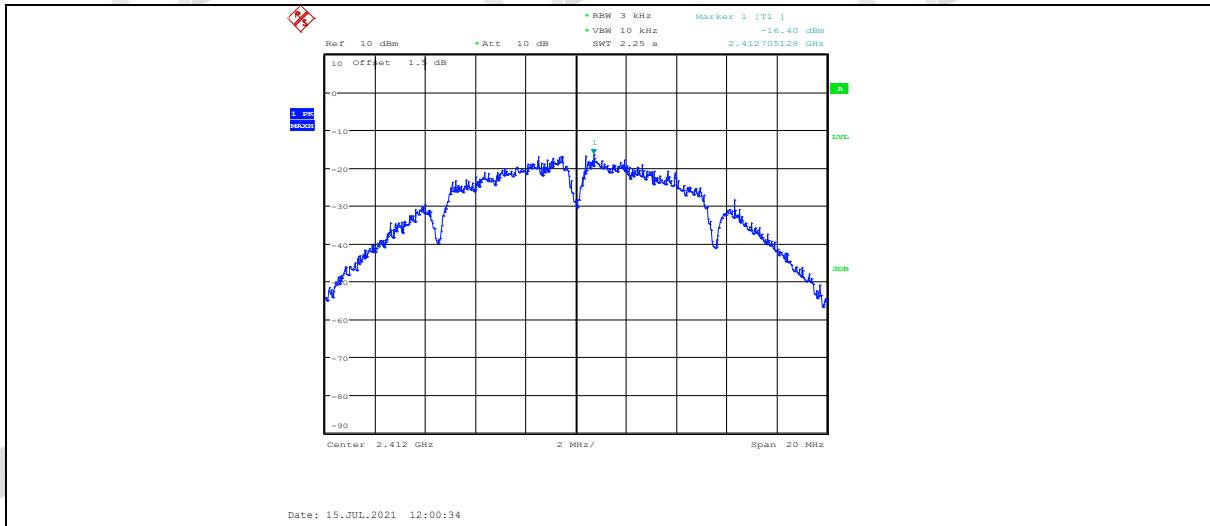


11B_ANT1_2437

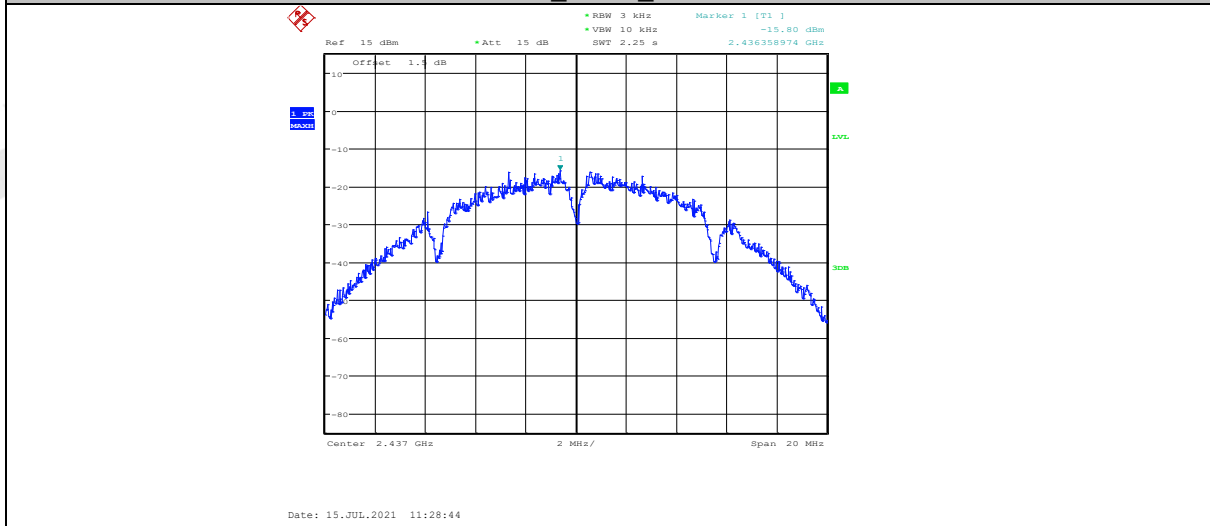


11B_ANT2_2437

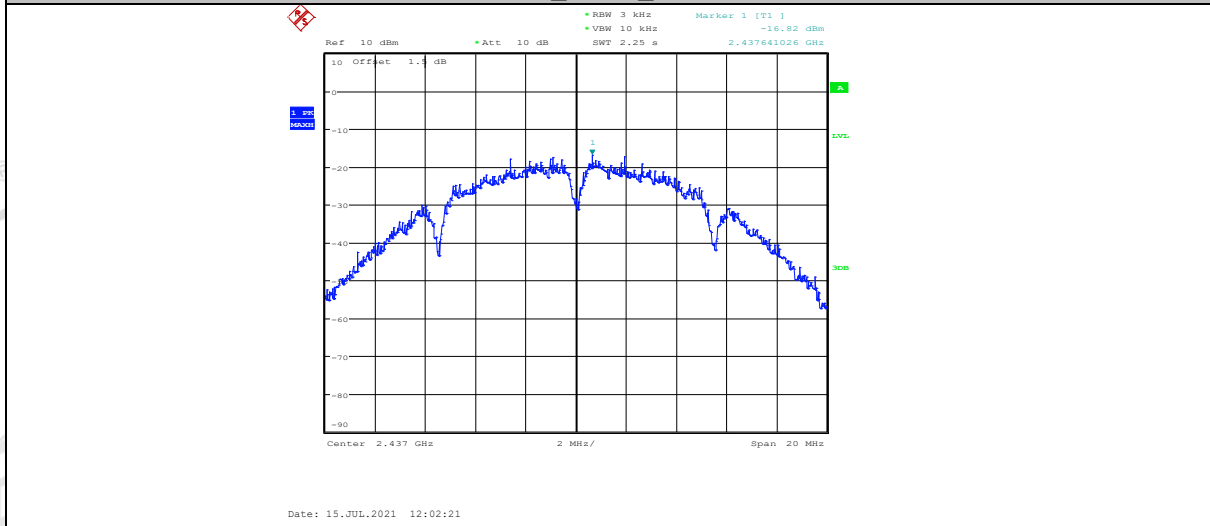


11B_ANT1_2462

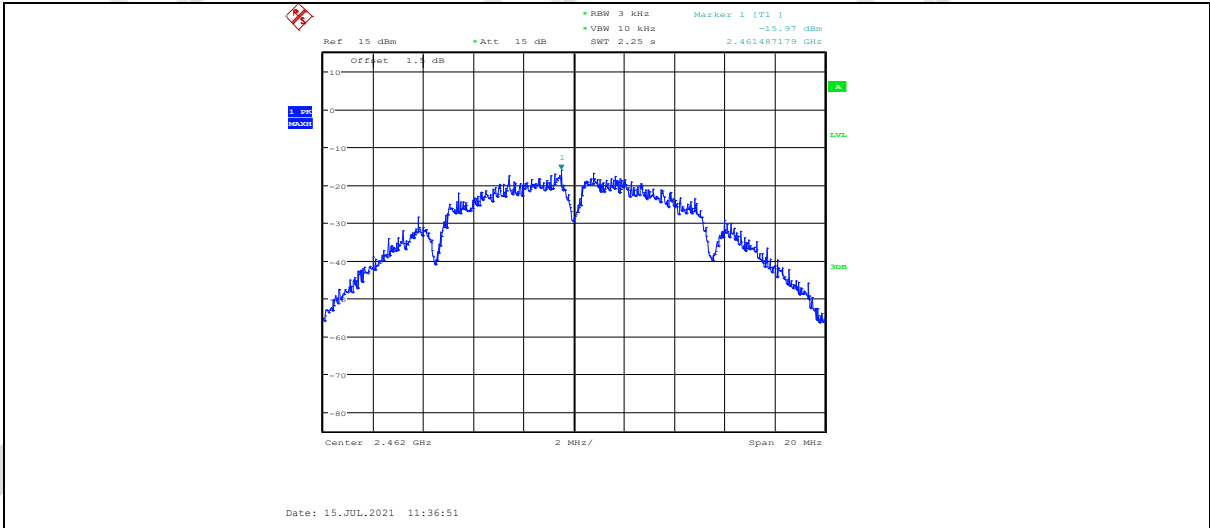


11B_ANT2_2462

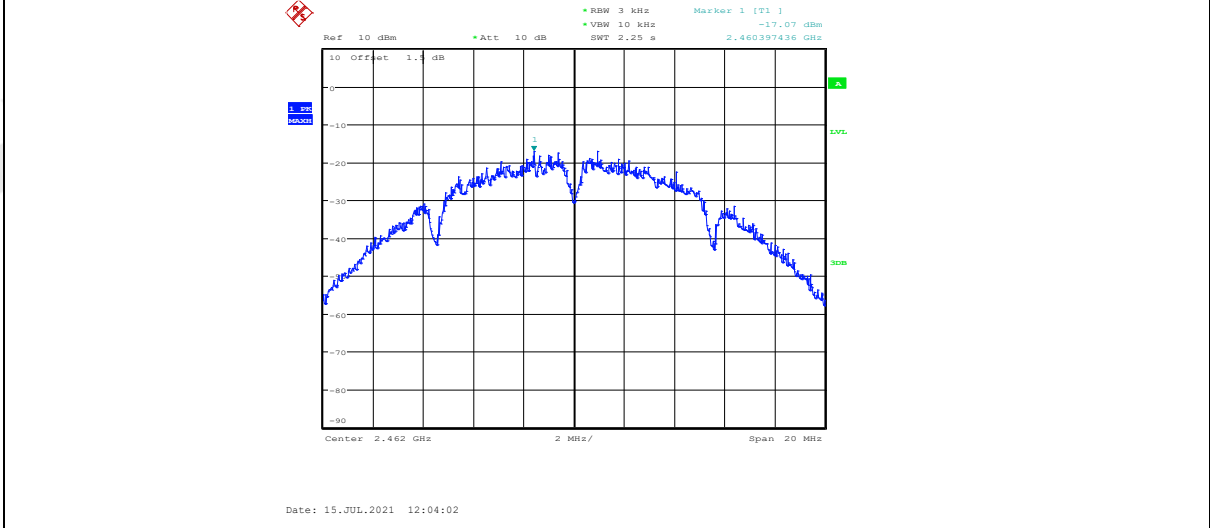


11G_ANT1_2412

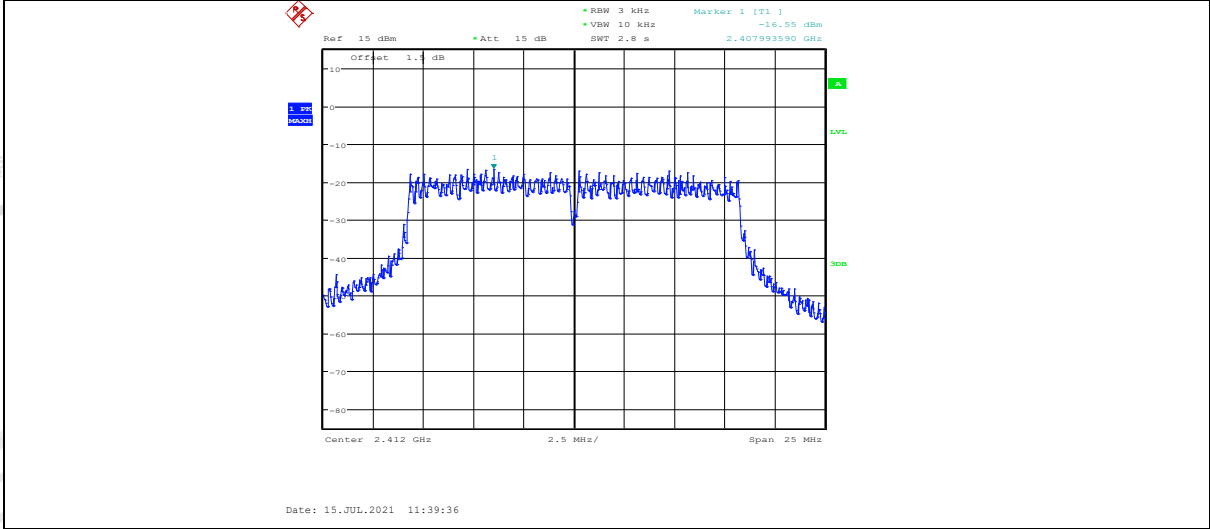


11G_ANT2_2412

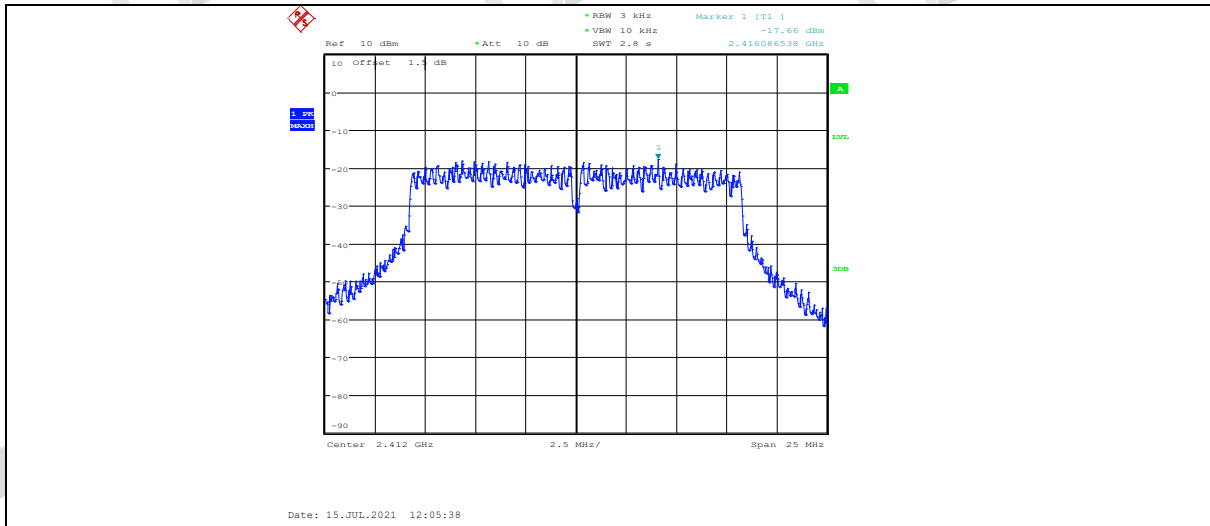


11G_ANT1_2437

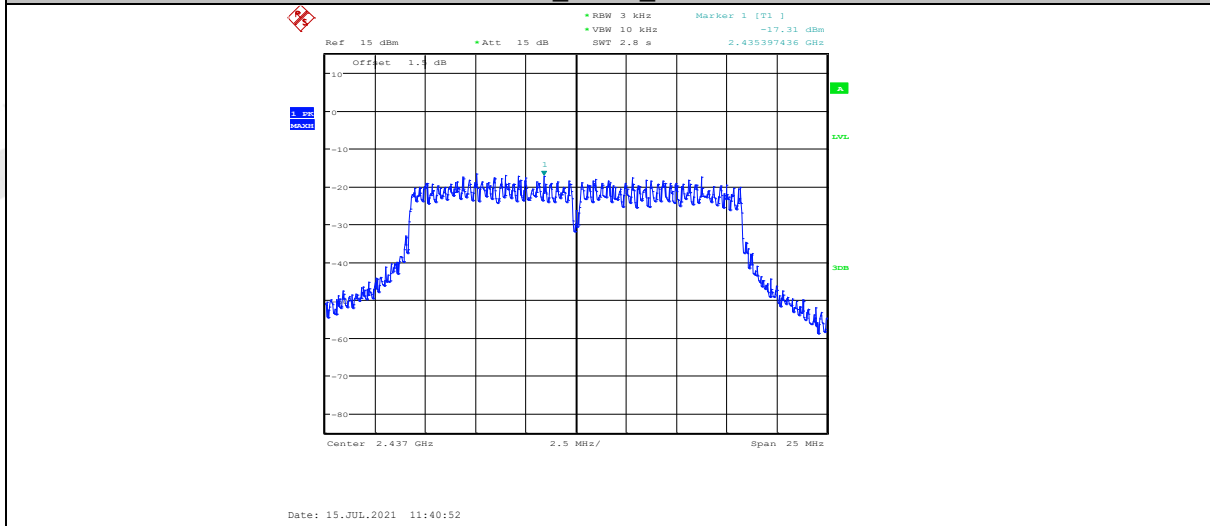


11G_ANT2_2437

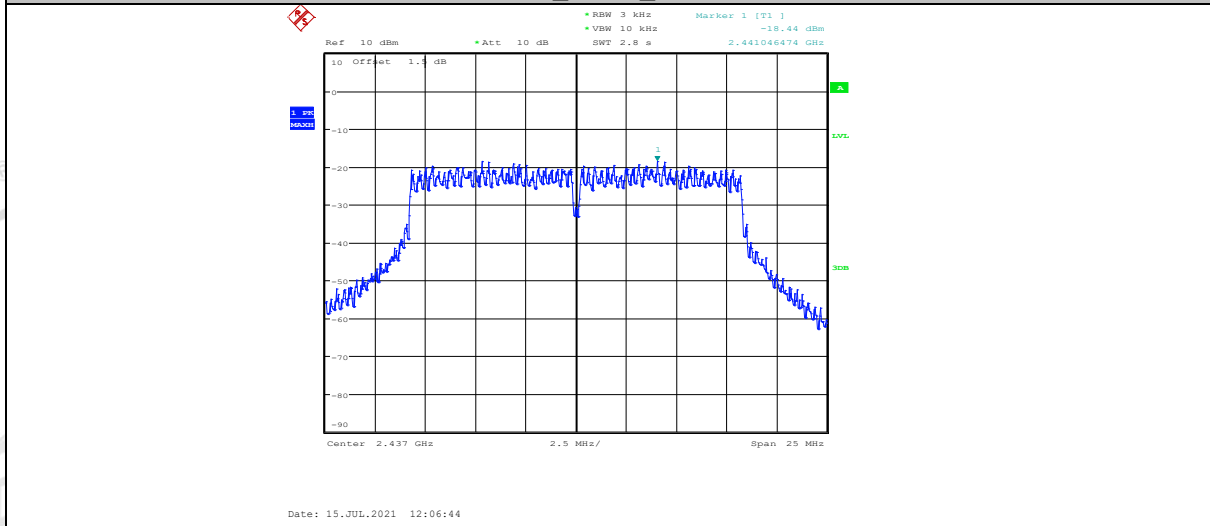


11G_ANT1_2462

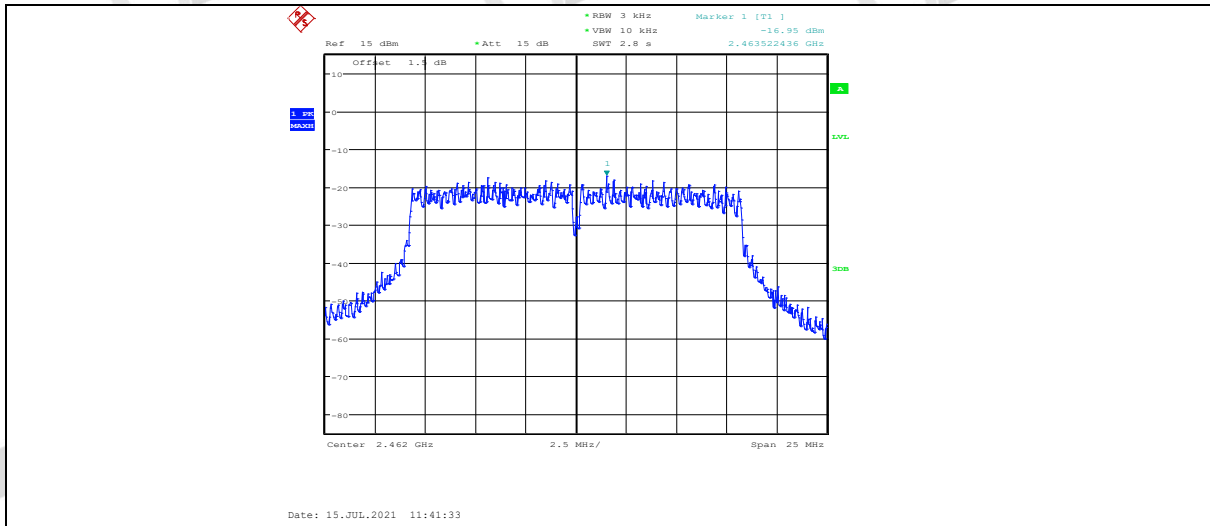


11G_ANT2_2462

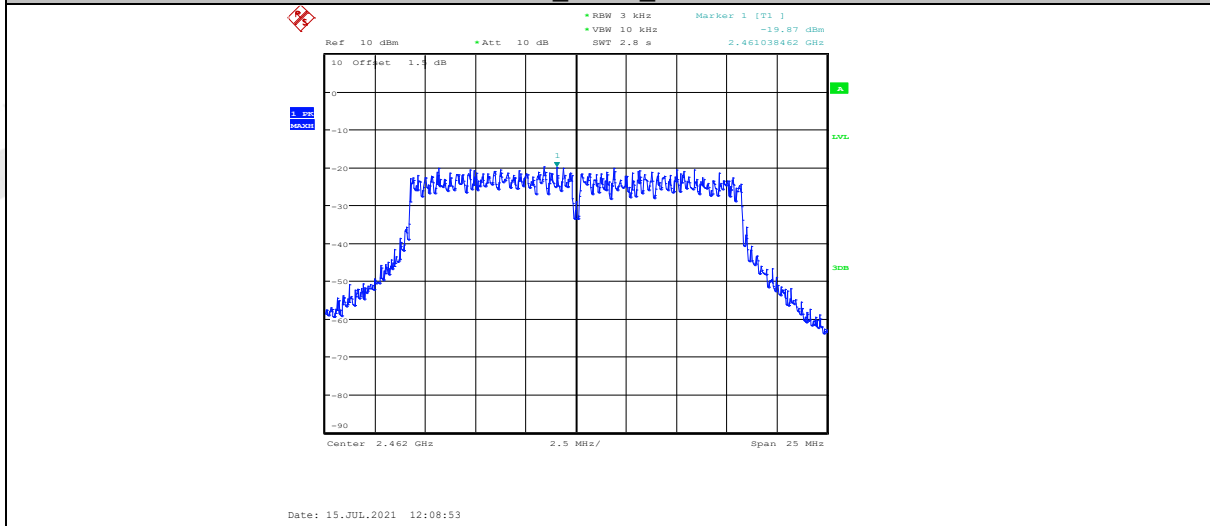


11N20MIMO_ANT1_2412

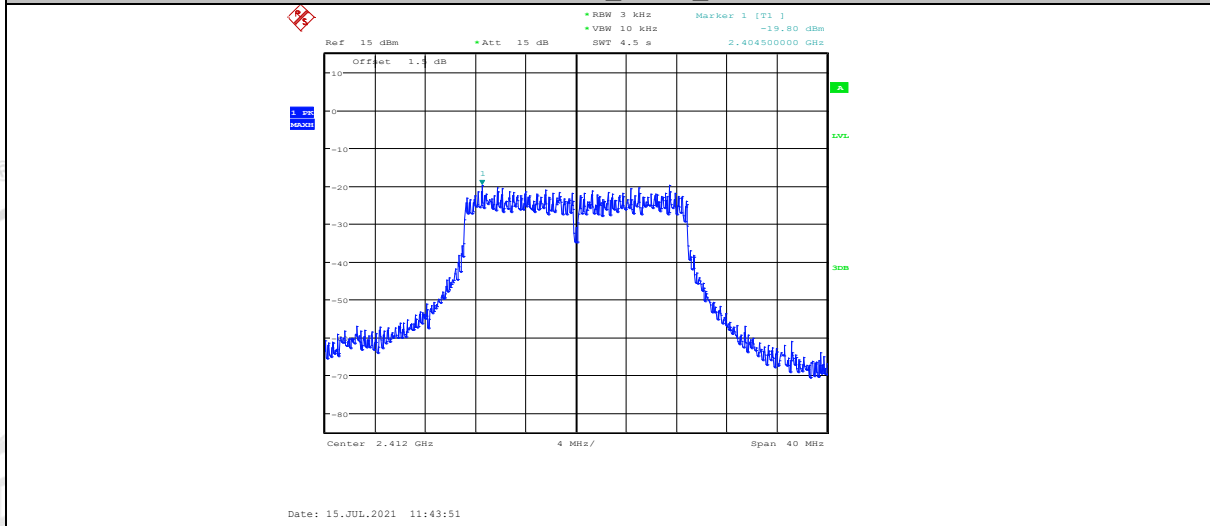


11N20MIMO_ANT2_2412

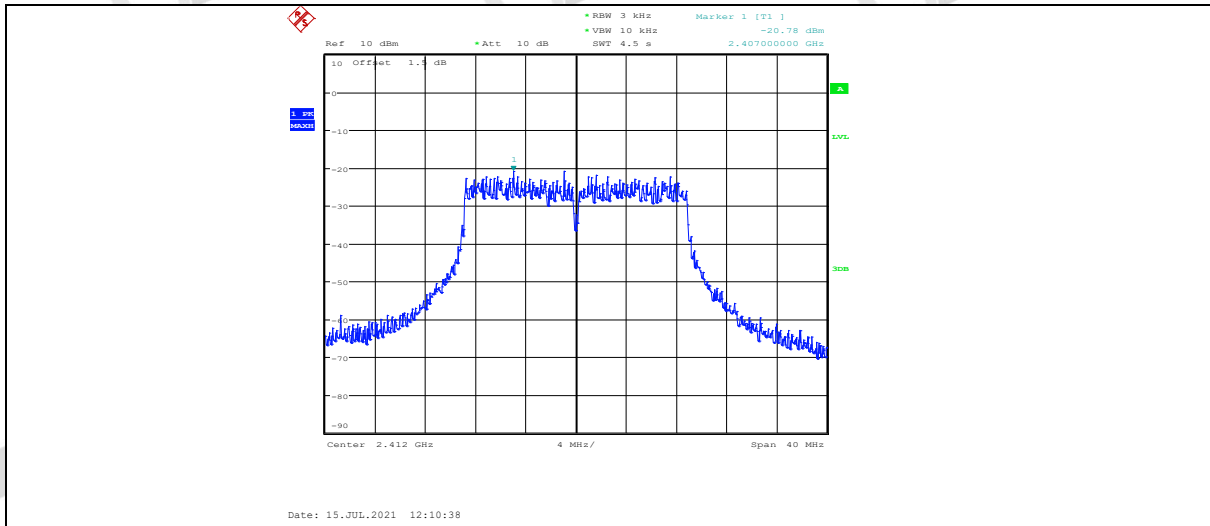


11N20MIMO_ANT1_2437

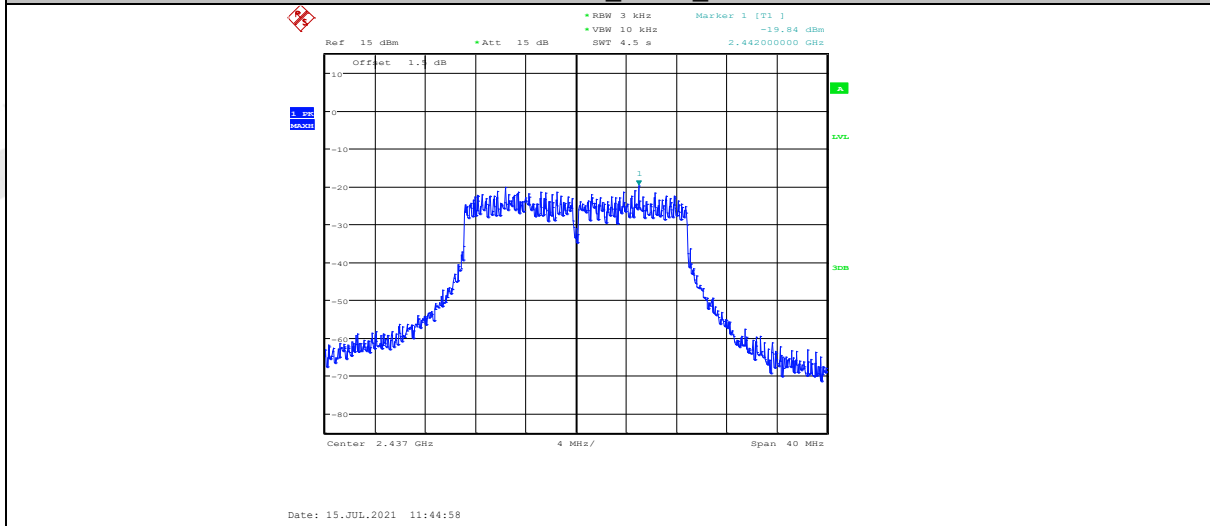


11N20MIMO_ANT2_2437

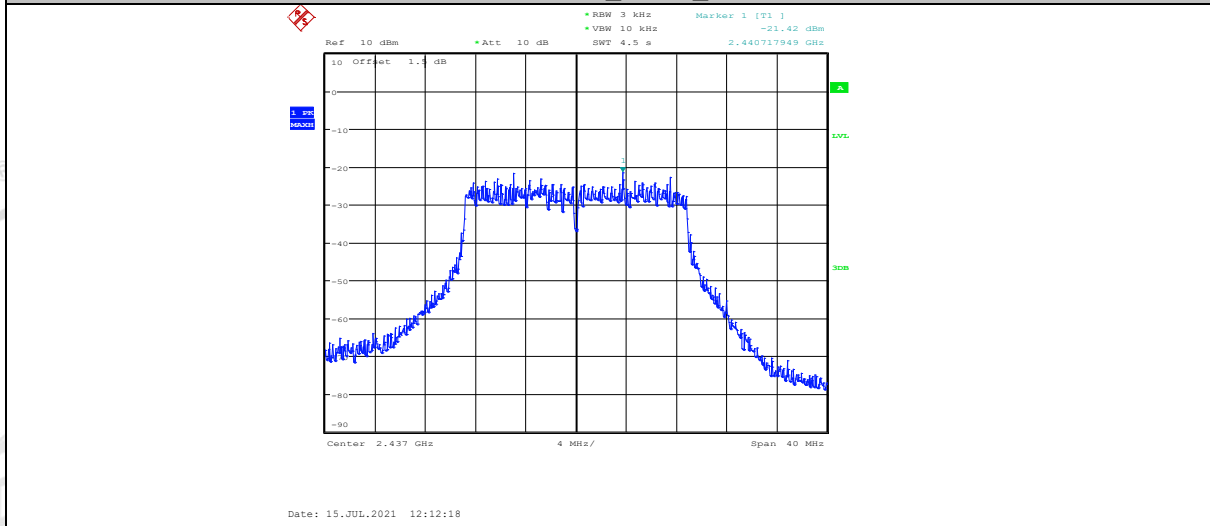


11N20MIMO_ANT1_2462

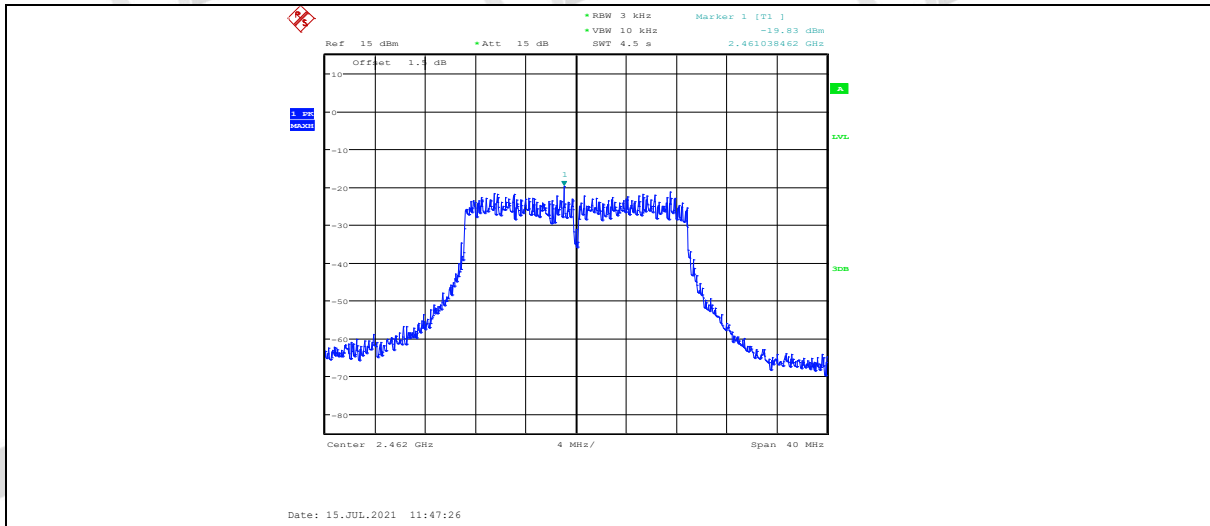


11N20MIMO_ANT2_2462

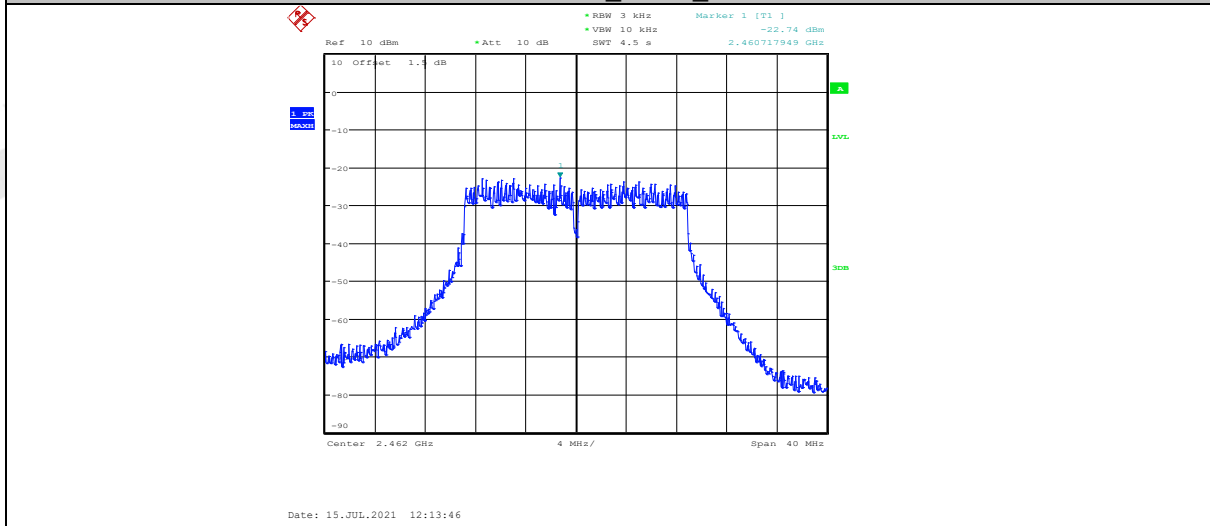


11N40MIMO_ANT1_2422

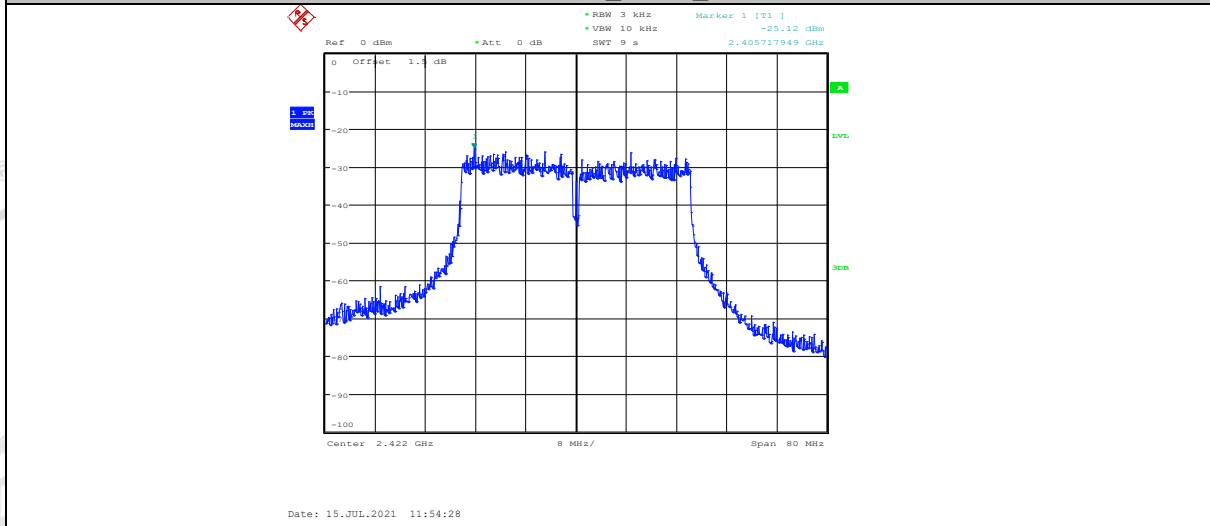


11N40MIMO_ANT2_2422

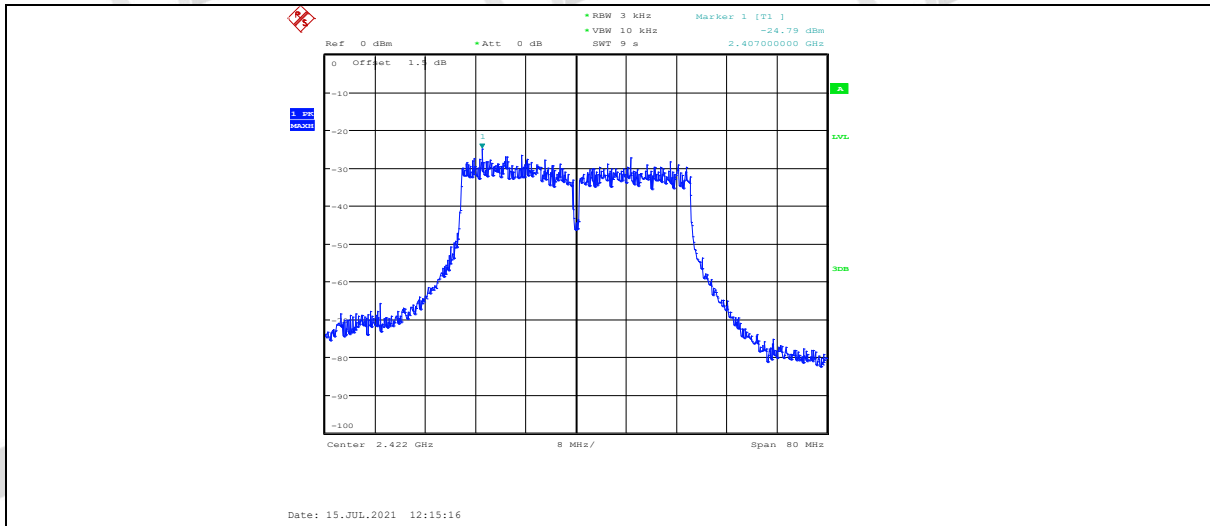


11N40MIMO_ANT1_2437

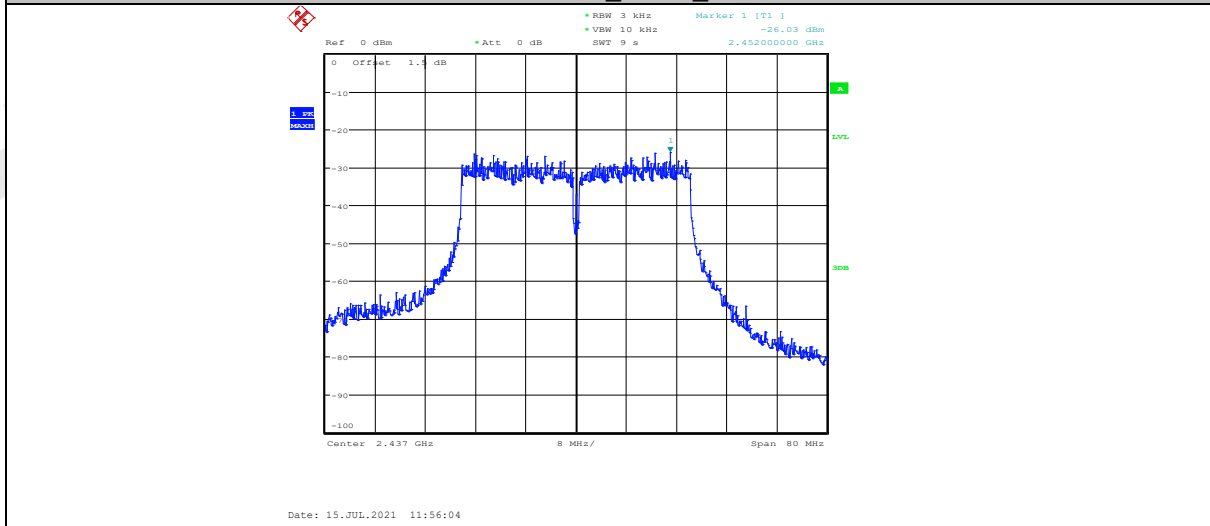


11N40MIMO_ANT2_2437

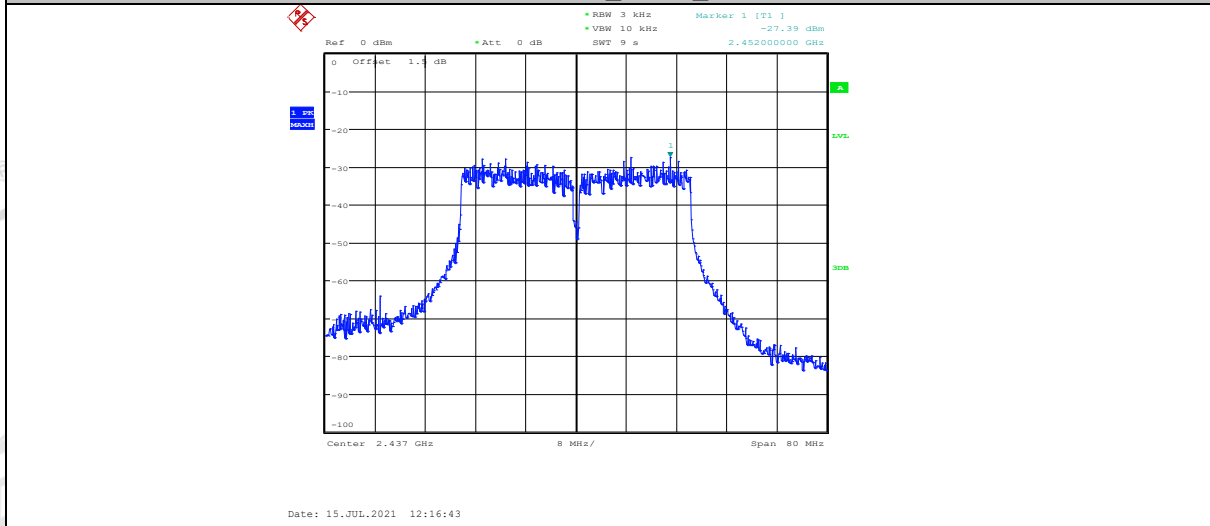

11N40MIMO_ANT1_2452

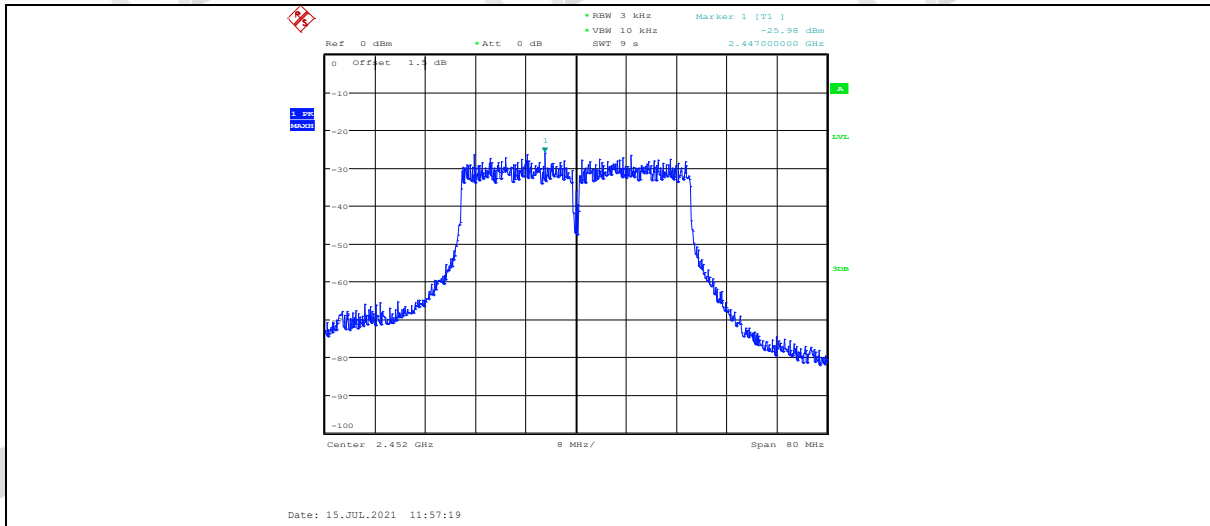

11N40MIMO ANT2_2452

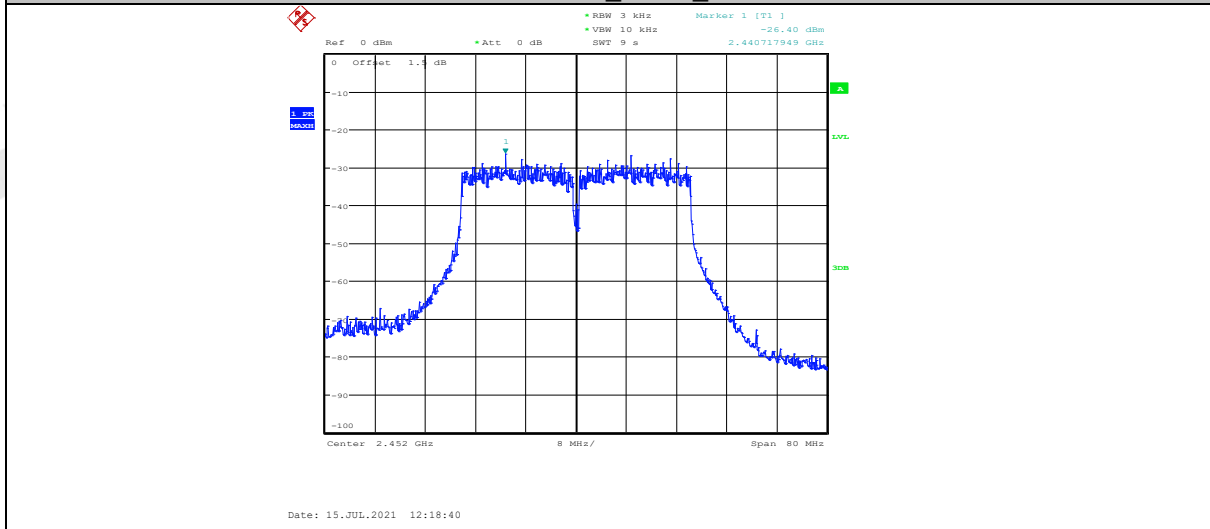

7. Band Edge and Spurious Emissions (Conducted)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


7.4. Test Result

EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass


EUT Set Mode	CH or Frequency	Ant2 Result (dBm)	EUT Set Mode	CH or Frequency	Ant2 Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

7.5. Original test data


Band Edge

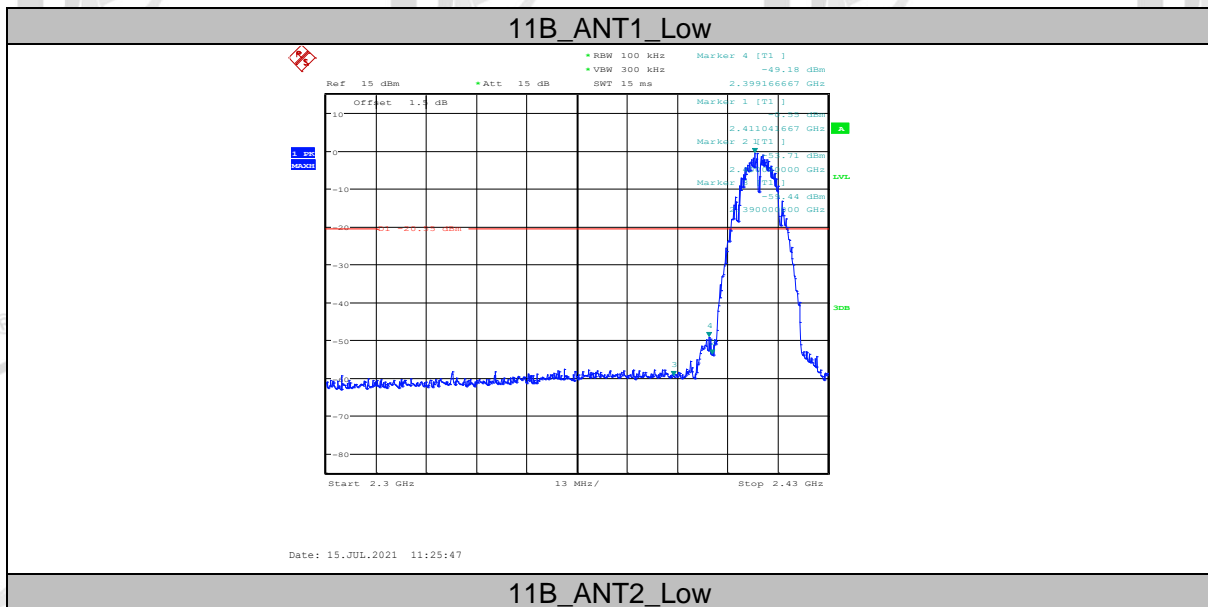


11B_ANT2_Low

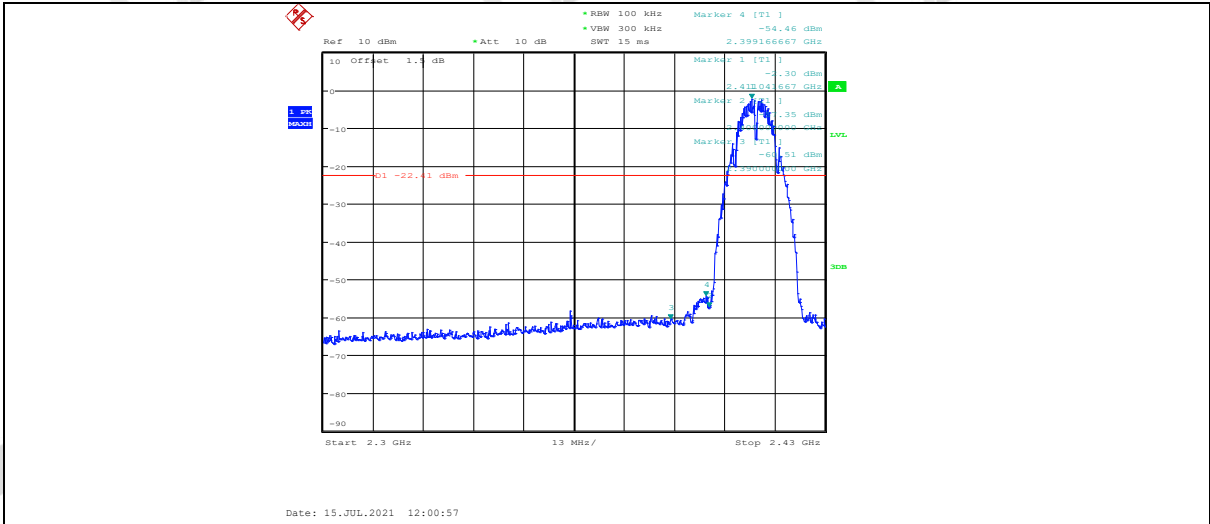


11B_ANT1_High

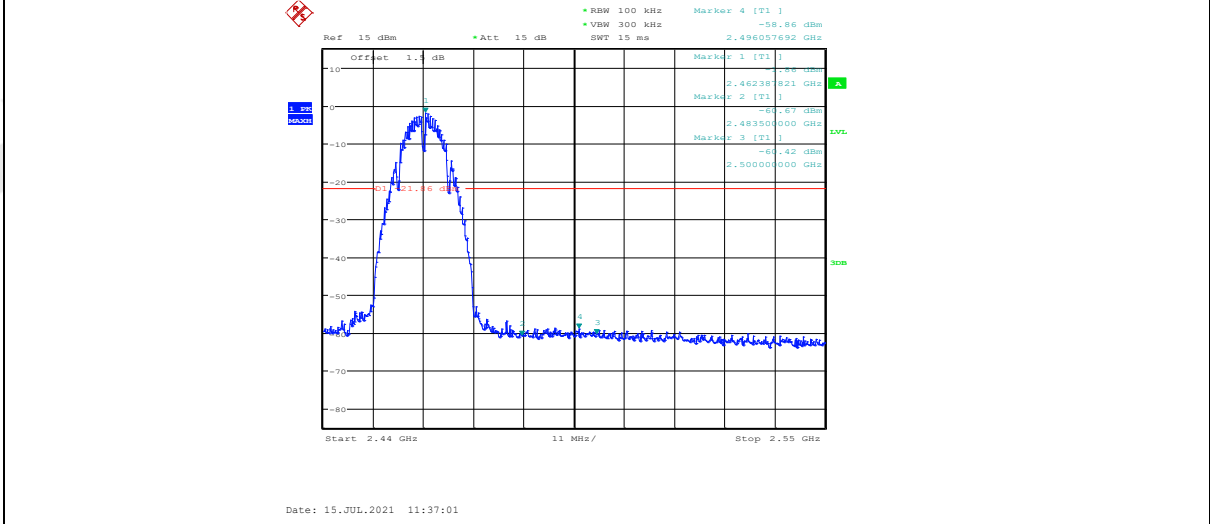


11B_ANT2_High

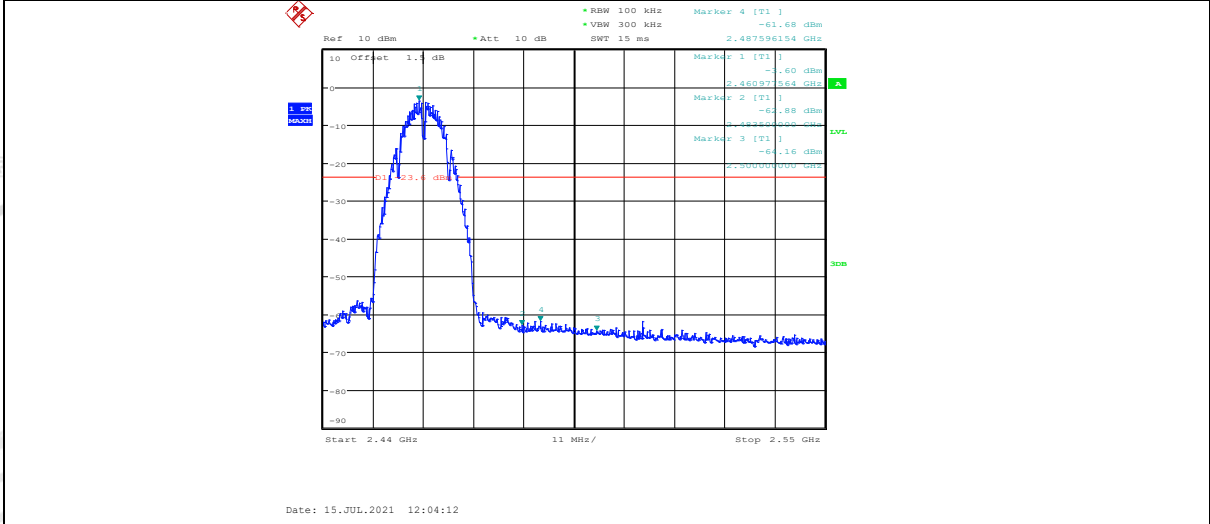


11G_ANT1_Low

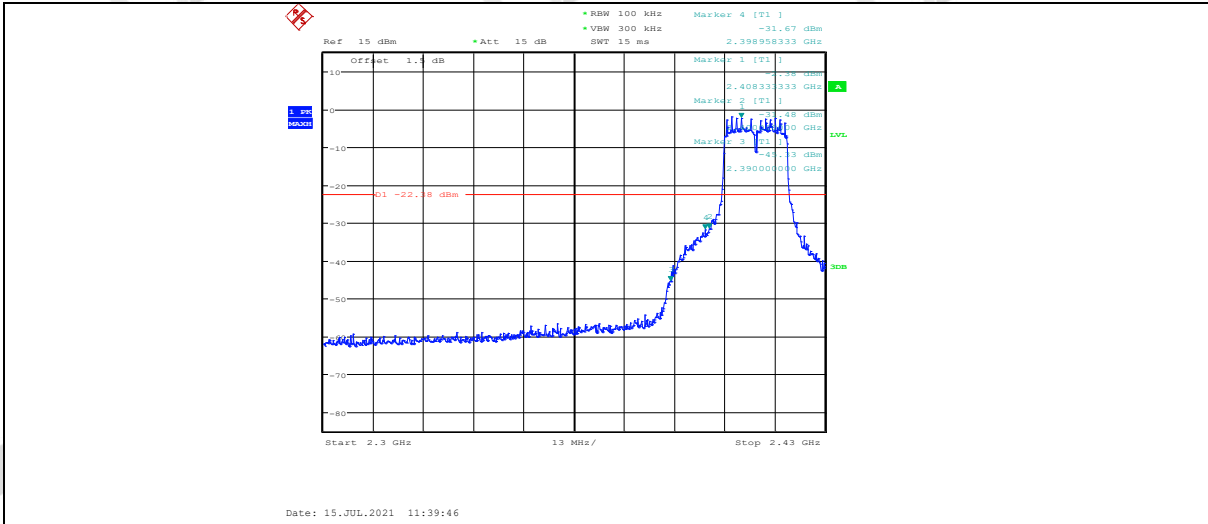


11G_ANT2_Low

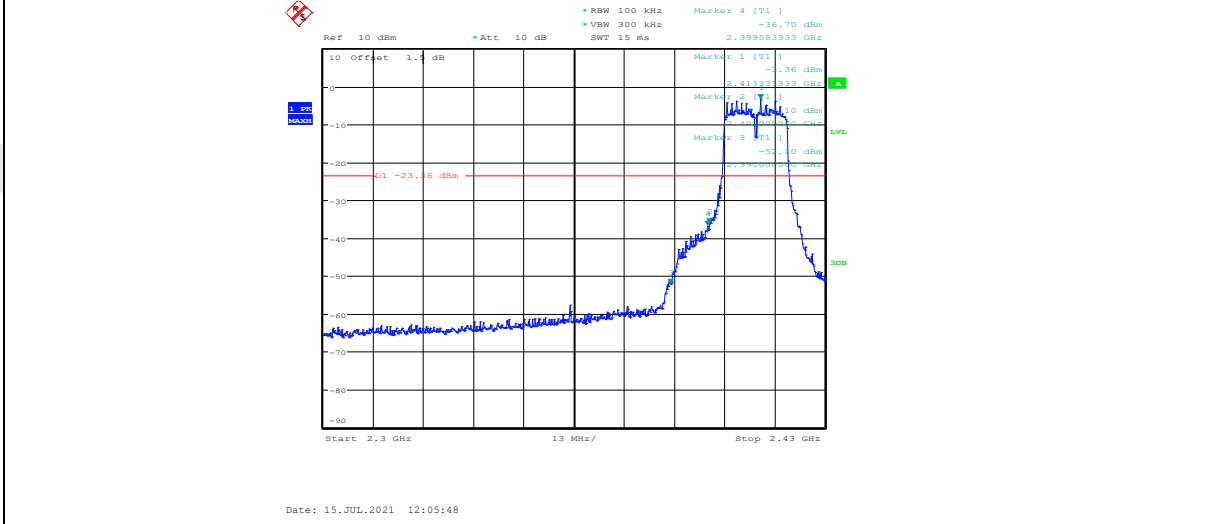


11G_ANT1_High

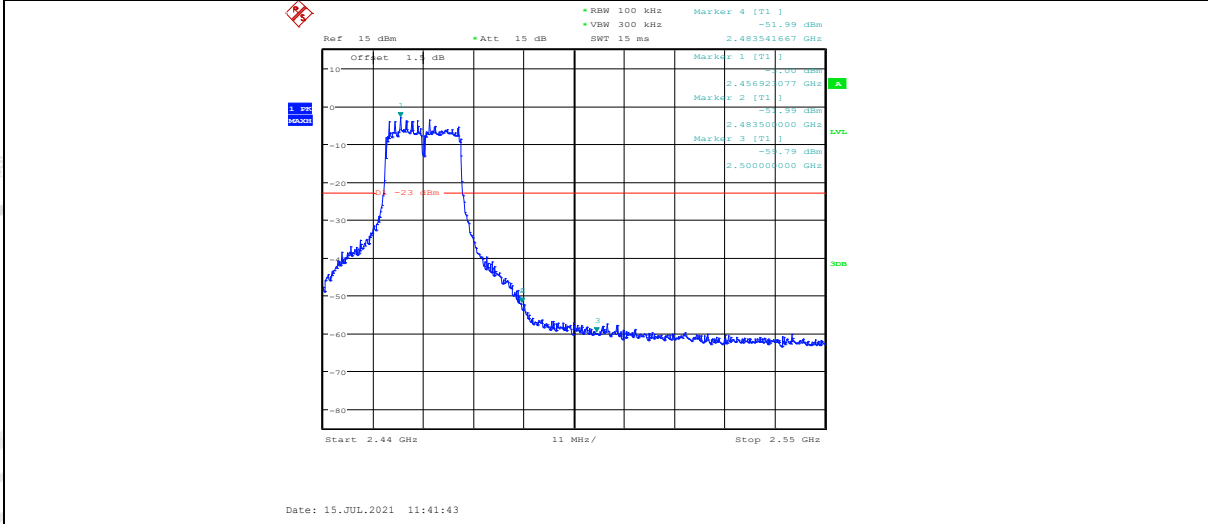


11G_ANT2_High

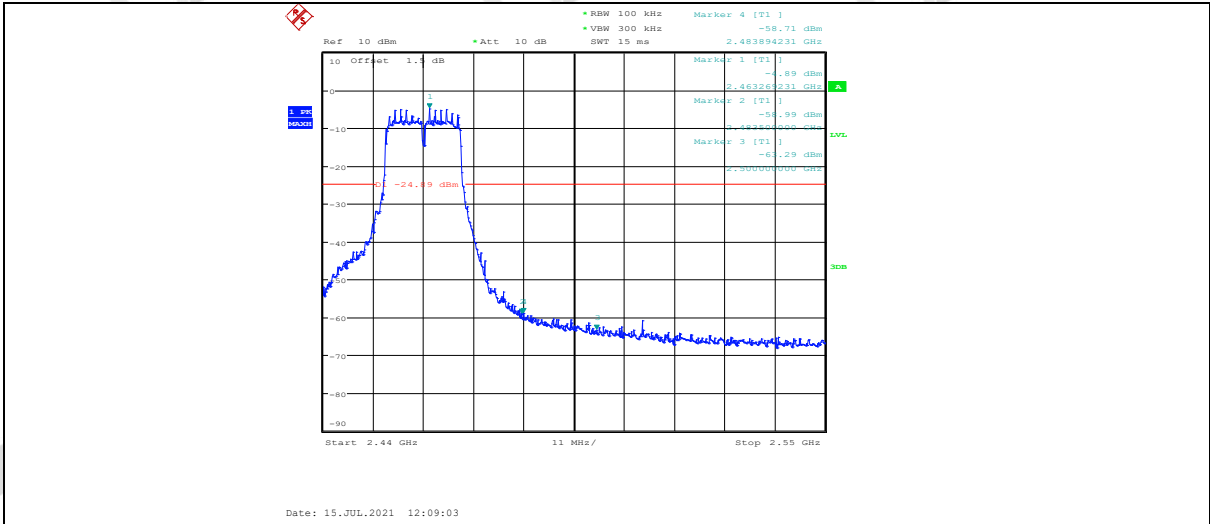


11N20MIMO_ANT1_Low

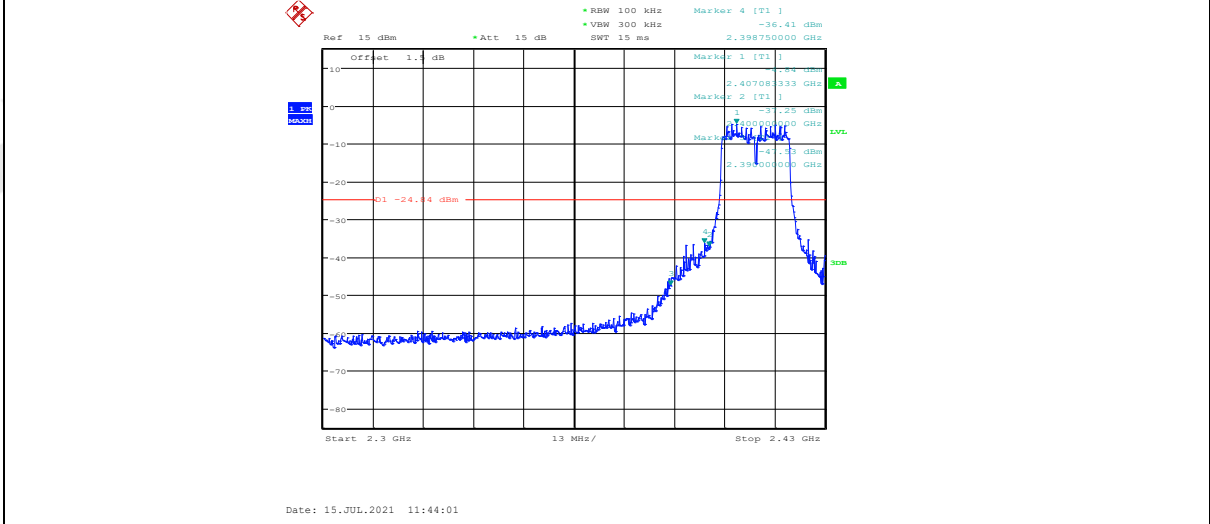


11N20MIMO_ANT2_Low

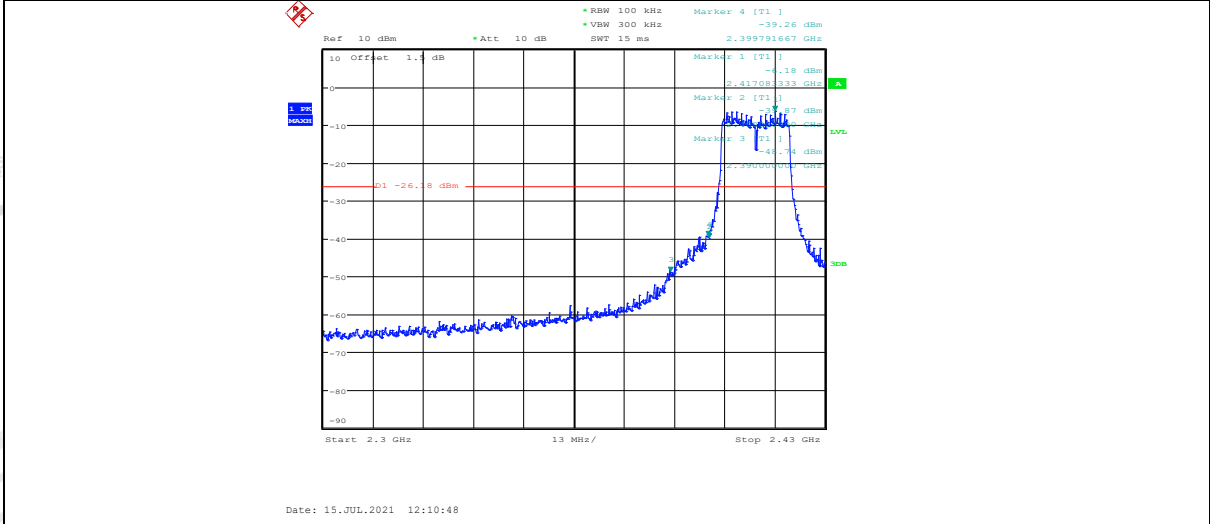


11N20MIMO_ANT1_High

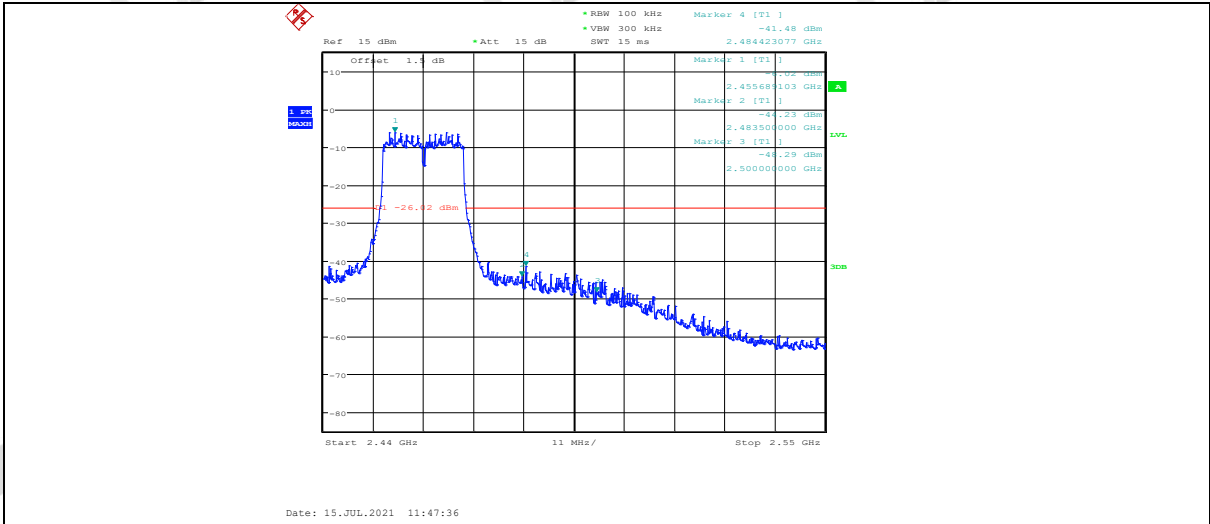


11N20MIMO_ANT2_High

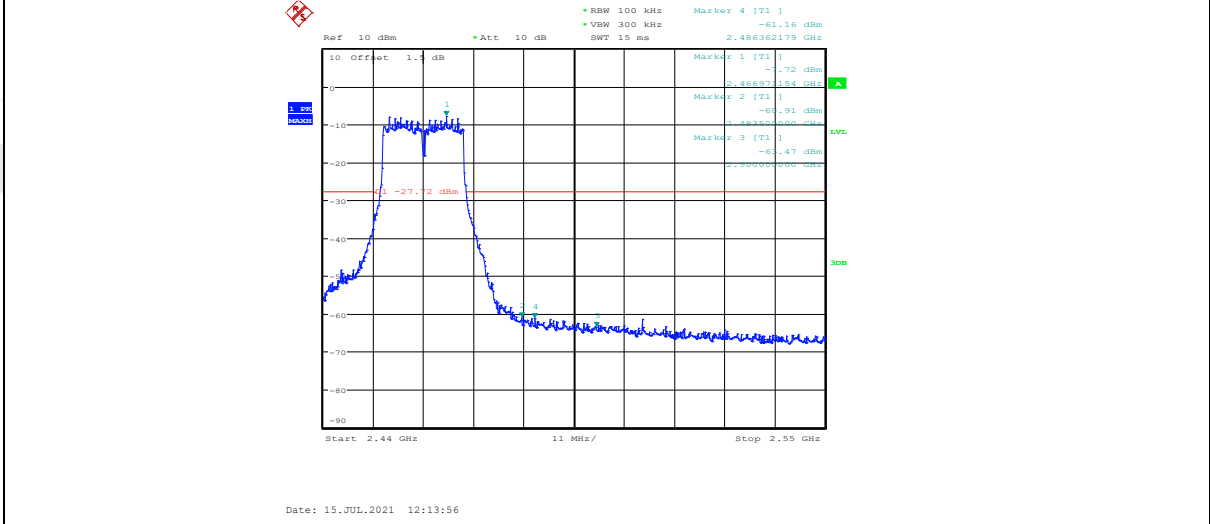


11N40MIMO_ANT1_Low

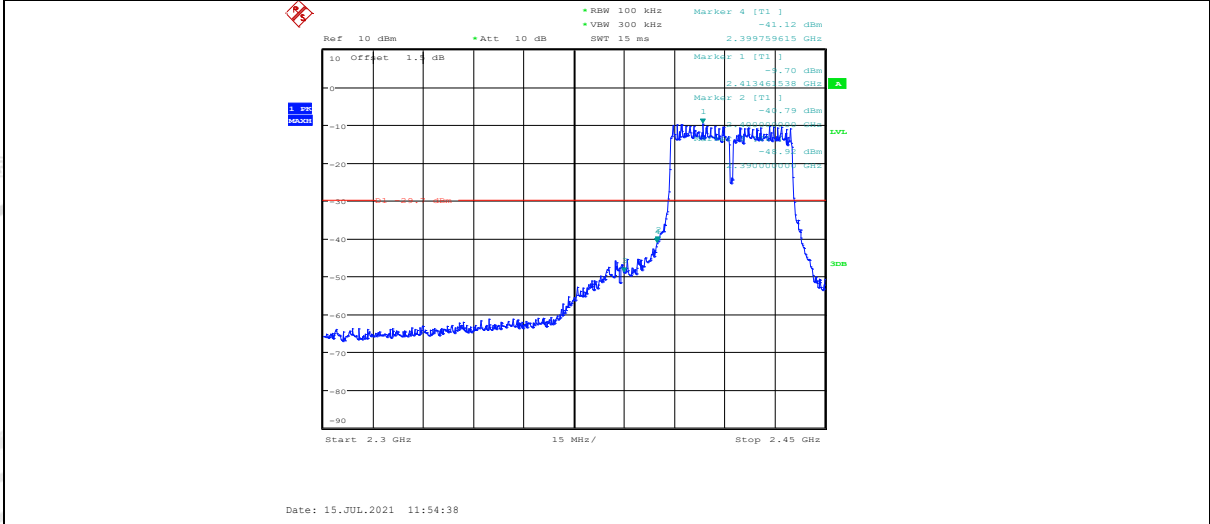


11N40MIMO_ANT2_Low

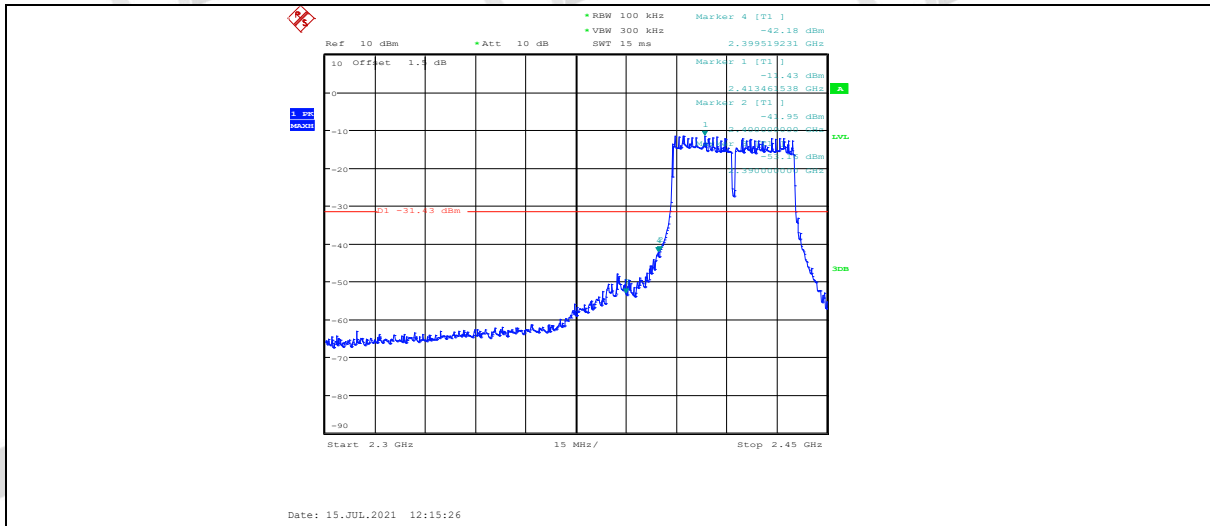





11N40MIMO_ANT1_High

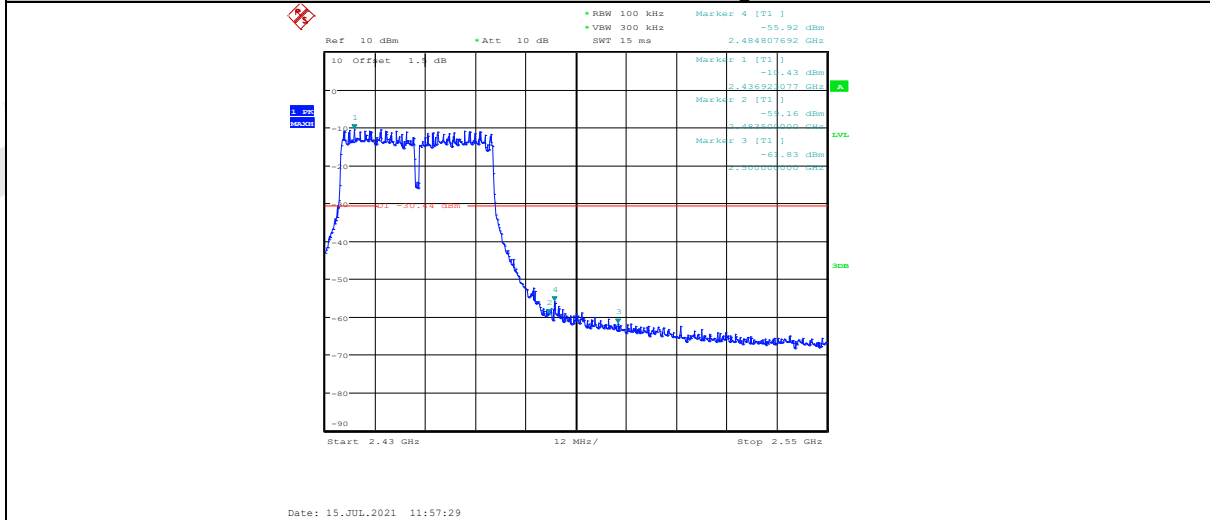


11N40MIMO_ANT2_High

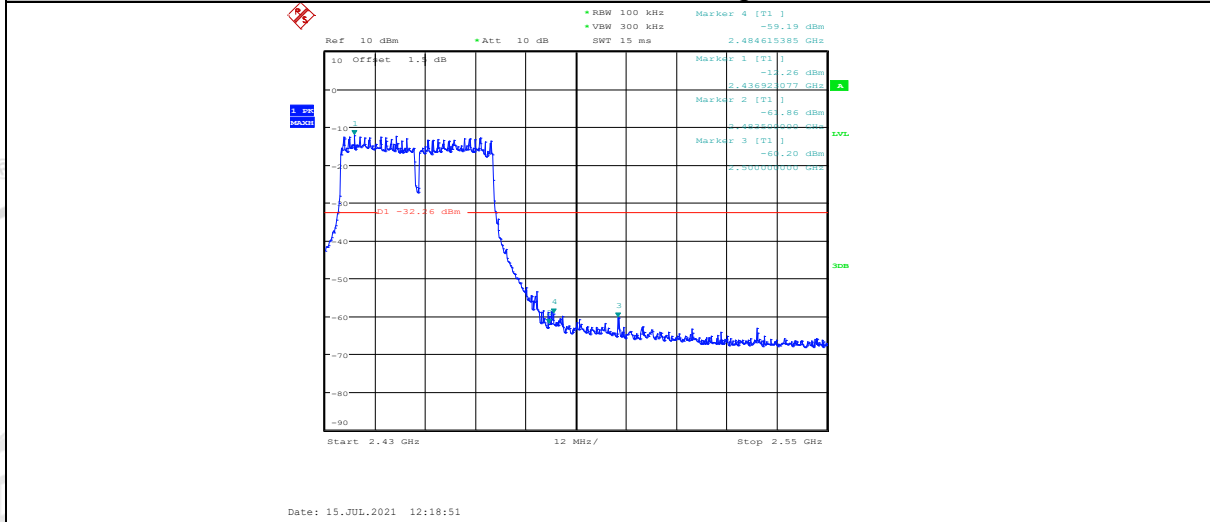


Spurious Emissions

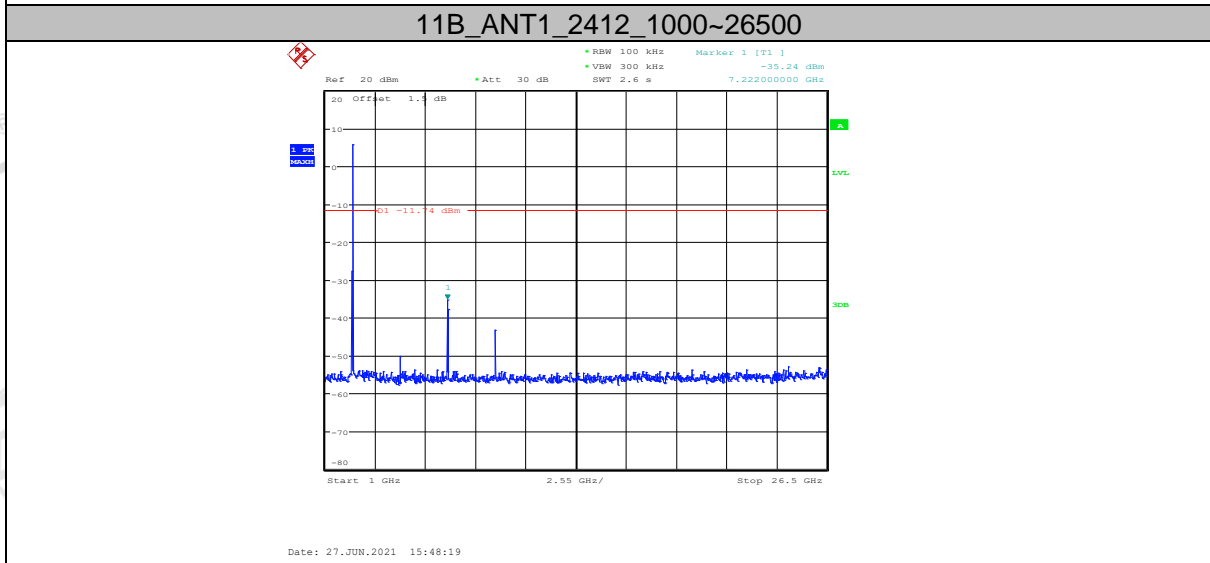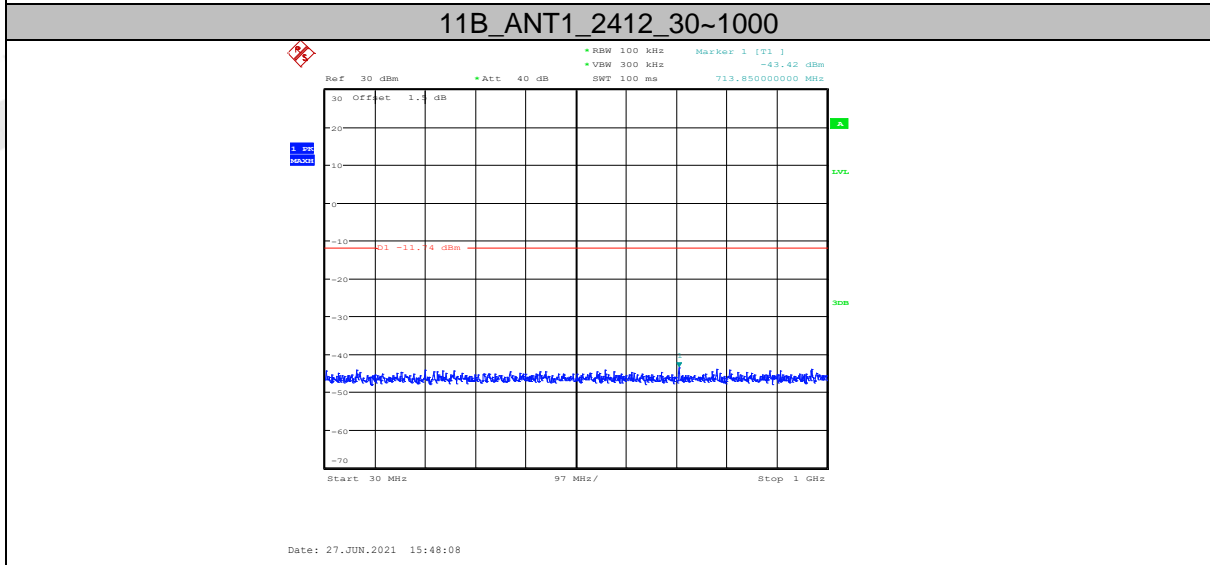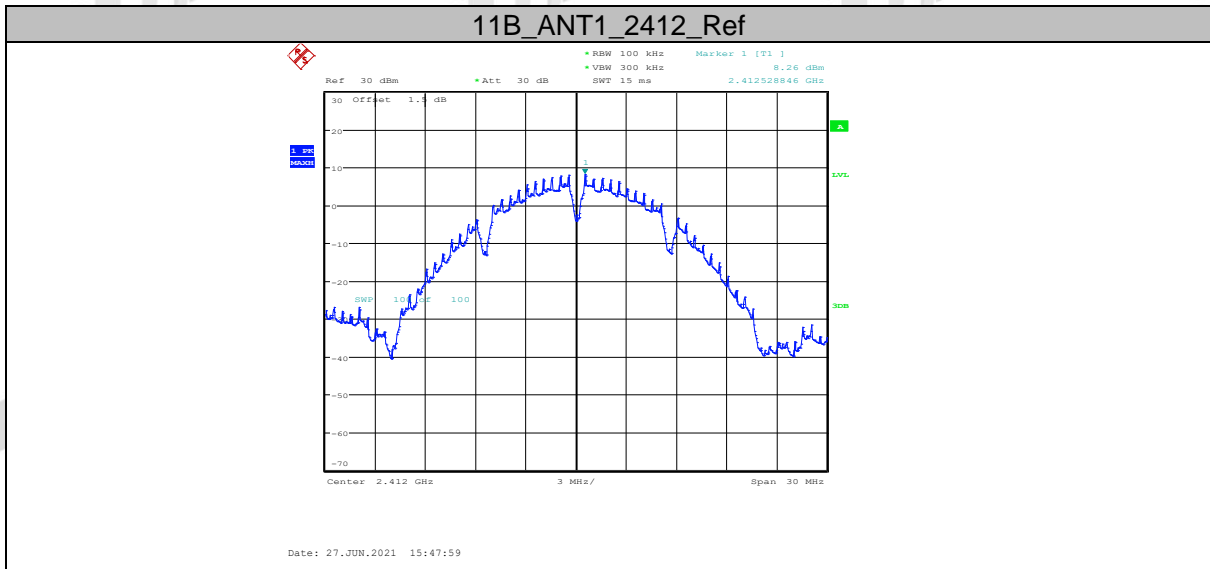


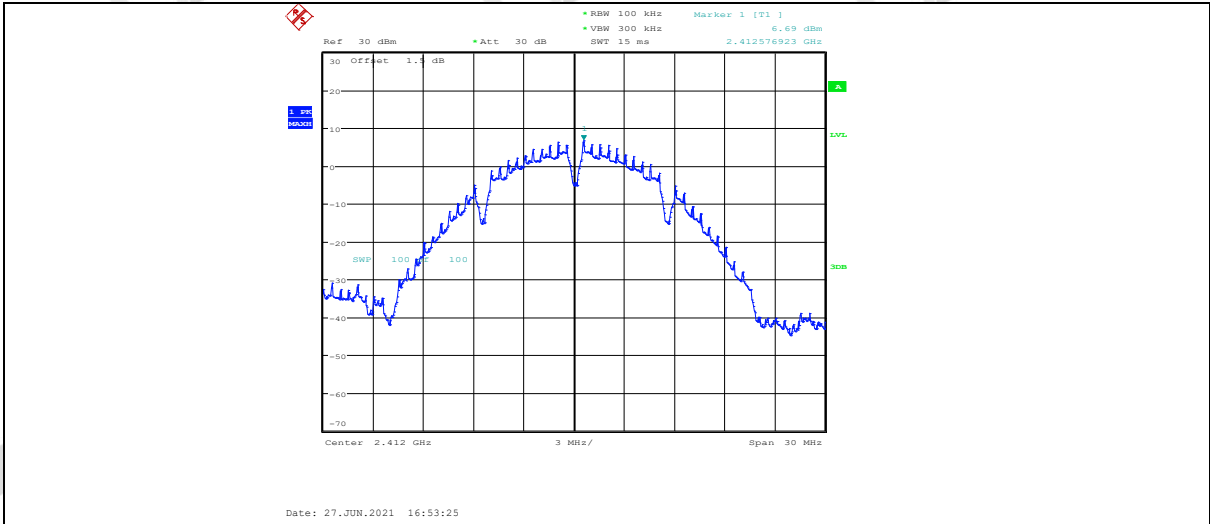


11B_ANT2_2412_30~1000

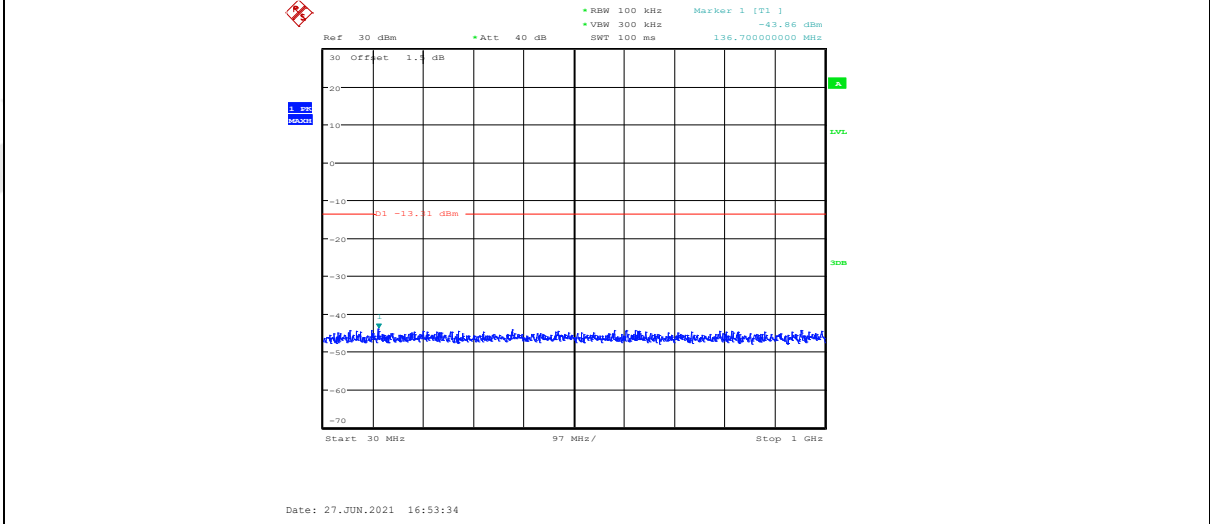


11B_ANT2_2412_1000~26500

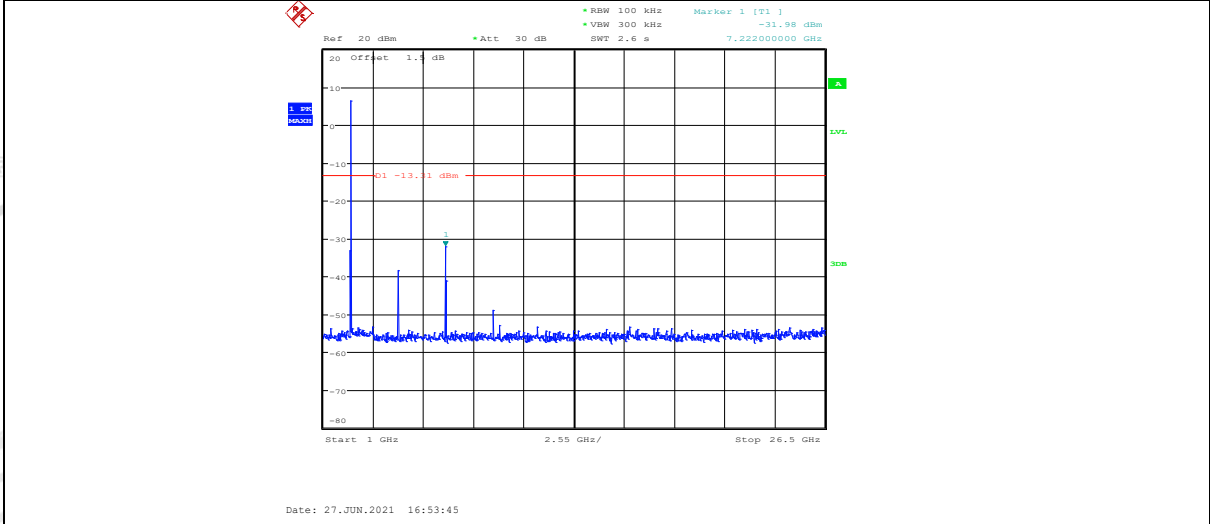


11B_ANT1_2437_Ref

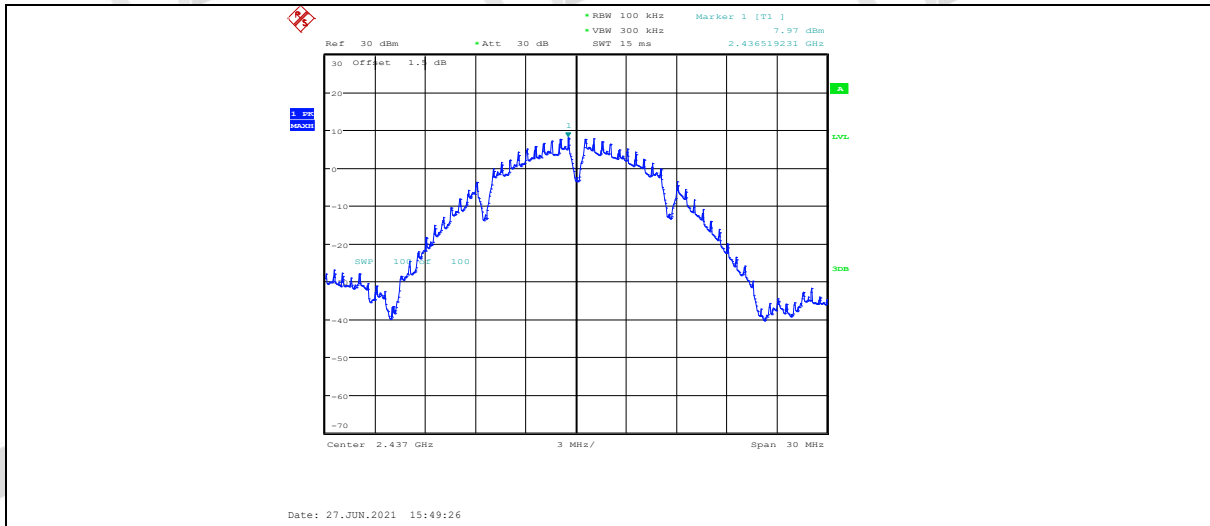


11B_ANT1_2437_30~1000

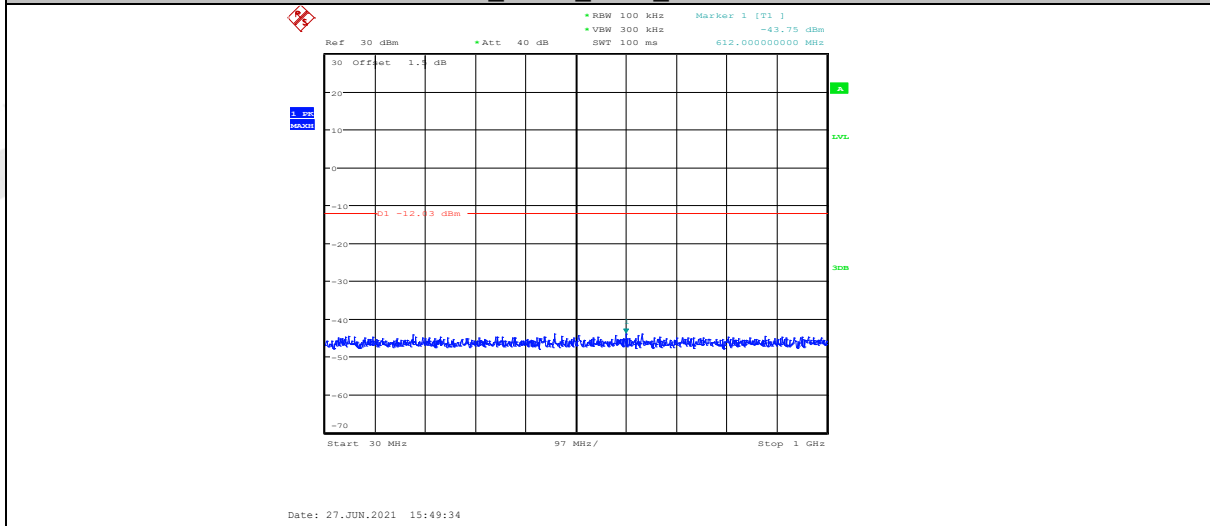


11B_ANT1_2437_1000~26500

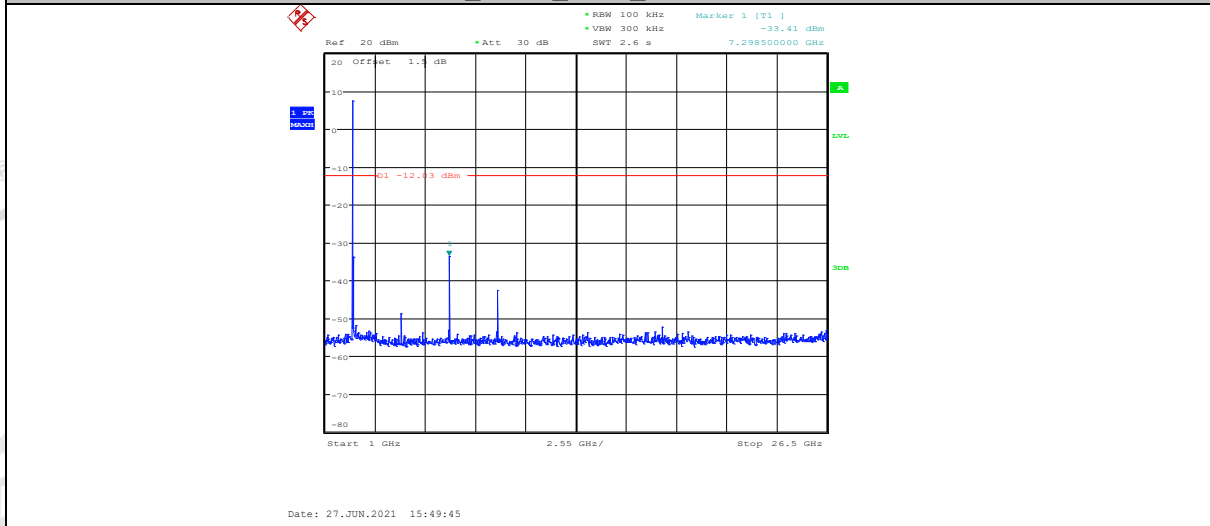


11B_ANT2_2437_Ref

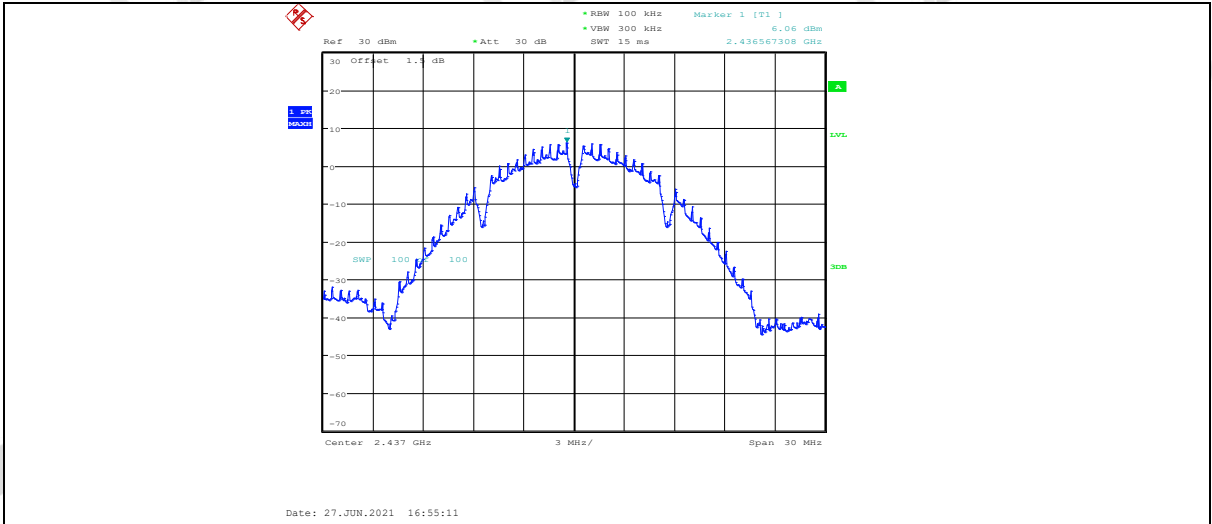


11B_ANT2_2437_30~1000

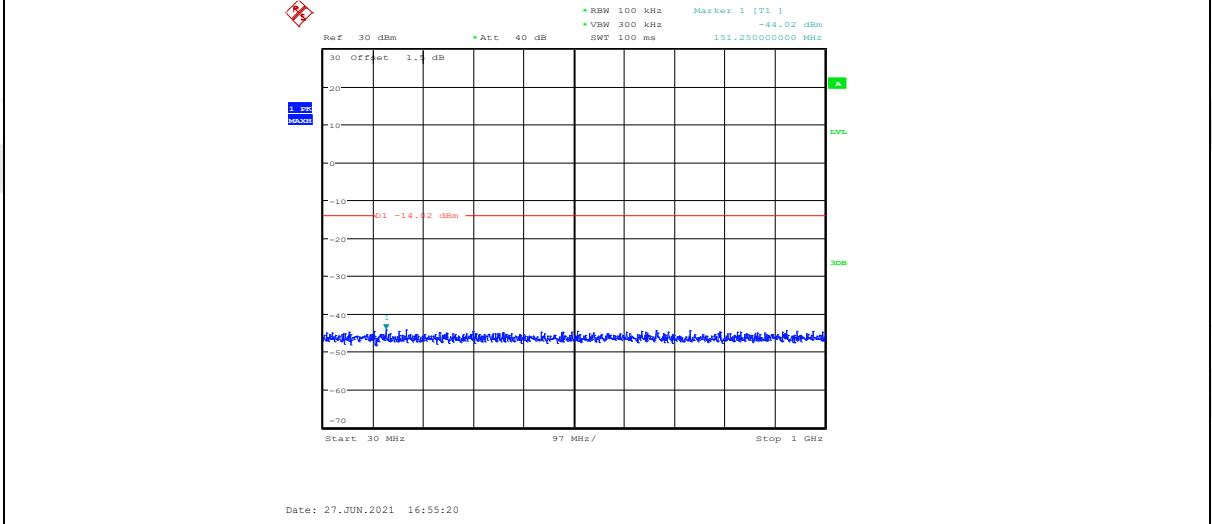


11B_ANT2_2437_1000~26500

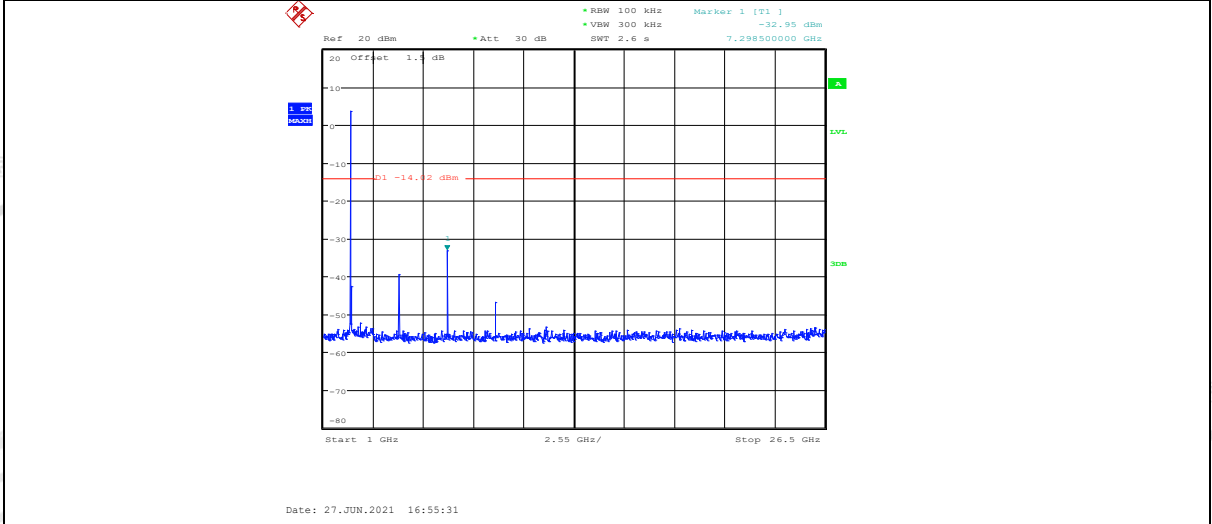


11B_ANT1_2462_Ref

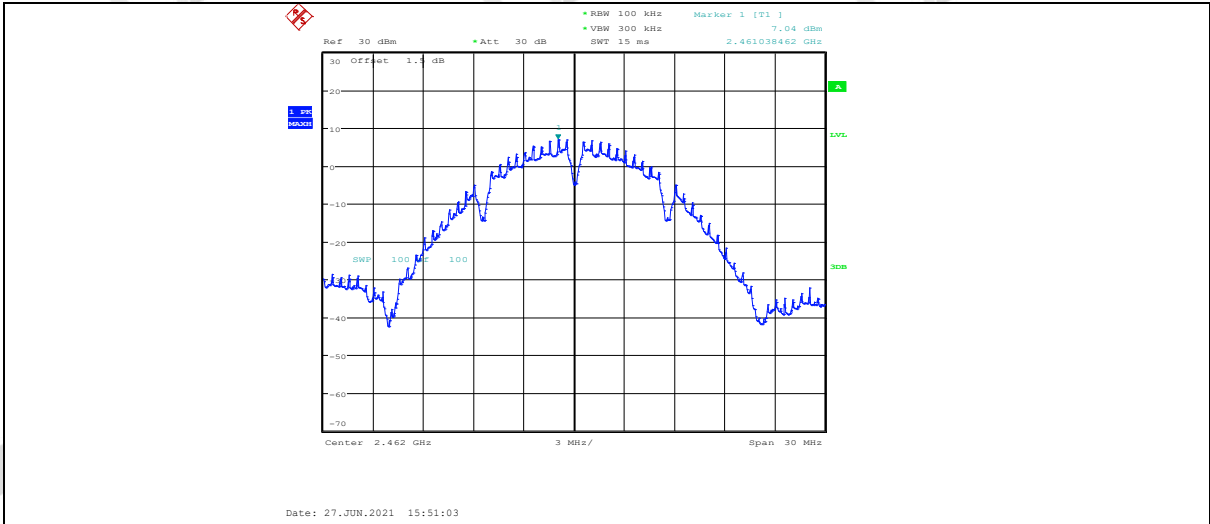


11B_ANT1_2462_30~1000

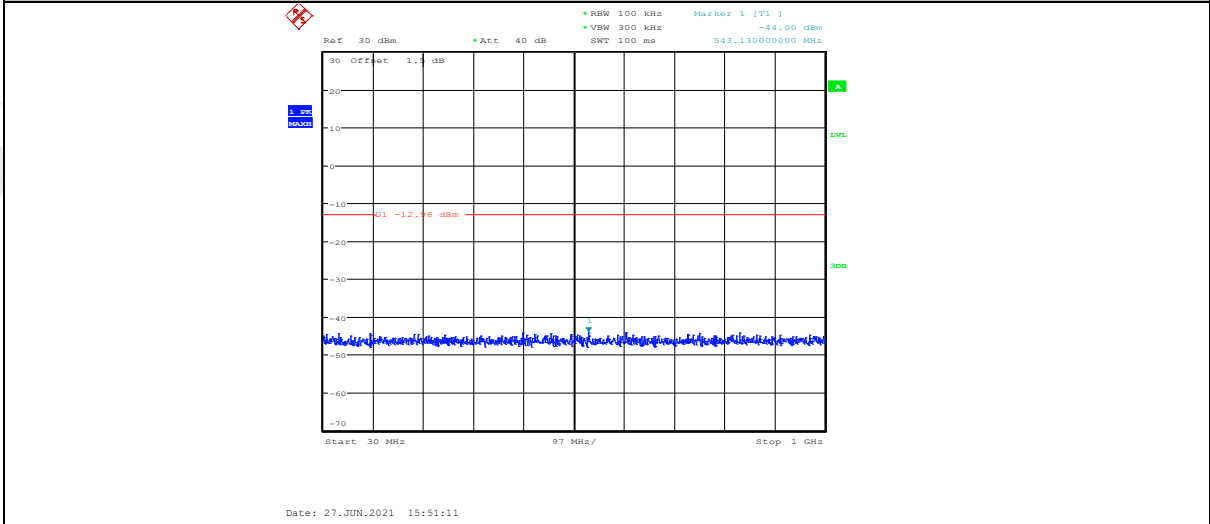


11B_ANT1_2462_1000~26500

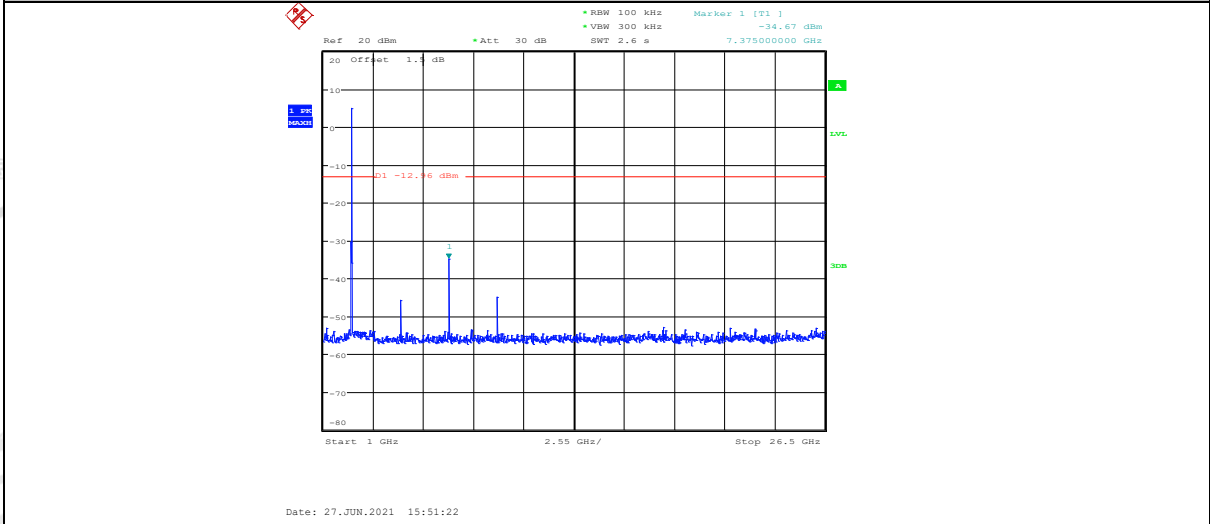


11B_ANT2_2462_Ref

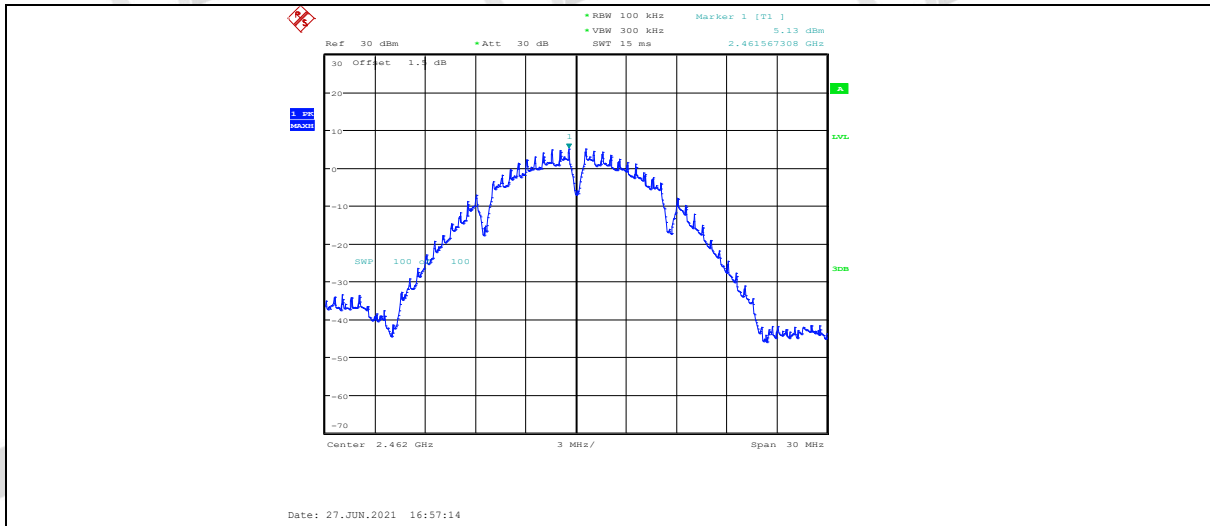


11B_ANT2_2462_30~1000

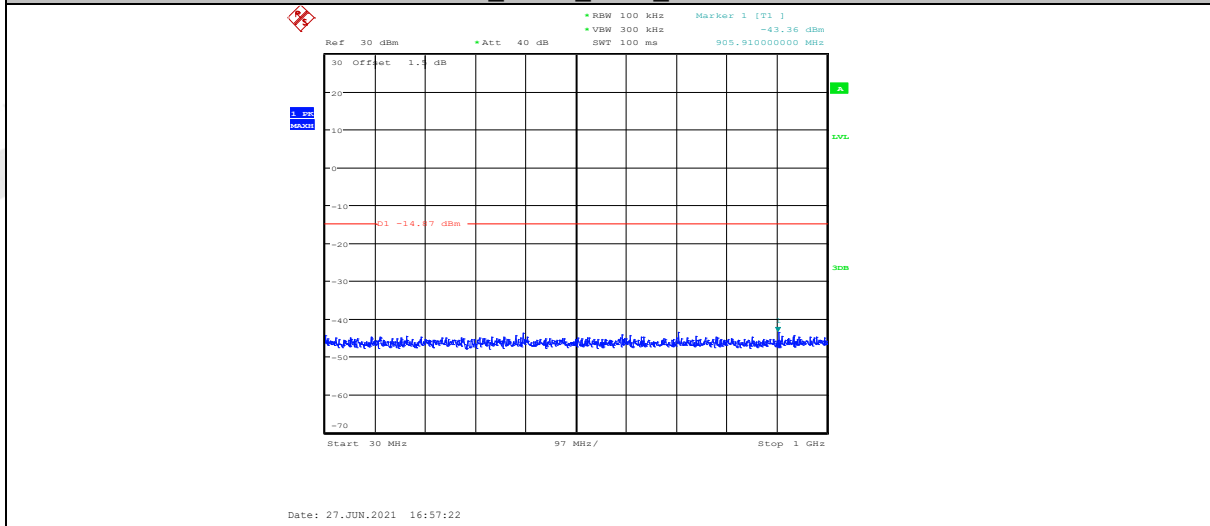


11B_ANT2_2462_1000~26500

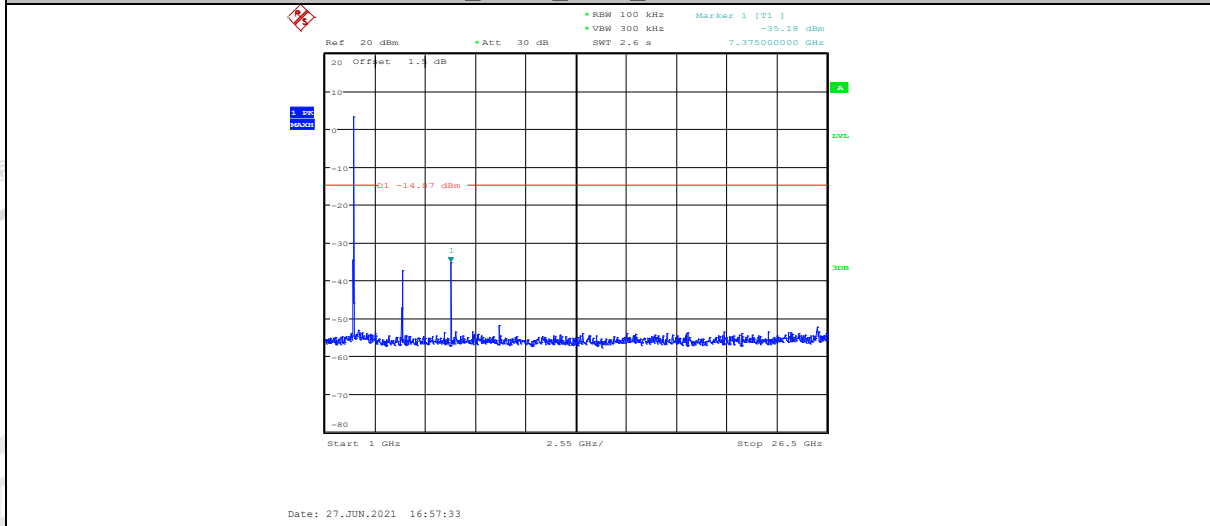


11G_ANT1_2412_Ref

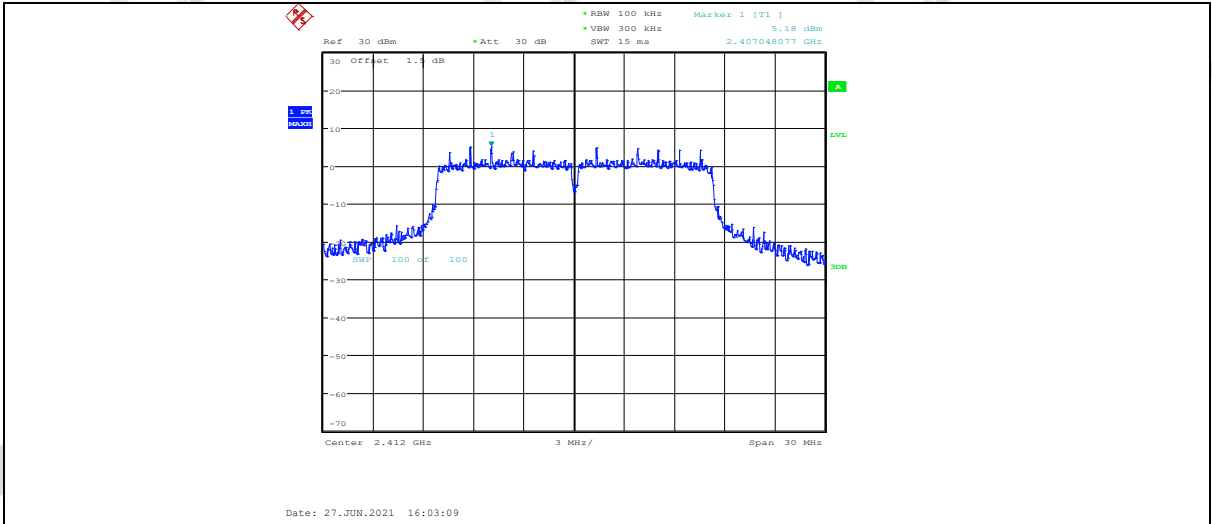


11G_ANT1_2412_30~1000

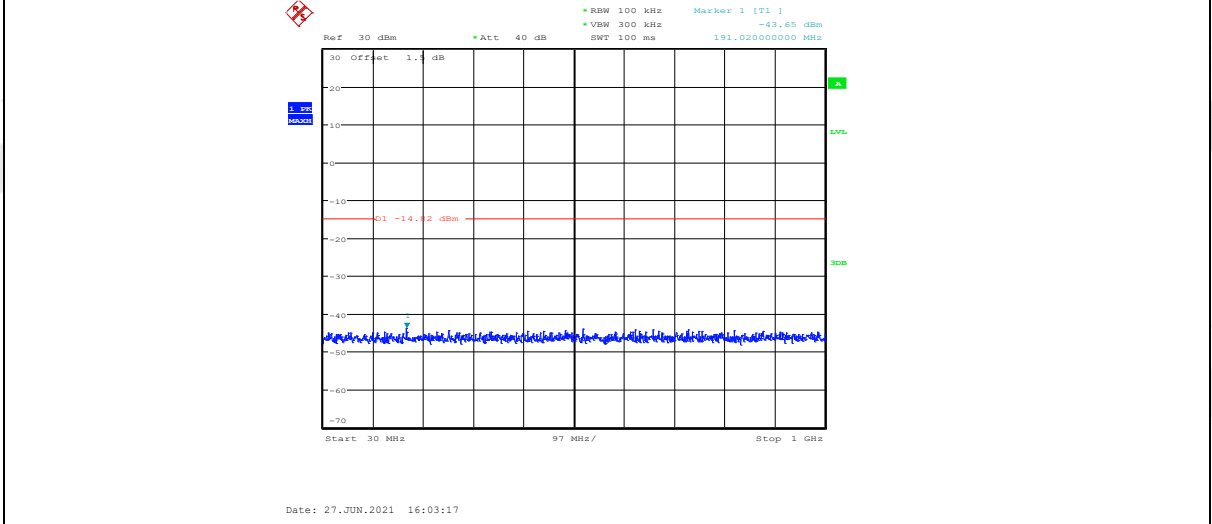


11G_ANT1_2412_1000~26500

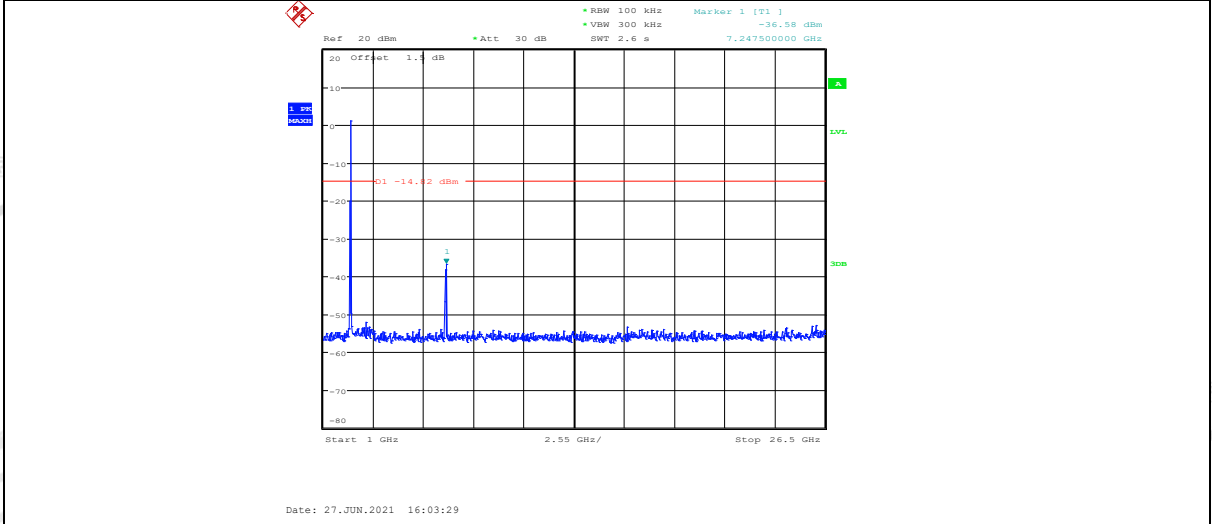


11G_ANT2_2412_Ref

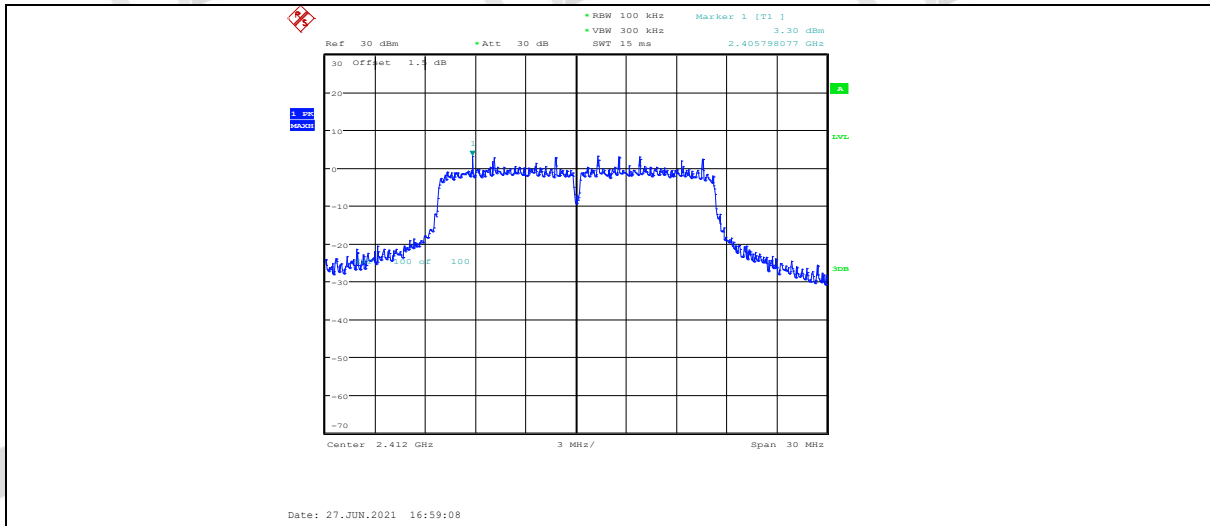


11G_ANT2_2412_30~1000

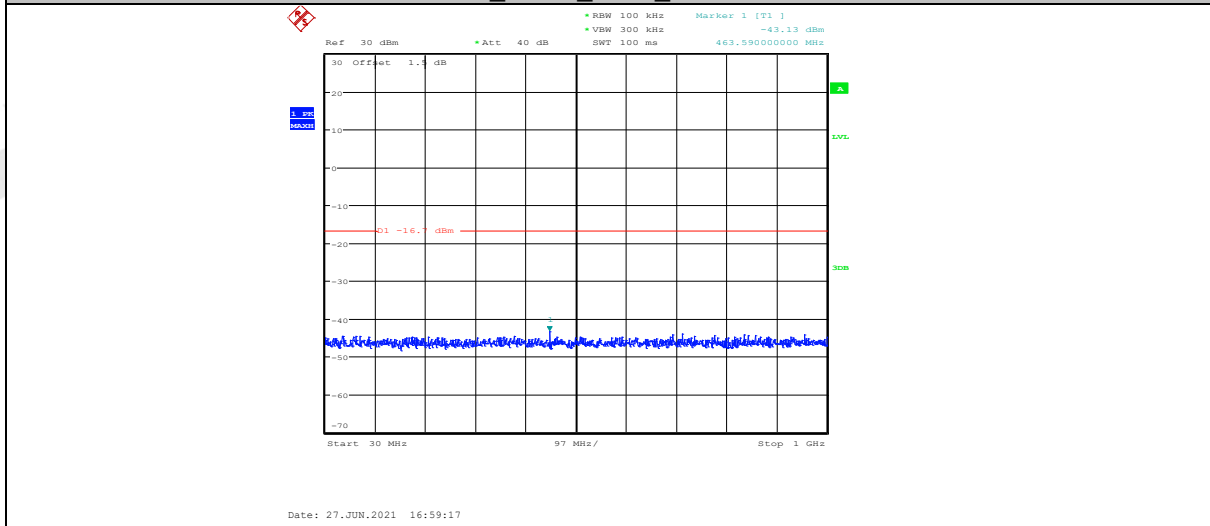


11G_ANT2_2412_1000~26500

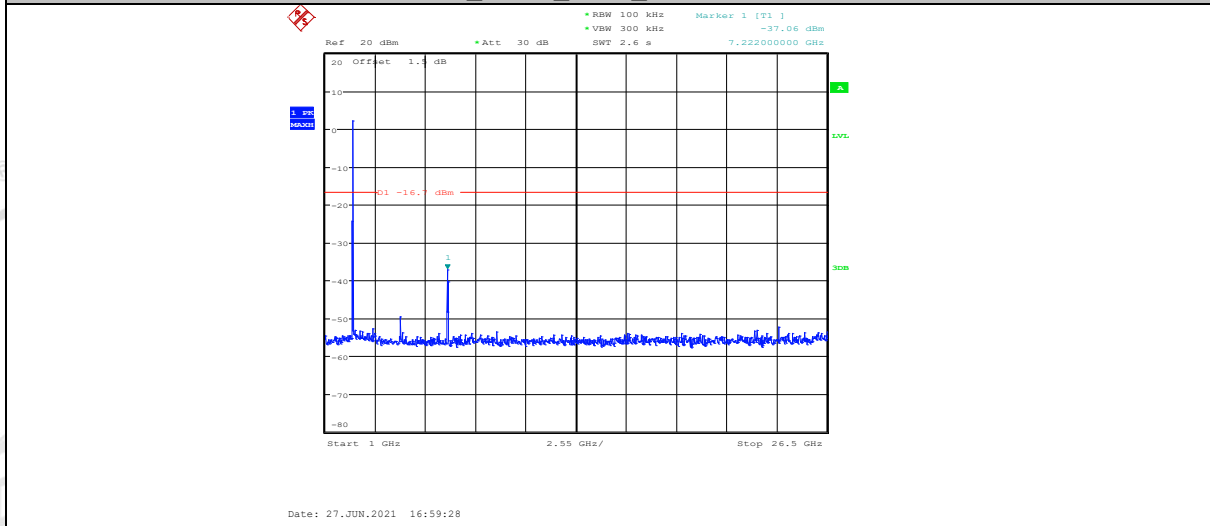


11G_ANT1_2437_Ref

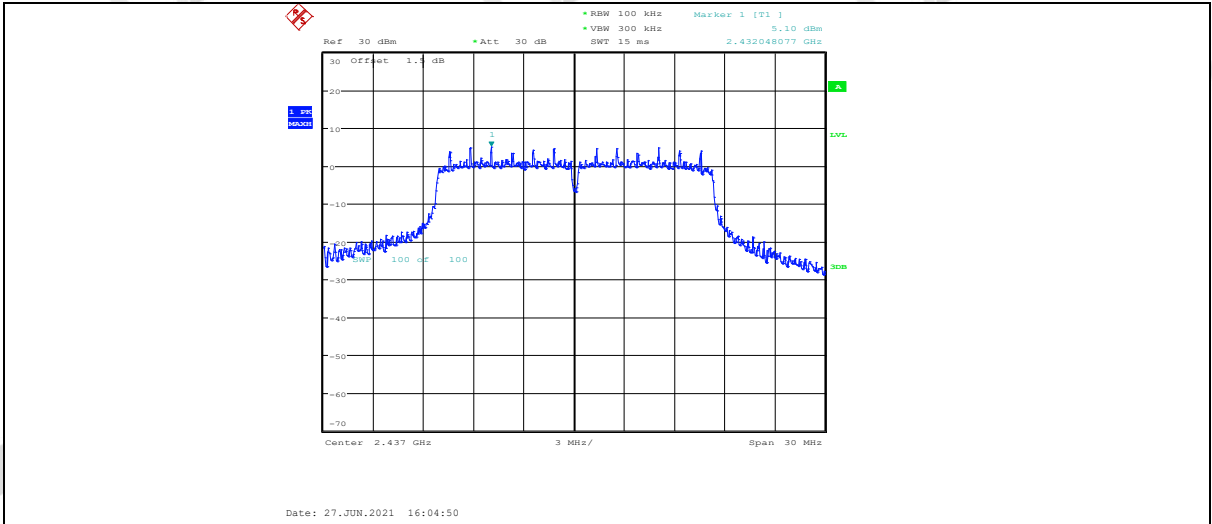


11G_ANT1_2437_30~1000

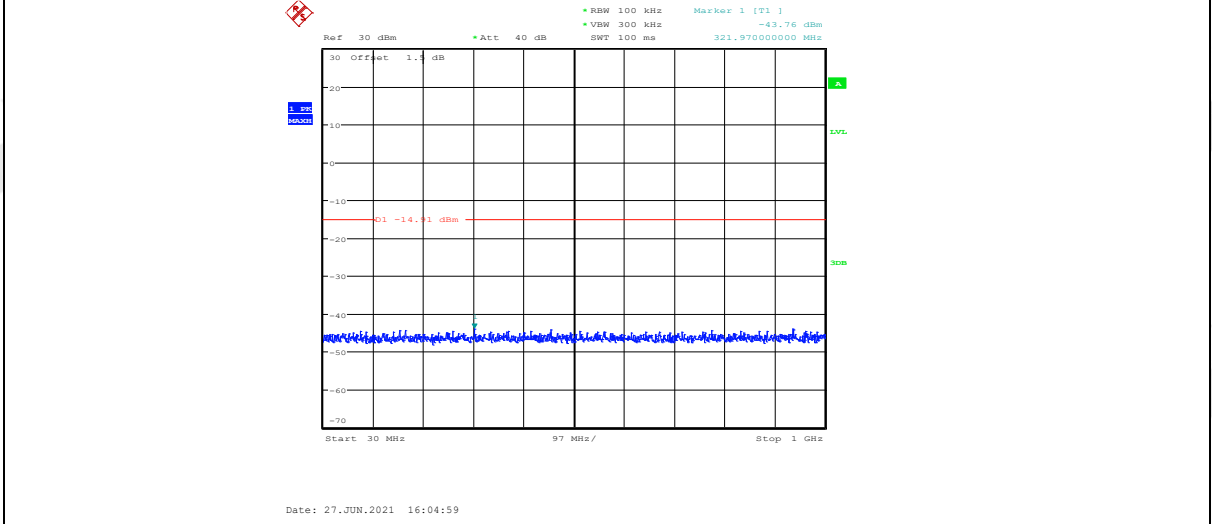


11G_ANT1_2437_1000~26500

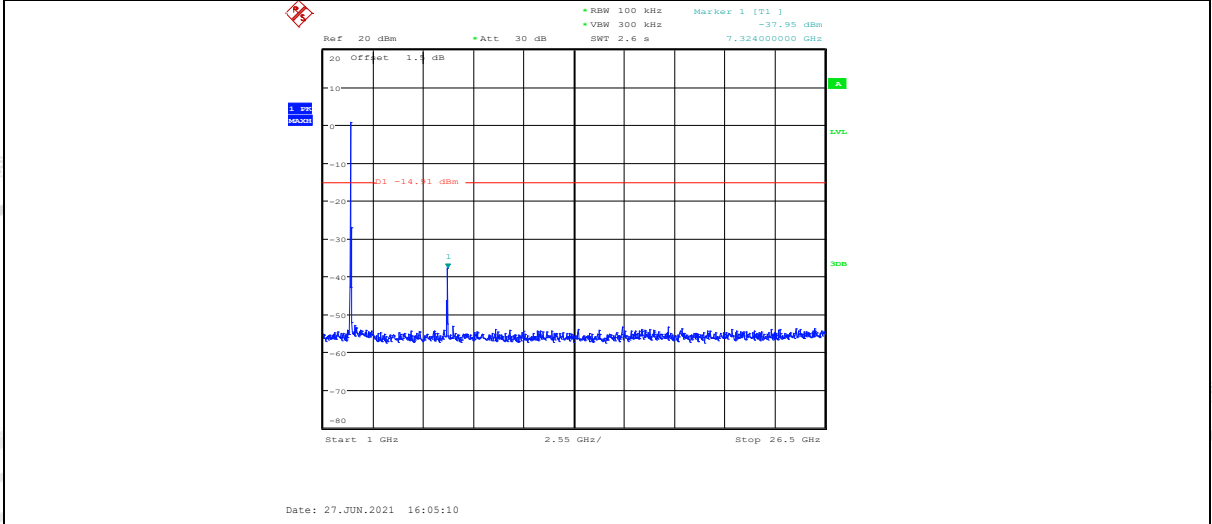


11G_ANT2_2437_Ref

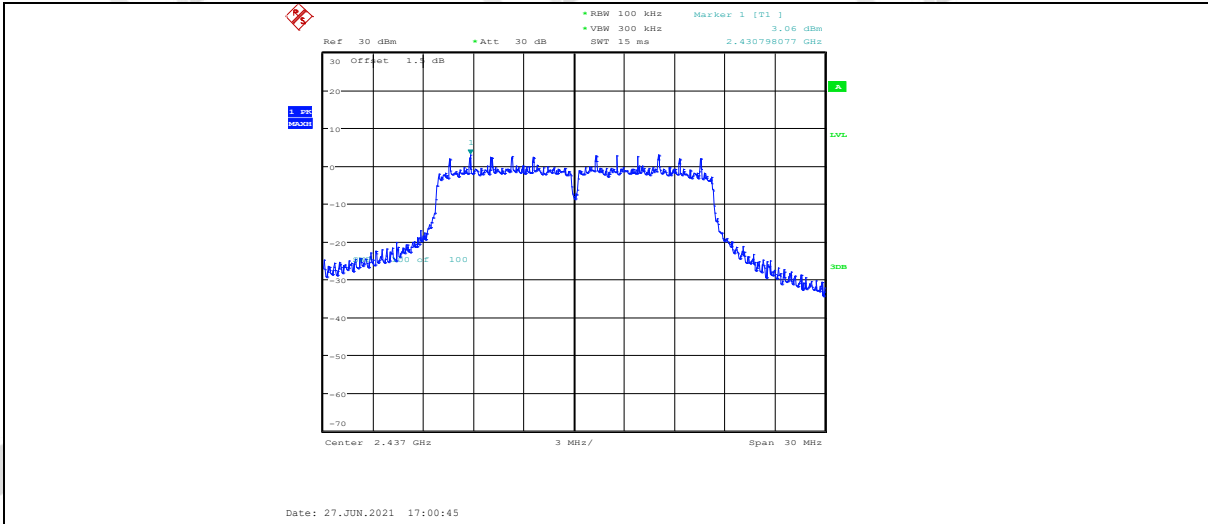


11G_ANT2_2437_30~1000

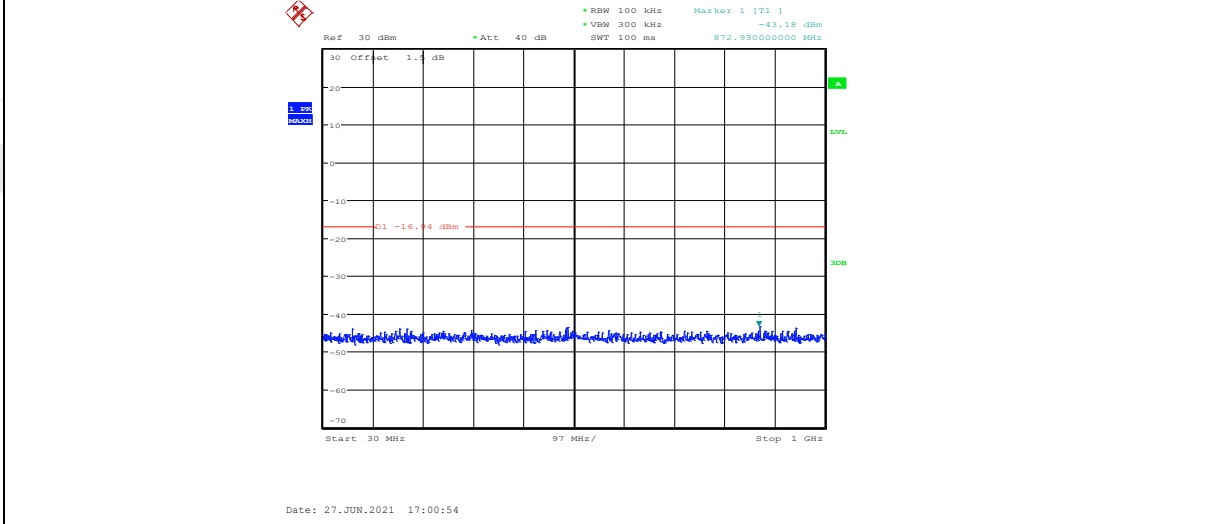


11G_ANT2_2437_1000~26500

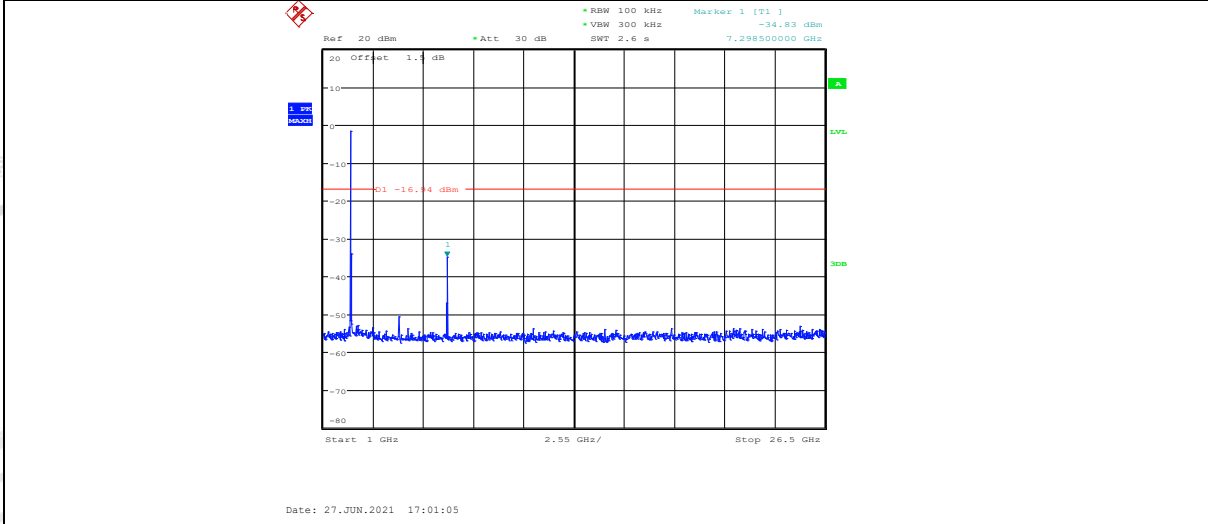


11G_ANT1_2462_Ref

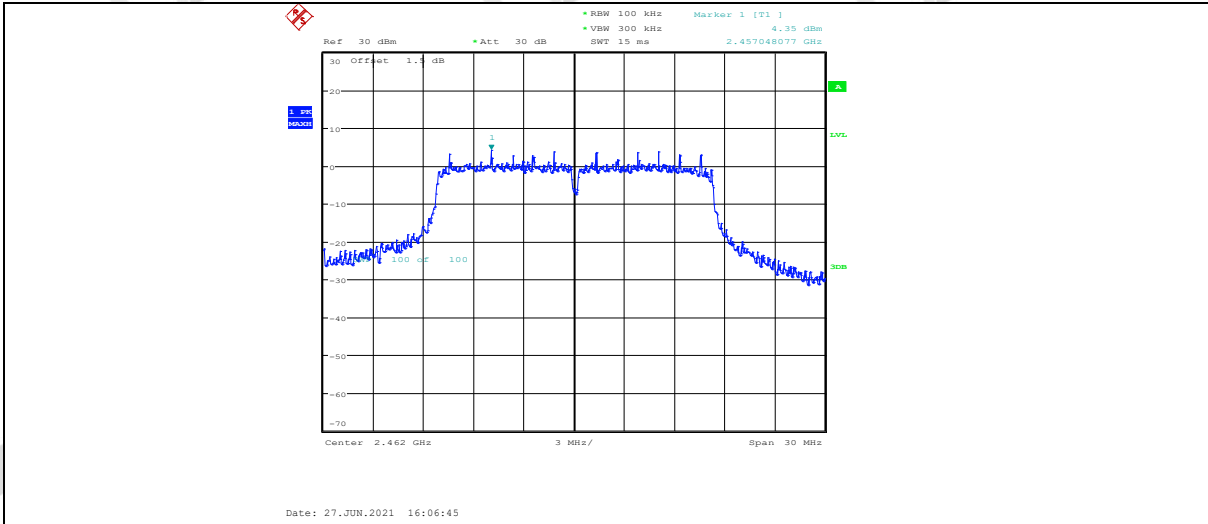


11G_ANT1_2462_30~1000

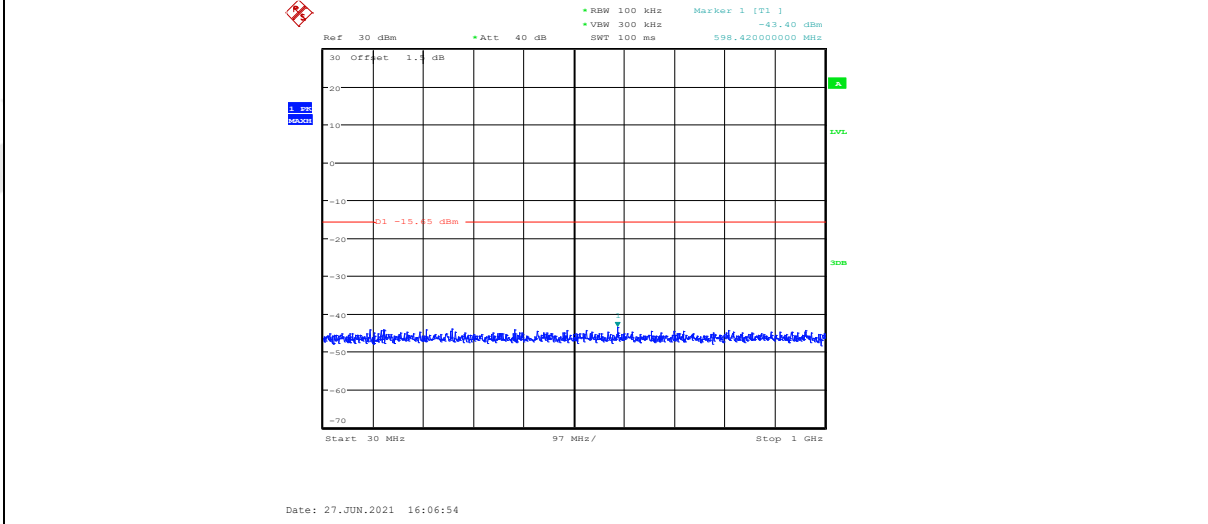


11G_ANT1_2462_1000~26500

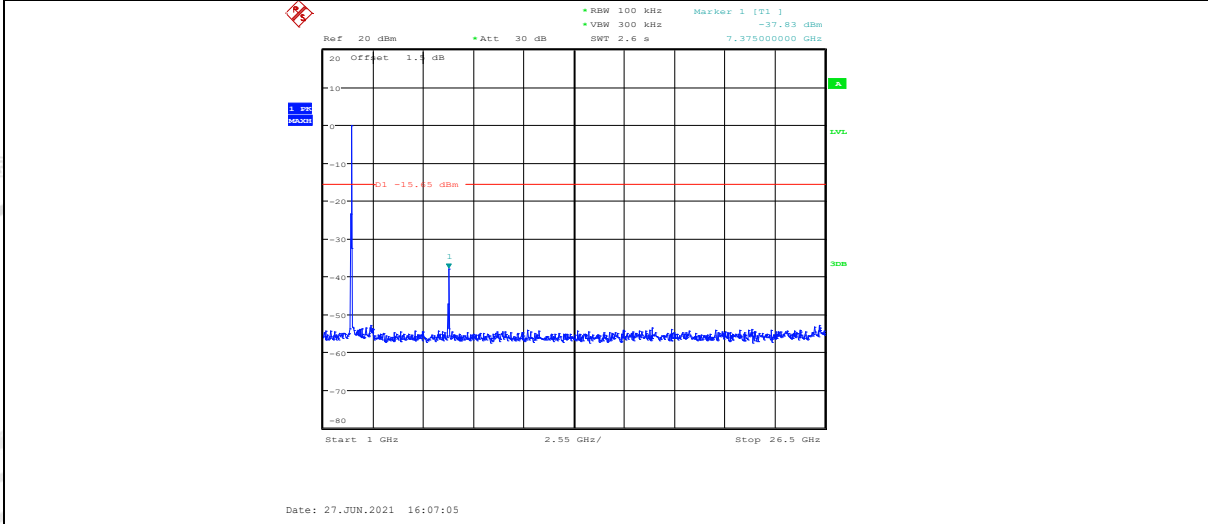


11G_ANT2_2462_Ref

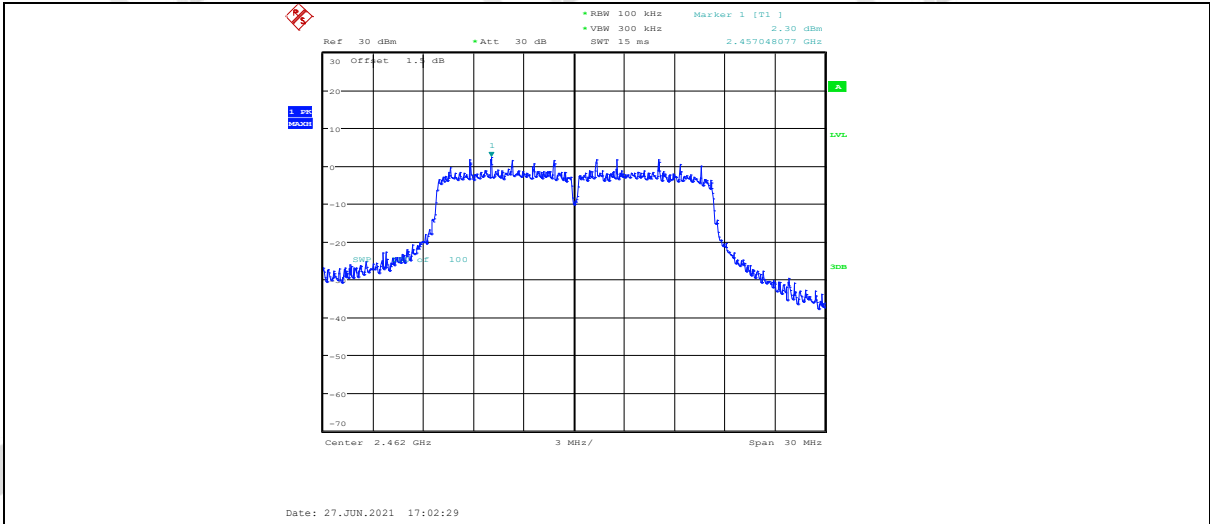


11G_ANT2_2462_30~1000

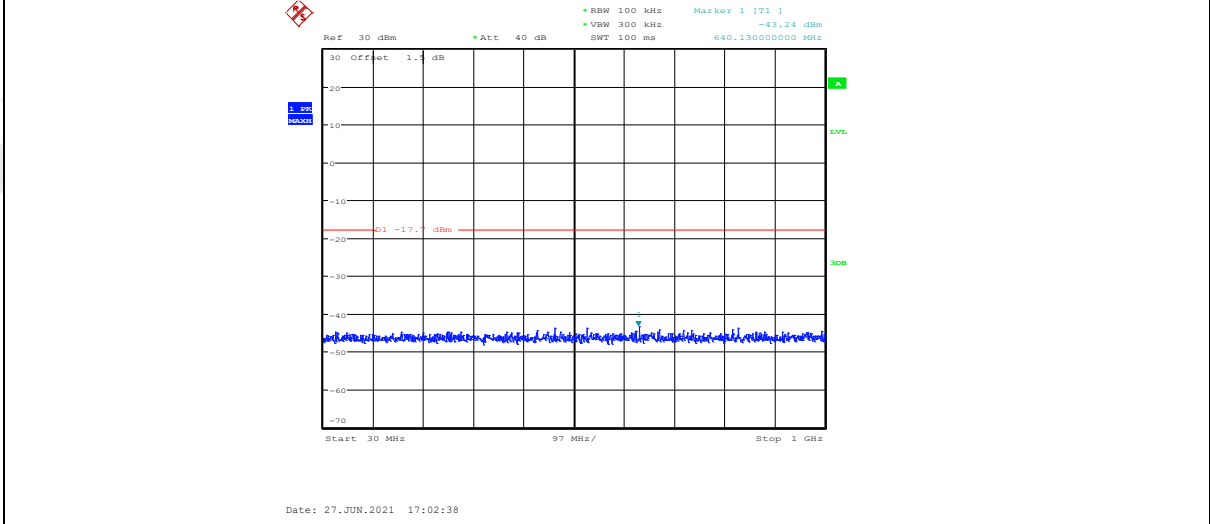


11G_ANT2_2462_1000~26500

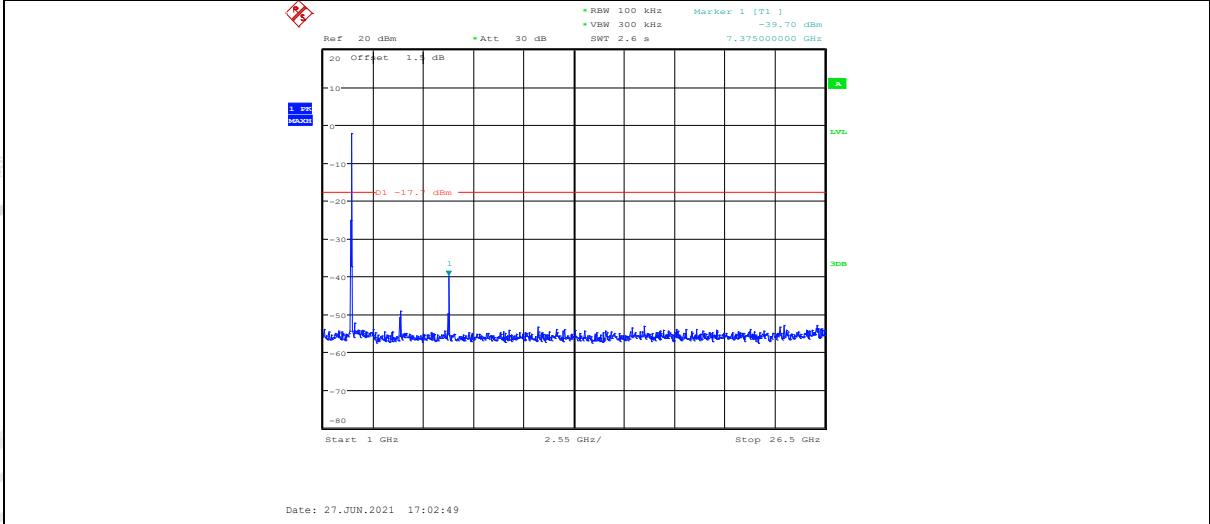


11N20MIMO_ANT1_2412_Ref

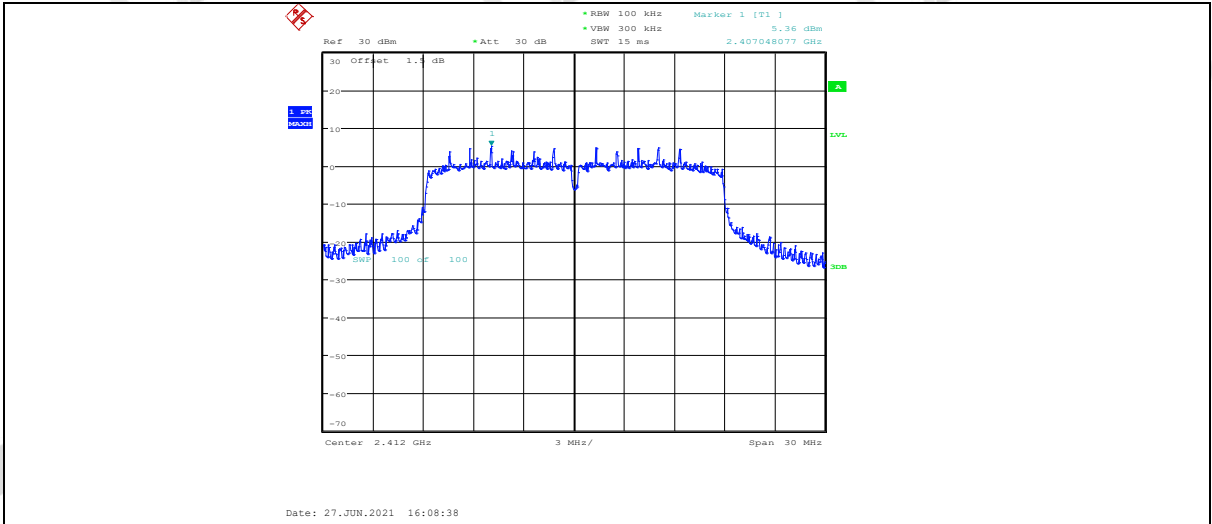


11N20MIMO_ANT1_2412_30~1000

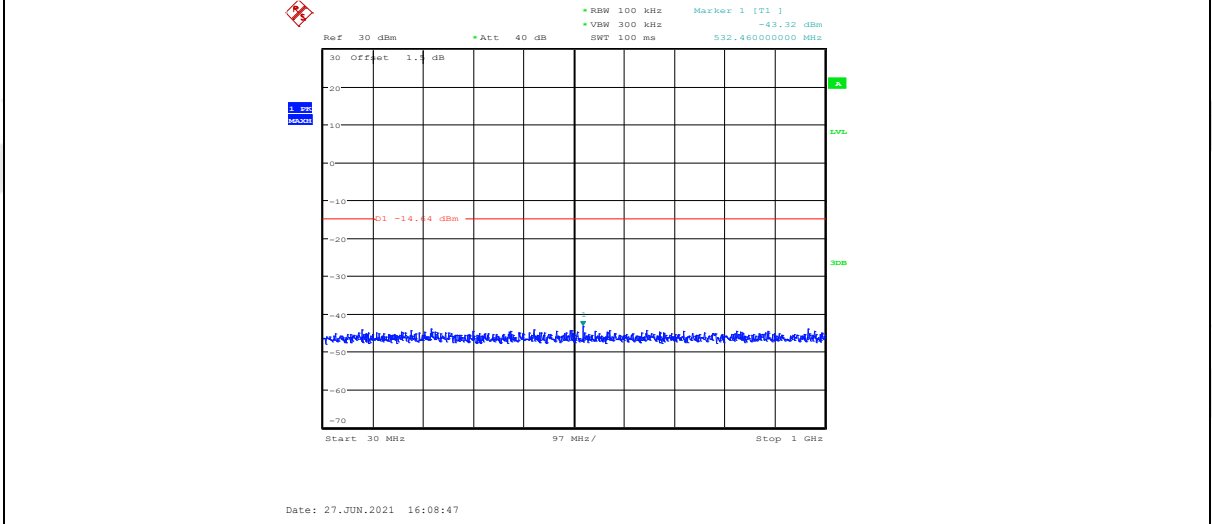


11N20MIMO_ANT1_2412_1000~26500

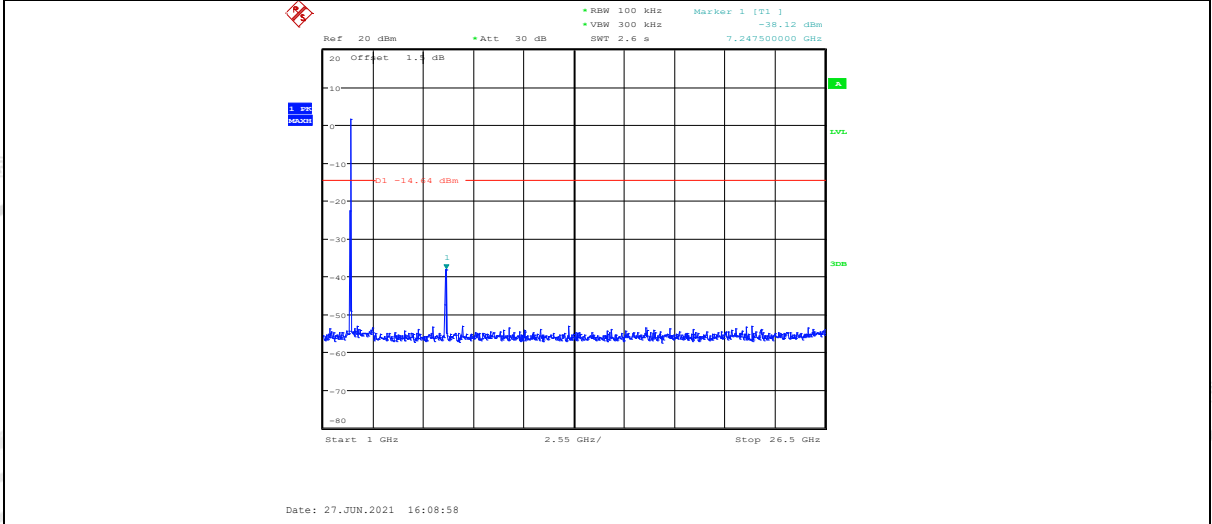


11N20MIMO_ANT2_2412_Ref

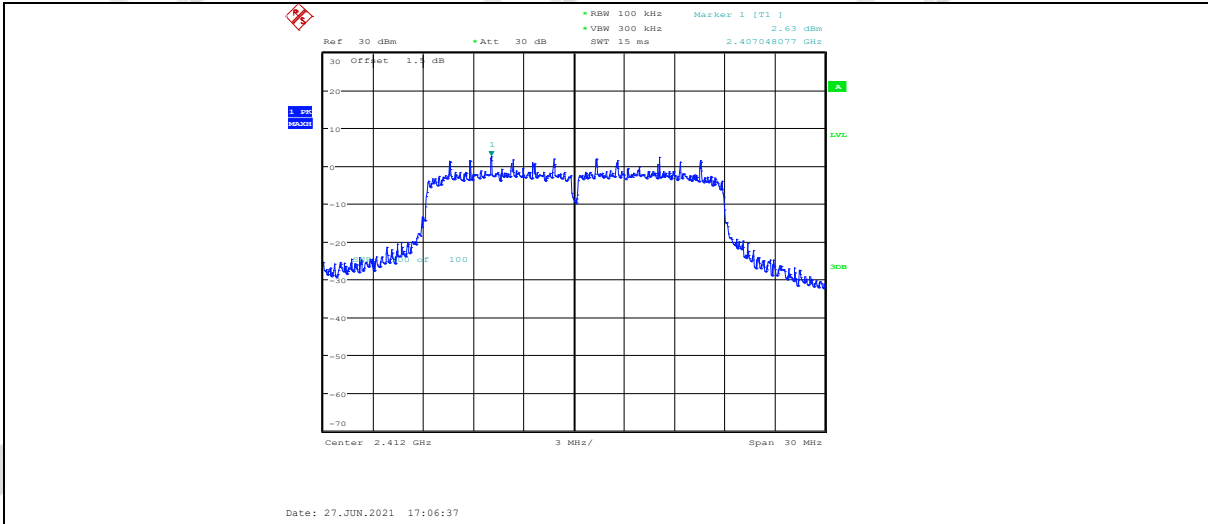


11N20MIMO_ANT2_2412_30~1000

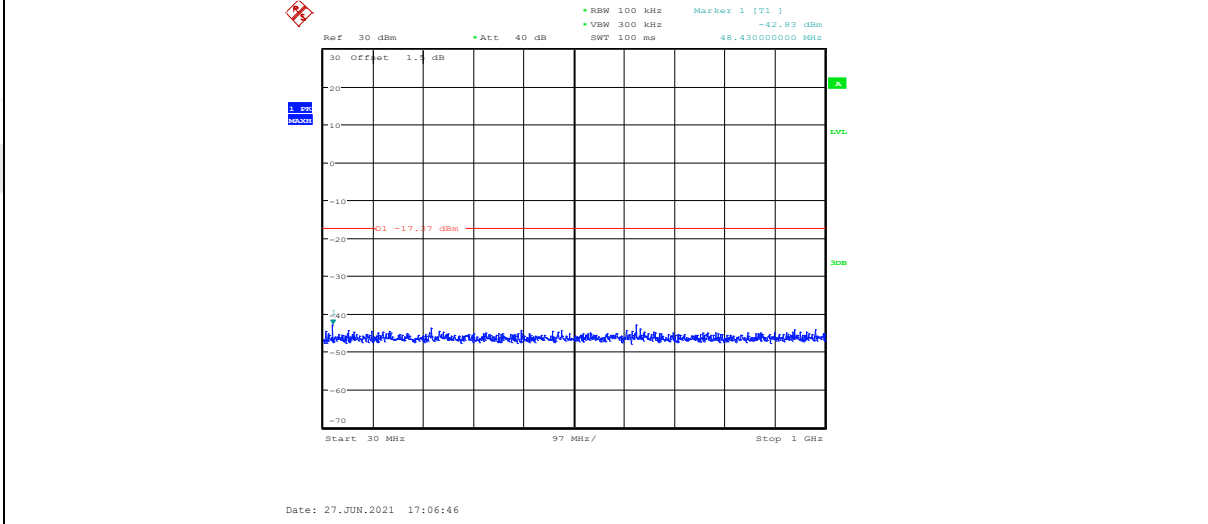


11N20MIMO_ANT2_2412_1000~26500

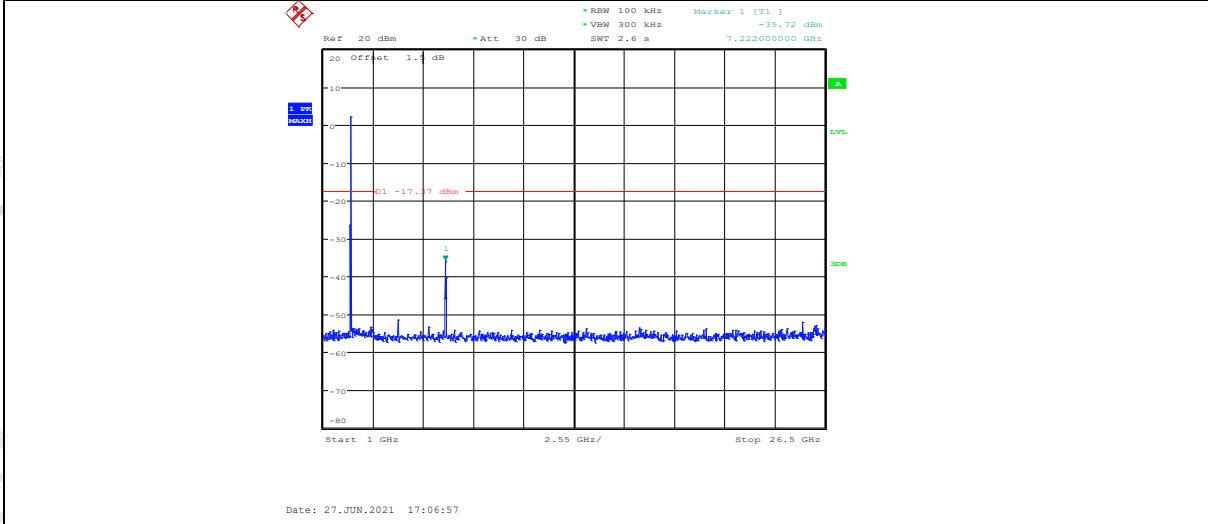


11N20MIMO_ANT1_2437_Ref

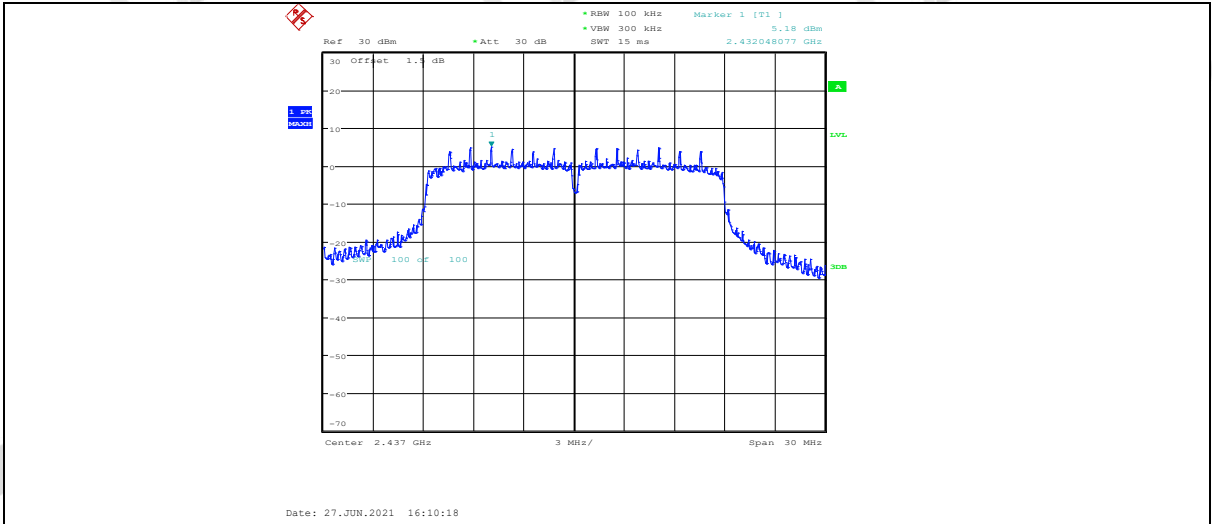


11N20MIMO_ANT1_2437_30~1000

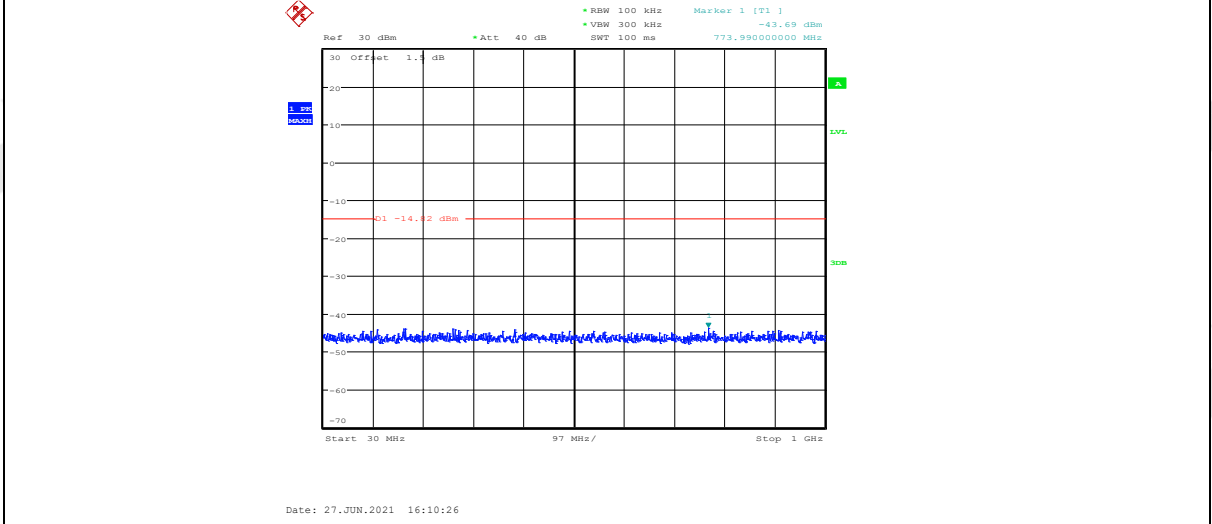


11N20MIMO_ANT1_2437_1000~26500

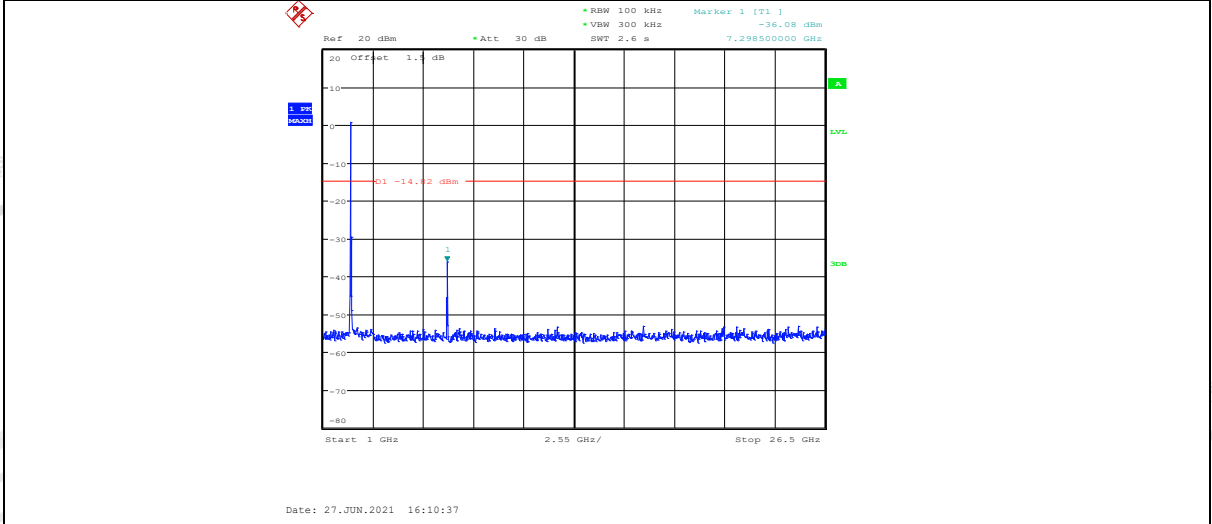


11N20MIMO_ANT2_2437_Ref

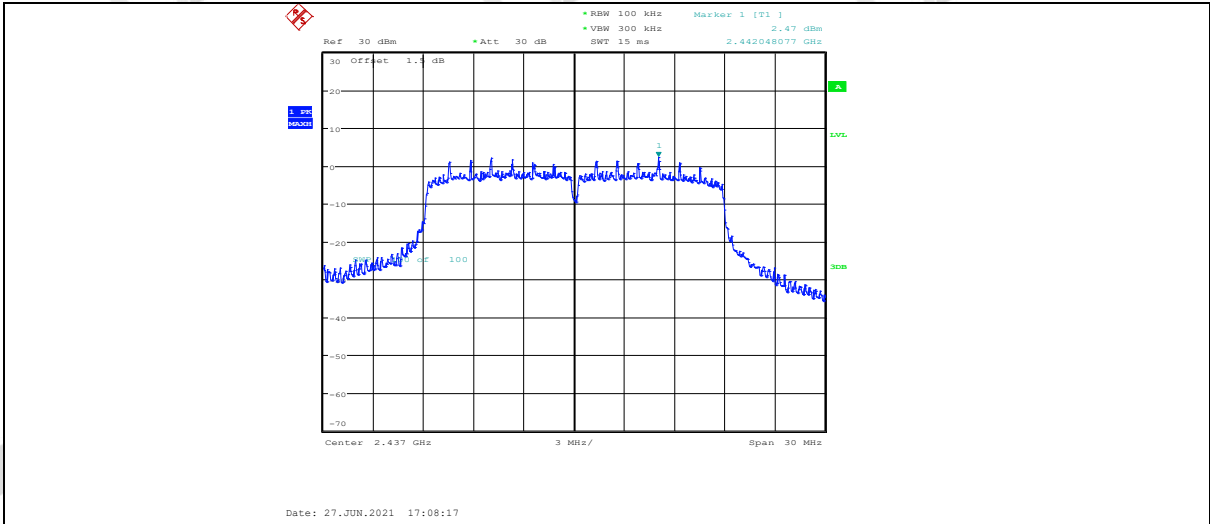


11N20MIMO_ANT2_2437_30~1000

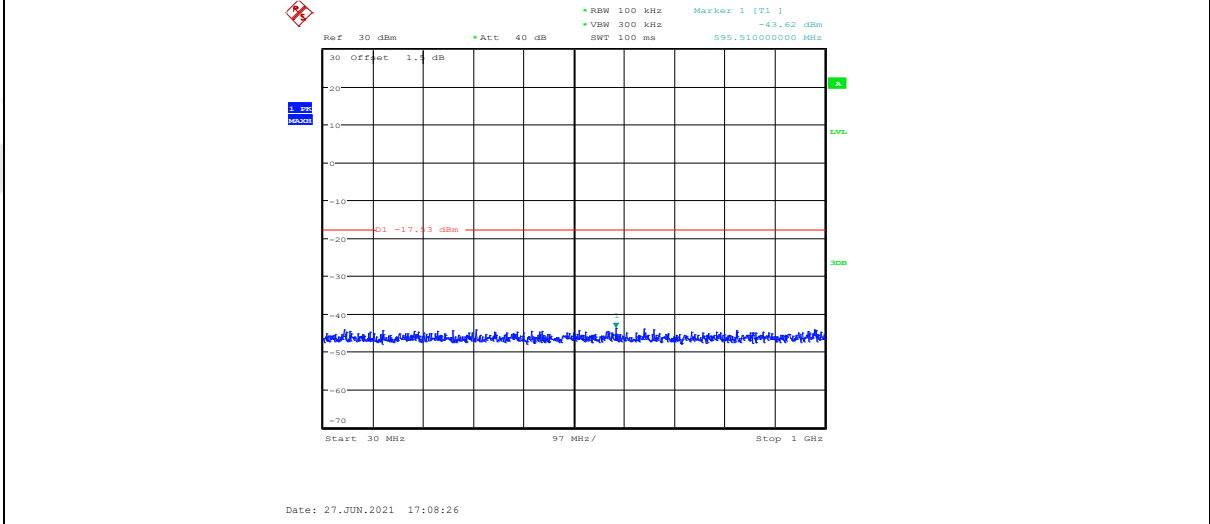


11N20MIMO_ANT2_2437_1000~26500

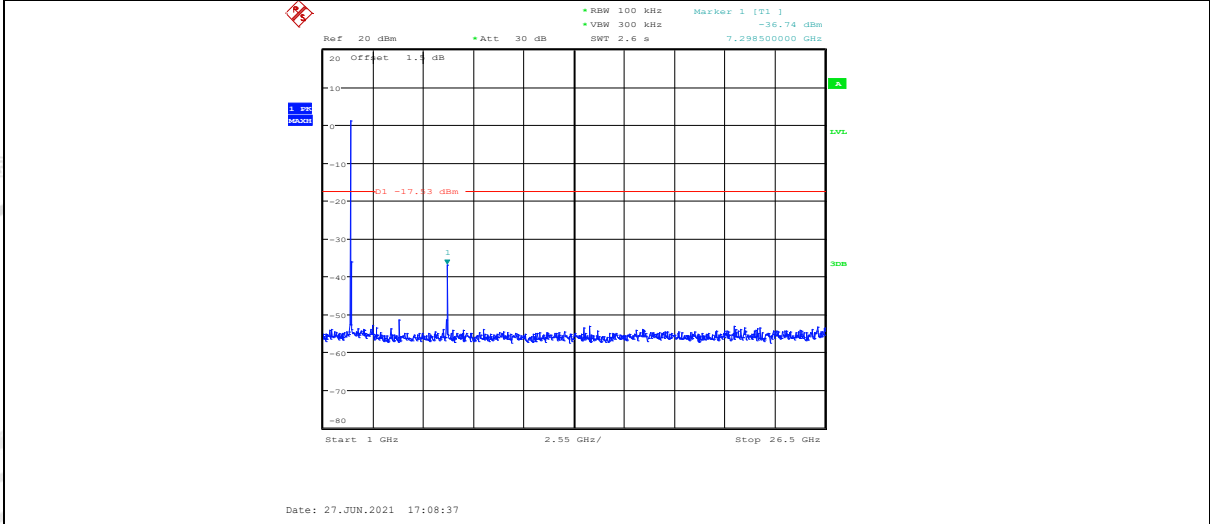


11N20MIMO_ANT1_2462_Ref

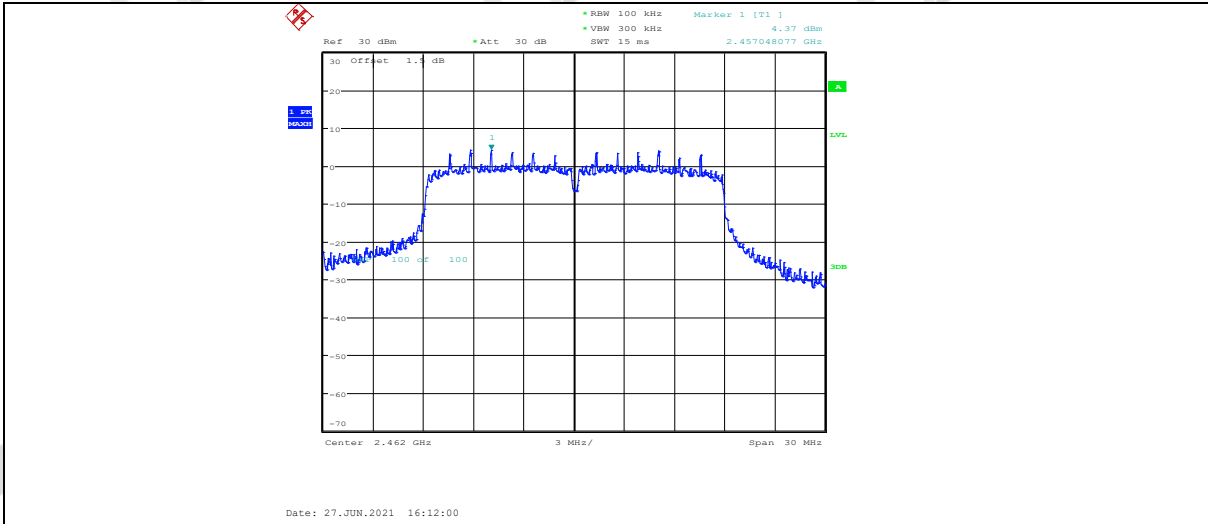


11N20MIMO_ANT1_2462_30~1000

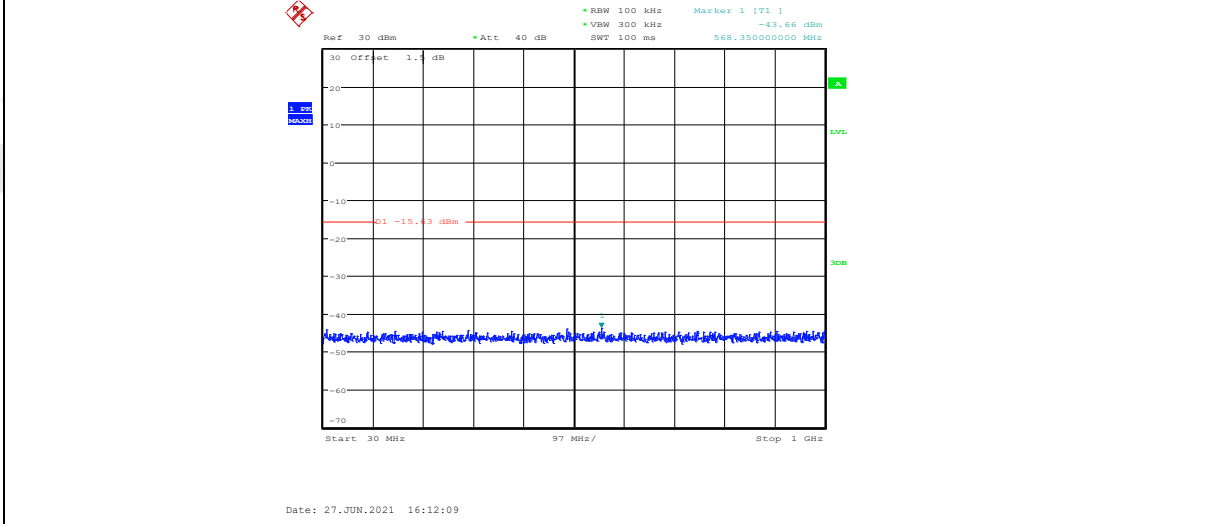


11N20MIMO_ANT1_2462_1000~26500

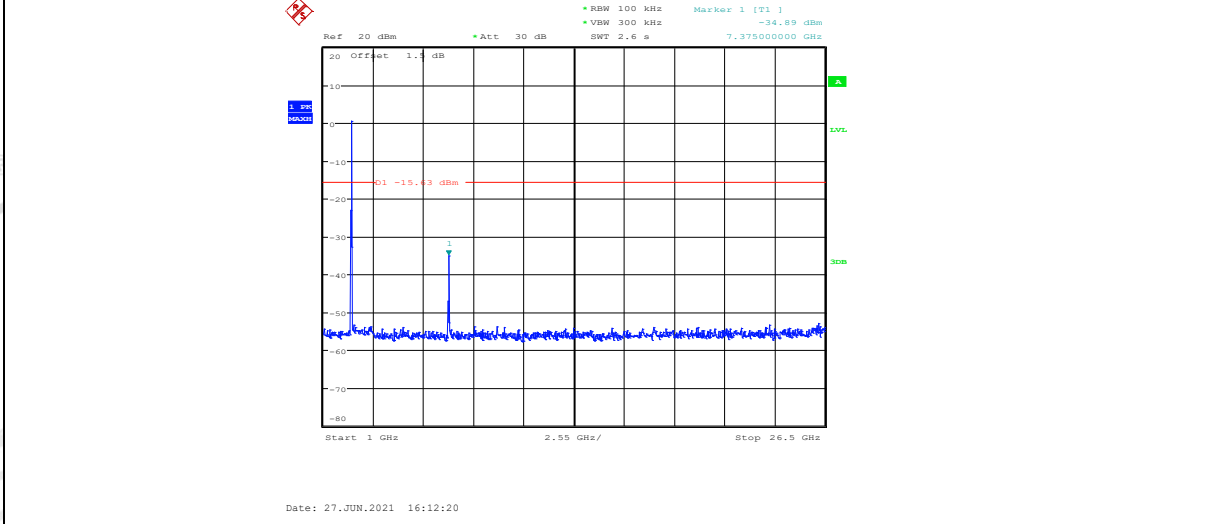


11N20MIMO_ANT2_2462_Ref

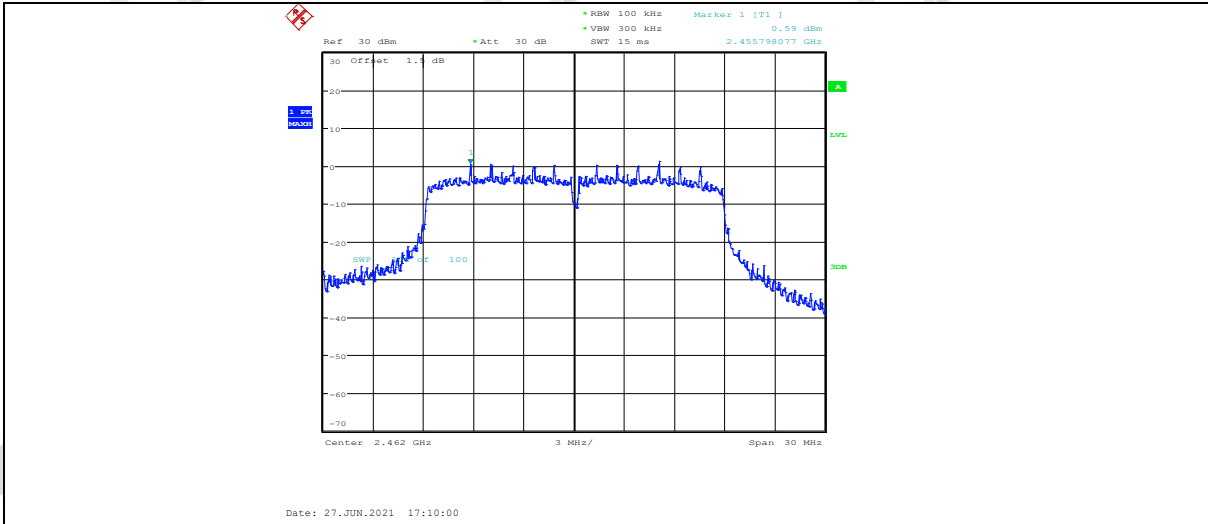


11N20MIMO_ANT2_2462_30~1000

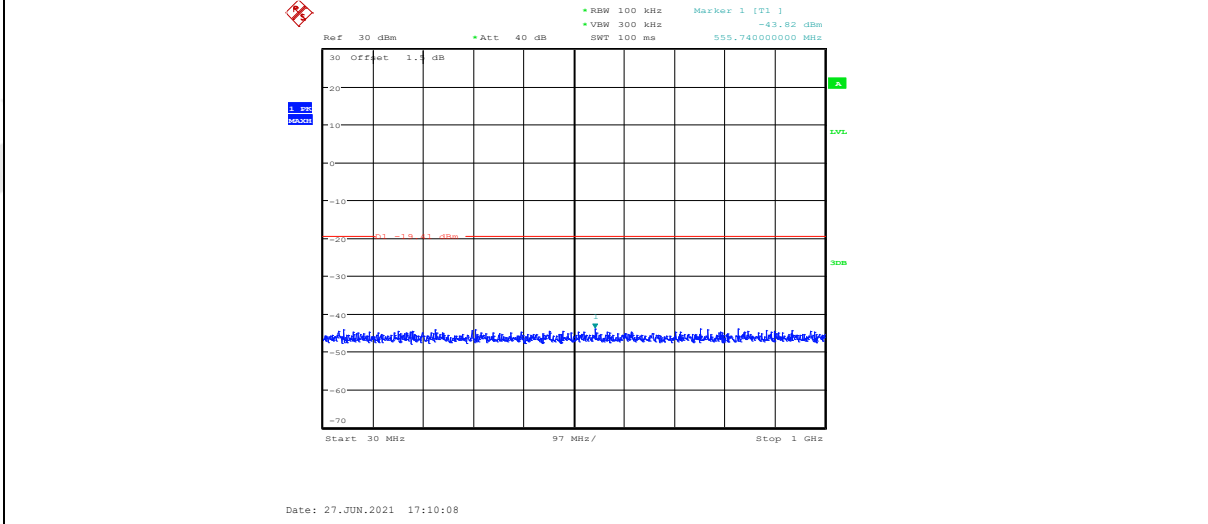


11N20MIMO_ANT2_2462_1000~26500

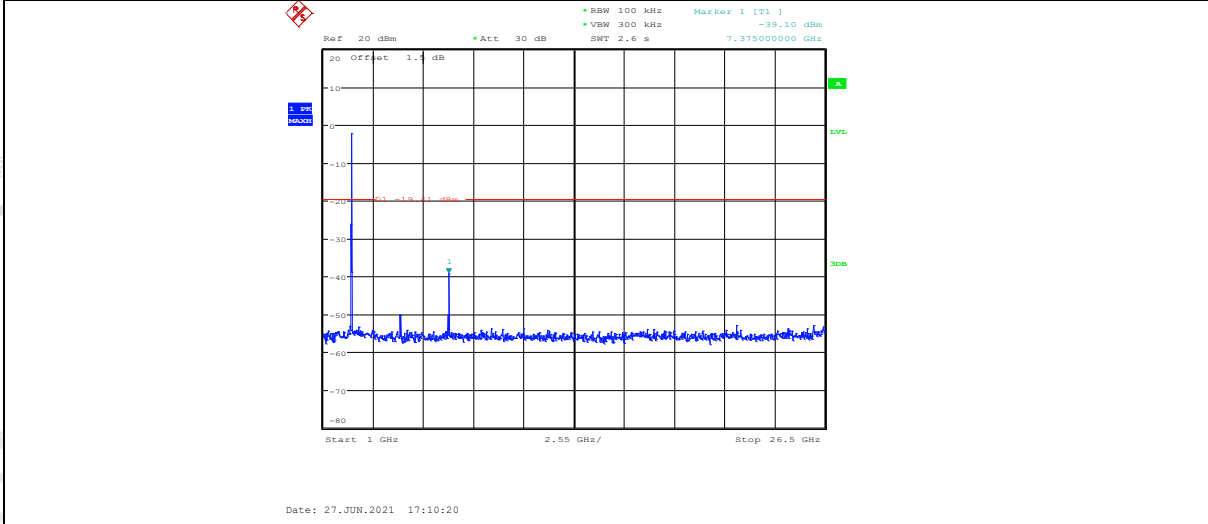


11N40MIMO_ANT1_2422_Ref

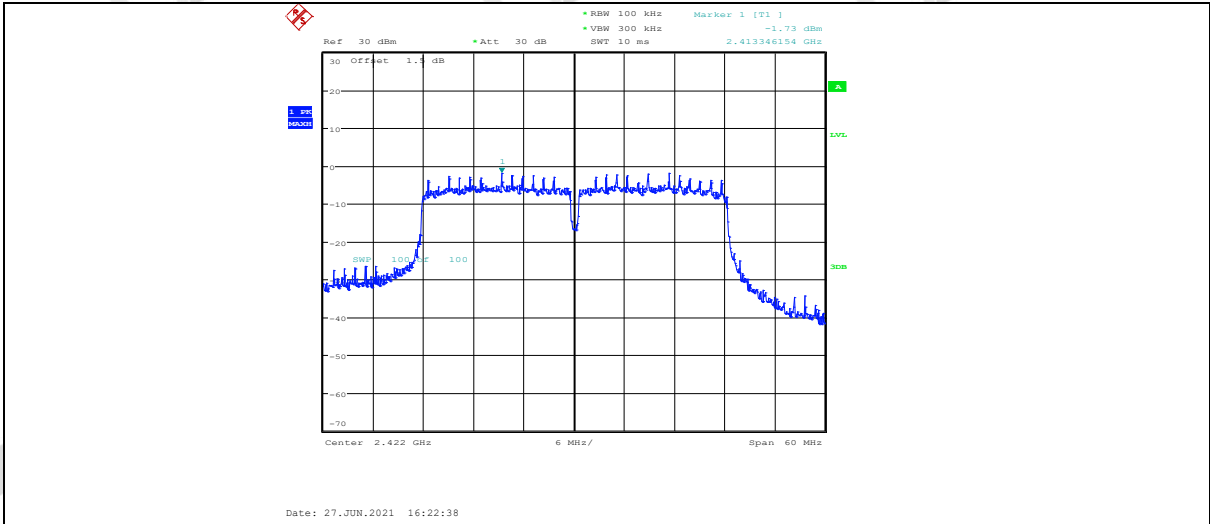


11N40MIMO_ANT1_2422_30~1000

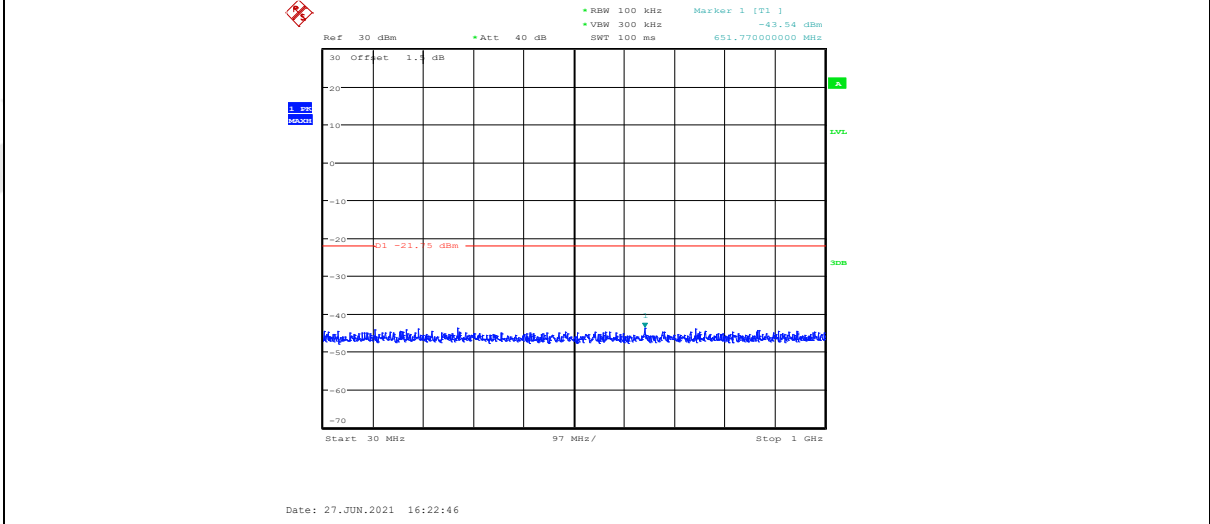


11N40MIMO_ANT1_2422_1000~26500

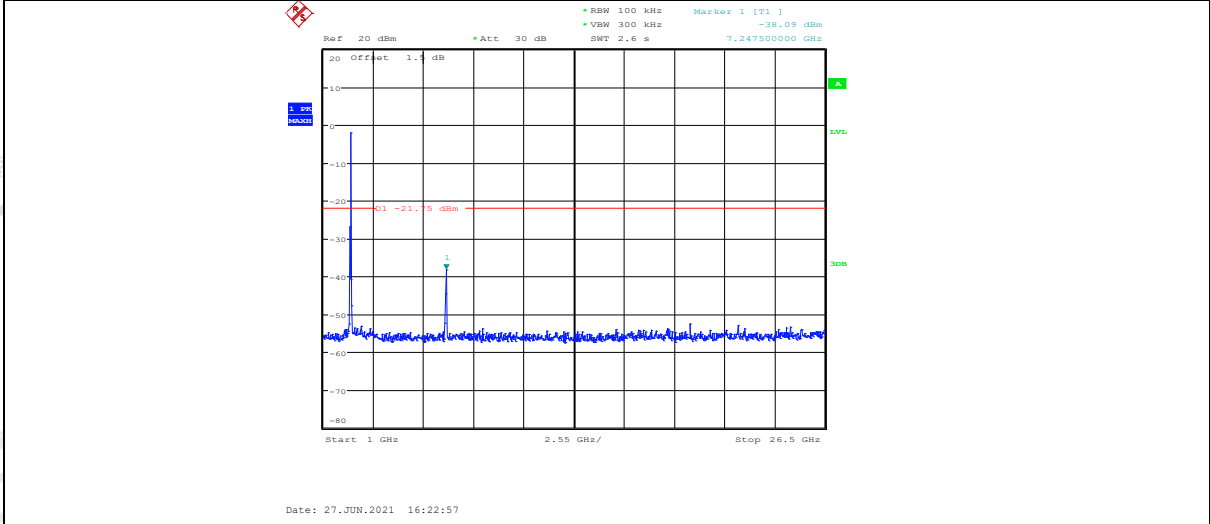


11N40MIMO_ANT2_2422_Ref

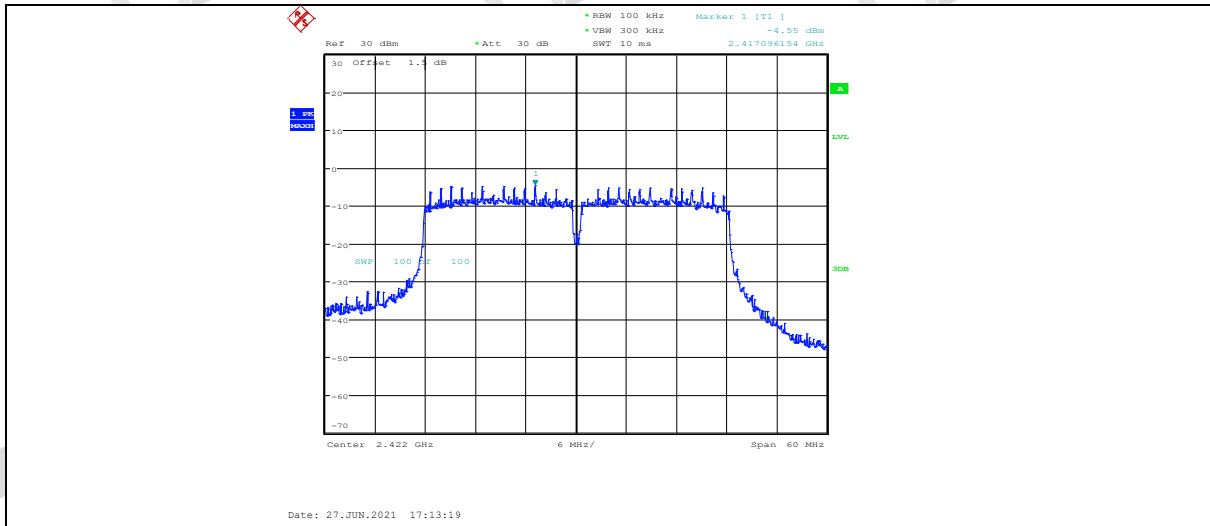


11N40MIMO_ANT2_2422_30~1000

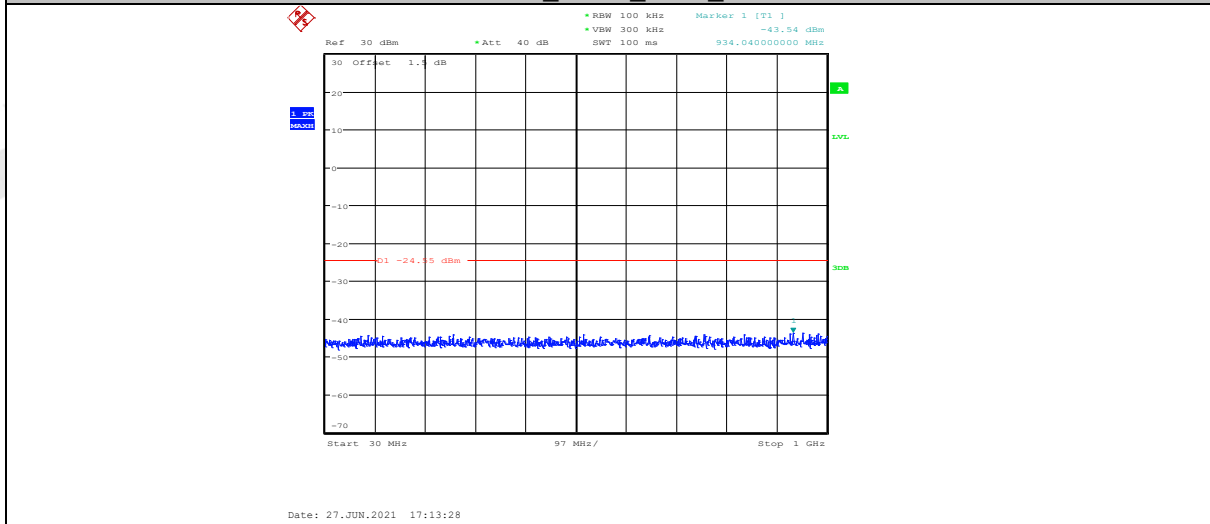


11N40MIMO_ANT2_2422_1000~26500

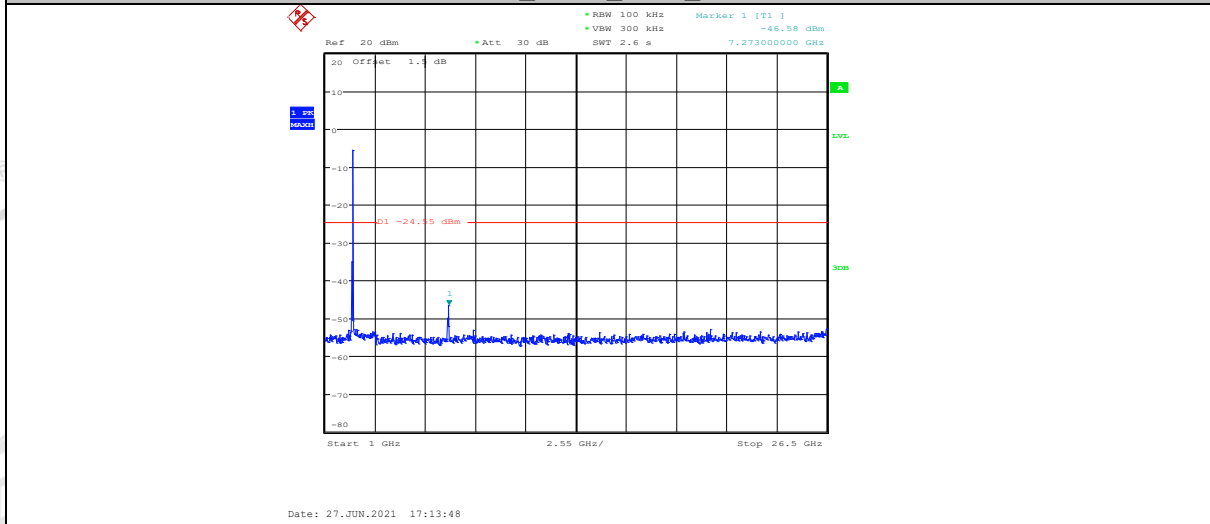


11N40MIMO_ANT1_2437_Ref

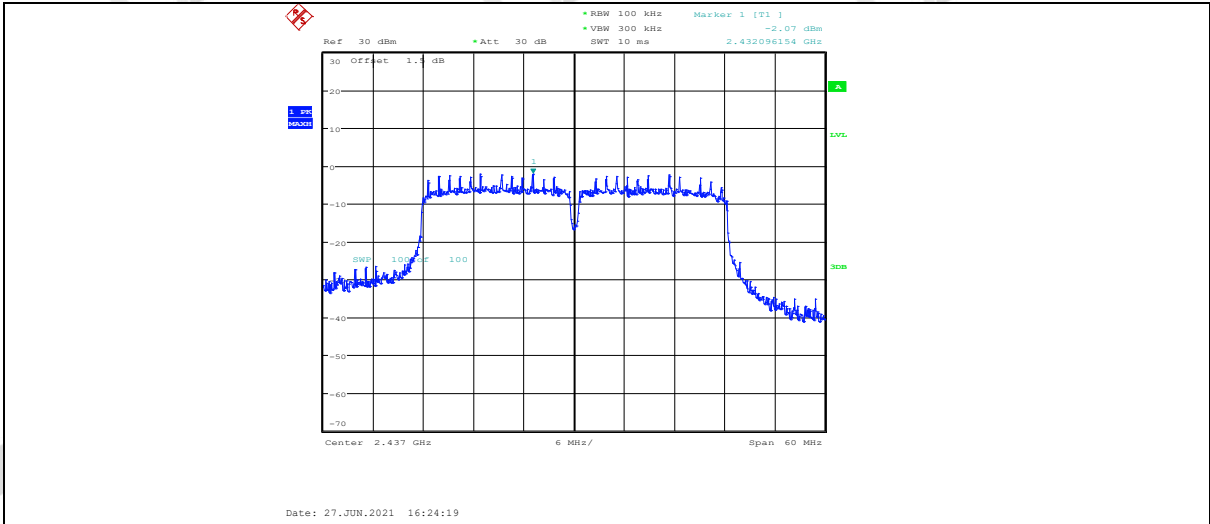


11N40MIMO_ANT1_2437_30~1000

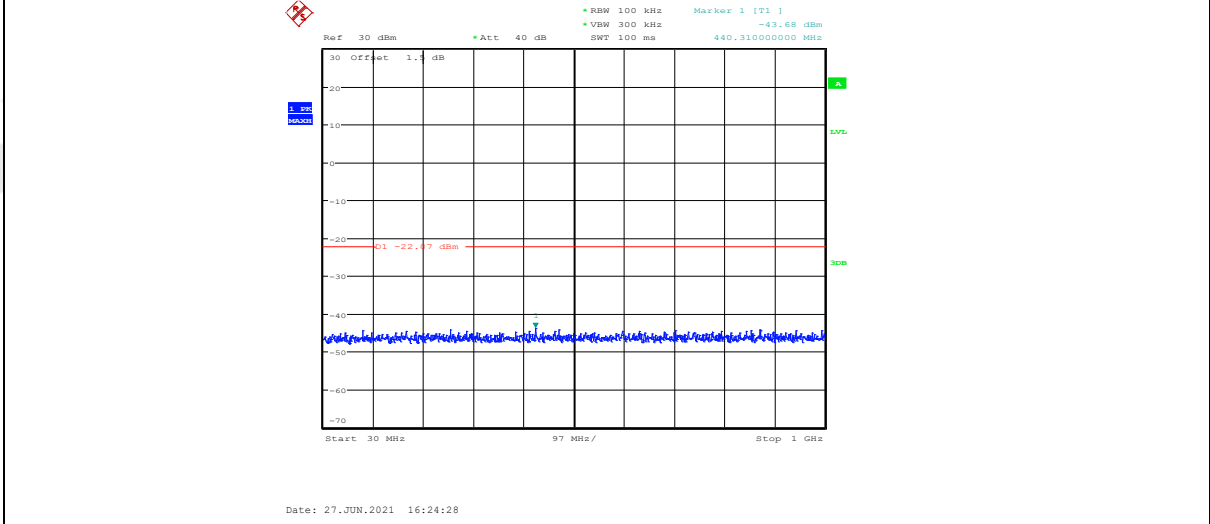


11N40MIMO_ANT1_2437_1000~26500

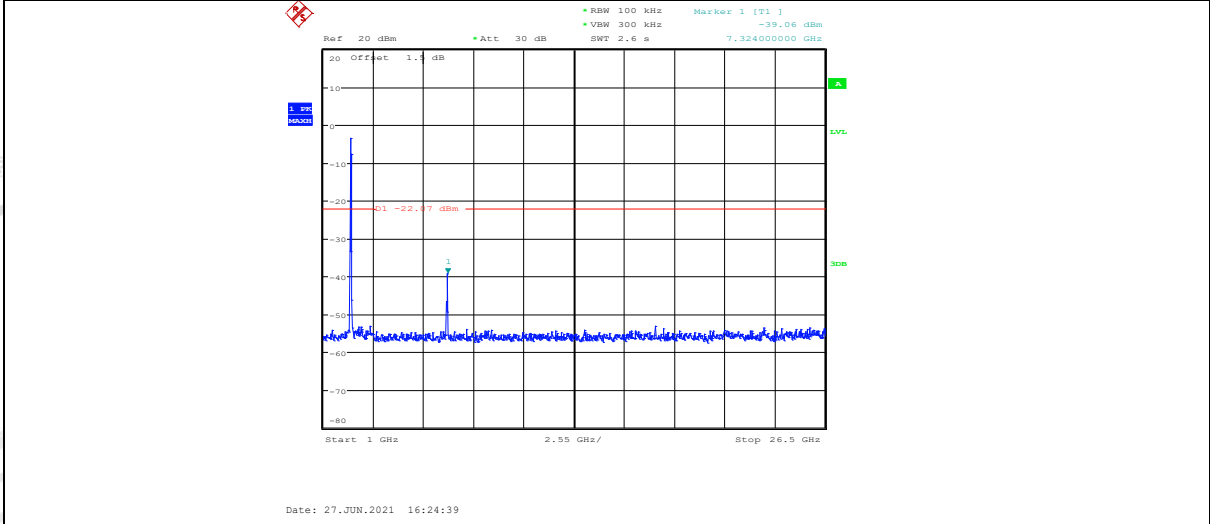


11N40MIMO_ANT2_2437_Ref

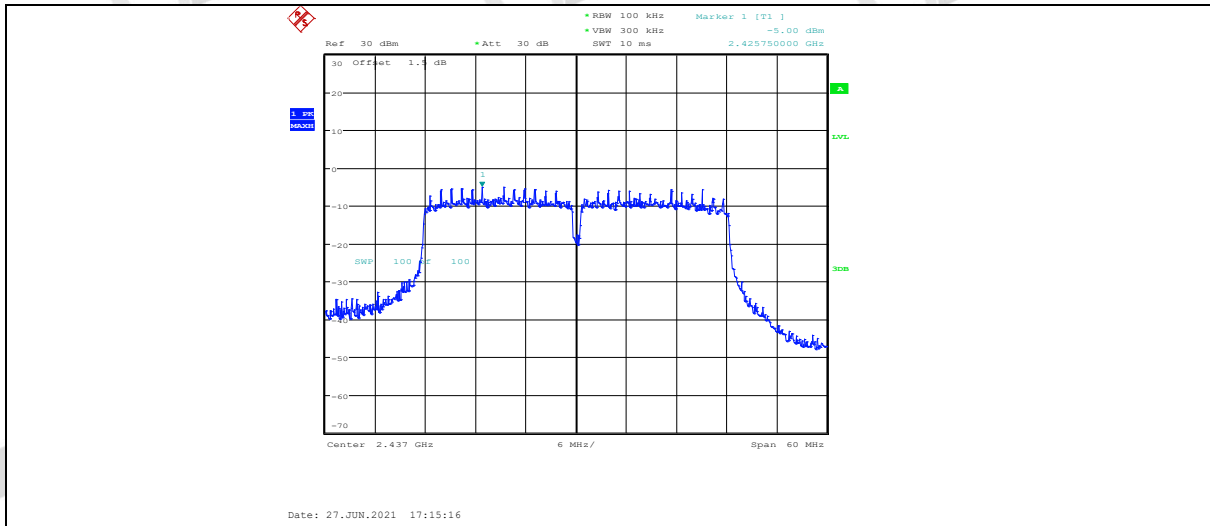


11N40MIMO_ANT2_2437_30~1000

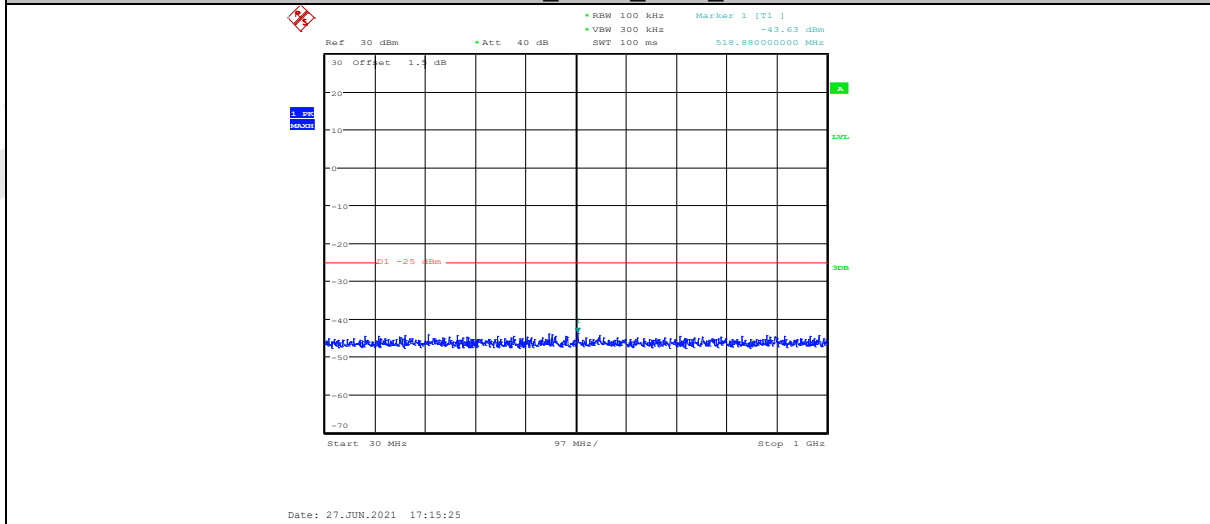


11N40MIMO_ANT2_2437_1000~26500

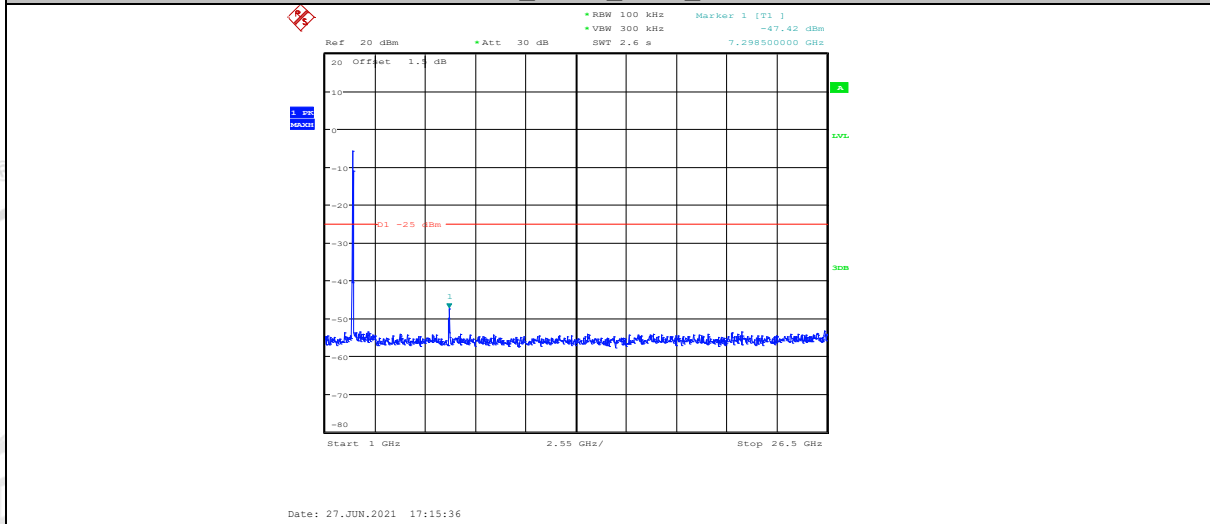


11N40MIMO_ANT1_2452_Ref

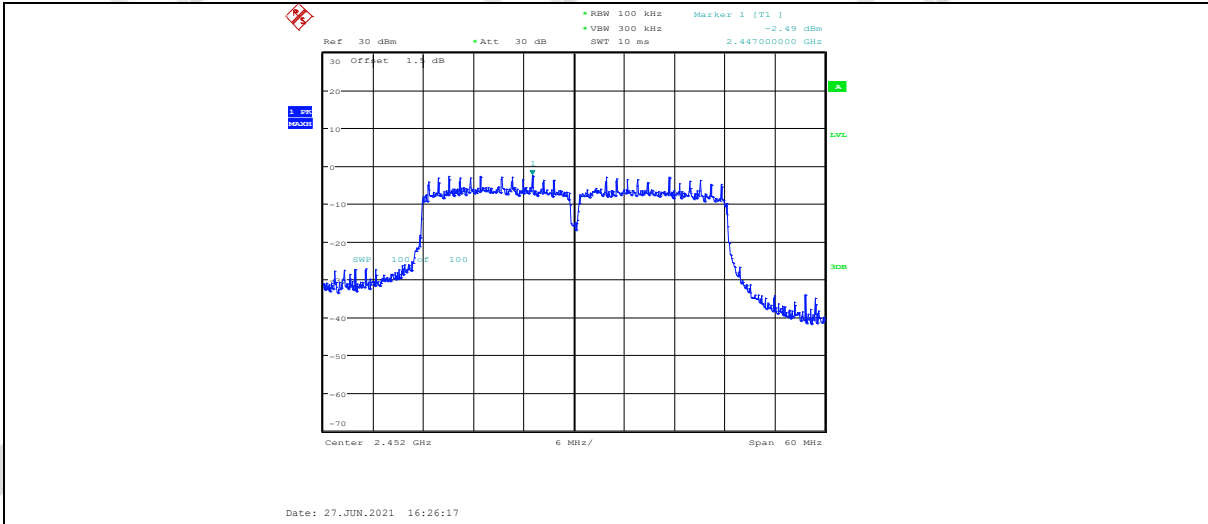


11N40MIMO_ANT1_2452_30~1000

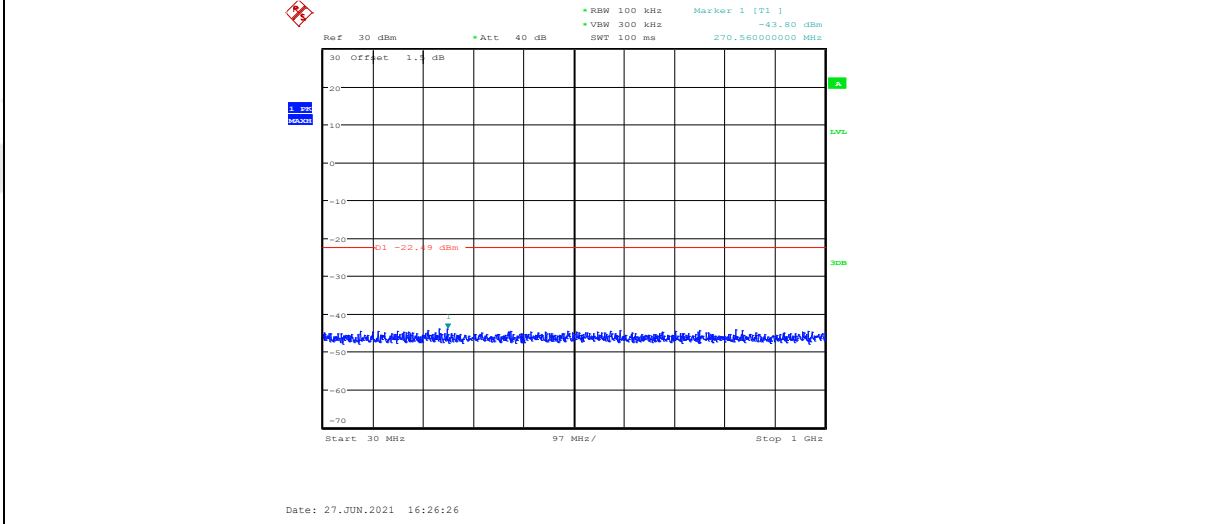


11N40MIMO_ANT1_2452_1000~26500

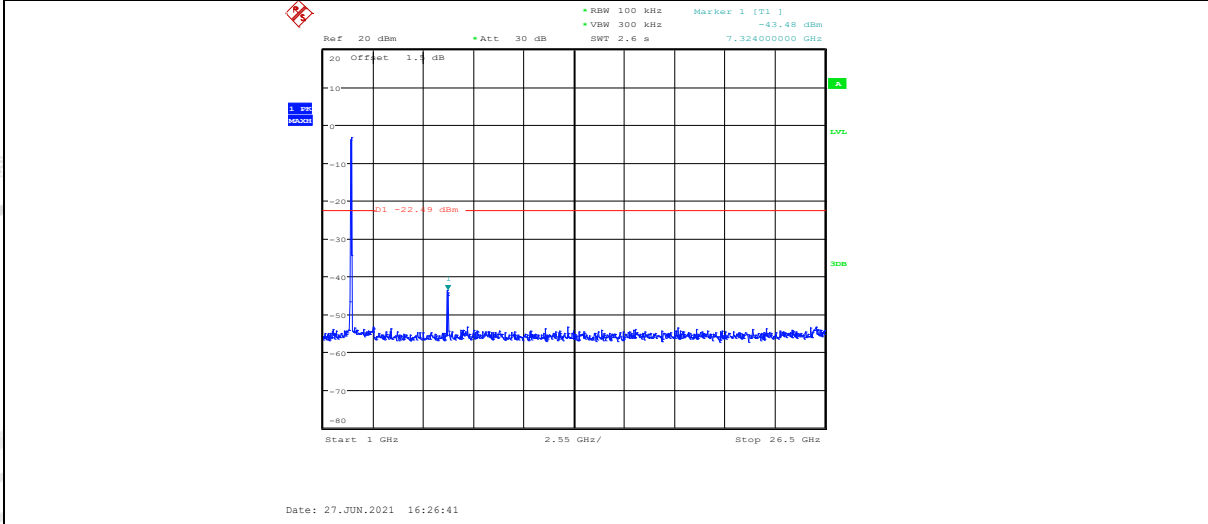


11N40MIMO_ANT2_2452_Ref

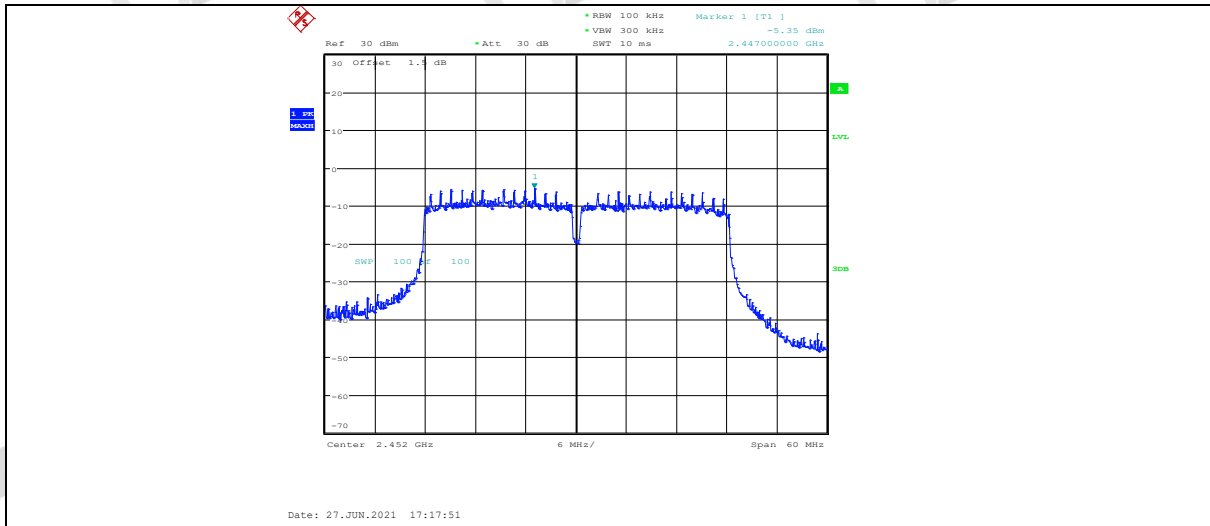

11N40MIMO_ANT2_2452_30~1000

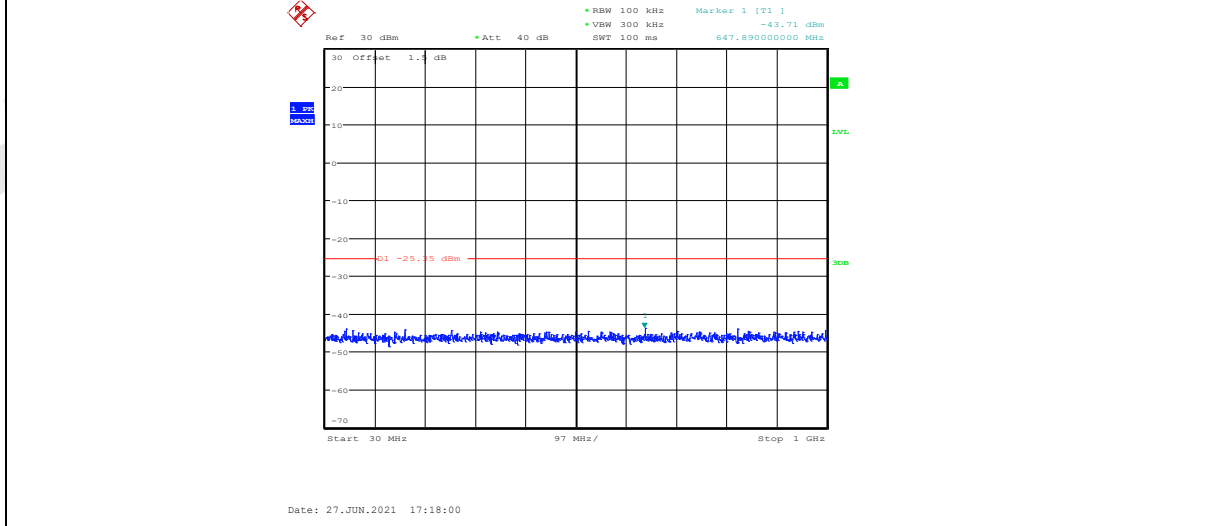


11N40MIMO_ANT2_2452_1000~26500

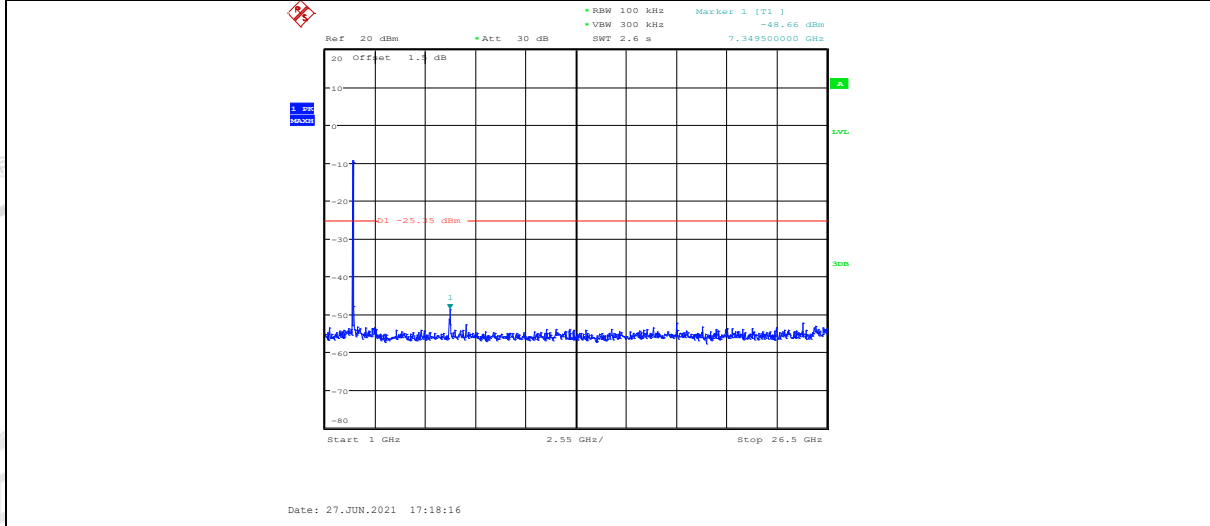


8. Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

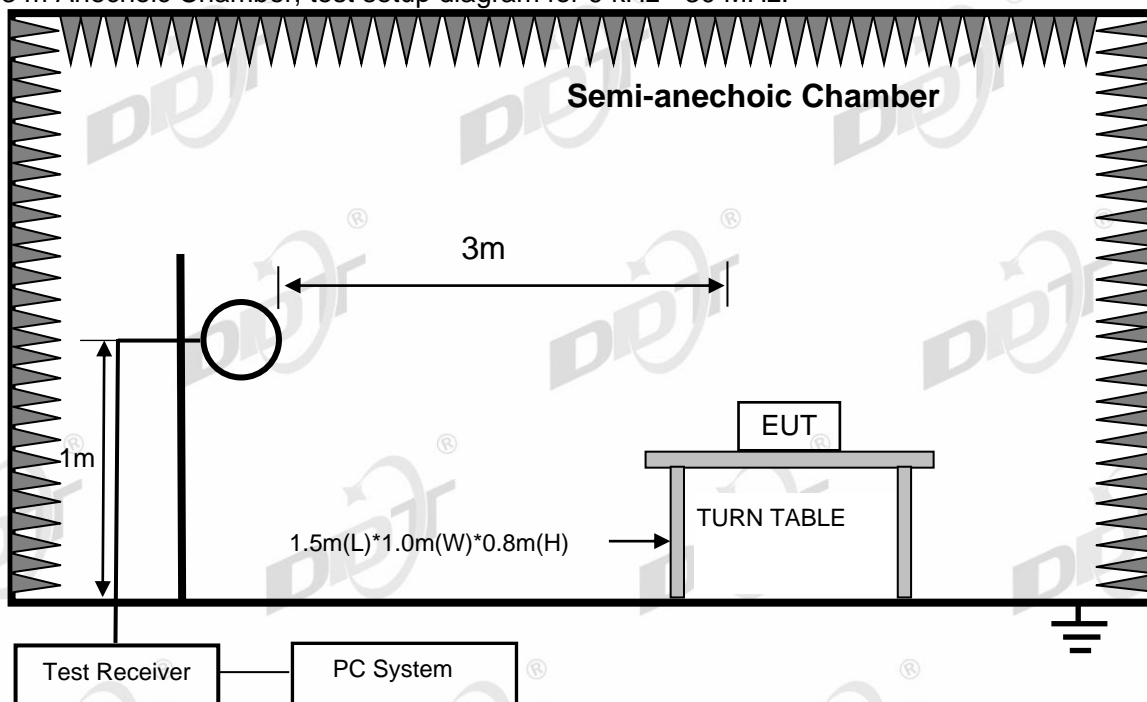

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

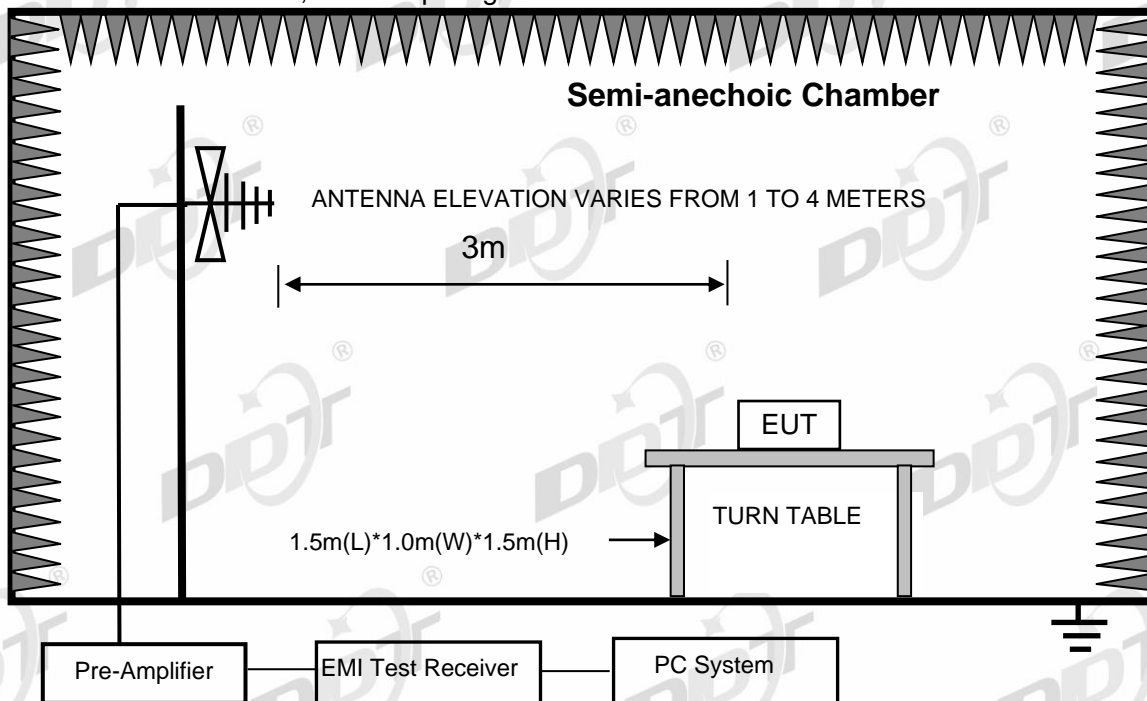

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

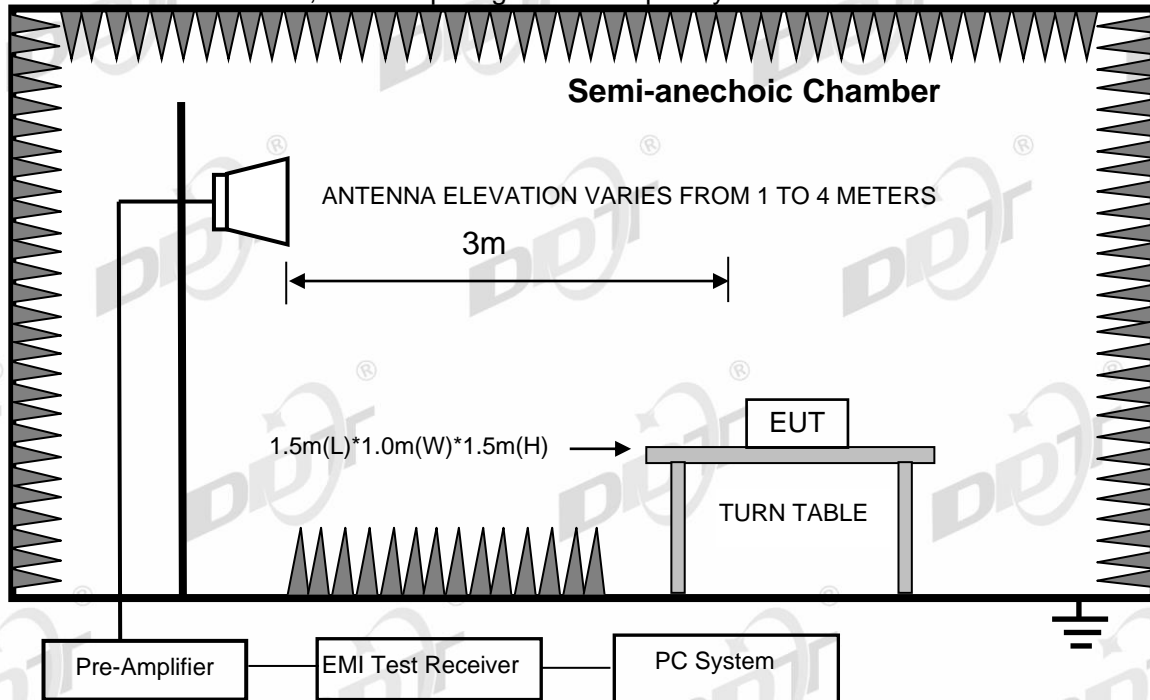

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded.

In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 1/T for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for Non-simultaneous transmission operation, the final test was only performed with EUT working in ANT1, 11g, Tx CH1 mode.

Note3: For simultaneous transmission of multiple channels in the 2.4GHz BT and WLAN bands, or 2.4GHz BT and 5.8G RLAN bands, all possible configurations have been tested, the worst case is shown in the table below and recorded in the report.

Worst Case Simultaneous Transmission Configuration:

Description	Bluetooth	2.4G WLAN/5.8G RLAN
Antenna	Antenna 1	Antenna 2
Channel	39	1/165
Operation Frequency (MHz)	2441	2412/5825
Mode/Modulation	GFSK [®]	802.11g: OFDM/802.11a: OFDM


Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2021-06-30
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.2°C,Humi:53.4%,Press:101.1kPa
Memo : 11g 2412 Antenna1

D:\2021 RE 1# Report data\Q21060707-2E\FCC BELOW 1G.EM6
Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : TX mode
Antenna/Distance : 2020 VULB 9163
 1#/3m/HORIZONTAL

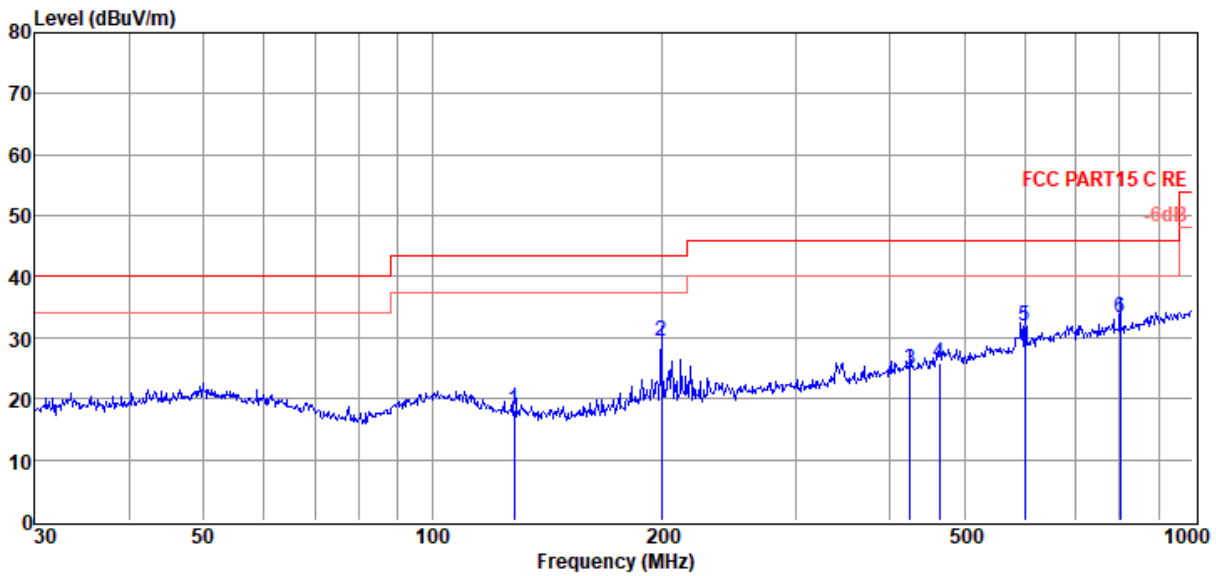

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	128.11	4.16	9.90	4.03	18.09	43.50	-25.41	QP	HORIZONTAL
2	199.99	13.95	11.20	4.33	29.48	43.50	-14.02	QP	HORIZONTAL
3	425.03	3.41	16.21	5.08	24.70	46.00	-21.30	QP	HORIZONTAL
4	463.97	3.91	16.80	5.19	25.90	46.00	-20.10	QP	HORIZONTAL
5	601.43	7.66	18.81	5.56	32.03	46.00	-13.97	QP	HORIZONTAL
6	801.79	6.42	20.82	6.01	33.25	46.00	-12.75	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21060707-2E\FCC BELOW 1G.EM6

Test Date : 2021-06-30

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo


Model Number : MTXMO500ASU2i

Power Supply : DC 12V

Test Mode : TX mode

Condition : Temp:24.2°C,Humi:53.4%,Press:101.1kPa **Antenna/Distance** : 2020 VULB 9163 1#/3m/VERTICAL

Memo : 11g 2412 Antenna1

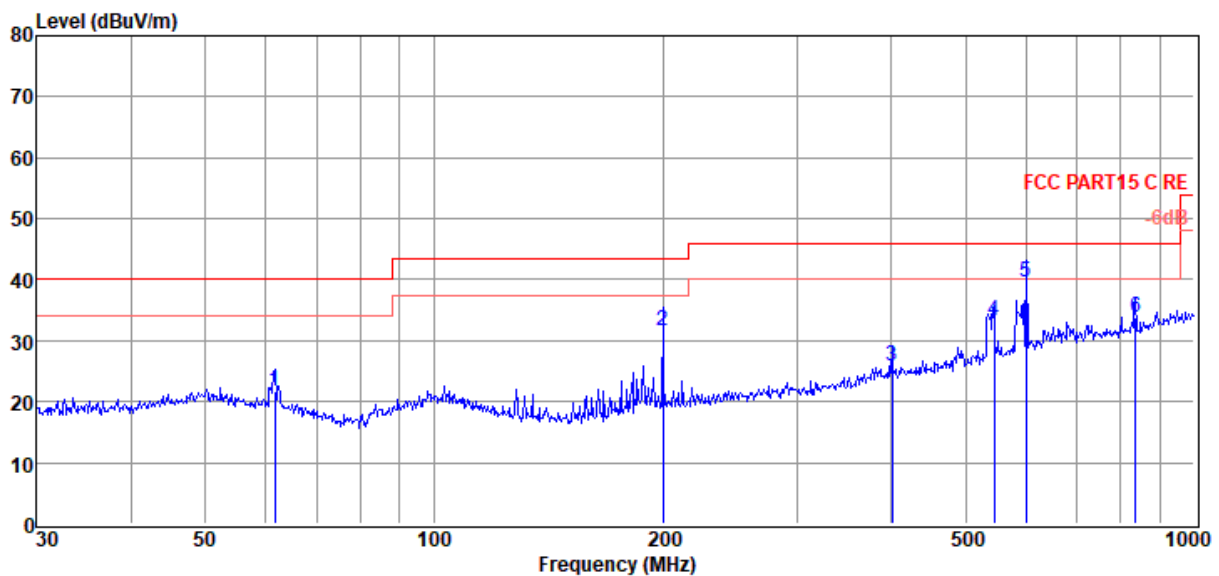

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	61.78	6.11	12.02	3.65	21.78	40.00	-18.22	QP	VERTICAL
2	199.99	16.22	11.20	4.33	31.75	43.50	-11.75	QP	VERTICAL
3	400.43	5.12	15.81	5.01	25.94	46.00	-20.06	QP	VERTICAL
4	545.18	9.72	18.01	5.42	33.15	46.00	-12.85	QP	VERTICAL
5	601.43	15.13	18.81	5.56	39.50	46.00	-6.50	QP	VERTICAL
6	836.24	6.34	21.25	6.10	33.69	46.00	-12.31	QP	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2021-06-30
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.2°C,Humi:53.4%,Press:101.1kPa
Memo : simultaneous transmission 2.4G WIFI+BT
D:\2021 RE 1# Report data\Q21060707-2E\FCC BELOW 1G.EM6
Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : TX mode
Antenna/Distance : 2020 VULB 9163
 1#/3m/VERTICAL

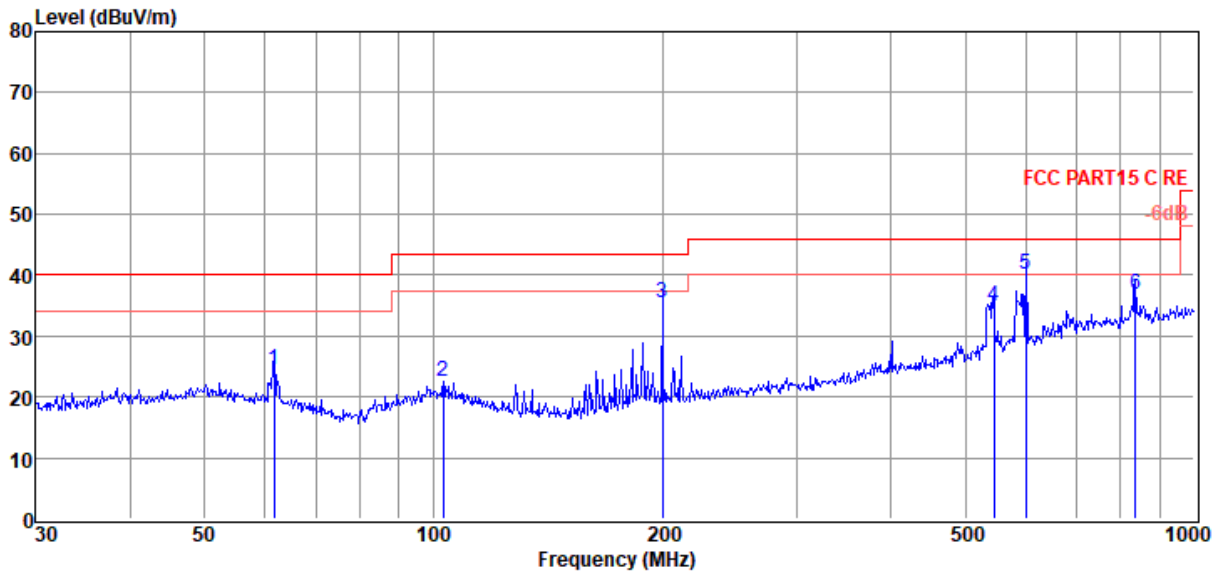

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	61.78	8.66	12.02	3.65	24.33	40.00	-15.67	QP	VERTICAL
2	103.08	5.83	12.88	3.90	22.61	43.50	-20.89	QP	VERTICAL
3	199.99	19.94	11.20	4.33	35.47	43.50	-8.03	QP	VERTICAL
4	545.18	11.40	18.01	5.42	34.83	46.00	-11.17	QP	VERTICAL
5	601.43	15.66	18.81	5.56	40.03	46.00	-5.97	QP	VERTICAL
6	836.24	9.55	21.25	6.10	36.90	46.00	-9.10	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21060707-2E\FCC BELOW 1G.EM6

Test Date : 2021-06-30

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : TX mode

Condition : Temp:24.2°C,Humi:53.4%,Press:101.1kPa

Antenna/Distance : 2020 VULB 9163
1#/3m/HORIZONTAL

Memo : simultaneous transmission 2.4G WIFI+BT

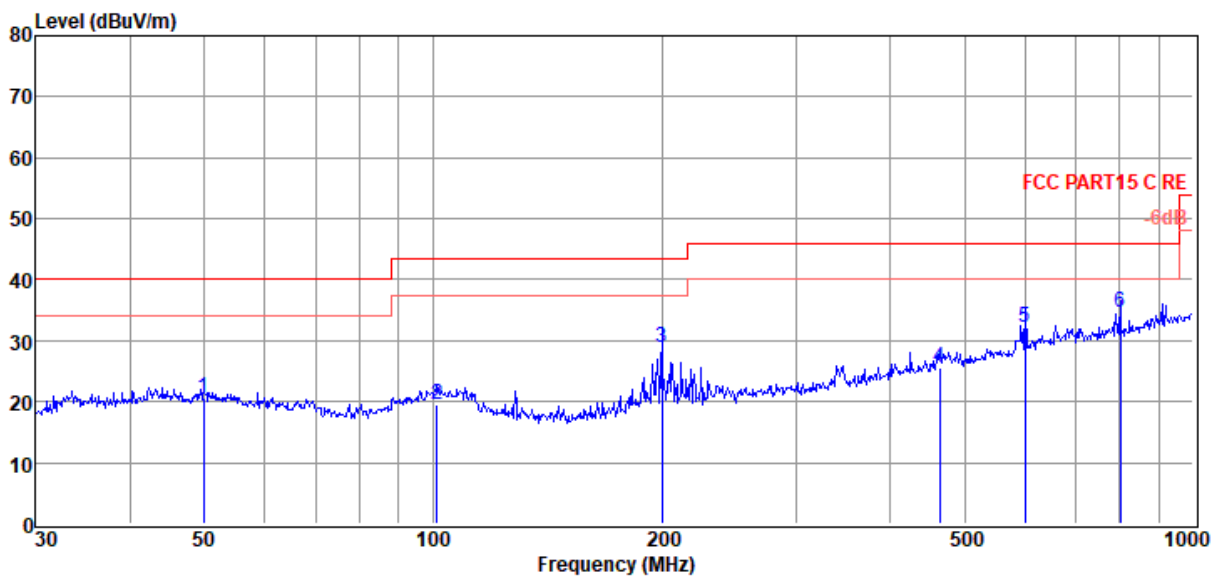

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	49.88	3.35	13.68	3.57	20.60	40.00	-19.40	QP	HORIZONTAL
2	101.29	2.52	13.01	3.89	19.42	43.50	-24.08	QP	HORIZONTAL
3	199.99	13.36	11.20	4.33	28.89	43.50	-14.61	QP	HORIZONTAL
4	463.97	3.64	16.80	5.19	25.63	46.00	-20.37	QP	HORIZONTAL
5	601.43	7.77	18.81	5.56	32.14	46.00	-13.86	QP	HORIZONTAL
6	801.79	7.76	20.82	6.01	34.59	46.00	-11.41	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

Freq (MHz)	Read level (dB μ V)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector type	Polarization
CH1									
4961.00	48.53	32.62	43.23	6.99	44.91	74.00	-29.09	Peak	HORIZONTAL
7236.00	51.67	36.68	42.83	8.39	53.91	74.00	-20.09	Peak	HORIZONTAL
7236.00	48.20	36.68	42.83	8.39	50.44	54.00	-3.56	Average	HORIZONTAL
9551.00	45.53	38.80	42.03	9.72	52.02	74.00	-21.98	Peak	HORIZONTAL
11795.00	46.29	39.68	41.70	11.09	55.36	74.00	-18.64	Peak	HORIZONTAL
11795.00	36.23	39.68	41.70	11.09	45.30	54.00	-8.70	Average	HORIZONTAL
14209.00	44.21	41.42	42.33	12.18	55.48	74.00	-18.52	Peak	HORIZONTAL
14209.00	35.47	41.42	42.33	12.18	46.74	54.00	-7.26	Average	HORIZONTAL
17694.00	42.01	46.71	42.41	13.90	60.21	74.00	-13.79	Peak	HORIZONTAL
17694.00	31.71	46.71	42.41	13.90	49.91	54.00	-4.09	Average	HORIZONTAL
4824.00	51.06	32.35	43.33	6.82	46.90	74.00	-27.10	Peak	VERTICAL
7236.00	52.03	36.68	42.83	8.39	54.27	74.00	-19.73	Peak	VERTICAL
7236.00	48.50	36.68	42.83	8.39	50.74	54.00	-3.26	Average	VERTICAL
9840.00	46.28	38.80	42.14	10.09	53.03	74.00	-20.97	Peak	VERTICAL
14039.00	44.84	41.48	42.47	12.27	56.12	74.00	-17.88	Peak	VERTICAL
14039.00	35.08	41.48	42.47	12.27	46.36	54.00	-7.64	Average	VERTICAL
17694.00	42.17	46.71	42.41	13.90	60.37	74.00	-13.63	Peak	VERTICAL
17694.00	32.27	46.71	42.41	13.90	50.47	54.00	-3.53	Average	VERTICAL
CH6									
5165.00	47.93	32.77	43.25	7.07	44.52	74.00	-29.48	Peak	HORIZONTAL
8021.00	47.67	37.90	42.29	8.64	51.92	74.00	-22.08	Peak	HORIZONTAL
10435.00	46.32	39.50	42.51	10.35	53.66	74.00	-20.34	Peak	HORIZONTAL
13801.00	45.08	41.22	42.60	12.01	55.71	74.00	-18.29	Peak	HORIZONTAL
13801.00	35.17	41.22	42.60	12.01	45.80	54.00	-8.20	Average	HORIZONTAL
15705.00	44.12	39.35	42.13	12.49	53.83	74.00	-20.17	Peak	HORIZONTAL
17881.00	41.71	47.50	42.47	14.35	61.09	74.00	-12.91	Peak	HORIZONTAL
17881.00	31.27	47.50	42.47	14.35	50.65	54.00	-3.35	Average	HORIZONTAL
4995.00	47.52	32.69	43.20	7.03	44.04	74.00	-29.96	Peak	VERTICAL
8021.00	46.69	37.90	42.29	8.64	50.94	74.00	-23.06	Peak	VERTICAL
10860.00	45.21	39.74	42.81	10.51	52.65	74.00	-21.35	Peak	VERTICAL
14039.00	44.46	41.48	42.47	12.27	55.74	74.00	-18.26	Peak	VERTICAL
14039.00	33.98	41.48	42.47	12.27	45.26	54.00	-8.74	Average	VERTICAL
15960.00	43.77	39.05	42.28	12.63	53.17	74.00	-20.83	Peak	VERTICAL
17881.00	43.23	47.50	42.47	14.35	62.61	74.00	-11.39	Peak	VERTICAL
17881.00	31.07	47.50	42.47	14.35	50.45	54.00	-3.55	Average	VERTICAL
CH11									
5131.00	48.00	32.75	43.24	7.06	44.57	74.00	-29.43	Peak	HORIZONTAL
7375.00	46.83	36.90	42.73	8.63	49.63	74.00	-24.37	Peak	HORIZONTAL
10129.00	45.64	39.01	42.29	10.30	52.66	74.00	-21.34	Peak	HORIZONTAL
12084.00	46.44	39.48	41.54	11.25	55.63	74.00	-18.37	Peak	HORIZONTAL
12084.00	35.87	39.48	41.54	11.25	45.06	54.00	-8.94	Average	HORIZONTAL
14124.00	43.84	41.45	42.40	12.23	55.12	74.00	-18.88	Peak	HORIZONTAL
14124.00	34.47	41.45	42.40	12.23	45.75	54.00	-8.25	Average	HORIZONTAL


17779.00	41.54	47.07	42.44	14.10	60.27	74.00	-13.73	Peak	HORIZONTAL
17779.00	31.68	47.07	42.44	14.10	50.41	54.00	-3.59	Average	HORIZONTAL
4910.00	48.05	32.52	43.27	6.93	44.23	74.00	-29.77	Peak	VERTICAL
7511.00	47.10	37.12	42.63	8.84	50.43	74.00	-23.57	Peak	VERTICAL
10435.00	45.44	39.50	42.51	10.35	52.78	74.00	-21.22	Peak	VERTICAL
12169.00	45.65	39.36	41.68	11.42	54.75	74.00	-19.25	Peak	VERTICAL
12169.00	36.98	39.36	41.68	11.42	46.08	54.00	-7.92	Average	VERTICAL
14889.00	43.70	40.60	41.79	12.86	55.37	74.00	-18.63	Peak	VERTICAL
14889.00	34.87	40.60	41.79	12.86	46.54	54.00	-7.46	Average	VERTICAL
17881.00	41.98	47.50	42.47	14.35	61.36	74.00	-12.64	Peak	VERTICAL
17881.00	30.87	47.50	42.47	14.35	50.25	54.00	-3.75	Average	VERTICAL
simultaneous transmission Tx mode BT+2.4G WLAN									
8089.00	47.16	37.92	42.25	8.66	51.49	74.00	-22.51	Peak	HORIZONTAL
9789.00	45.75	38.80	42.12	10.02	52.45	74.00	-21.55	Peak	HORIZONTAL
11778.00	45.82	39.69	41.72	11.09	54.88	74.00	-19.12	Peak	HORIZONTAL
11778.00	36.88	39.69	41.72	11.09	45.94	54.00	-8.06	Average	HORIZONTAL
14090.00	43.46	41.46	42.43	12.24	54.73	74.00	-19.27	Peak	HORIZONTAL
14090.00	35.89	41.46	42.43	12.24	47.16	54.00	-6.84	Average	HORIZONTAL
16844.00	42.70	41.79	42.22	13.67	55.94	74.00	-18.06	Peak	HORIZONTAL
16844.00	36.18	41.79	42.22	13.67	49.42	54.00	-4.58	Average	HORIZONTAL
17711.00	42.60	46.79	42.42	13.94	60.91	74.00	-13.09	Peak	HORIZONTAL
17711.00	32.42	46.79	42.42	13.94	50.73	54.00	-3.27	Average	HORIZONTAL
7783.00	47.25	37.55	42.44	8.72	51.08	74.00	-22.92	Peak	VERTICAL
9925.00	45.41	38.80	42.17	10.19	52.23	74.00	-21.77	Peak	VERTICAL
11540.00	45.92	39.78	42.07	11.12	54.75	74.00	-19.25	Peak	VERTICAL
11540.00	37.68	39.78	42.07	11.12	46.51	54.00	-7.49	Average	VERTICAL
13801.00	44.24	41.22	42.60	12.01	54.87	74.00	-19.13	Peak	VERTICAL
13801.00	36.88	41.22	42.60	12.01	47.51	54.00	-6.49	Average	VERTICAL
16470.00	43.91	40.97	42.25	13.14	55.77	74.00	-18.23	Peak	VERTICAL
16470.00	37.44	40.97	42.25	13.14	49.30	54.00	-4.70	Average	VERTICAL
17898.00	41.54	47.57	42.47	14.39	61.03	74.00	-12.97	Peak	VERTICAL
17898.00	31.11	47.57	42.47	14.39	50.60	54.00	-3.40	Average	VERTICAL

Note:

- 1.30MHz~25GHz: (For Non-simultaneous transmission scan with 11b mode ANT 1 and ANT 2, 11g mode ANT 1 and ANT 2, 11n HT20 mode ANT 1 and ANT 2, 11n HT40 mode ANT 1 and ANT 2, the worst case is 11g ANT 1 mode, for simultaneous transmission the worst is Bluetooth GFSK and 802.11b OFDM.)
2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9. Radiated Band Edge Compliance

9.1. Block diagram of test setup

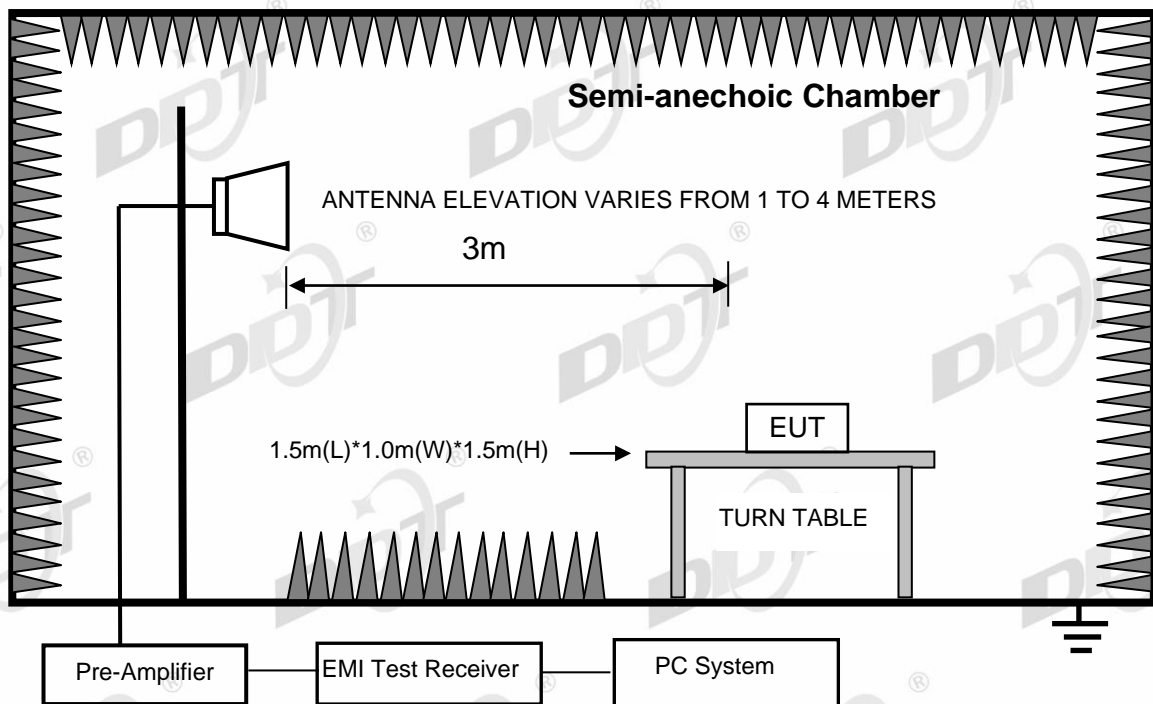

9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20 dB below the fundamental emissions or comply with FCC 15.209 limits.

9.3. Test procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2430 MHz to 2500 MHz, 2310 MHz to 2450 MHz and 2450 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

9.4. Test result

Pass. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11b 2412 ANT1 POWER12 VBW:10Hz

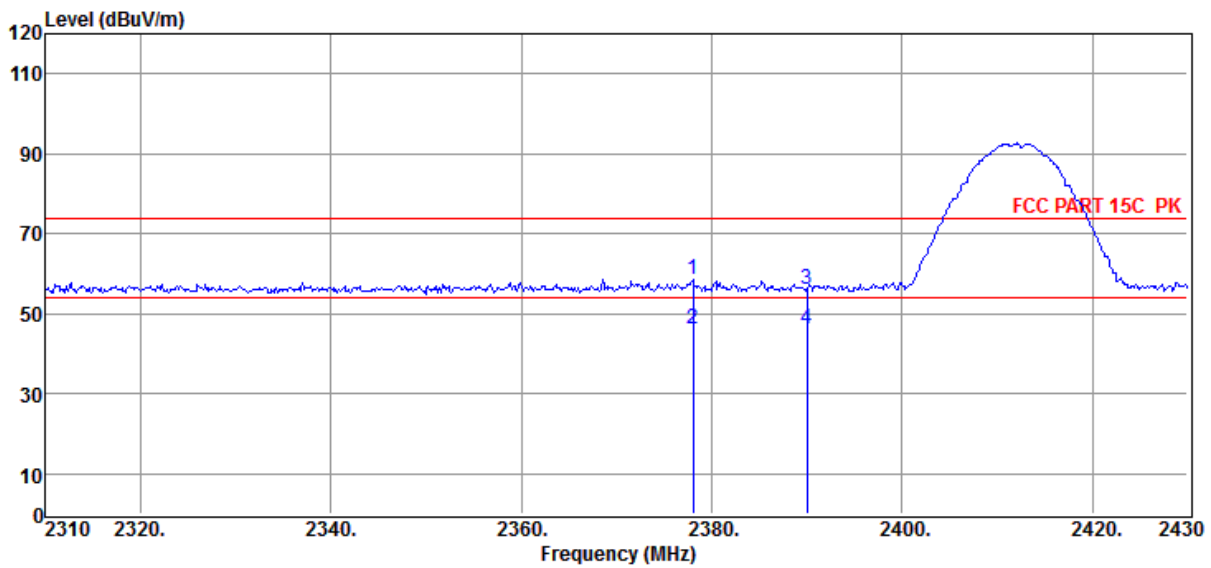

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2378.04	25.99	27.88	0.00	4.79	58.66	74.00	-15.34	Peak	VERTICAL
2	2378.04	13.40	27.88	0.00	4.79	46.07	54.00	-7.93	Average	VERTICAL
3	2390.00	23.46	27.89	0.00	4.80	56.15	74.00	-17.85	Peak	VERTICAL
4	2390.00	13.46	27.89	0.00	4.80	46.15	54.00	-7.85	Average	VERTICAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11b 2412 ANT1 POWER12 VBW:10Hz

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

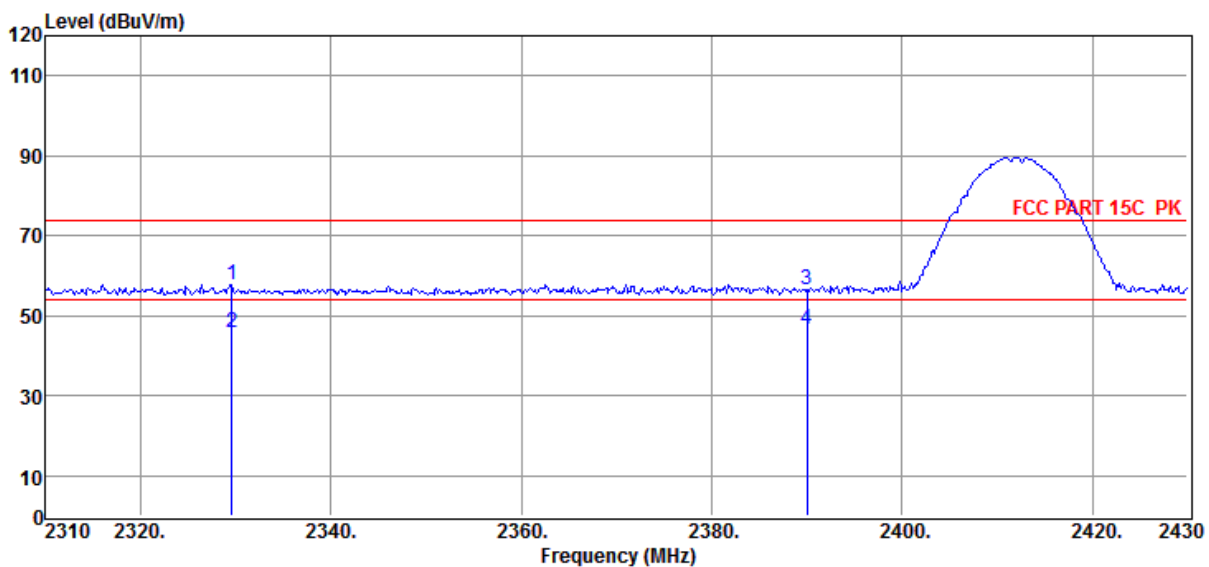

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2329.56	25.19	27.83	0.00	4.73	57.75	74.00	-16.25	Peak	HORIZONTAL
2	2329.56	13.37	27.83	0.00	4.73	45.93	54.00	-8.07	Average	HORIZONTAL
3	2390.00	23.92	27.89	0.00	4.80	56.61	74.00	-17.39	Peak	HORIZONTAL
4	2390.00	13.88	27.89	0.00	4.80	46.57	54.00	-7.43	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11b 2412 ANT2 POWER12 VBW:10Hz

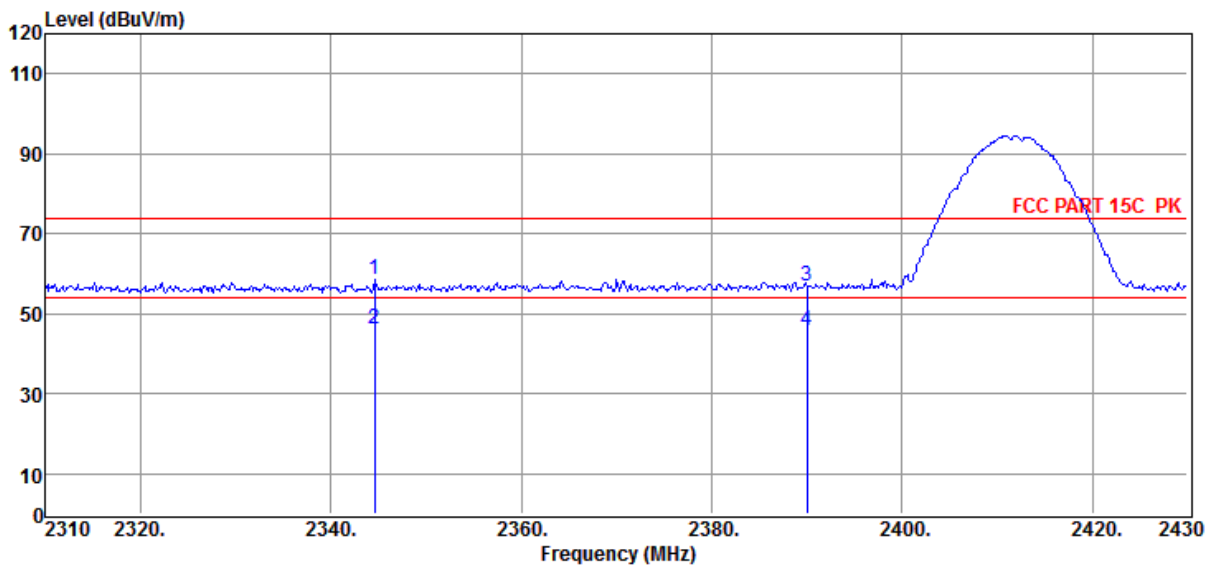

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2344.56	26.15	27.84	0.00	4.75	58.74	74.00	-15.26	Peak	VERTICAL
2	2344.56	13.57	27.84	0.00	4.75	46.16	54.00	-7.84	Average	VERTICAL
3	2390.04	24.06	27.89	0.00	4.80	56.75	74.00	-17.25	Peak	VERTICAL
4	2390.04	13.20	27.89	0.00	4.80	45.89	54.00	-8.11	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11b 2412 ANT2 POWER12 VBW:10Hz

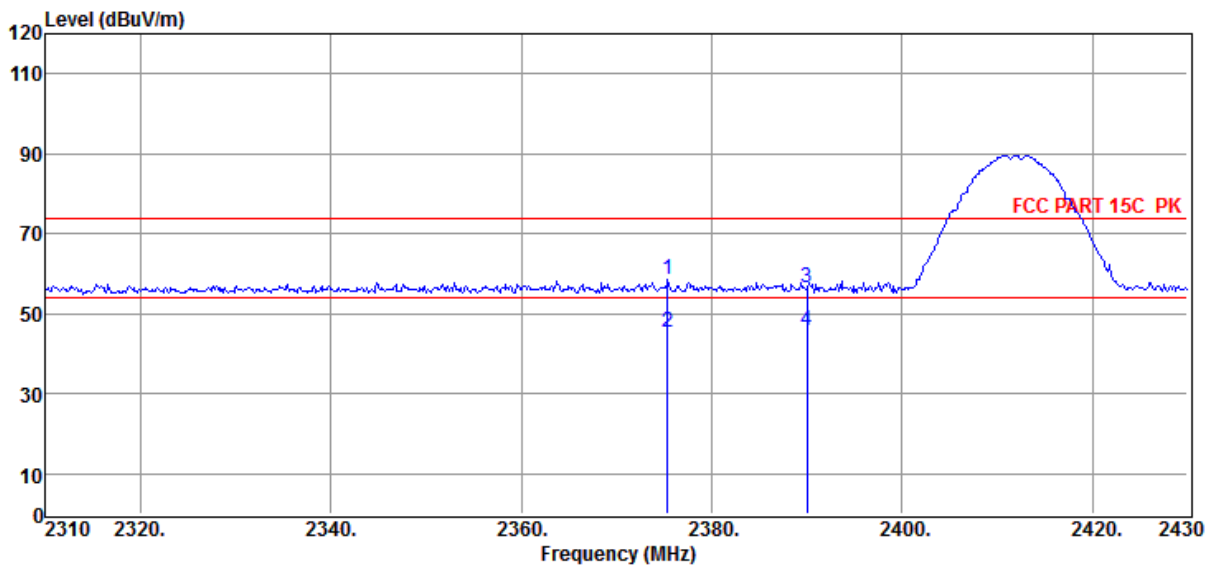

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2375.40	25.92	27.88	0.00	4.78	58.58	74.00	-15.42	Peak	HORIZONTAL
2	2375.40	12.70	27.88	0.00	4.78	45.36	54.00	-8.64	Average	HORIZONTAL
3	2390.04	23.60	27.89	0.00	4.80	56.29	74.00	-17.71	Peak	HORIZONTAL
4	2390.04	13.00	27.89	0.00	4.80	45.69	54.00	-8.31	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11b 2462 ANT1 POWER12 VBW:10Hz

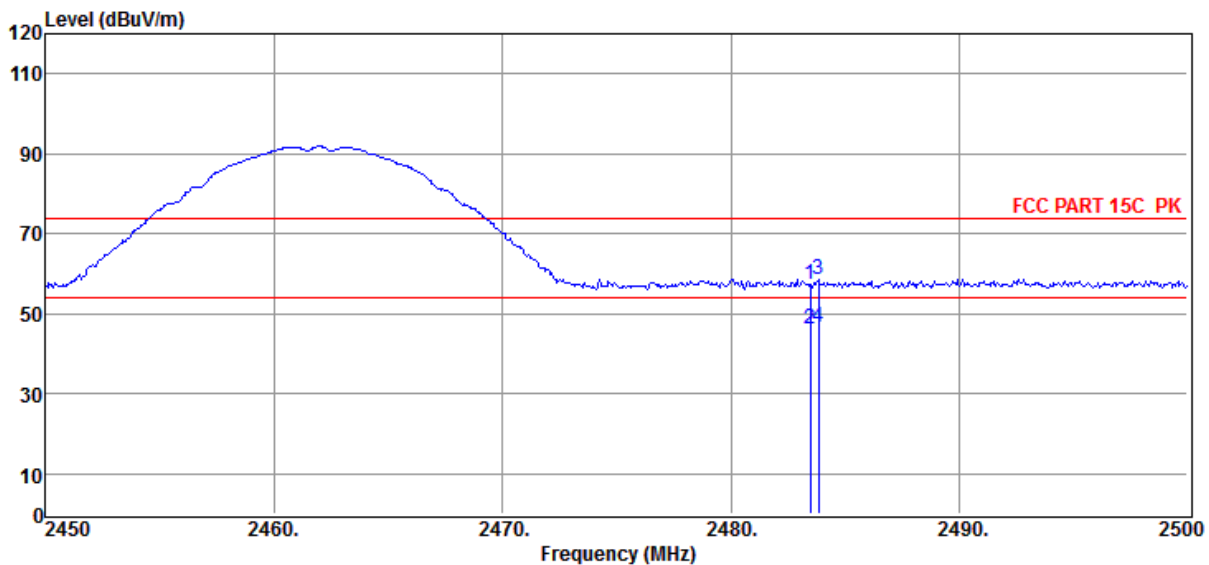

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.41	27.98	0.00	4.90	57.29	74.00	-16.71	Peak	VERTICAL
2	2483.50	13.25	27.98	0.00	4.90	46.13	54.00	-7.87	Average	VERTICAL
3	2483.85	25.85	27.98	0.00	4.90	58.73	74.00	-15.27	Peak	VERTICAL
4	2483.85	13.67	27.98	0.00	4.90	46.55	54.00	-7.45	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11b 2462 ANT1 POWER12 VBW:10Hz

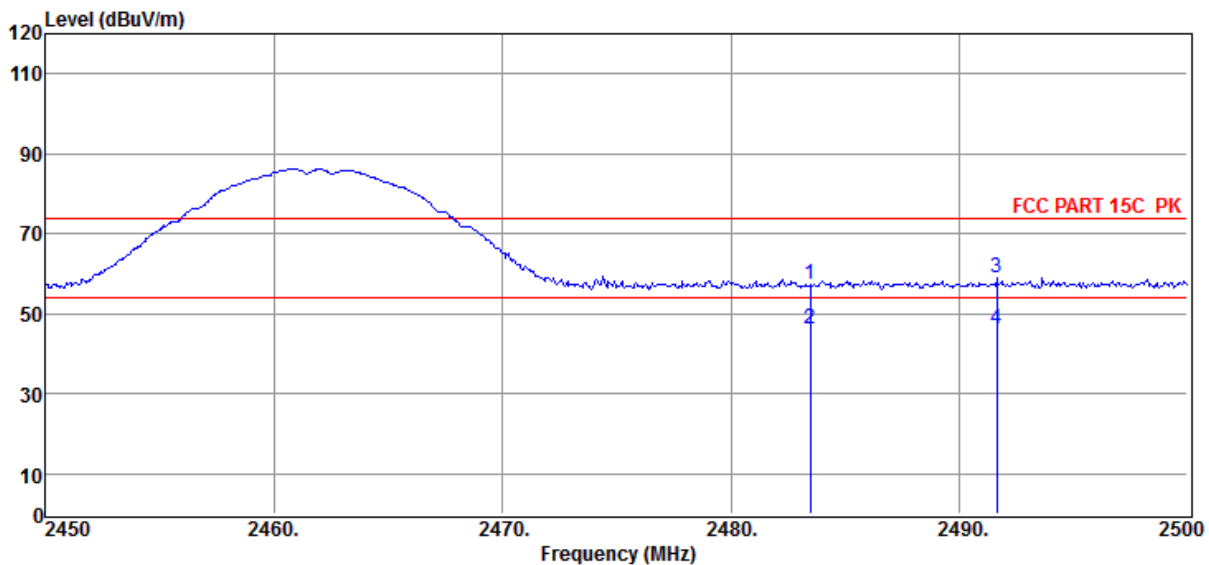

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.28	27.98	0.00	4.90	57.16	74.00	-16.84	Peak	HORIZONTAL
2	2483.50	13.47	27.98	0.00	4.90	46.35	54.00	-7.65	Average	HORIZONTAL
3	2491.65	25.97	27.99	0.00	4.91	58.87	74.00	-15.13	Peak	HORIZONTAL
4	2491.65	13.19	27.99	0.00	4.91	46.09	54.00	-7.91	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11b 2462 ANT2 POWER12 VBW:10Hz

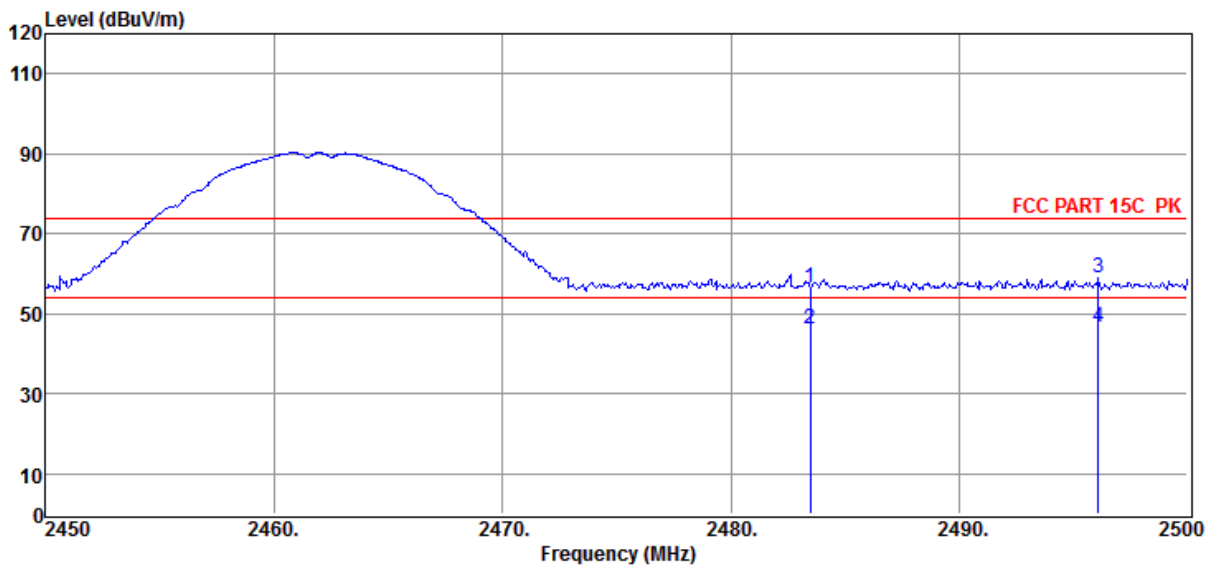

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	23.54	27.98	0.00	4.90	56.42	74.00	-17.58	Peak	VERTICAL
2	2483.50	13.36	27.98	0.00	4.90	46.24	54.00	-7.76	Average	VERTICAL
3	2496.10	25.87	28.00	0.00	4.92	58.79	74.00	-15.21	Peak	VERTICAL
4	2496.10	13.83	28.00	0.00	4.92	46.75	54.00	-7.25	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11b 2462 ANT2 POWER12 VBW:10Hz

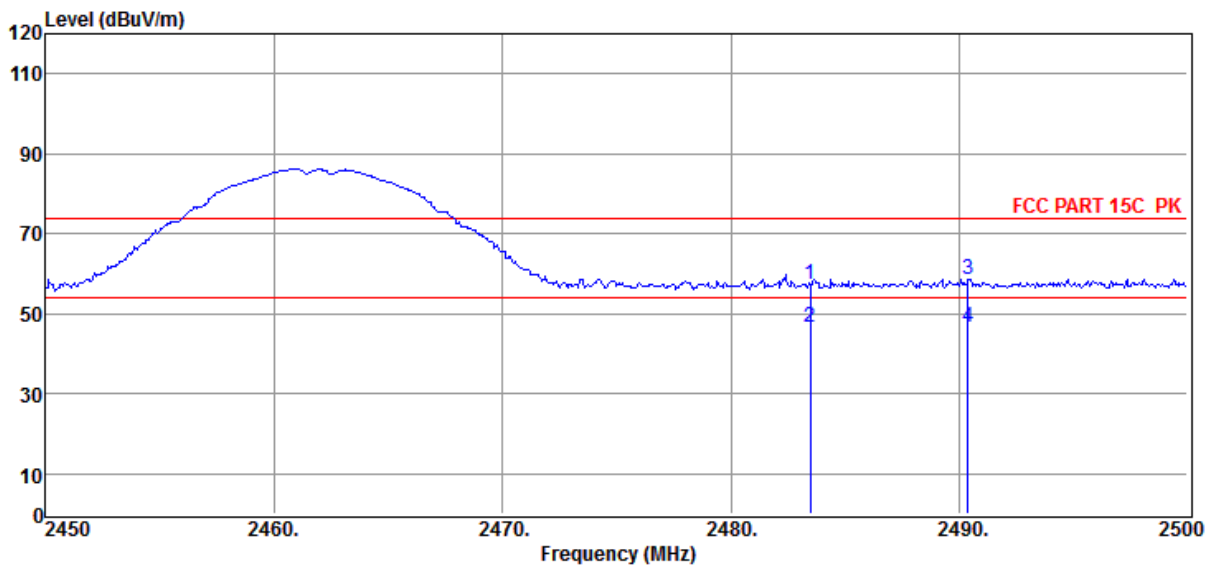

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.24	27.98	0.00	4.90	57.12	74.00	-16.88	Peak	HORIZONTAL
2	2483.50	13.70	27.98	0.00	4.90	46.58	54.00	-7.42	Average	HORIZONTAL
3	2490.40	25.86	27.99	0.00	4.91	58.76	74.00	-15.24	Peak	HORIZONTAL
4	2490.40	13.55	27.99	0.00	4.91	46.45	54.00	-7.55	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11g 2412 Ant1 POWER14 VBW:510Hz

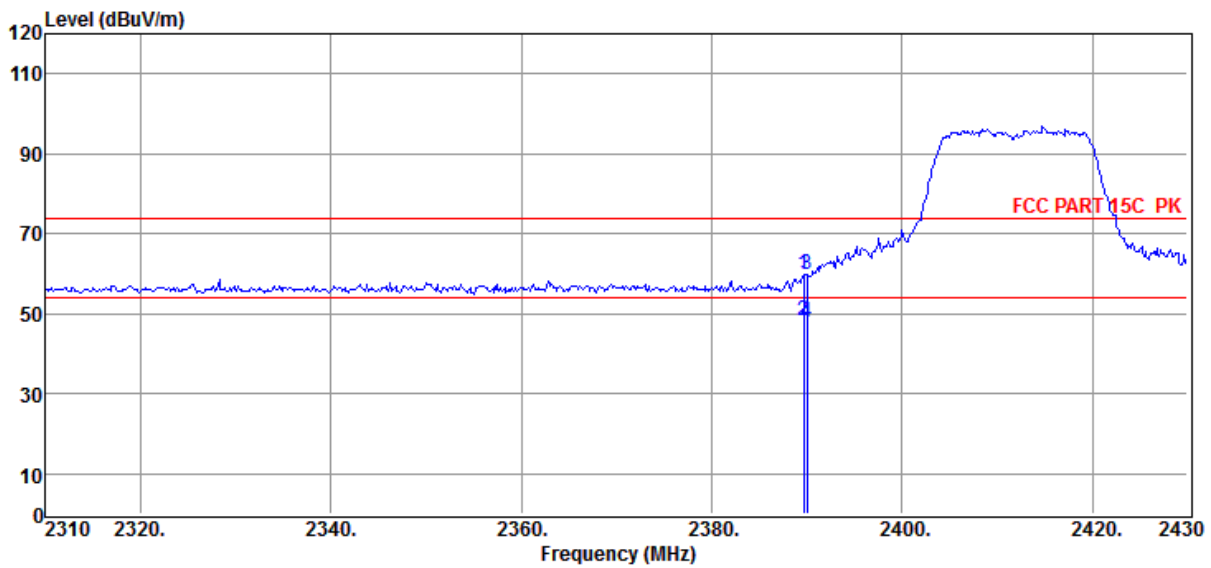

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.68	26.97	27.89	0.00	4.80	59.66	74.00	-14.34	Peak	VERTICAL
2	2389.68	15.43	27.89	0.00	4.80	48.12	54.00	-5.88	Average	VERTICAL
3	2390.00	27.01	27.89	0.00	4.80	59.70	74.00	-14.30	Peak	VERTICAL
4	2390.00	15.20	27.89	0.00	4.80	47.89	54.00	-6.11	Average	VERTICAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11g 2412 Ant1 POWER14 VBW:510Hz

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

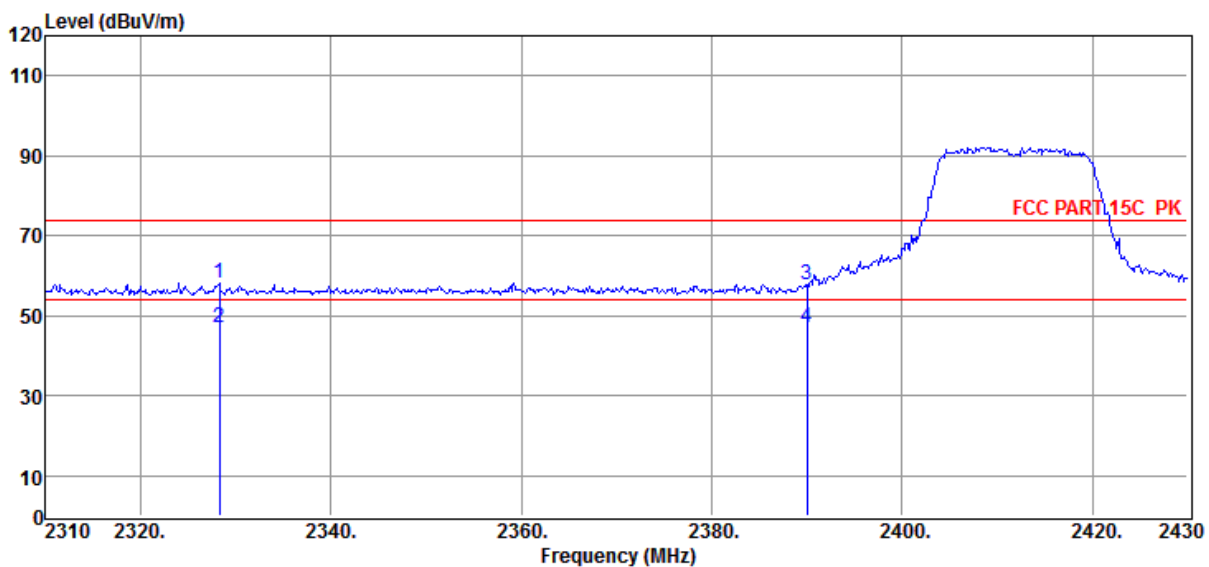

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2328.24	25.68	27.83	0.00	4.73	58.24	74.00	-15.76	Peak	HORIZONTAL
2	2328.24	14.61	27.83	0.00	4.73	47.17	54.00	-6.83	Average	HORIZONTAL
3	2390.00	25.10	27.89	0.00	4.80	57.79	74.00	-16.21	Peak	HORIZONTAL
4	2390.00	14.31	27.89	0.00	4.80	47.00	54.00	-7.00	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11g 2412 Ant2 POWER14 VBW:510Hz

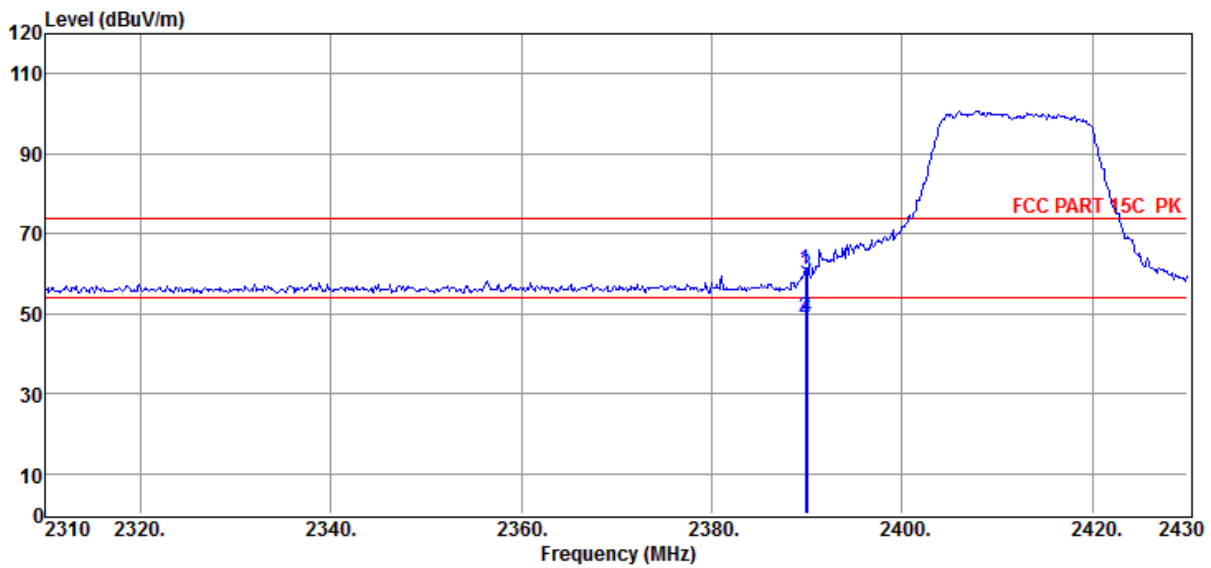


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.80	28.31	27.89	0.00	4.80	61.00	74.00	-13.00	Peak	VERTICAL
2	2389.80	16.20	27.89	0.00	4.80	48.89	54.00	-5.11	Average	VERTICAL
3	2390.00	27.12	27.89	0.00	4.80	59.81	74.00	-14.19	Peak	VERTICAL
4	2390.00	16.21	27.89	0.00	4.80	48.90	54.00	-5.10	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2# D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6
Test Date : 2021-07-09 **Tested By** : Ziqin
EUT : Equipo de Audio y Video para Vehiculo **Model Number** : MTXMO500ASU2i
Power Supply : DC 12V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA9120D/3m/HORIZONTAL
Memo : 11g 2412 Ant2 POWER14 VBW:510Hz

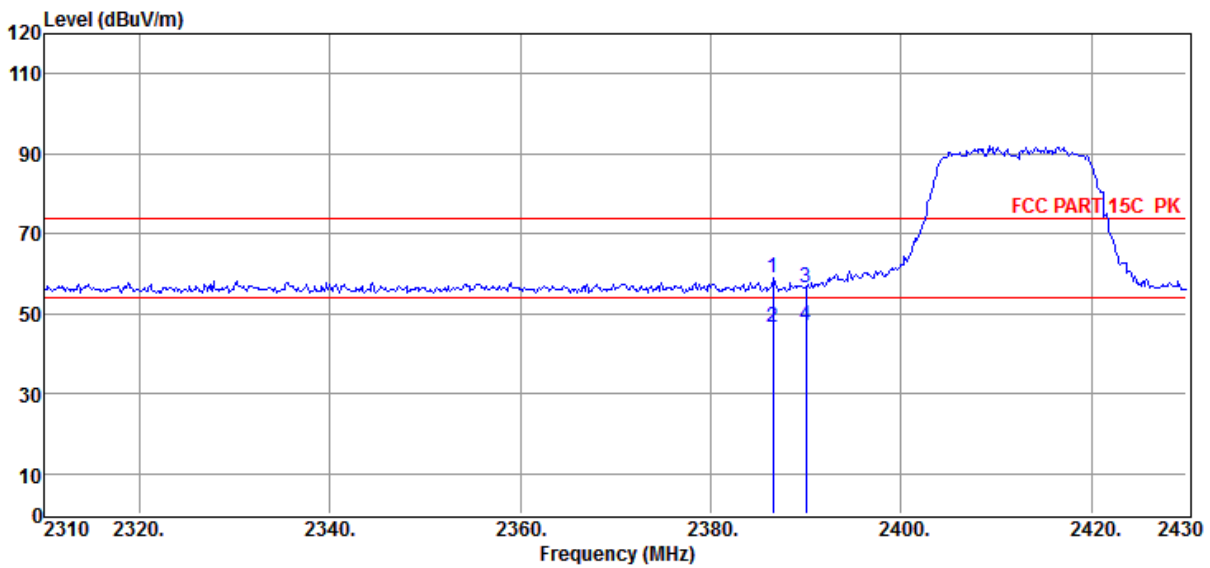

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2386.56	26.16	27.89	0.00	4.80	58.85	74.00	-15.15	Peak	HORIZONTAL
2	2386.56	13.84	27.89	0.00	4.80	46.53	54.00	-7.47	Average	HORIZONTAL
3	2390.00	23.77	27.89	0.00	4.80	56.46	74.00	-17.54	Peak	HORIZONTAL
4	2390.00	14.12	27.89	0.00	4.80	46.81	54.00	-7.19	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

Memo : 11g 2462 Ant1 POWER14 VBW:510Hz

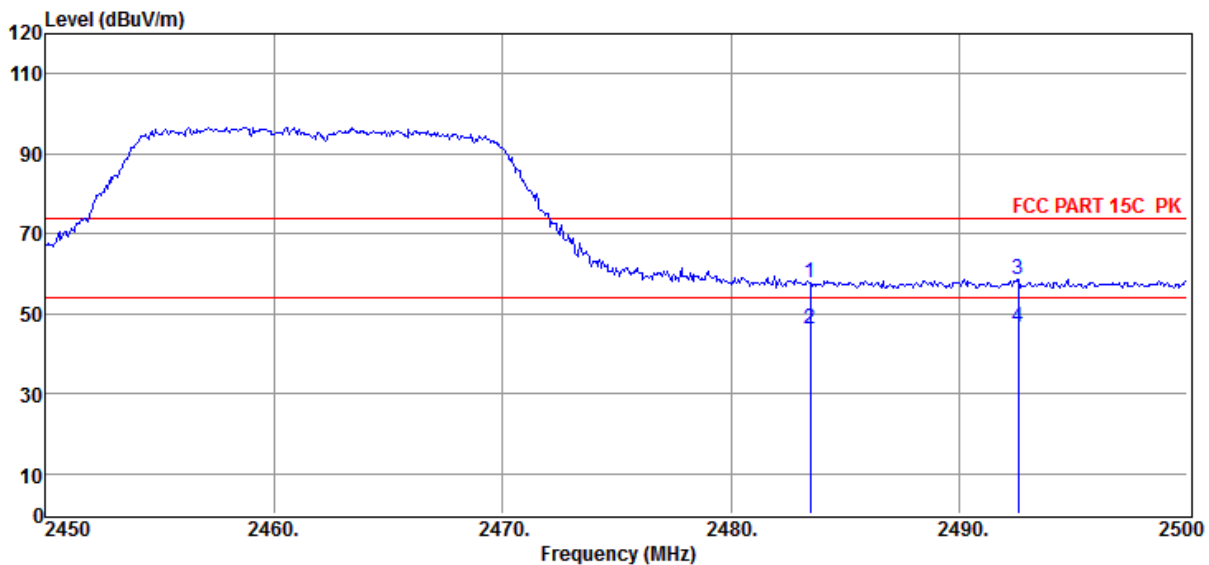

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.82	27.98	0.00	4.90	57.70	74.00	-16.30	Peak	VERTICAL
2	2483.50	13.13	27.98	0.00	4.90	46.01	54.00	-7.99	Average	VERTICAL
3	2492.60	25.74	27.99	0.00	4.91	58.64	74.00	-15.36	Peak	VERTICAL
4	2492.60	13.54	27.99	0.00	4.91	46.44	54.00	-7.56	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11g 2462 Ant1 POWER14 VBW:510Hz

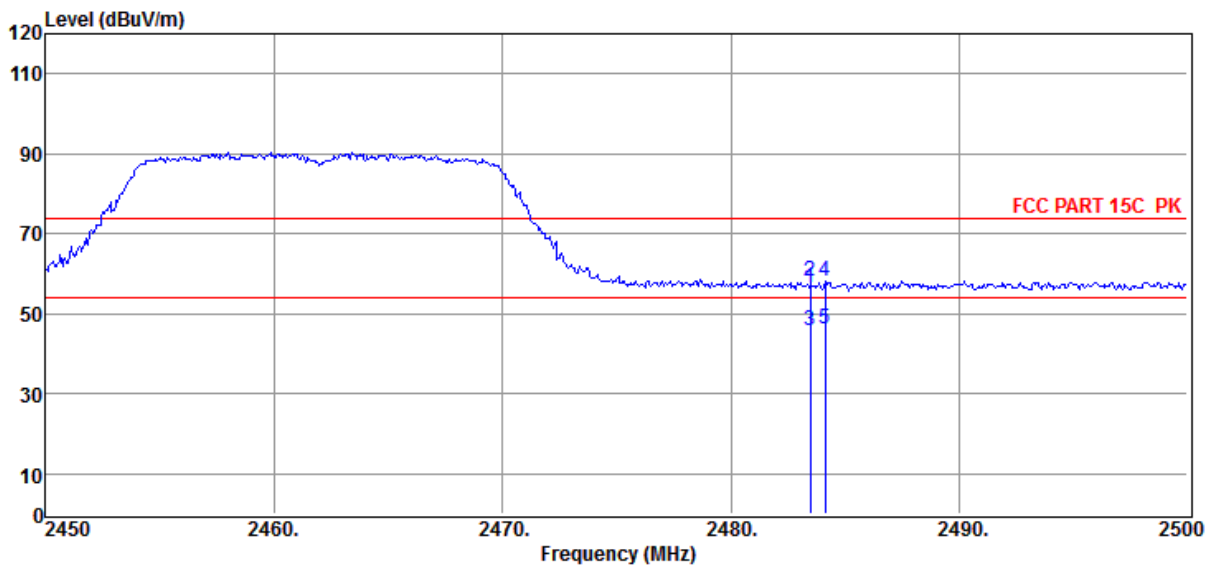

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	23.58	27.98	0.00	4.90	56.46	74.00	-17.54	Peak	HORIZONTAL
2	2483.50	25.37	27.98	0.00	4.90	58.25	74.00	-15.75	Peak	HORIZONTAL
3	2483.50	12.99	27.98	0.00	4.90	45.87	54.00	-8.13	Average	HORIZONTAL
4	2484.15	25.38	27.98	0.00	4.90	58.26	74.00	-15.74	Peak	HORIZONTAL
5	2484.15	13.12	27.98	0.00	4.90	46.00	54.00	-8.00	Average	HORIZONTAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11g 2462 Ant2 POWER14 VBW:510Hz

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

D:\2021 RE2# Report Data\Q21060707-2E
 MTXMO500ASU2i\FCC ABOVE 1G WIFI.EM6

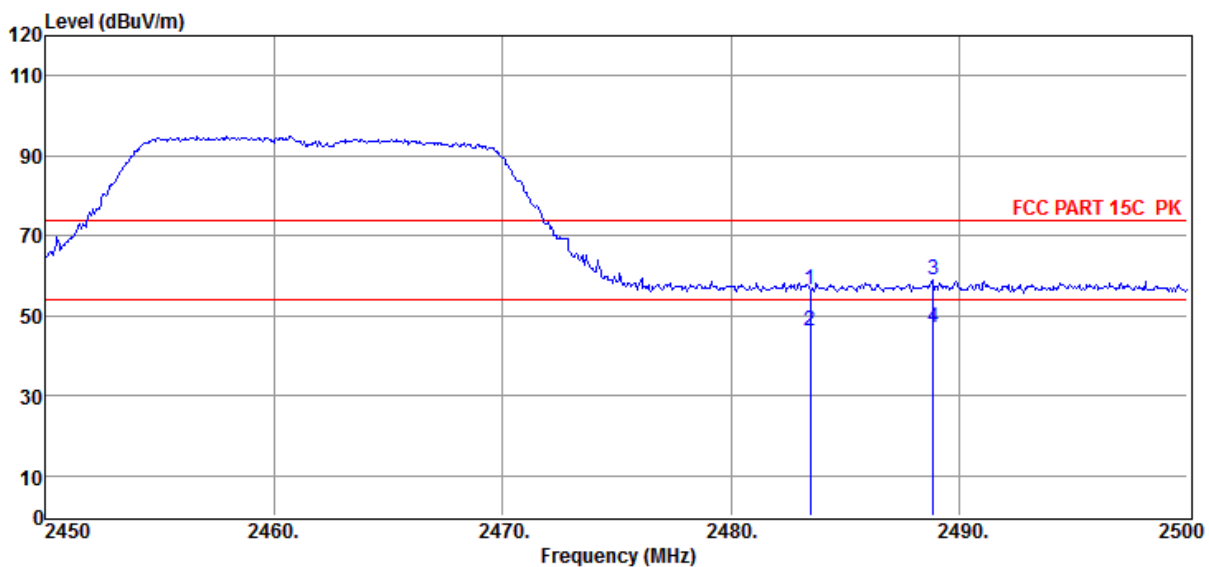

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	23.51	27.98	0.00	4.90	56.39	74.00	-17.61	Peak	VERTICAL
2	2483.50	13.45	27.98	0.00	4.90	46.33	54.00	-7.67	Average	VERTICAL
3	2488.85	25.92	27.99	0.00	4.91	58.82	74.00	-15.18	Peak	VERTICAL
4	2488.85	13.92	27.99	0.00	4.91	46.82	54.00	-7.18	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11g 2462 Ant2 POWER14 VBW:510Hz

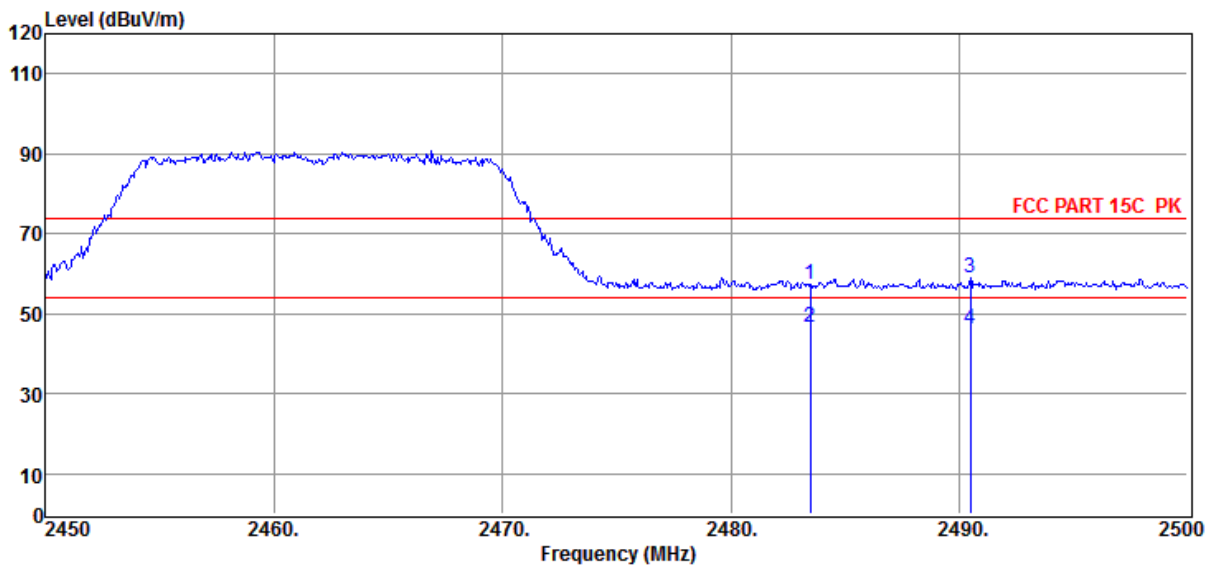

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.60	27.98	0.00	4.90	57.48	74.00	-16.52	Peak	HORIZONTAL
2	2483.50	13.67	27.98	0.00	4.90	46.55	54.00	-7.45	Average	HORIZONTAL
3	2490.50	25.97	27.99	0.00	4.91	58.87	74.00	-15.13	Peak	HORIZONTAL
4	2490.50	13.24	27.99	0.00	4.91	46.14	54.00	-7.86	Average	HORIZONTAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11n20 2412 MIMO POWER12 VBW:4.4KHz

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

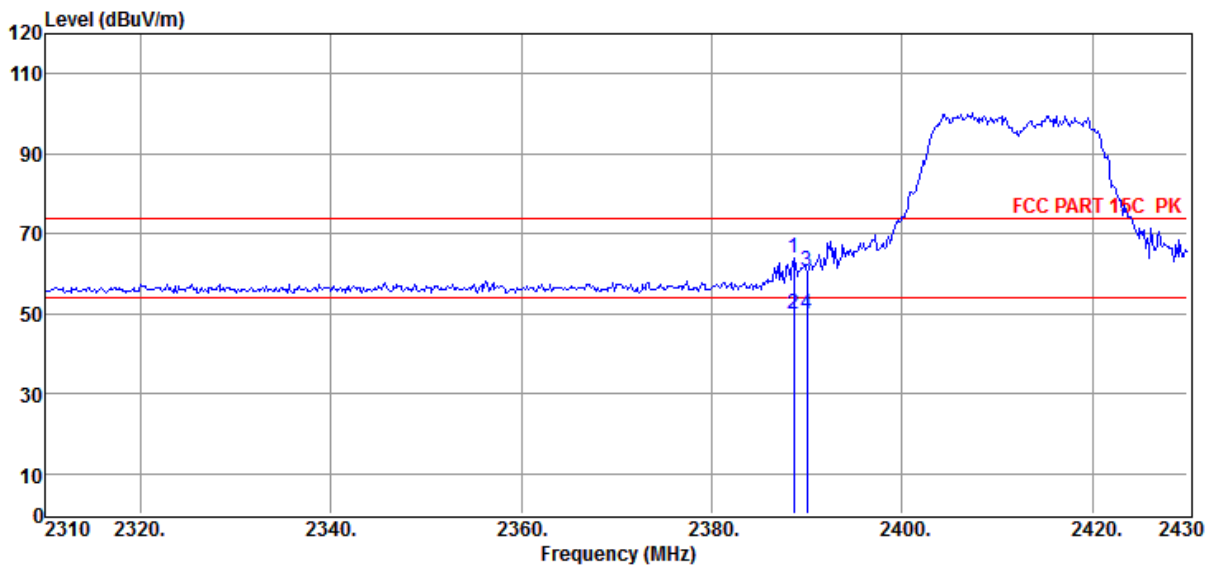

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.60	31.41	27.89	0.00	4.80	64.10	74.00	-9.90	Peak	VERTICAL
2	2388.60	17.41	27.89	0.00	4.80	50.10	54.00	-3.90	Average	VERTICAL
3	2390.00	27.78	27.89	0.00	4.80	60.47	74.00	-13.53	Peak	VERTICAL
4	2390.00	17.20	27.89	0.00	4.80	49.89	54.00	-4.11	Average	VERTICAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11n20 2412 MIMO POWER12 VBW:4.4KHz

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

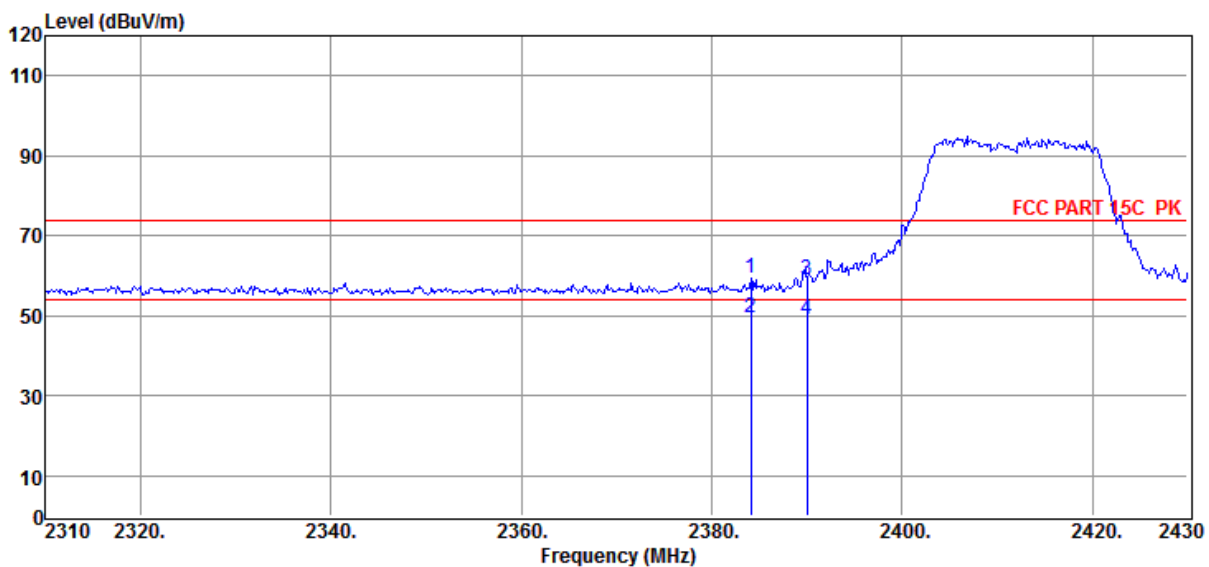

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2384.16	26.83	27.88	0.00	4.79	59.50	74.00	-14.50	Peak	HORIZONTAL
2	2384.16	16.89	27.88	0.00	4.79	49.56	54.00	-4.44	Average	HORIZONTAL
3	2390.00	26.07	27.89	0.00	4.80	58.76	74.00	-15.24	Peak	HORIZONTAL
4	2390.00	16.27	27.89	0.00	4.80	48.96	54.00	-5.04	Average	HORIZONTAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11n20 2462 MIMO POWER12 VBW:4.4KHz

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

D:\2021 RE2# Report Data\Q21060707-2E
 MTXMO500ASU2i\FCC ABOVE 1G WIFI.EM6

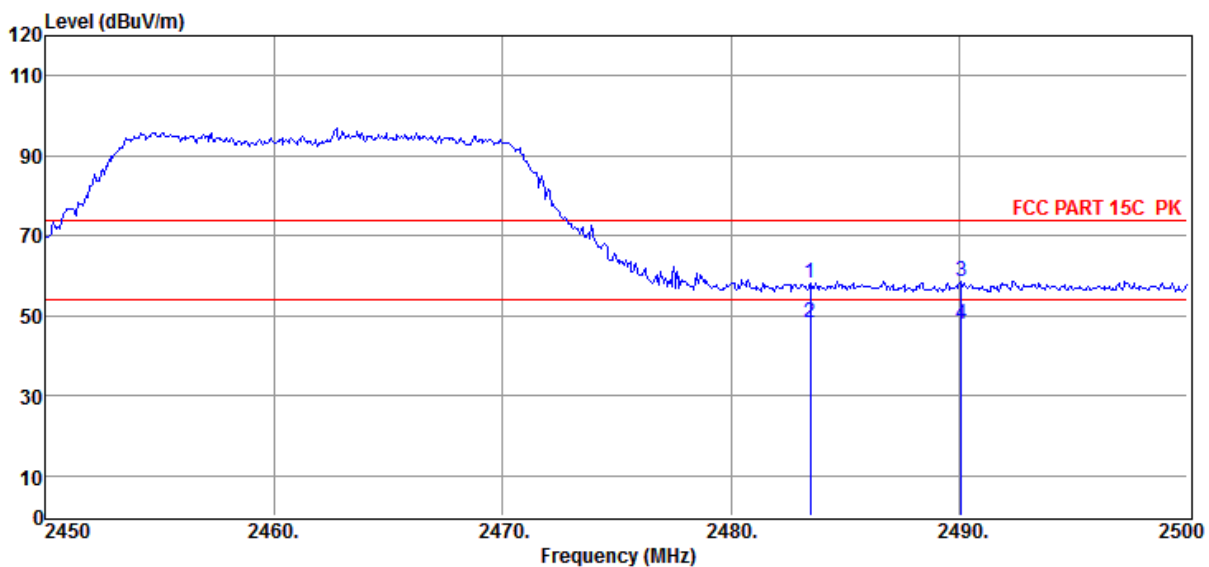

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	25.30	27.98	0.00	4.90	58.18	74.00	-15.82	Peak	VERTICAL
2	2483.50	15.33	27.98	0.00	4.90	48.21	54.00	-5.79	Average	VERTICAL
3	2490.10	25.79	27.99	0.00	4.91	58.69	74.00	-15.31	Peak	VERTICAL
4	2490.10	14.77	27.99	0.00	4.91	47.67	54.00	-6.33	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11n20 2462 MIMO POWER12 VBW:4.4KHz

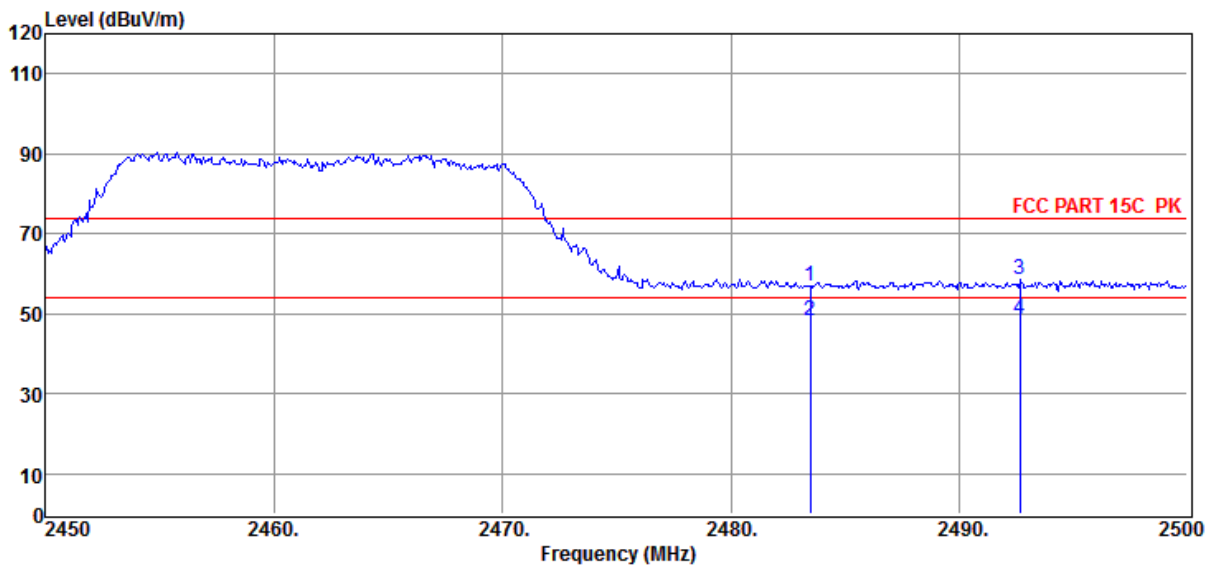

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.14	27.98	0.00	4.90	57.02	74.00	-16.98	Peak	HORIZONTAL
2	2483.50	15.17	27.98	0.00	4.90	48.05	54.00	-5.95	Average	HORIZONTAL
3	2492.65	25.85	27.99	0.00	4.91	58.75	74.00	-15.25	Peak	HORIZONTAL
4	2492.65	15.60	27.99	0.00	4.91	48.50	54.00	-5.50	Average	HORIZONTAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11n40 2422 MIMO POWER10 VBW:7.4KHz

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

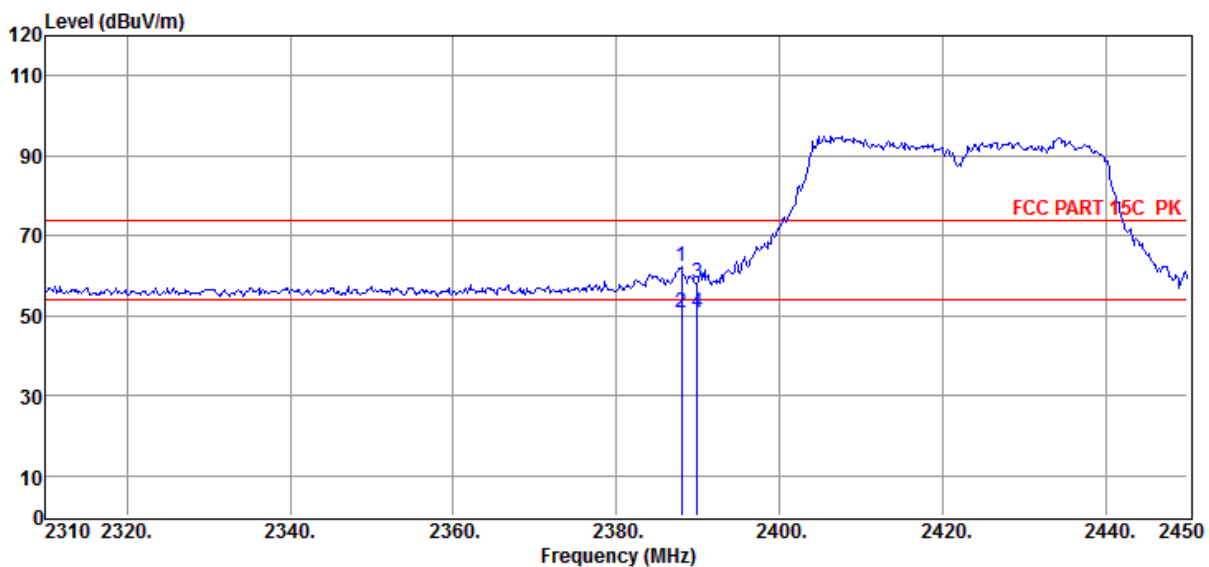

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.98	29.48	27.89	0.00	4.80	62.17	74.00	-11.83	Peak	VERTICAL
2	2387.98	18.11	27.89	0.00	4.80	50.80	54.00	-3.20	Average	VERTICAL
3	2389.94	25.49	27.89	0.00	4.80	58.18	74.00	-15.82	Peak	VERTICAL
4	2389.94	18.00	27.89	0.00	4.80	50.69	54.00	-3.31	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11n40 2422 MIMO POWER10 VBW:7.4KHz

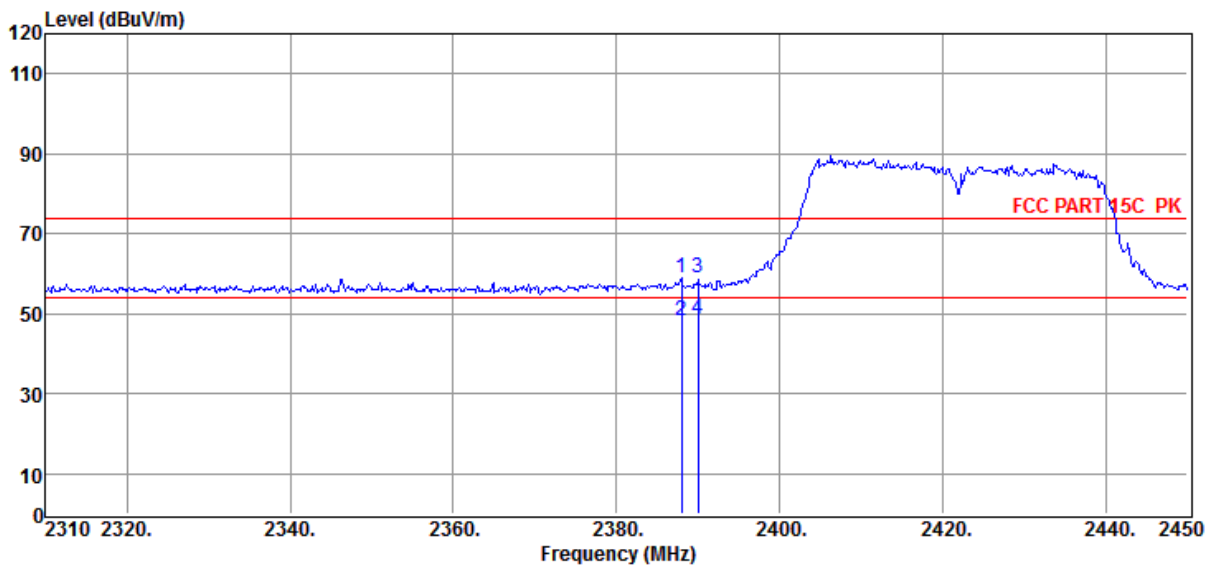

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2387.98	26.14	27.89	0.00	4.80	58.83	74.00	-15.17	Peak	HORIZONTAL
2	2387.98	15.67	27.89	0.00	4.80	48.36	54.00	-5.64	Average	HORIZONTAL
3	2390.00	26.14	27.89	0.00	4.80	58.83	74.00	-15.17	Peak	HORIZONTAL
4	2390.00	15.76	27.89	0.00	4.80	48.45	54.00	-5.55	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21060707-2E
MTXMO500ASU2\FCC ABOVE 1G WIFI.EM6

Test Date : 2021-07-09

Tested By : Ziqin

EUT : Equipo de Audio y Video para Vehiculo

Model Number : MTXMO500ASU2i


Power Supply : DC 12V

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 BBHA9120D/3m/HORIZONTAL

Memo : 11n40 2452 MIMO POWER 10 VBW:7.4KHz

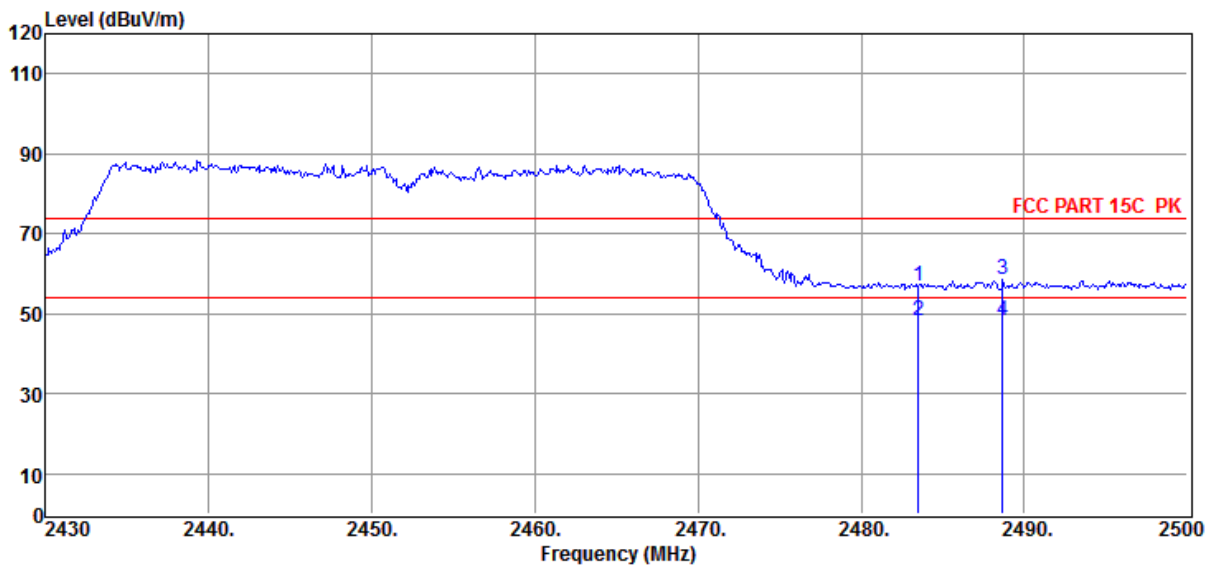

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.14	27.98	0.00	4.90	57.02	74.00	-16.98	Peak	HORIZONTAL
2	2483.50	15.31	27.98	0.00	4.90	48.19	54.00	-5.81	Average	HORIZONTAL
3	2488.66	25.51	27.99	0.00	4.91	58.41	74.00	-15.59	Peak	HORIZONTAL
4	2488.66	15.26	27.99	0.00	4.91	48.16	54.00	-5.84	Average	HORIZONTAL

Note:


1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#
Test Date : 2021-07-09
EUT : Equipo de Audio y Video para Vehiculo
Power Supply : DC 12V
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11n40 2452 MIMO POWER 10 VBW:7.4KHz

Tested By : Ziqin
Model Number : MTXMO500ASU2i
Test Mode : Tx mode
Antenna/Distance : 2020 BBHA9120D/3m/VERTICAL

D:\2021 RE2# Report Data\Q21060707-2E
 MTXMO500ASU2i\FCC ABOVE 1G WIFI.EM6

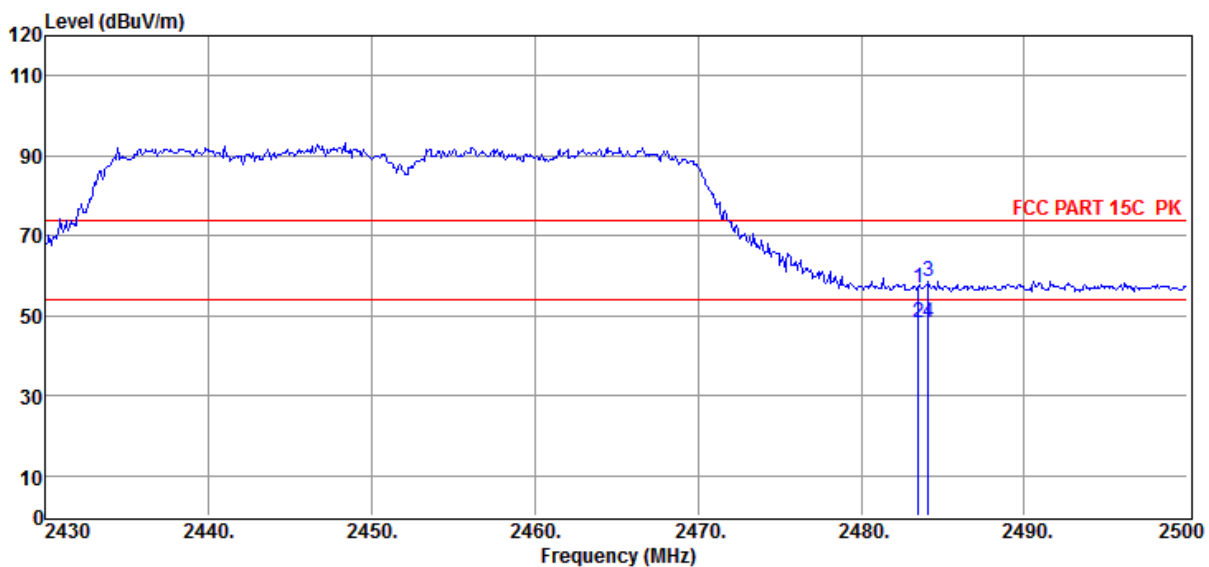


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	24.12	27.98	0.00	4.90	57.00	74.00	-17.00	Peak	VERTICAL
2	2483.50	15.23	27.98	0.00	4.90	48.11	54.00	-5.89	Average	VERTICAL
3	2484.11	25.82	27.98	0.00	4.90	58.70	74.00	-15.30	Peak	VERTICAL
4	2484.11	15.34	27.98	0.00	4.90	48.22	54.00	-5.78	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

10. Power Line Conducted Emission

10.1. Block diagram of test setup

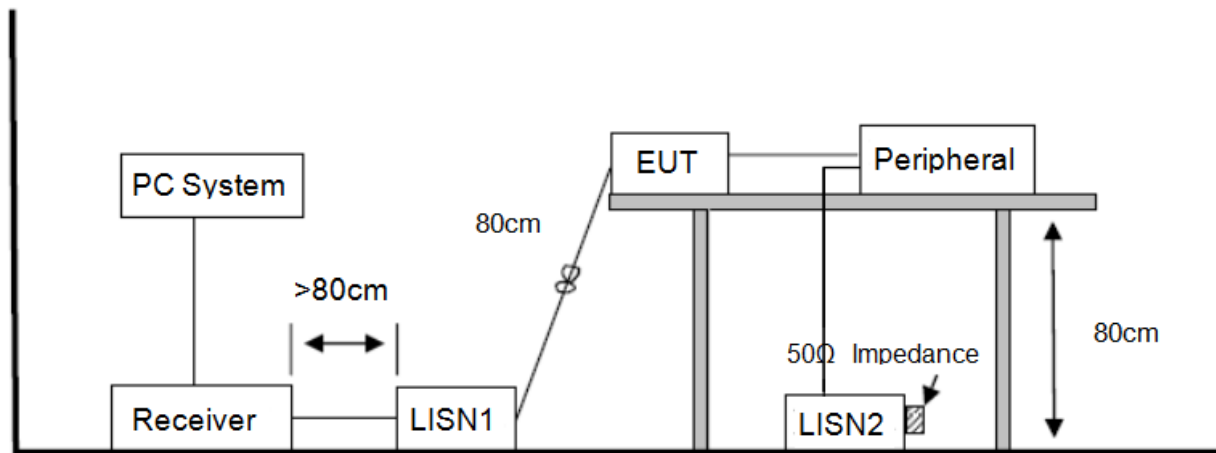

10.2. Power line conducted emission limits (Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test. EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

10.4. Test result

Not Applicable

Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Result

The device support 2T2R MIMO, there is no other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 4.51 dBi for antenna 1, 4.51 dBi for antenna 2.