

APPLICATION CERTIFICATION FCC Part 15C

On Behalf of
Kintech Co., Ltd.

Tablet PC

Model No.: PC7010, PC7010B, PC7010ME, KW-PC7001A, KW-PC7005A, KW-PC7010A,
KW-PC7014A, KW-PC7015A, KW-PC7016A, KW-PC7019A
FCC ID: BRCPC7001A

Prepared for : Kintech Co., Ltd.
Address : 1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang, Bao
An District, Shenzhen, Guang Dong, China

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20122080
Date of Test (Rev. 3) : Oct. 25-Nov. 7, 2012
Date of Report(Rev. 3) : Nov. 13, 2012
Date of Report (original) : May 3, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. DESCRIPTION OF VERSION	4
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT).....	6
2.2. Description of Test Facility	7
2.3. Measurement Uncertainty.....	7
3. MEASURING DEVICE AND TEST EQUIPMENT	8
4. OPERATION OF EUT DURING TESTING	9
4.1. Operating Mode.....	9
4.2. Configuration and peripherals	10
5. TEST PROCEDURES AND RESULTS	11
6. RADIATED SPURIOUS EMISSION & BAND EDGE TEST	12
6.1. Block Diagram of Test Setup.....	12
6.2. The Limit For Section 15.247(d)	13
6.3. Restricted bands of operation	13
6.4. Configuration of EUT on Measurement	14
6.5. Operating Condition of EUT	14
6.6. Test Procedure	14
6.7. The Field Strength of Radiation Emission Measurement Results	15

Test Report Certification

Applicant : Kintech Co., Ltd.

Manufacturer : Kintech Co., Ltd.

EUT Description : Tablet PC

(A) MODEL NO.: PC7010, PC7010B, PC7010ME, KW-PC7001A,
KW-PC7005A, KW-PC7010A, KW-PC7014A,
KW-PC7015A, KW-PC7016A, KW-PC7019A

(B) SERIAL NO.: N/A

(C) POWER SUPPLY: DC 3.7V (Li-polymer battery);
AC 120V/60HZ (Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2009

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test (Rev. 3):	Oct. 25-Nov. 7, 2012
Date of Report(Rev. 3):	Nov. 13, 2012
Date of Report (original):	May 3, 2012

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

1. DESCRIPTION OF VERSION

Edition No.	Date of Rev.	Different Statement	Report No.
0	May 3, 2012	Original Report	ATE20120734
REV.2	Oct. 24, 2012	1. PC7007 PCB layout and Circuit diagram are same as the PC7001A. They are different from we are removed the HDMI port on PC7001A, and housing (changed the aluminum frame relative to PC7007) 2. Alternative Model number and product name: Original model number: KW-PC70XXA Alternative Model number: PC7007, PC7007B, PC7007ME, KW-PC7001E, KW-PC7005E, KW-PC7010E, KW-PC7014E, KW-PC7015E, KW-PC7016E, KW-PC7020E Original product name: MID Alternative product name: Tablet PC	ATE20122079
REV.3	Nov. 13, 2012	1. PC7010 PCB layout and Circuit diagram are same as the PC7001A. They are different from camera (PC7001A have one camera, but PC7010 have two cameras), and housing (changed the aluminum frame relative to PC7007) 2. Alternative Model number and product name: Original model number: KW-PC70XXA Alternative Model number: PC7010, PC7010B, PC7010ME, KW-PC7001A, KW-PC7005A, KW-PC7010A, KW-PC7014A, KW-PC7015A, KW-PC7016A, KW-PC7019A Original product name: MID Alternative product name: Tablet PC	ATE20122080

Remark for Rev. 3

1. This report is an additional version with original report number ATE20120734. The different with original report are see the above table of REV.3
2. Through evaluation of the above difference, the Radiated Spurious Emission Test needed to be re-performed. The EUT was retested were recorded in this report.
3. This report is based on report of ATE20120734.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	:	Tablet PC
Model Number	:	PC7010, PC7010B, PC7010ME, KW-PC7001A, KW-PC7005A, KW-PC7010A, KW-PC7014A, KW-PC7015A, KW-PC7016A, KW-PC7019A (Note: These samples are same except for the appearance color is difference. So we prepare the PC7010 for EMC test.)
Trade Name	:	Titan, Kinwei
Frequency Range	:	2412-2462MHz
Number of Channels	:	11
Antenna Gain	:	0dBi
Power Supply	:	DC 3.7V (Li-polymer battery); AC 120V/60Hz (Adaptor input)
Adapter	:	Model number: JKY36-SP0502000 Input: AC 100-240V; 50/60Hz Output: DC 5V; 2000mA Output line: Non-shielded, Non-detachable, 1.4m
Data Rate	:	802.11b: 11 Mbps 802.11g: 54 Mbps 802.11n: 150 Mbps
Applicant	:	Kintech Co., Ltd.
Address	:	1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang, Bao An District, Shenzhen, Guang Dong, China
Manufacturer	:	Kintech Co., Ltd./Kin Wei Technology(Shenzhen) Ltd.
Address	:	Bldg. 22, Chentian Industrial Zone, Baomin 2 nd Road, Xixiang, Bao'an District, Shenzhen, China
Date of sample received	:	Oct. 10, 2012
Date of Test	:	Oct. 25-Nov. 7, 2012

2.2. Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen
	Listed by FCC
	The Registration Number is 752051
	Listed by Industry Canada
	The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories
	The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

2.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	= 4.06dB, k=2

3. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 8, 2012	Jan. 7, 2013
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 8, 2012	Jan. 7, 2013

4. OPERATION OF EUT DURING TESTING

4.1.Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz


802.11n Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

4.2.Configuration and peripherals

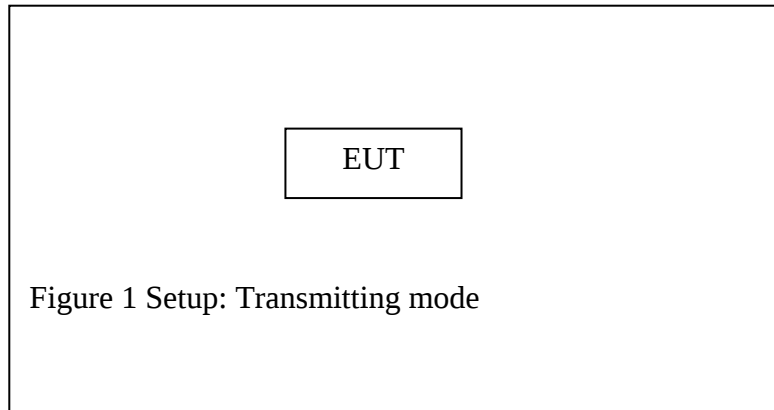


5. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	See the ATE20120734
Section 15.247(e)	Power Spectral Density Test	See the ATE20120734
Section 15.247(b)(3)	Maximum Peak Output Power Test	See the ATE20120734
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	See the ATE20120734
Section 15.207	AC Power Line Conducted Emission Test	See the ATE20120734
Section 15.203	Antenna Requirement	See the ATE20120734

6. RADIATED SPURIOUS EMISSION & BAND EDGE TEST

6.1. Block Diagram of Test Setup


6.1.1. Block diagram of connection between the EUT and peripherals

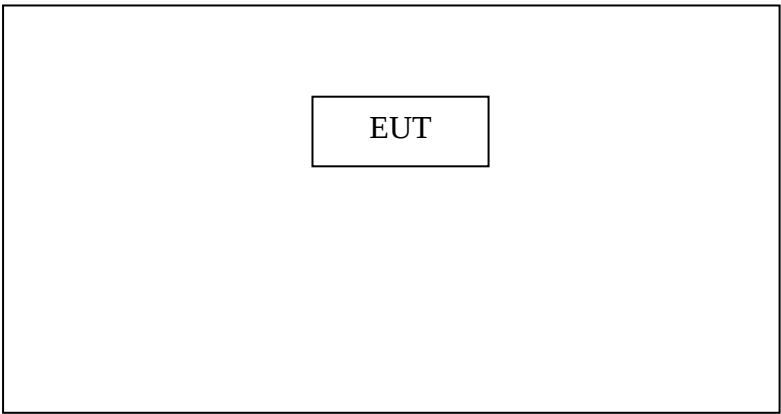

Setup: Transmitting mode

(EUT: Tablet PC)

6.1.2. Semi-Anechoic Chamber Test Setup Diagram

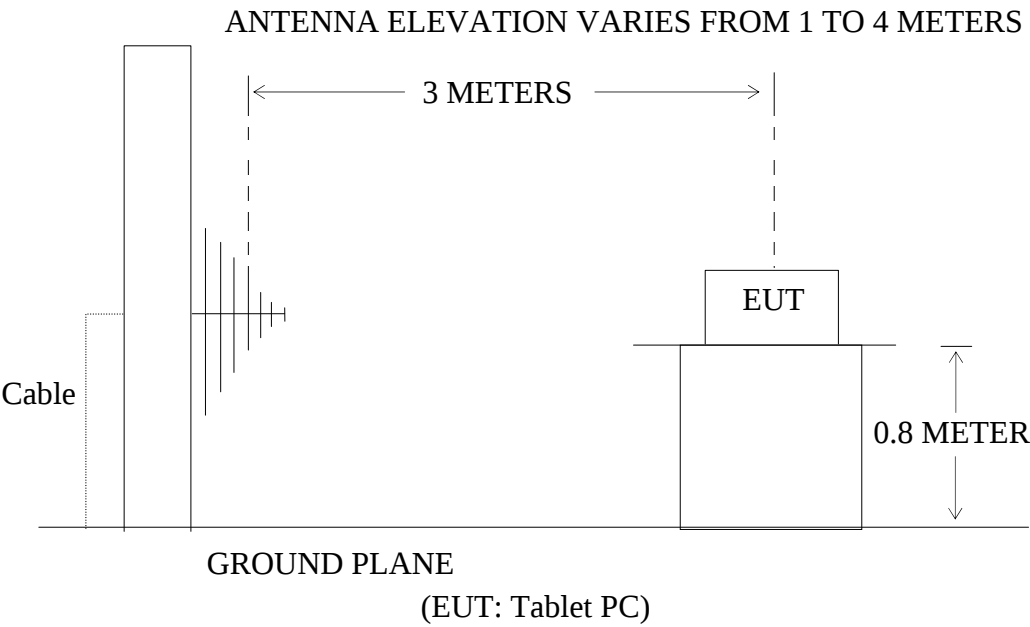

6.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.3.Restricted bands of operation

6.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

6.4.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4.1.Tablet PC (EUT)

Model Number : PC7010
 Serial Number : N/A
 Manufacturer : Kintech Co., Ltd./Kin Wei Technology(Shenzhen) Ltd.

6.5.Operating Condition of EUT

6.5.1.Setup the EUT and simulator as shown as Section 6.1.

6.5.2.Turn on the power of all equipment.

6.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 MHz. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

6.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 300Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

6.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Band Edge

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	39.36	45.57	-7.81	31.55	37.76	54.00	74.00	-22.45	-36.24	Vertical
2376.130	46.80	52.54	-7.62	39.18	44.92	54.00	74.00	-14.82	-29.08	Vertical
2390.000	38.25	44.76	-7.53	30.72	37.23	54.00	74.00	-23.28	-36.77	Vertical
2310.000	39.05	45.85	-7.81	31.24	38.04	54.00	74.00	-22.76	-35.96	Horizontal
2376.130	43.36	49.21	-7.62	35.74	41.59	54.00	74.00	-18.26	-32.41	Horizontal
2390.000	37.66	43.46	-7.53	30.13	35.93	54.00	74.00	-23.87	-38.07	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel Middle 2437MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note:** 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.
3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Band Edge

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	39.36	45.20	-7.37	31.99	37.83	54.00	74.00	-22.01	-36.17	Vertical
2488.299	42.65	48.49	-7.38	35.27	41.11	54.00	74.00	-18.73	-32.89	Vertical
2500.000	38.12	44.22	-7.40	30.72	36.82	54.00	74.00	-23.28	-37.18	Vertical
2483.500	38.25	43.82	-7.37	30.88	36.45	54.00	74.00	-23.12	-37.55	Horizontal
2487.824	41.91	46.92	-7.38	34.53	39.54	54.00	74.00	-19.47	-34.46	Horizontal
2500.000	40.25	45.51	-7.40	32.85	38.11	54.00	74.00	-21.15	-35.98	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11g Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Band Edge

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	40.02	45.79	-7.81	32.21	37.98	54.00	74.00	-21.79	-36.02	Vertical
2376.130	45.36	51.88	-7.62	37.74	44.26	54.00	74.00	-16.26	-29.74	Vertical
2390.000	41.68	47.61	-7.53	34.15	40.08	54.00	74.00	-19.85	-33.92	Vertical
2310.000	37.91	43.69	-7.81	30.10	35.88	54.00	74.00	-23.90	-38.12	Horizontal
2376.130	41.25	48.56	-7.62	33.63	40.94	54.00	74.00	-20.37	-33.06	Horizontal
2390.000	38.91	45.65	-7.53	31.38	38.12	54.00	74.00	-22.62	-35.88	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11g Channel Middle 2437MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarizati on
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note:** 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.
3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Band Edge

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	40.02	46.74	-7.37	32.65	39.37	54.00	74.00	-21.35	-34.63	Vertical
2494.800	40.03	46.49	-7.39	32.64	39.10	54.00	74.00	-21.36	-34.90	Vertical
2500.000	38.13	44.66	-7.40	30.73	37.26	54.00	74.00	-23.27	-36.74	Vertical
2483.500	39.36	45.02	-7.37	31.99	37.65	54.00	74.00	-22.01	-36.35	Horizontal
2494.800	40.33	46.16	-7.39	32.94	38.77	54.00	74.00	-21.06	-35.23	Horizontal
2500.000	35.67	43.18	-7.40	28.27	35.78	54.00	74.00	-25.73	-38.22	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Band Edge

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	40.02	46.30	-7.81	32.21	38.49	54.00	74.00	-21.79	-35.51	Vertical
2376.130	36.90	51.16	-7.62	29.28	43.54	54.00	74.00	-24.72	-30.46	Vertical
2390.000	41.00	47.86	-7.53	33.47	40.33	54.00	74.00	-20.53	-33.67	Vertical
2310.000	38.01	43.30	-7.81	30.20	35.49	54.00	74.00	-23.80	-38.51	Horizontal
2376.130	41.03	47.48	-7.62	33.41	39.86	54.00	74.00	-20.59	-34.14	Horizontal
2390.000	39.61	45.52	-7.53	32.08	37.99	54.00	74.00	-21.92	-36.01	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel Middle 2437MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarizati on
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	November 13, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7010	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Band Edge

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	40.93	47.01	-7.37	33.56	39.64	54.00	74.00	-20.44	-34.36	Vertical
2493.372	41.02	47.38	-7.39	33.63	39.99	54.00	74.00	-20.37	-34.01	Vertical
2500.000	35.69	44.11	-7.40	28.29	36.71	54.00	74.00	-25.70	-37.29	Vertical
2483.500	37.02	43.99	-7.37	29.65	36.62	54.00	74.00	-24.35	-37.38	Horizontal
2492.737	41.08	47.99	-7.39	33.69	40.60	54.00	74.00	-20.31	-33.40	Horizontal
2500.000	38.99	44.09	-7.40	31.59	36.69	54.00	74.00	-22.41	-37.31	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2867

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/02

Time: 23:49:26

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

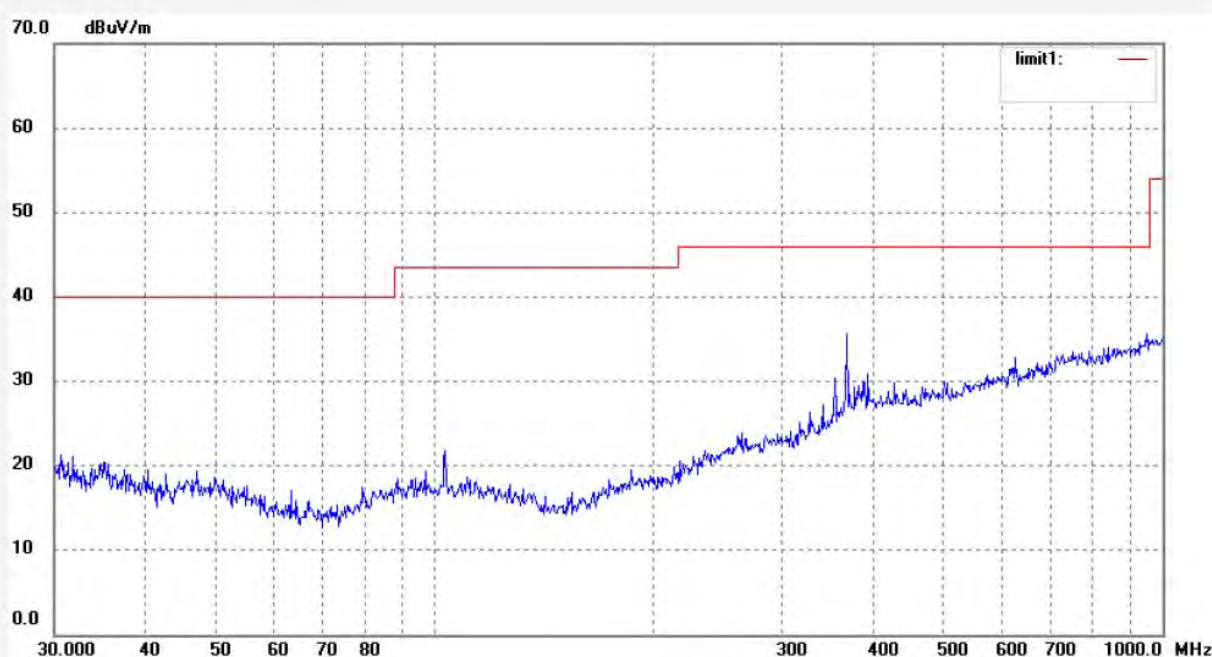

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2866

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/02

Time: 23:46:36

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

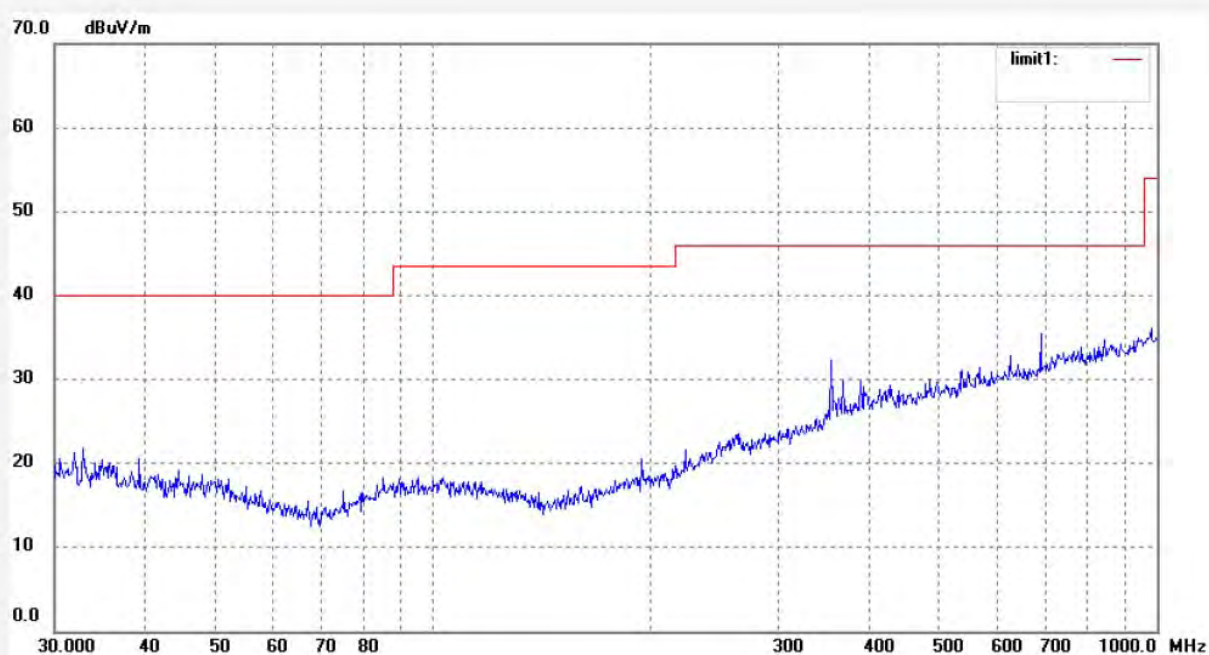

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2891

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:03:33

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122081

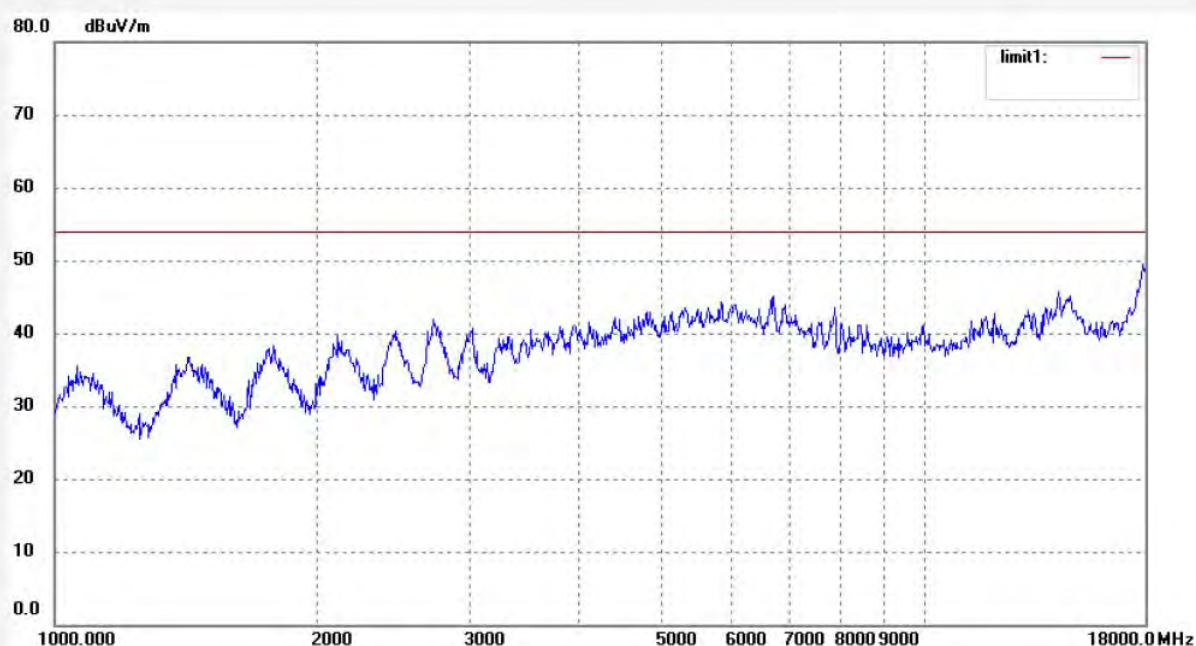

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2892

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:06:55

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

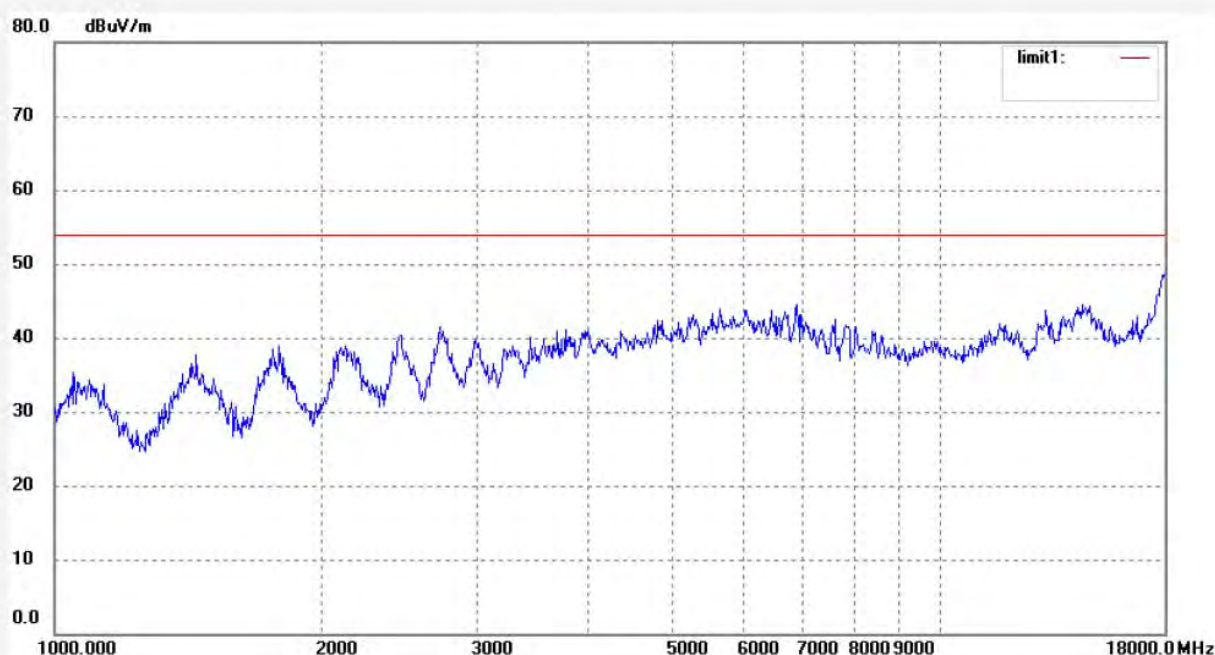

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2915
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 1(802.11b)
Model: PC7010
Manufacturer: Kintech

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/11/03
Time: 02:23:53
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122081

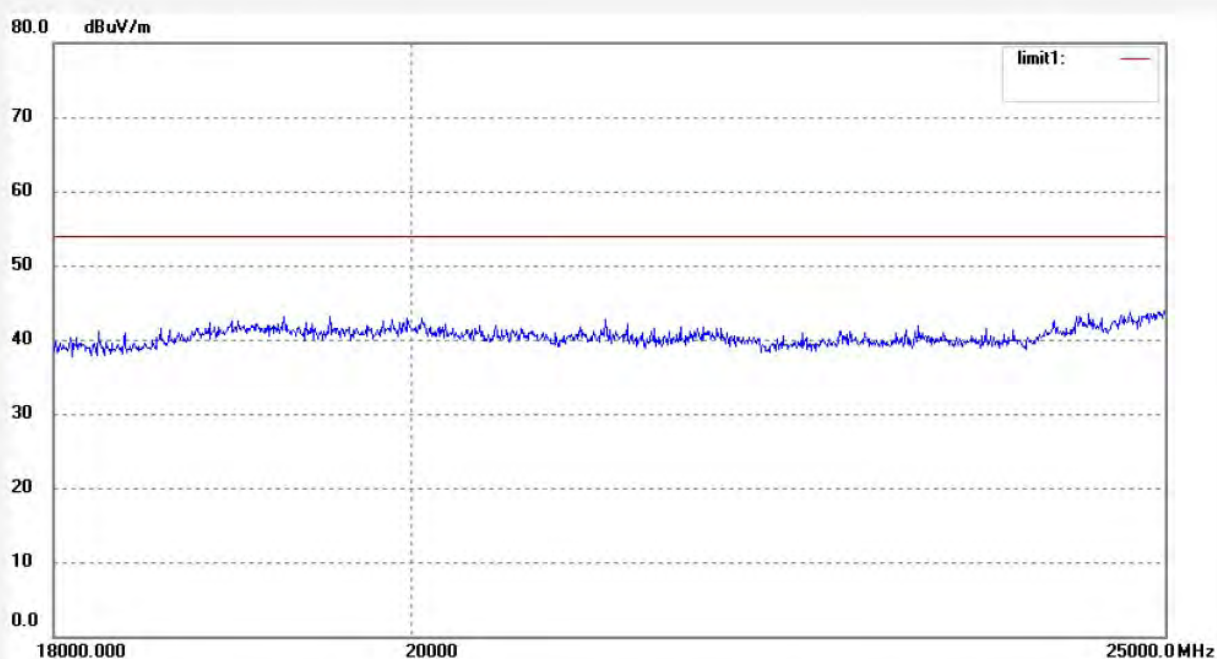

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2916

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:27:16

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

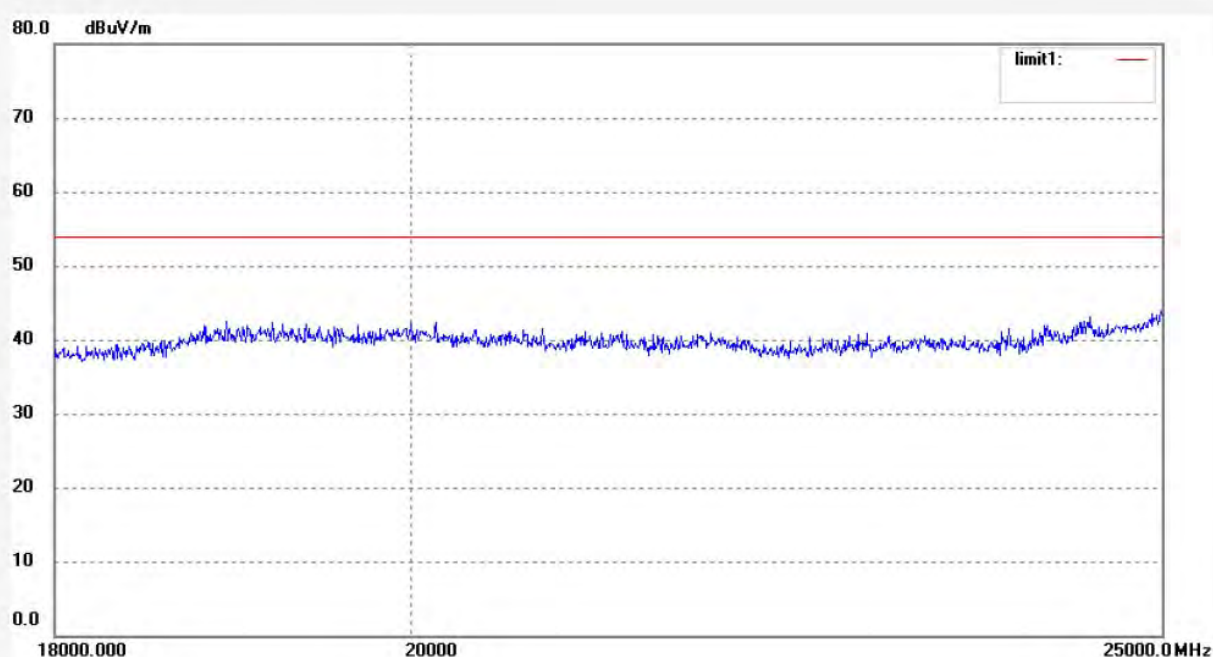

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2868

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/02

Time: 23:52:42

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

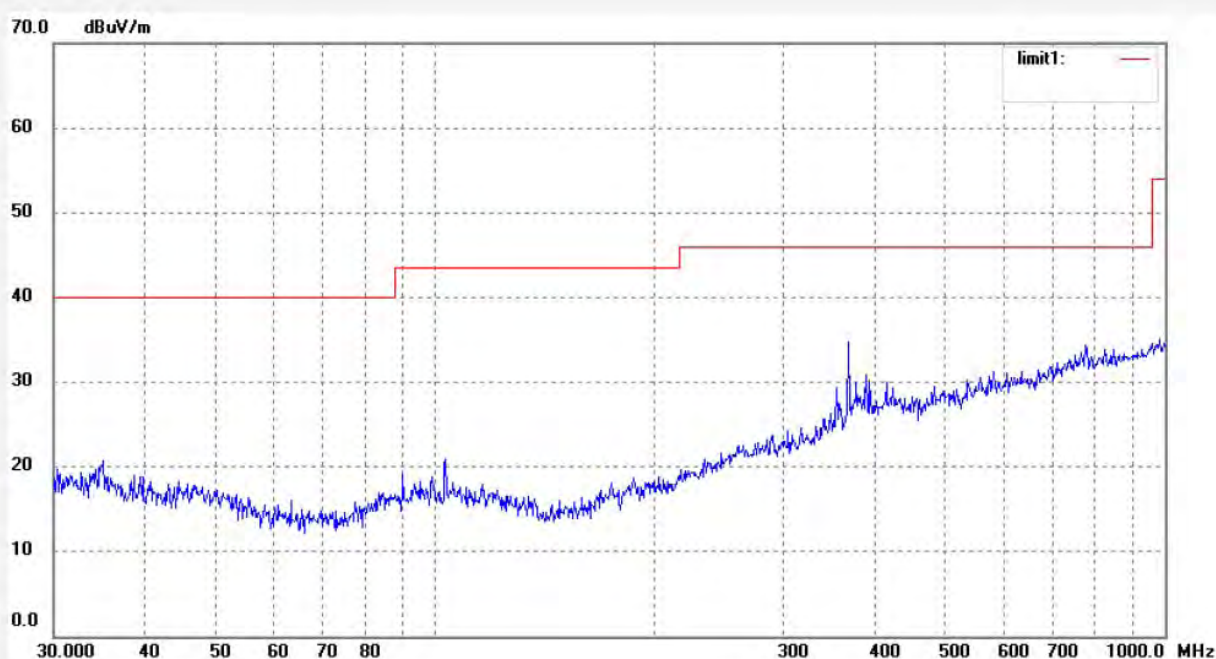

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2869

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/02

Time: 23:55:11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

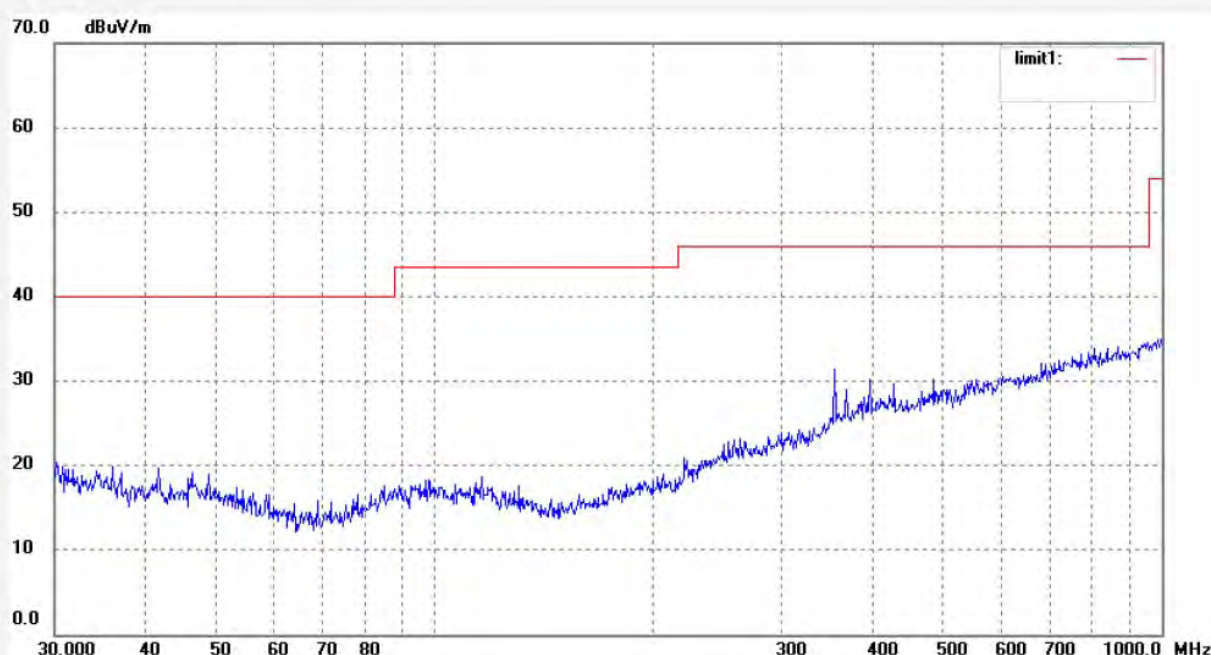

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2894

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:11:30

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

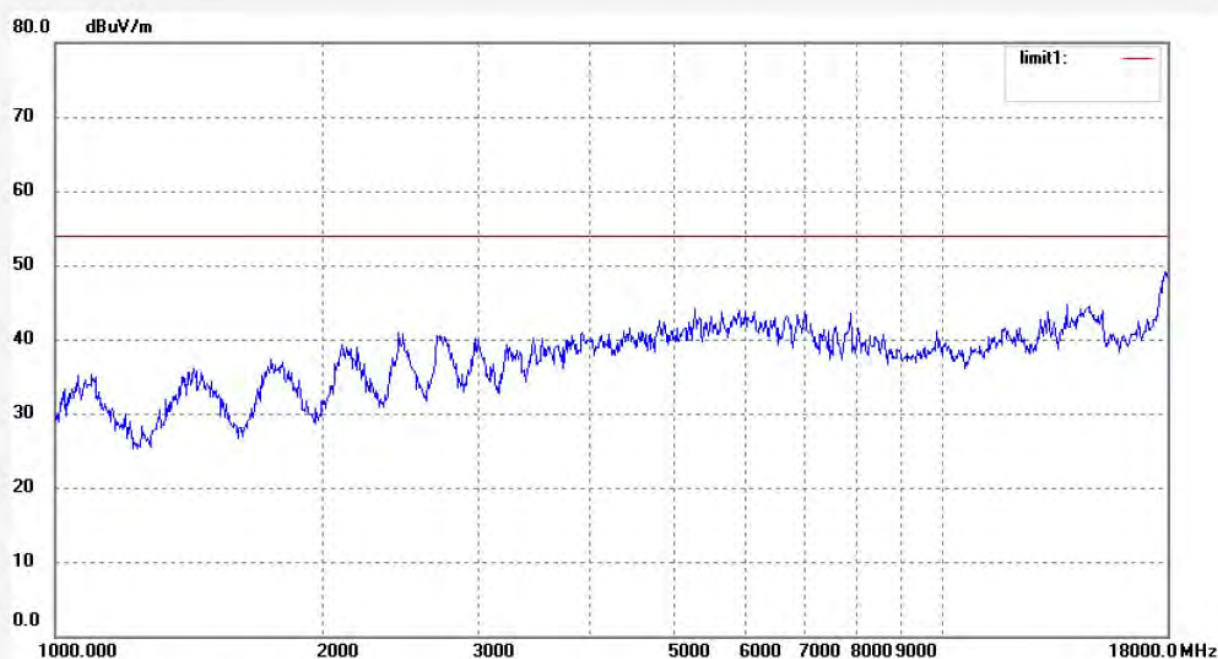

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2893

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:08:08

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

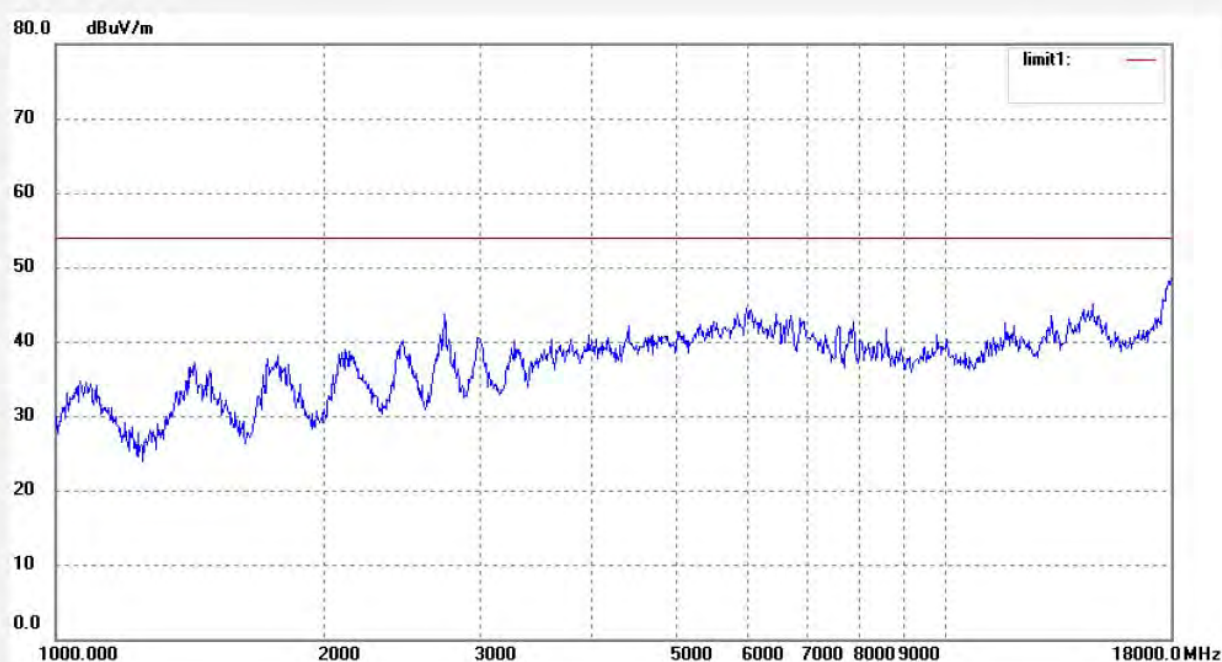

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2918

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:33:19

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

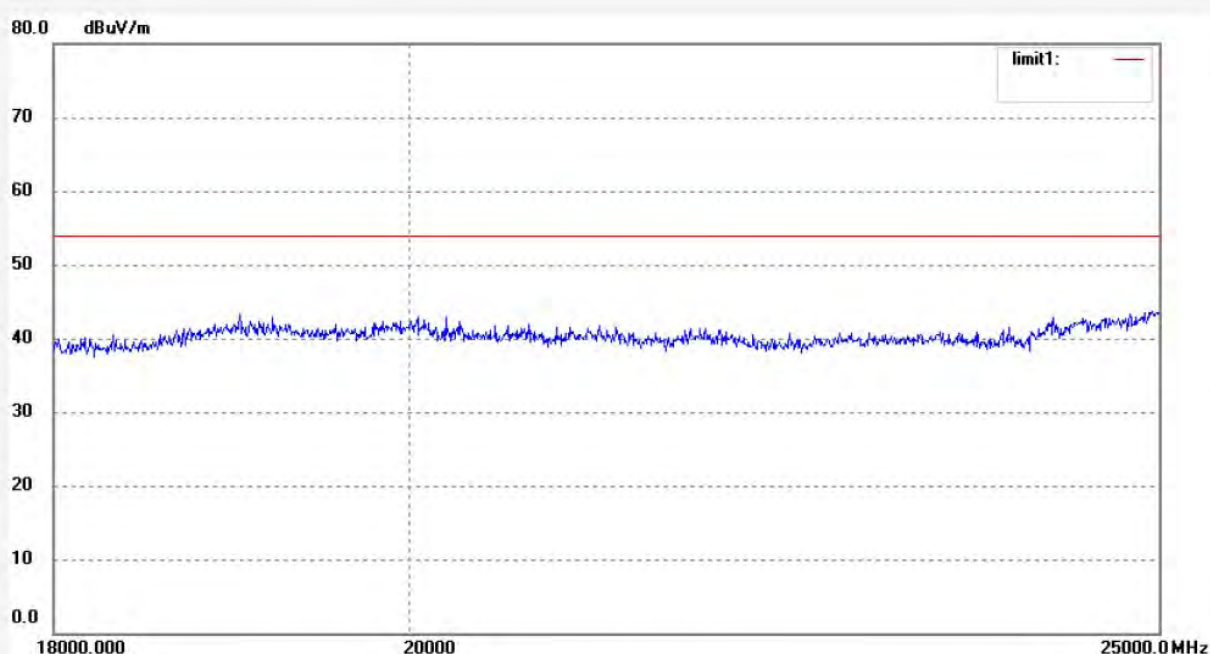

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2917

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:30:30

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

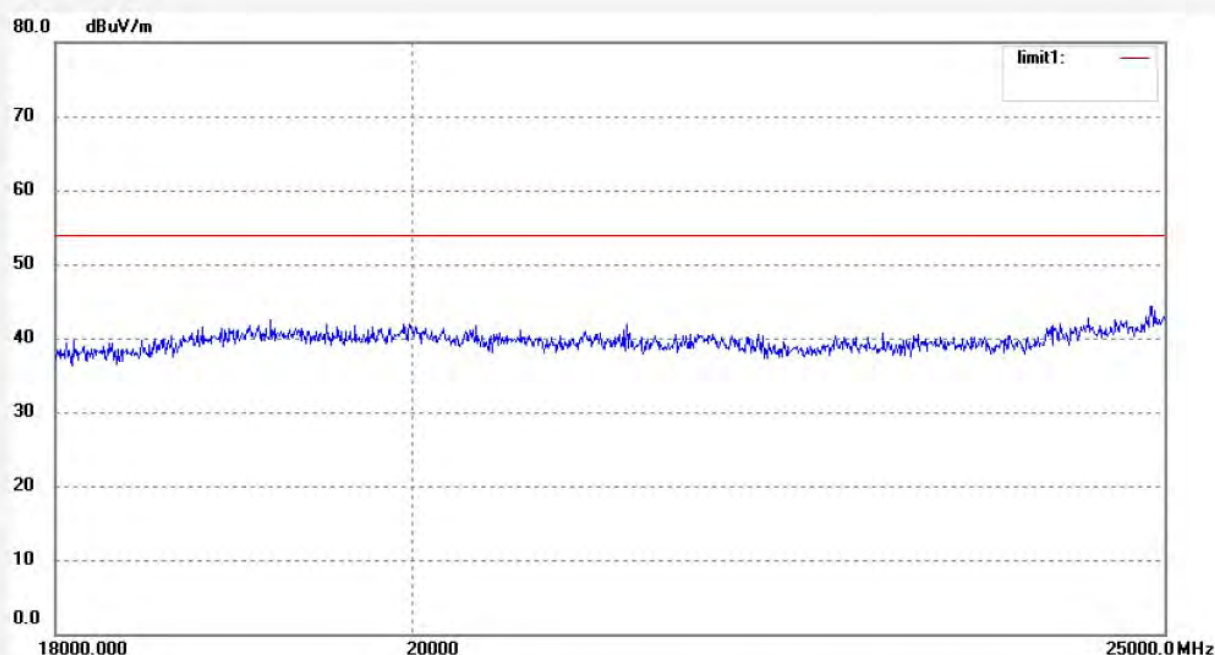

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2871

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:02:16

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

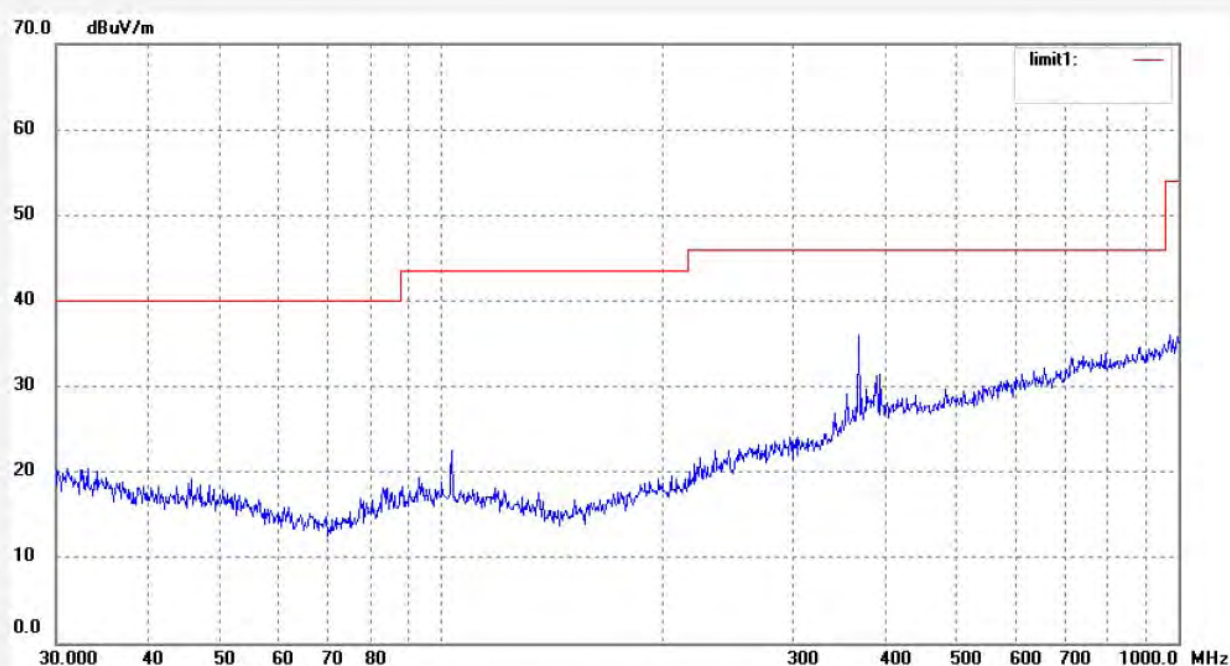

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2870

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/02

Time: 23:58:36

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

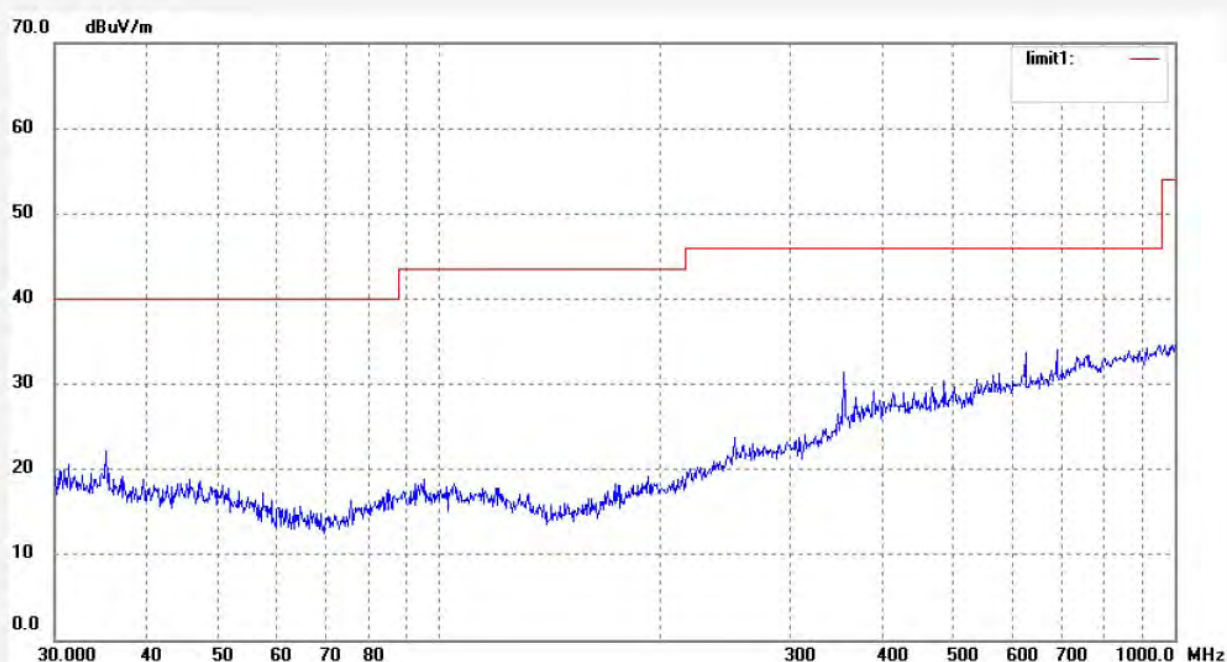

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2895

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:14:46

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

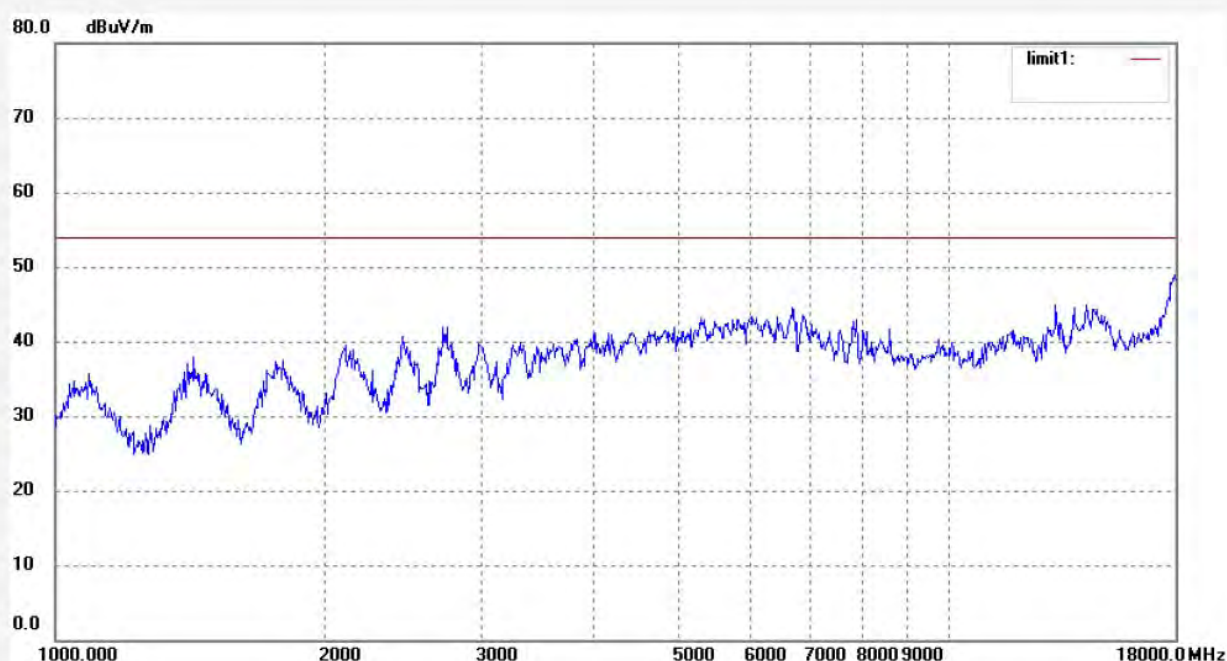

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2896

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:18:05

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

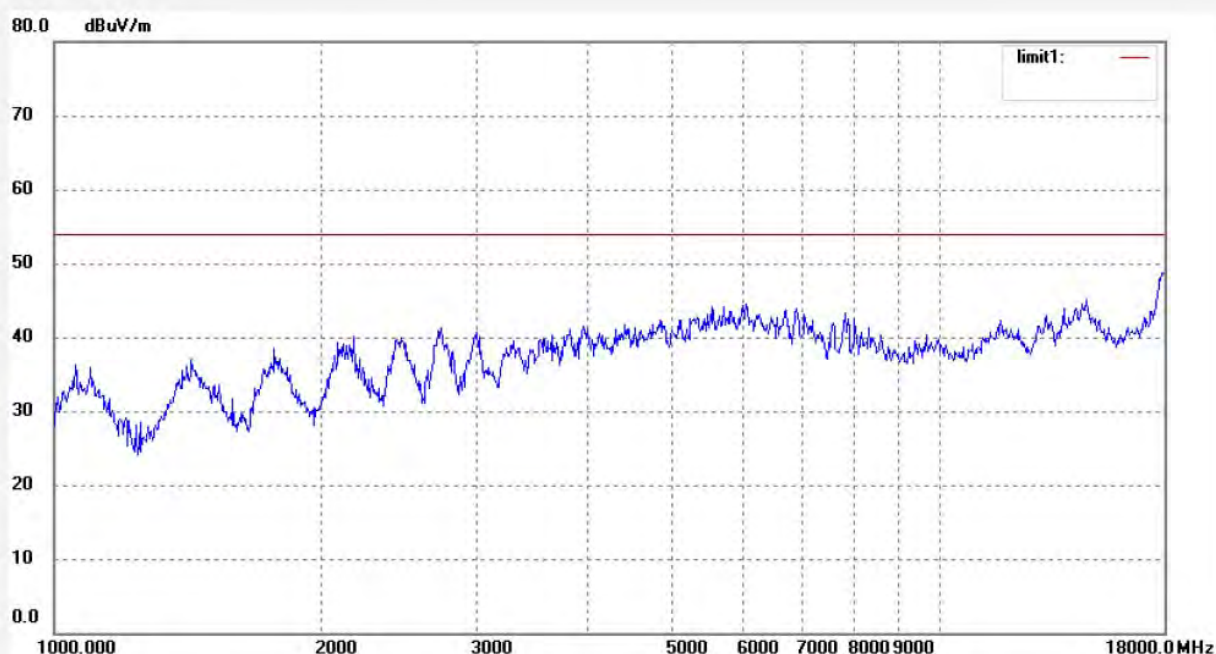

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2919

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:38:32

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

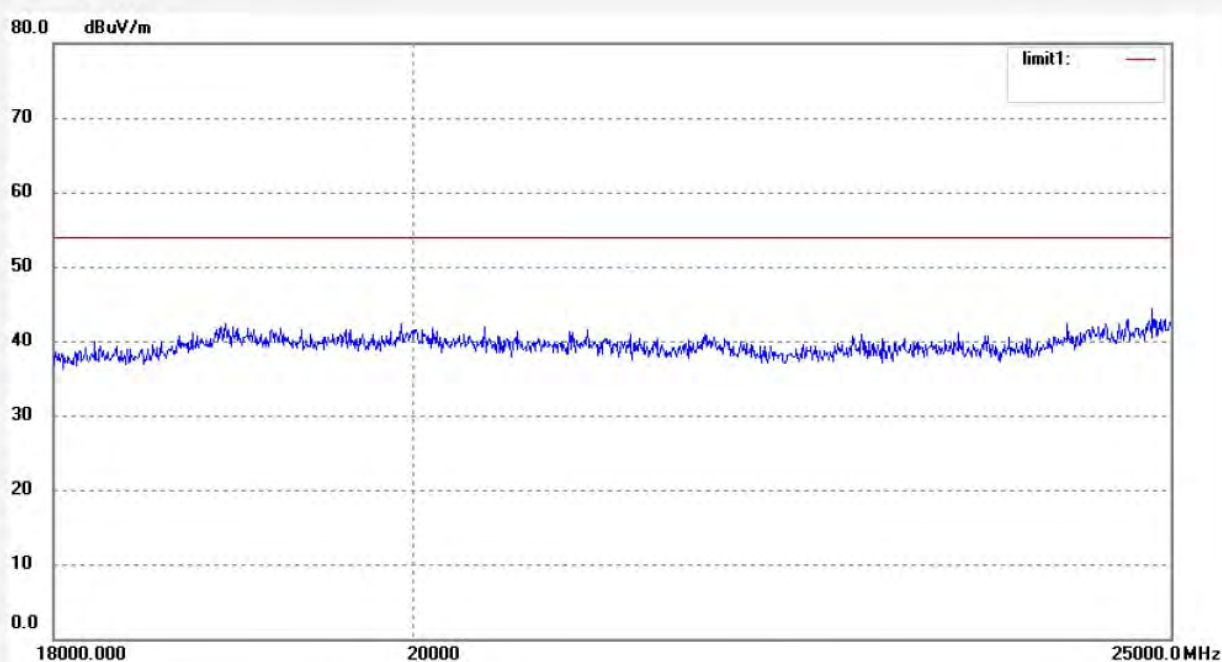

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2920

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11b)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:42:20

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

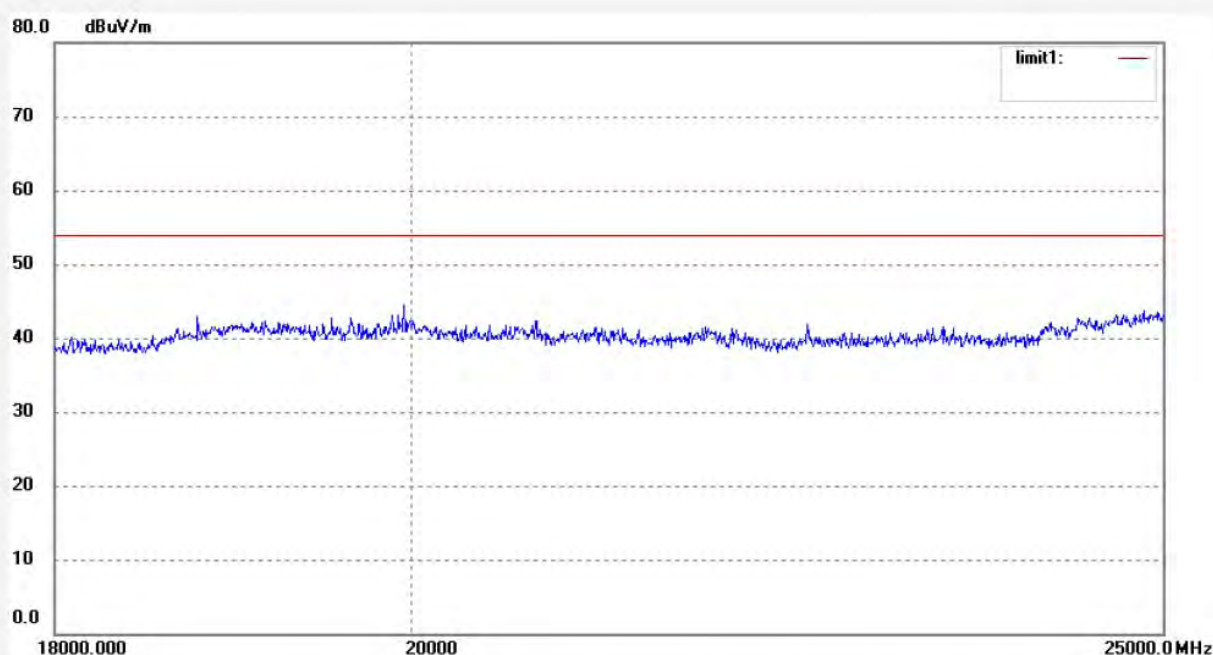

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2872

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:05:56

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

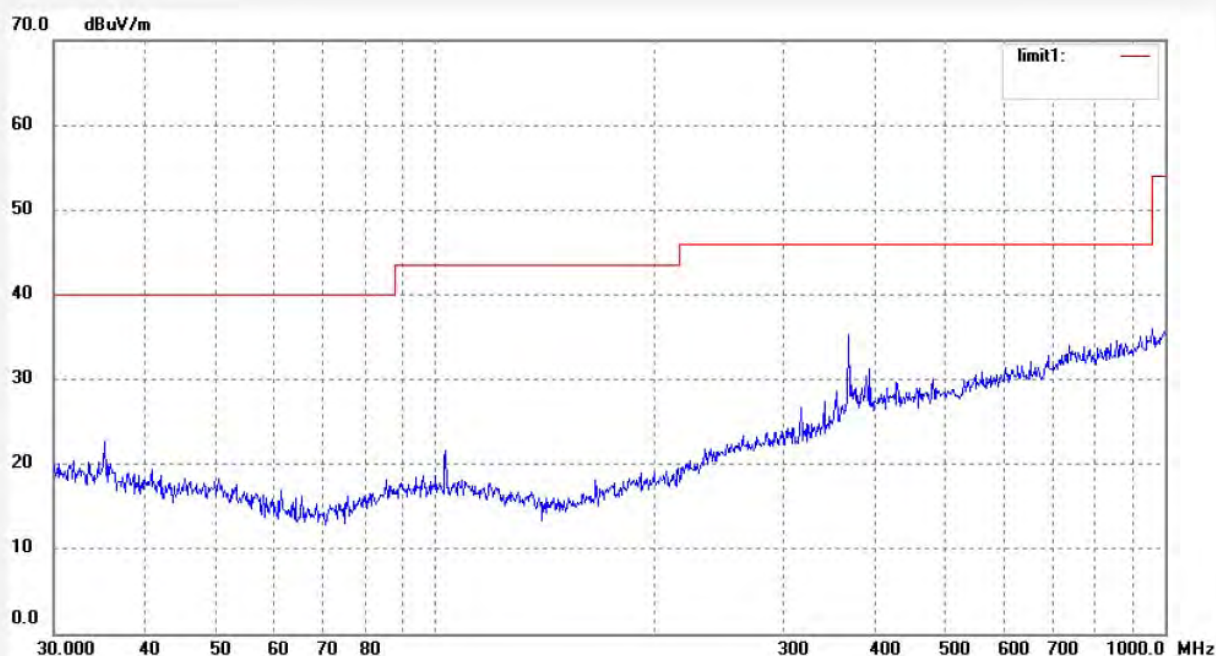

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2873
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 1(802.11g)
Model: PC7010
Manufacturer: Kintech

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/11/03
Time: 00:08:18
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122081

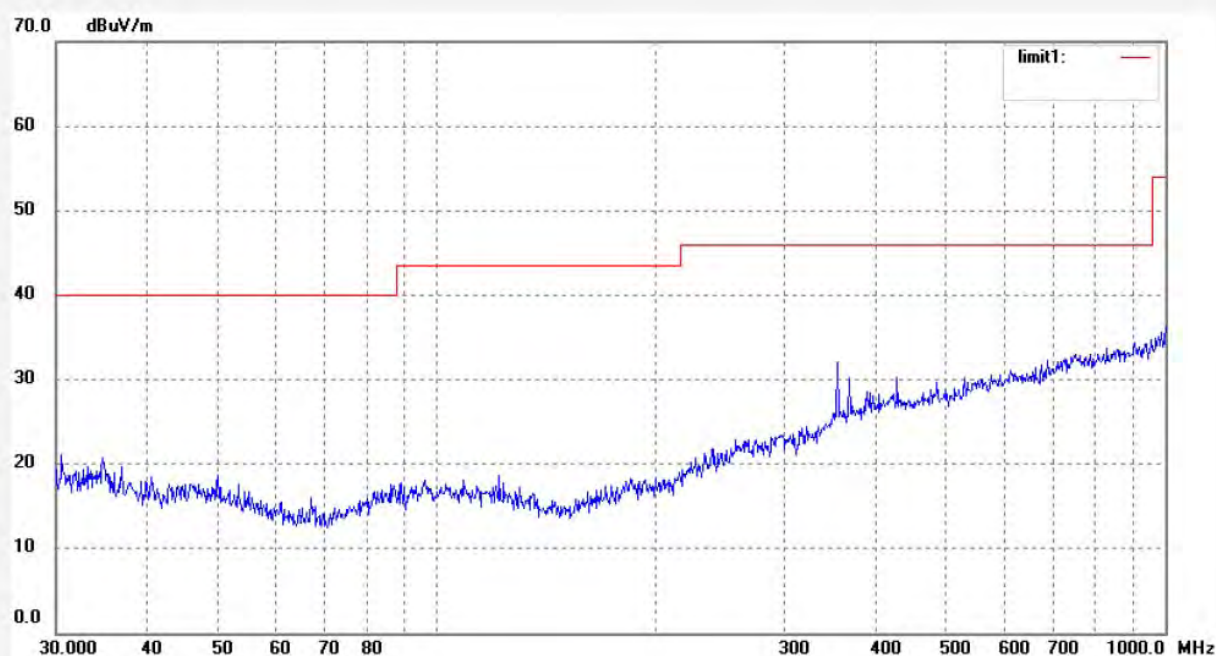

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2898

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:25:49

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

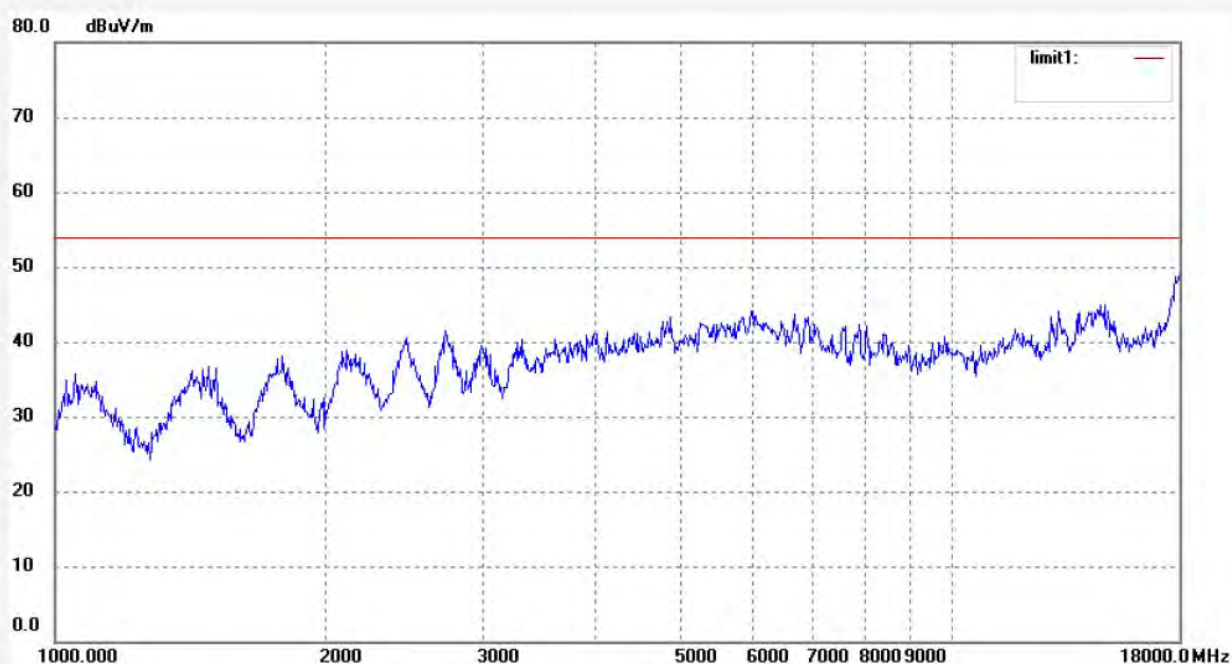

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2897
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 1(802.11g)
Model: PC7010
Manufacturer: Kintech

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/11/03
Time: 01:22:33
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122081

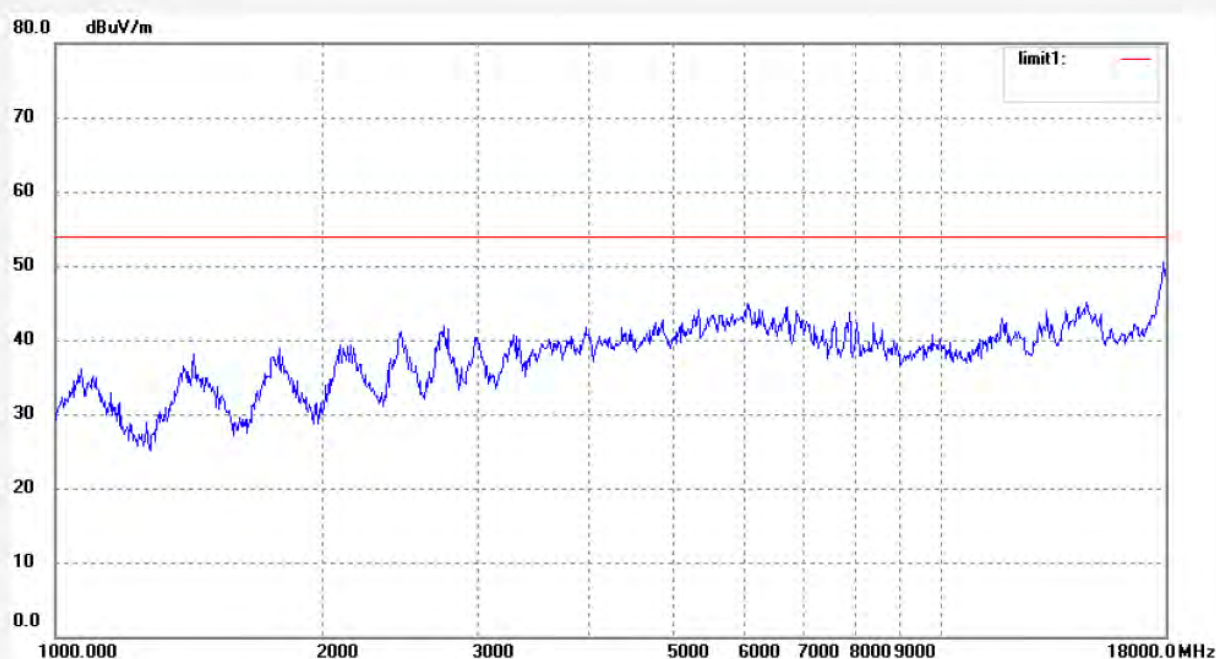

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2922

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:49:59

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

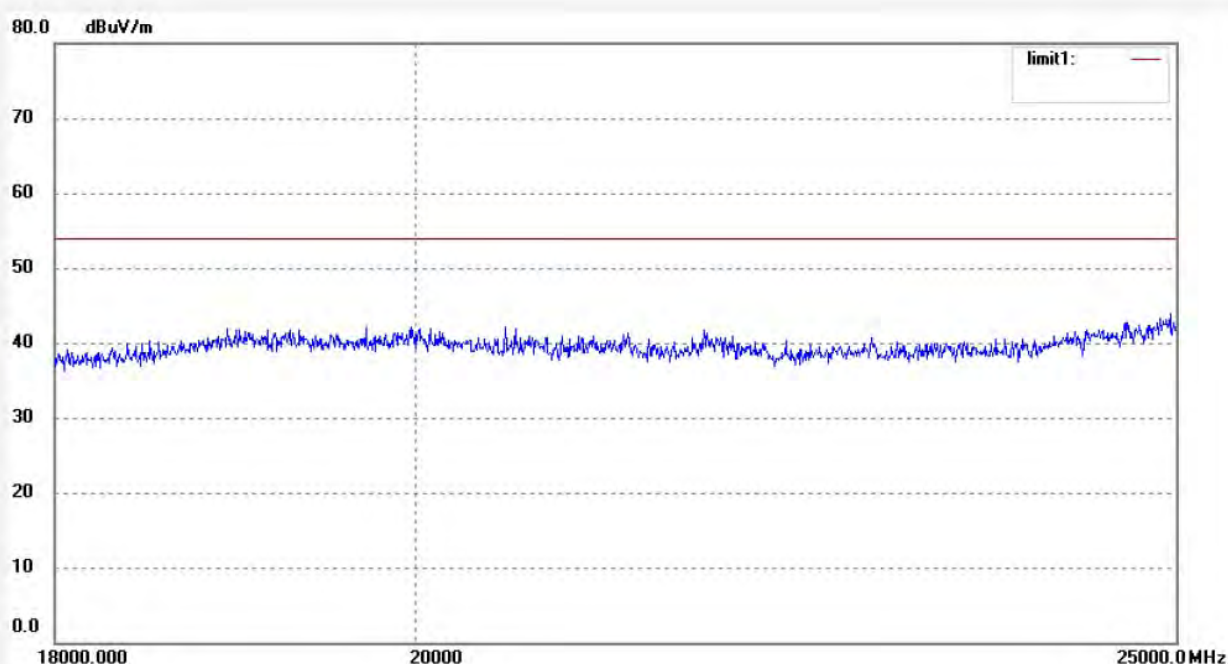

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2921

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:46:47

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

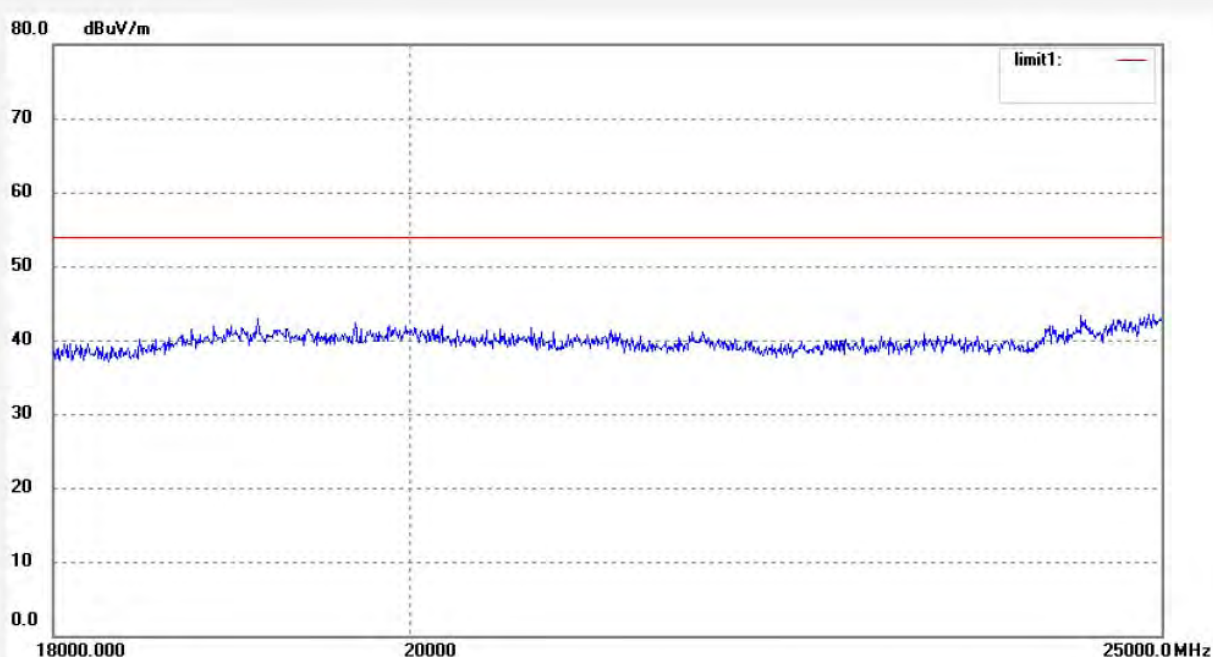

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2875

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:14:14

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122081

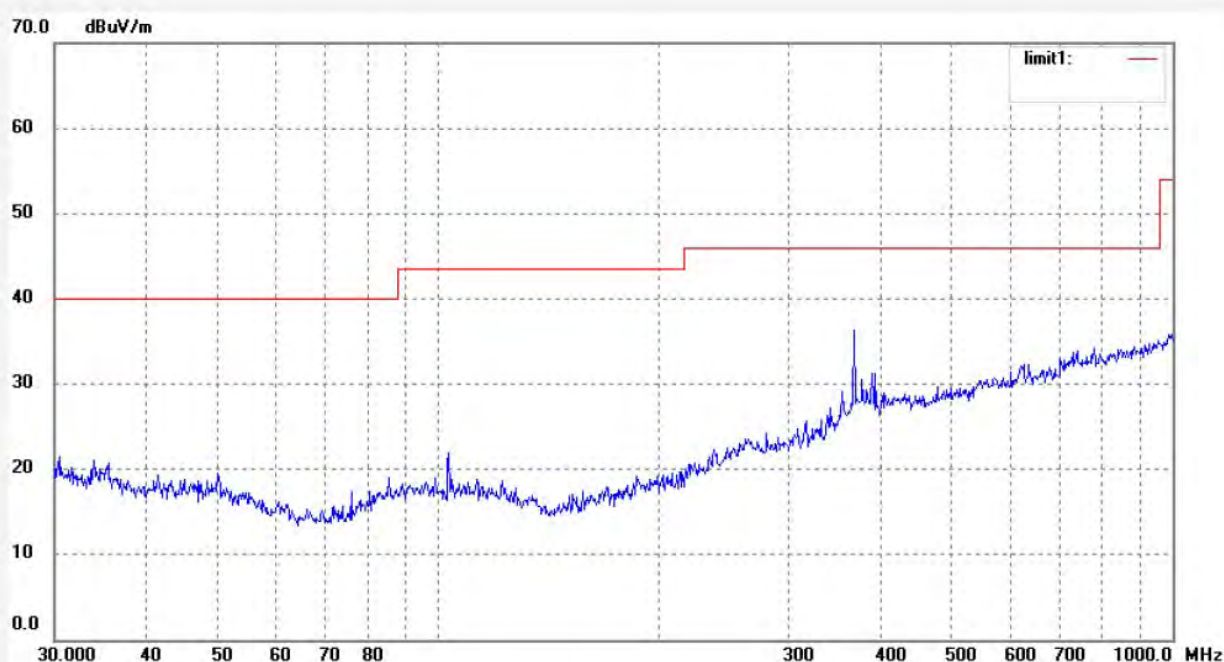

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2874

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:11:22

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

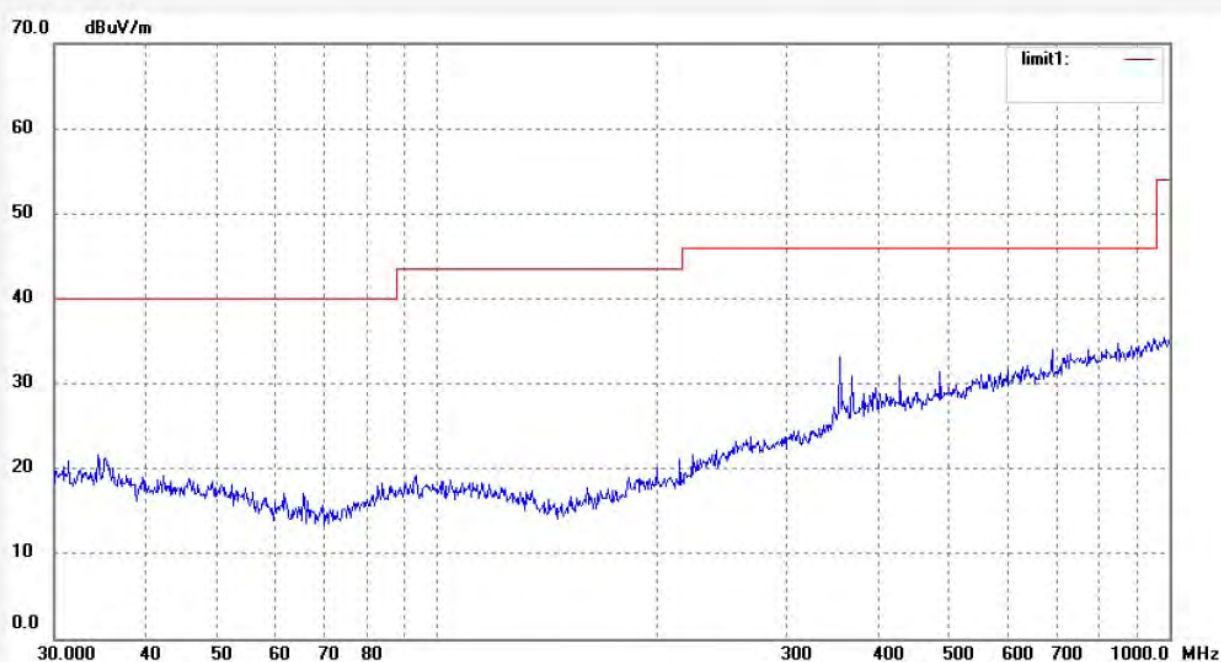

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2899

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:30:14

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

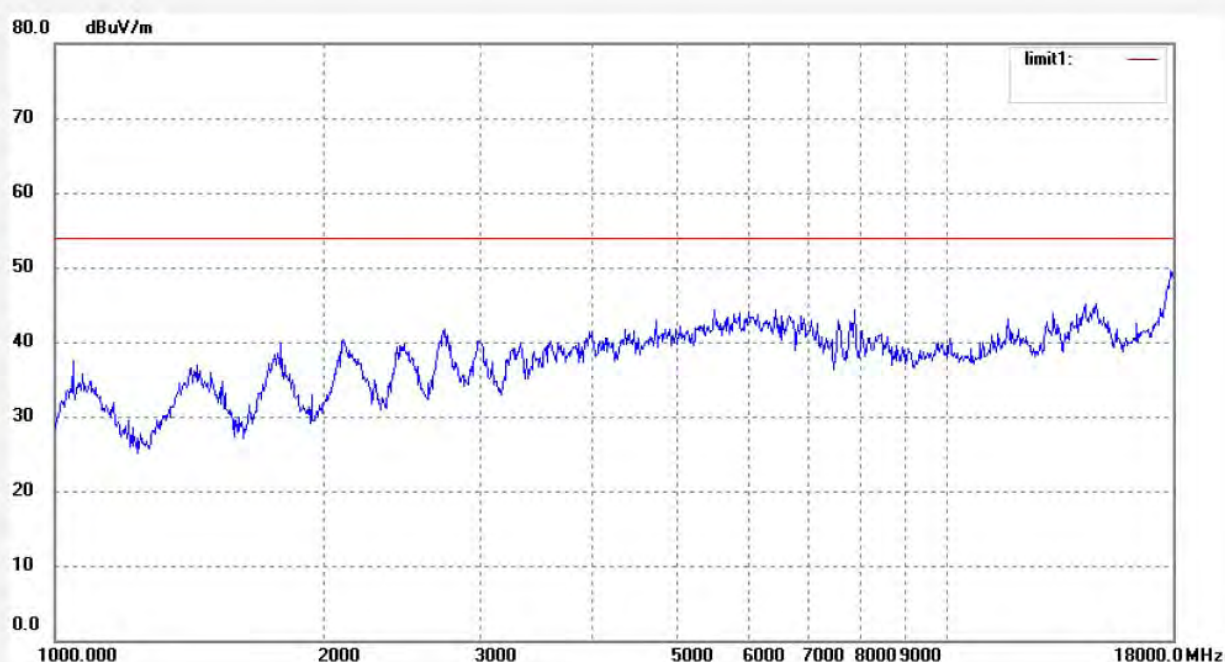

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2900

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:33:27

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

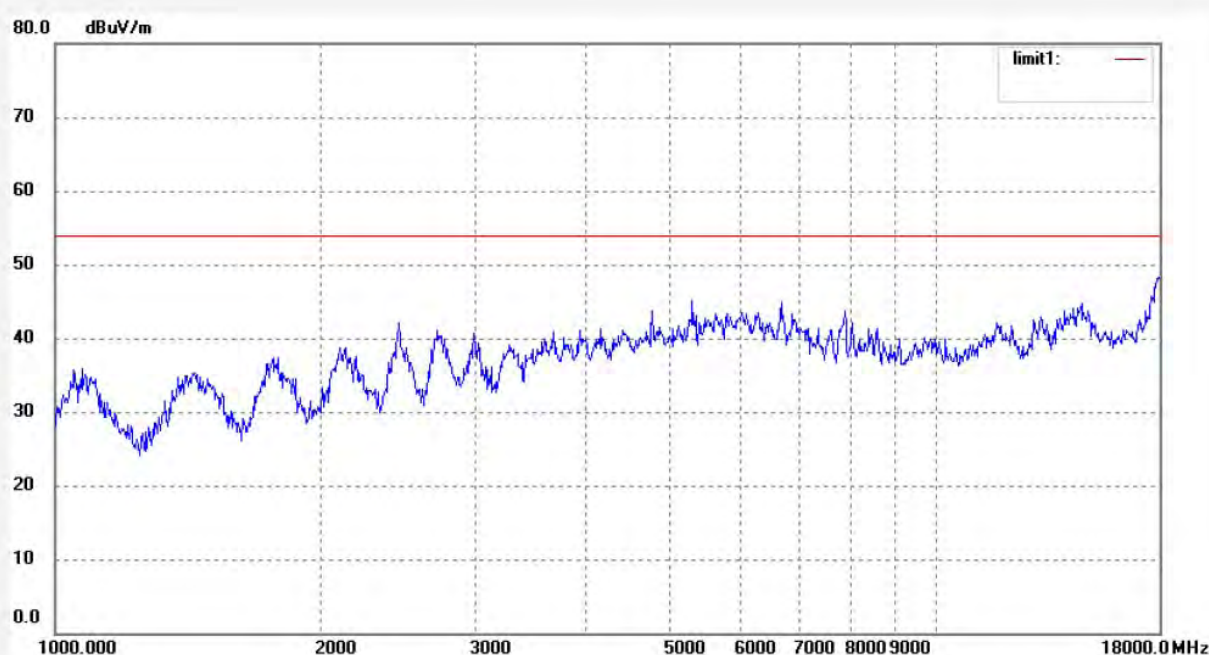

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2923

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:52:11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

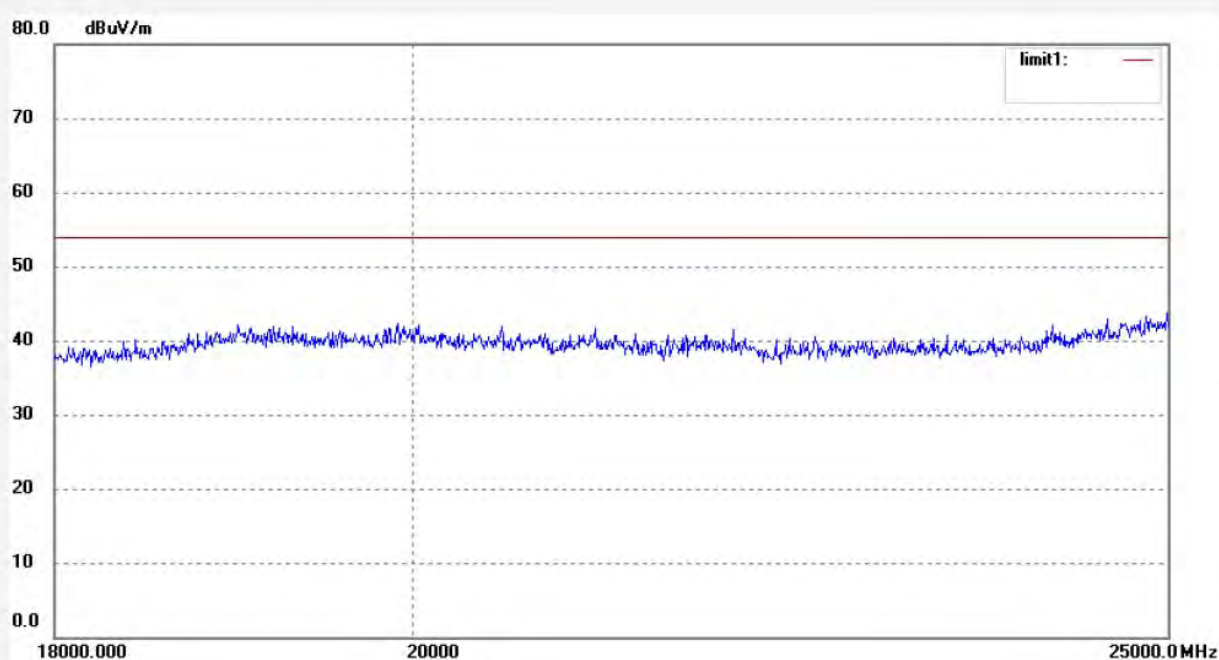

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2924

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:55:44

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

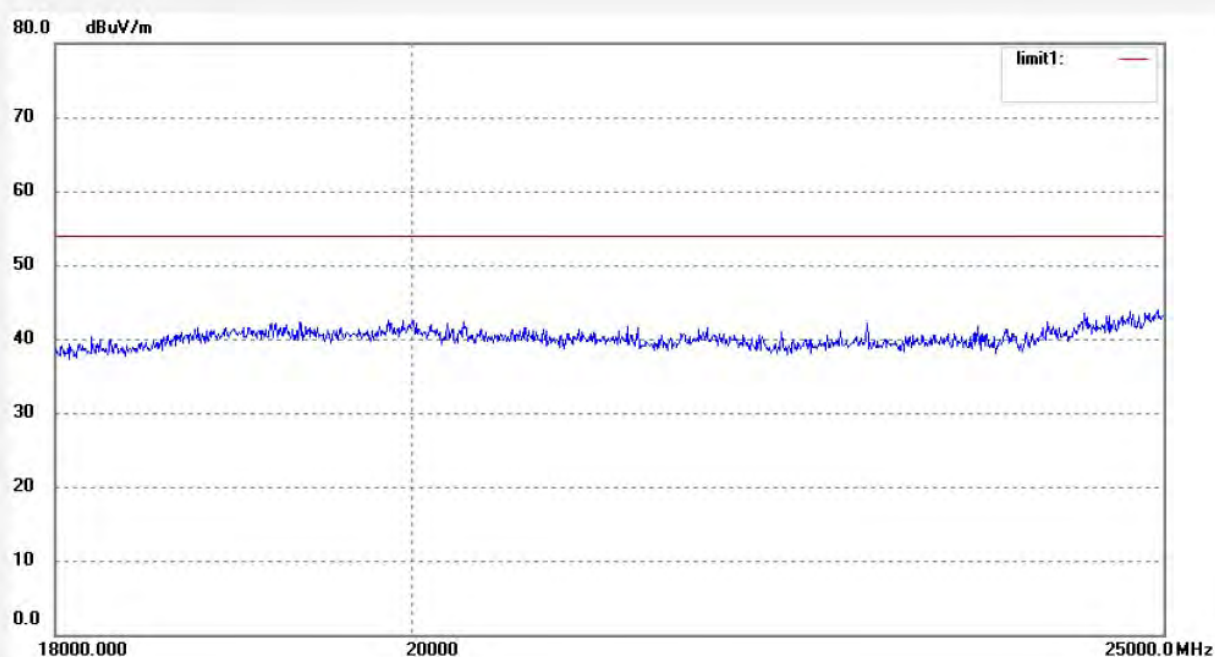

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2877

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:16:08

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

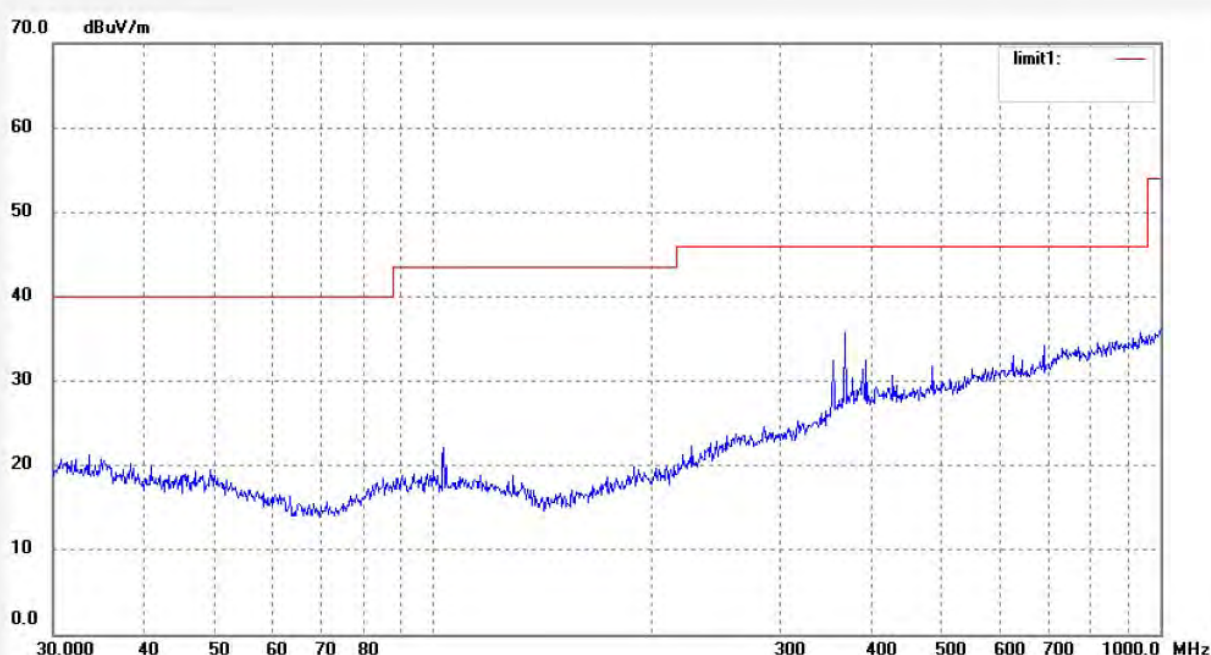

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2878

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:19:54

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

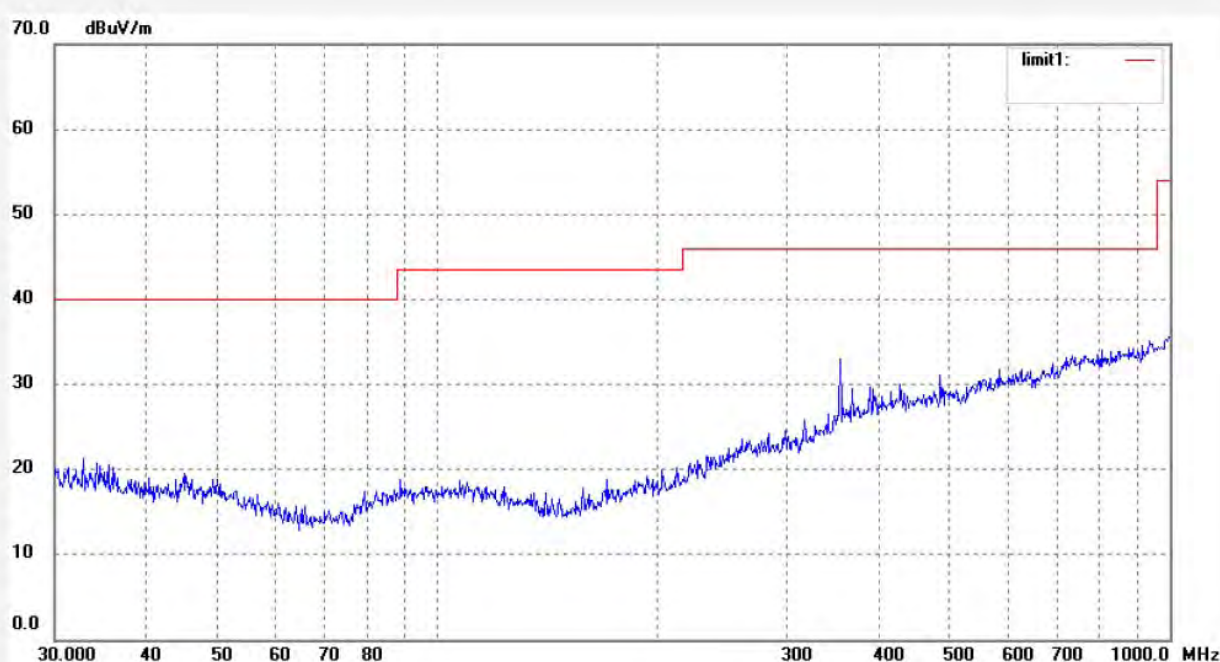

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2902

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:39:17

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122081

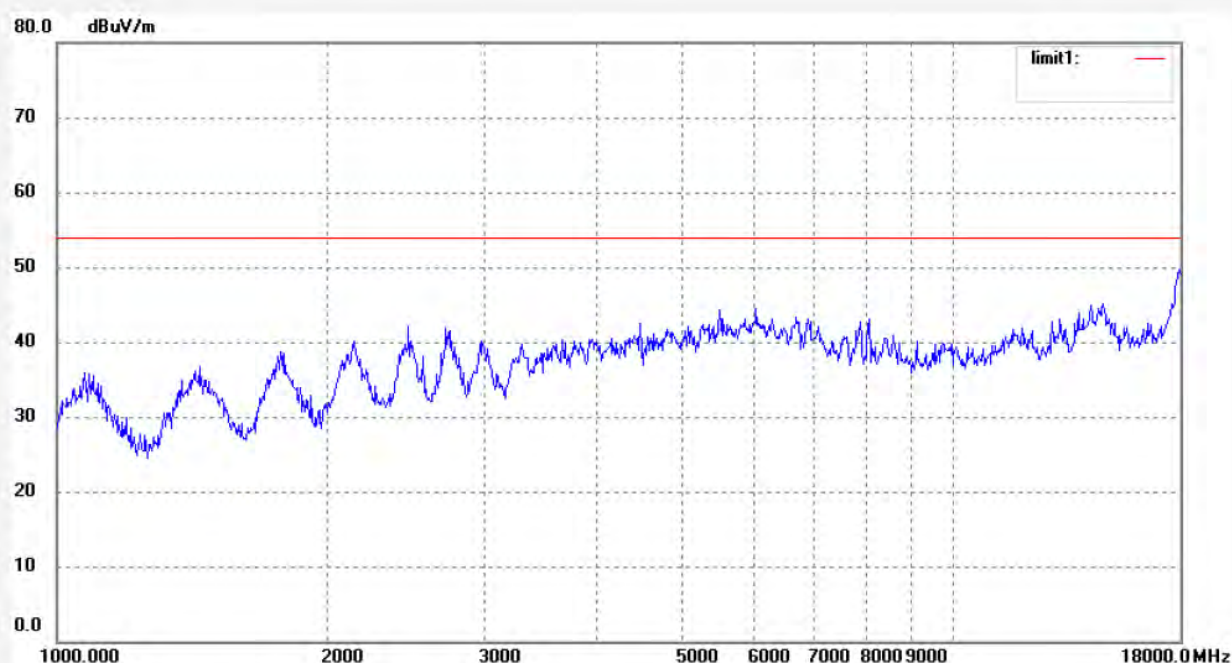

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #2901

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 01:36:59

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

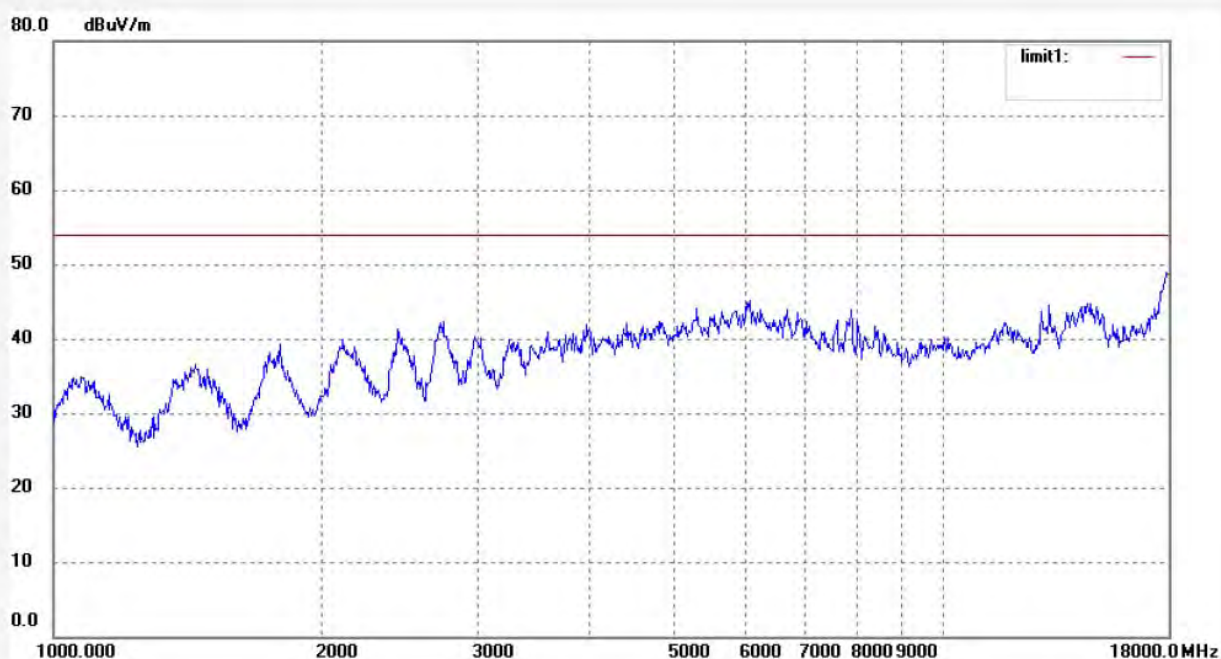

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2926

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 03:02:44

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

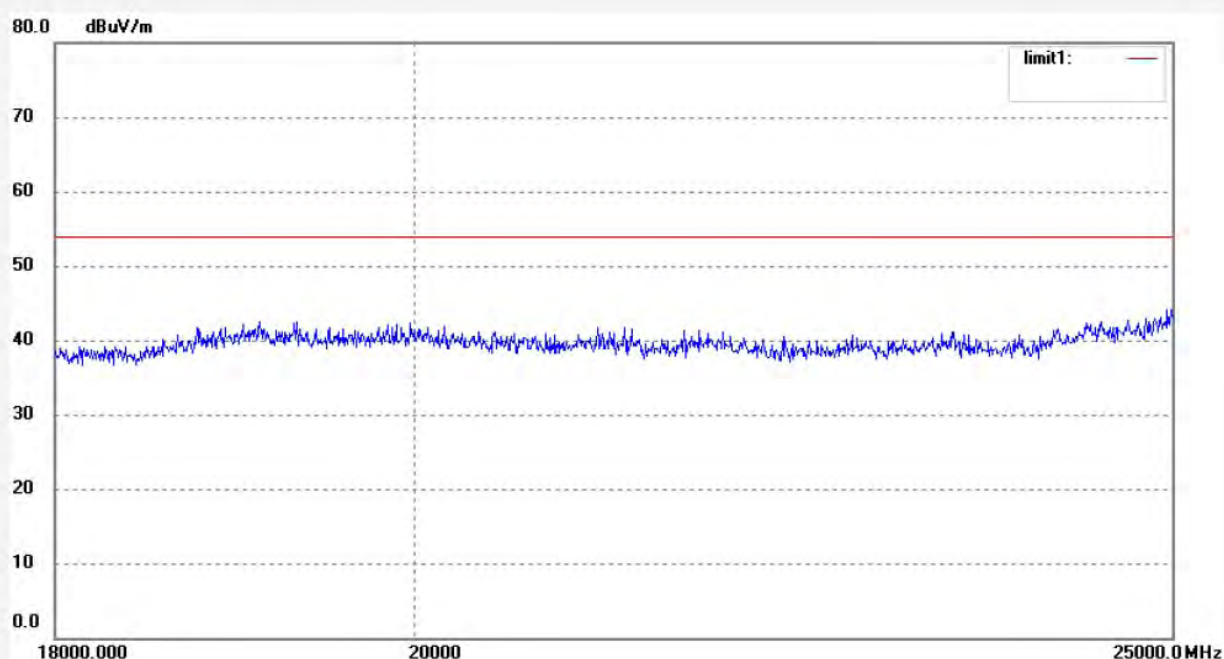

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2925

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 02:58:28

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

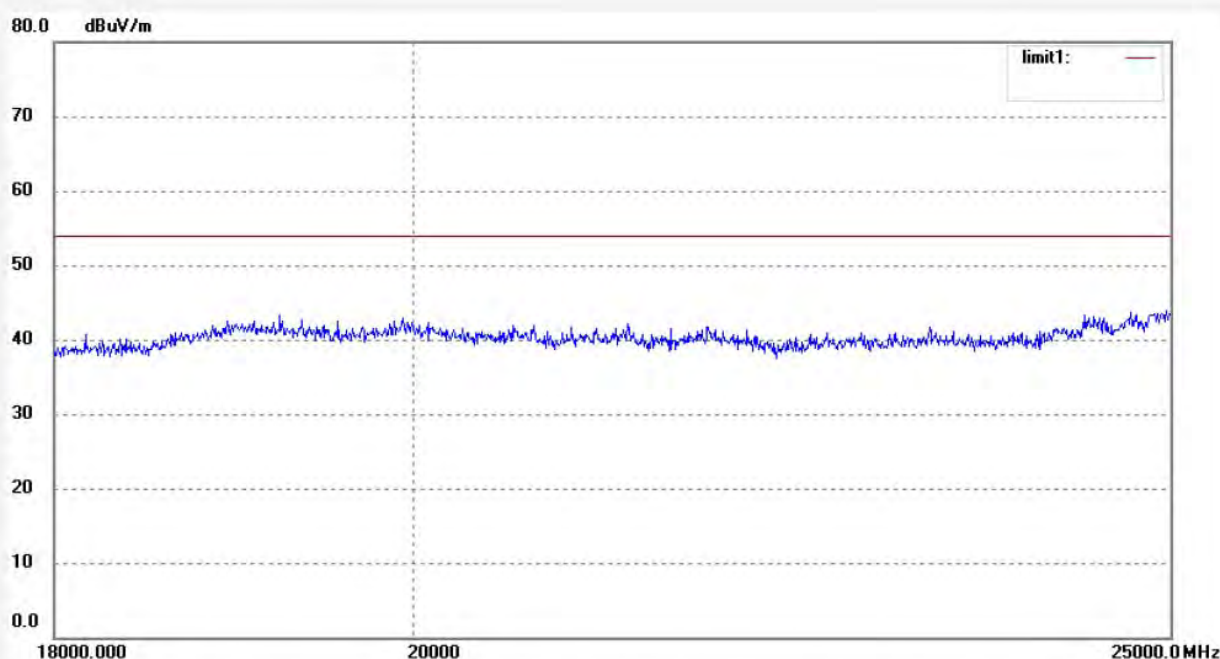

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2880

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11n)

Model: PC7010

Manufacturer: Kintech

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:24:50

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

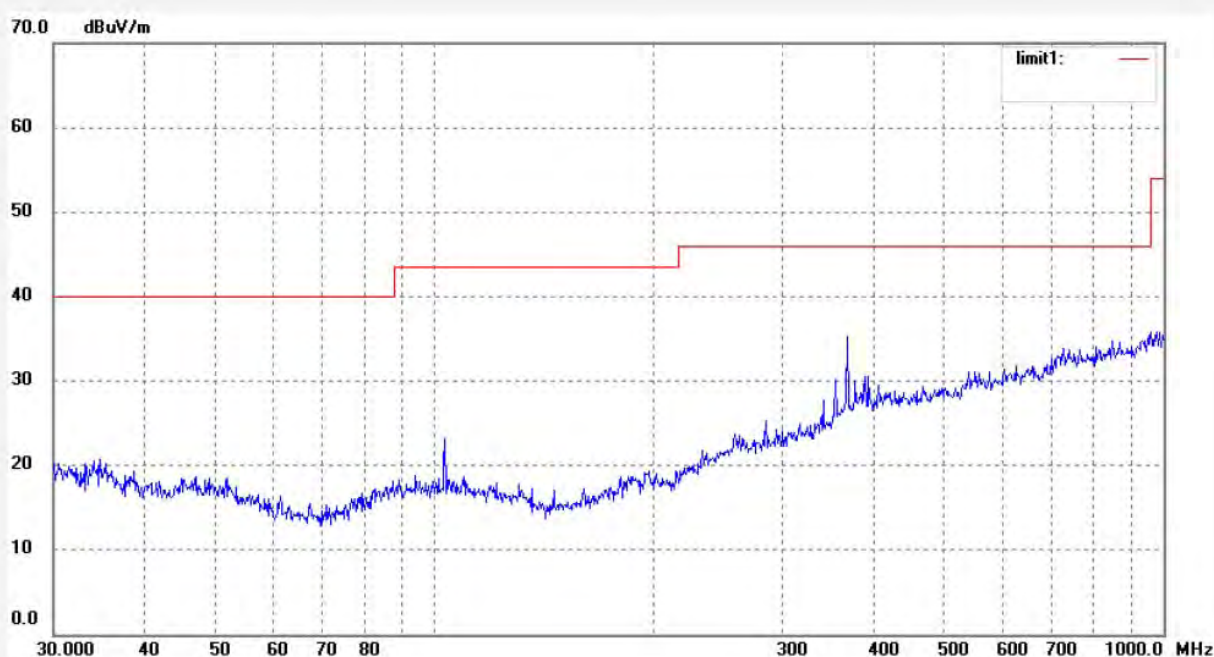

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2879

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11n)

Model: PC7010

Manufacturer: Kintech

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/03

Time: 00:21:11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122081

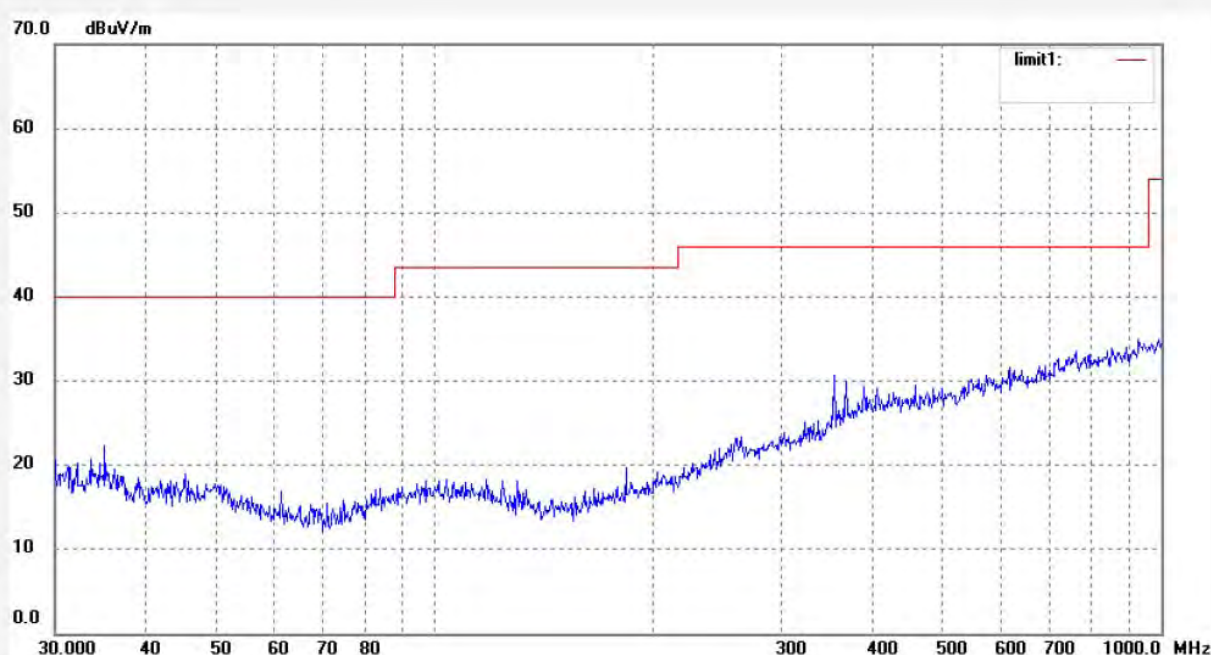

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------