

PCS 1900 Mid-Touch- Left <SIM 1>
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

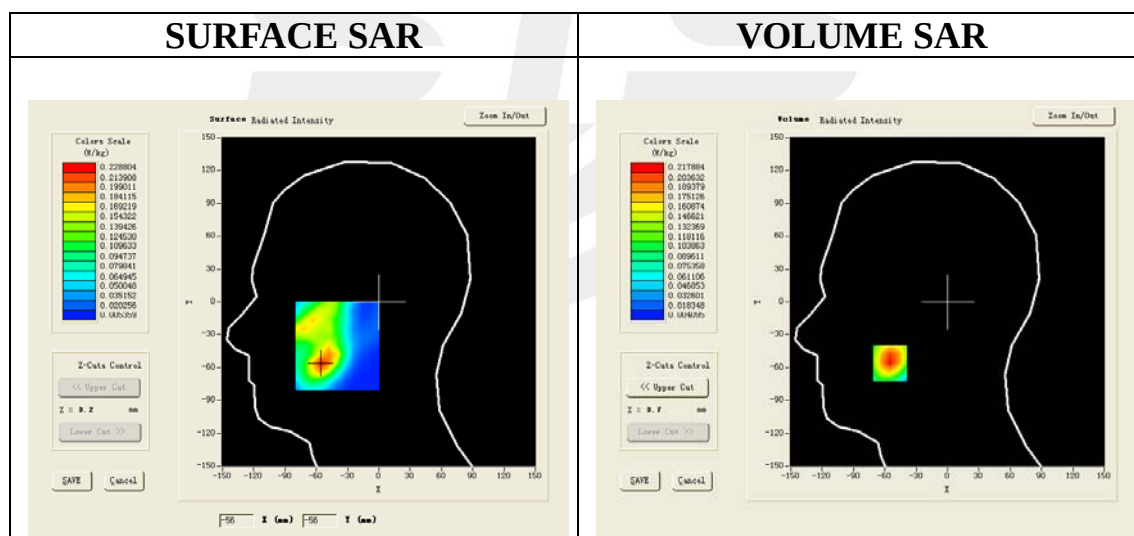

Maximum location: X=-55.00, Y=-56.00

SAR 10g (W/Kg)	0.119897
SAR 1g (W/Kg)	0.205877

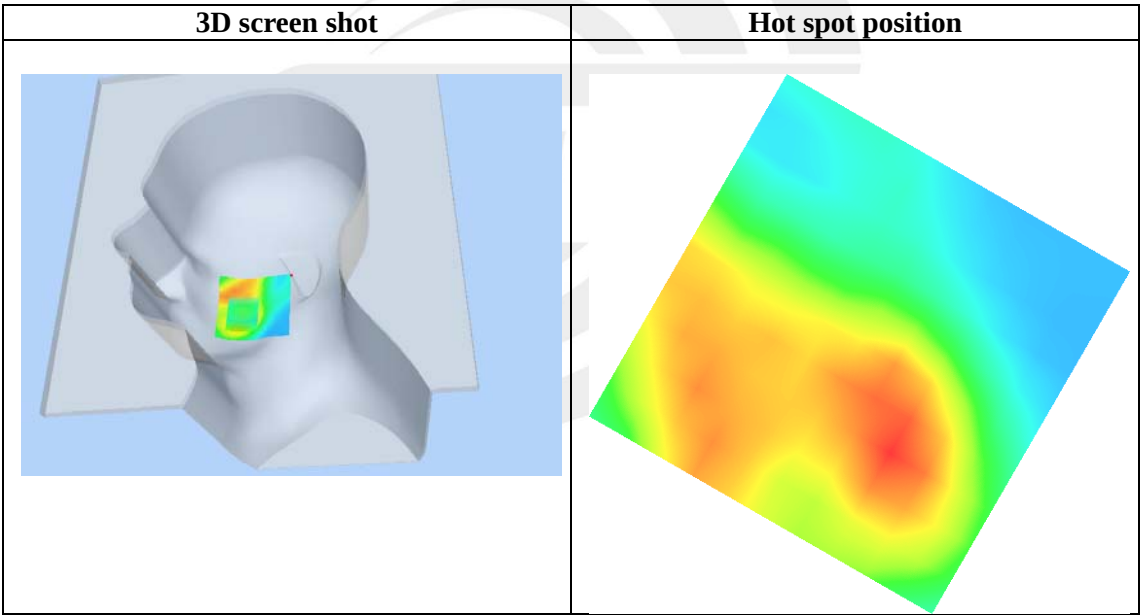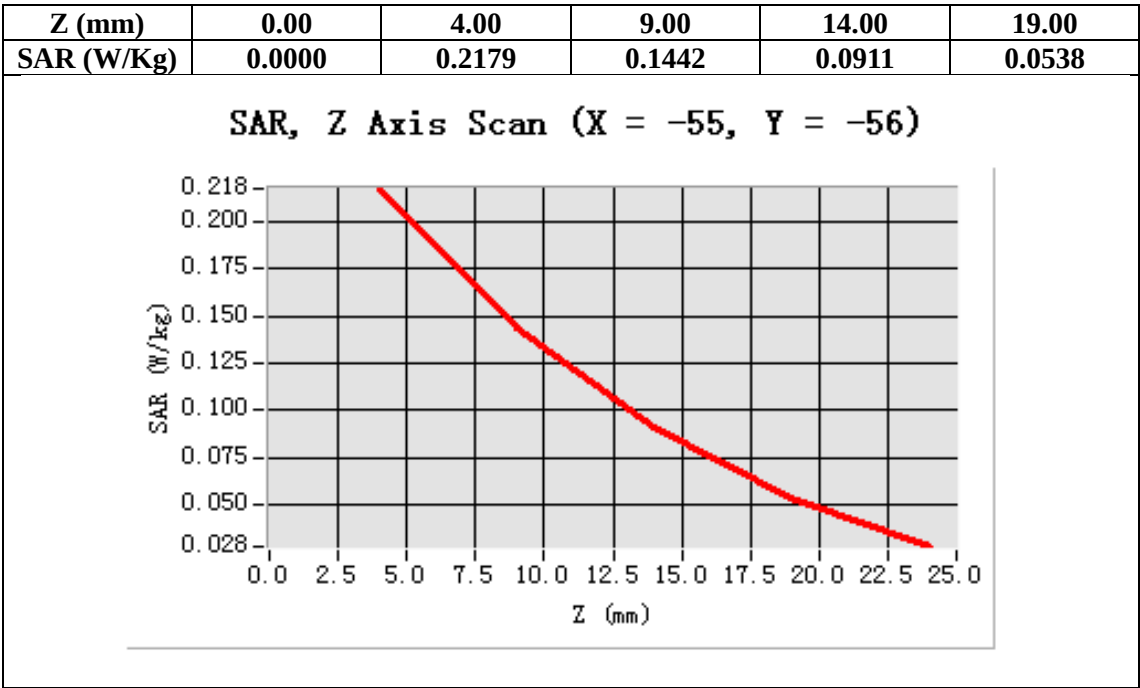

PCS 1900 Mid-Tilt-Left <SIM 1>
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Tilt-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

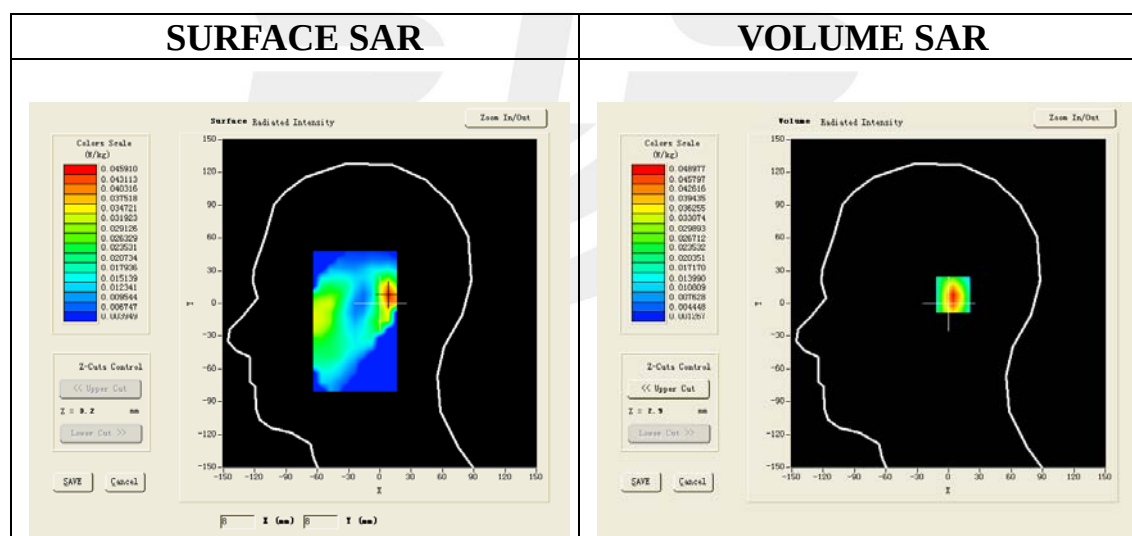

Maximum location: X=9.00, Y=8.00

SAR 10g (W/Kg)	0.023928
SAR 1g (W/Kg)	0.045731

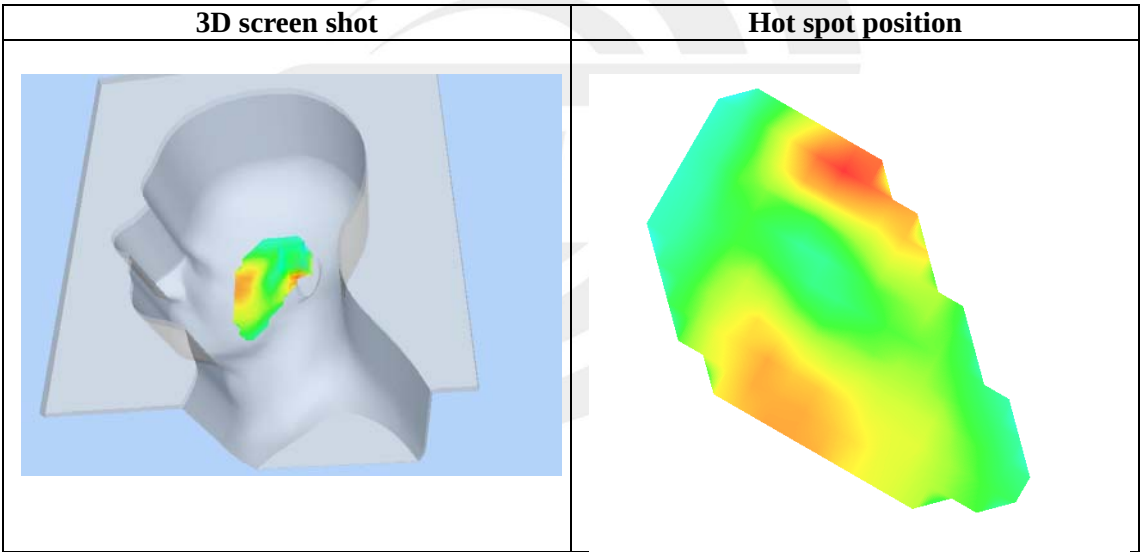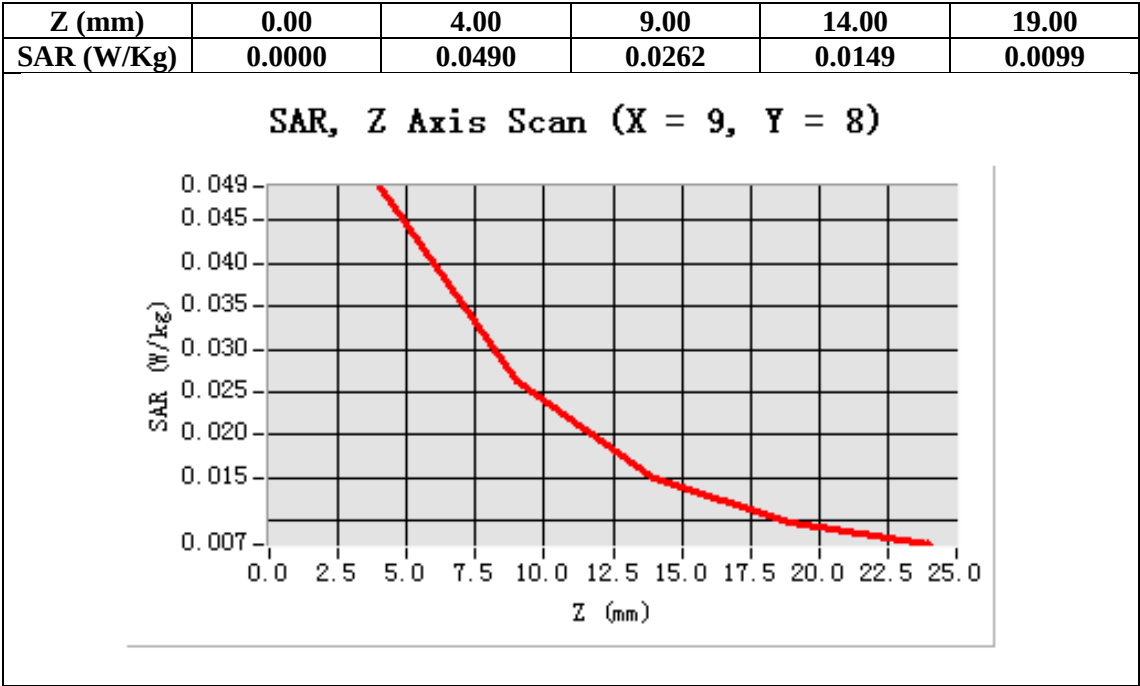

PCS 1900 Mid-Touch-Right <SIM 1>
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

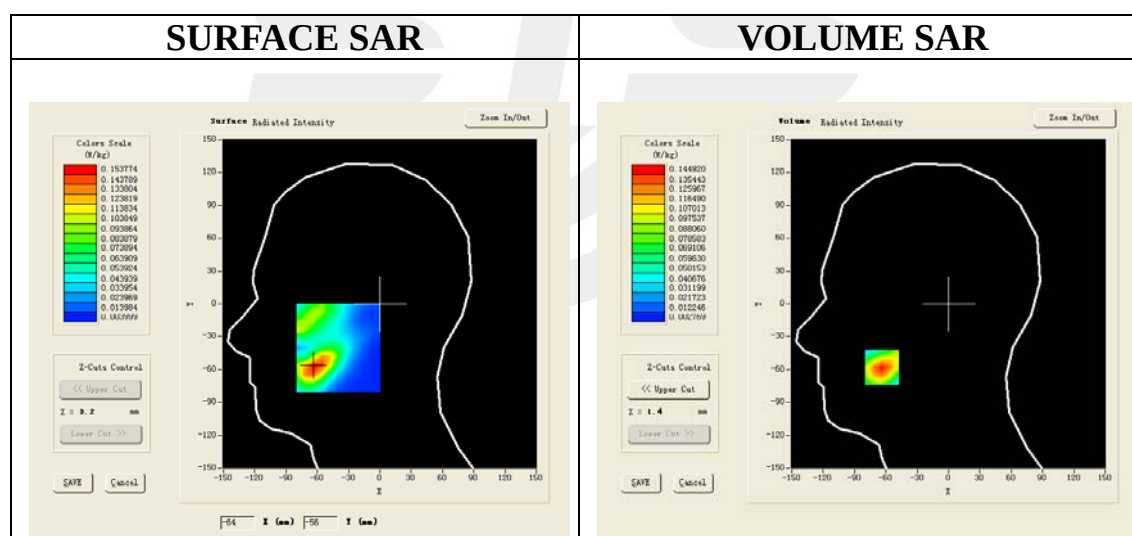

Maximum location: X=-64.00, Y=-58.00

SAR 10g (W/Kg)	0.072920
SAR 1g (W/Kg)	0.136014

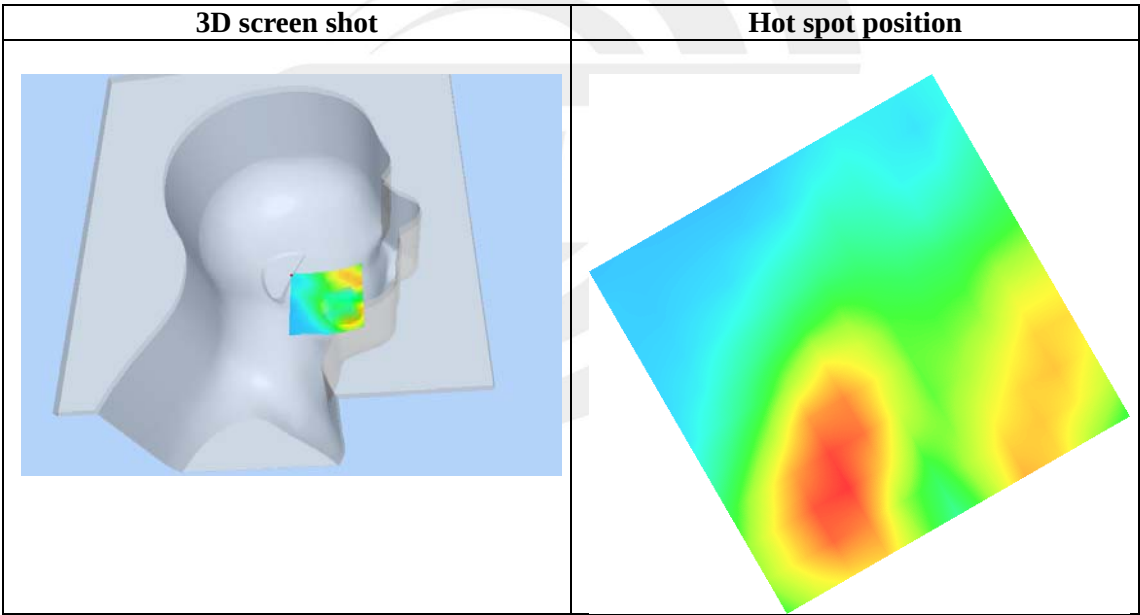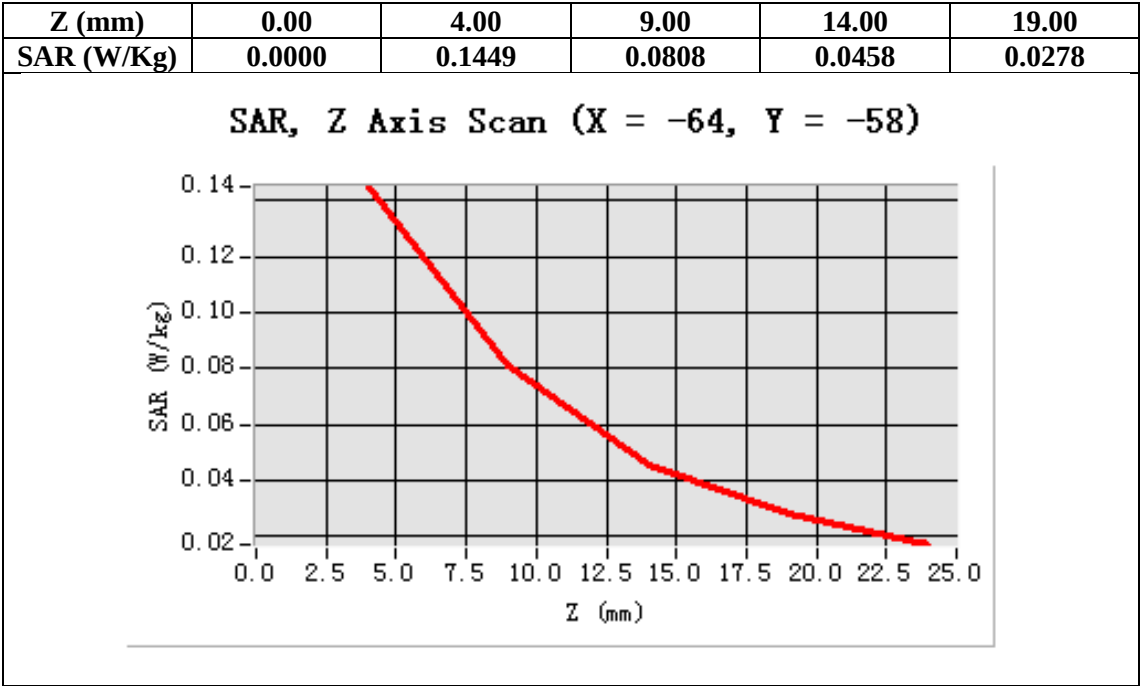

PCS 1900 Mid-Tilt-Right <SIM 1>
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

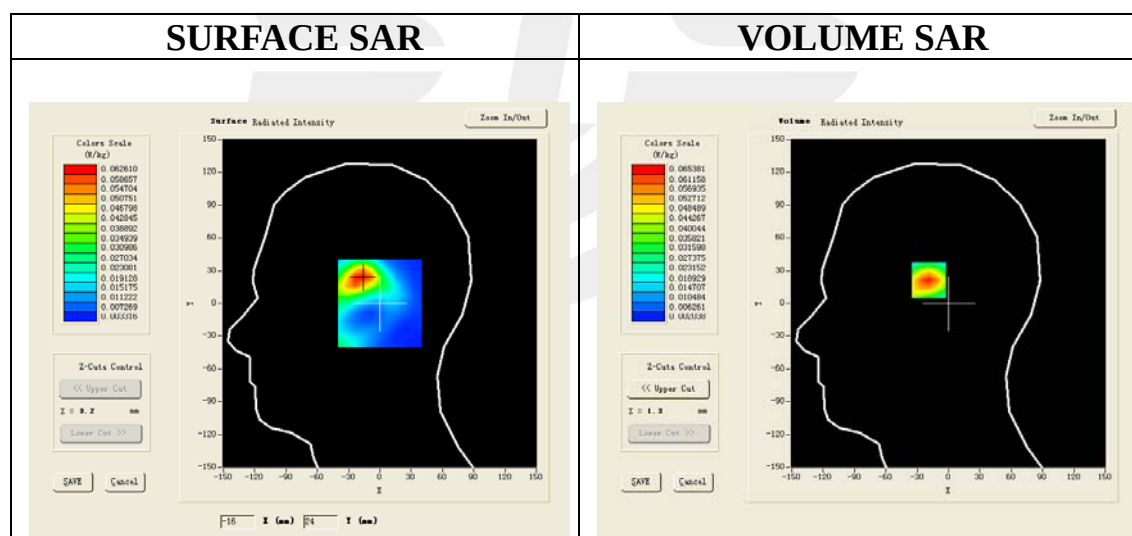

Maximum location: X=-18.00, Y=24.00

SAR 10g (W/Kg)	0.034235
SAR 1g (W/Kg)	0.061008

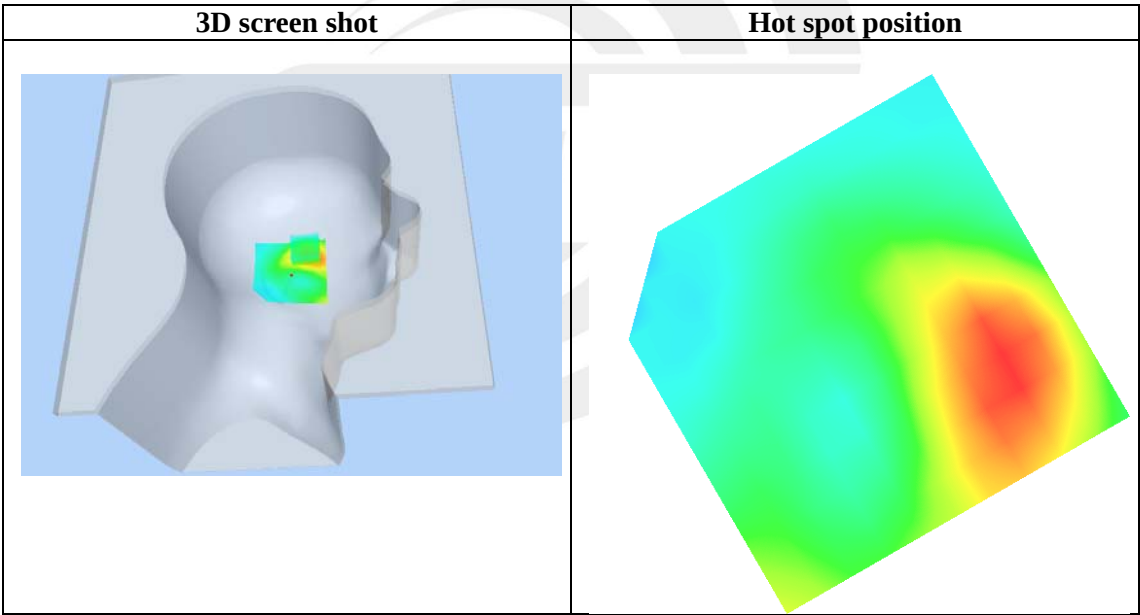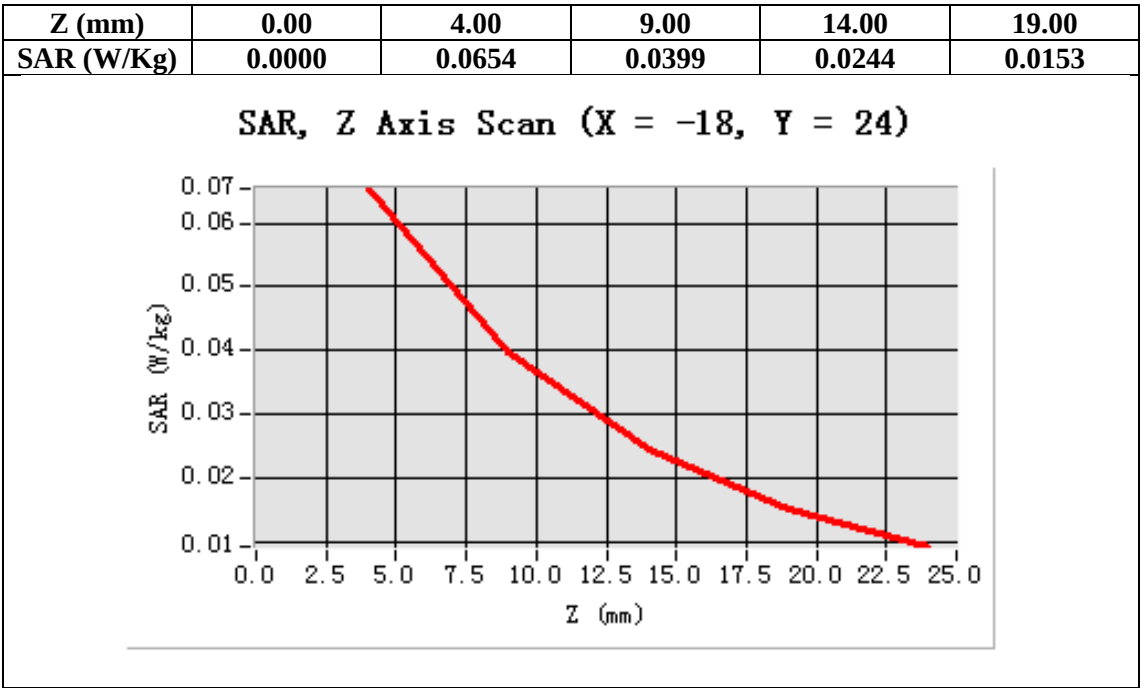

PCS 1900 Mid-Touch- Left <SIM 2>
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

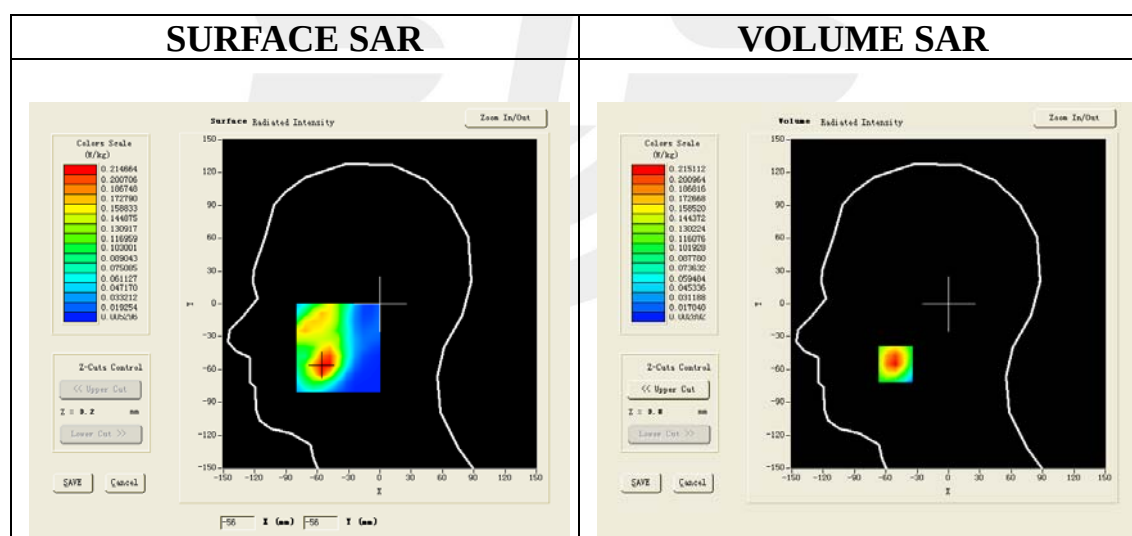

Maximum location: X=-51.00, Y=-55.00

SAR 10g (W/Kg)	0.114052
SAR 1g (W/Kg)	0.203355

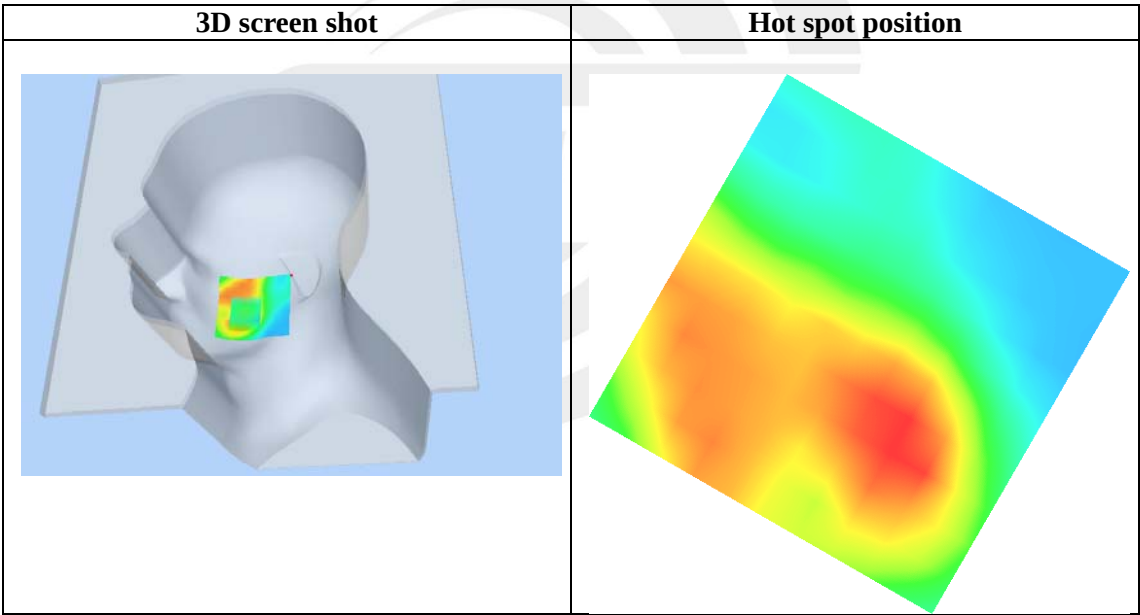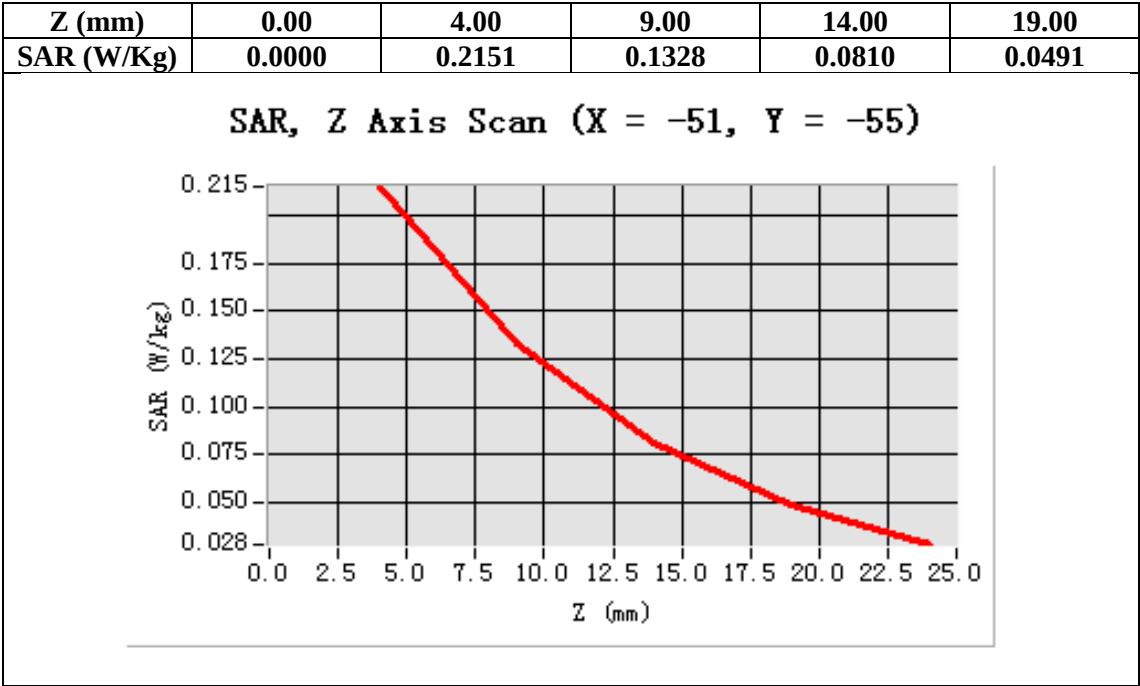

PCS 1900 Mid-Body-Back <SIM 1>
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

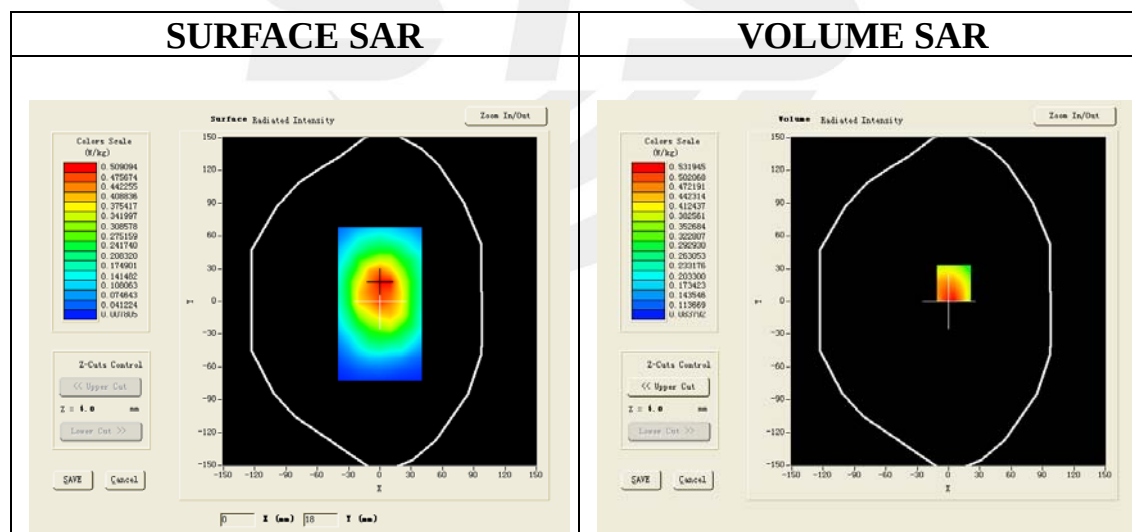

Maximum location: X=5.00, Y=17.00

SAR 10g (W/Kg)	0.348208
SAR 1g (W/Kg)	0.499726

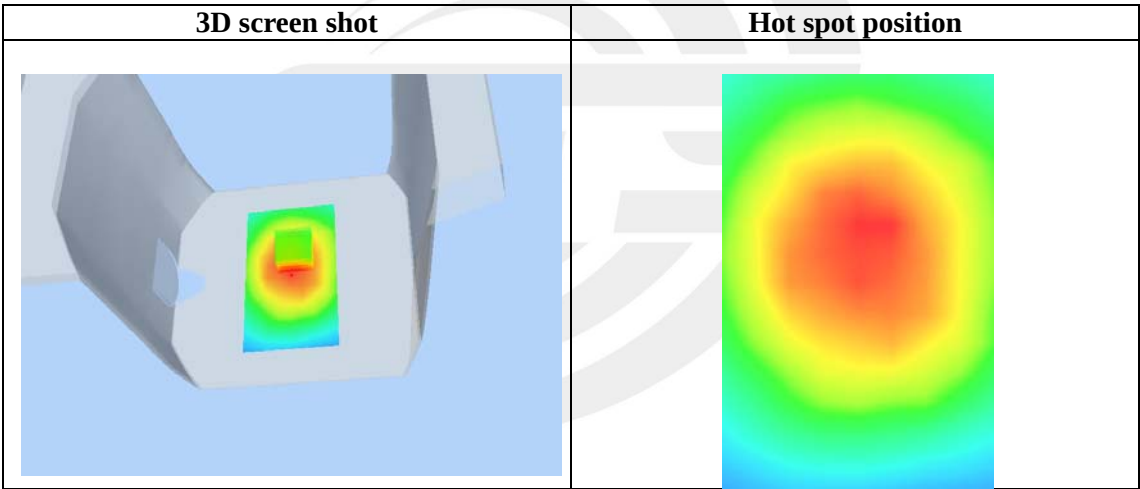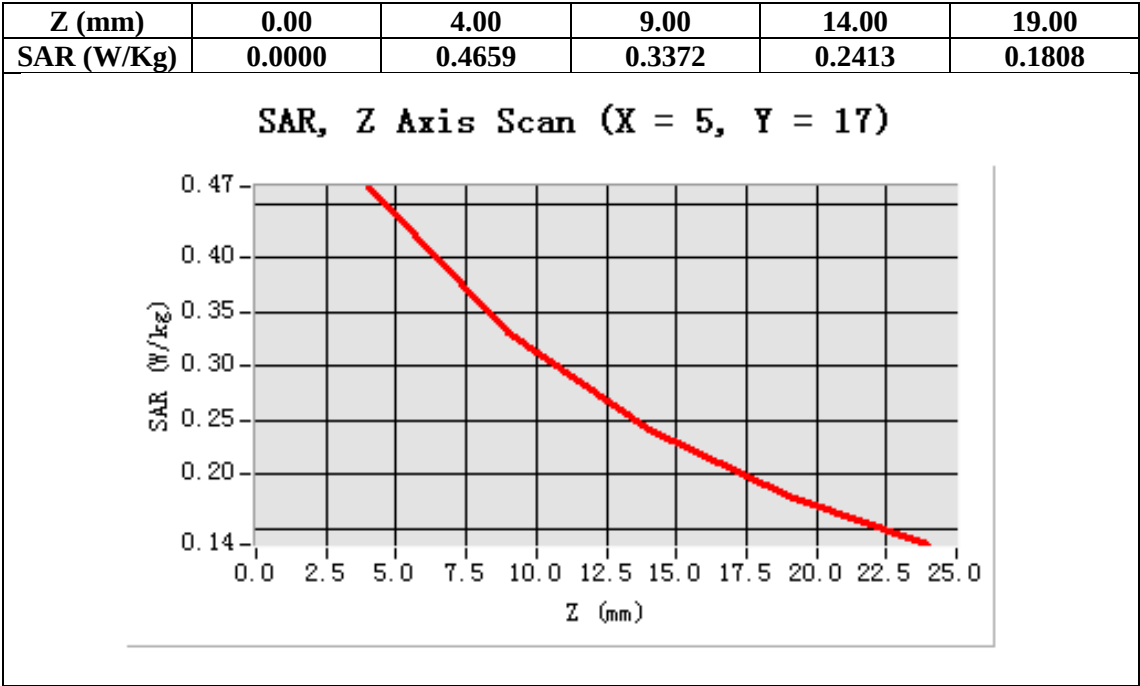

PCS 1900 Mid-Body -Front (MS) <SIM 1>
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Front
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

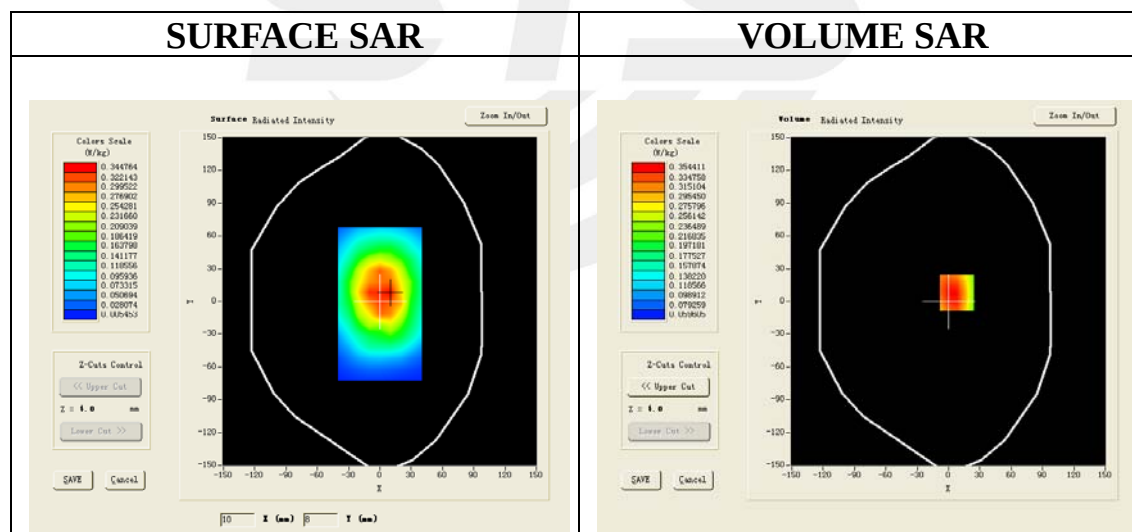

Maximum location: X=8.00, Y=8.00

SAR 10g (W/Kg)	0.237462
SAR 1g (W/Kg)	0.344923

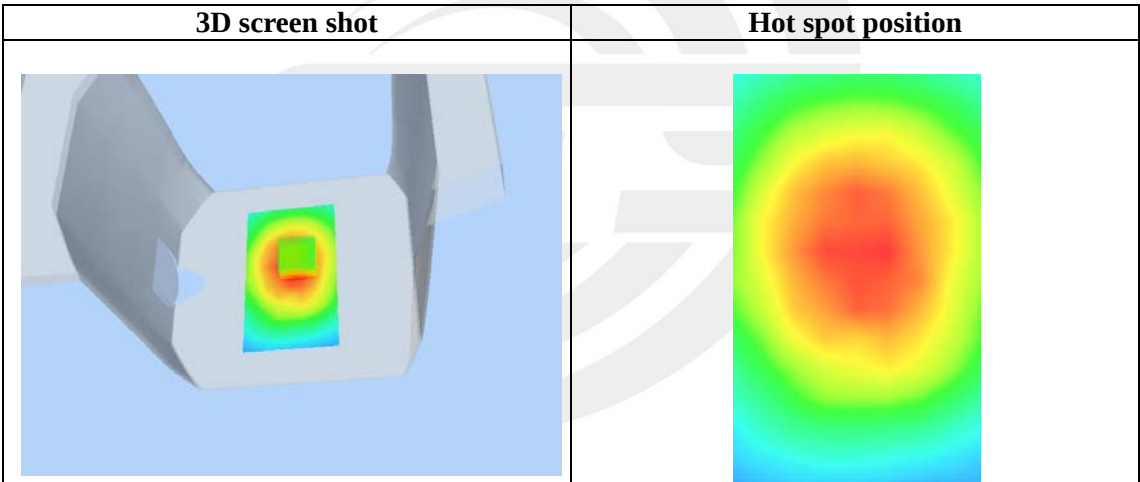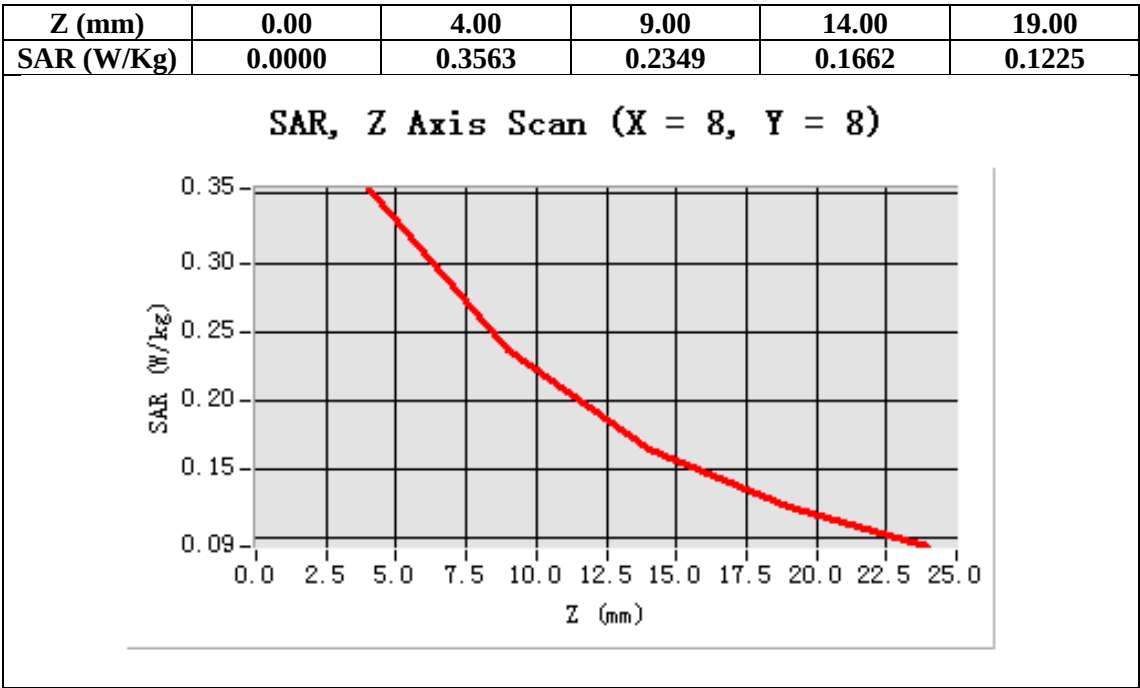

PCS 1900 Mid-Edge 2(Right)(MS)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid- Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid- Edge 2(Right)/Zoom Scan: Measurement grid:dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Horizontal
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

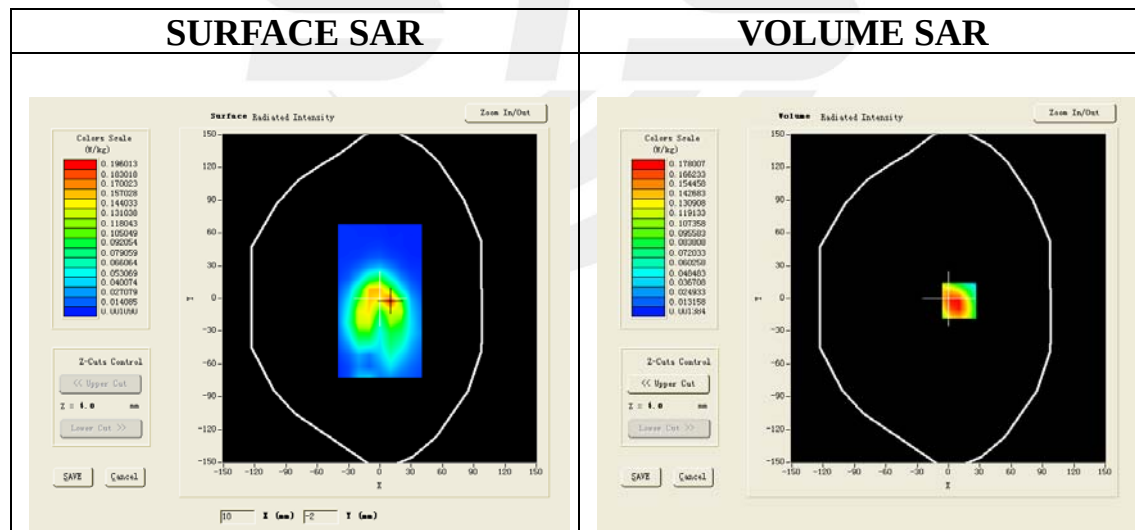

Maximum location: X=10.00, Y=-2.00

SAR 10g (W/Kg)	0.082456
SAR 1g (W/Kg)	0.174270

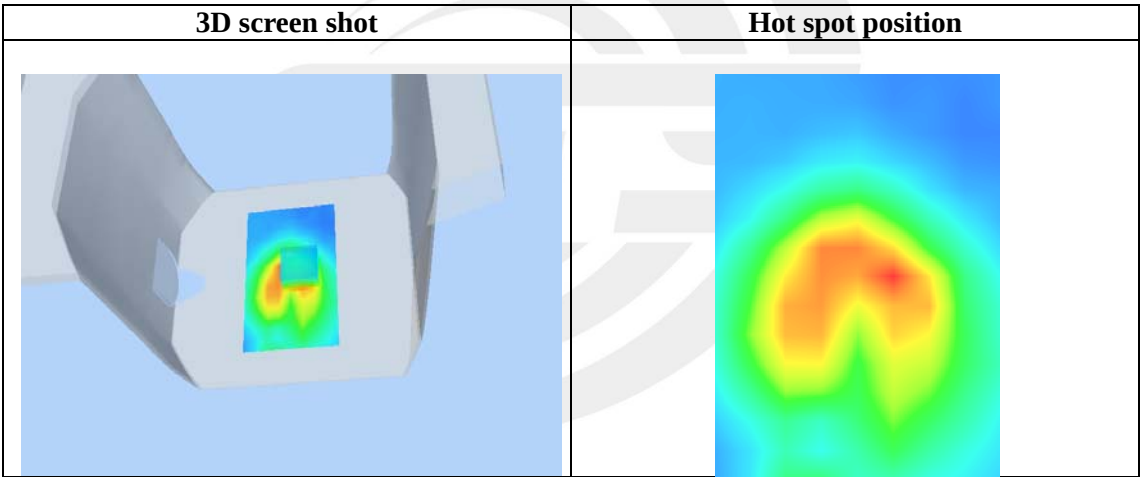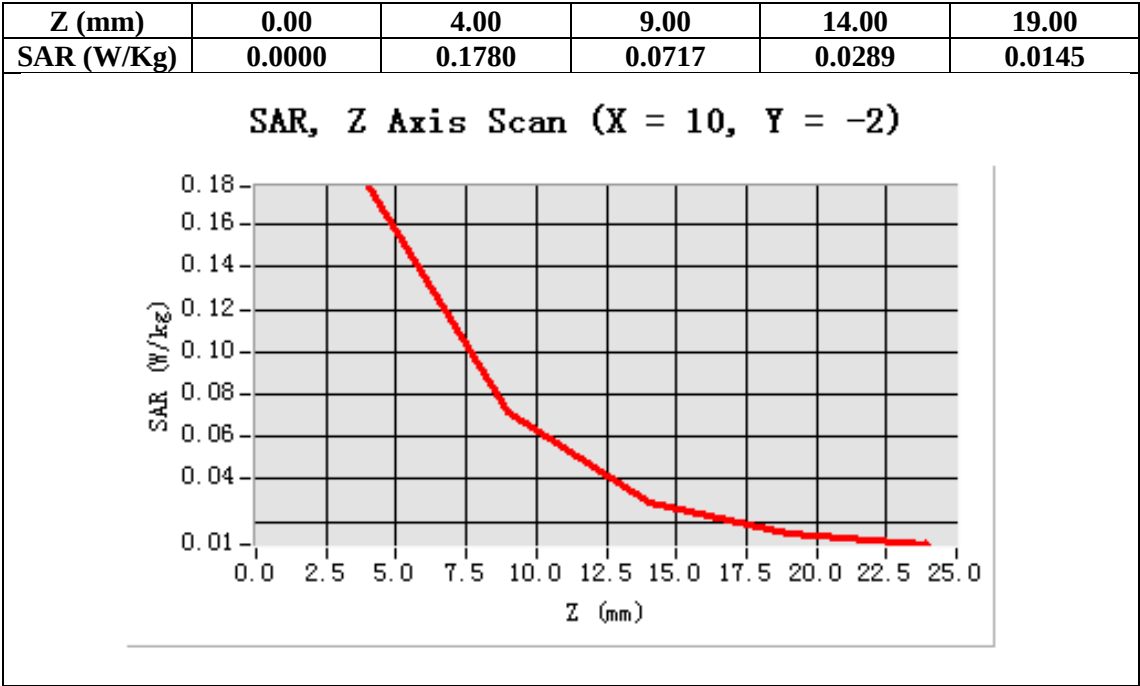

PCS 1900 Mid-Edge 4(Left) (MS)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid- Edge 4(Left) /Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid- Edge 4(Left) /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Horizontal
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

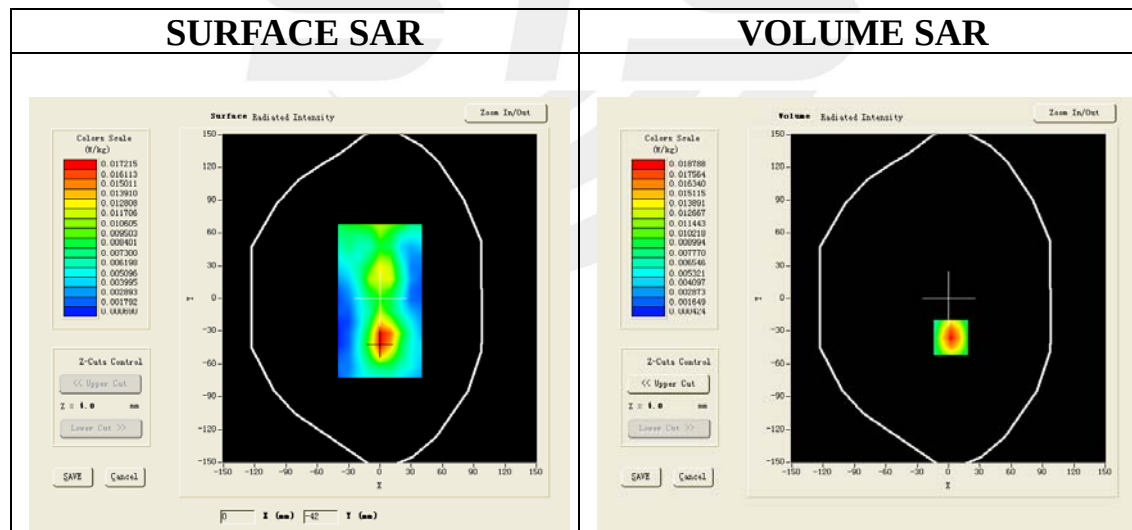

Maximum location: X=2.00, Y=-36.00

SAR 10g (W/Kg)	0.005889
SAR 1g (W/Kg)	0.018575

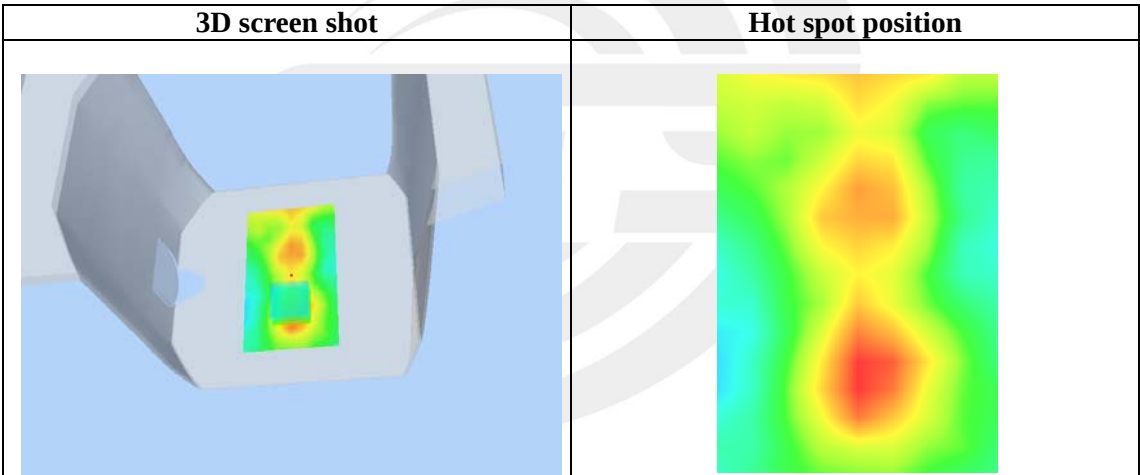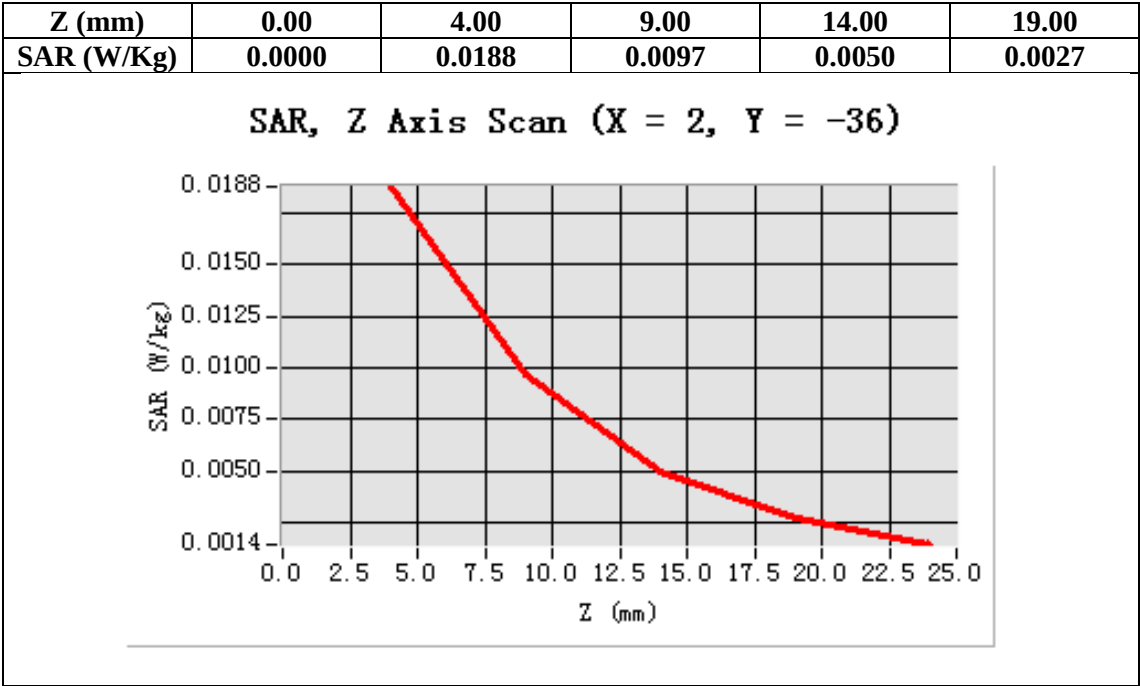

PCS 1900 Mid-Edge 3(Bottom (MS)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Edge 3(Bottom /Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/PCS1900 Mid-Edge 3(Bottom /Zoom Scan: Measurement grid: dx=8mm,
dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Vertical
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

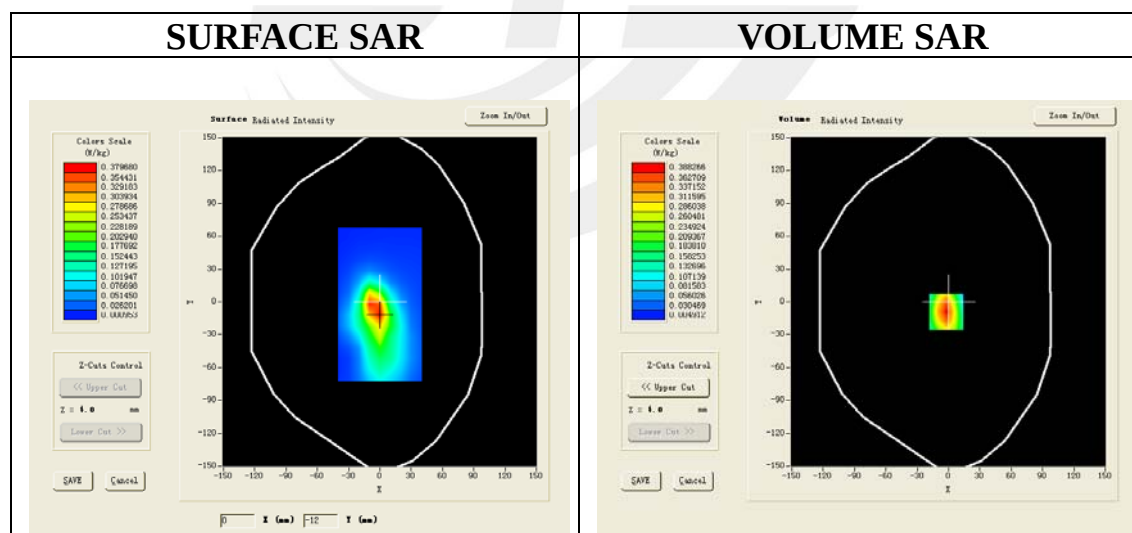

Maximum location: X=-2.00, Y=-9.00

SAR 10g (W/Kg)	0.181604
SAR 1g (W/Kg)	0.362038

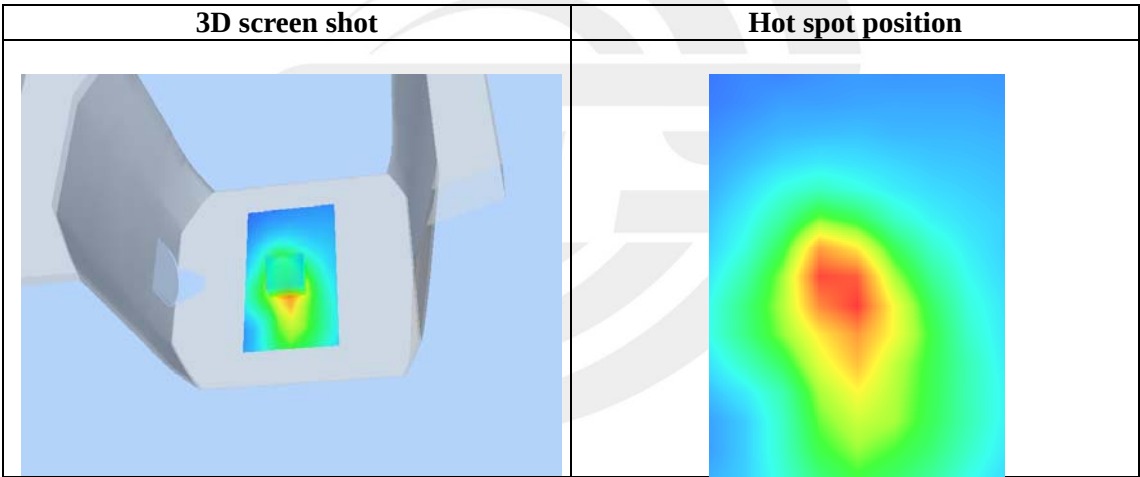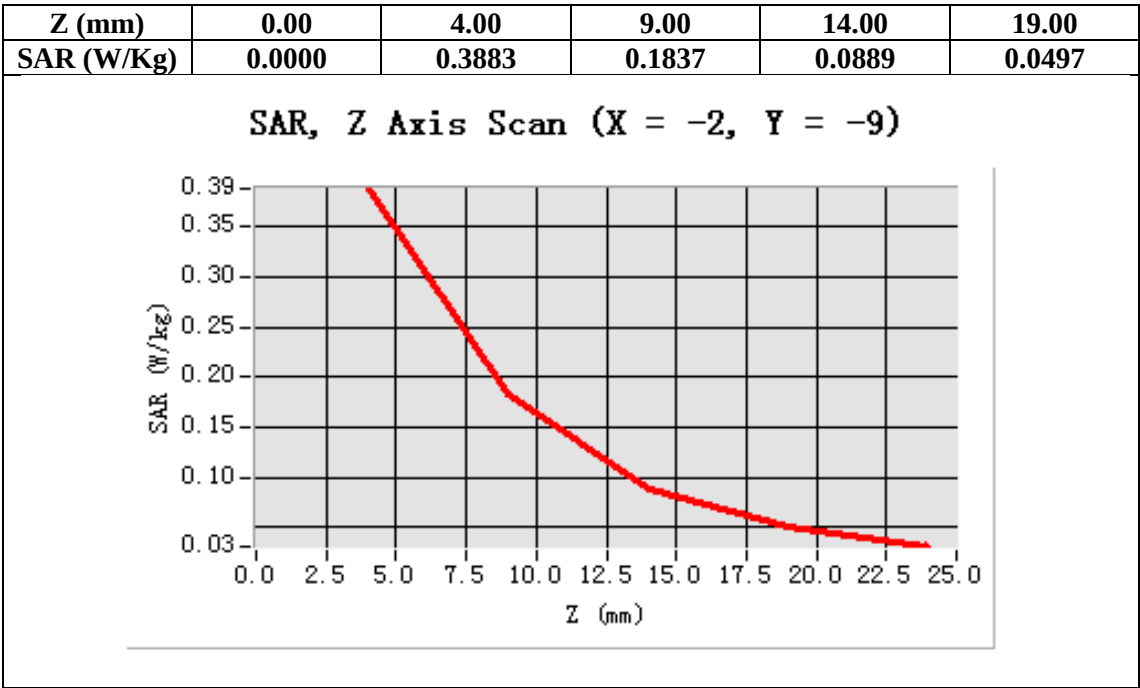

PCS 1900 Mid-Edge 1 (Top) (MS)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 01/12/2014; Serial No.:SN 22/12 EP159

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid-Edge 1 (Top) /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/PCS1900 Mid-Edge 1 (Top) /Zoom Scan: Measurement grid: dx=8mm,
dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Vertical
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

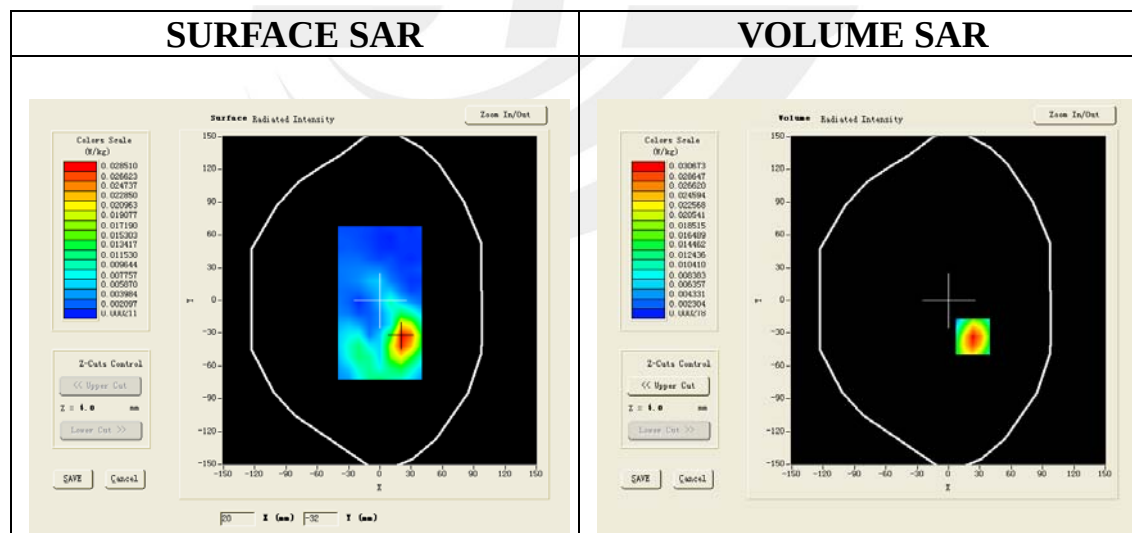

Maximum location: X=23.00, Y=-33.00

SAR 10g (W/Kg)	0.016152
SAR 1g (W/Kg)	0.027588

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

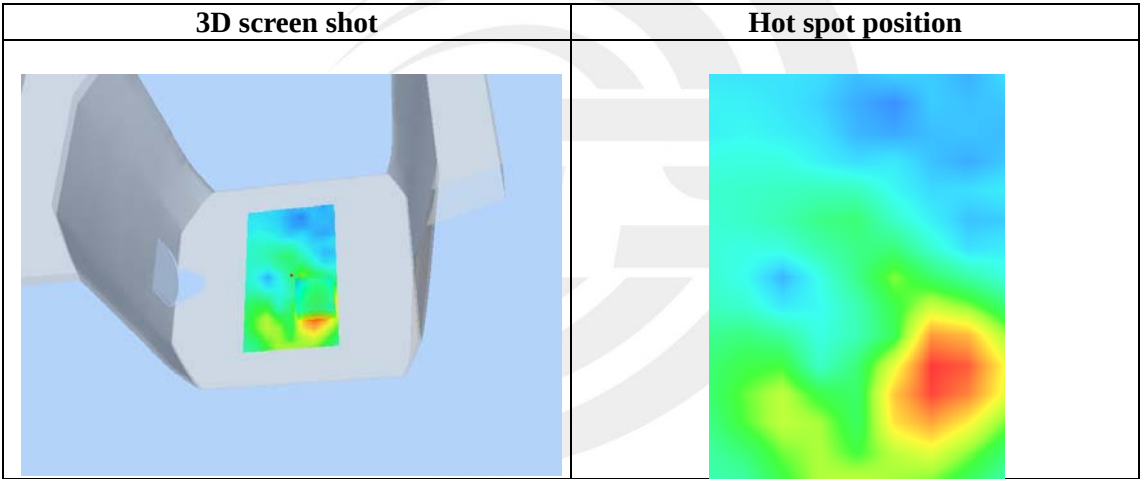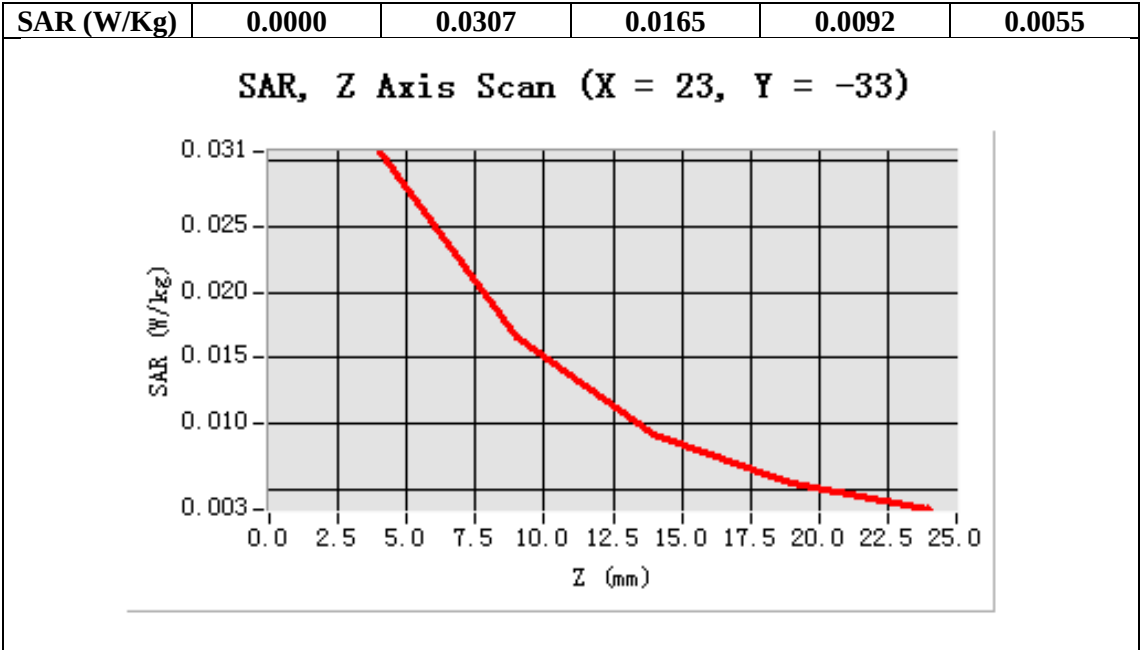

GPRS 1900 Mid-Touch- Left (2up)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/GPRS1900 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

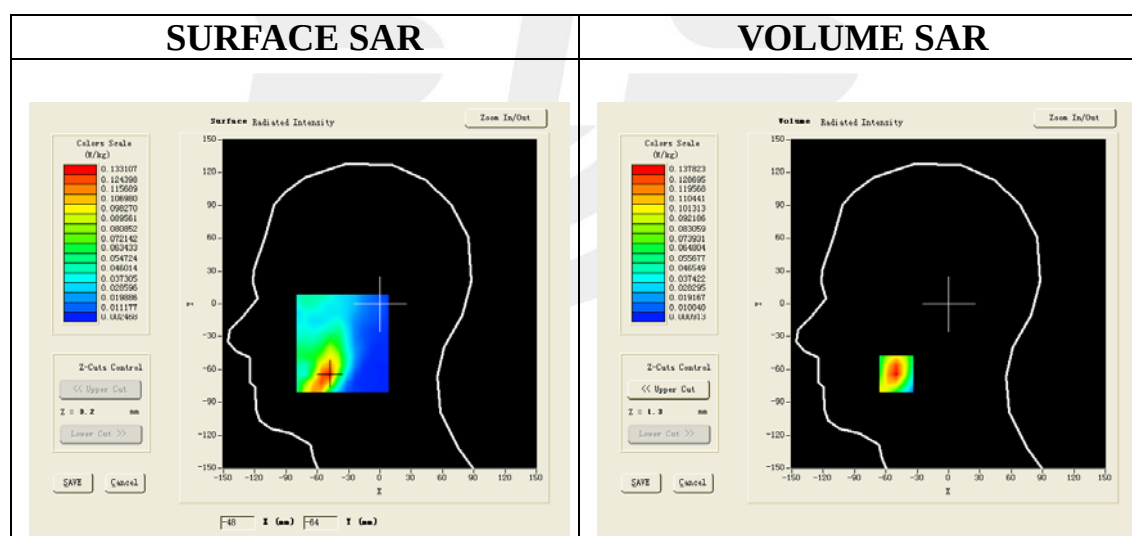

Maximum location: X=-50.00, Y=-64.00

SAR 10g (W/Kg)	0.067640
SAR 1g (W/Kg)	0.136961

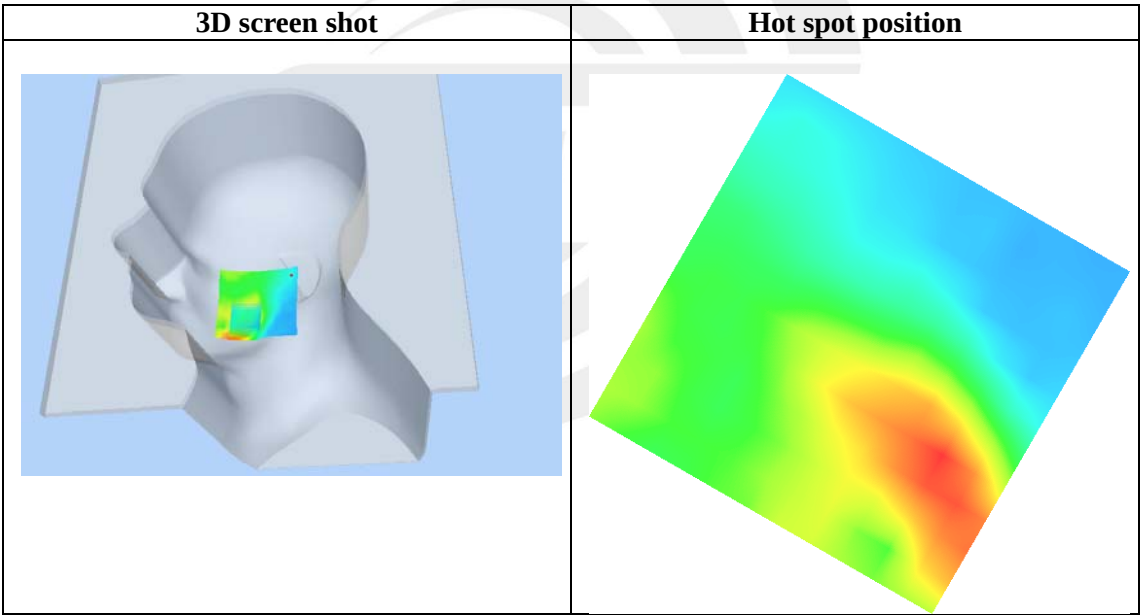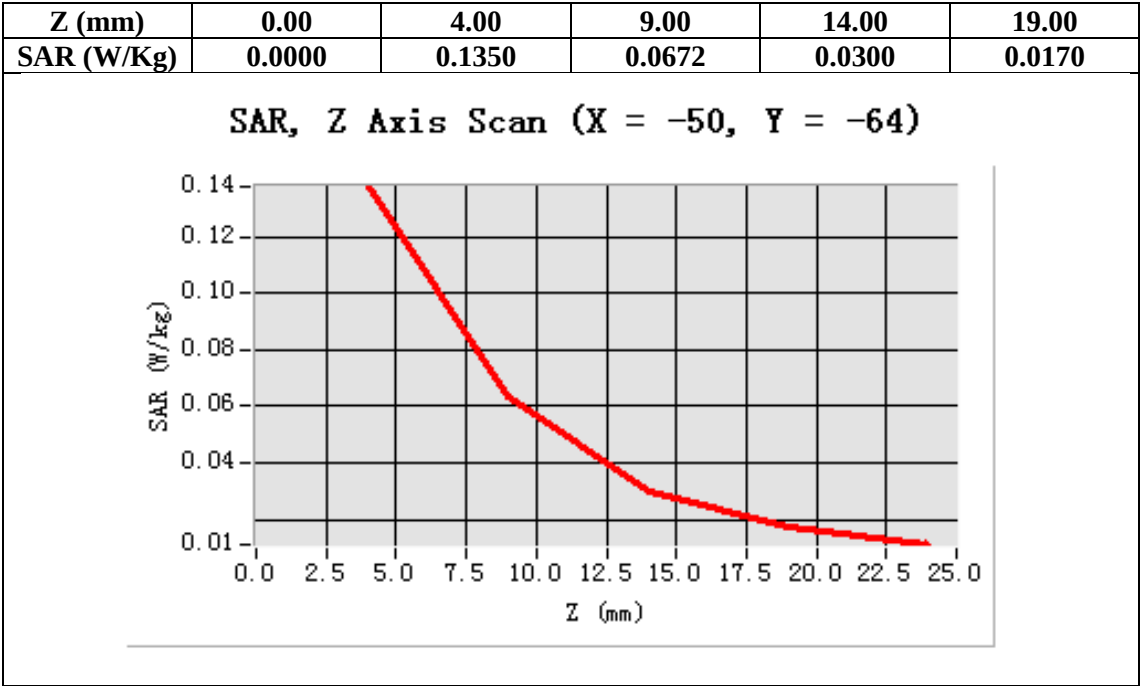

GPRS1900 Mid-Tilt-Left (2up)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm


Configuration/GPRS1900 Mid-Tilt-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

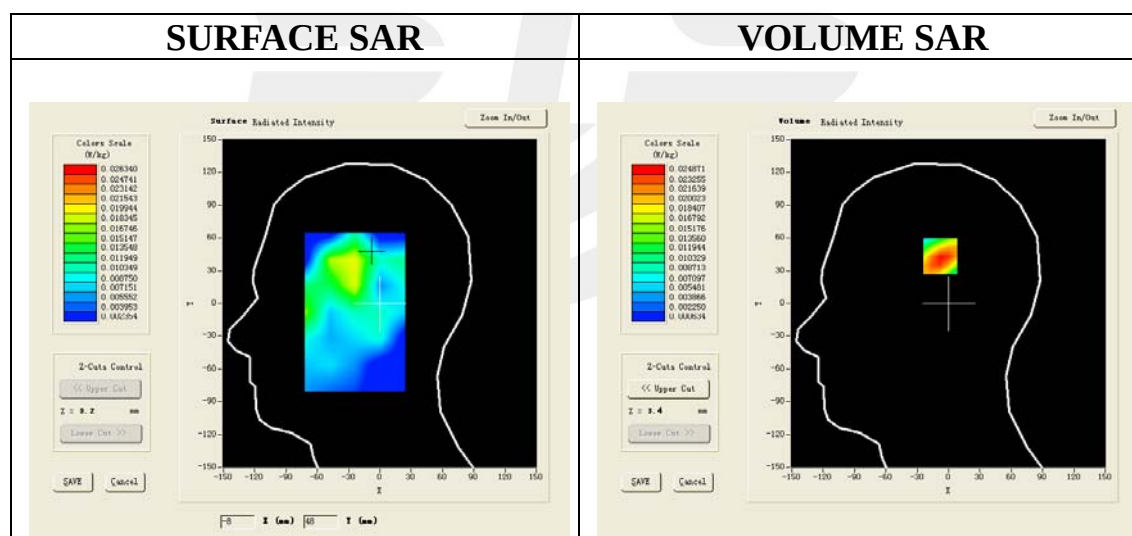

Maximum location: X=-7.00, Y=48.00

SAR 10g (W/Kg)	0.013454
SAR 1g (W/Kg)	0.023810

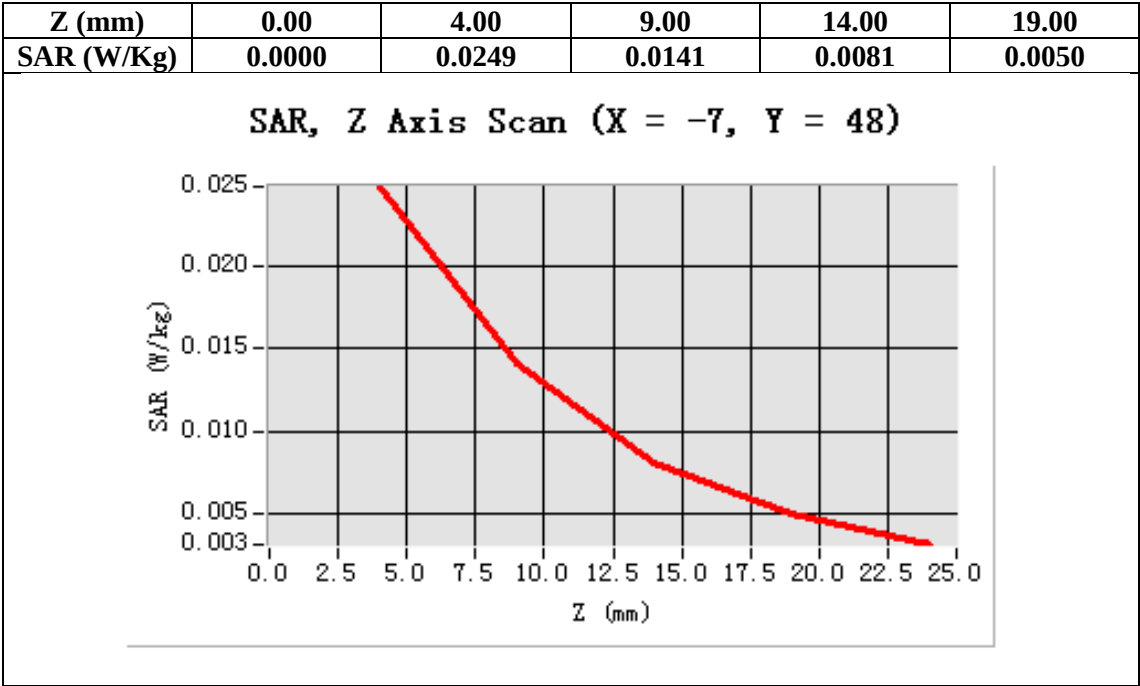

GPRS1900 Mid-Touch-Right (2up)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/GPRS1900 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

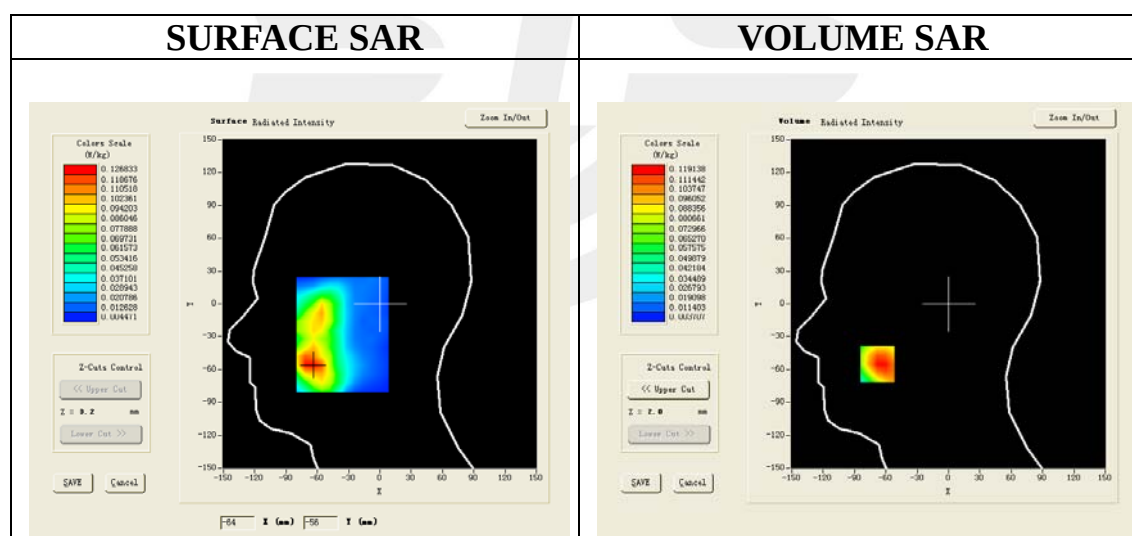

Maximum location: X=-68.00, Y=-55.00

SAR 10g (W/Kg)	0.060354
SAR 1g (W/Kg)	0.114860

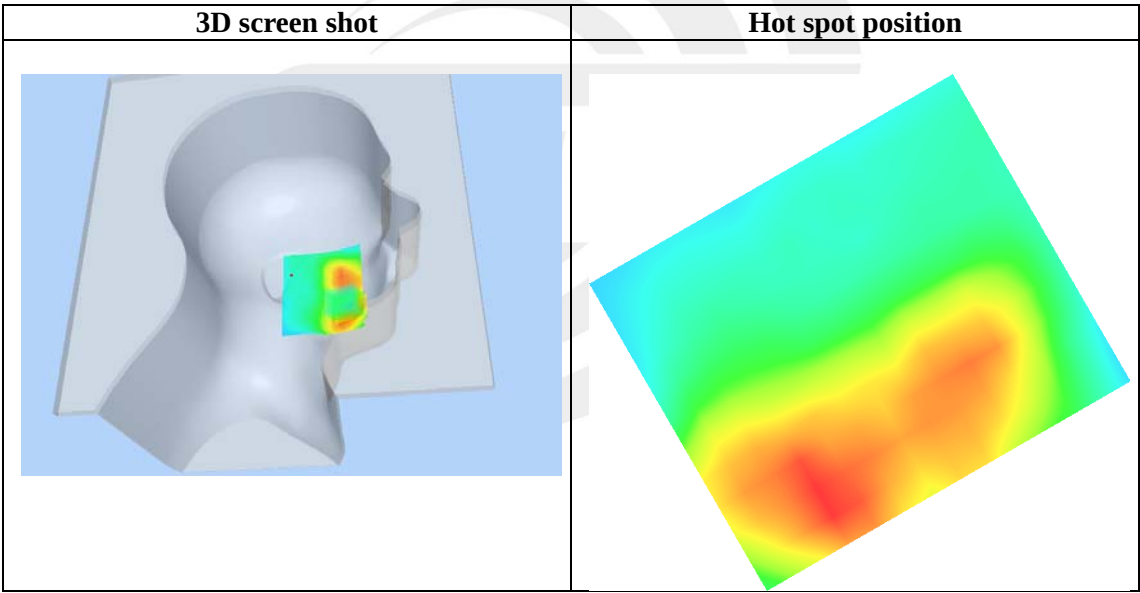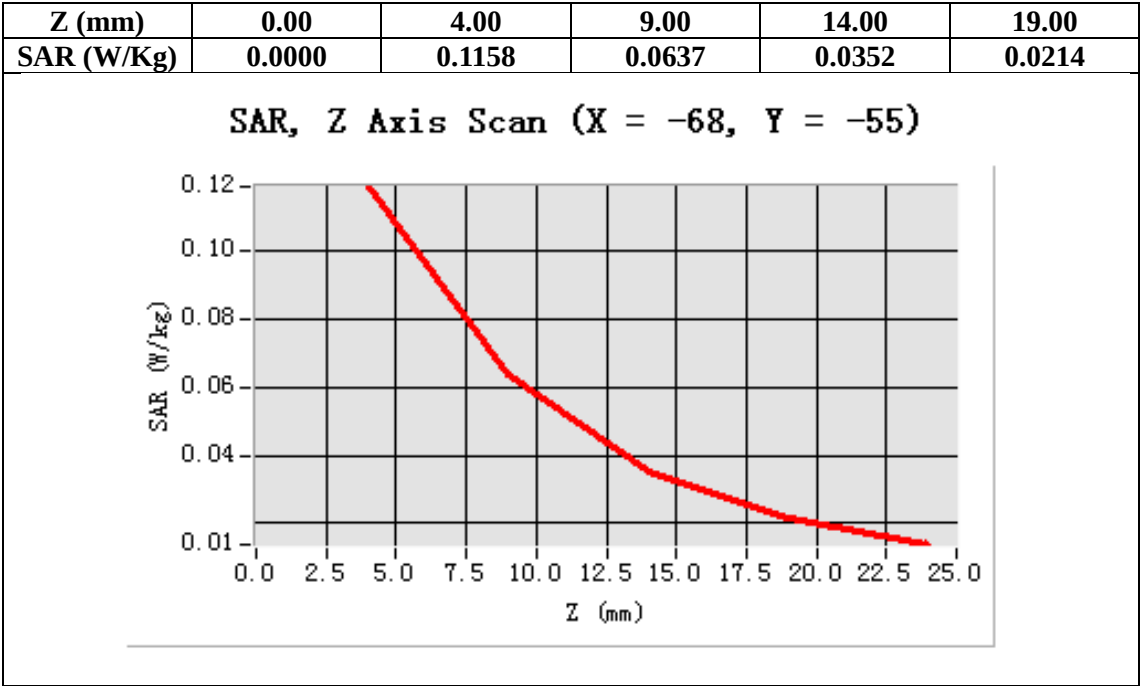

GPRS1900 Mid-Tilt-Right (2up)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.71;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/GPRS1900 Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

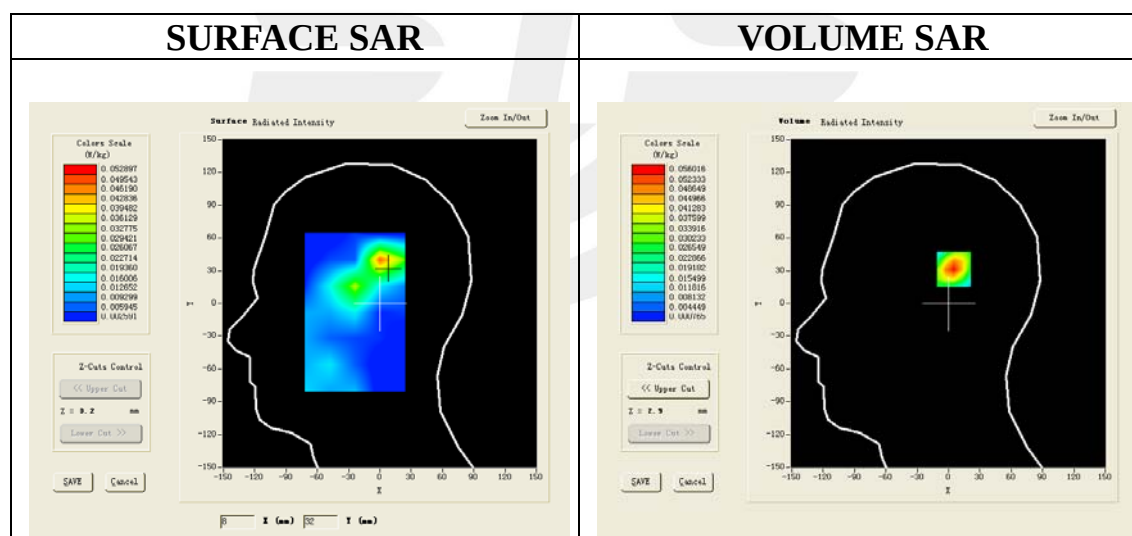

Maximum location: X=8.00, Y=33.00

SAR 10g (W/Kg)	0.026345
SAR 1g (W/Kg)	0.052470

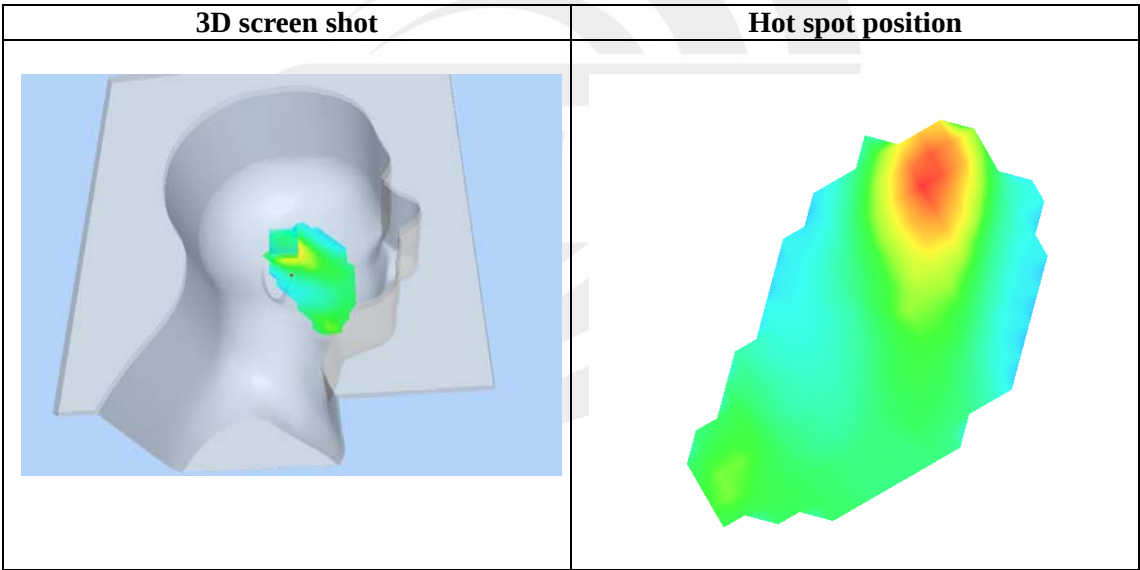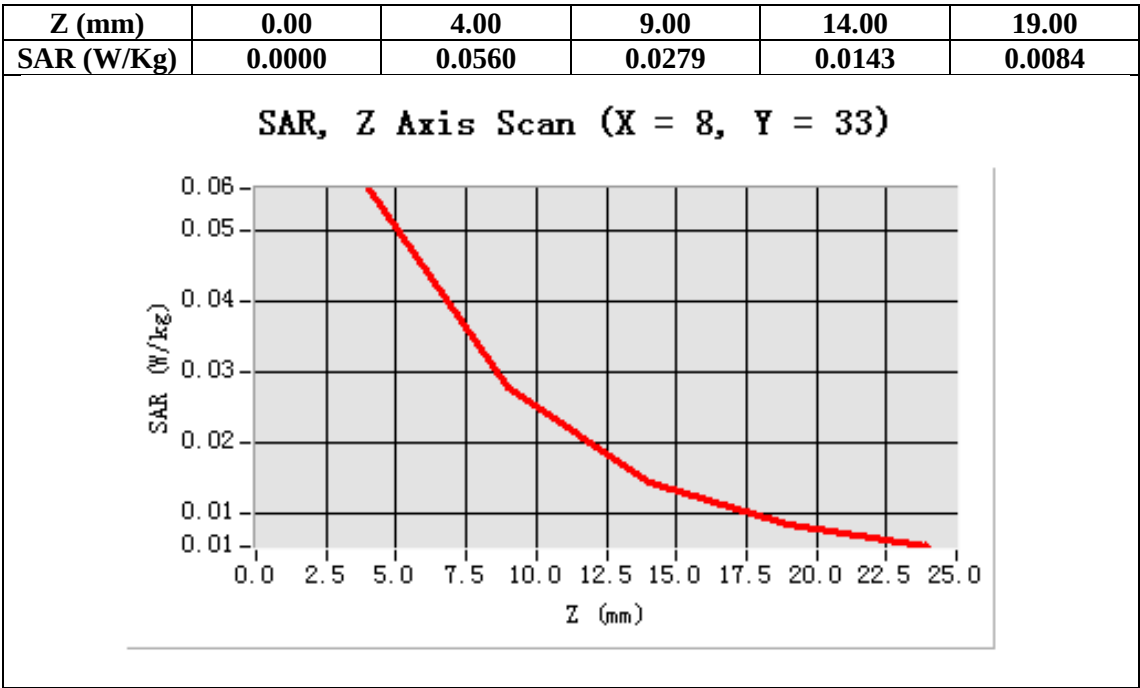

GPRS 1900 Mid-Body-Back (2up)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/GPRS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

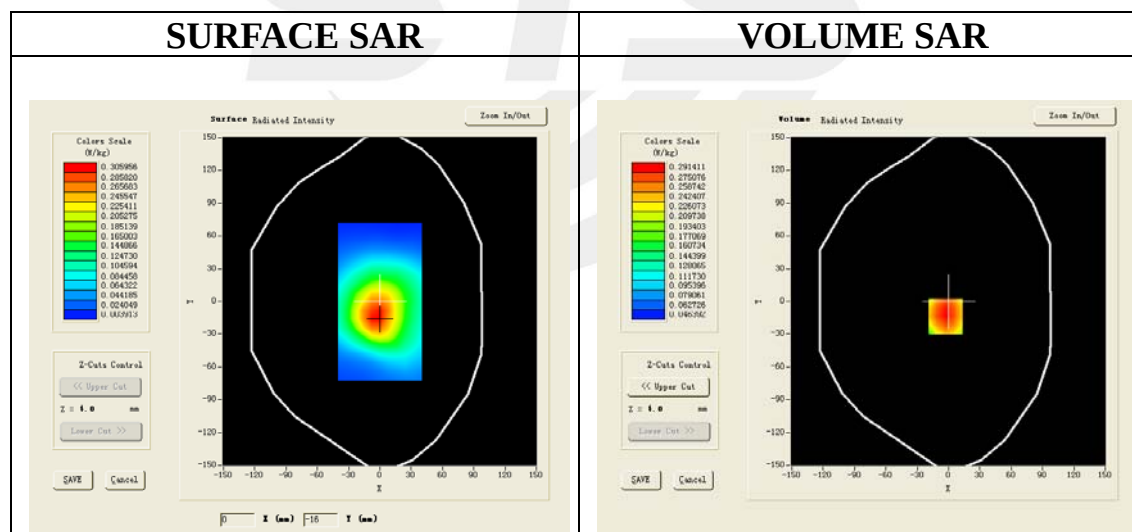

Maximum location: X=-3.00, Y=-14.00

SAR 10g (W/Kg)	0.208847
SAR 1g (W/Kg)	0.306932

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

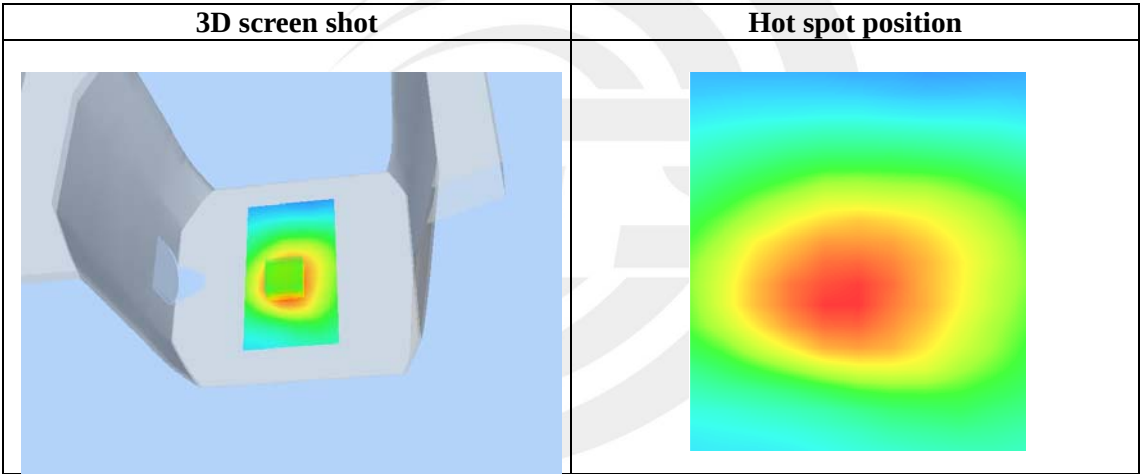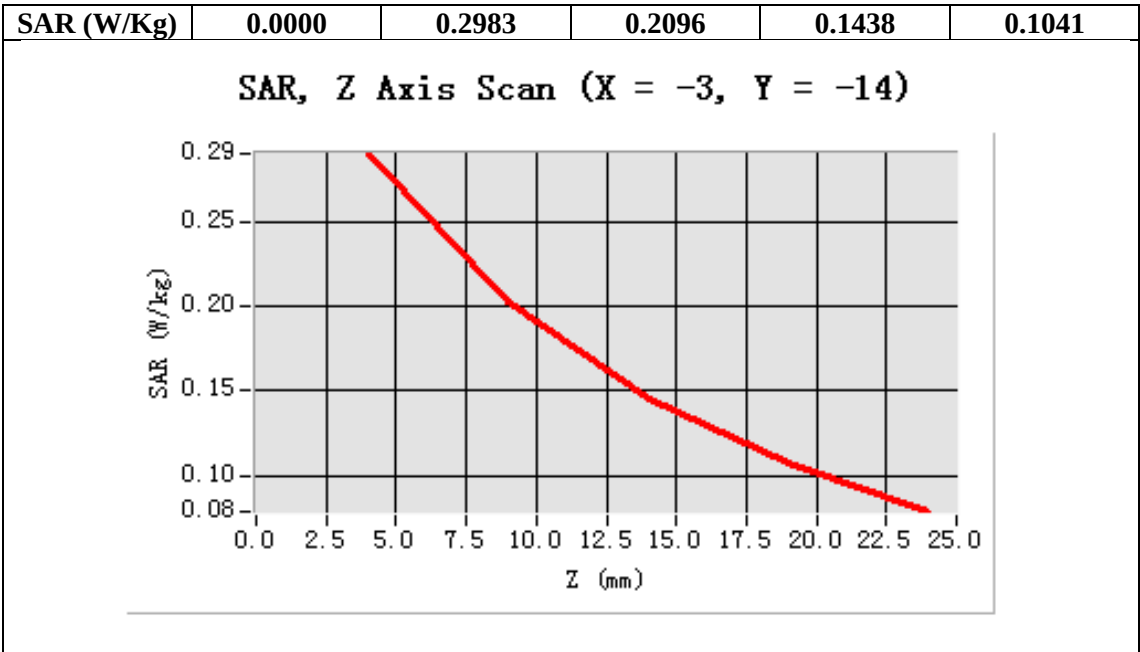

GPRS 1900 Mid-Body-Front (2up)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/GPRS1900 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Front
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

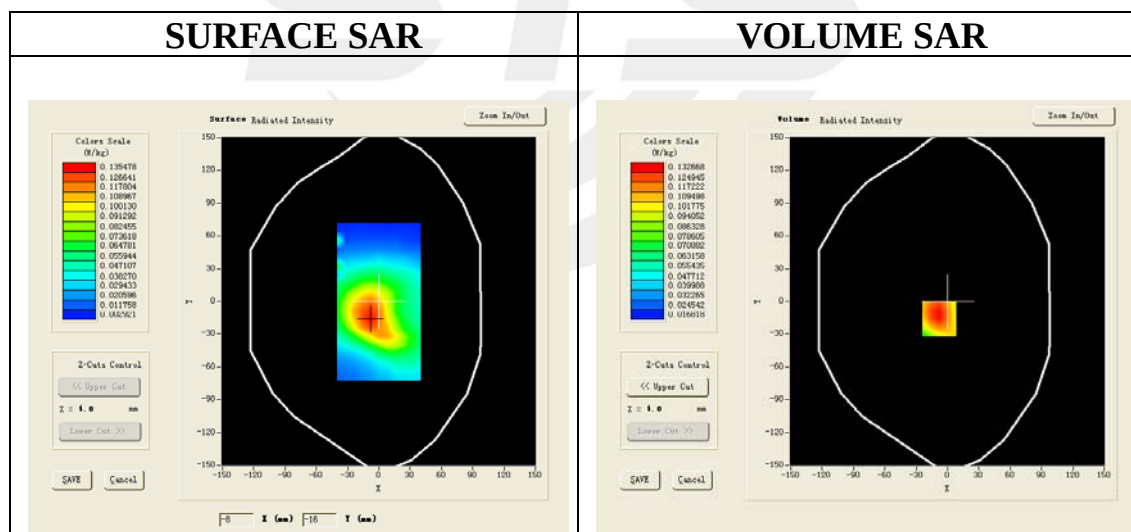

Maximum location: X=-8.00, Y=-16.00

SAR 10g (W/Kg)	0.093069
SAR 1g (W/Kg)	0.137127

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

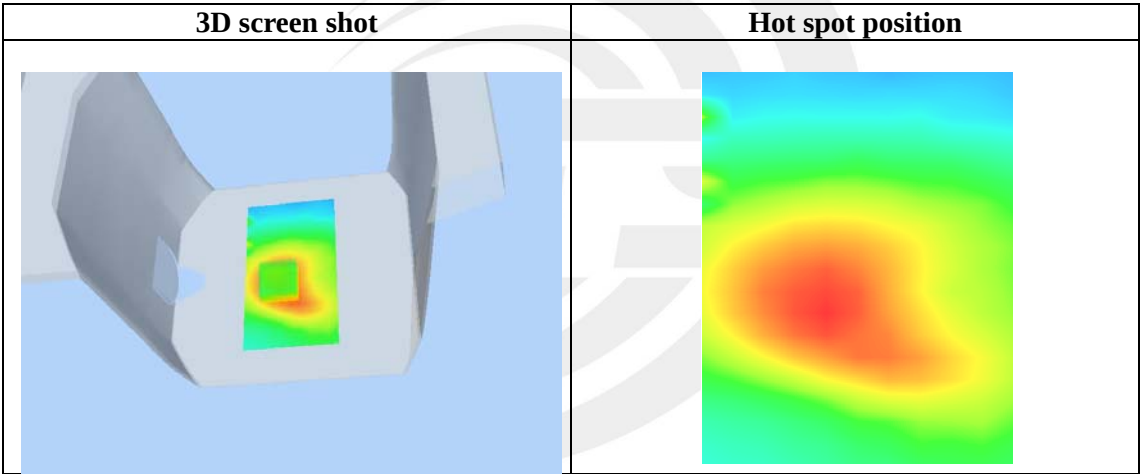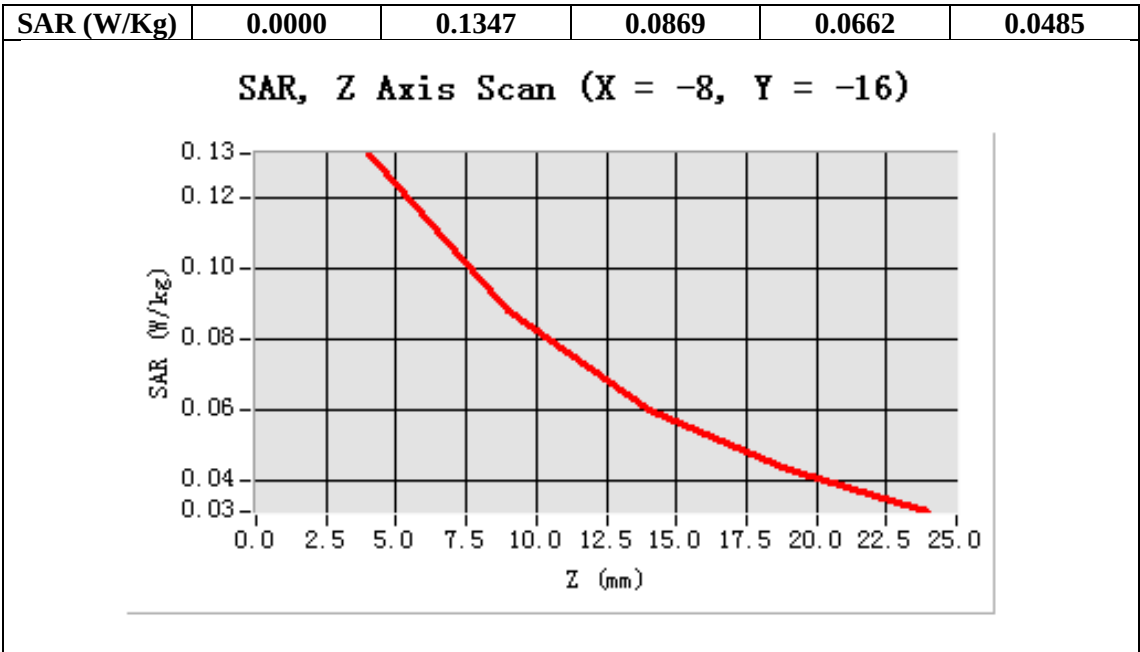

GPRS 1900 Mid-Edge 1 (2up)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Edge 1/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/GPRS1900 Mid-Edge 1/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 1
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

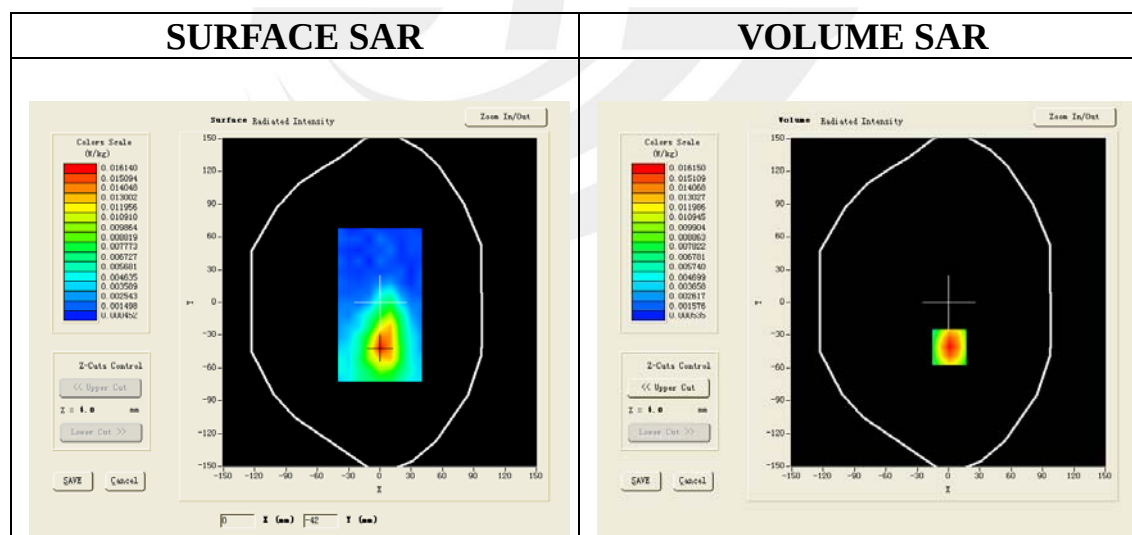

Maximum location: X=1.00, Y=-41.00

SAR 10g (W/Kg)	0.003889
SAR 1g (W/Kg)	0.016365

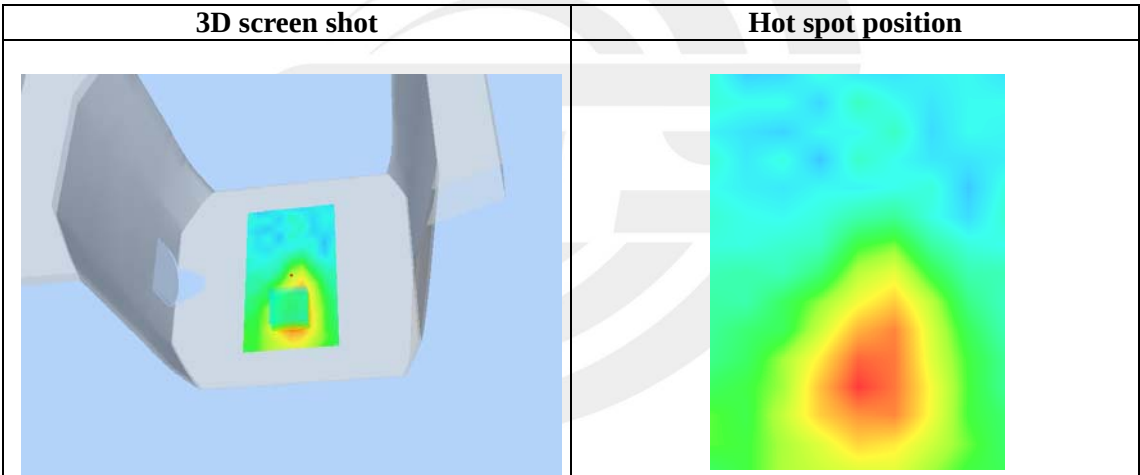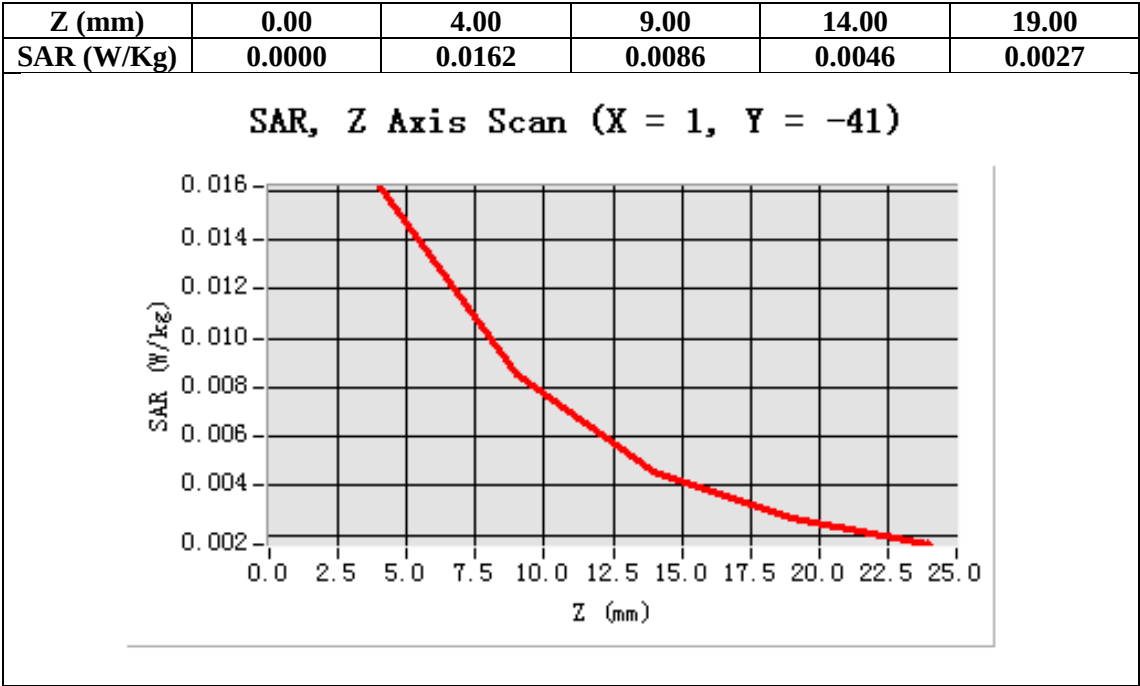

GPRS 1900 Mid-Edge 2 (2up)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Edge 2/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/GPRS1900 Mid-Edge 2/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 2
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

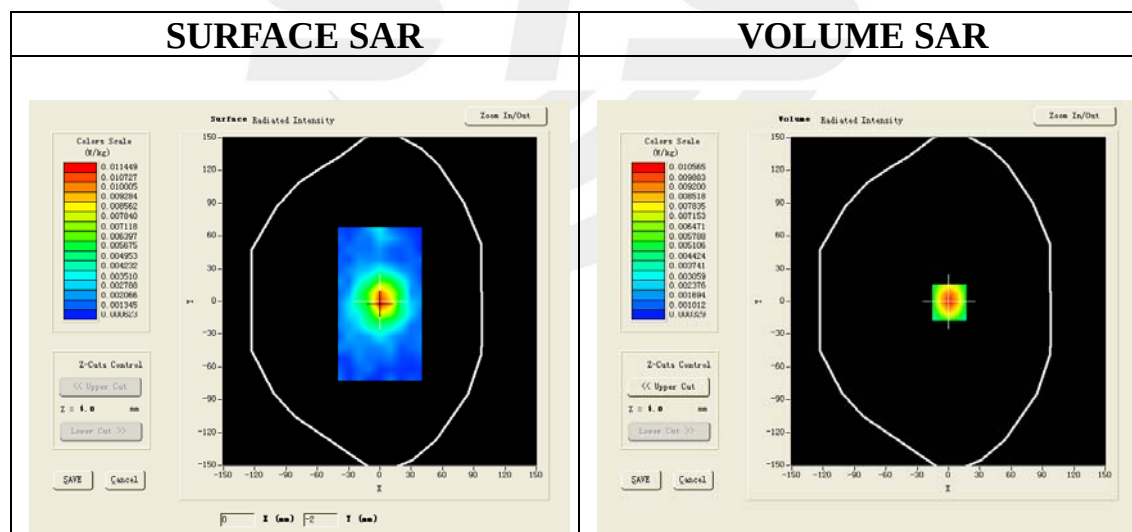

Maximum location: X=1.00, Y=-1.00

SAR 10g (W/Kg)	0.005076
SAR 1g (W/Kg)	0.019107

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

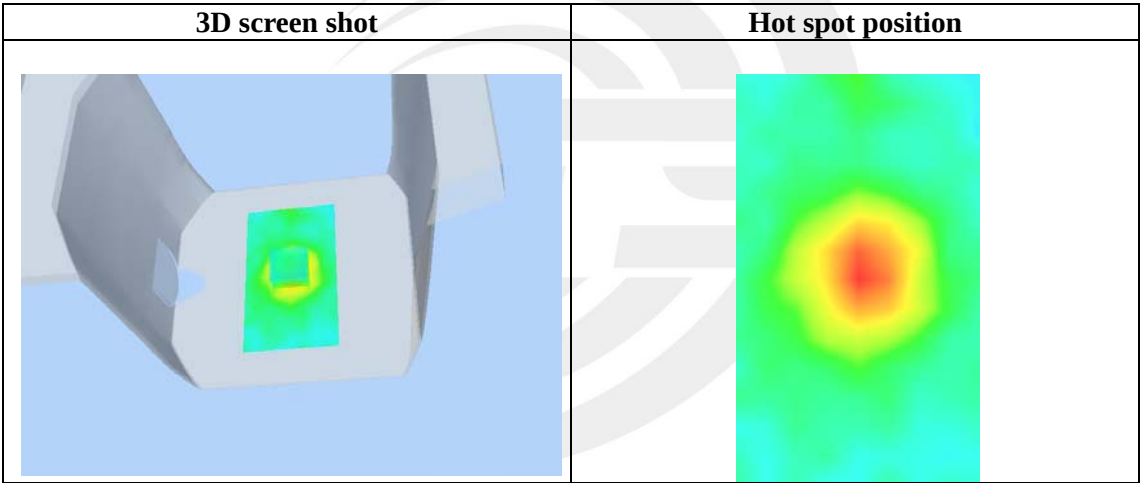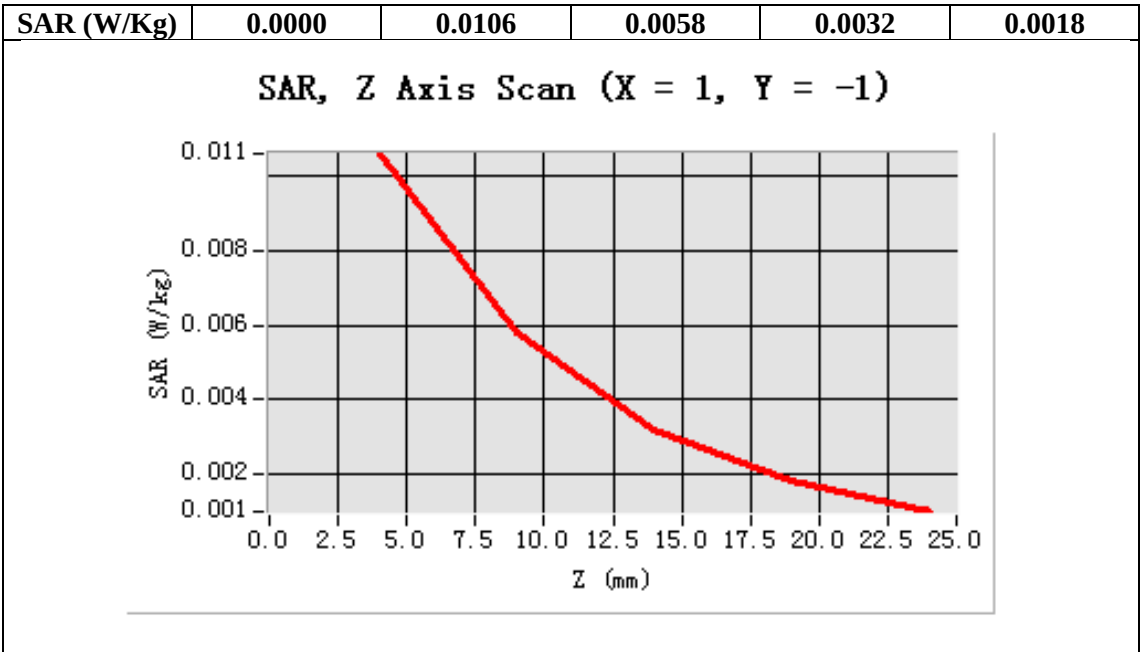

GPRS 1900 Mid-Edge 3(2up)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Edge 3/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/GPRS1900 Mid-Edge 3/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 3
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

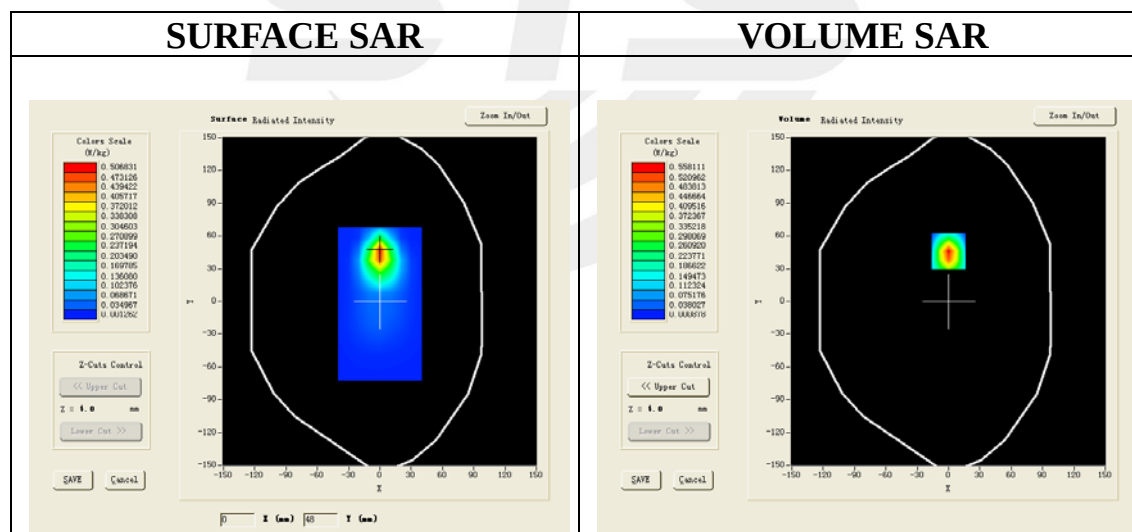

Maximum location: X=0.00, Y=46.00

SAR 10g (W/Kg)	0.243753
SAR 1g (W/Kg)	0.557636

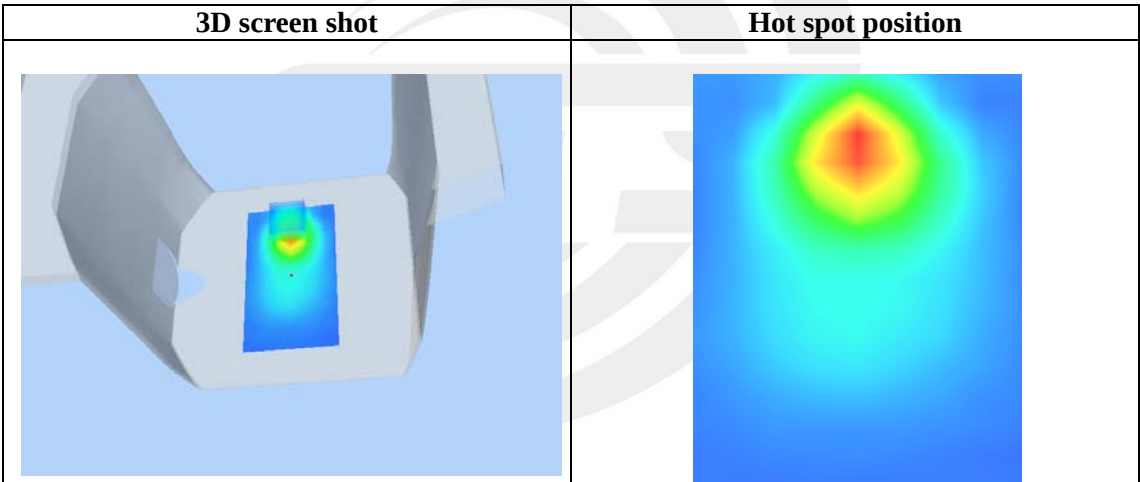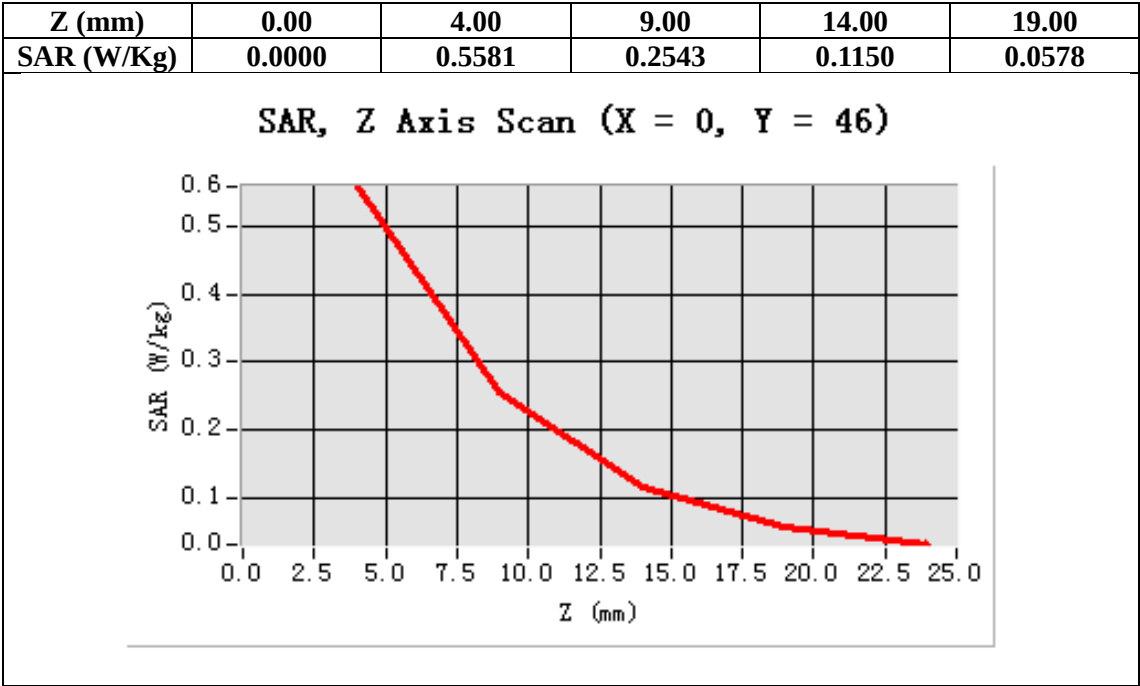

GPRS 1900 Mid-Edge 4 (2up)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: GPRS-2Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=4.85;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid-Edge 4/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/GPRS1900 Mid-Edge 4/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 4
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

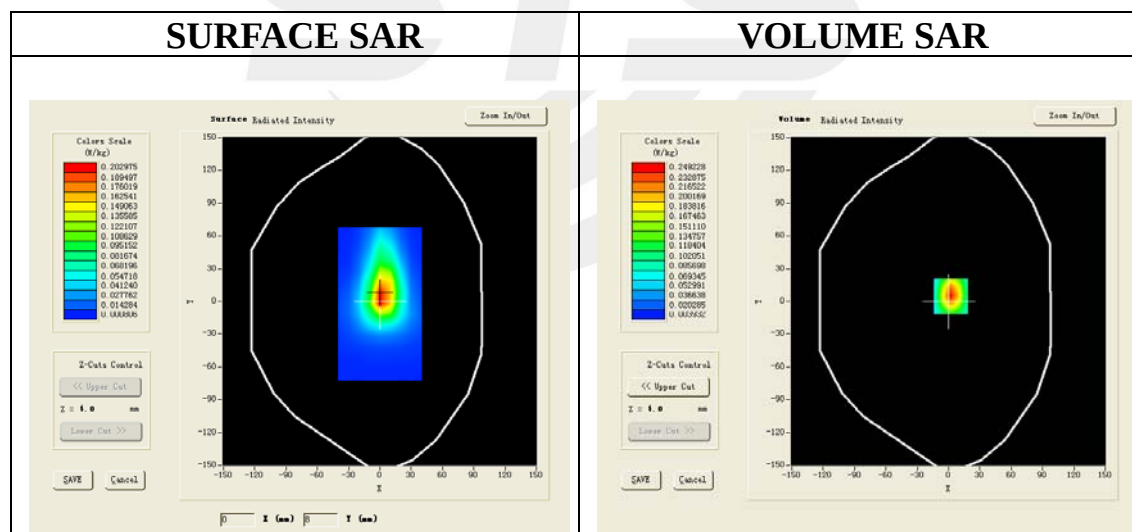

Maximum location: X=2.00, Y=5.00

SAR 10g (W/Kg)	0.118967
SAR 1g (W/Kg)	0.250167

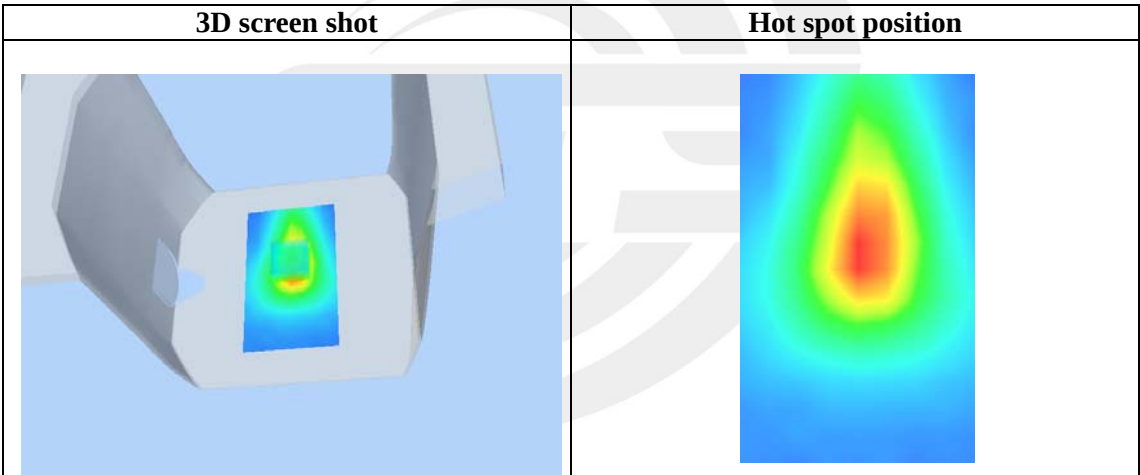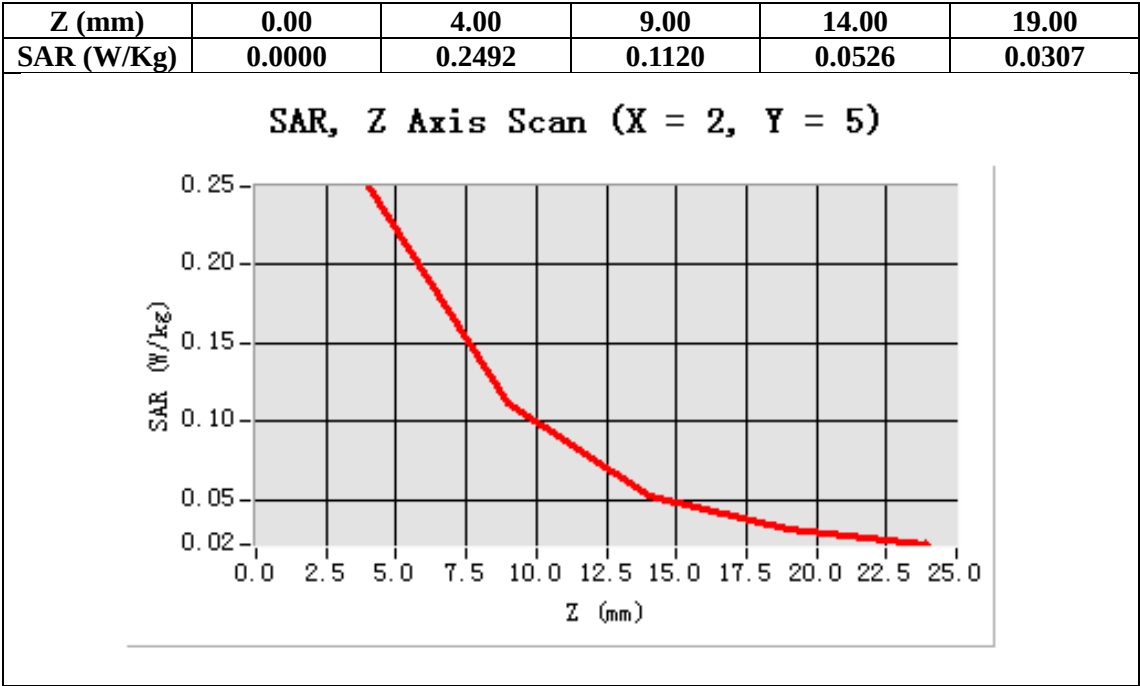

WCDMA Band II Mid-Touch-Left (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1;Conv.F=4.71
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band II Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/ WCDMA Band II Mid-Touch-Left/Zoom Scan: Measurement grid:dx=8mm,dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

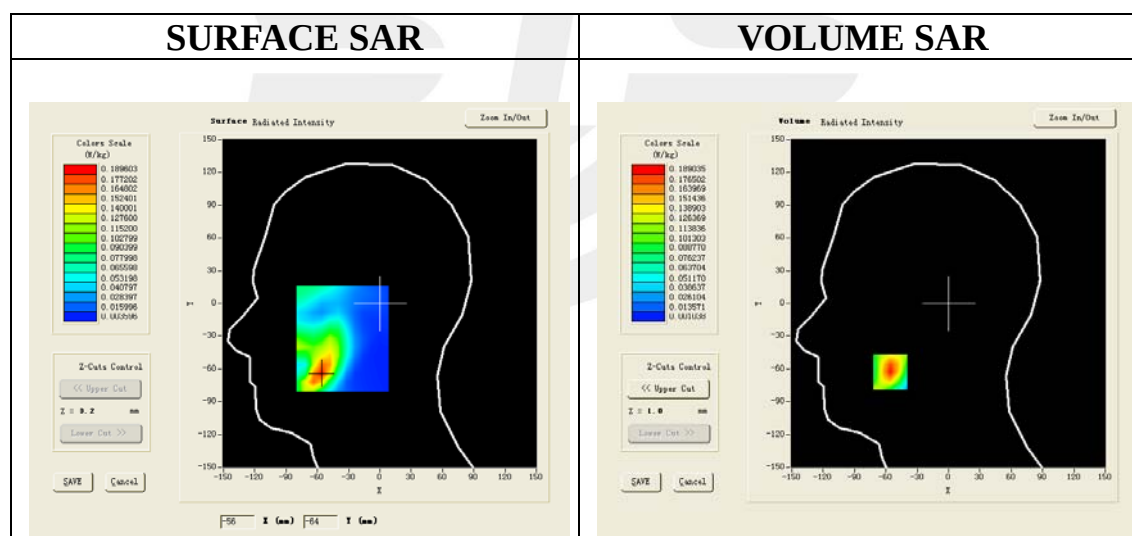

Maximum location: X=-56.00, Y=-63.00

SAR 10g (W/Kg)	0.083197
SAR 1g (W/Kg)	0.176940

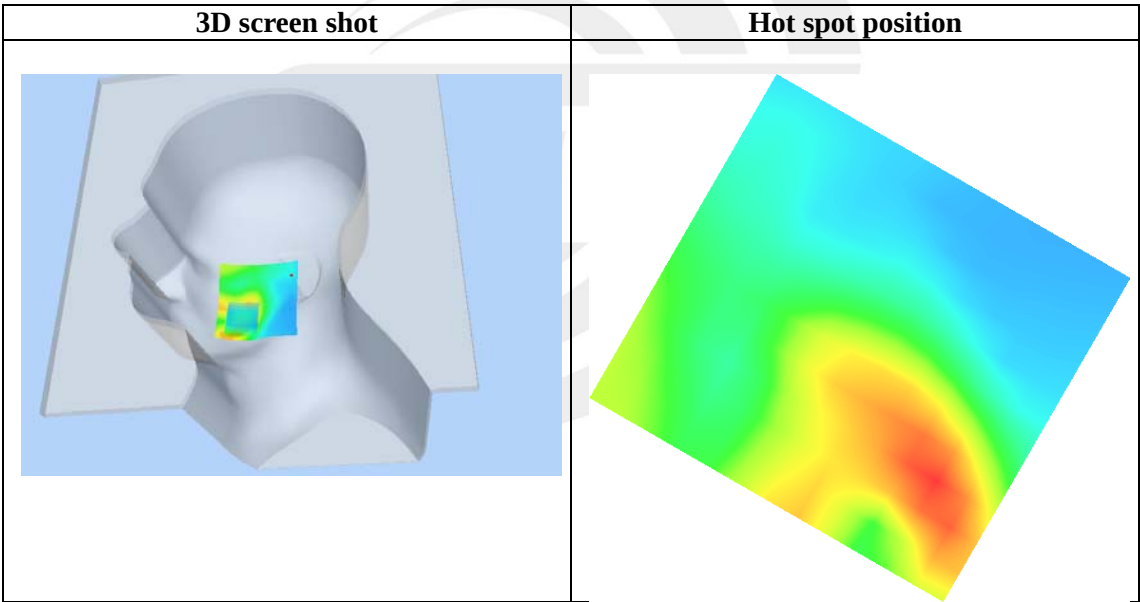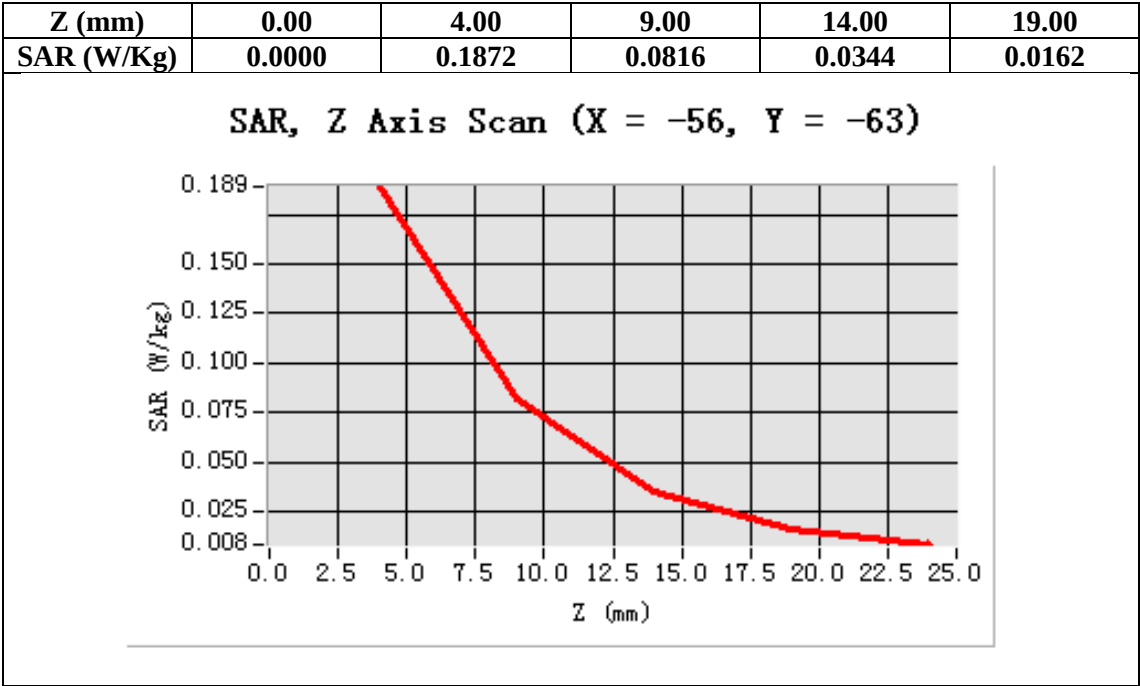

WCDMA Band II Mid-Tilt-Left (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.71
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band II Mid-Tilt-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/ WCDMA Band II Mid-Tilt-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	WCDMA Band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

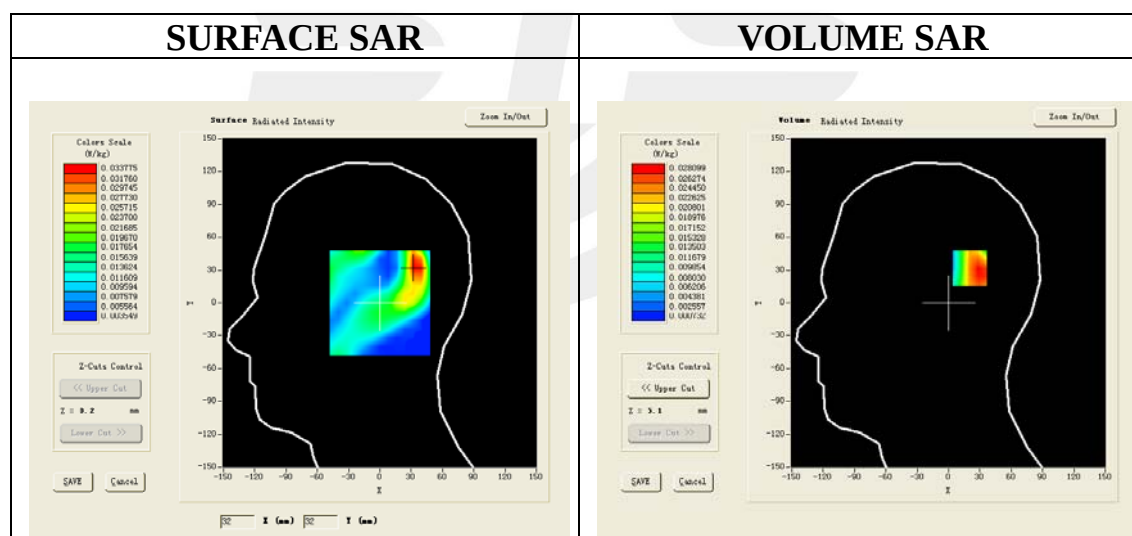

Maximum location: X=27.00, Y=34.00

SAR 10g (W/Kg)	0.015950
SAR 1g (W/Kg)	0.027245

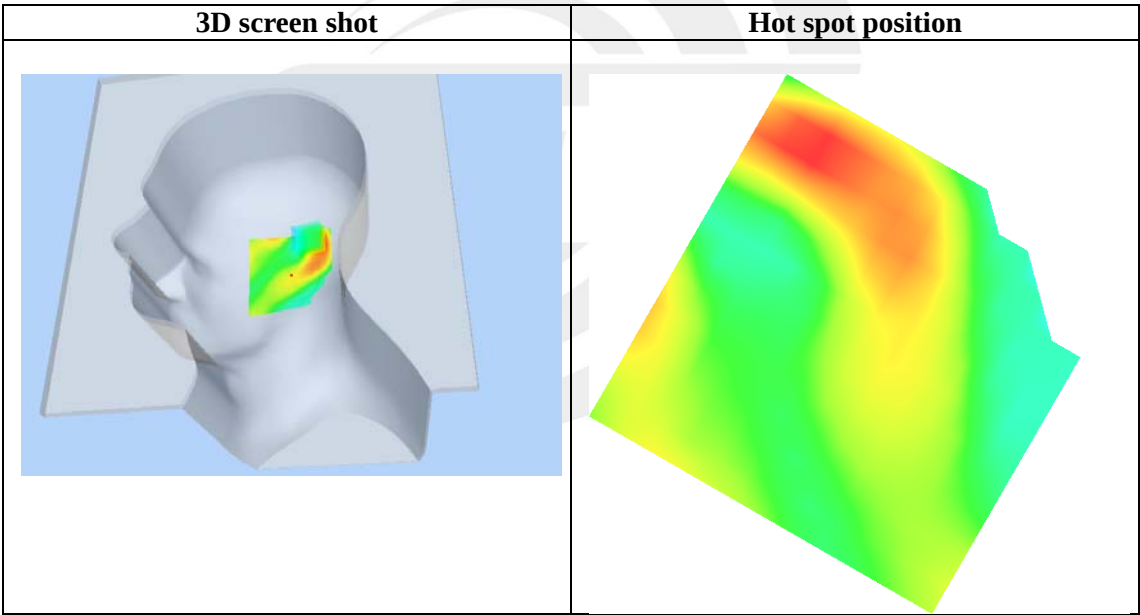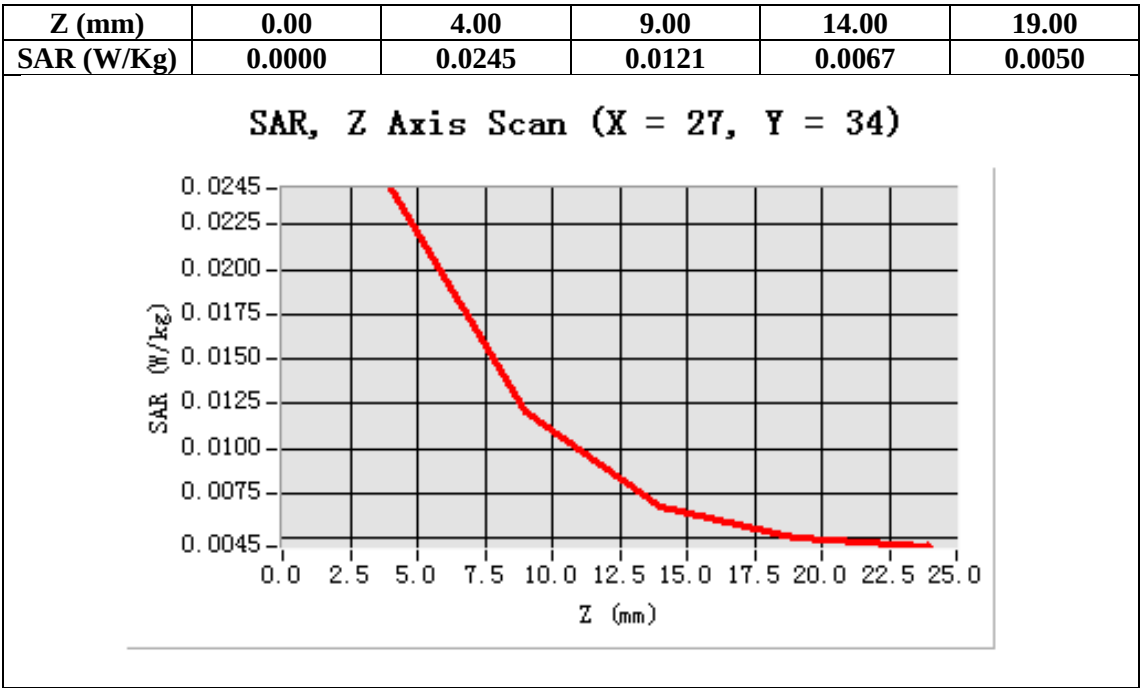

WCDMA Band II Mid-Touch-Right (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.71
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/WCDMA band II Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/WCDMA band II Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

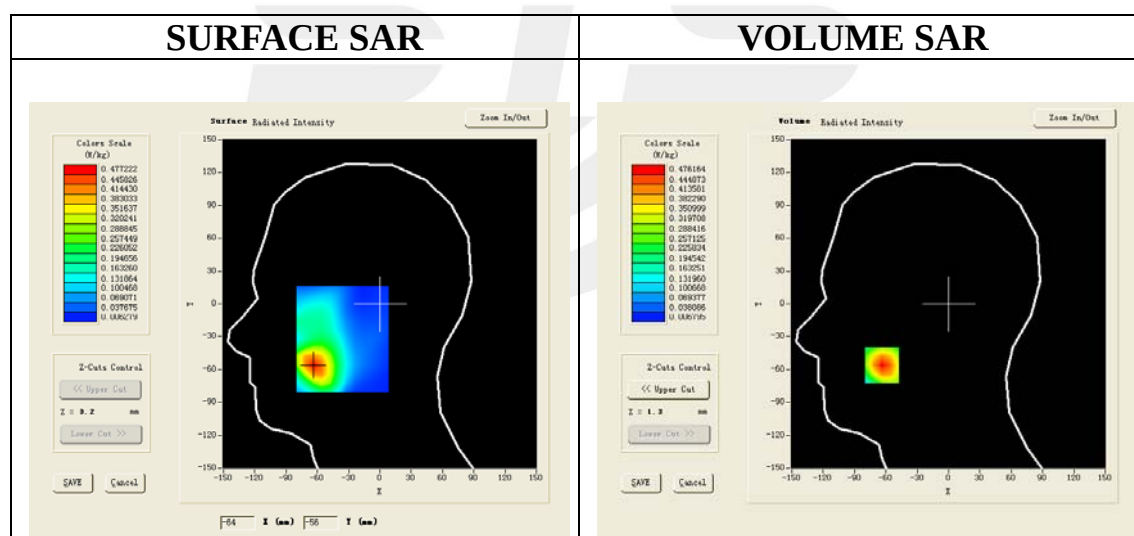

Maximum location: X=-64.00, Y=-56.00

SAR 10g (W/Kg)	0.228210
SAR 1g (W/Kg)	0.459801

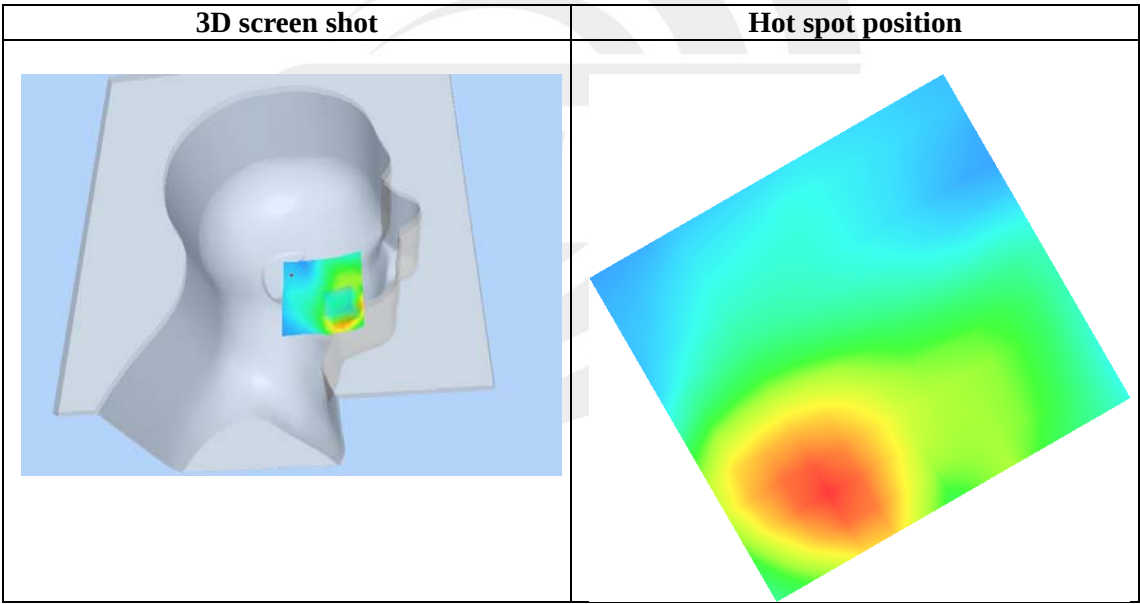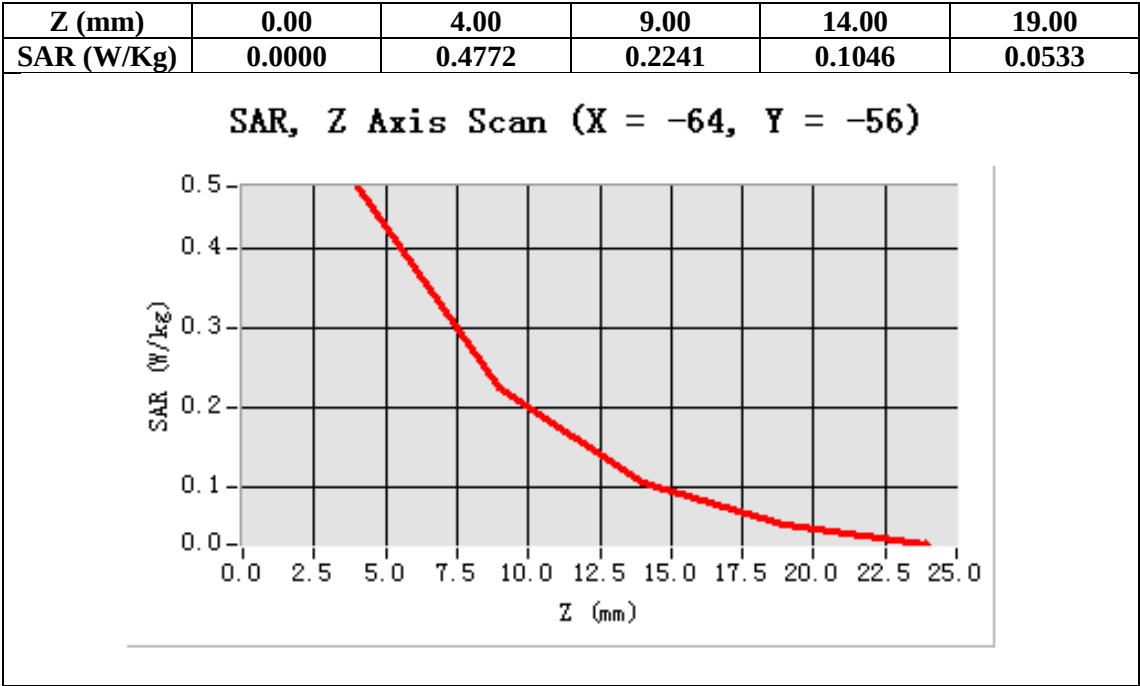

WCDMA Band II Mid-Tilt-Right <RMC>
DUT: tablet PC; Type: PC7088

Date: Mar. 03,2015

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.71
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 40.89$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):23.1, Liquid temperature (°C):22.9

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/WCDMA Band II Mid-Tilt-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/WCDMA Band II Mid-Tilt-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

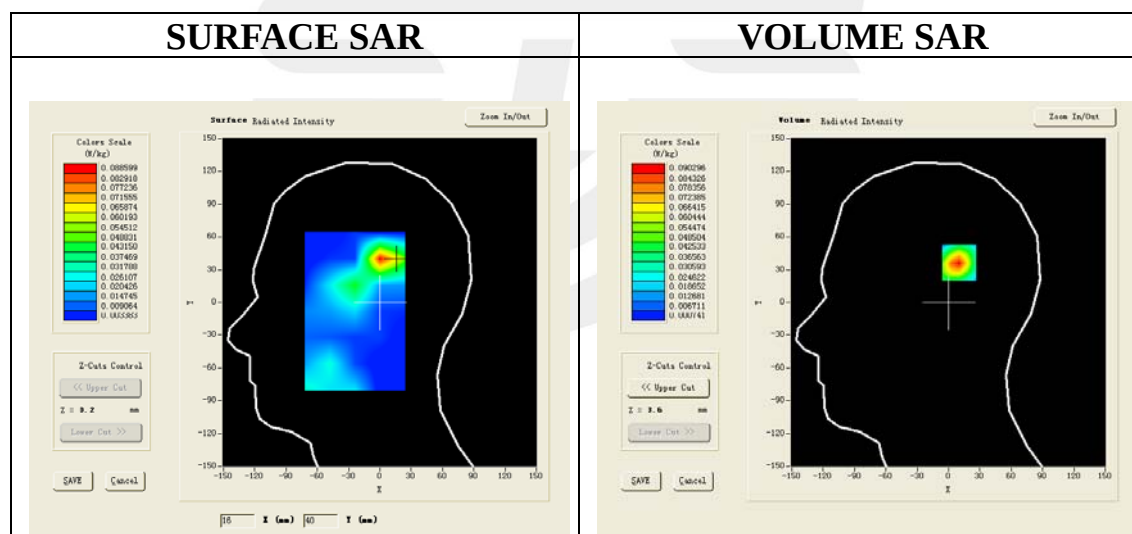

Maximum location: X=14.00, Y=39.00

SAR 10g (W/Kg)	0.046093
SAR 1g (W/Kg)	0.083925

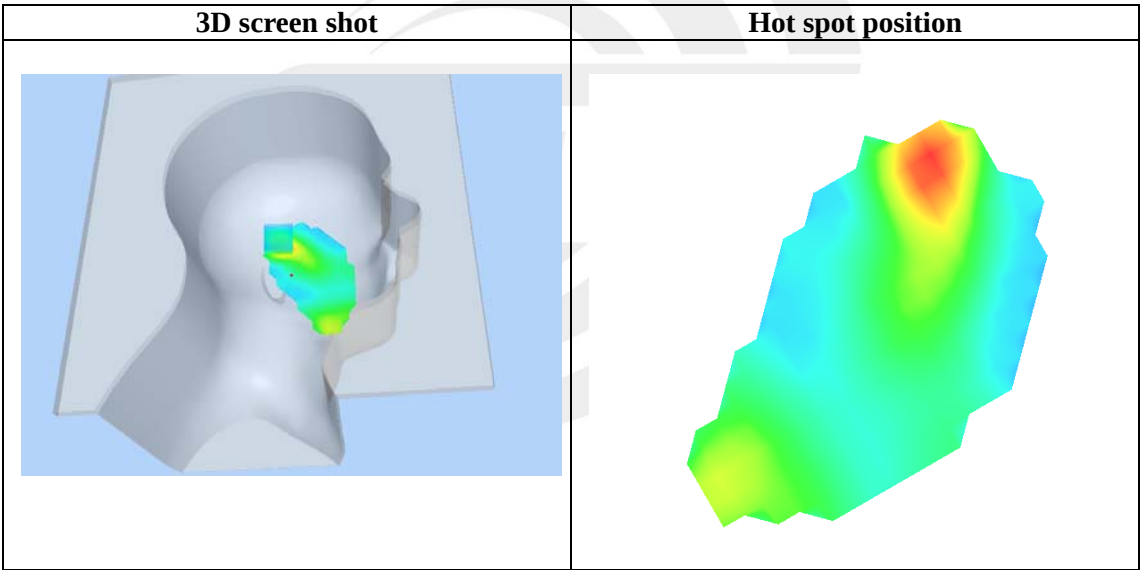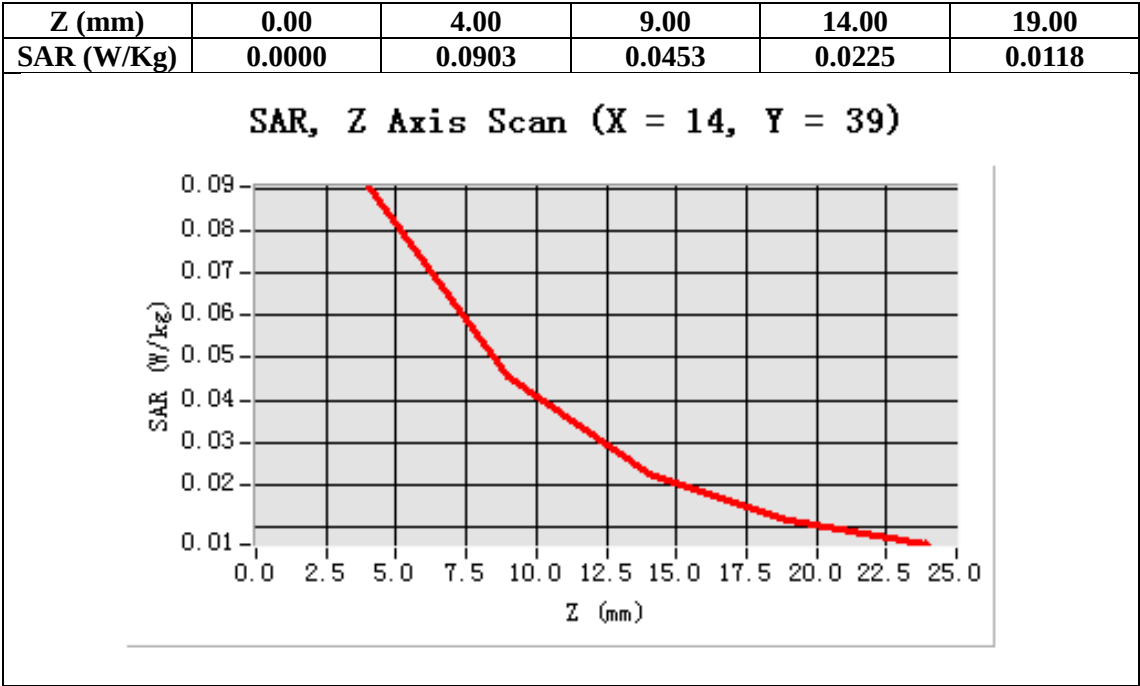

WCDMA Band II Low-Body-Towards Grounds (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1852.4 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Low -Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ WCDMA band II Low -Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band II
Channels	Low
Signal	CDMA (Crest factor: 1.0)

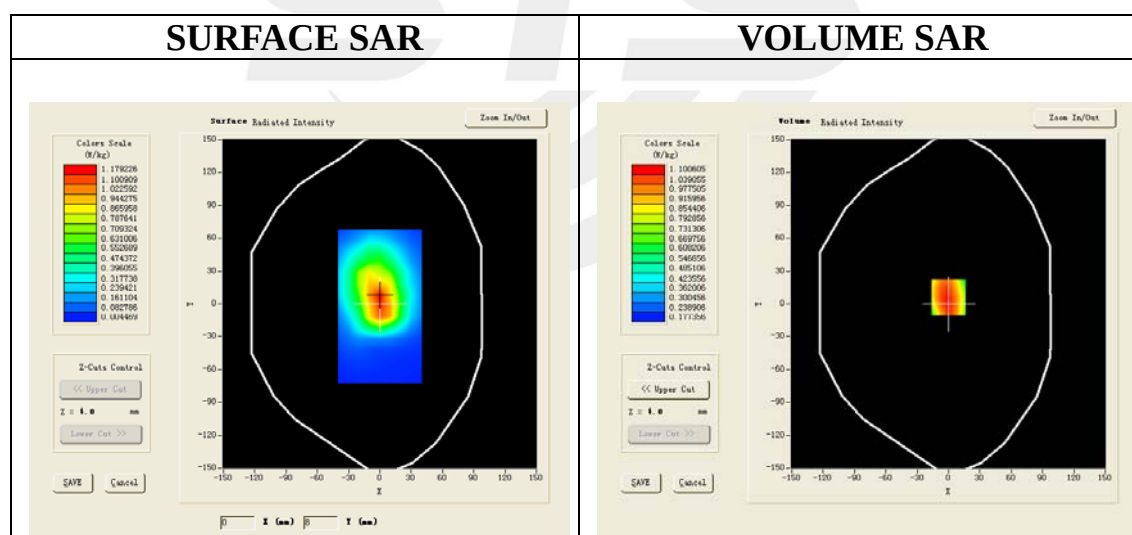

Maximum location: X=0.00, Y=6.00

SAR 10g (W/Kg)	0.721528
SAR 1g (W/Kg)	1.066207

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

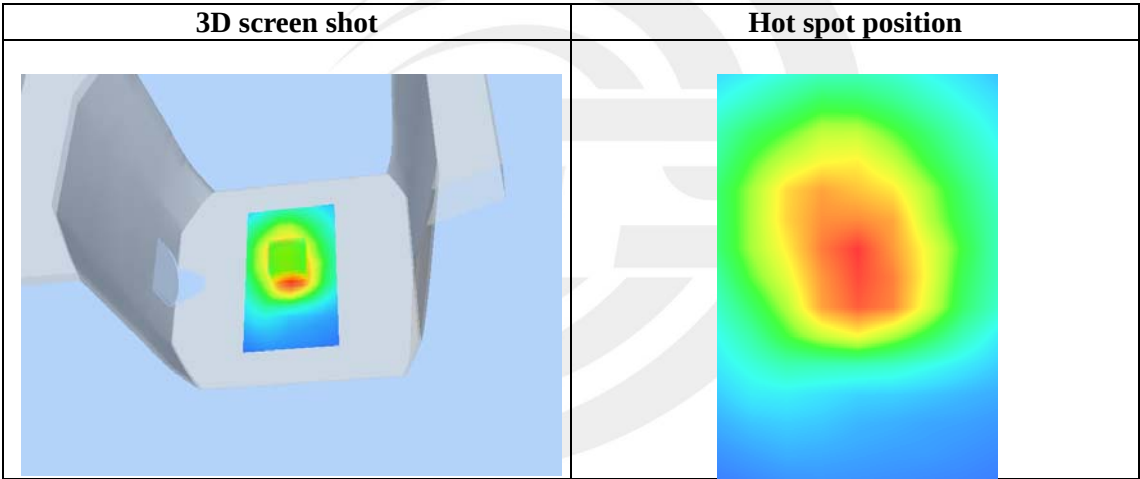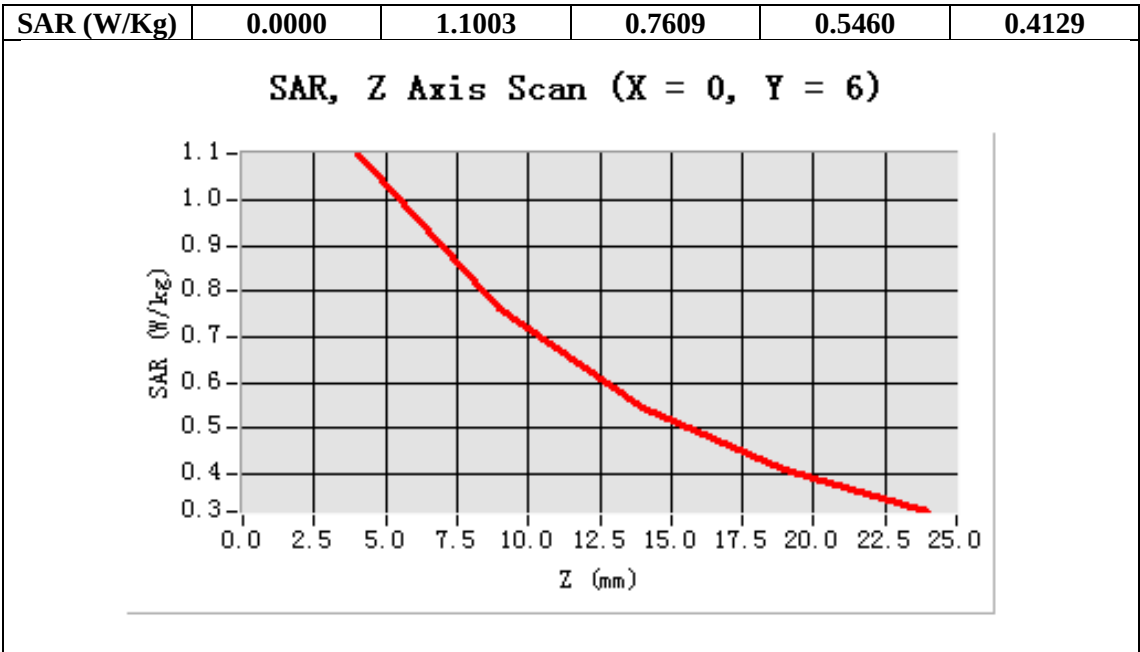

WCDMA Band II Mid-Body-Towards Grounds (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Mid-Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ WCDMA band II Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

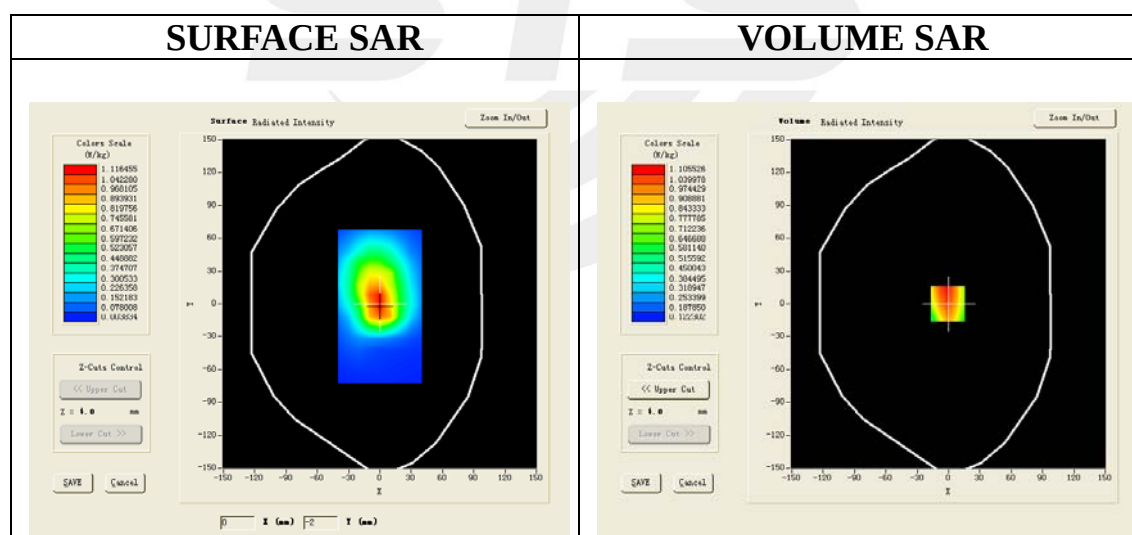

Maximum location: X=-1.00, Y=0.00

SAR 10g (W/Kg)	0.716917
SAR 1g (W/Kg)	1.059221

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

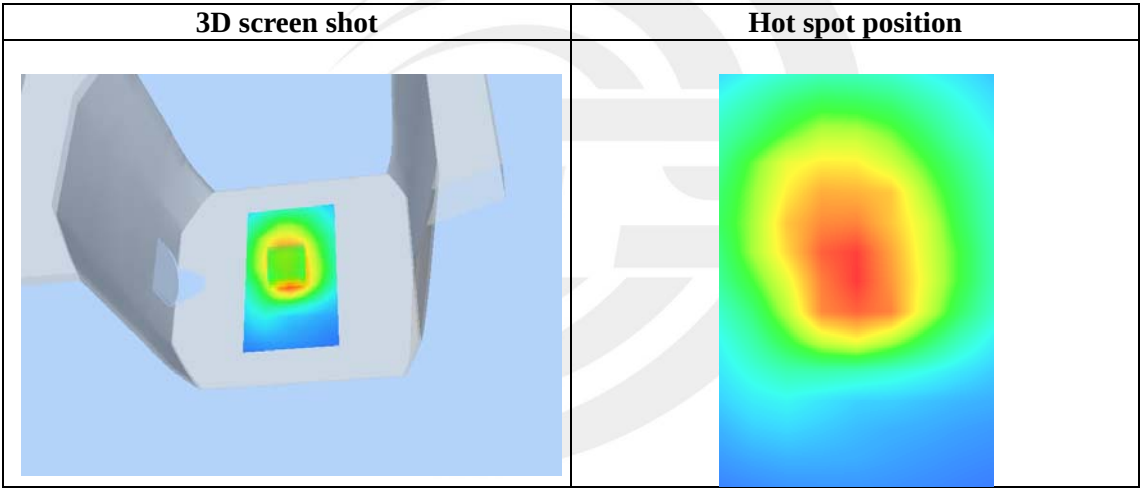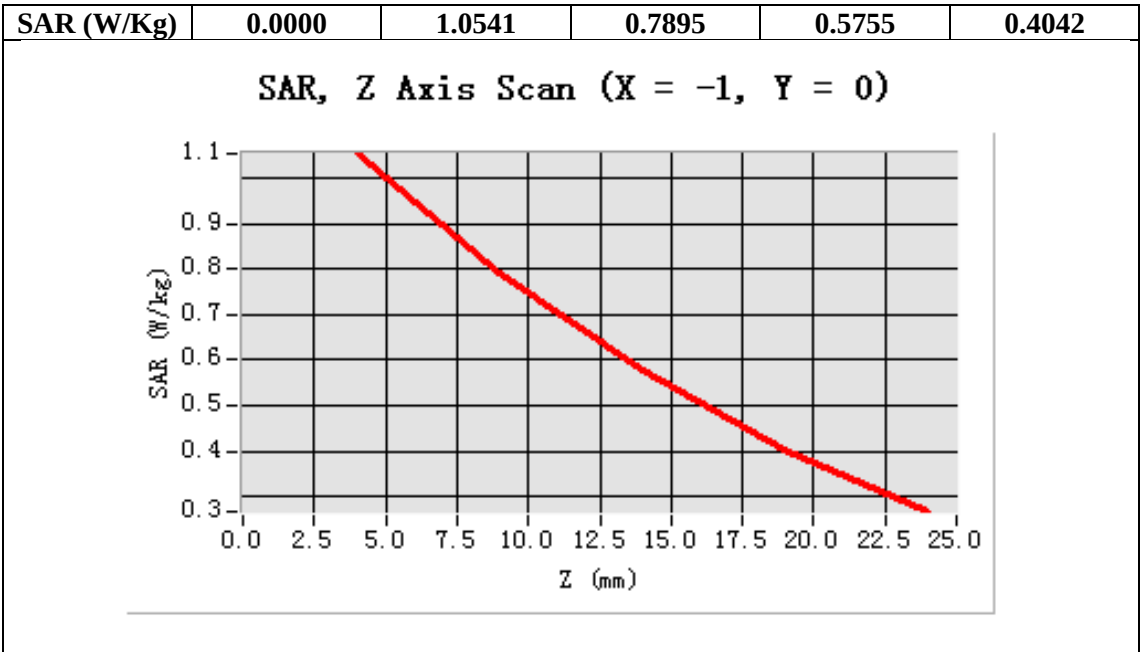

WCDMA Band II High-Body-Towards Grounds (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1907.6 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II High -Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ WCDMA band II High -Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA band II
Channels	High
Signal	CDMA (Crest factor: 1.0)

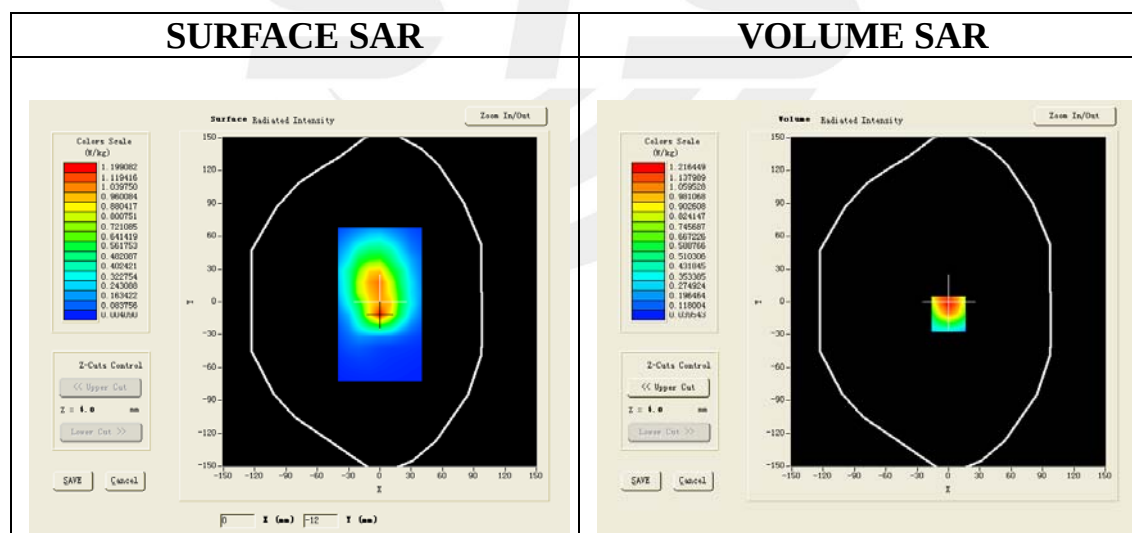

Maximum location: X=0.00, Y=-11.00

SAR 10g (W/Kg)	0.701258
SAR 1g (W/Kg)	1.070236

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

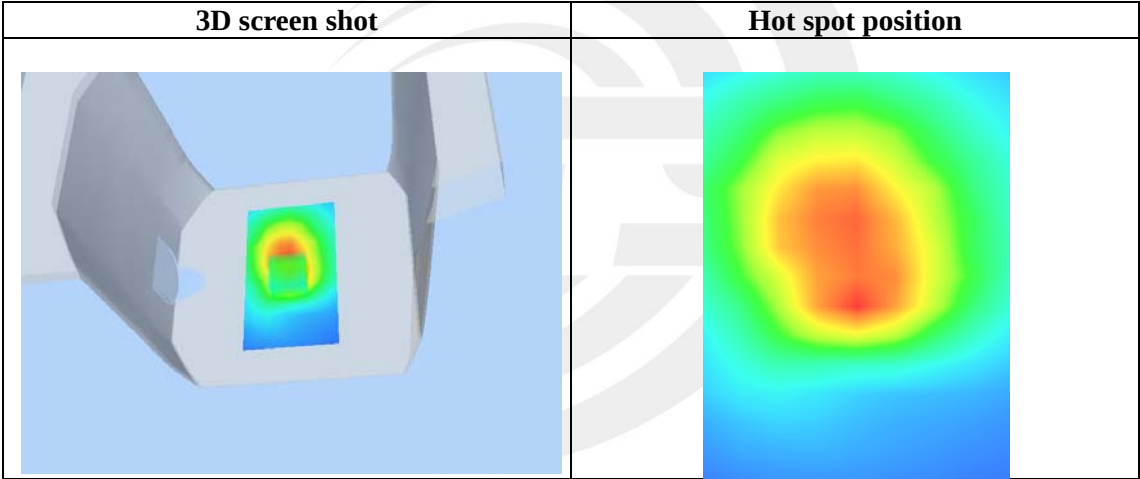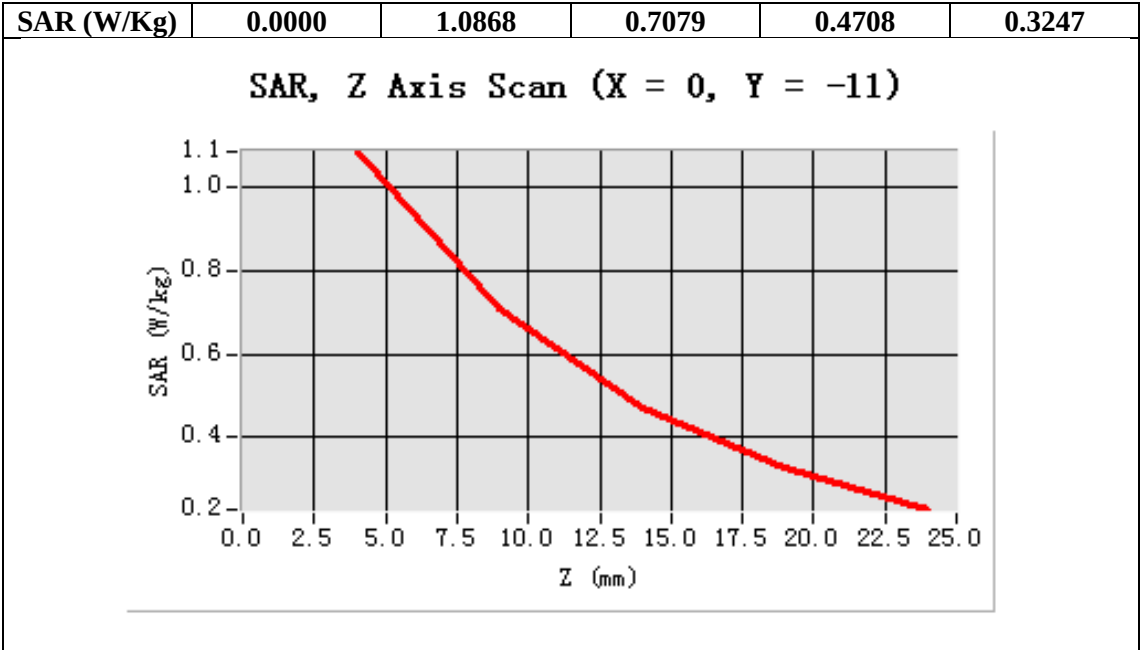

WCDMA Band II Mid-Body-Towards Phantom (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ WCDMA band II Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Front
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

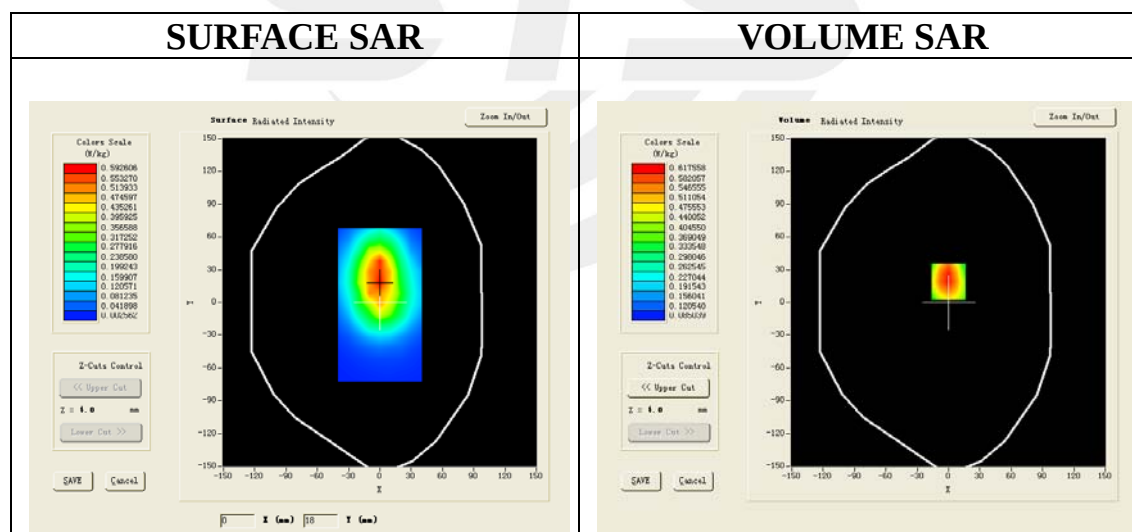

Maximum location: X=0.00, Y=19.00

SAR 10g (W/Kg)	0.391821
SAR 1g (W/Kg)	0.599211

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

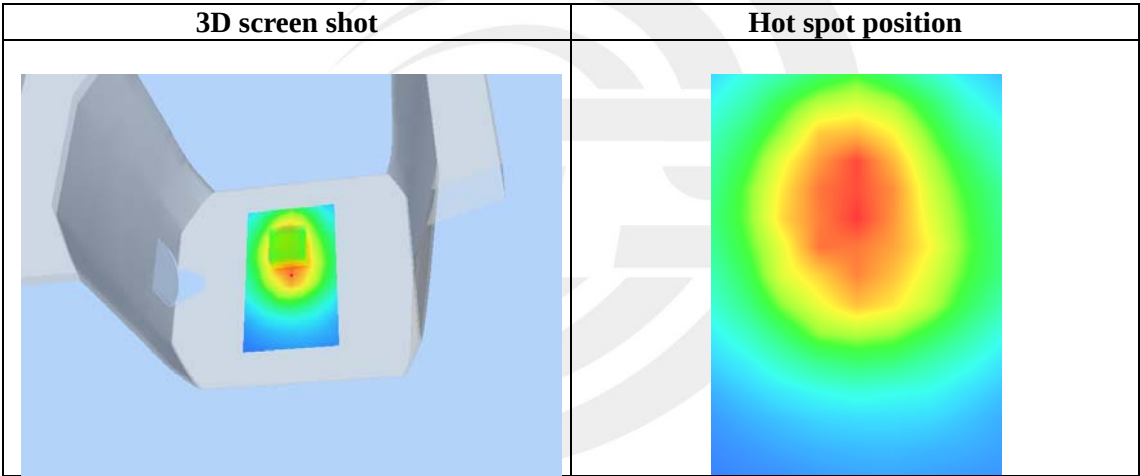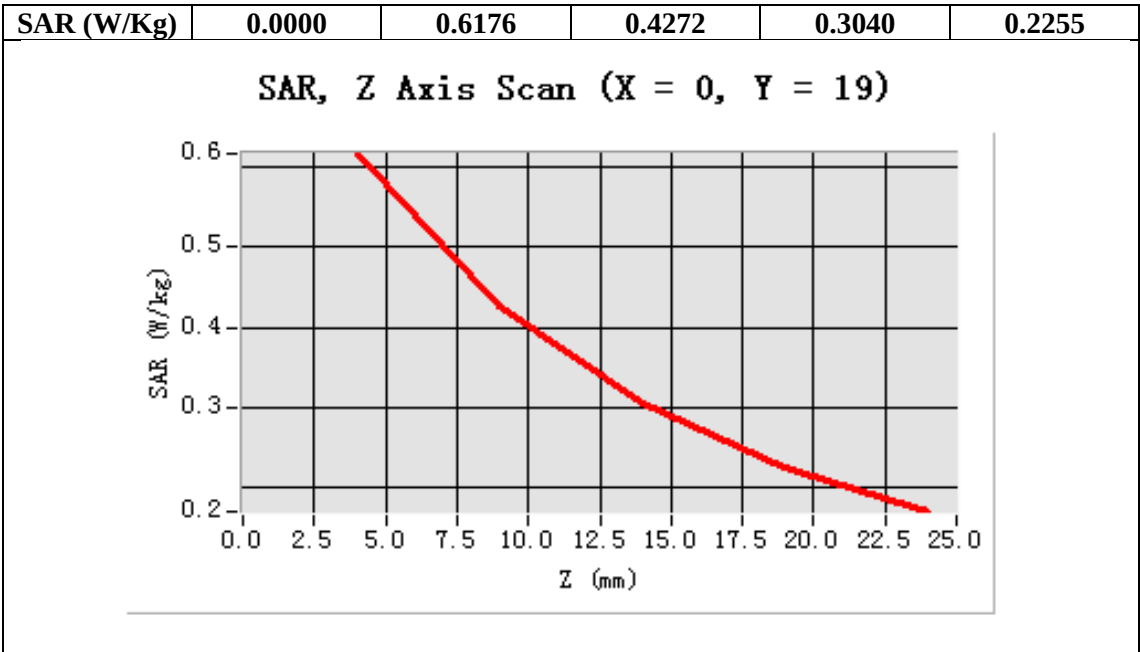

WCDMA Band II Mid-Edge 1(RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Mid-Edge 1/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/ WCDMA band II Mid-Edge 1/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 1
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

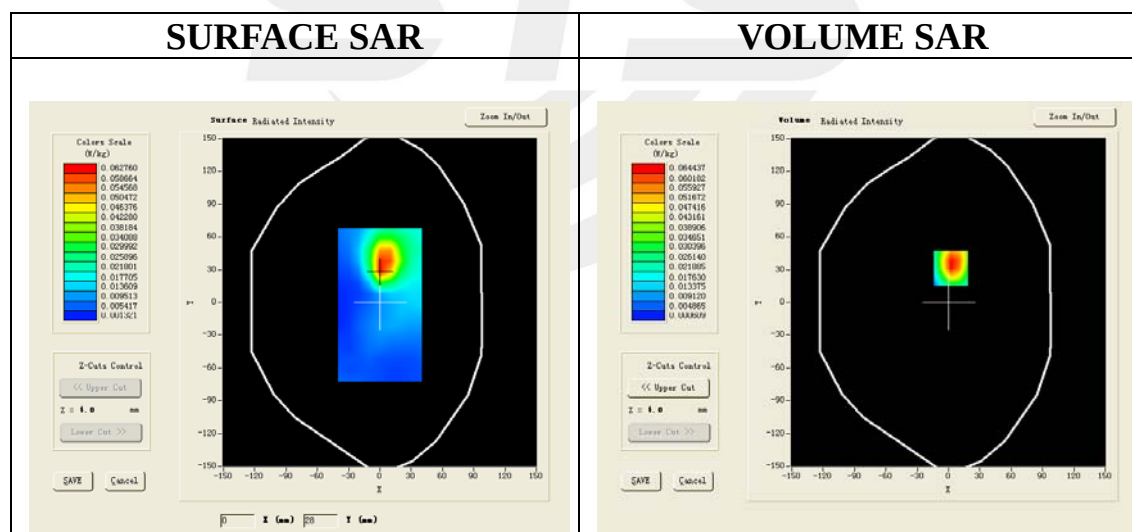

Maximum location: X=2.00, Y=31.00

SAR 10g (W/Kg)	0.038604
SAR 1g (W/Kg)	0.066233

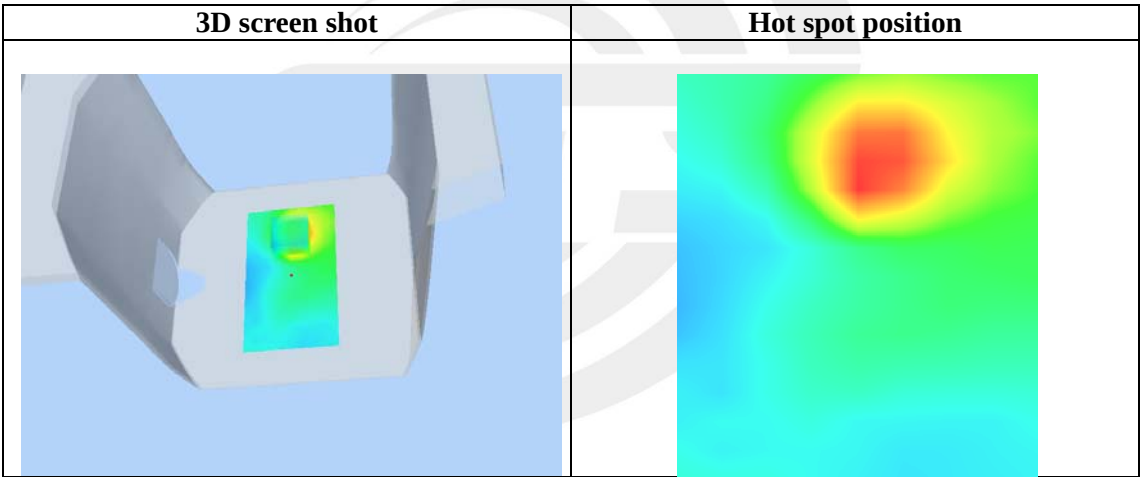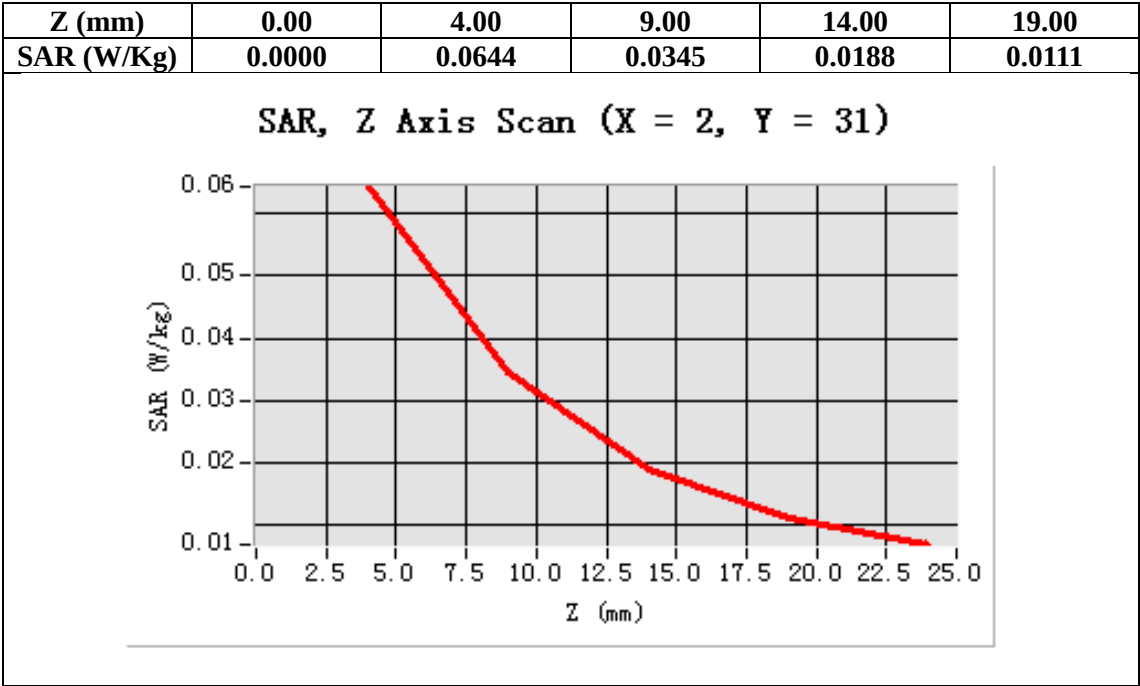

WCDMA Band II Mid-Edge 2(RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Mid-Edge 2/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/ WCDMA band II Mid-Edge 2/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 2
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

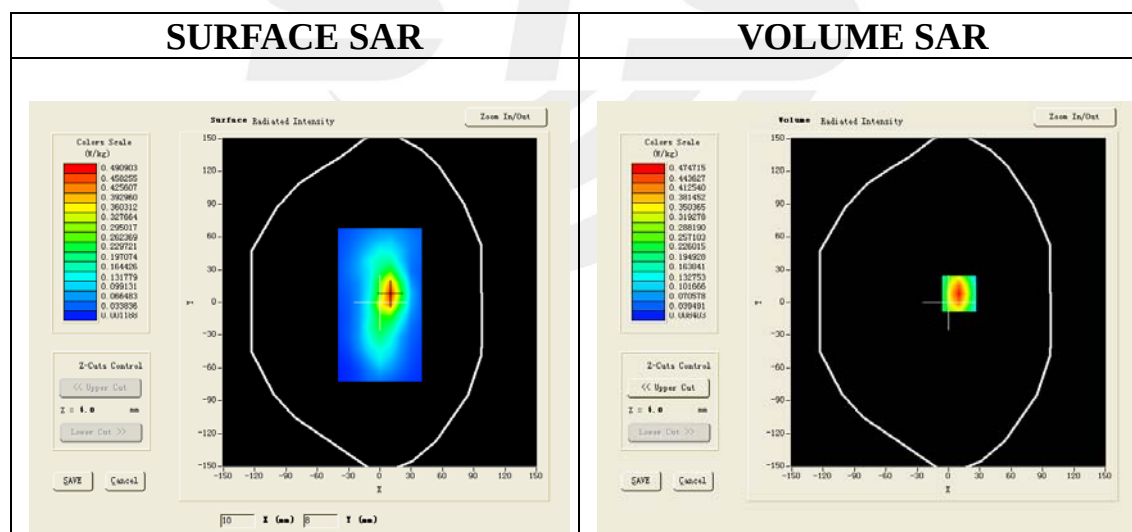

Maximum location: X=10.00, Y=8.00

SAR 10g (W/Kg)	0.243582
SAR 1g (W/Kg)	0.479560

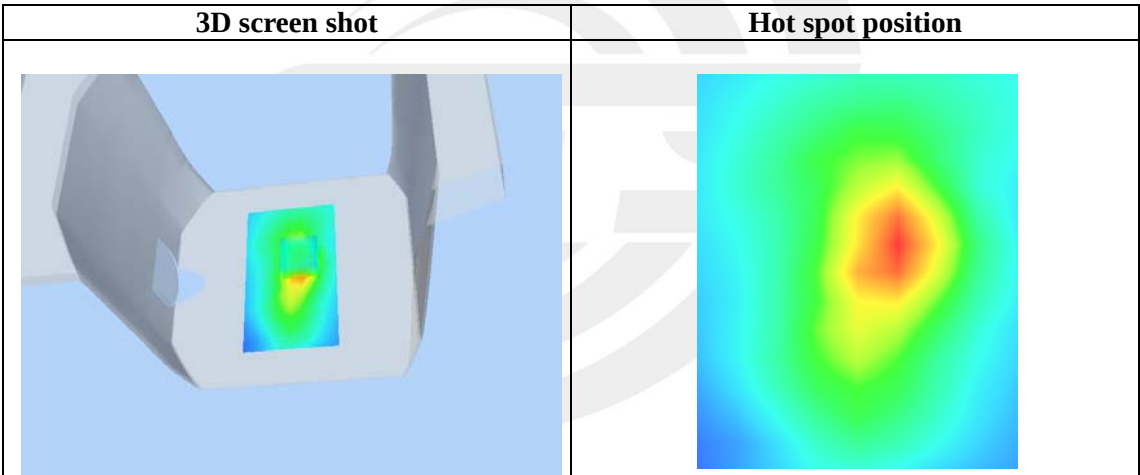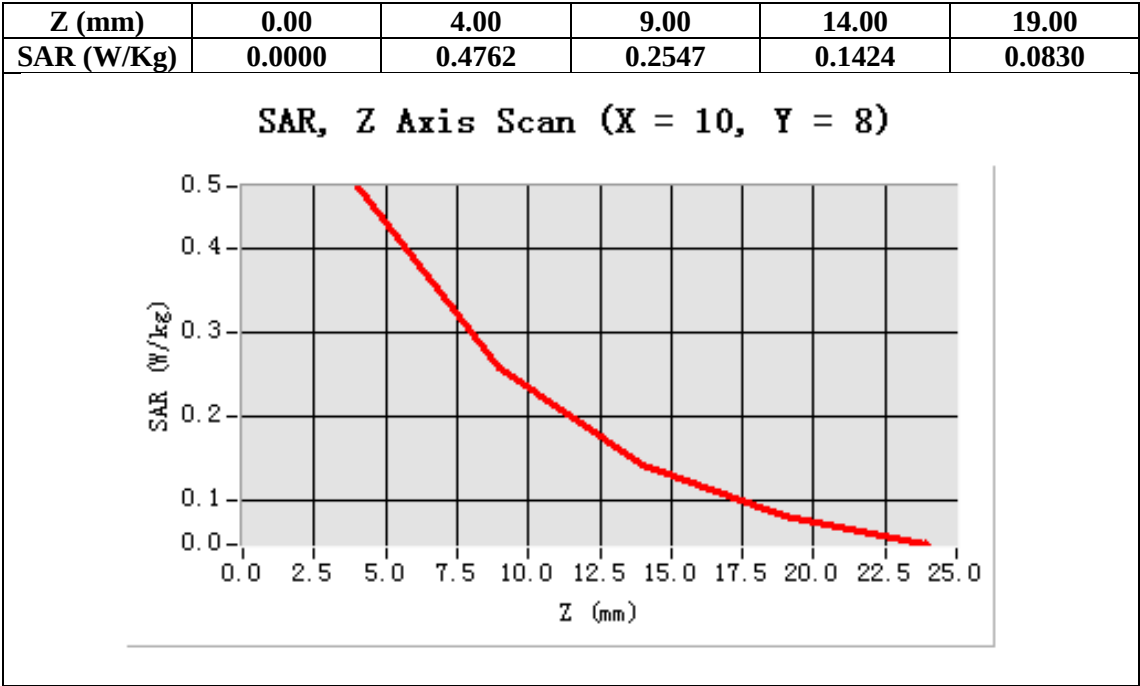

WCDMA Band II Mid-Edge 3(RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Mid-Edge 3/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/ WCDMA band II Mid-Edge 3/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 3
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

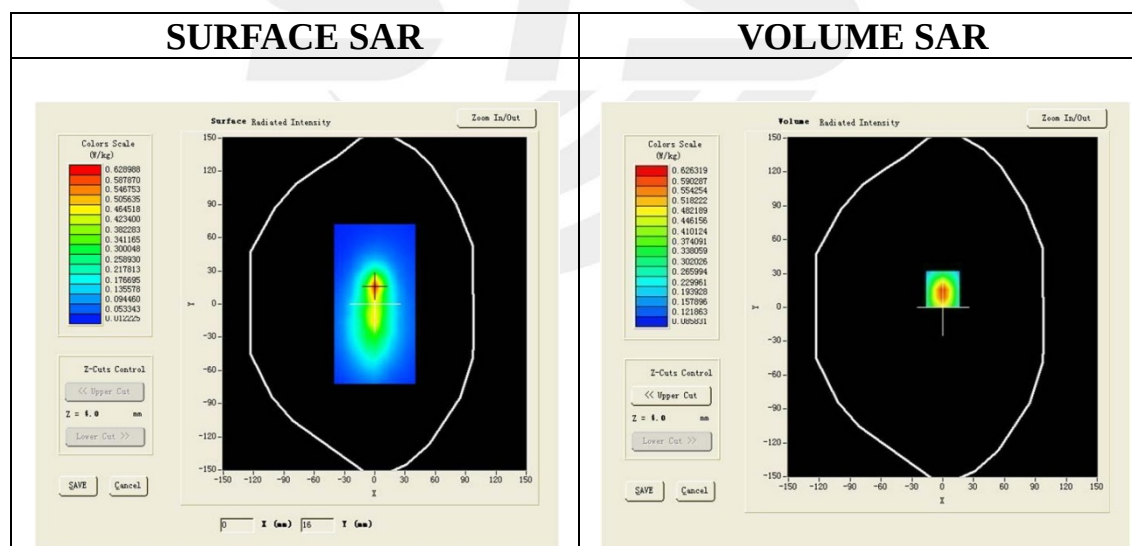

Maximum location: X=2.00, Y=-16.00

SAR 10g (W/Kg)	0.429204
SAR 1g (W/Kg)	0.653129

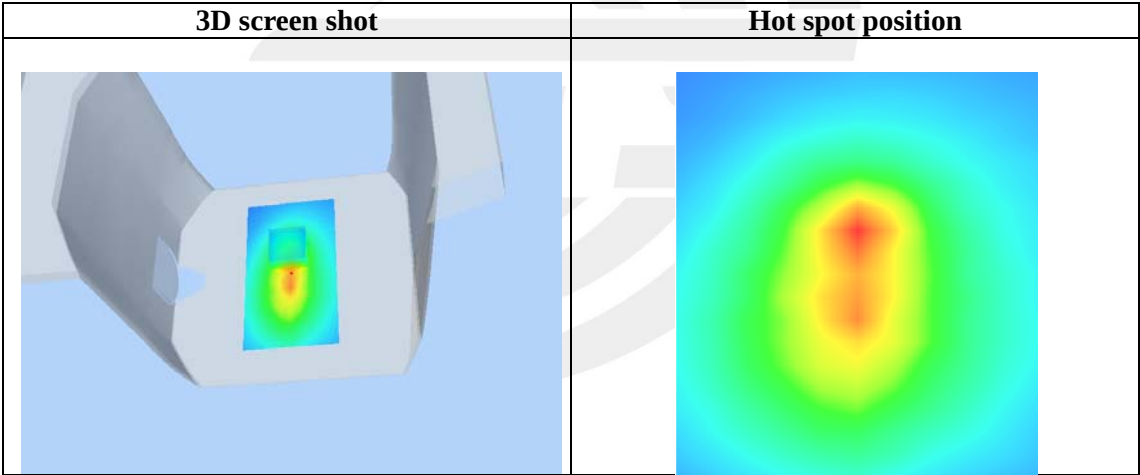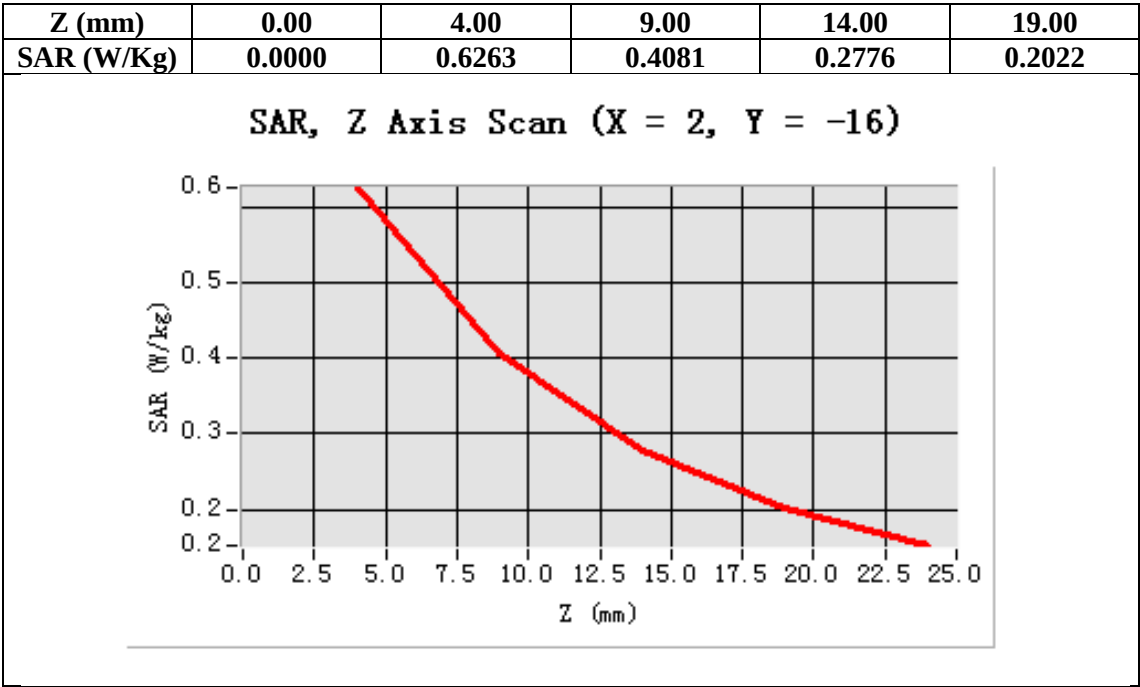

WCDMA Band II Mid-Edge 4(RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 23,2014

Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.85
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.1, Liquid temperature (°C): 20

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA band II Mid-Edge 4/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/ WCDMA band II Mid-Edge 4/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge 4
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

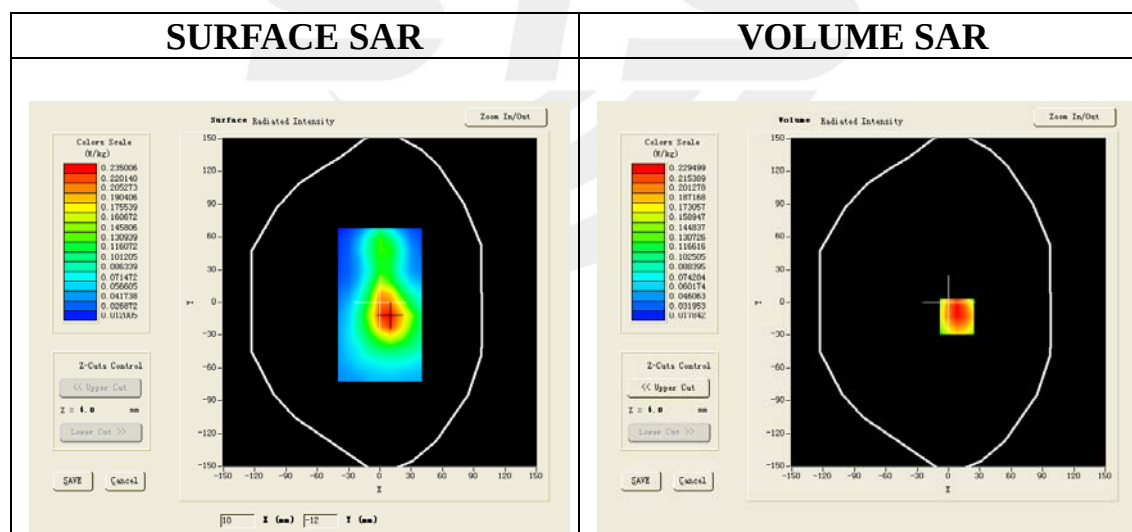

Maximum location: X=8.00, Y=-13.00

SAR 10g (W/Kg)	0.142283
SAR 1g (W/Kg)	0.235962

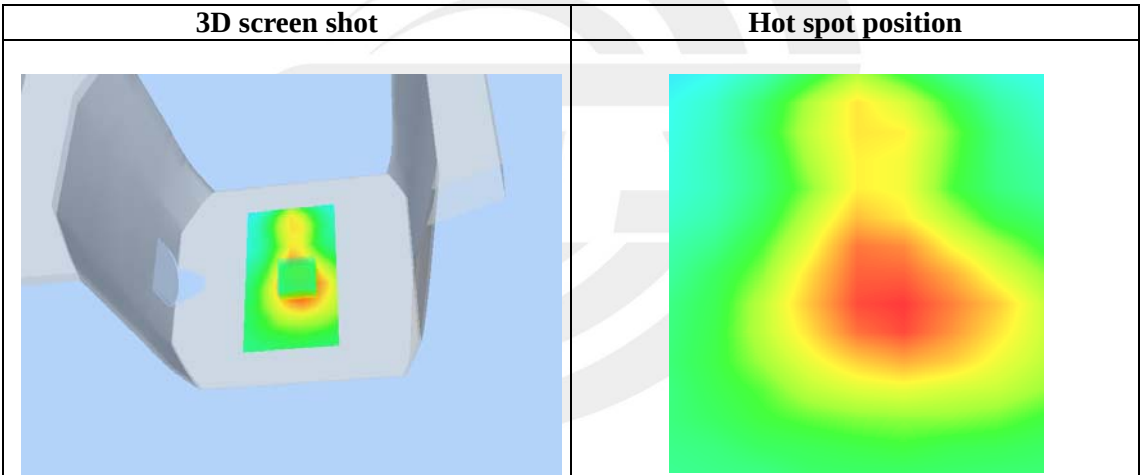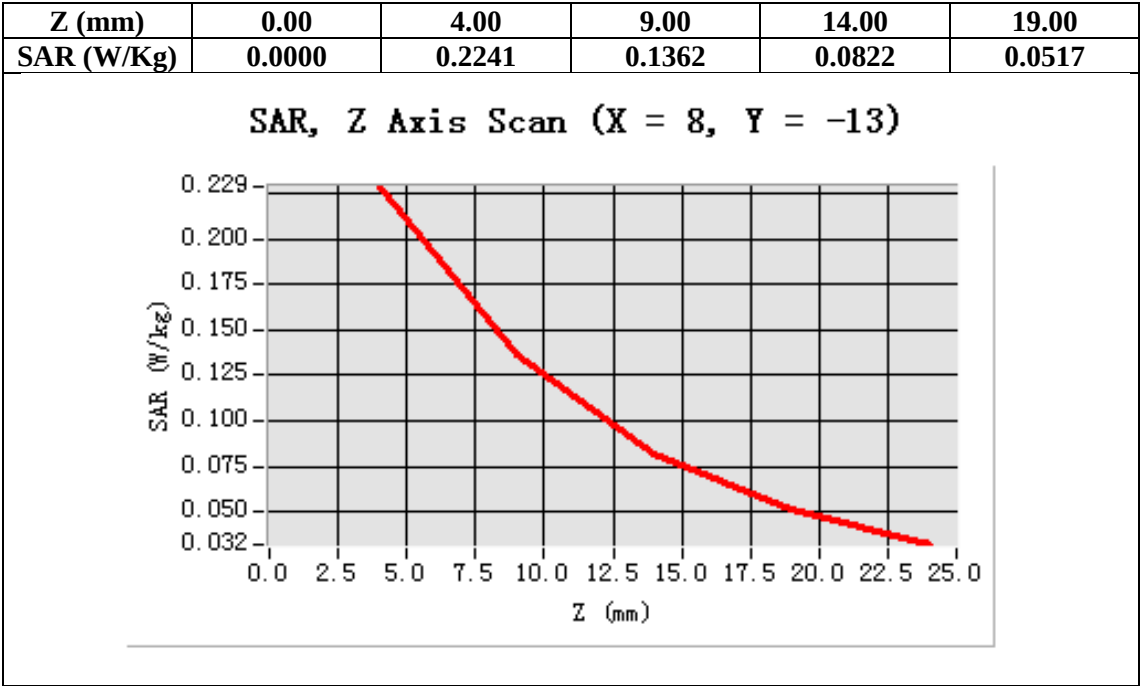

WCDMA Band V Mid-Touch-Left (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 02,2015

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD ; Duty Cycle:1: 1; Conv.F=4.83
Frequency: 836.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma=0.89\text{ mho/m}$; $\epsilon_r=41.65$; $\rho=1000\text{ kg/m}^3$;
Phantom section: Left Section
Ambient temperature ($^{\circ}\text{C}$): 22.8, Liquid temperature ($^{\circ}\text{C}$): 21.5

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V Mid-Touch-Left/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$



Configuration/ WCDMA Band V Mid-Touch-Left/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

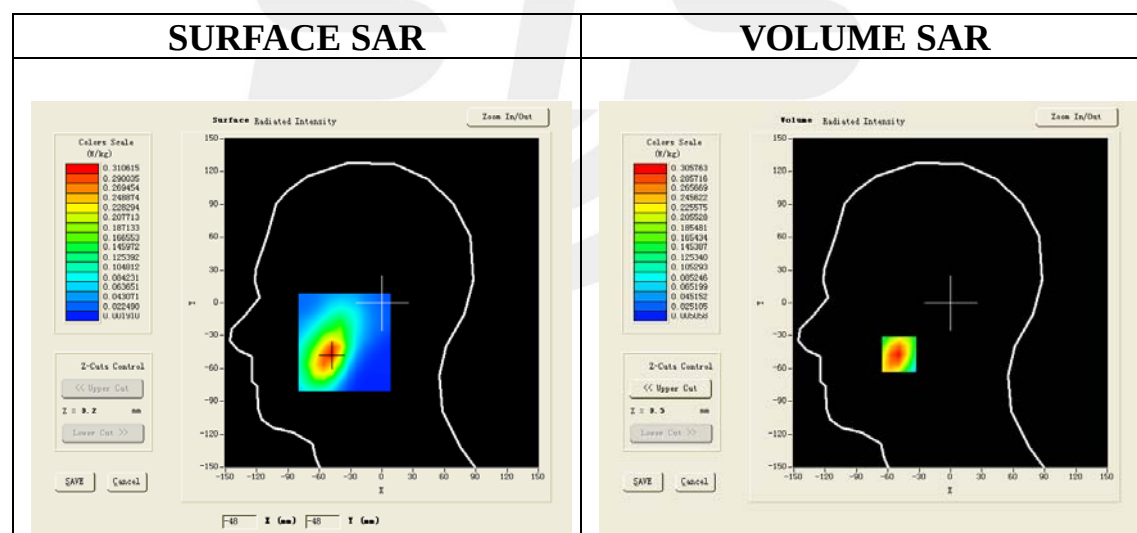

Maximum location: X=-49.00, Y=-47.00

SAR 10g (W/Kg)	0.155494
SAR 1g (W/Kg)	0.289087

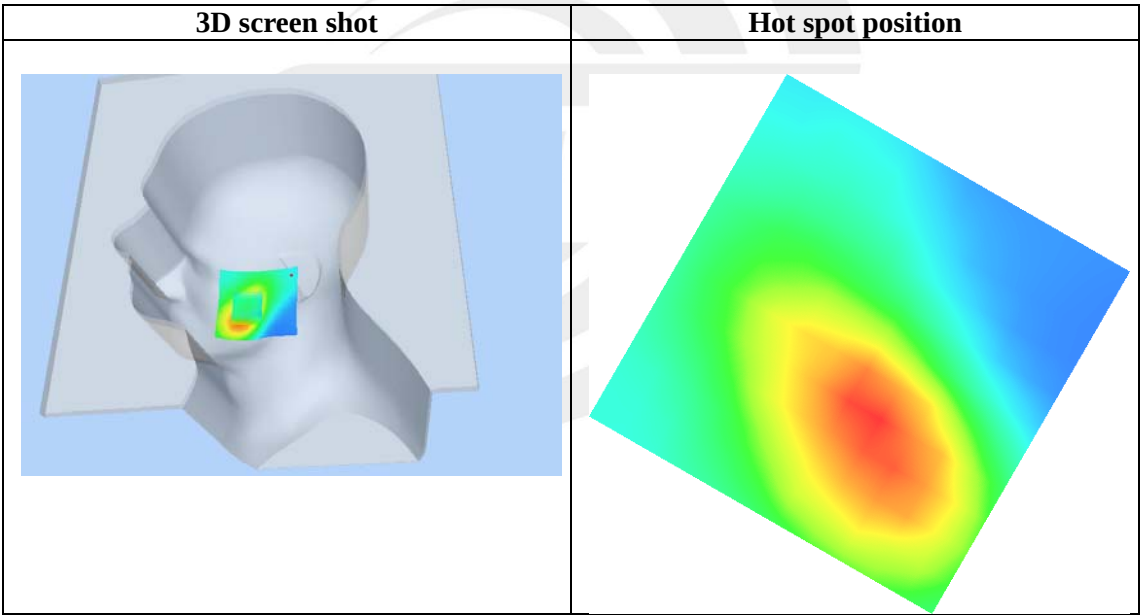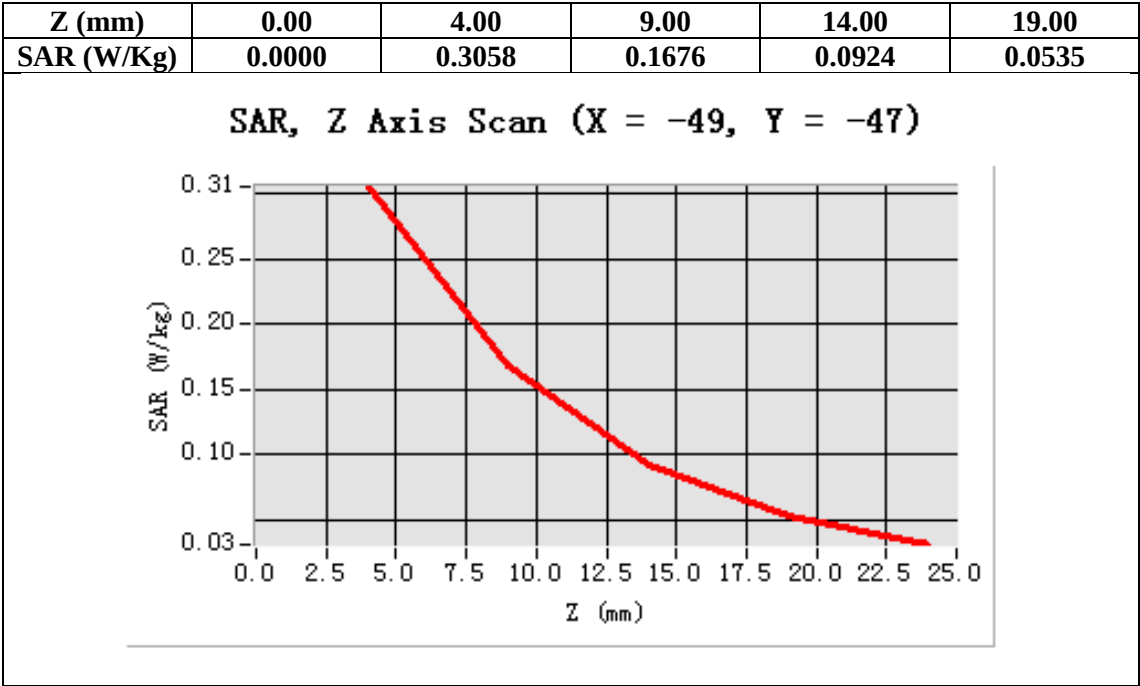

WCDMA Band V Mid-Tilt-Left (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 02,2015

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD ; Duty Cycle:1: 1; Conv.F=4.83
Frequency: 836.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma=0.89\text{ mho/m}$; $\epsilon_r=41.65$; $\rho= 1000\text{ kg/m}^3$;
Phantom section: Left Section
Ambient temperature (°C): 22.8, Liquid temperature (°C): 21.5

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V Mid-Tilt-Left/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$



Configuration/ WCDMA Band V Mid-Tilt-Left/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

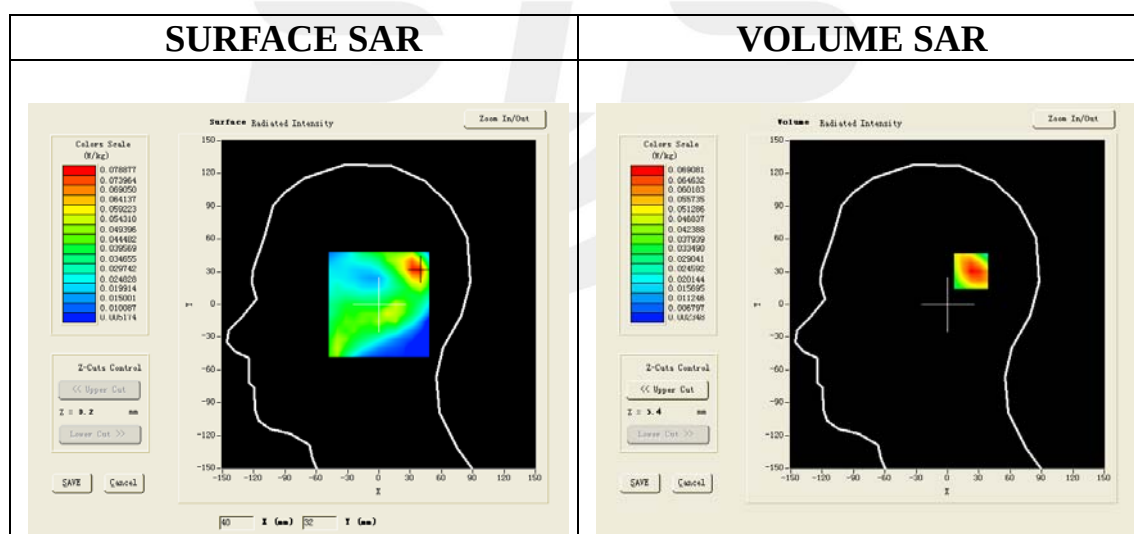

Maximum location: X=29.00, Y=32.00

SAR 10g (W/Kg)	0.037663
SAR 1g (W/Kg)	0.065729

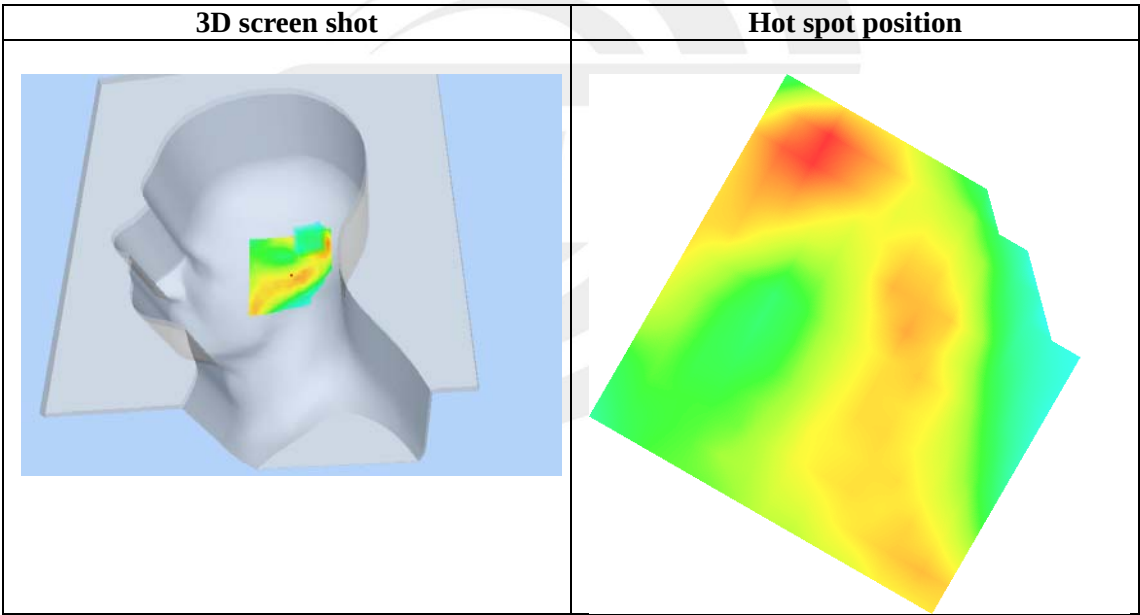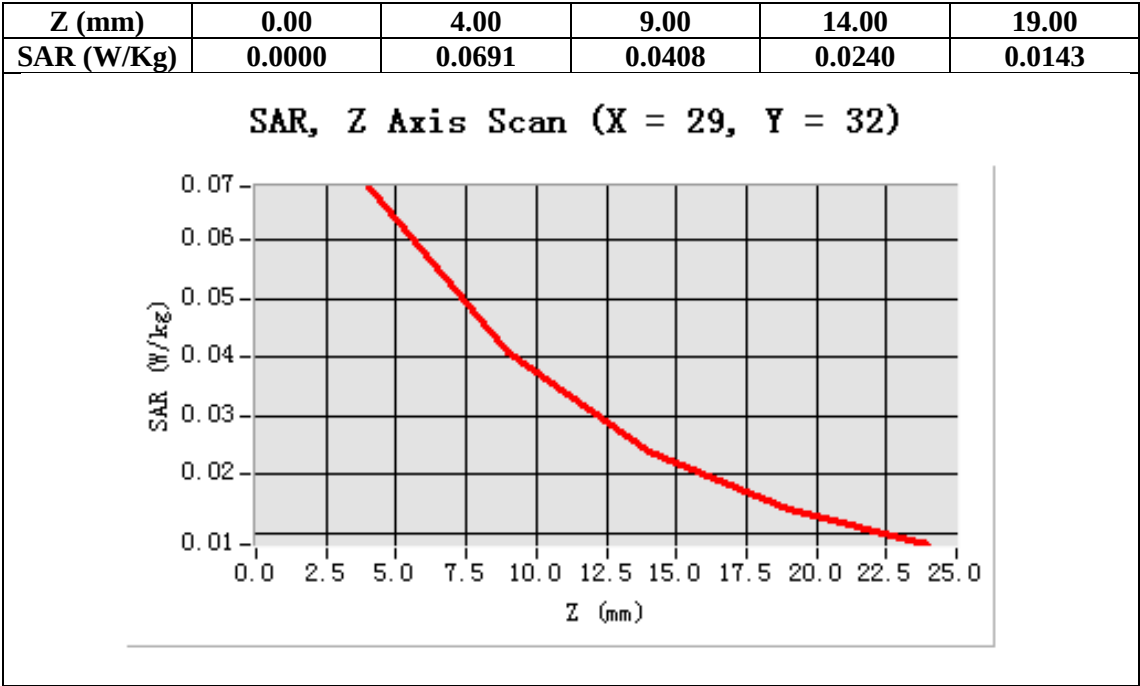

WCDMA Band V Mid-Touch-Right (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 02,2015

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD ; Duty Cycle:1: 1; Conv.F=4.83
Frequency: 836.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.89\text{ mho/m}$; $\epsilon_r = 41.65$; $\rho = 1000\text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.8, Liquid temperature ($^{\circ}\text{C}$): 21.5

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V Mid-Touch-Right/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$



Configuration/ WCDMA Band V Mid-Touch-Right/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

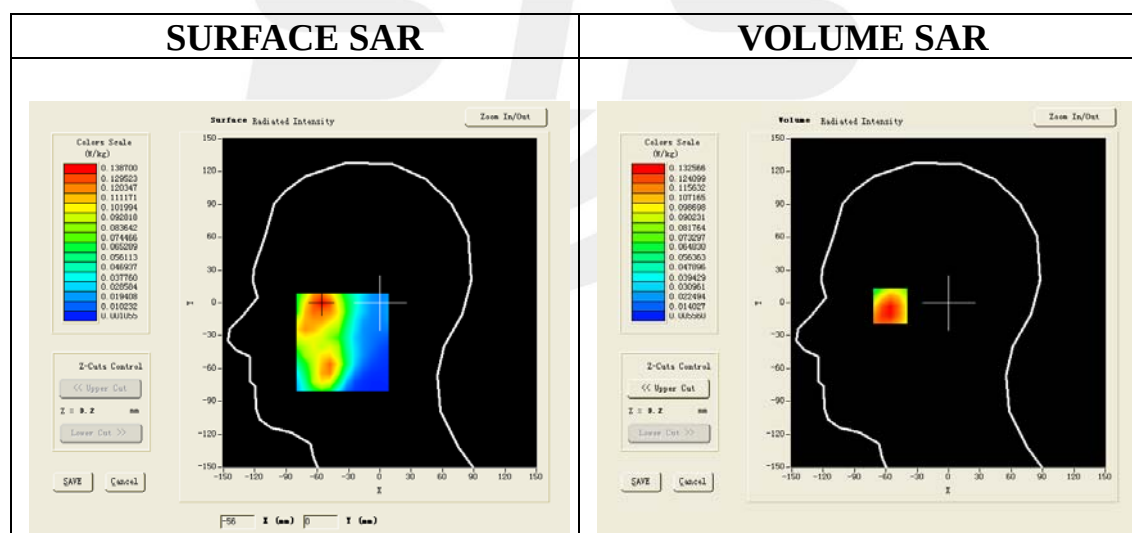

Maximum location: X=-56.00, Y=0.00

SAR 10g (W/Kg)	0.073759
SAR 1g (W/Kg)	0.127762

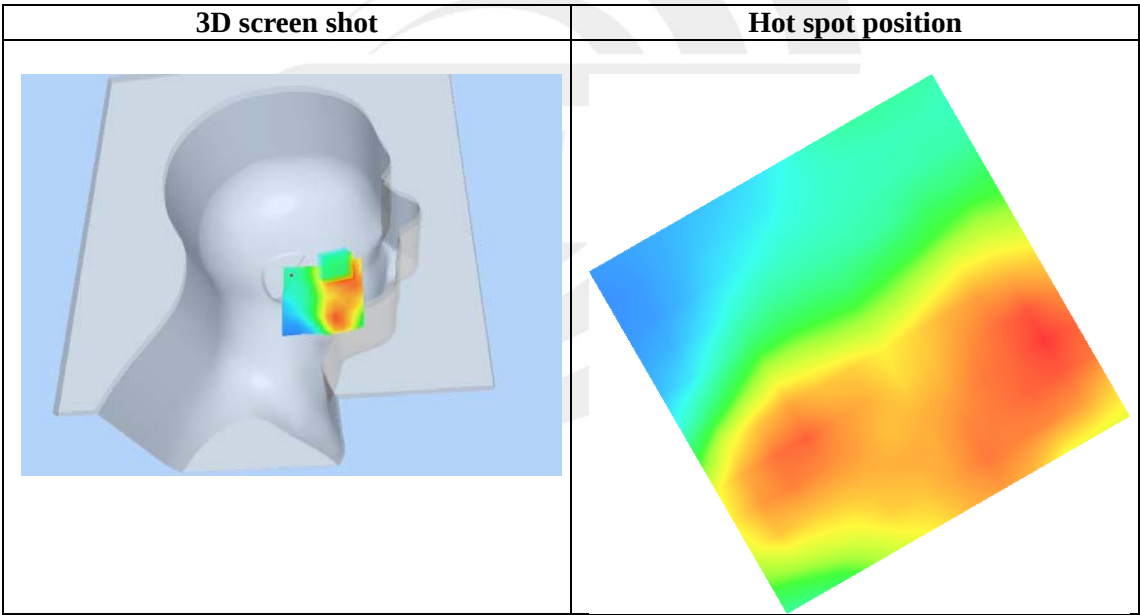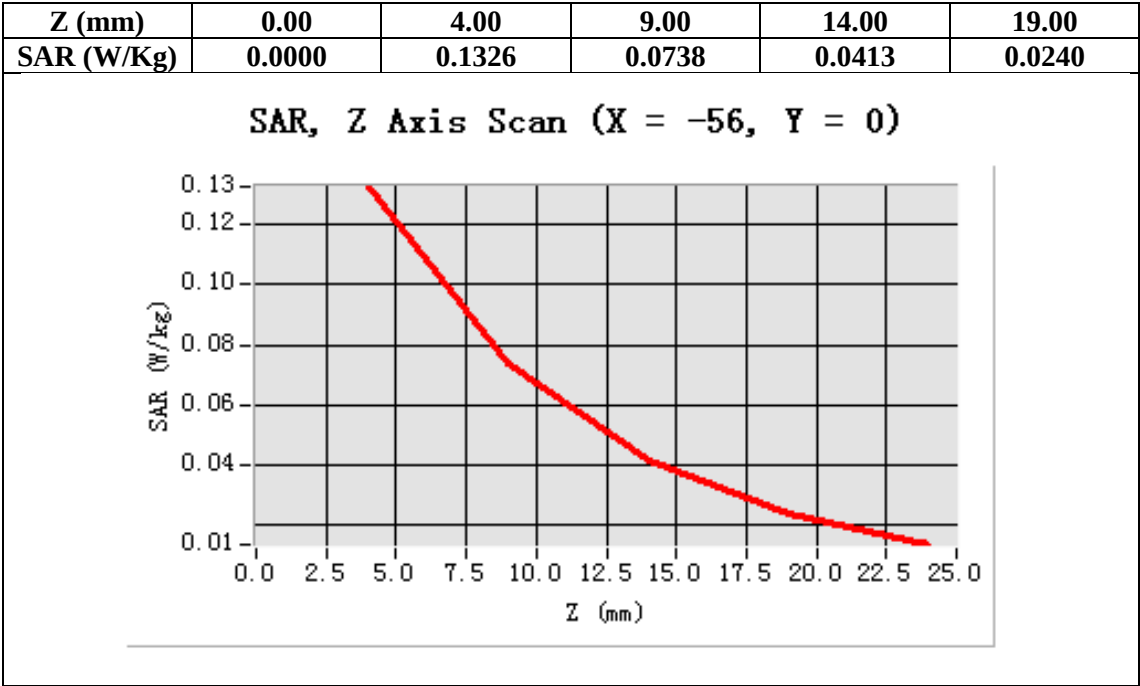

WCDMA Band V Mid-Tilt-Right (RMC)
DUT: tablet PC; Type: PC7088

Date: Mar. 02,2015

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD ; Duty Cycle:1: 1; Conv.F=4.83
Frequency: 836.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.89\text{ mho/m}$; $\epsilon_r = 41.65$; $\rho = 1000\text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.8, Liquid temperature ($^{\circ}\text{C}$): 21.5

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V Mid-Tilt-Right/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$



Configuration/ WCDMA Band V Mid-Tilt-Right/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	Right head
Device Position	Tilt
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

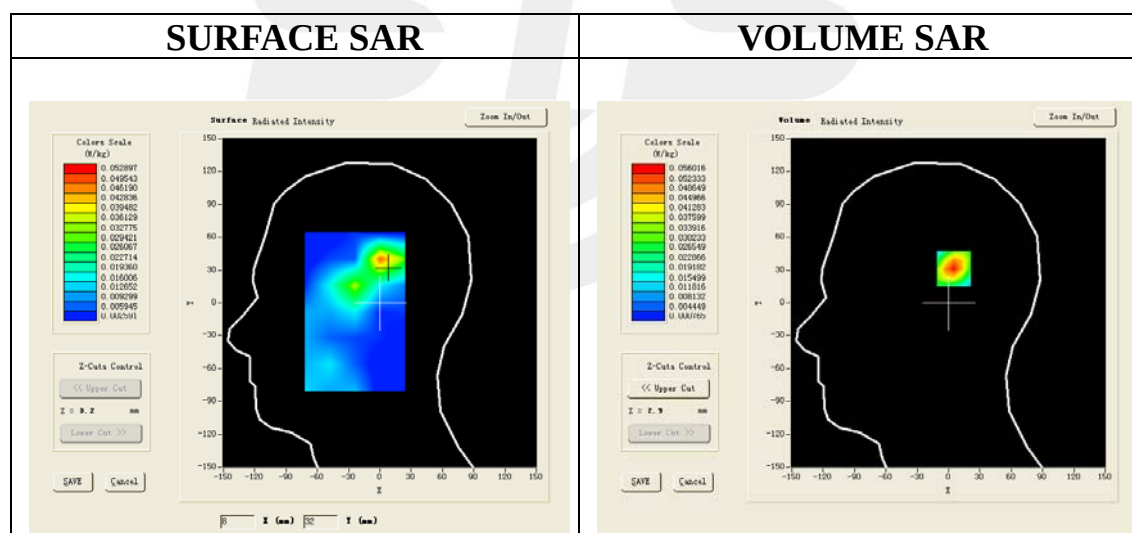

Maximum location: X=8.00, Y=33.00

SAR 10g (W/Kg)	0.026345
SAR 1g (W/Kg)	0.052470

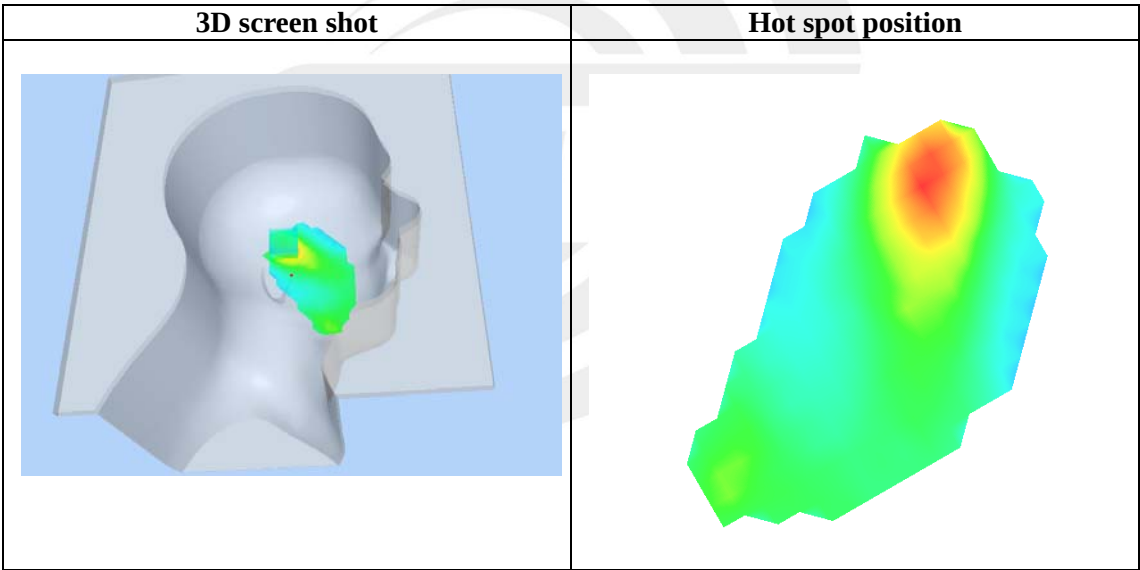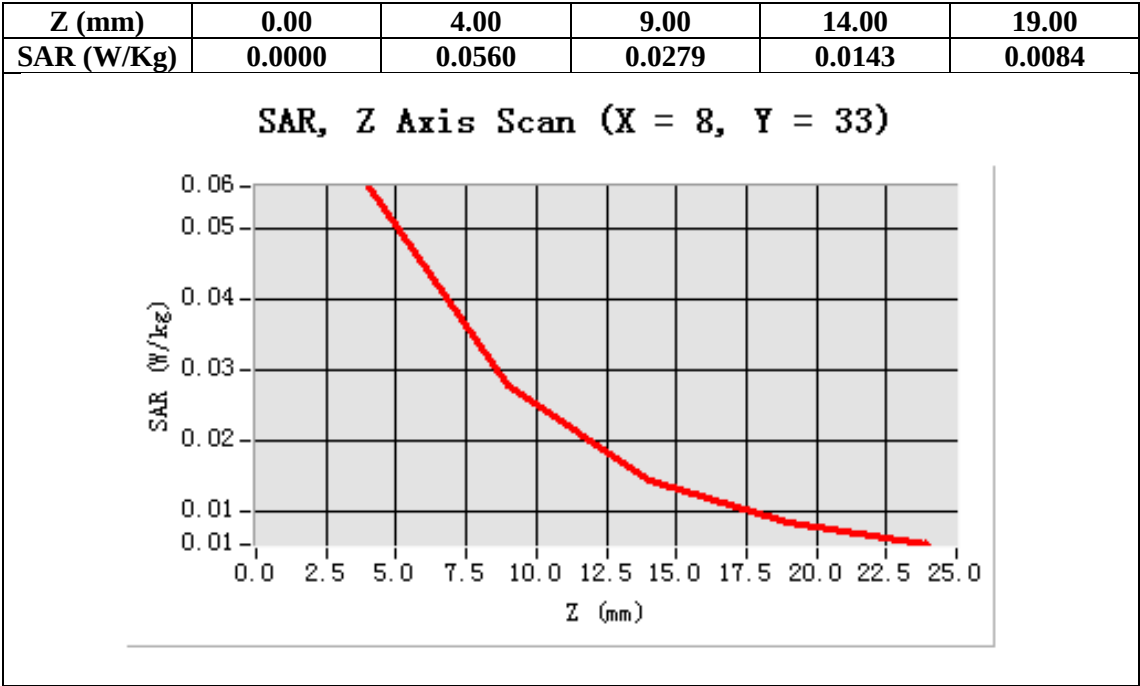

WCDMA Band V Low-Body-Towards Grounds (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.02
Frequency: 826.4 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 55.78$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.3, Liquid temperature ($^{\circ}\text{C}$): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V Low -Body-Back/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$

Configuration/ WCDMA Band V Low -Body-Back/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA Band V
Channels	Low
Signal	CDMA (Crest factor: 1.0)

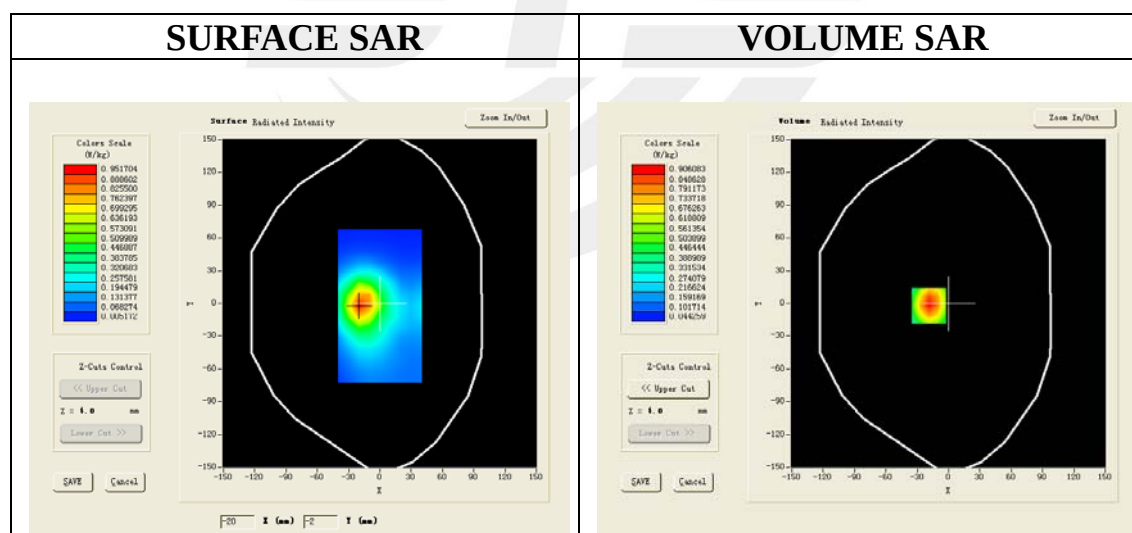

Maximum location: X=-19.00, Y=-2.00

SAR 10g (W/Kg)	0.538379
SAR 1g (W/Kg)	0.921526

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

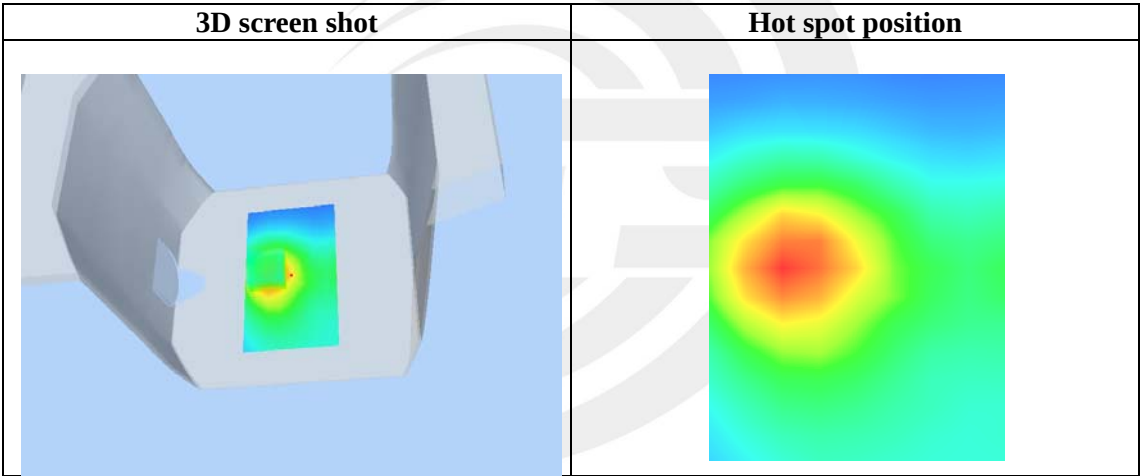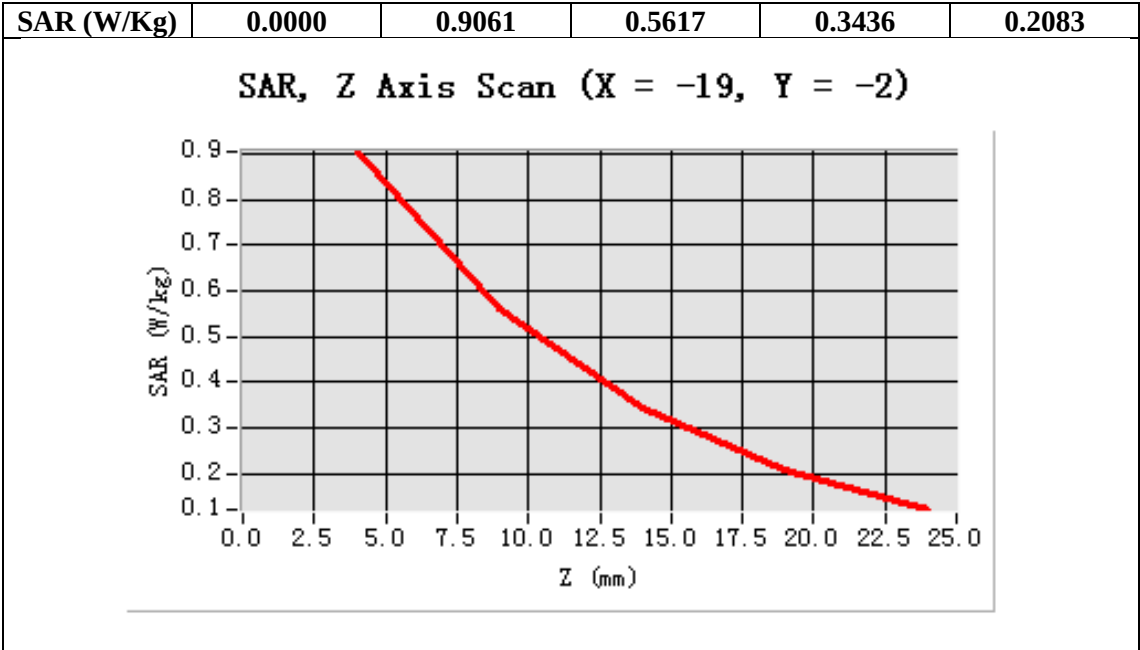

WCDMA Band V Mid-Body-Towards Grounds (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.02
Frequency: 836.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 55.78$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.3, Liquid temperature ($^{\circ}\text{C}$): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ WCDMA Band V Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

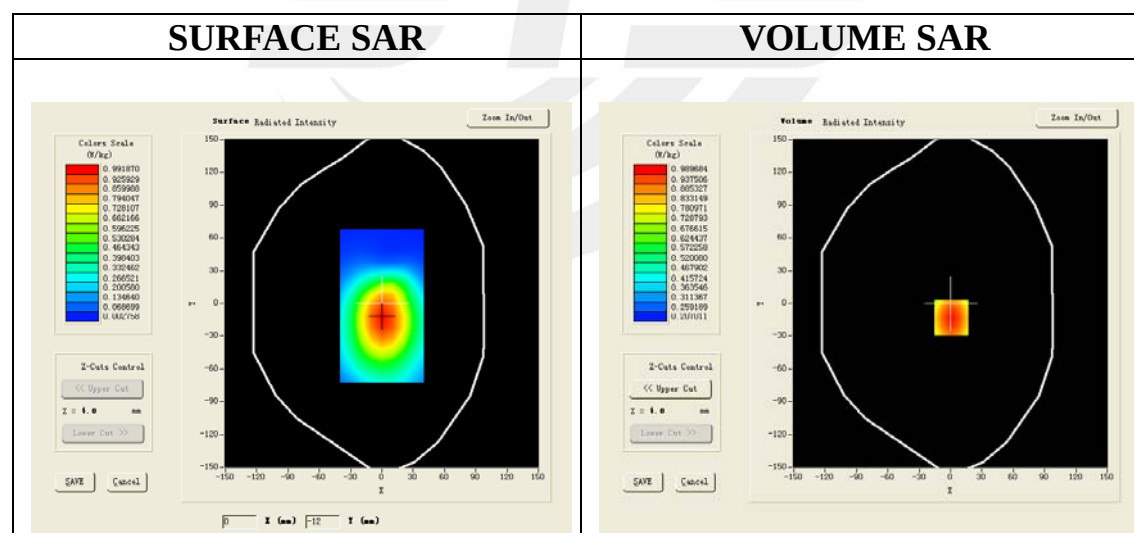

Maximum location: X=1.00, Y=-13.00

SAR 10g (W/Kg)	0.677153
SAR 1g (W/Kg)	0.950708

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

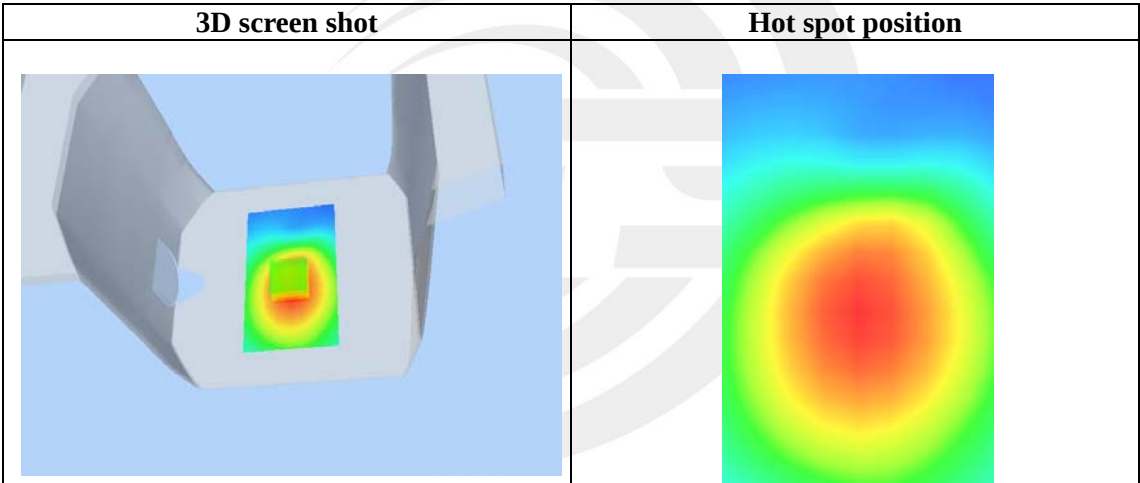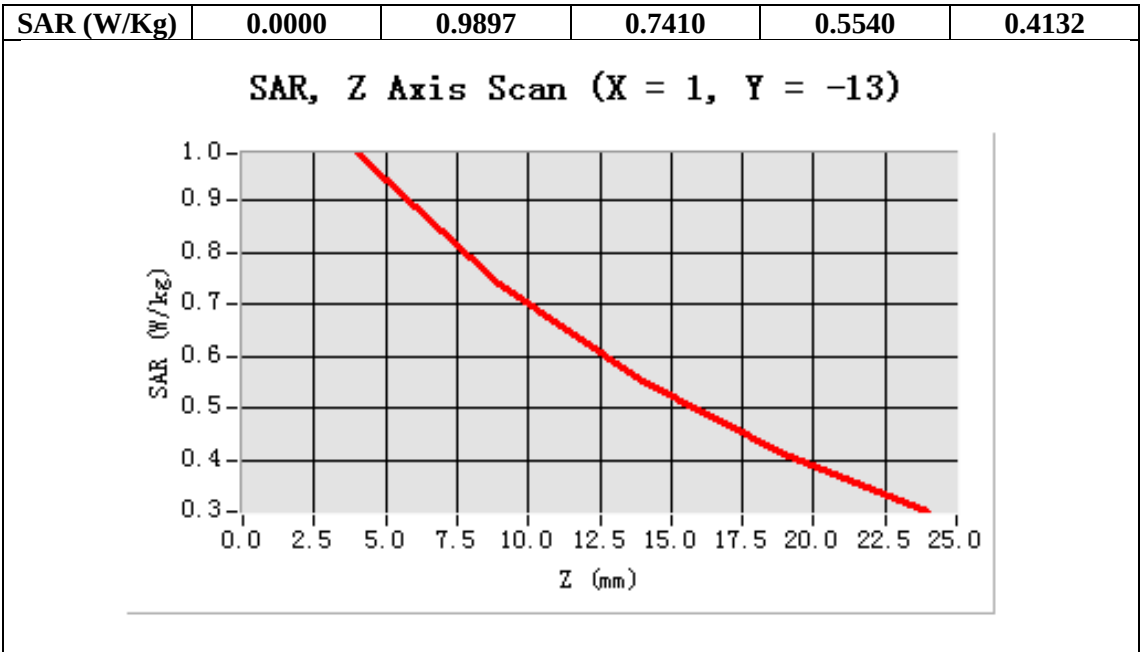

WCDMA Band V High-Body-Towards Grounds (RMC)
DUT: tablet PC; Type: PC7088

Date: Dec. 20,2014

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.02
Frequency: 846.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 55.78$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.3, Liquid temperature ($^{\circ}\text{C}$): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: 09/01/2014; Serial No.: SN 17/14 EP221

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM Twin Phantom

Measurement SW: OpenSAR V4_02_01

Configuration/ WCDMA Band V High -Body-Back/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$

Configuration/ WCDMA Band V High -Body-Back/Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	Validation plane
Device Position	Body Back
Band	WCDMA Band V
Channels	High
Signal	CDMA (Crest factor: 1.0)

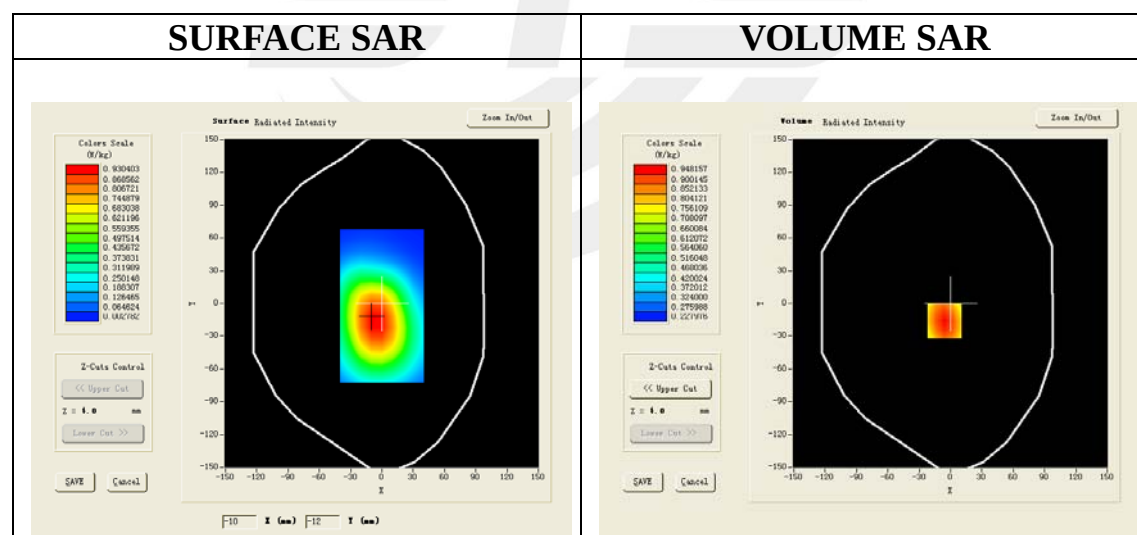

Maximum location: X=-6.00, Y=-16.00

SAR 10g (W/Kg)	0.663035
SAR 1g (W/Kg)	0.912717

Z (mm)	0.00	4.00	9.00	14.00	19.00
---------------	-------------	-------------	-------------	--------------	--------------

