
FCC Test Report

Report No.: AGC00119150303FE08

FCC ID : BRCPC7095ME

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : tablet pc

BRAND NAME : Kinwei, Titan

MODEL NAME : PC7095ME(Series model name please see attached list on page 6)

CLIENT : Kintech Co., Ltd

DATE OF ISSUE : Apr.28, 2015

STANDARD(S) : FCC Part 15.247

TEST PROCEDURE(S) : KDB 558074 v03r02

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.28, 2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	7
2.2 RELATED SUBMITTAL(S)/GRANT(S)	7
2.3 TEST METHODOLOGY	7
2.4 TEST FACILITY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
3. SYSTEM TEST CONFIGURATION	8
3.1 CONFIGURATION OF TESTED SYSTEM	8
3.2 EQUIPMENT USED IN TESTED SYSTEM	8
4. SUMMARY OF TEST RESULTS	11
5. DESCRIPTION OF TEST MODES	11
6. ANTENNA REQUIREMENT	12
6.1. STANDARD APPLICABLE	12
6.2. TEST RESULT	12
7. RADIATED EMISSION	13
7.1 MEASUREMENT PROCEDURE	13
7.2 TEST SETUP	14
7.3 LIMITS AND MEASUREMENT RESULT	15
7.4 TEST RESULT	15
8. BAND EDGE EMISSION	23
8.1. MEASUREMENT PROCEDURE	23
8.2. TEST SET-UP	23
8.3. RADIATED TEST RESULT	24
8.4. CONDUCTED TEST RESULT	25
9. 6DB BANDWIDTH	26
9.1. TEST EQUIPMENT LIST AND DETAILS	26
9.2. TEST PROCEDURE	26
9.3. SUMMARY OF TEST RESULTS/PLOTS	26
10. CONDUCTED OUTPUT POWER	28
10.1. MEASUREMENT PROCEDURE	28

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....28

10.3. LIMITS AND MEASUREMENT RESULT28

11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY31

11.1 MEASUREMENT PROCEDURE.....31

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....31

11.3 MEASUREMENT EQUIPMENT USED.....31

11.4 LIMITS AND MEASUREMENT RESULT31

12. FCC LINE CONDUCTED EMISSION TEST33

12.1 LIMITS33

12.2 TEST SETUP.....33

12.3 PRELIMINARY PROCEDURE34

12.4 FINAL TEST PROCEDURE.....34

12.5 TEST RESULT OF POWER LINE35

APPENDIX A: PHOTOGRAPHS OF TEST SETUP37

APPENDIX B: PHOTOGRAPHS OF EUT38

1. VERIFICATION OF COMPLIANCE

Applicant	Kintech Co., Ltd.
Address	1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang, Bao An District, Shenzhen, Guang Dong, China
Manufacturer	Kintech Co., Ltd
Address	1F-5F, Bldg 22, Chen Tian Industrial Zone, Xi Xiang, Bao An District, Shenzhen, Guang Dong, China
Product Designation	tablet pc
Brand Name	Kinwei, Titan
Test Model	PC7095ME
Series Model	Series model name please see attached list on page 6
Difference description	All the same except for the model name.
Date of test	Apr.20,2015 to Apr.27,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Matt Zhang

Matt Zhang

Apr.28, 2015

Checked By

Kidd Yang

Kidd Yang

Apr.28, 2015

Authorized By

Solger Zhang

Solger Zhang

Apr.28, 2015

ATTACHED LIST

<p>Series model</p>	<p>PC7095, PC7095Y, PCXXXXME(XXXX represents 0000~9999), PCXXXX(XXXX represents 0000~9999), PCXXXXY(XXXX represents 0000~9999; Y represents A~Z), KW-PC7095X, KW-PC7095, KW-PCXXXXXX(XXXX represents 0000~9999), KW-PCXXXX(XXXX represents 0000~9999), PC7099ME, PC7099, PC7099Y, PCXXXXME(XXXX represents 0000~9999), PCXXXX(XXXX represents 0000~9999), PCXXXXY(XXXX represents 0000~9999; Y represents A~Z), KW-PC7099X, KW-PC7099, KW-PCXXXXXX(XXXX represents 0000~9999), KW-PCXXXX(XXXX represents 0000~9999)</p>
----------------------------	---

2.GENERAL INFORMATION

2.1PRODUCT DESCRIPTION

The EUT is designed as “**tablet pc**”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.0
Modulation	GFSK
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Integrated Antenna
Antenna Gain	1.0dBi
Hardware Version	PX6S706 REV:1.1
Software Version	F719-SG-2015-04-15
Power Supply	DC3.7V by Built-in Li-ion Battery

2.2 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: BRCPC7095ME** filing to comply with Section 15.247of the FCC Part 15, Subpart C Rules.

2.3TEST METHODOLOGY

All measurements contained in this report were conducted with KDB 558074 D01 DTS Meas Guidance v03r02, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

2.4 TEST FACILITY

Site	Compliance Certification Services (Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,Guan Lan Town, Baoan District, Shenzhen, China
Description	Test Firm Registration Number: 441872

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.


2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 CONFIGURATION OF TESTED SYSTEM

Configuration:

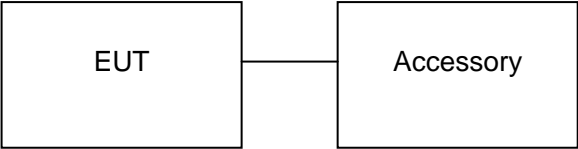

3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	tablet pc	PC7095ME	FCC ID: BRCPC7095ME	EUT
2	Adapter	JKY0212-0502000UL	5V/2A	Accessory
3	Battery	N/A	DC3.7V / 2800mAh	Accessory
4	Earphone	PC7095ME	N/A	Accessory
5	USB Cable	PC7095ME	N/A	Accessory

TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/25/2014	07/24/2015
RF attenuator	N/A	RFA20db	68	07/25/2014	07/24/2015
Spectrum Analyzer	Agilent	E4440A	US41421290	02/17/2015	02/16/2016
Amplifier	EM	EM30180	0607030	02/17/2015	02/16/2016
Horn Antenna	EM	EM-AH-10180	67	02/17/2015	02/16/2016
Horn Antenna	A.H. Systems Inc.	SAS-574	N/A	07/25/2014	07/24/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/25/2014	07/24/2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	26	08/16/2014	08/15/2015
Loop Antenna	A.H.	SAS-526B	SEL0097	05/10/2014	05/09/2015
LISN	R&S	ESH3-Z5	8389791009	07/25/2014	07/24/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

4. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna Requirement	Compliant
§15.209 §15.247(d)	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247(b)	Conducted Power	Compliant
§15.247(e)	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.207	Line Conduction Emission	Compliant

5. DESCRIPTION OF TEST MODES

The EUT has been operated in three modulations: GFSK independently.

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)

Note:

1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report if no any records.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. Eut is operating at its maximum duty cycle>or equal 98%

6. ANTENNA REQUIREMENT

6.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

6.2. TEST RESULT

This product has a permanent antenna, fulfill the requirement of this section.


7. RADIATED EMISSION

7.1 MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

7.2 TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

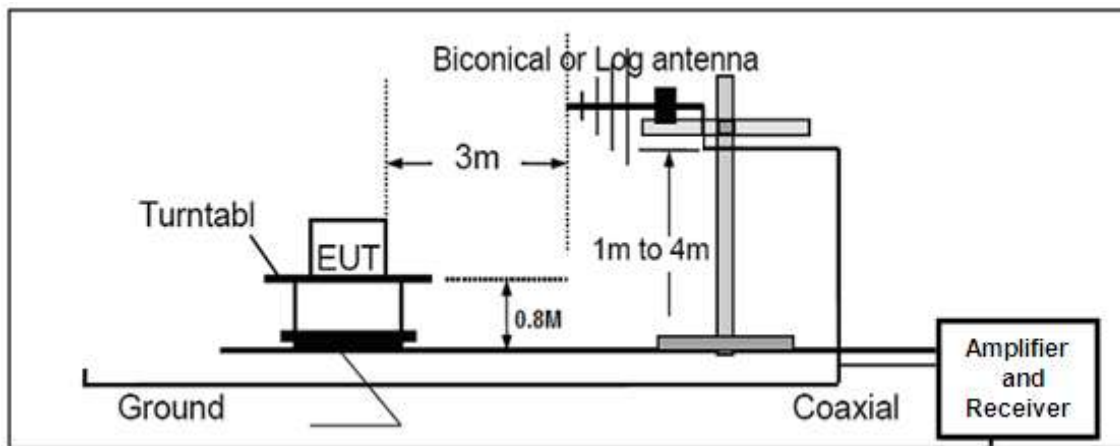

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

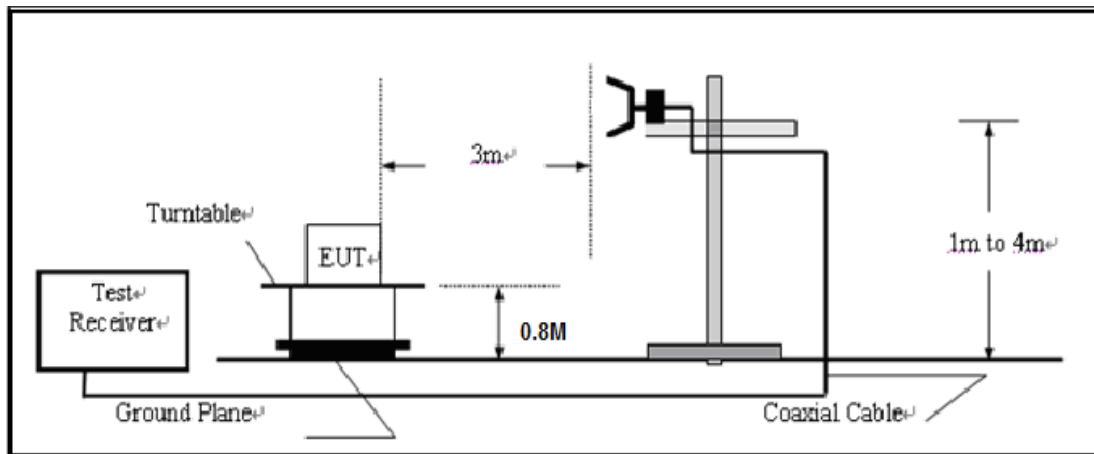

7.3 LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

7.4 TEST RESULT


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)

Job No.: 20150422	Probe : Horizontal
Standard: FCC Part15 Class B (30-1000MHz)	Tested Distance: 3m
Test item: Radiation Test	Power Source: DC 3V
Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH	Date: 2015-4-22 Time: 17:20:52
Company:	EUT:
Model: PC7095ME	Test By : JIMMY
Test Mode: BT4.0 2402	

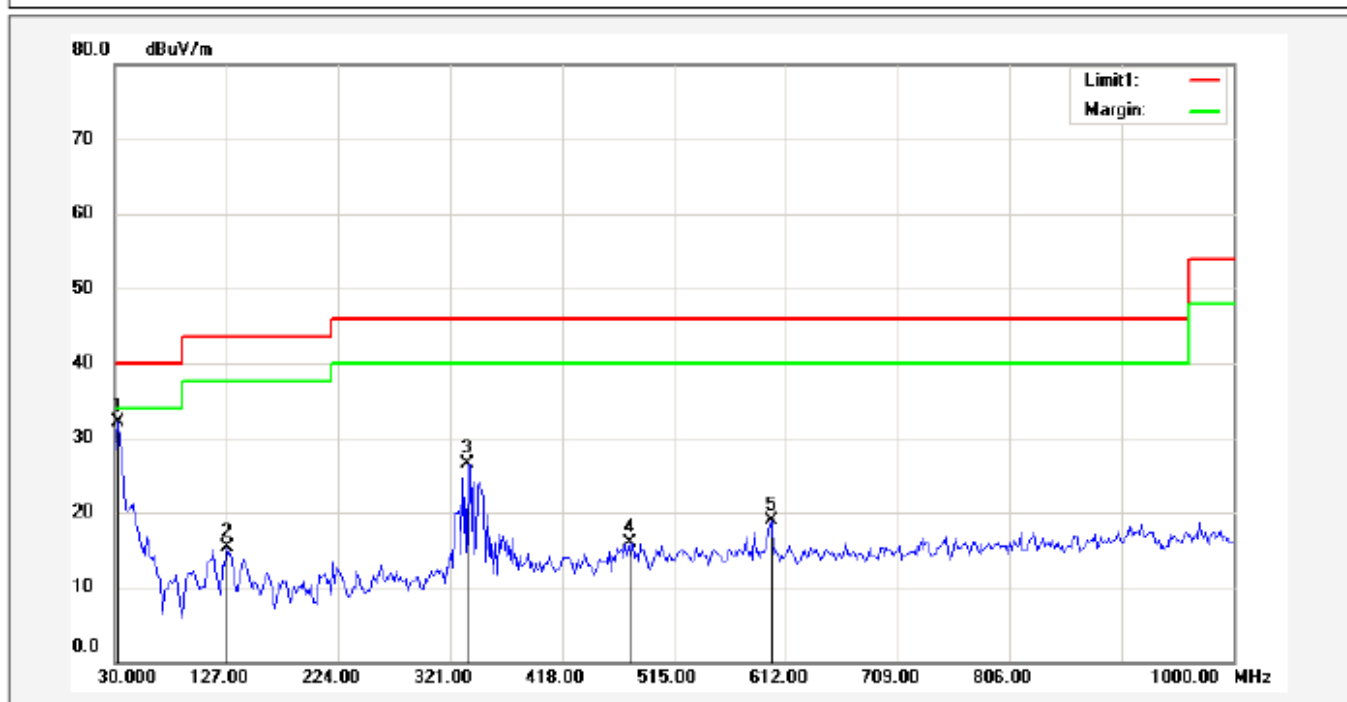


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.2333	45.79	-13.64	32.15	40.00	-7.85	---	---	peak
2	127.0000	36.22	-20.87	15.35	43.50	-28.15	---	---	peak
3	335.5500	44.72	-18.26	26.46	46.00	-19.54	---	---	peak
4	476.2000	30.43	-14.50	15.93	46.00	-30.07	---	---	peak
5	599.0667	31.80	-12.89	18.91	46.00	-27.09	---	---	peak

Job No.: 20150422	Probe : Vertical
Standard: FCC Part15 Class B (30-1000MHz)	Tested Distance: 3m
Test item: Radiation Test	Power Source: DC 3V
Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH	Date: 2015-4-22 Time: 17:19:54
Company:	EUT:
Model: PC7095ME	Test By : JIMMY
Test Mode: BT4.0 2402	

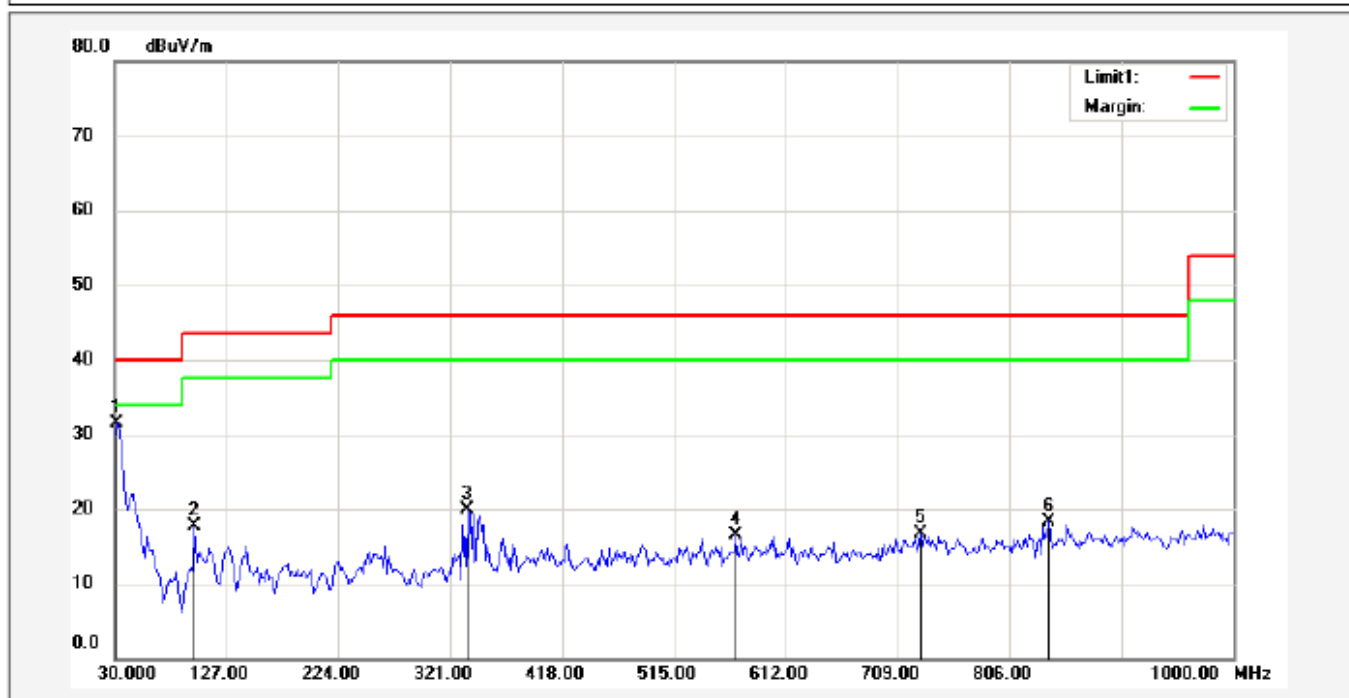


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	31.6167	44.12	-12.61	31.51	40.00	-8.49	---	---	peak
2	99.5167	41.46	-23.73	17.73	43.50	-25.77	---	---	peak
3	335.5500	38.17	-18.26	19.91	46.00	-26.09	---	---	peak
4	568.3500	29.64	-13.06	16.58	46.00	-29.42	---	---	peak
5	728.4000	28.31	-11.65	16.66	46.00	-29.34	---	---	peak
6	839.9500	28.99	-10.75	18.24	46.00	-27.76	---	---	peak

Job No.: 20150422	Probe : Horizontal
Standard: FCC Part15 Class B (30-1000MHz)	Tested Distance: 3m
Test item: Radiation Test	Power Source: DC 3V
Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH	Date: 2015-4-22 Time: 17:22:51
Company:	EUT:
Model: PC7095ME	Test By : JIMMY
Test Mode: BT4.0 2440	

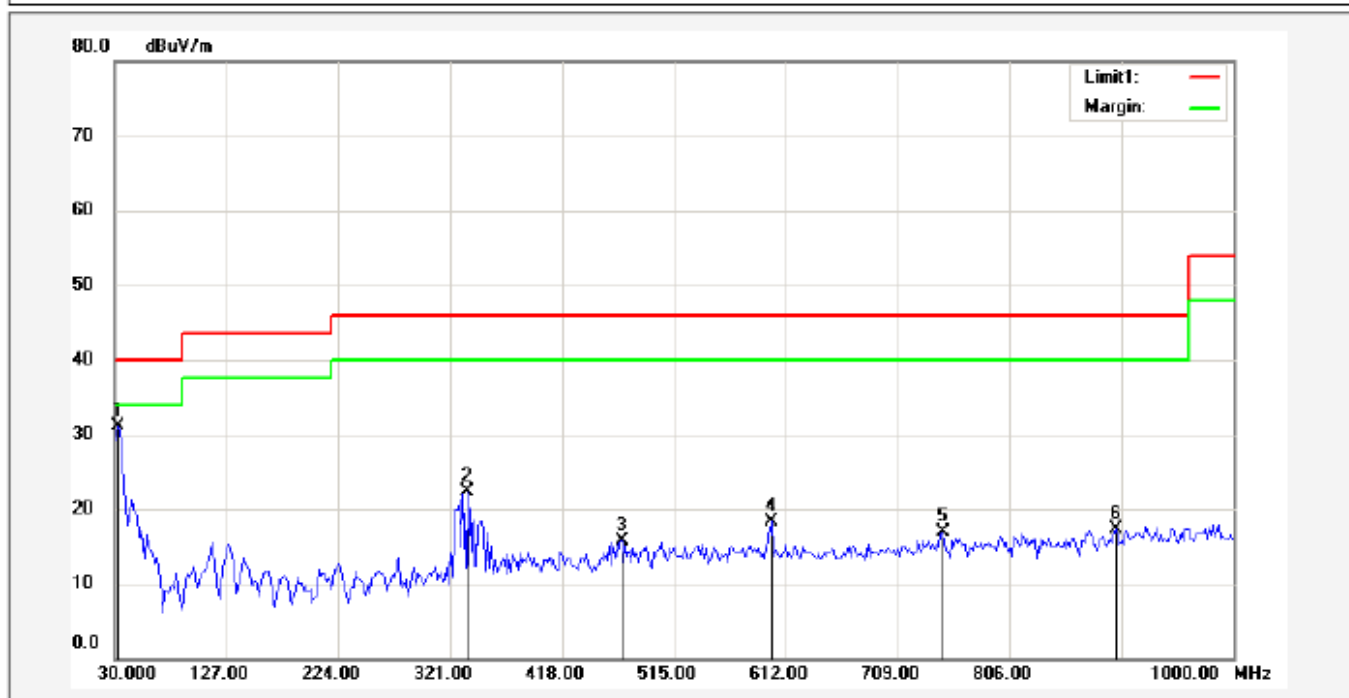


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.2333	44.66	-13.64	31.02	40.00	-8.98	---	---	peak
2	335.5500	40.56	-18.26	22.30	46.00	-23.70	---	---	peak
3	469.7333	30.44	-14.73	15.71	46.00	-30.29	---	---	peak
4	599.0667	31.14	-12.89	18.25	46.00	-27.75	---	---	peak
5	747.8000	28.07	-11.23	16.84	46.00	-29.16	---	---	peak
6	898.1500	27.14	-9.84	17.30	46.00	-28.70	---	---	peak

Job No.: 20150422	Probe : Vertical
Standard: FCC Part15 Class B (30-1000MHz)	Tested Distance: 3m
Test item: Radiation Test	Power Source: DC 3V
Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH	Date: 2015-4-22 Time: 17:23:51
Company:	EUT:
Model: PC7095ME	Test By : JIMMY
Test Mode: BT4.0 2440	

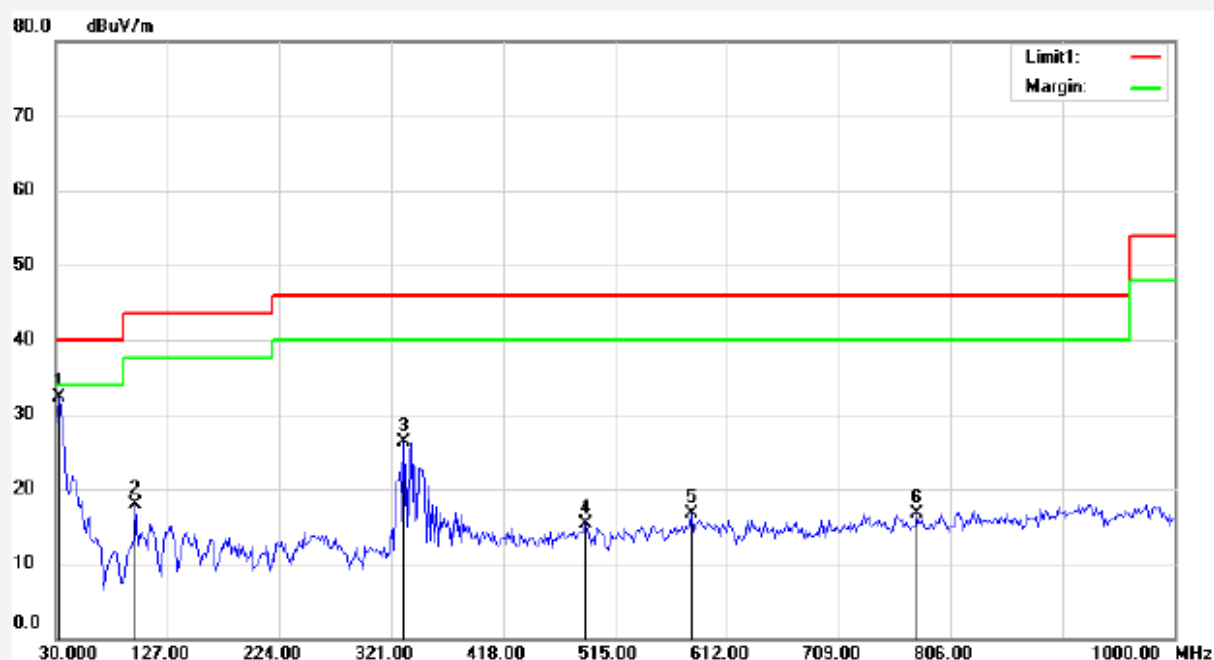


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.2333	45.94	-13.64	32.30	40.00	-7.70	---	---	peak
2	99.5167	41.58	-23.73	17.85	43.50	-25.65	---	---	peak
3	332.3167	44.65	-18.34	26.31	46.00	-19.69	---	---	peak
4	489.1333	29.68	-14.36	15.32	46.00	-30.68	---	---	peak
5	581.2833	29.72	-13.10	16.62	46.00	-29.38	---	---	peak
6	776.9000	27.85	-11.19	16.66	46.00	-29.34	---	---	peak

Job No.: 20150422	Probe : Horizontal
Standard: FCC Part15 Class B (30-1000MHz)	Tested Distance: 3m
Test item: Radiation Test	Power Source: DC 3V
Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH	Date: 2015-4-22 Time: 17:25:52
Company:	EUT:
Model: PC7095ME	Test By : JIMMY
Test Mode: BT4.0 2480	

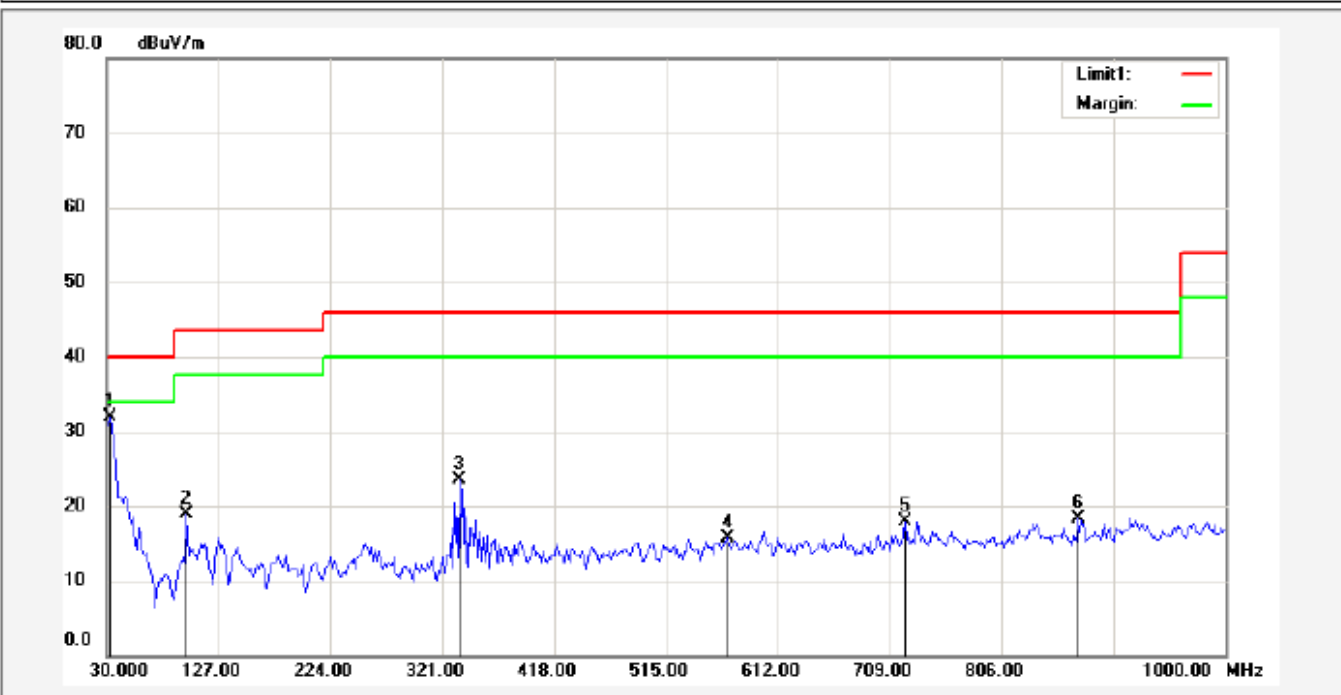

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.2333	45.54	-13.64	31.90	40.00	-8.10	---	---	peak
2	99.5167	42.55	-23.73	18.82	43.50	-24.68	---	---	peak
3	335.5500	41.76	-18.26	23.50	46.00	-22.50	---	---	peak
4	568.3500	28.77	-13.06	15.71	46.00	-30.29	---	---	peak
5	721.9333	29.77	-11.81	17.96	46.00	-28.04	---	---	peak
6	872.2833	28.56	-10.22	18.34	46.00	-27.66	---	---	peak

Job No.: 20150422	Probe : Vertical
Standard: FCC Part15 Class B (30-1000MHz)	Tested Distance: 3m
Test item: Radiation Test	Power Source: DC 3V
Temp.(C)/Hum.(%RH): 24 (C) / 52 %RH	Date: 2015-4-22 Time: 17:24:46
Company:	EUT:
Model: PC7095ME	Test By : JIMMY
Test Mode: BT4.0 2480	

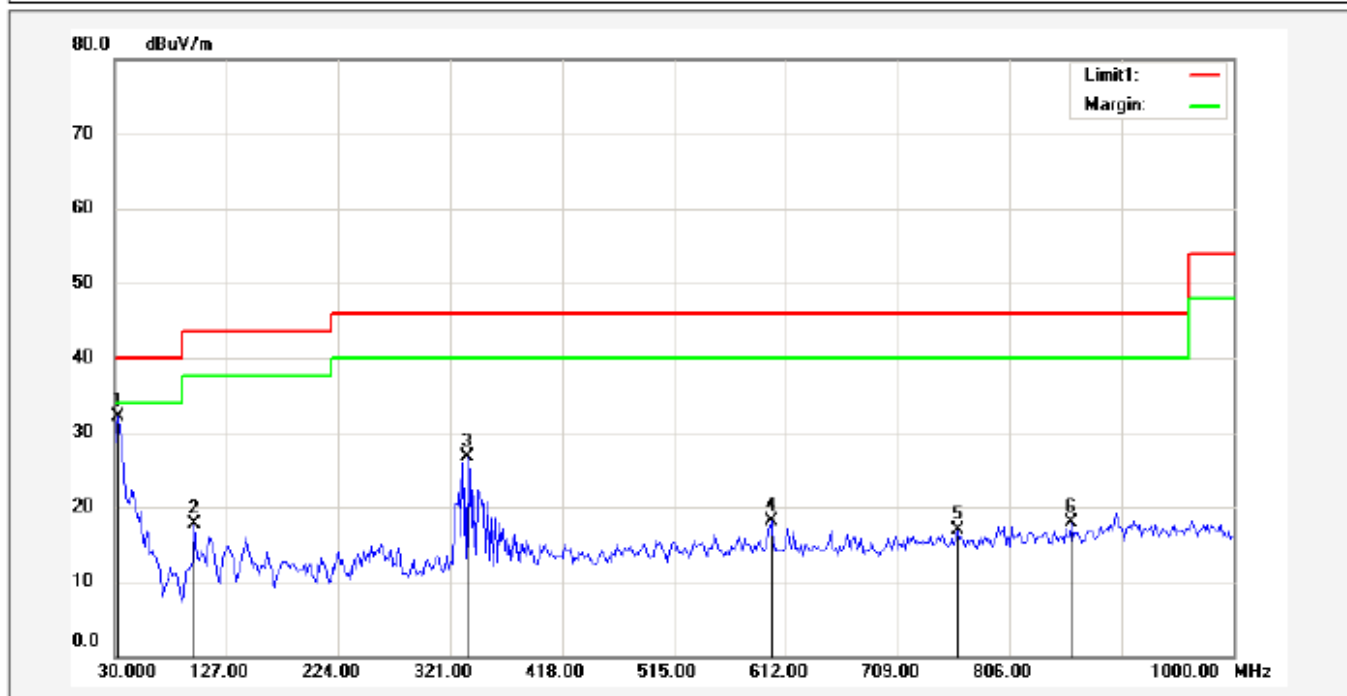

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.2333	45.81	-13.64	32.17	40.00	-7.83	---	---	peak
2	99.5167	41.48	-23.73	17.75	43.50	-25.75	---	---	peak
3	335.5500	44.96	-18.26	26.70	46.00	-19.30	---	---	peak
4	599.0667	30.90	-12.89	18.01	46.00	-27.99	---	---	peak
5	760.7333	27.99	-11.04	16.95	46.00	-29.05	---	---	peak
6	859.3500	28.49	-10.63	17.86	46.00	-28.14	---	---	peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Result -Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2402 MHz)							
4804	43.69	10.44	54.13	74	-19.87	Pk	Horizontal
4804	32.16	10.44	42.6	54	-11.4	AV	Horizontal
7206	41.38	12.39	53.77	74	-20.23	pk	Horizontal
7206	31.29	12.39	43.68	54	-10.32	AV	Horizontal
4804	41.64	10.4	52.04	74	-21.96	Pk	Vertical
4804	29.83	10.4	40.23	54	-13.77	AV	Vertical
7206	31.46	12.75	44.21	74	-29.79	Pk	Vertical
7206	25.59	12.75	38.34	54	-15.66	AV	Vertical
Mid Channel (2440 MHz)							
4880	43.61	10.4	54.01	74	-19.99	Pk	Horizontal
4880	32.53	10.4	42.93	54	-11.07	AV	Horizontal
7320	41.17	12.75	53.92	74	-20.08	Pk	Horizontal
7320	32.35	12.75	45.1	54	-8.9	AV	Horizontal
4880	45.29	10.39	55.68	74	-18.32	Pk	Vertical
4880	32.33	10.44	42.77	54	-11.23	AV	Vertical
7320	32.46	12.68	45.14	74	-28.86	Pk	Vertical
7320	32.73	12.68	45.41	54	-8.59	AV	Vertical
High Channel (2480 MHz)							
4960	36.66	10.39	47.05	74	-26.95	pk	Horizontal
4960	25.29	10.39	35.68	54	-18.32	AV	Horizontal
7440	42.17	12.68	54.85	74	-19.15	pk	Horizontal
7440	31.23	12.68	43.91	54	-10.09	AV	Horizontal
4960	36.41	10.39	46.8	74	-27.2	pk	Vertical
4960	34.83	10.39	45.22	54	-8.78	AV	Vertical
7440	44.27	12.68	56.95	74	-17.05	pk	Vertical
7440	25.38	12.68	38.06	54	-15.94	AV	Vertical

RESULT: PASS

Note: 1~25GHz scan with GFSK. No recording in the test report at least have 20dB margin.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission - Leve Limit

8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

1) Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

2) Conducted Emissions at the band edge

a) The transmitter output was connected to the spectrum analyzer


b) Set RBW=100kHz, VBW=300kHz

c) Suitable frequency span including 100kHz bandwidth from band edge

8.2. TEST SET-UP

Radiated same as 6.2

Conducted set up



8.3. Radiated Test Result

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2402 MHz)							
2399.9	78.62	-13	65.62	74	-8.38	peak	Horizontal
2399.9	59.19	-13	46.19	54	-7.81	AVG	Horizontal
2400	79.47	-12.99	66.48	74	-7.52	peak	Horizontal
2400	58.83	-12.99	45.84	54	-8.16	AVG	Horizontal
2399.9	79.29	-12.97	66.32	74	-7.68	peak	Vertical
2399.9	59.35	-12.97	46.38	54	-7.62	AVG	Vertical
2400	79.61	-12.94	66.67	74	-7.33	peak	Vertical
2400	59.72	-12.94	46.78	54	-7.22	AVG	Vertical
High Channel (2480 MHz)							
2483.5	78.27	-12.78	65.49	74	-8.51	peak	Horizontal
2483.5	58.39	-12.78	45.61	54	-8.39	AVG	Horizontal
2483.6	78.19	-12.77	65.42	74	-8.58	peak	Horizontal
2483.6	58.27	-12.77	45.5	54	-8.5	AVG	Horizontal
2483.5	79.29	-12.76	66.53	74	-7.47	peak	Vertical
2483.5	57.33	-12.76	44.57	54	-9.43	AVG	Vertical
2483.6	78.63	-12.72	65.91	74	-8.09	peak	Vertical
2483.6	58.48	-12.72	45.76	54	-8.24	AVG	Vertical

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain,

Emission Level = Meter Reading + Factor


Margin= Emission Level -Limit.

The "Factor" value can be calculated automatically by software of measurement system.

8.4. Conducted Test Result

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-7.4	-60.697	-27.4	PASS
BLE	HCH	-6.4	-60.618	-26.4	PASS

Test Graph

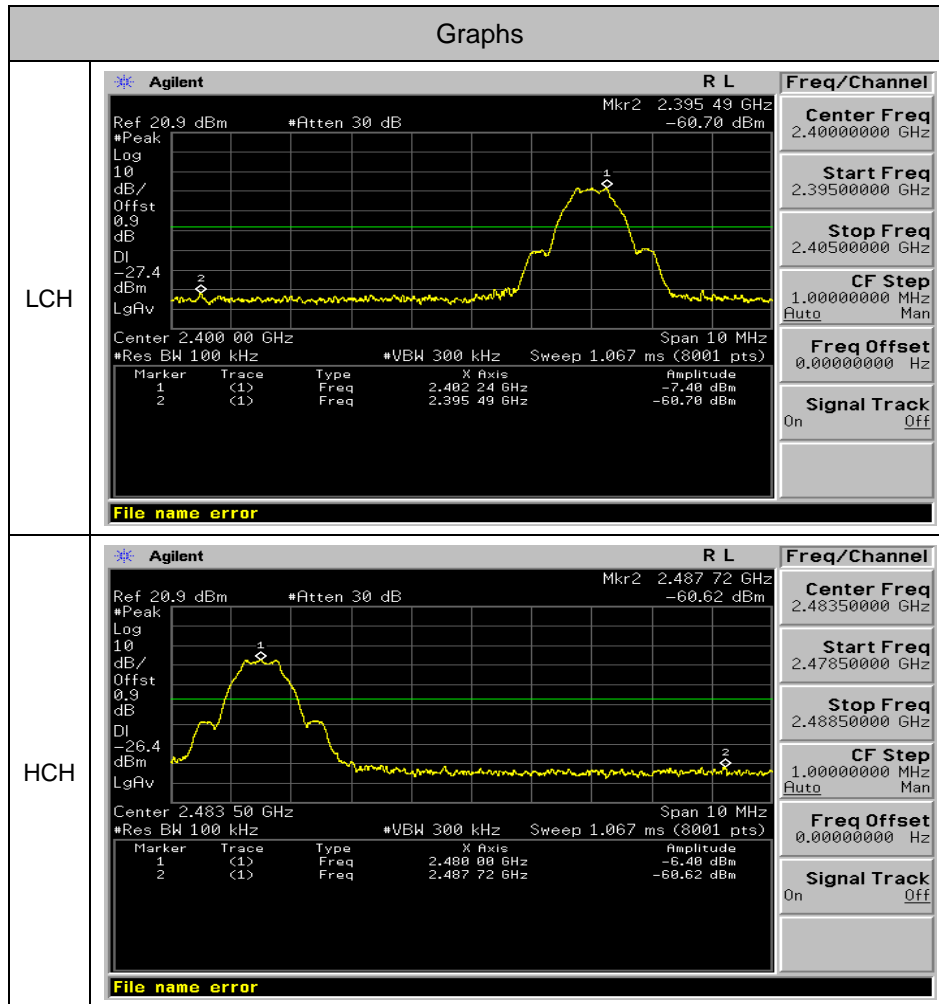

9. 6DB BANDWIDTH

9.1. TEST EQUIPMENT LIST AND DETAILS

Equipment	Manufacturer	Model	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	02/17/2014	02/16/2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015


9.2. TEST PROCEDURE


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW \geq RBW.
4. Set SPA Trace 1 Max hold, then View.

9.3. SUMMARY OF TEST RESULTS/PLOTS

Mode	Channel	6dB Bandwidth [MHz]	OBW[MHz]	Verdict
BLE	LCH	0.6985	1.0257	PASS
BLE	MCH	0.7002	1.0259	PASS
BLE	HCH	0.6897	1.0315	PASS

Test Graph

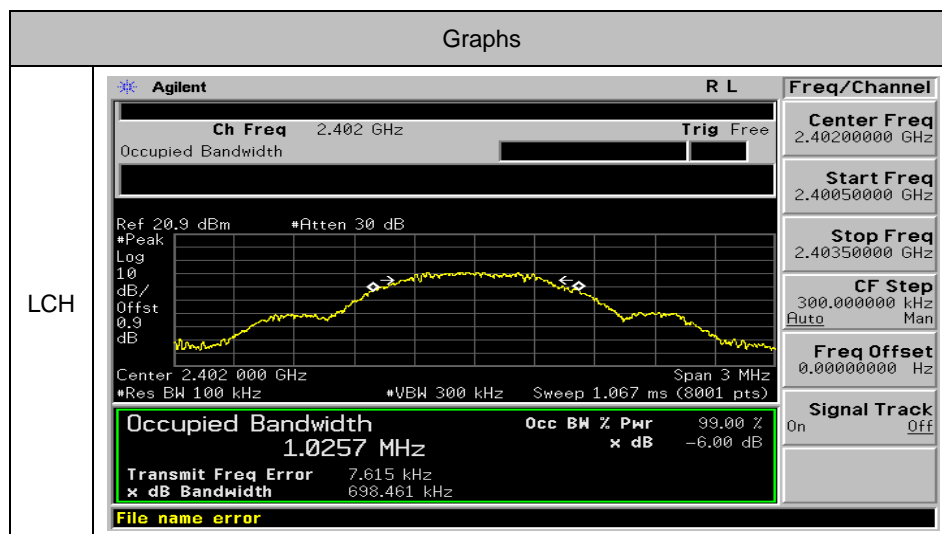

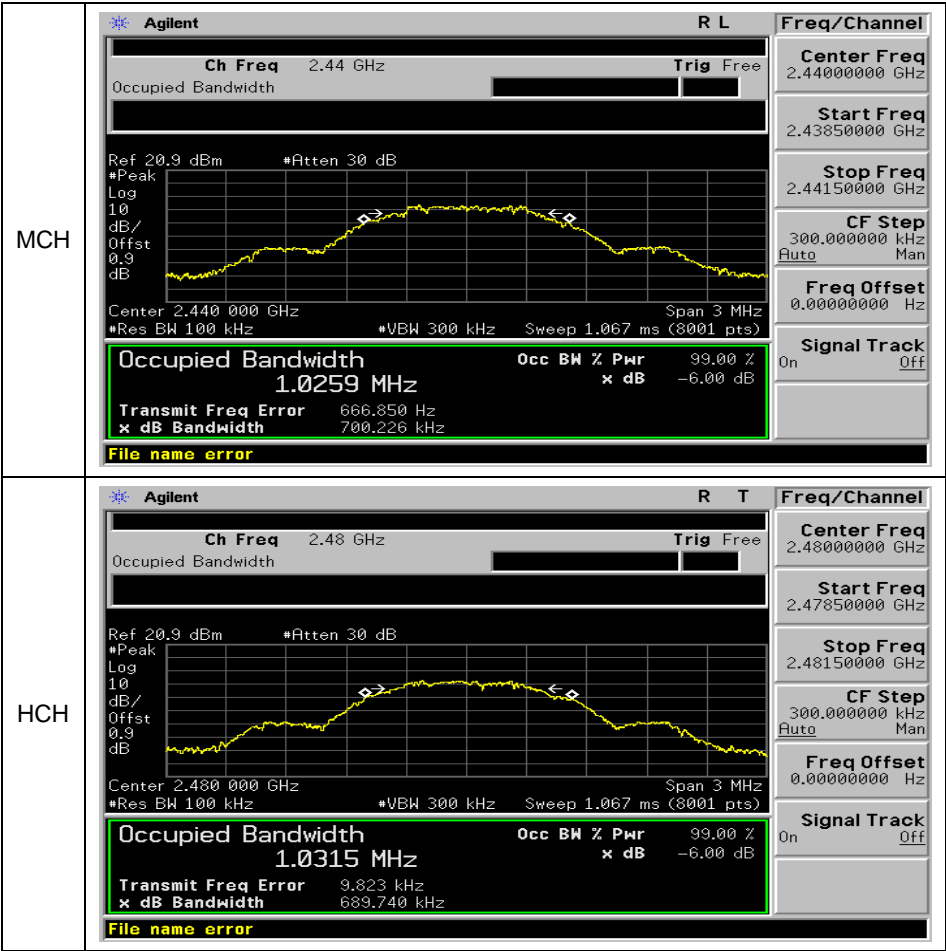


10. CONDUCTED OUTPUT POWER

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3. Use the following spectrum analyzer settings:
Set the RBW \geq DTS bandwidth
Set the VBW \geq 3 x RBW
Set the span \geq 3 x RBW
Detector = peak
Sweep time = auto couple
Trace mode = max hold
4. Allow the trace to stabilize. Use peak marker function to determine the peak amplitude level
5. Record the result form the Spectrum Analyzer.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

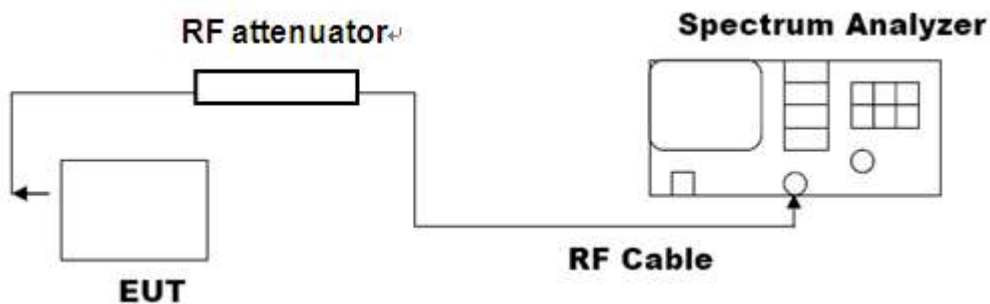


10.3. LIMITS AND MEASUREMENT RESULT

Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-7.00	20	Pass
Middle Channel	-6.06	20	Pass
High Channel	-6.64	20	Pass


The Low Channel Result

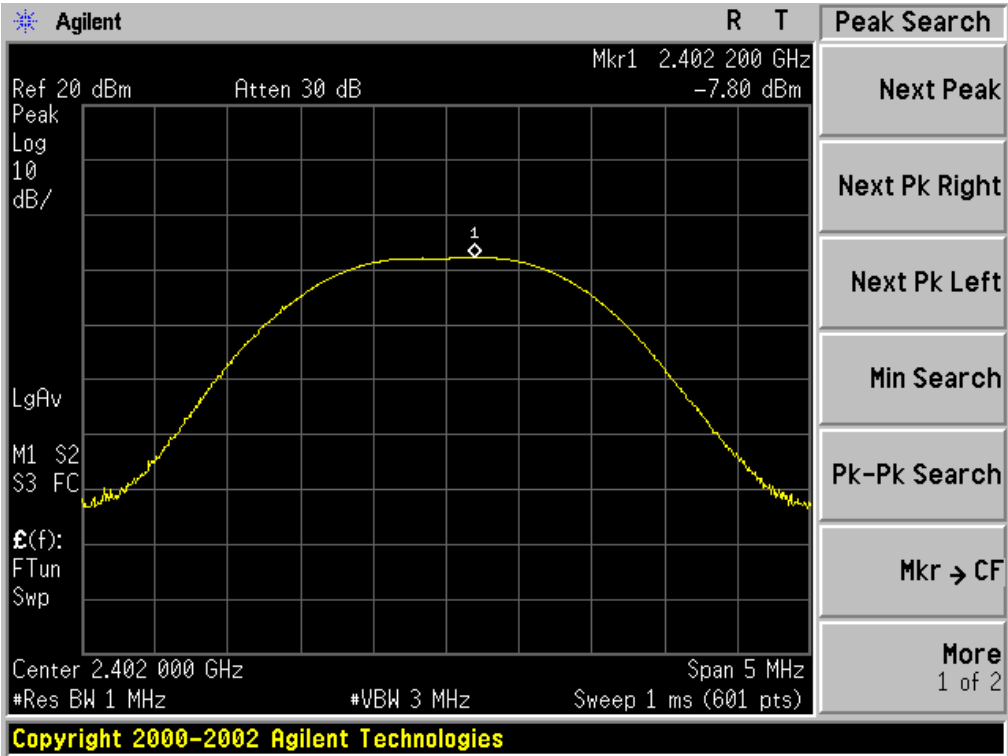

The Middle Channel Result

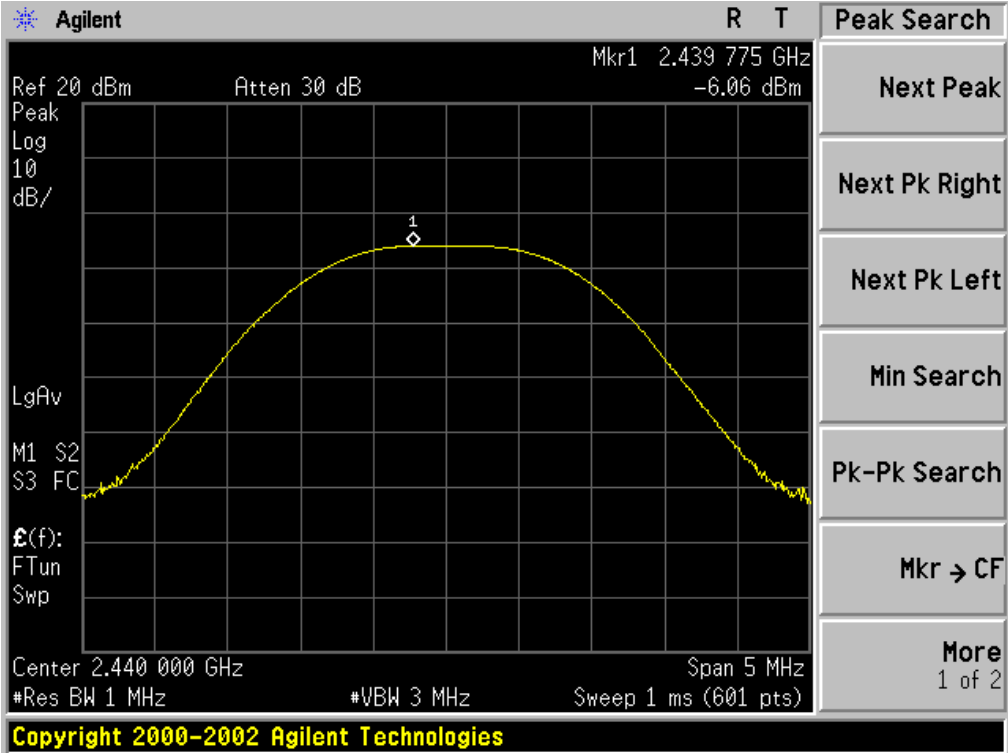

The High Channel Result

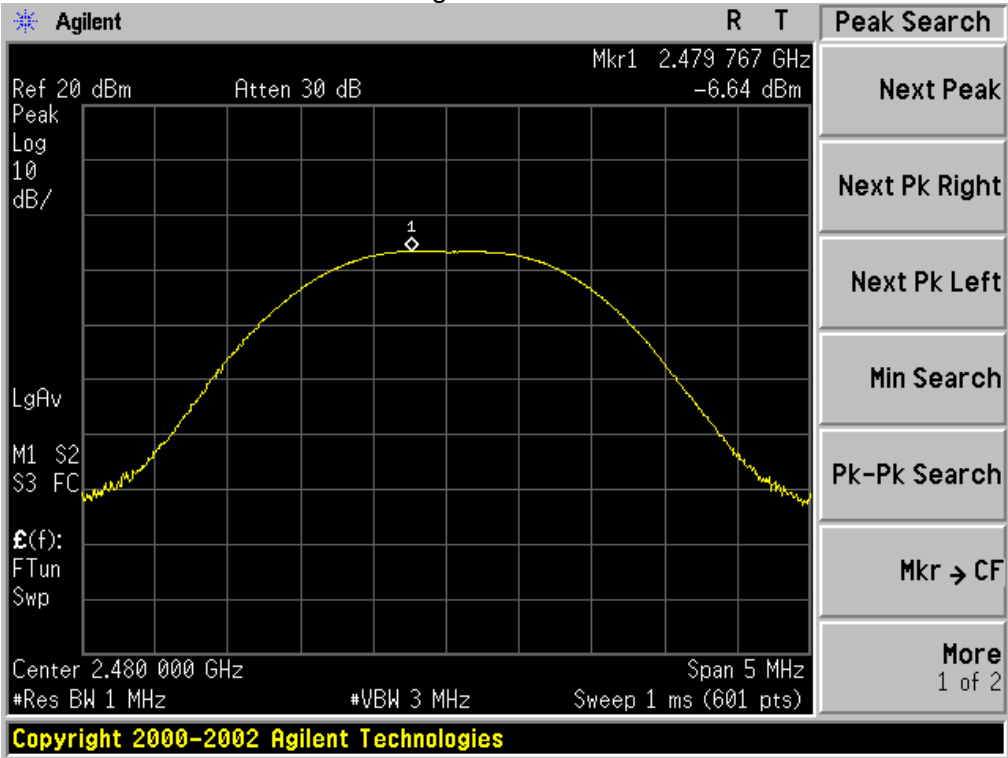


11. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

11.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

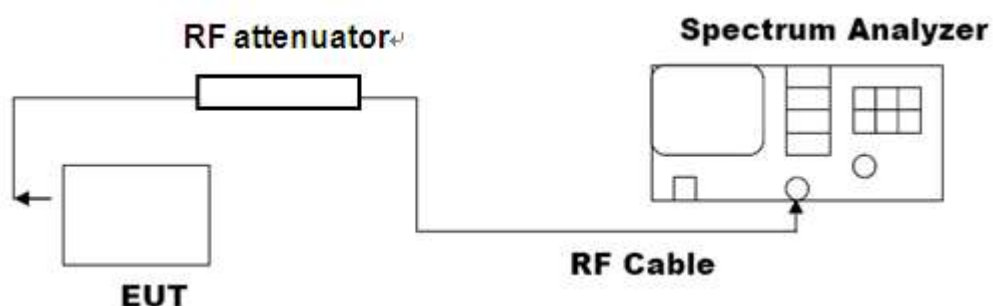


11.3 MEASUREMENT EQUIPMENT USED

Equipment	Manufacturer	Model	Cal. Date	Cal. Due
PSA SERIES SPECTRUM ANALYZER	AGILENT	E4440A	02/17/2014	02/16/2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015

11.4 LIMITS AND MEASUREMENT RESULT

Mode	Channel	PSD [dBm/10kHz]	Limit[dBm/3kHz]	Verdict
BLE	LCH	-16.81	8	PASS
BLE	MCH	-14.9	8	PASS
BLE	HCH	-15.81	8	PASS

Test Graph

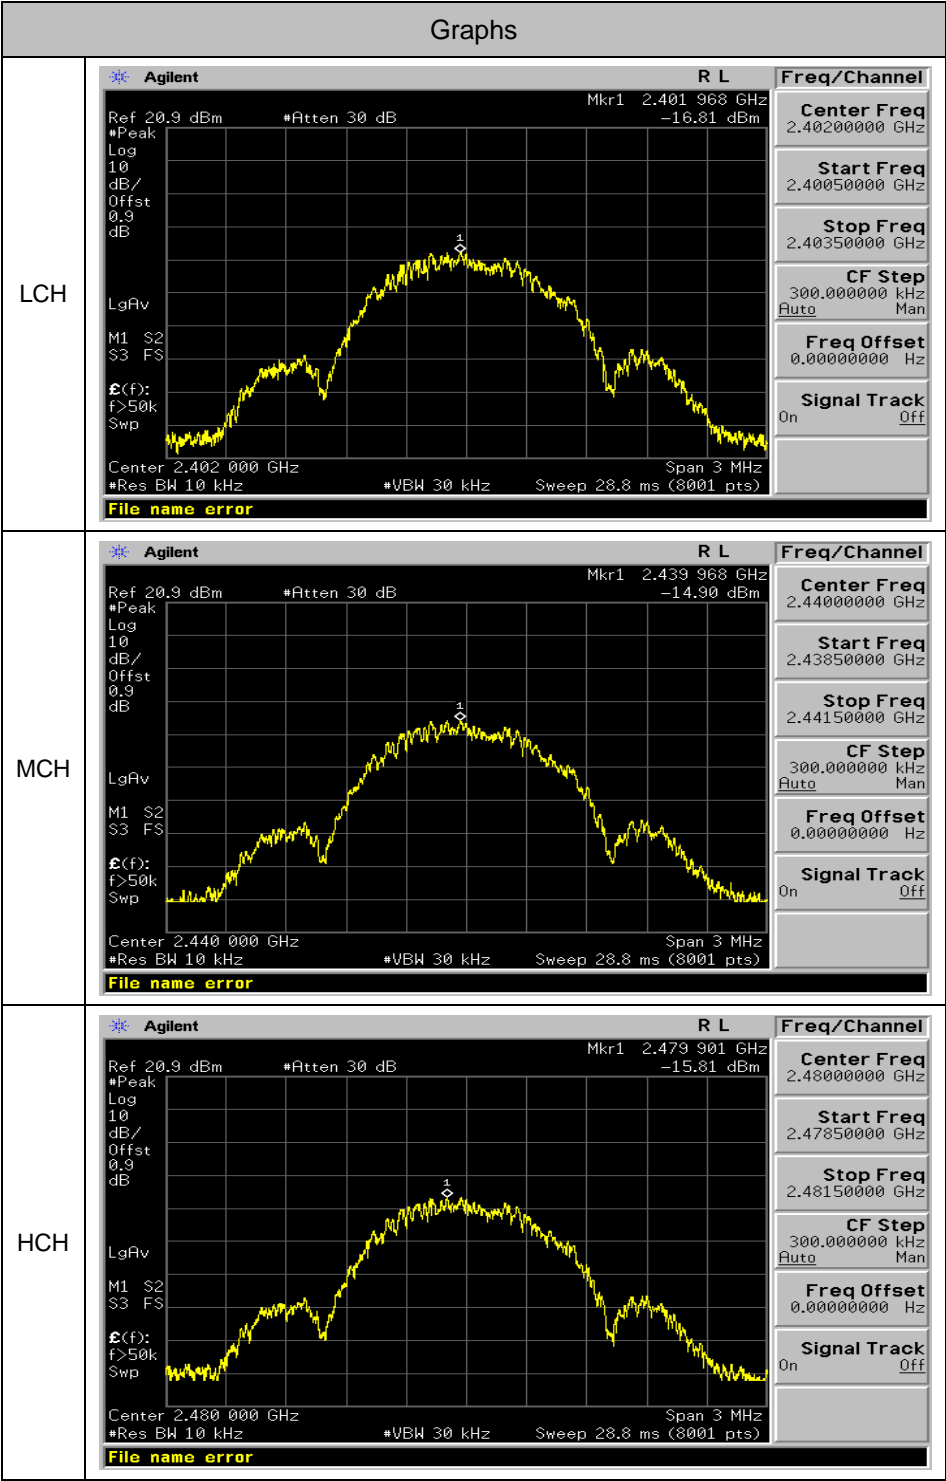


12. FCC LINE CONDUCTED EMISSION TEST

12.1 LIMITS

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

****Note:** 1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 TEST SETUP

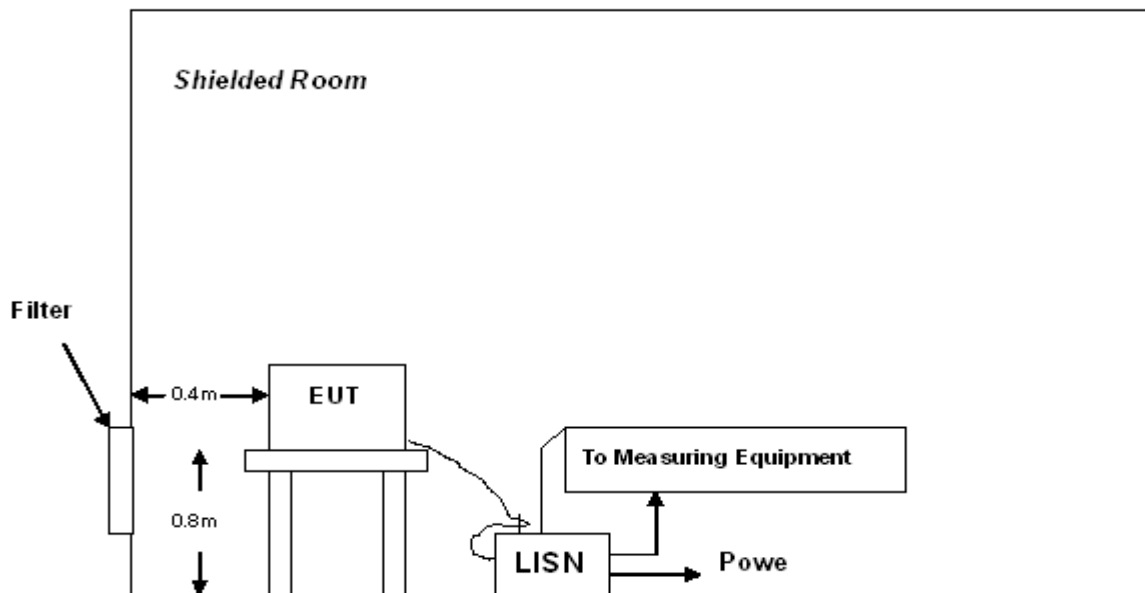

A: Powered through filter

12.3 PRELIMINARY PROCEDURE

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test.
Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4 FINAL TEST PROCEDURE

- 10) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 11) 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 12) 3) The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 TEST RESULT OF POWER LINE

Line Conducted Emission Test Line 1-L


Job No.:	20150422	Date:	2015-4-22
Company:		Time:	18:08:41
Standard:	FCC Class B Conduction(QP)	Temp.(C)/Hum.(%):	26(C) / 60 %
Test item:	Conduction Test	EUT:	
Line :	L1	Test Voltage	AC 120V/60Hz
Model:	PC7095ME	Test By :	
Description: Normal Operating(BT4.0)			

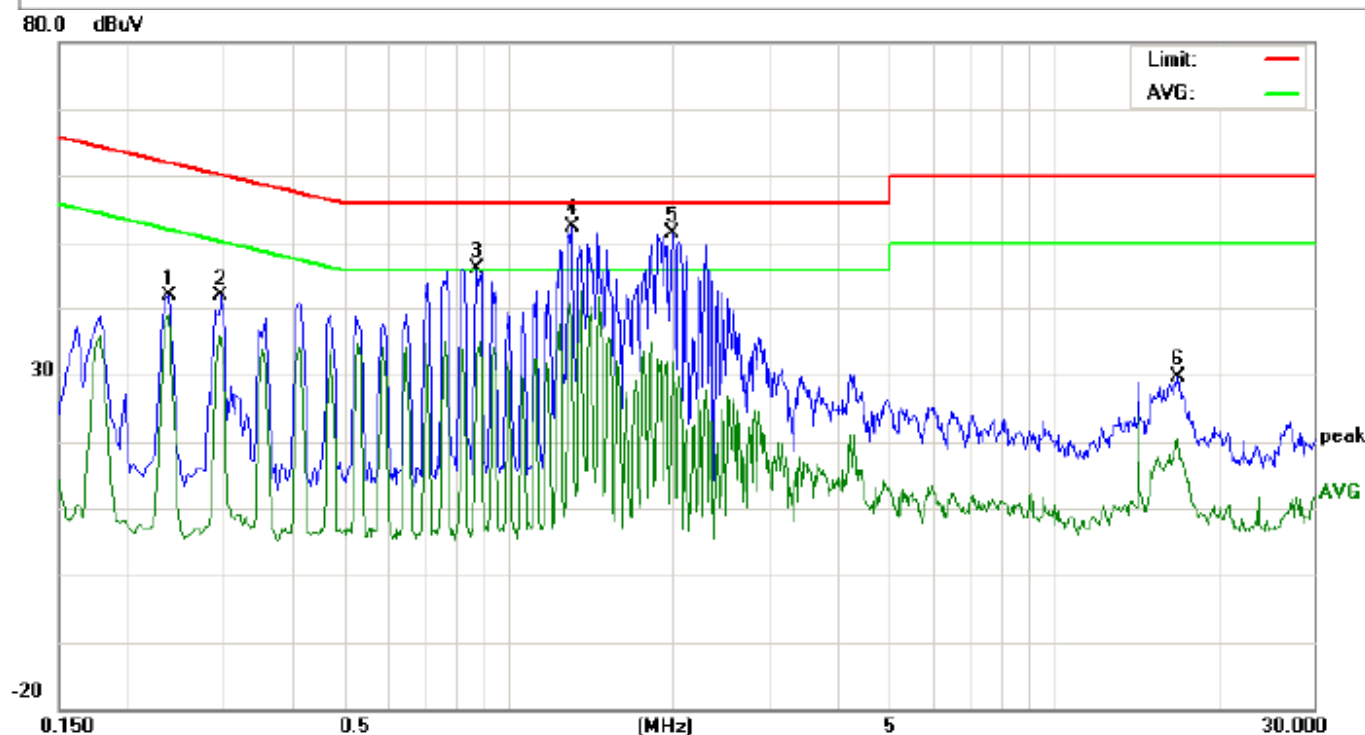

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2380	31.61		28.55	10.26	41.87		38.81	62.16	52.16	-20.29	-13.35	P	
2	0.2980	31.56		24.73	10.29	41.85		35.02	60.30	50.30	-18.45	-15.28	P	
3	0.8780	35.85		22.82	10.38	46.23		33.20	56.00	46.00	-9.77	-12.80	P	
4	1.3060	42.11		27.05	10.38	52.49		37.43	56.00	46.00	-3.51	-8.57	P	
5	1.9980	41.05		21.68	10.22	51.27		31.90	56.00	46.00	-4.73	-14.10	P	
6	16.8620	19.37		10.37	10.13	29.50		20.50	60.00	50.00	-30.50	-29.50	P	

Line Conducted Emission Test Line 1-N

Job No.:	20150422	Date:	2015-4-22
Company:		Time:	18:06:36
Standard:	FCC Class B Conduction(QP)	Temp.(C)/Hum.(%):	26(C) / 60 %
Test item:	Conduction Test	EUT:	
Line :	N	Test Voltage	AC 120V/60Hz
Model:	PC7095ME	Test By :	
Description: Normal Operating(BT4.0)			

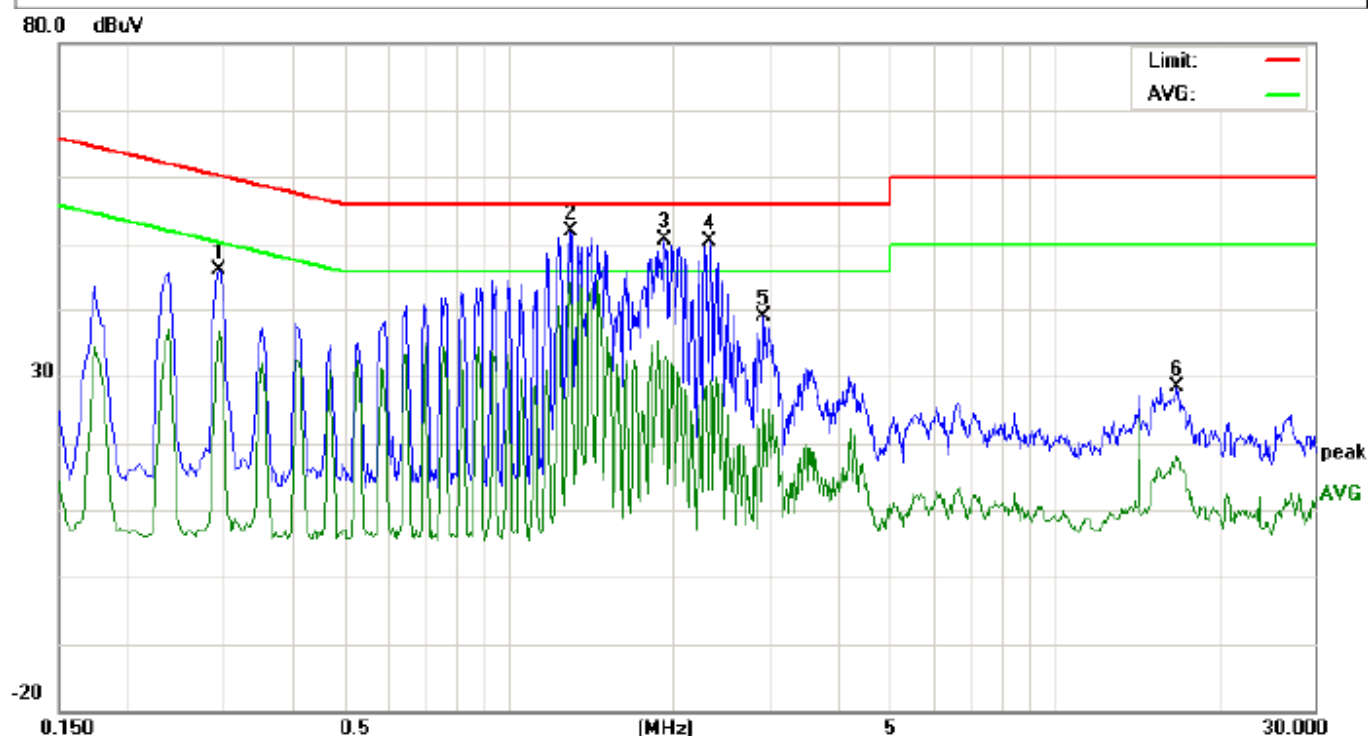

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2940	35.92		26.36	10.29	46.21		36.65	60.41	50.41	-14.20	-13.76	P	
2	1.3020	41.62		33.94	10.38	52.00		44.32	56.00	46.00	-4.00	-1.68	P	
3	1.9380	40.43		21.90	10.24	50.67		32.14	56.00	46.00	-5.33	-13.86	P	
4	2.3420	39.90		18.93	10.36	50.26		29.29	56.00	46.00	-5.74	-16.71	P	
5	2.9420	28.38		14.67	10.54	38.92		25.21	56.00	46.00	-17.08	-20.79	P	
6	16.7500	18.35		8.04	10.12	28.47		18.16	60.00	50.00	-31.53	-31.84	P	

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT




LEFT VIEW OF EUT



RIGHT VIEW OF EUT

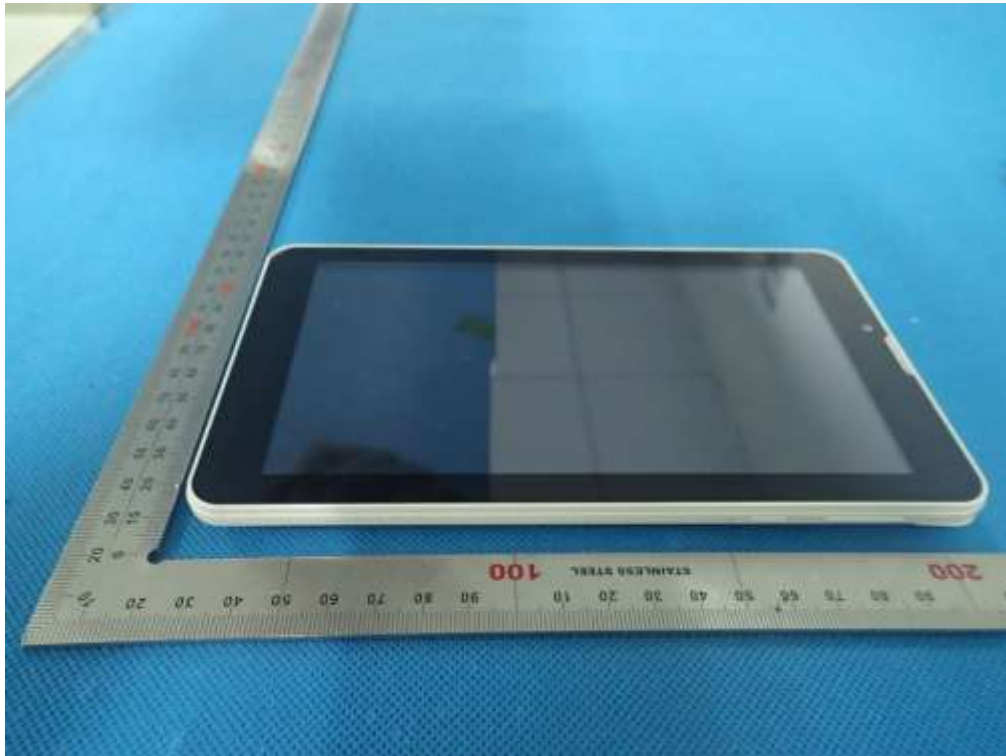

OPEN VIEW OF EUT-1

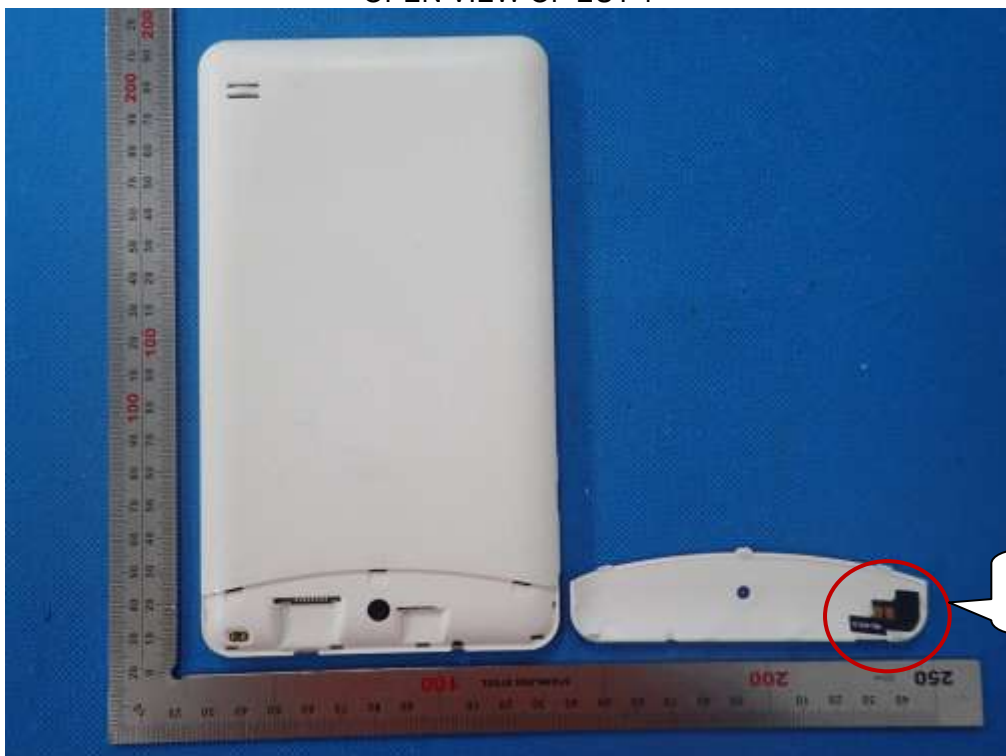

OPEN VIEW OF EUT-2



GSM&WCDMA
Antenna

OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1



INTERNAL VIEW OF EUT-2



-----END OF REPORT-----