



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test Report No. : E058R-062

Applicant : KTV GLOBAL CORPORATION

Address : 149, Gongdan 1-Dong, Gumi-City, Kyungbuk, 730-031, Korea

Manufacturer : KTV GLOBAL CORPORATION

Address : 149, Gongdan 1-Dong, Gumi-City, Kyungbuk, 730-031, Korea

Type of Equipment : 17" LCD CCTV MONITOR

FCC ID : BRFLCM17AA

Model Name : LCM17AA

Multiple Model Name : STM-17LV

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : June 15, 2005

Date of Issuing : August 25, 2005


SUMMARY

The equipment complies with the regulation; **PART 15 SUBPART B, Class B Computing Device Peripherals.**


This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production

Prepared by:


Seung-Hyun, Nam / Project Engineer
EMC Div.
ONETECH Corp.

Reviewed by:


Gea-Won, Lee / Chief Engineer
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	8
4. PRELIMINARY TEST	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT	9
5.1 CONDUCTED EMISSION TEST.....	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT.....	13

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : KTV GLOBAL CORPORATION
ADDRESS : 149, Gongdan 1-Dong, Gumi-City, Kyungbuk, 730-031, Korea
CONTACT PERSON : Mr. Eui-Yeun, Kim / Team Leader
TELEPHONE NO : +82-54-467-3551
FCC ID : BRFLCM17AA
MODEL NO/NAME : LCM17AA
SERIAL NUMBER : N/A
DATE : August 25, 2005

EQUIPMENT CLASS	JBP - Peripheral Device for Class B Computing Device
E.U.T. DESCRIPTION	17" LCD CCTV MONITOR
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	PART 15 SUBPART B, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The KTV GLOBAL CORPORATION, Model LCM17AA (referred to as the EUT in this report) is a 17" LCD CCTV MONITOR. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	24 MHz, 14.31818 MHz and 27 MHz on the Main Board
NUMBER OF LAYERS	4 Layers: Main Board, 1 Layer: Control Board
ELECTRICAL RATING	Input : AC100-240V, 50/60Hz, 1.2A, Output : DC 12V, 4.0A (AC/DC Adaptor)
EXTERNAL TERMINALS	BNC Jack, RCA Jack, Mini DIN Jack, D-Sub 15 Pins, DVI-D Jack

2.2 Model Differences

The difference(s) compared to the EUT is as follows:

	Model	Model Differences
Basic Model	LCM17AA	-
Multiple Model	STM-17LV	Only type designation and brand name according to the buyer's request.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
LCM17AA	KTV GLOBAL CORPORATION	BRFLCM17AA	17" LCD CCTV MONITOR (EUT)	PC
0217B1248	Li Shin International Enterprise	N/A	AC/DC Adaptor (Inside of the EUT)	EUT
DHP	Dell Computer Corp	DoC	PC	-
3701	Goodnicetech	N/A	Keyboard	PC
P801	N/A	N/A	Mouse	PC
SAC-410ND	Samsung Aerospace	N/A	CCD Camera	EUT
2225C	HP	DSI6XU2225	Printer	PC
020-0470	Cardinal	GDE0196	Modem	PC
SAM-14M	Samsung	N/A	CCTV Monitor	EUT

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51, Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	KTV	PLAM12	N/A
Inverter Board	P.I.S Corp.	AT-0170SS (BIT)	N/A
LCD Panel	Samsung	LTM170EU-L21	N/A
Front Board	KTV	PLAC03	N/A

3.2 EUT exercise Software

The following two modes were operated during compliance testing, but worst emissions were recorded in this report.

- 1) The windows program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. This program was included into HOST. Once loaded, this program sequentially exercises each system component in turn. The sequence used is: (1) series of "H" characters are printed on the monitor until the screen is completely full, (2) copy series of "H" characters to mass storage device (if one is used). The complete cycle is repeated continuously.

The test was performed about each resolution from minimum resolution to maximum resolution for getting maximum noise level and the investigated maximum resolution mode of the EUT was 1280 x 1024, 75Hz.

- 2) The EUT was operated with CCTV monitor mode during the test.



3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
17" LCD CCTV MONITOR	N	Y	1.5(P), 1.5(D)
PC	N	-	1.5(P)
Keyboard	N/A	N	1.5(D)
Mouse	N/A	N	1.5(D)
CCD Camera	N	N	1.5(P), 1.5(D)
Printer	N	Y	1.5(P), 1.5(D)
Modem	N	Y	1.5(P), 1.5(D)
CCTV Monitor	N	Y	1.5(P), 1.5(D)

* The marked "(P)" means the Power Cable and "(D)" means Signal Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
17" LCD CCTV MONITOR	Y	BOTH END	Y	BOTH END
PC	-	-	-	-
Keyboard	N	N/A	Y	PC END
Mouse	N	N/A	Y	PC END
CCD Camera	Y	CCD Camera END	Y	BOTH END
Printer	N	N/A	Y	BOTH END
Modem	N	N/A	Y	BOTH END
CCTV Monitor	N	N/A	Y	BOTH END

3.5 Equipment Modifications

-. None

3.6 Configuration of Test System

Line Conducted Test: The power of the EUT was supplied by AC/DC adapter and the adapter was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
CCTV Monitor Mode	-
Peripheral device mode for Class B computing device (Resolution: 1280 x 1024)	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
CCTV Monitor Mode	-
Peripheral device mode for Class B computing device (Resolution: 1280 x 1024)	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 41 % Temperature: 21 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107(a)
Type of Test : CLASS B
Result : PASSED BY -16.06 dB at 0.18 MHz under peak mode

EUT : 17" LCD CCTV MONITOR Date: June 15, 2005
Operating Condition : Continuously displayed "H" characters on the screen of the EUT
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)
Resolution : 1280 x 1024, 75Hz

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.18	H	48.66	64.72	-16.06
0.23	H	44.14	62.45	-18.31
4.99	H	39.50	56.00	-16.50
5.02	N	43.12	60.00	-16.88
8.68	N	41.81	60.00	-18.19
25.99	H	41.11	60.00	-18.89
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.18	H	38.38	54.72	-16.34
4.99	H	22.92	46.00	-23.08
5.02	N	27.43	50.00	-22.57
8.68	N	28.08	50.00	-21.92

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak and average detector.


Tested by: In-Sub, Youn / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.


EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

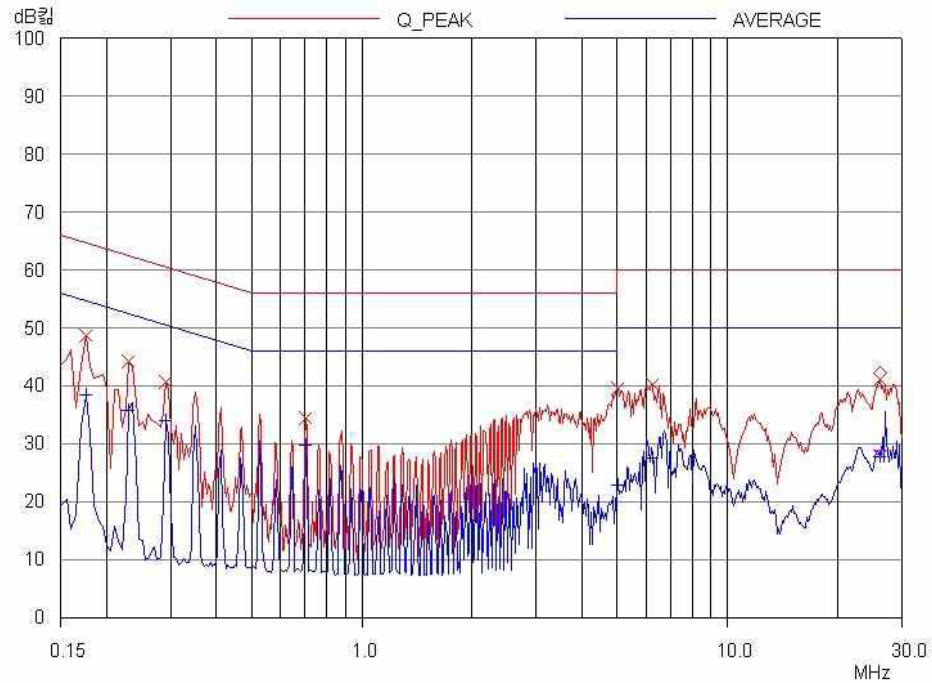

HOT LINE

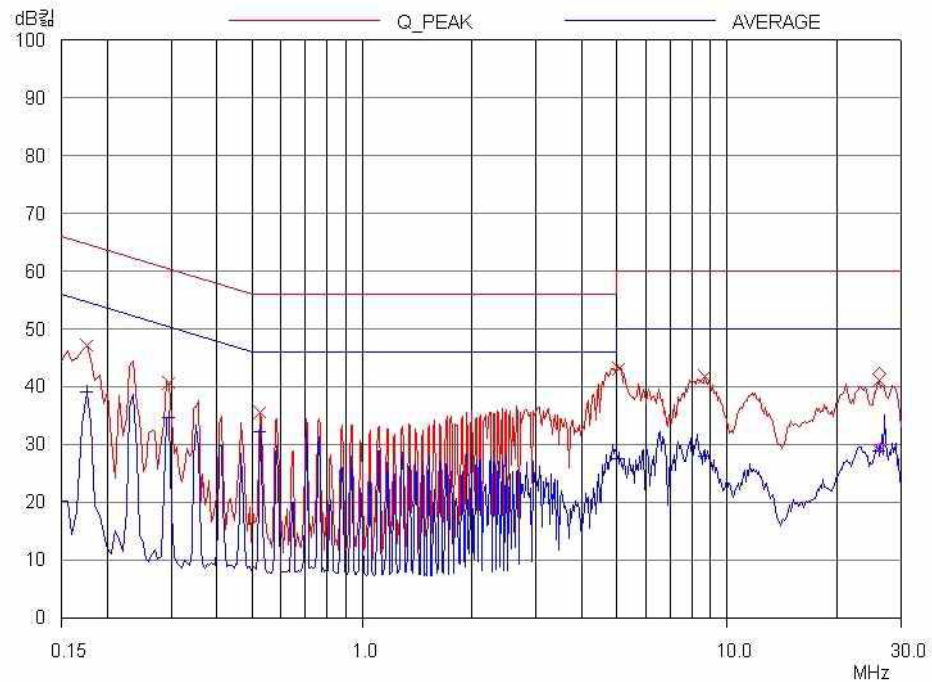

NEUTRAL LINE



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 40 % Temperature: 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109(a)
Type of Test : CLASS B
Result : PASSED BY -4.26dB at 463.60MHz

EUT : 17" LCD CCTV MONITOR Date: July 26, 2005

Operating Condition : Continuously displayed "H" characters on the screen of the EUT

Frequency range : 30MHz – 1000MHz

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Distance : 3 Meter

Resolution : 1280 x 1024, 75Hz

Radiated Emission		Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
63.20	21.30	V	6.82	1.46	29.58	40.00	-10.42
120.10	15.40	V	12.97	2.00	30.37	43.52	-13.15
180.20	15.10	V	15.97	2.80	33.87	43.52	-9.65
256.36	19.80	H	17.17	3.43	40.40	46.02	-5.62
463.60	20.10	V	16.89	4.77	41.76	46.02	-4.26
538.20	17.70	H	18.17	5.35	41.22	46.02	-4.80
697.20	13.20	H	20.47	6.36	40.03	46.02	-5.99
721.30	13.90	H	20.85	6.61	41.36	46.02	-4.66
927.70	11.20	V	22.73	7.71	41.64	46.02	-4.38

Tested by: In-Sub, Youn / Test Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/05	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/05	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	APR/05	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/05	12MONTH	■
6.	Quasi-Peak Adapter	HP	8574B	2811A01432	APR/05	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	APR/05	12MONTH	
8.	Biconical antenna	EMCO	3110	9003-1121	FEB/05	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/05		■
9.	Log Periodic antenna	EMCO	3146	9001-2614	FEB/05	12MONTH	
		Schwarzbeck	9108-A(494)	62281001	FEB/05		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	
				9109-1869	JUL/05		■
		Schwarzbeck	NSLK 8128	8128-216	JUN/05		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■