



## ***FCC EVALUATION REPORT FOR CERTIFICATION***

**Manufacturer : KTV Global Corp.**

**357-55 Hosan-Dong, Dalseo-Gu, Daegu-Si, Korea.**

**Attn : Eui-Yeun Kim / Manager**

**Date of Issue : February 22, 2007**

**Test Report S/N : GETEC-E3-07-010**

**Test Site : Gumi College EMC Center**

**FCC ID**

**BRFRNW3000**

**APPLICANT**

**KTV Global Corp.**

**Rule Part(s) : FCC Part 15 Subpart C**  
**Equipment Class : Remote Control Transmitter (DSC)**  
**EUT Type : RF Remote Controller**  
**Frequency Range : 417.5~418.5 MHz**  
**Brand Name : KTV**  
**Model No. : RNW-3000**

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Tested by,**

**Reviewed by,**

**Jae-Hoon Jeong, Senior Engineer**  
**GUMI College EMC center**

**Tae-Sig Park, Technical Manager**  
**GUMI College EMC center**

## CONTENTS

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION .....</b>                  | <b>4</b>  |
| <b>2. INTRODUCTION .....</b>                         | <b>5</b>  |
| <b>3. TEST CONDITIONS &amp; EUT INFORMATION.....</b> | <b>6</b>  |
| 3.1 DESCRIPTION OF EUT.....                          | 6         |
| 3.2 RF TRANSMITTING CONDITION (§15.231(A)(1)).....   | 6         |
| <b>4. ANTENNA REQUIREMENT-§15.203.....</b>           | <b>6</b>  |
| 4.1 DESCRIPTION OF ANTENNA.....                      | 6         |
| <b>5. DESCRIPTION OF TESTS.....</b>                  | <b>7</b>  |
| 5.1 RADIATED EMISSION.....                           | 7         |
| 5.2 CONDUCTED EMISSION.....                          | 8         |
| 5.3 DUTY CYCLE CORRECTION.....                       | 8         |
| 5.4 OCCUPIED BANDWIDTH.....                          | 8         |
| <b>6. DUTY CYCLE CORRECTION.....</b>                 | <b>9</b>  |
| 6.1 OPERATING ENVIRONMENT .....                      | 9         |
| 6.2 TEST SET-UP.....                                 | 9         |
| 6.3 TEST EQUIPMENT USED .....                        | 9         |
| 6.4 TEST RESULT OF DUTY CYCLE.....                   | 9         |
| <b>7. RADIATED EMISSION TEST .....</b>               | <b>10</b> |
| 7.1 OPERATING ENVIRONMENT .....                      | 10        |
| 7.2 TEST SET-UP.....                                 | 10        |
| 7.3 MEASUREMENT UNCERTAINTY .....                    | 10        |
| 7.4 LIMIT.....                                       | 11        |
| 7.5 TEST EQUIPMENT USED .....                        | 11        |
| 7.6 RADIATED EMISSION TEST DATA .....                | 12        |
| <b>8. OCCUPIED BANDWIDTH MEASUREMENT.....</b>        | <b>13</b> |
| 8.1 OPERATING ENVIRONMENT .....                      | 13        |
| 8.2 TEST SET-UP.....                                 | 13        |
| 8.3 LIMIT.....                                       | 13        |
| 8.4 TEST EQUIPMENT USED .....                        | 13        |
| 8.5 TEST RESULT OF OCCUPIED BANDWIDTH.....           | 13        |
| <b>9. RECOMMENDATION &amp; CONCLUSION.....</b>       | <b>14</b> |

**APPENDIX A – ATTESTATION STATEMENT**  
**APPENDIX B – TEST PLOTS**  
**APPENDIX C – FCC ID LABEL & LOCATION**  
**APPENDIX D – BLOCK DIAGRAM(S)**  
**APPENDIX E – SCHEMATIC DIAGRAM(S)**  
**APPENDIX F – TEST SET UP PHOTOS**  
**APPENDIX G – EXTERNAL PHOTOGRAPHS**  
**APPENDIX H – INTERNAL PHOTOGRAPHS**  
**APPENDIX I – USER’S MANUAL**  
**APPENDIX J – OPERATIONAL DESCRIPTION**

*Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

## 1. General Information

**Applicant: KTV Global Corp.**

**Applicant Address: 357-55, Hosan-Dong, Dalseo-Gu, Daegu- Si, Korea**

**Manufacturer: KTV Global Corp.**

**Manufacturer Address: 357-55, Hosan-Dong, Dalseo-Gu, Daegu- Si, Korea**

**Contact Person: Eui-Yeun Kim / Manager**

**Tel No.: +82-53-605-7071**

**Fax No.: +82-53-605-7080**

- **FCC ID** BRFRNW3000
- **Equipment Class** Remote Control Transmitter (DSC)
- **EUT Type** RF Remote Controller
- **Power Source** DC 3V (Lithium ion battery)
- **Model No.** RNW-3000
- **Rule Part(s)** FCC Part 15, Subpart C
- **Test Procedure(s)** ANSI C63.4 (2003)
- **Dates of Test** February 9, 2007
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETEC-E3-07-010

## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **KTV Global Corp. RF Remote Controller (Model No.: RNW-3000)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-Si, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992



Fig 1. The map above shows the Gumi College in vicinity area.

### 3. Test Conditions & EUT Information

#### 3.1 Description of EUT

The Equipment Under Test (EUT) is the **KTV Global Corp. RF Remote Controller (Model No.: RNW-3000)**

It can transmit pulse trains to TV Broadcast Receiver Model No.: LT201DHW

|                        |   |
|------------------------|---|
| <b>Frequency Range</b> | 417.5~418.5MHz                            |
| <b>Oscillator(s)</b>   | 418MHz                                    |
| <b>Power Supply</b>    | DC 3V (Lithium ion battery)               |
| <b>Antenna</b>         | Built-in internal looped antenna on-board |

#### 3.2 RF Transmitting Condition ( § 15.231(a)(1))

**Requirement:** A manual operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

**EUT condition:** After a manual switching, the EUT was deactivated automatically within 108ms

### 4. Antenna Requirement-§15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

#### 4.1 Description of Antenna

The KTV Global Corp. RF Remote Controller comply with the requirement of §15.203 with a built-in looped antenna permanently attached to the transmitter.

## 5. Description of tests

### 5.1 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using biconical antenna (R&S, HK116) and log-periodic antenna (R&S, HL223).

Above 1GHz, calibrated double ridged horn antennas(Schwarzbeck, BBHA 9120D) were used.

Final measurements were made outdoors at 3 m-test range using biconical antenna (R&S, HK116) , log-periodic antenna (R&S, HL223)and calibrated double ridged horn antennas(Schwarzbeck, BBHA 9120D).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. (ESI)

The detector function was set to peak mode, the bandwidth of the receiver was set to 120KHz and 1MHz.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission. Each EME reported was calibrated using the R/S signal generator

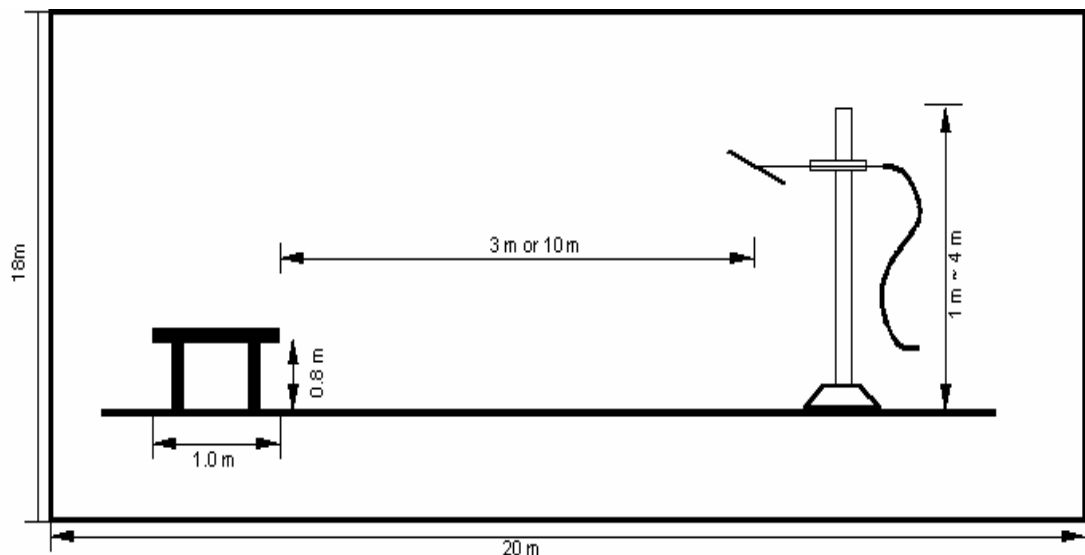


Fig 2. Dimensions of Open Site Test Area

## 5.2 Conducted Emission

This equipment is supplied DC power from the batteries. Therefore, no conducted limits apply for this equipment.

## 5.3 Duty Cycle Correction

Measurements may be adjusted where pulsed RF is utilized to find the average level associated with a quantity.

This calculation is applied to limits for pulsed licensed and unlicensed devices.

For unlicensed intentional radiator under 47CFR Part 15 §15.35, all duty cycle measurements are compared to a 100 millisecond period.

On time =  $N_1L_1 + N_2L_2 + \dots + N_nL_n$ , where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.

**Duty Cycle = On time/100 millisecond.**

## 5.4 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. For device operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. The bandwidth is determined at the points 20dB down from the modulated carrier.



## 6. Duty Cycle Correction

### 6.1 Operating environment

Temperature : -1 °C  
Relative humidity : 37 %

### 6.2 Test set-up

The spectrum analyzer was set to Zero span and the video triggered to collect the pulse train of the modulation. Calculations of the duty cycle correction factor were obtained from time data provided by the plots.

### 6.3 Test equipment used

| Model Number | Manufacturer    | Description          | Serial Number | Due to Calibration |
|--------------|-----------------|----------------------|---------------|--------------------|
| ■ - ESI      | Rohde & Schwarz | EMI test receiver    | 830482/010    | 12. 14. 2007       |
| ■ - HL223    | Rohde & Schwarz | Log-periodic antenna | 829228/011    | 11. 27. 2007       |

### 6.4 Test result of Duty Cycle

- Test Date : February 9, 2007  
- Reference standard : Part 15 Subpart C, Sec. 15.35  
- Operating condition : Continuous transmitter (Maximum pulse train)  
- Spectrum resolution bandwidth(3dB) : 100 kHz  
- Power Source : DC 3V (Lithium ion battery)

Define of duty cycle

- Number of Code groups per 100ms = 1  
- Number of Wide Pulse = 1  
- Width of Pulses = 9.00ms  
- Number of Narrow Pulse = 33  
- Width of Pulses = 0.560ms

Calculation of duty cycle

- Total width of pulse train :  $1 \times 9.00\text{ms} + 33 \times 0.560\text{ms} = 27.48\text{ms}$   
- Duty Cycle (%) :  $27.48\text{ms} / 100\text{ms} = 27.48\%$   
- Duty Cycle (dB) : -11.22dB

| Fundamental Frequency | Total width of ON-Time | Duty Cycle (%) | Duty Cycle (dB) |
|-----------------------|------------------------|----------------|-----------------|
| 418 MHz               | 27.48 ms               | 27.48%         | -11.22dB        |

Refer to APPENDIX B: Test Plots of complete pulse train

## 7. Radiated emission test

### 7.1 Operating environment

Temperature : -1 °C  
Relative humidity : 37 %

### 7.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber using the procedure in ANSI C63.4/2003 13.1.4.1 and found frequency for open area test site.

The formal radiated emission was measured at 3m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 7.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

| Contribution   | Probability Distribution | Uncertainty (dB) |       |                   |       |
|--|--------------------------|------------------|-------|-------------------|-------|
|  |                          | Biconical Ant.   |       | Log-periodic Ant. |       |
|  |                          | 3m               | 10m   | 3m                | 10m   |
| Ambient signal                                       |                          |                  |       |                   |       |
| Antenna factor calibration                           | Normal (k=2)             | 0.50             | 0.50  | 0.50              | 0.50  |
| Receiver specification                               | Rectangular              | 0.50             | 0.50  | 0.50              | 0.50  |
| Antenna directivity                                  | Rectangular              | 0.25             | 0.00  | 1.50              | 0.25  |
| Antenna phase center variation                       | Rectangular              | 0.00             | 0.00  | 1.00              | 0.20  |
| Antenna factor frequency interpolation               | Rectangular              | 0.25             | 0.25  | 0.25              | 0.25  |
| Measure distance variation                           | Rectangular              | 0.60             | 0.40  | 0.60              | 0.40  |
| Site imperfections                                   | Rectangular              | -2.00            | -2.40 | 2.50              | 2.40  |
| Mismatch   |                          |                  |       |                   |       |
| Receiver VRC : $\Gamma_l = 0.09$                     | U-shaped                 | 0.33             | 0.33  | 0.18              | 0.18  |
| Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)       |                          | -0.35            | -0.35 | -0.18             | -0.18 |
| Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$ |                          |                  |       |                   |       |
| System repeatability                                 | Std Deviation            | 0.82             | 0.82  | 0.79              | 0.79  |
| Cable loss calibration                               | Normal (k=2)             | 0.09             | 0.09  | 0.09              | 0.09  |
| Combined standard uncertainty $U_c(y)$               | Normal                   | 1.54             | 1.70  | 2.03              | 1.68  |
|  |                          | -1.54            | -1.70 | -2.03             | -1.68 |
| Extended uncertainty U                               | Normal (k=2)             | 3.09             | 3.39  | 4.05              | 3.36  |
|  |                          | -3.09            | -3.40 | -4.05             | -3.36 |

**7.4 Limit**

| Fundamental<br>Frequency (MHZ) | Field strength of Fundamental |                |                       | Field strength of Spurious Emission |                |
|--------------------------------|-------------------------------|----------------|-----------------------|-------------------------------------|----------------|
|                                | uV/m                          | dBuV/m         | uV/m                  | uV/m                                | dBuV/m         |
| 40.66~40.7                     | 2250                          | 67.04          |                       | 225                                 | 47.04          |
| 70~130                         | 1250                          | 61.94          |                       | 125                                 | 41.94          |
| 130~174                        | 1250 to 3750                  | 61.94 to 71.48 | 56.81818(F)-6136.3636 | 125 to 375                          | 41.94 to 51.48 |
| 174~260                        | 3750                          | 71.48          |                       | 375                                 | 51.48          |
| 260~470                        | 3750 to 12500                 | 71.48 to 81.94 | 41.6667(F)-7083.3333  | 375 to 1250                         | 51.48 to 61.94 |
| Above 470                      | 12500                         | 81.94          |                       | 1250                                | 61.94          |
| Restricted Band                | N/A                           |                |                       | 500                                 | 54.0           |

**7.5 Test equipment used**

| Model Number  | Manufacturer    | Description          | Serial Number | Due to Calibration |
|---------------|-----------------|----------------------|---------------|--------------------|
| ■ - ESI       | Rohde & Schwarz | EMI test receiver    | 830482/010    | 12. 14. 2007       |
| ■ - ESCS30    | Rohde & Schwarz | EMI test receiver    | 839809/003    | 11. 27. 2007       |
| ■ - BBHA9120D | Schwarzbeck     | Horn ANT             | 207           | 11. 20. 2007       |
| ■ - 8449B     | Agilent         | Preamplifier         | MY39500777    | N/A                |
| ■ - HK116     | Rohde & Schwarz | Biconical ANT        | 826861/018    | 11. 27. 2007       |
| ■ - HL223     | Rohde & Schwarz | Log-periodic antenna | 829228/011    | 11. 27. 2007       |
| ■ - HD100     | HD GmbH         | Position Controller  | 100/692/01    | N/A                |
| ■ - DS415S    | HD GmbH         | Turntable            | 415/657/01    | N/A                |
| ■ - MA240     | HD GmbH         | Antenna Mast         | 240/565/01    | N/A                |

**7.6 Radiated emission test data**

- Test Date : February 9, 2007
- Reference standard : Part 15 Subpart C, Sec. 15.231
- Operating condition : Continuous transmitting
- Measuring Distance : 3m
- Spectrum resolution bandwidth (6dB) : 120kHz / 1MHz
- Detector mode : Peak detector mode / Average detector mode
- Power Source : DC 3V (Lithium ion battery)
- Note : 1. Through three orthogonal axes were investigated and the worst case is reported.  
2. The EUT was tested with new batteries.

**Field Strength at the Fundamental frequency**

| Frequency (MHz) | Ant. Pol. (H/V) | ANT Height (cm) | Azimuth (Deg) | AFCL (dB/m) | Peak (dBuV/m) | Duty Cycle Correction (dB) | Average (dBuV/m) | Limits (dBuV/m) | Margin (dB) |
|-----------------|-----------------|-----------------|---------------|-------------|---------------|----------------------------|------------------|-----------------|-------------|
| 418.00          | V               | 185             | 0             | 22.21       | 88.90         | -11.22                     | 77.68            | 80.28           | 2.60        |

Note: "H": Horizontal, "V": Vertical

**Field Strength at the Harmonic frequencies**

| Frequency (MHz) | Ant. Pol. (H/V) | ANT Height (cm) | Azimuth (Deg) | AFCL (dB/m) | Peak (dBuV/m) | Duty Cycle Correction (dB) | Average (dBuV/m) | Limits (dBuV/m) | Margin (dB) |
|-----------------|-----------------|-----------------|---------------|-------------|---------------|----------------------------|------------------|-----------------|-------------|
| 836.00          | V               | 120             | 60            | 30.91       | 55.50         | -11.22                     | 44.28            | 61.94           | 17.66       |
| 1254.00         | V               | 167             | 12            | -10.09      | 46.90         | -11.22                     | 35.68            | 61.94           | 26.26       |
| 1672.00         | V               | 190             | 40            | -8.32       | 57.10         | -11.22                     | 45.88            | 54.00           | 8.12        |
| 2090.00         | V               | 200             | 18            | -6.88       | 65.80         | -11.22                     | 54.58            | 61.94           | 7.36        |
| 2508.00         | V               | 270             | 95            | -4.87       | 60.30         | -11.22                     | 49.08            | 61.94           | 12.86       |
| 2926.00         | V               | 120             | 78            | -3.85       | 61.50         | -11.22                     | 50.28            | 61.94           | 11.66       |
| 3344.00         | V               | 100             | 100           | -3.02       | 59.90         | -11.22                     | 48.68            | 61.94           | 13.26       |
| 3762.00         | V               | 130             | 32            | -1.95       | 62.70         | -11.22                     | 51.48            | 54.00           | 2.52        |
| 4180.00         | V               | 120             | 0             | -0.88       | 63.10         | -11.22                     | 51.88            | 54.00           | 2.12        |

Note: "H": Horizontal, "V": Vertical

**Field Strength of the spurious emission**

| Frequency (MHz) | Reading (dBuV/m) | Ant. Pol. (H/V) | Ant. Factor(dB) | Cable Loss | Emission Level(dBuV/m) | Limits (dBuV/m) | Margin (dB) |
|-----------------|------------------|-----------------|-----------------|------------|------------------------|-----------------|-------------|
| All Frequency   | -                | -               | -               | -          | -                      | -               | <<          |

Note: "&lt;&lt;" The margin is more than 20dB

## 8. Occupied Bandwidth Measurement

### 8.1 Operating environment

Temperature : 6 °C  
Relative humidity : 38 %

### 8.2 Test set-up

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 200kHz/division frequency span, 100kHz 3dB resolution bandwidth and 5dB/division logarithmic display from an ESI spectrum analyzer.

The measuring bandwidth shall be set to a value greater than 5% of the allowed bandwidth(ANSI C63.4-1992 I6)

### 8.3 Limit

| Frequency Range(MHz) | Occupied Bandwidth Limit |
|----------------------|--------------------------|
| 70 ~ 900 MHz         | 0.25%                    |
| >900 MHz             | 0.5%                     |

### 8.4 Test equipment used

| Model Number | Manufacturer    | Description          | Serial Number | Due to Calibration |
|--------------|-----------------|----------------------|---------------|--------------------|
| ■ - ESI      | Rohde & Schwarz | EMI test receiver    | 830482/010    | 12. 14. 2007       |
| ■ - HL223    | Rohde & Schwarz | Log-periodic antenna | 829228/011    | 11. 27. 2007       |

### 8.5 Test result of occupied bandwidth

- . Test Date : February 9, 2007  
 - . Reference standard : Part 15 Subpart C, Sec. 15.231  
 - . Operating condition : Continuous transmitting  
 - . Spectrum resolution bandwidth(3dB) : 100 kHz  
 - . Power Source : DC 3V DC 3V (Lithium ion battery)

Allowed Bandwidth :  $417.33 \times 0.0025 = 1.043 \text{ MHz}$

| Fundamental Frequency | Bandwidth | Allowed Bandwidth | Result |
|-----------------------|-----------|-------------------|--------|
| 418.00 MHz            | 454kHz    | 1.045MHz          | PASS   |

Refer to APPENDIX B: Test Plots of occupied bandwidth

## 9. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

**KTV Global Corp. RF Remote Controller (Model No.: RNW-3000)** was complies with §15.231 of the FCC Rules.

.