

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID/IC TEST REPORT

TEST REPORT NUMBER : CGZ3160505-00468-EFI



CENTRE OF TESTING SERVICE CO., LTD. A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China





| TEST REPORT For FCC ID/IC | | | | | | |
|---|---|--|--|--|--|--|
| 47 CFR P | 47 CFR PART 15 OCT, 2016; RSS-210 Issue 9 | | | | | |
| Report Reference No | . CGZ3160505-00468-EFI | | | | | |
| Date of issue | . 07 April 2017 | | | | | |
| Testing Laboratory Name | . CENTRE OF TESTING SERVICE CO., LTD. | | | | | |
| Address | A101,No.65,Zhuji Highway,Tianhe District,Guangzhou, China | | | | | |
| Testing location/ procedure | . Full application of Harmonised standards ■ | | | | | |
| | Partial application of Harmonised standards \Box | | | | | |
| | Other standard testing method \square | | | | | |
| Applicant's name | Horizon Hobby, LLC | | | | | |
| Address | - 4105 Fieldstone Road, Champaign, IL 61822, USA | | | | | |
| Test specification | | | | | | |
| Standard | . 47 CFR PART 15 OCT, 2016; RSS-210 Issue 9; RSS-Gen Issue 4 | | | | | |
| | ANSI C63.10:2013 | | | | | |
| Test Report Form No | . CTSEMC-1.0 | | | | | |
| TRF Originator | . CENTRE OF TESTING SERVICE CO., LTD. | | | | | |
| Master TRF | . Dated 2009-01 | | | | | |
| CENTRE OF TESTING SERVICE C | O., LTD. All rights reserved. | | | | | |
| CENTRE OF TESTING SERVICE C material. CENTRE OF TESTING SE | in whole or in part for non-commercial purposes as long as the O., LTD is acknowledged as copyright owner and source of the RVICE CO., LTD takes no responsibility for and will not assume liability er's interpretation of the reproduced material due to its placement and | | | | | |
| Test item description | Receiver | | | | | |
| Trade Mark | Spektrum | | | | | |
| Manufacturer | Horizon Hobby, LLC | | | | | |
| Model/Type reference | SPMAR6600T | | | | | |
| Ratings | Battery 3.5~9V | | | | | |
| Operating Frequency | . 2404.0MHz ~2476.0MHz | | | | | |
| Result | Positive | | | | | |

Compiled by:

Kate zhang / Fileadministrators

Supervised by:

Duke yang / Technique principal

Approved by:

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3160505-00468-EFI





FCC ID/IC -- TEST REPORT

07 April 2017 **Test Report No. :** CGZ3160505-00468-EFI Date of issue SPMAR6600T Type / Model..... EUT..... Receiver Applicant..... Horizon Hobby, LLC Address..... 4105 Fieldstone Road, Champaign, IL 61822, USA Telephone..... +1-217 4033657 Fax..... 1 Contact..... Erin Hassan Manufacturer..... Horizon Hobby, LLC 4105 Fieldstone Road, Champaign, IL 61822, USA Address..... Telephone..... +1-217 4033657 Fax..... 1 Contact..... Erin Hassan Factory..... Horizon Hobby, LLC 4105 Fieldstone Road, Champaign, IL 61822, USA Address..... +1-217 4033657 Telephone..... Fax..... Contact..... Erin Hassan

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





TABLE OF CONTENTS

| Description | |
|--|----|
| 1.TEST STANDARDS | 5 |
| 2.SUMMARY | 5 |
| 2.1 GENERAL REMARKS | |
| 2.2 FINAL ASSESSMENT | 5 |
| 3.EQUIPMENT UNDER TEST | 5 |
| 3.1 POWER SUPPLY SYSTEM UTILISED | 5 |
| 3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT) | 5 |
| 3.3 EUT OPERATION MODE | 5 |
| 3.4 EUT CONFIGURATION | 6 |
| 4.TEST ENVIRONMENT | 7 |
| 4.1 Address of the test laboratory | 7 |
| 4.2 TEST FACILITY | |
| 4.3 Environmental conditions | |
| 4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT | |
| 4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY | |
| 4.6 MEASUREMENT UNCERTAINTY | 8 |
| 5.SUMMARY OF STANDARDS AND RESULTS | 8 |
| 5.1.DESCRIPTION OF STANDARDS AND RESULTS | 8 |
| 6.POWER LINE CONDUCTED EMISSION TEST | 9 |
| 6.1.TEST EQUIPMENT | 9 |
| 6.2. BLOCK DIAGRAM OF TEST SETUP | 9 |
| 6.3. Power Line Conducted Emission Test Limits | 9 |
| 6.4.Test Procedure | 9 |
| 6.5. POWER LINE CONDUCTED EMISSION TEST RESULTS | 9 |
| 7.RADIATED DISTURBANCE (ELECTRIC FIELD) | 10 |
| 7.1.TEST EQUIPMENT | 10 |
| 7.2.BLOCK DIAGRAM OF TEST SETUP | |
| 7.3.RADIATED EMISSION LIMIT : | |
| 7.4.Test Procedure | 11 |
| 7.5.RADIATED EMISSION TEST RESULTS | 12 |
| 8.BAND EDGE COMPLIANCE TEST | 24 |
| 8.1. TEST EQUIPMENT | 24 |
| 8.2. Test Information | |
| Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company. | |
| CENTRE OF TESTING SERVICE CO., LTD. A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China | |





| 8.3. Test procedure | |
|--|----|
| 8.3. TEST PROCEDURE | 24 |
| 9. 99% BANDWIDTH | 29 |
| 9.1 Test procedure | |
| 9.2. TEST EQUIPMENT | |
| 9.3. TEST RESULTS | 29 |
| 10 ANTENNA REQUIREMENTS | 32 |
| 10.1 Standard Applicable | |
| 10.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN | |
| 11.DEVIATION TO TEST SPECIFICATIONS | |

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





1.TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2016
 RSS-210 Issue 9
- RSS-Gen Issue 4
- ANSI C63.10:2013

2.SUMMARY

2.1 GENERAL REMARKS

| Date of receipt of test sample | 05 May 2016 | | |
|--------------------------------|---------------------------|--|--|
| | | | |
| Testing commenced on | 05 May 2016~07 April 2017 | | |
| | | | |
| Testing concluded on | 07 April 2017 | | |

2.2 FINAL ASSESSMENT

The FCC/IC requirements pertaining to the technical standards and tested operation modes are

fulfilled.

- not fulfilled.

The equipment under test

- fulfils the FCC/IC requirements cited on page 1.
- **does not** fulfil the FCC/IC requirements cited on page 1.

3.EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : Battery 6V

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: **1** Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- □ TX- Y position
- □ TX- Zposition
- TX- X position
- RX

Operation mode 1:TX-X Position Low (2404MHz), TX-X Position Middle (2440MHz),

TX-X Position High (2476MHz)

RX

Note:Operation mode 1 TX -X position of EUT is the radiated test worst case; so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

| A101, No.65, Zhuji Highway, Tianhe District, | Guangzhou, China |
|--|----------------------------|
| Tel: +86-20-85543113 (32 lines) | Fax: +86-20-38780406 |
| Complaint line: +86-20-85533471 | E-mail: cts@cts-lab.com.cn |



3.4 EUT configuration

3.4.1. Description of configuration (EUT)

| Description | : | Receiver |
|-----------------------|---|---|
| Model Number | : | SPMAR6600T |
| Operation frequency | : | 2404~ 2476 MHz ISM Band |
| Modulation Technology | : | GFSK Modulation |
| Antenna | : | External antenna, met requirement of FCC 15.203 |

3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





4. TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| Temperature: | 15~35 ° C |
|-----------------------|------------|
| | |
| Humidity: | 25~75 % |
| | |
| Atmospheric pressure: | 86~106 kPa |

4.4 Definitions of symbols used in this test report

- The black square indicates that the listed condition, standard or equipment is applicable for this report.
- The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



4.6 Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|-------------------------|----------------------|-------------|------|
| Conduction disturbance | 150kHz~30MHz ±1.22dB | | (1) |
| Power disturbance | 30MHz~300MHz | Hz ±1.38dB | |
| Radiation emission (3m) | 30MHz~300MHz | ±3.14dB | (1) |
| | 300MHz~1000MHz | ±3.18dB | (1) |
| | 1GHz~26.5GHz | ±3.54dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

| EMISSION | | | | | |
|--|---|--------|--|--|--|
| Description of Test Item Standard Results | | | | | |
| Conducted Emission Test | FCC Part 15 § 15.207 RSS-Gen Issue 4§ 7.2.4 ANSI C63.10:2013 | N/A | | | |
| Radiated Emission Test | RSS-Gen Issue 4§ 7.2 RSS-210 Issue 9 § B.10 FCC Part 15 C § 15.249 FCC Part 15 § 209 ANSI C63.10:2013 | PASSED | | | |
| Receiver Spurious Emissions | RSS-Gen Issue 4§ 4.10 ANSI C63.10:2013 | PASSED | | | |
| Band Edge Compliance Test | RSS-210 Issue 9 § 4.1 RSS-Gen Issue 4 § 8.10 FCC Part 15 C § 15.249 ANSI C63.10:2013 | PASSED | | | |
| 99% Bandwidth | RSS-210 Issue 9 § A.1.3 RSS-Gen Issue 4 § 6.6 ANSI C63.10:2013 | PASSED | | | |
| N/A is an abbreviation for Not Applicable. | 3 | | | | |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn






6. Power Line Conducted Emission Test

6.1.Test Equipment

| Conduc | Conducted Disturbance | | | | | |
|--------|-----------------------|-----------------|-----------|------------|-----------|--|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESHS10 | 842884/012 | 2016/10 | |
| 2 | Artificial Mains | ROHDE & SCHWARZ | ESH3-Z5 | 832479/025 | 2016/10 | |
| 3 | Artificial Mains | ROHDE & SCHWARZ | ESH3-Z5 | 832479/026 | 2016/10 | |
| 4 | Pulse Limiter | ROHDE & SCHWARZ | ESHSZ2 | 100301 | 2016/10 | |
| 5 | EMI Test Software | ROHDE & SCHWARZ | ESK1 | N/A | 2016/10 | |

6.2. Block Diagram of Test Setup



(EUT: Receiver)

6.3. Power Line Conducted Emission Test Limits

Standard:RSS-Gen:7.2.4,FCC Part 15 : 15.207,ANSI C63.10:2013

| | | Maximum RF Line Voltage | | |
|-----------|----------|-------------------------|---------------|--|
| Frequency | | Quasi-Peak Level | Average Level | |
| | | dB(μV) | dB(µV) | |
| 150kHz | ~ 500kHz | 66 ~ 56* | 56 ~ 46* | |
| 500kHz | ~ 5MHz | 56 | 46 | |
| 5MHz | ~ 30MHz | 60 | 50 | |

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.4.Test Procedure

The Notebook Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn






7. Radiated disturbance (electric field)

7.1.Test Equipment

| Radia | Radiated disturbance (electric field) | | | | | |
|-------|---------------------------------------|-----------------|------------|------------|-----------|--|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 100868 | 2016/10 | |
| 2 | Biconical Antenna | ROHDE & SCHWARZ | HK116 | 100221 | 2017/03 | |
| 3 | Log per Antenna | ROHDE & SCHWARZ | HL223 | 100226 | 2017/03 | |
| 4 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2017/03 | |
| 5 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2017/03 | |
| 6 | Loop Antenna | A.R.A | PLA-1030/B | 1030 | 2016/10 | |

7.2.Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

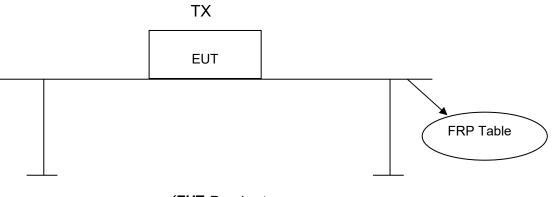

(EUT: Receiver)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



7.2.2 Anechoic Chamber Setup Diagram

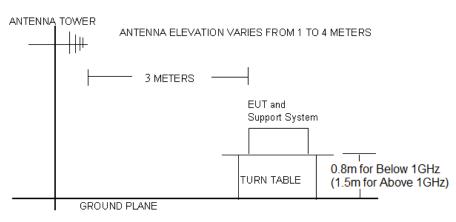

7.3.Radiated Emission Limit :

Standard: FCC 15.249 , FCC 15.209; RSS-Gen:7.2; RSS-210 B.10.

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental Frequency (MHz) | Field Strength of Fundamental (mV/m) | Field Strength of Harmonics (µV/m) |
|--------------------------------|---|---------------------------------------|
| 902-928 | 50 | 500 |
| 2400-2483.5 | 50 | 500 |
| 5725-5875 | 50 | 500 |
| 24000-24250 | 250 | 2500 |

| FRE | QUEN | CY | DISTANCE | FIELD STRENGTHS LIMIT | | |
|-------|------------|-------|----------|----------------------------|----------|--|
| | MHz | | Meters | μV/m | dB(μV)/m | |
| 0.009 | ~ | 0.490 | 300 | 2400/F(kHz) | | |
| 0.490 | ~ | 1.705 | 30 | 24000/F(kHz) | | |
| 1.705 | ~ | 30 | 30 | 30 | | |
| 30 | ~ | 88 | 3 | 100 | 40.0 | |
| 88 | ~ | 216 | 3 | 150 | 43.5 | |
| 216 | ~ | 960 | 3 | 200 | 46.0 | |
| 960 | ~ | 1000 | 3 | 500 | 54.0 | |
| | Above 1000 | | 3 | Other:74.0 dB(μV)/m (Peak) | | |
| | | | 5 | 54.0 dB(μV)/m (Average) | | |

Remark: (1) Emission level $dB\mu V = 20 \log Emission level \mu V/m$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high (1.5m for above 1GHz) above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD. A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

| A101, No.65, Zhuji Highway, Tianhe District, | Guangz |
|--|---------|
| Tel: +86-20-85543113 (32 lines) | Fax: +8 |
| Complaint line: +86-20-85533471 | E-mail: |

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 2MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5. Radiated Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





| Test Mode: | TX – X Position Mode | Result: | - passed |
|------------------|----------------------|---------|--------------|
| Frequency range: | 9KHz~30MHz | | - not passed |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|------|
| Rem | ark: The test re | esult readi | ng value is to l | low, margin a | ll > 20dB of t | he limit. | |

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471


Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





| Channel: | TX –X Position | Result: | - passed |
|------------------|----------------|---------|----------------|
| Test point: | Horizontal | | □ - not passed |
| Frequency range: | 30MHz-1GHz | | |

| EUT | Receiver |
|----------------|---|
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 05 May 2016~07 April 2017 |
| Operator | Duke |
| MODEL NO | SPMAR6600T |

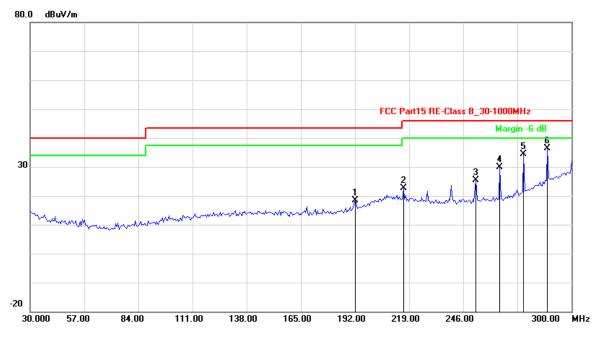

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | | | |
|--------|--|----------------|-------------------|-------------------|-------------------|----------------|------|--|--|--|
| 1 | 192.3246 | -13.89 | 32.30 | 18.41 | 43.50 | -25.09 | QP | | | |
| 2 | 216.1323 | -10.64 | 33.27 | 22.63 | 46.00 | -23.37 | QP | | | |
| 3 | 252.3848 | -11.31 | 36.72 | 25.41 | 46.00 | -20.59 | QP | | | |
| 4 | 264.2886 | -10.52 | 40.39 | 29.87 | 46.00 | -16.13 | QP | | | |
| 5 | 276.1924 | -8.26 | 42.73 | 34.47 | 46.00 | -11.53 | QP | | | |
| 6 | 288.0962 | -4.65 | 40.96 | 36.31 | 46.00 | -9.69 | QP | | | |
| Remark | Remark: Other frequency mini margin all >6 dB of Limit | | | | | | | | | |


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





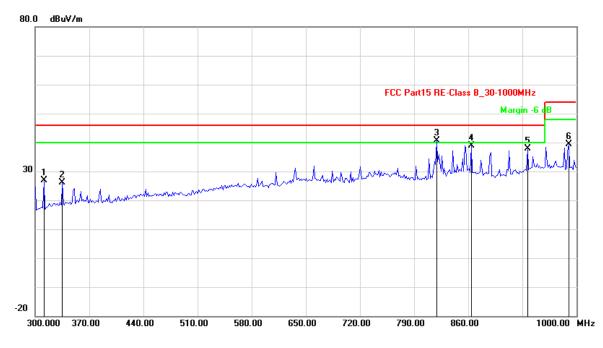

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|--------|--------------------|----------------|-------------------|-------------------|-------------------|----------------|------|
| 1 | 311.2224 | -13.11 | 39.87 | 26.76 | 46.00 | -19.24 | QP |
| 2 | 335.0701 | -12.03 | 38.13 | 26.10 | 46.00 | -19.90 | QP |
| 3 | 819.0381 | -2.14 | 42.73 | 40.59 | 46.00 | -5.41 | QP |
| 4 | 863.9279 | -0.71 | 39.68 | 38.97 | 46.00 | -7.03 | QP |
| 5 | 936.8737 | -0.16 | 38.00 | 37.84 | 46.00 | -8.16 | QP |
| 6 | 990.1804 | 0.04 | 39.23 | 39.27 | 54.00 | -14.73 | QP |
| Remark | : Other frequer | icy mini ma | rgin all >6 dB o | of Limit | | | |

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

Channel:

Test point:

Frequency range:



Result:

- passed

- not passed

TX – X Position Low CH

Horizontal

1GHz-26.5GHz



| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
|----------|-----------------|-------------|-----------------|------------|----------|-------------|------|
| | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | |
| 1 | 2404.00 | -6.83 | 93.40 | 86.57 | 114.00 | -27.43 | Peak |
| 2 | 2404.00 | -6.83 | 90.55 | 83.72 | 94.00 | -10.28 | AVG |
| | | | | | | | |
| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
| | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | |
| 1 | 1727.455 | -11.03 | 60.84 | 49.81 | 74.00 | -24.19 | peak |
| 2 | 1727.455 | -11.03 | 46.71 | 35.68 | 54.00 | -18.32 | AVG |
| 3 | 6444.890 | 7.46 | 42.31 | 49.77 | 74.00 | -24.23 | peak |
| 4 | 6444.890 | 7.46 | 27.32 | 34.78 | 54.00 | -19.22 | AVG |
| Remark | : Other frequer | ncy mini ma | rgin all >20 dB | 6 of Limit | | | |
| | | | | | | | |
| Channe | : | TX –X Po | sition Middle C | Н | Result: | - passed | |
| Fest poi | nt: | Horizonta | I | | | - not passe | be |
| | icy range: | 1GHz-26.5 | 5GHz | | | not public | |
| | | | | | | | |
| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
| | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | |
| 1 | 2440.00 | -6.62 | 92.90 | 86.28 | 114.00 | -27.72 | Peak |
| 2 | 2440.00 | -6.62 | 90.06 | 83.44 | 94.00 | -10.56 | AVG |
| | | | | | | | |
| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
| | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | 200 |
| 1 | 1749.499 | -10.88 | 47.52 | 36.64 | 74.00 | -37.36 | peak |
| 2 | 1749.499 | -10.88 | 32.23 | 21.35 | 54.00 | -32.65 | AVG |
| 3 | 5827.655 | 5.97 | 41.12 | 47.09 | 74.00 | -26.91 | peak |
| 4 | 5827.655 | 5.97 | 26.88 | 32.85 | 54.00 | -21.15 | AVG |
| Remark | : Other frequer | | | | | | |
| | - | | 9 | | | | |
| Channe | | TX –X Po | sition High CH | | Result: | - passed | |
| Fest poi | | Horizonta | 0 | | | - not passe | d |
| • | icy range: | 1GHz-26. | • | | | - not passe | su |
| | | | | | 1 | | |
| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
| | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | 200 |
| 1 | 2476.00 | -6.40 | 93.04 | 86.64 | 114.00 | -27.36 | Peak |
| 2 | 2476.00 | -6.40 | 89.64 | 83.24 | 94.00 | -10.76 | AVG |
| | | | | | | | |
| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
| NO. | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | Det. |
| 1 | 1749.499 | -10.88 | 45.28 | 34.40 | 74.00 | -39.60 | peak |
| 2 | 1749.499 | -10.88 | 31.29 | 20.41 | 54.00 | -33.59 | AVG |
| 3 | 5871.743 | 6.13 | 41.44 | 47.57 | 74.00 | -26.43 | peak |
| 0 | 0011.140 | | | | | | |
| 4 | 5871.743 | 6.13 | 26.42 | 32.55 | 54.00 | -21.45 | AVG |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn







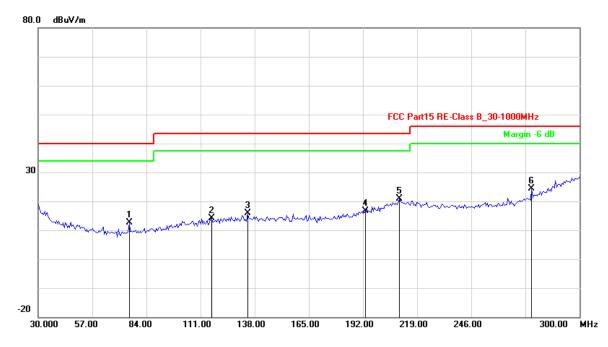

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|--------|--------------------|----------------|-------------------|-------------------|-------------------|----------------|------|
| 1 | 75.4509 | -20.32 | 32.97 | 12.65 | 40.00 | -27.35 | QP |
| 2 | 116.5731 | -16.92 | 30.97 | 14.05 | 43.50 | -29.45 | QP |
| 3 | 134.4289 | -16.10 | 32.00 | 15.90 | 43.50 | -27.60 | QP |
| 4 | 193.4068 | -13.67 | 30.41 | 16.74 | 43.50 | -26.76 | QP |
| 5 | 210.1804 | -10.20 | 30.97 | 20.77 | 43.50 | -22.73 | QP |
| 6 | 276.1924 | -8.26 | 32.68 | 24.42 | 46.00 | -21.58 | QP |
| Remark | : Other frequen | icy mini ma | rgin all >6 dB o | of Limit | | | |


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





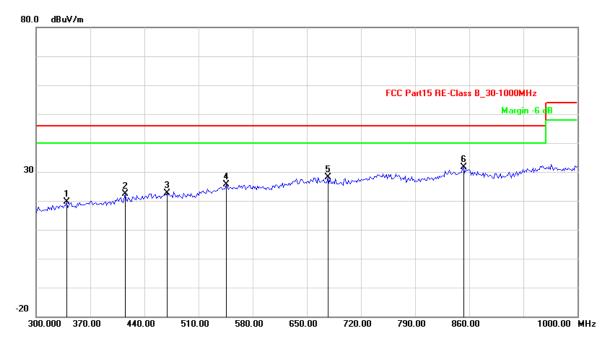

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | | | |
|--------|--|----------------|-------------------|-------------------|-------------------|----------------|------|--|--|--|
| 1 | 339.2786 | -11.84 | 31.38 | 19.54 | 46.00 | -26.46 | QP | | | |
| 2 | 415.0301 | -9.89 | 32.28 | 22.39 | 46.00 | -23.61 | QP | | | |
| 3 | 469.7395 | -8.33 | 30.91 | 22.58 | 46.00 | -23.42 | QP | | | |
| 4 | 545.4910 | -5.90 | 31.65 | 25.75 | 46.00 | -20.25 | QP | | | |
| 5 | 677.3547 | -3.49 | 31.59 | 28.10 | 46.00 | -17.90 | QP | | | |
| 6 | 852.7054 | -0.37 | 31.88 | 31.51 | 46.00 | -14.49 | QP | | | |
| Remark | Remark: Other frequency mini margin all >6 dB of Limit | | | | | | | | | |

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

Channel:

Test point:



TX – X Position Low CH

Vertical



Result:
- passed

- not passed

| Frequen | icy range: | 1GHz-26. | 5GHz | | | - not passe | eu |
|--|--|---|--|--|--|---|----------------------------------|
| | | | | | II | | |
| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
| 1 | 2404.00 | -6.83 | 101.44 | 94.61 | 114.00 | -19.39 | Peak |
| 2 | 2404.00 | -6.83 | 98.37 | 91.54 | 94.00 | -2.46 | AVG |
| | _ | | | | | | _ |
| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
| 1 | 1749.499 | -10.88 | 54.54 | 43.66 | 74.00 | -30.34 | peak |
| 2 | 1749.499 | -10.88 | 39.53 | 28.65 | 54.00 | -25.35 | AVG |
| 3 | 6466.934 | 7.50 | 43.53 | 51.03 | 74.00 | -22.97 | peak |
| 4 | 6466.934 | 7.50 | 29.24 | 36.74 | 54.00 | -17.26 | AVG |
| Remark | : Other frequer | icy mini ma | rgin all >20 dB | of Limit | | | |
| Channel | l: | TX –X Po | sition Middle C | Н | Result: | - passed | |
| Test poi | nt: | Vertical | | | | - not passe | ed |
| requen | icy range: | 1GHz-26. | 5GHz | | | | |
| No. | Frequency | Factor | Reading | Level | Limit | Margin | Det. |
| | (MHz) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | |
| 1 | 2440.00 | -6.62 | 100.97 | 94.35 | 114.00 | -19.65 | Peal |
| 2 | 2440.00 | -6.62 | 98.04 | 91.42 | 94.00 | -2.58 | AVG |
| | | l. | | | | | |
| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
| | 1727.455 | -11.03 | 47.36 | 36.33 | 74.00 | -37.67 | peak |
| 1 | 1727.400 | | | 22.14 | 54.00 | -31.86 | AVG |
| 2 | 1727.455 | -11.03 | 33.17 | 22.14 | 34.00 | 01.00 | |
| | | -11.03 5.80 | <u>33.17</u> 41.43 | 47.23 | 74.00 | -26.77 | peak |
| 2 | 1727.455 | | | | | | |
| 2 3 4 | 1727.455 5783.567 | 5.80 5.80 | 41.43 26.88 | 47.23 32.68 | 74.00 | -26.77 | peak AVG |
| 2 3 4 Remark | 1727.455 5783.567 5783.567 :: Other frequer | 5.80 5.80 ncy mini ma | 41.43 26.88 rgin all >20 dB | 47.23 32.68 | 74.00 54.00 | -26.77 -21.32 | |
| 2 3 4 Remark Channel | 1727.455 5783.567 5783.567 :: Other frequer | 5.80 5.80 ncy mini ma TX –X Pos | 41.43 26.88 | 47.23 32.68 | 74.00 54.00 Result: ∎ | -26.77 -21.32 - passed | ÄVG |
| 2 3 4 Remark Channel Test poi | 1727.455 5783.567 5783.567 :: Other frequer I: nt: | 5.80 5.80 ncy mini ma TX –X Pos Vertical | 41.43 26.88 rgin all >20 dB sition High CH | 47.23 32.68 | 74.00 54.00 Result: ∎ | -26.77 -21.32 | ÄVG |
| 2 3 4 Remark Channel Test poi | 1727.455 5783.567 5783.567 :: Other frequer | 5.80 5.80 ncy mini ma TX –X Pos | 41.43 26.88 rgin all >20 dB sition High CH | 47.23 32.68 | 74.00 54.00 Result: ∎ | -26.77 -21.32 - passed | ÄVG |
| 2 3 Remark Channel Test poi Frequen | 1727.455 5783.567 5783.567 :: Other frequer I: nt: ncy range: Frequency (MHz) | 5.80 5.80 icy mini ma TX –X Pos Vertical 1GHz-26. Factor (dB) | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) | 47.23 32.68 of Limit Level (dBuV/m) | 74.00 54.00 Result: ■ Limit (dBuV/m) | -26.77 -21.32 - passed - not passe Margin (dB) | AVG |
| 2 3 4 Remark Channel Test poir Frequen | 1727.455 5783.567 5783.567 :: Other frequer :: nt: ncy range: Frequency (MHz) 2476.00 | 5.80 5.80 icy mini ma TX –X Pos Vertical 1GHz-26.9 Factor (dB) -6.40 | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) 100.63 | 47.23 32.68 of Limit Level (dBuV/m) 94.23 | 74.00 54.00 Result: ∎ Limit (dBuV/m) 114.00 | -26.77 -21.32 - passed - not passe Margin (dB) -19.77 | AVG |
| 2 3 Remark Channel Test poi Frequen | 1727.455 5783.567 5783.567 :: Other frequer I: nt: ncy range: Frequency (MHz) | 5.80 5.80 icy mini ma TX –X Pos Vertical 1GHz-26. Factor (dB) | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) | 47.23 32.68 of Limit Level (dBuV/m) | 74.00 54.00 Result: ■ Limit (dBuV/m) | -26.77 -21.32 - passed - not passe Margin (dB) | AVG |
| 2 3 4 Remark Channel Test poin Frequen No. 1 2 | 1727.455 5783.567 5783.567 :: Other frequer :: nt: icy range: Frequency (MHz) 2476.00 | 5.80 5.80 ncy mini ma TX –X Pos Vertical 1GHz-26.9 Factor (dB) -6.40 -6.40 | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) 100.63 97.42 | 47.23 32.68 of Limit (dBuV/m) 94.23 91.02 | 74.00 54.00 Result: ∎ Limit (dBuV/m) 114.00 94.00 | -26.77 -21.32 - passed - not passe Margin (dB) -19.77 -2.98 | AVG ed Det. Peal AVG |
| 2 3 4 Remark Channel Test poir Frequen No. 1 2 No. | 1727.455 5783.567 5783.567 c Other frequer c Other frequer c Trequency (MHz) 2476.00 2476.00 Frequency (MHz) | 5.80 5.80 icy mini ma TX –X Pos Vertical 1GHz-26.9 Factor (dB) -6.40 -6.40 Factor (dB) | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) 100.63 97.42 Reading (dBuV) | 47.23 32.68 of Limit (dBuV/m) 94.23 91.02 Level (dBuV/m) | 74.00 54.00 Result: ■ (dBuV/m) 114.00 94.00 Limit (dBuV/m) | -26.77 -21.32 - passed - not passed Margin (dB) -19.77 -2.98 Margin (dB) | AVG ed Det. AVG Det. |
| 2 3 4 Remark Channel Test poir Frequen No. 1 2 No. 1 | 1727.455 5783.567 5783.567 : Other frequer :: nt: icy range: Frequency (MHz) 2476.00 2476.00 2476.00 1749.499 | 5.80 5.80 icy mini ma TX –X Pos Vertical 1GHz-26.9 Factor (dB) -6.40 -6.40 Factor (dB) -10.88 | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) 100.63 97.42 Reading (dBuV) 42.82 | 47.23 32.68 of Limit (dBuV/m) 94.23 91.02 Level (dBuV/m) 31.94 | 74.00 54.00 Result: ■ Limit □ (dBuV/m) 114.00 94.00 □ Limit (dBuV/m) 74.00 □ | -26.77 -21.32 - passed - not passed - not passed - 19.77 -2.98 Margin (dB) -42.06 | AVG ed Det. Peal AVG Det. |
| 2 3 4 Remark Channel Test poin Frequen No. 1 2 No. 1 2 | 1727.455 5783.567 5783.567 :: Other frequer :: nt: ncy range: Frequency (MHz) 2476.00 2476.00 2476.00 Frequency (MHz) 1749.499 1749.499 | 5.80 5.80 ncy mini ma TX –X Pos Vertical 1GHz-26.9 Factor (dB) -6.40 -6.40 Factor (dB) -10.88 -10.88 | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) 100.63 97.42 Reading (dBuV) 42.82 27.46 | 47.23 32.68 of Limit Level (dBuV/m) 94.23 91.02 Level (dBuV/m) 31.94 16.58 | 74.00 54.00 Result: ■ Limit (dBuV/m) 114.00 94.00 Limit (dBuV/m) 74.00 54.00 | -26.77 -21.32 - passed - not passed Margin (dB) -19.77 -2.98 Margin (dB) -42.06 -37.42 | AVG Det. Peal AVG Det. AVG AVG |
| 2 3 4 Remark Channel Test poir Frequen No. 1 2 No. 1 | 1727.455 5783.567 5783.567 : Other frequer :: nt: icy range: Frequency (MHz) 2476.00 2476.00 2476.00 1749.499 | 5.80 5.80 icy mini ma TX –X Pos Vertical 1GHz-26.9 Factor (dB) -6.40 -6.40 Factor (dB) -10.88 | 41.43 26.88 rgin all >20 dB sition High CH 5GHz Reading (dBuV) 100.63 97.42 Reading (dBuV) 42.82 | 47.23 32.68 of Limit (dBuV/m) 94.23 91.02 Level (dBuV/m) 31.94 | 74.00 54.00 Result: ■ Limit □ (dBuV/m) 114.00 94.00 □ Limit (dBuV/m) 74.00 □ | -26.77 -21.32 - passed - not passed - not passed - 19.77 -2.98 Margin (dB) -42.06 | AVG ed Det. Peal AVG Det. |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn






| Channel: | RX | Result: | - passed |
|------------------|------------|---------|----------------|
| Test point: | Horizontal | | □ - not passed |
| Frequency range: | 30MHz-1GHz | | |

| EUT | Receiver |
|----------------|---|
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 05 May 2016~07 April 2017 |
| Operator | Duke |
| MODEL NO | SPMAR6600T |

80.0 dBuV/m

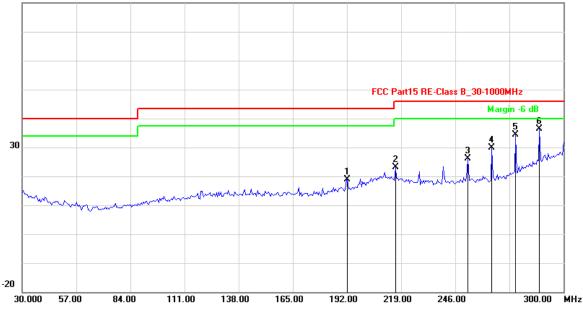

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | |
|--------|--|----------------|-------------------|-------------------|-------------------|----------------|------|--|
| 1 | 192.3246 | -13.89 | 32.74 | 18.85 | 43.50 | -24.65 | QP | |
| 2 | 216.1323 | -10.64 | 33.85 | 23.21 | 46.00 | -22.79 | QP | |
| 3 | 252.3848 | -11.31 | 37.36 | 26.05 | 46.00 | -19.95 | QP | |
| 4 | 264.2886 | -10.52 | 40.38 | 29.86 | 46.00 | -16.14 | QP | |
| 5 | 276.1924 | -8.26 | 42.64 | 34.38 | 46.00 | -11.62 | QP | |
| 6 | 288.0962 | -4.65 | 40.91 | 36.26 | 46.00 | -9.74 | QP | |
| Remark | Remark: Other frequency mini margin all >6 dB of Limit | | | | | | | |


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



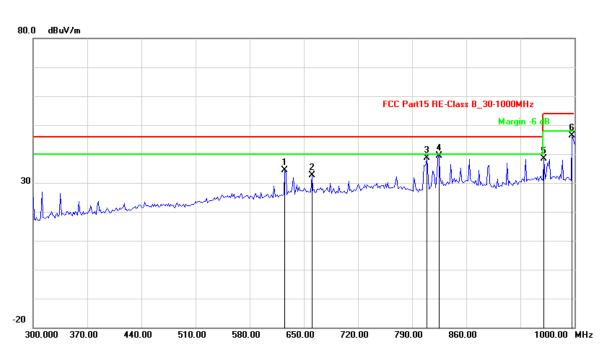

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | |
|--------|--|----------------|-------------------|-------------------|-------------------|----------------|------|--|
| 1 | 625.4509 | -4.37 | 38.79 | 34.42 | 46.00 | -11.58 | QP | |
| 2 | 660.5210 | -3.33 | 36.00 | 32.67 | 46.00 | -13.33 | QP | |
| 3 | 809.2184 | -2.72 | 41.24 | 38.52 | 46.00 | -7.48 | QP | |
| 4 | 824.6493 | -1.80 | 41.10 | 39.30 | 46.00 | -6.70 | QP | |
| 5 | 960.7214 | 0.32 | 38.04 | 38.36 | 54.00 | -15.64 | QP | |
| 6 | 997.1944 | -0.02 | 46.41 | 46.39 | 54.00 | -7.61 | QP | |
| Remark | Remark: Other frequency mini margin all >6 dB of Limit | | | | | | | |

| Channel: | RX | Result: | - passed |
|------------------|--------------|---------|----------------|
| Test point: | Horizontal | | □ - not passed |
| Frequency range: | 1GHz-26.5GHz | | 1 |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | | |
|--------|---|----------------|-------------------|-------------------|-------------------|----------------|------|--|--|
| 1 | 2014.028 | -9.15 | 39.47 | 30.32 | 74.00 | -43.68 | peak | | |
| 2 | 2014.028 | -9.15 | 25.38 | 16.23 | 54.00 | -37.77 | AVG | | |
| 3 | 5144.289 | 3.71 | 38.54 | 42.25 | 74.00 | -31.75 | peak | | |
| 4 | 5144.289 | 3.71 | 23.70 | 27.41 | 54.00 | -26.59 | AVG | | |
| Remark | Remark: Other frequency mini margin all >20 dB of Limit | | | | | | | | |

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

CTS





| Channel: Test point: | RX Vertical | passed not passed |
|-------------------------|----------------|--|
| Frequency range: | 30MHz-1GHz | |

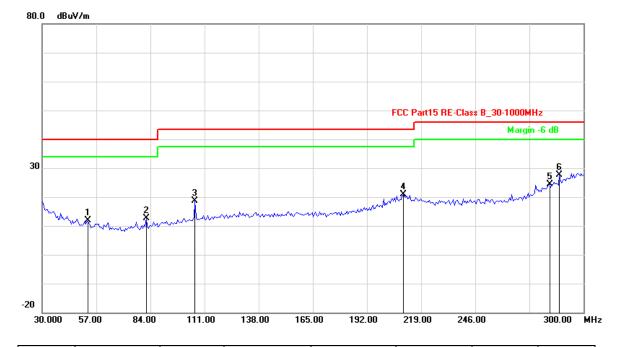

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | |
|--------|--|----------------|-------------------|-------------------|-------------------|----------------|------|--|
| 1 | 52.7255 | -18.91 | 30.81 | 11.90 | 40.00 | -28.10 | QP | |
| 2 | 81.9439 | -19.79 | 32.48 | 12.69 | 40.00 | -27.31 | QP | |
| 3 | 106.2926 | -17.64 | 36.17 | 18.53 | 43.50 | -24.97 | QP | |
| 4 | 210.1804 | -10.20 | 30.98 | 20.78 | 43.50 | -22.72 | QP | |
| 5 | 283.2265 | -6.13 | 30.49 | 24.36 | 46.00 | -21.64 | QP | |
| 6 | 288.0962 | -4.65 | 32.34 | 27.69 | 46.00 | -18.31 | QP | |
| Remark | Remark: Other frequency mini margin all >6 dB of Limit | | | | | | | |


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





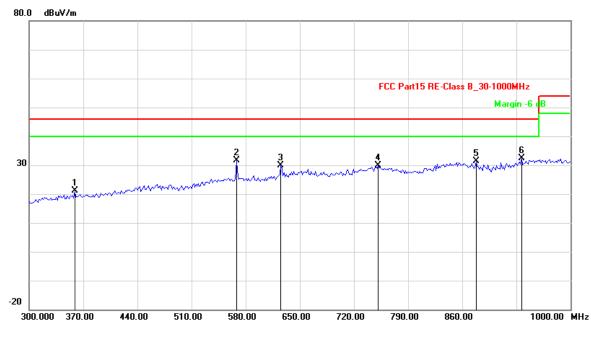

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|--------|--------------------|----------------|-------------------|-------------------|-------------------|----------------|------|
| 1 | 358.9178 | -11.20 | 32.34 | 21.14 | 46.00 | -24.86 | QP |
| 2 | 567.9359 | -5.63 | 37.14 | 31.51 | 46.00 | -14.49 | QP |
| 3 | 625.4509 | -4.37 | 34.23 | 29.86 | 46.00 | -16.14 | QP |
| 4 | 751.7034 | -1.66 | 31.47 | 29.81 | 46.00 | -16.19 | QP |
| 5 | 877.9559 | -1.13 | 32.41 | 31.28 | 46.00 | -14.72 | QP |
| 6 | 936.8737 | -0.16 | 32.42 | 32.26 | 46.00 | -13.74 | QP |
| Remark | : Other frequen | icy mini ma | rgin all >6 dB o | of Limit | | | |

| Channel: | RX | Result: | - passed |
|------------------|--------------|---------|---------------|
| Test point: | Vertical | | in the passed |
| Frequency range: | 1GHz-26.5GHz | | |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | | |
|--------|---|----------------|-------------------|-------------------|-------------------|----------------|------|--|--|
| 1 | 1947.896 | -9.57 | 41.34 | 31.77 | 74.00 | -42.23 | peak | | |
| 2 | 1947.896 | -9.57 | 26.09 | 16.52 | 54.00 | -37.48 | AVG | | |
| 3 | 5585.170 | 5.06 | 41.25 | 46.31 | 74.00 | -27.69 | peak | | |
| 4 | 5585.170 | 5.06 | 26.41 | 31.47 | 54.00 | -22.53 | AVG | | |
| Remark | Remark: Other frequency mini margin all >20 dB of Limit | | | | | | | | |

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





8.Band Edge Compliance test

8.1. Test Equipment

| Band Edge Compliance test | | | | | |
|---------------------------|-------------------|-----------------|-----------|------------|-----------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 10868 | 2016/10 |
| 2 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2017/03 |
| 3 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2017/03 |

8.2. Test Information

| EUT | Receiver |
|----------------|---|
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 05 May 2016~07 April 2017 |
| Operator | Duke |
| MODEL NO | SPMAR6600T |

8.3. Test procedure

- 1、 The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz ; VBW=3KHz (1/On Time) / Sweep=AUTO

8.4. Test Results

PASSED.

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

| Test Mode | Channel | Test Result Highest Emission (dBuv/m) | | | |
|--------------|------------------|---|---------|----------|---------|
| | Marked Frequency | Horizontal | | Vertical | |
| | | Peak | Average | Peak | Average |
| Low Channel | 2390MHz | 28.56 | 19.82 | 33.92 | 24.72 |
| | 2400MHz | 43.48 | 30.99 | 49.25 | 39.81 |
| High Channel | 2483.5MHz | 30.04 | 20.38 | 37.60 | 24.58 |
| | 2500MHz | 29.14 | 18.74 | 31.61 | 20.70 |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

| A101 | , | No.65, | Zhuji Hig | hway,Tianh |
|------|-----|------------|-----------|------------|
| Tel: | + | 86-20-85 | 543113 | (32 lines) |
| Com | pla | aint line: | +86-20- | 85533471 |

 ay,Tianhe District,
 Guangzhou, China


 i2 lines)
 Fax: +86-20-38780406


 533471
 E-mail: cts@cts-lab.com.cn



CTS

Band Edges (Low)

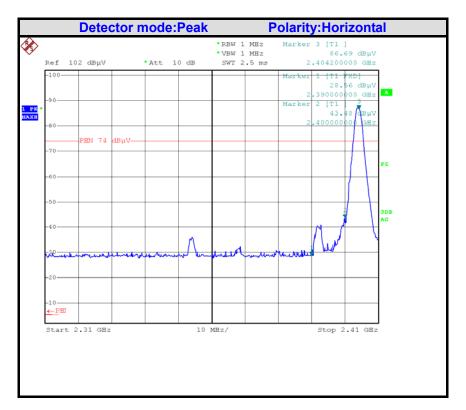

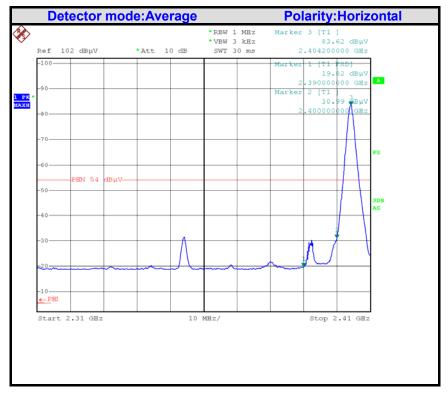

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





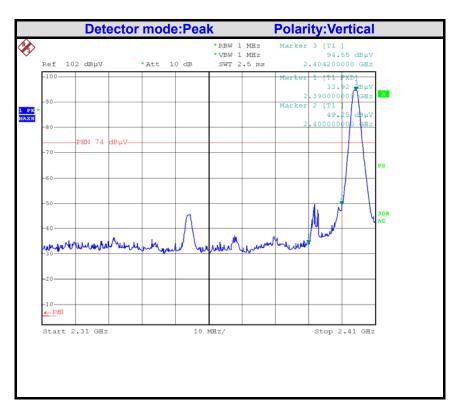

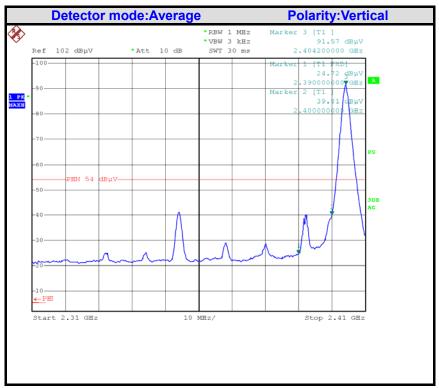

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471


Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





Band Edges (High)

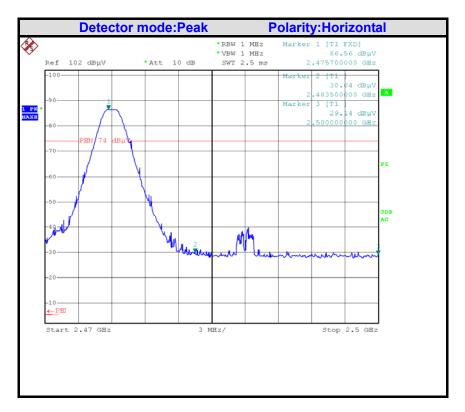

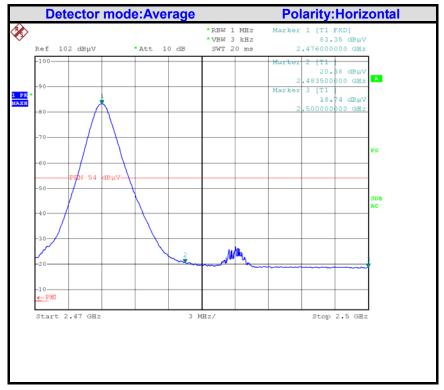

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



CTS

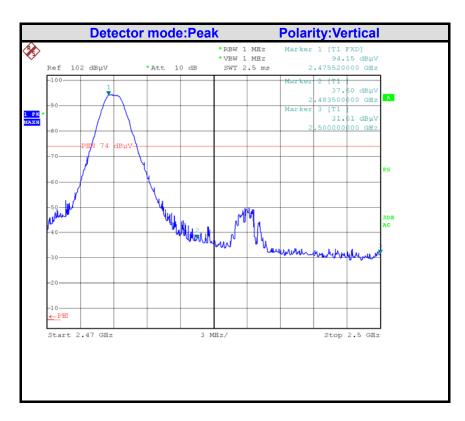

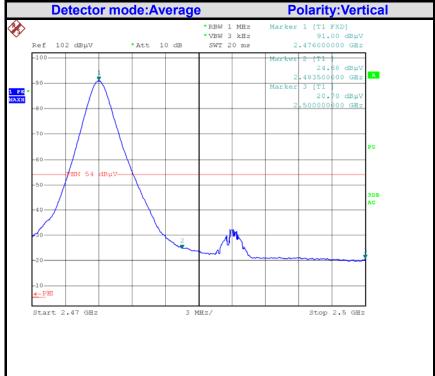

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





9.99% bandwidth

9.1 Test procedure

According to RSS-210 A1.3 and RSS-Gen 4.6.1 The Receiver output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

9.2. Test Equipment

| Band Edge Compliance test | | | | | |
|---------------------------|-----------------|-----------------|-----------|------------|------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2017/03/26 |
| 2 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2017/03/24 |

9.3. Test Results

PASSED.

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|--------------------|--------------------|
| Low | 2404 | 1.122 |
| Middle | 2440 | 1.152 |
| High | 2476 | 1.206 |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn







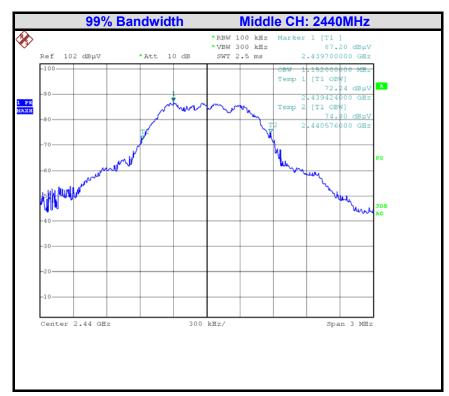


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





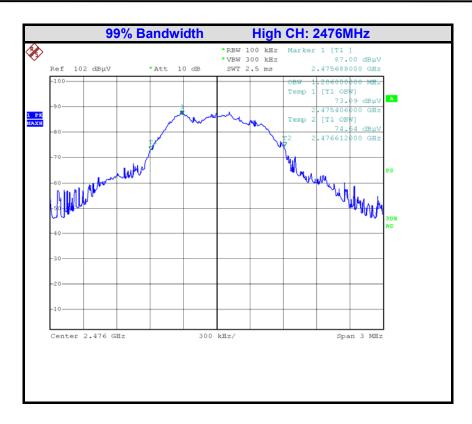

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





10 Antenna Requirements

10.1 Standard Applicable

The EUT is External antenna with 2dBi, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 Antenna Construction and Directional Gain

Antenna type: External Antenna Antenna Gain: 2dBi

11. Deviation to test specifications

The following identical model(s):

SPMAR6270T

Belong to the tested device:

Product description: Receiver Model name: SPMAR6600T

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn