



RF MEASUREMENT REPORT

FCC ID: BRWHBZ5303
Applicant: Horizon Hobby, LLC
Product: Duet RTF
Model No.: HBZ5303
Brand Name: HobbyZone
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2023-04-20
Test Date: 2023-04-20 ~ 2023-05-22

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2305RSU047-U1	V01	Initial Report	2023-08-31	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Host information.....	6
1.6. Electronic Components of EUT.....	6
1.7. Radio Specification under Test	6
1.8. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Software	8
2.4. Applied Standards.....	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty.....	12
6. Test Result.....	13
6.1. Summary.....	13
6.2. 6dB Bandwidth Measurement.....	14
6.2.1. Test Limit.....	14
6.2.2. Test Procedure.....	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement.....	15
6.3.1. Test Limit.....	15
6.3.2. Test Procedure.....	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16

6.4.1.	Test Limit	16
6.4.2.	Test Procedure	16
6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	16
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	17
6.5.1.	Test Limit	17
6.5.2.	Test Procedure	17
6.5.3.	Test Setting	17
6.5.4.	Test Setup	17
6.5.5.	Test Result	18
6.6.	Radiated Spurious Emission Measurement.....	19
6.6.1.	Test Limit	19
6.6.2.	Test Procedure	19
6.6.3.	Test Setting	19
6.6.4.	Test Setup	21
6.6.5.	Test Result	22
6.7.	Radiated Restricted Band Edge Measurement	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure	24
6.7.3.	Test Setting	24
6.7.4.	Test Setup	25
6.7.5.	Test Result	25
6.8.	AC Conducted Emissions Measurement	26
6.8.1.	Test Limit	26
6.8.2.	Test Setup	26
6.8.3.	Test Result	26
Appendix A – Test Result		27
A.1	Duty Cycle Test Result	27
A.2	6dB Bandwidth Test Result	28
A.3	Output Power Test Result	29
A.4	Power Spectral Density Test Result.....	30
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	31
A.6	Radiated Spurious Emission Test Result.....	33
A.7	Radiated Restricted Band Edge Test Result.....	36
Appendix B – Test Setup Photograph		44
Appendix C – EUT Photograph		45

1. General Information

1.1. Applicant

Horizon Hobby, LLC
2904 Research Road, Champaign, IL, 61822

1.2. Manufacturer

Horizon Hobby, LLC
2904 Research Road, Champaign, IL, 61822

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551
	FCC: CN1166 ISED: CN0001
	VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020
	<input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551
	FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261
	FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Duet RTF
Model No.	HBZ5303
Wireless Specification	2405 ~ 2475MHz
EUT Identification No.	20230523Sample#01
Power Voltage	3.7VDC
<p>Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.</p>	

1.5. Host information

Product Name	Duet RTF
Model No.	HBZ05300
Brand Name	HobbyZone
EUT Identification No.	20230614Accessory#01
<p>Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.</p>	

1.6. Electronic Components of EUT

Component Type	Item #	Description	Qty
Clockwise motor	HBZ05301	Clockwise motor: Duet	1
Counter-clockwise motor	HBZ05302	Counter-clockwise motor: Duet	1
Main control board	HBZ5303	Receiver/ESC: Duet	1

1.7. Radio Specification under Test

Frequency Range	2405 ~ 2475MHz
Channel Number	15
Type of Modulation	GFSK
Data Rate	500kbps
Antenna Type	Monopole Antenna
Antenna Gain	2.11 dBi

1.8. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit at 2405MHz
Mode 2: Transmit at 2440MHz
Mode 3: Transmit at 2475MHz

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing.

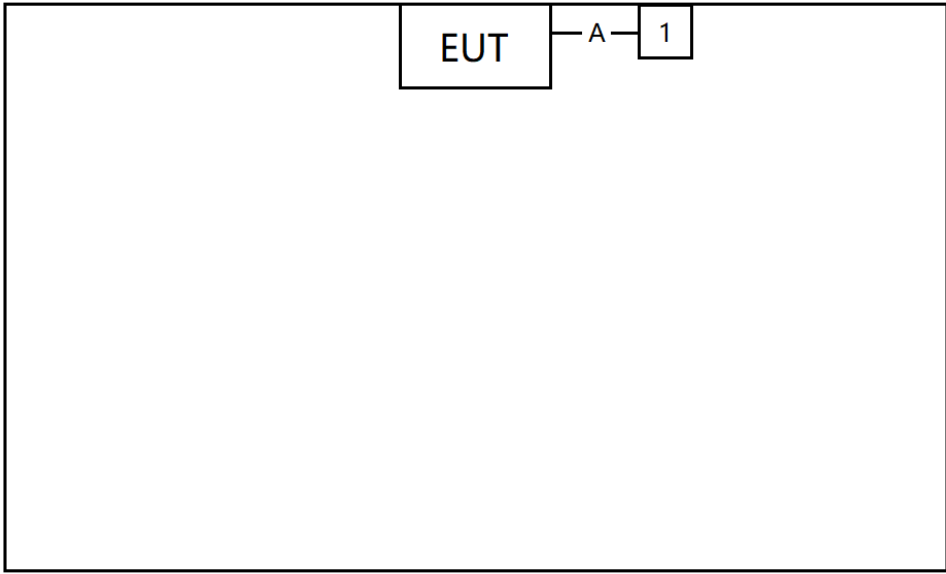Connection Diagram			
			
No.	Cable Type	Cable Spec	Length
A	DC Power Cable	Non-Shielding	<0.1m
No.	Product	Manufacturer	Model No.
1	Li-Polymer Battery	N/A	210mAh 50C 1S2P / 3.7V

2.3. Test Software

The test utility software used during testing was “Firmware Programmer”, and the version was 0.0.13.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC2
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2023-06-04	WZ-SR4
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2023-11-25	WZ-SR4
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2023-06-09	WZ-SR4
Shielding Room	HUAMING	WZ-SR4	MRTSUE06441	N/A	N/A	WZ-SR4

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Disturbance
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Coaxial: 9kHz~30MHz: 2.59dB</p> <p>Coplanar: 9kHz~30MHz: 2.60dB</p> <p>Horizontal: 30MHz~200MHz: 3.85dB 200MHz~1GHz: 4.36dB 1GHz~40GHz: 4.98dB</p> <p>Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.91dB</p>
Spurious Emissions, Conducted
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.30dB</p>
Output Power
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.50dB</p>
Power Spectrum Density
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.30dB</p>
Occupied Bandwidth
<p>Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.20%</p>

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	N/A

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- “N/A” means this item is not applicable, and the details refer to relevant section.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

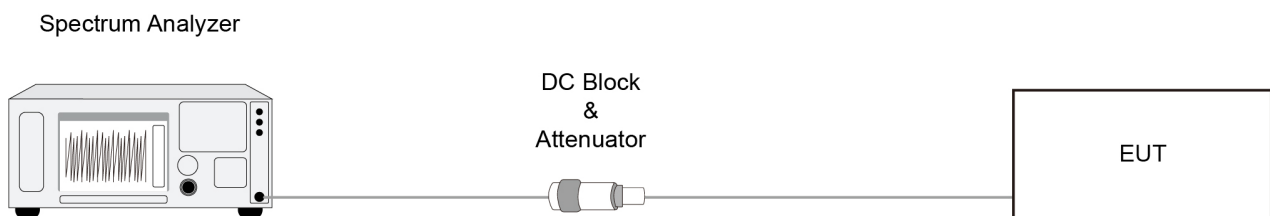

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure


ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

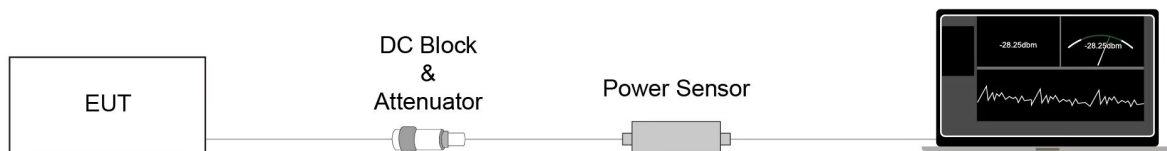

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.10.5

6.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 3 kHz.
5. VBW = 10 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step 1, to the measured PSD to compute the average PSD during the actual transmission time.

6.4.4. Test Setup

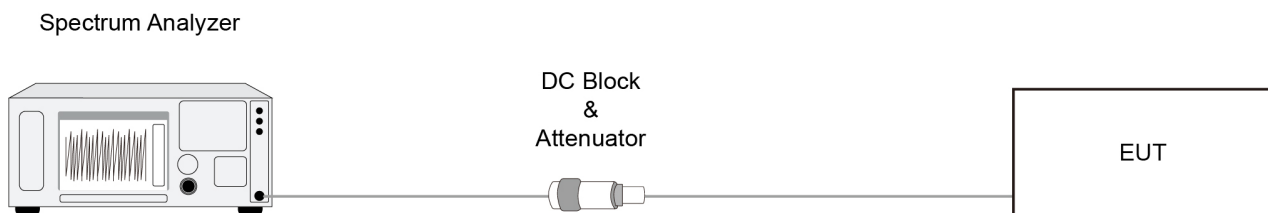

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

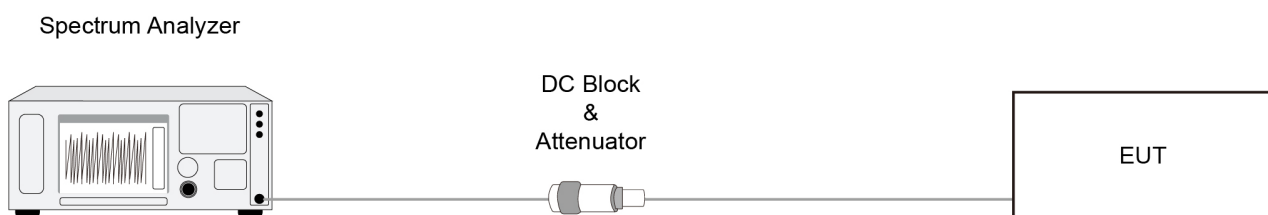

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

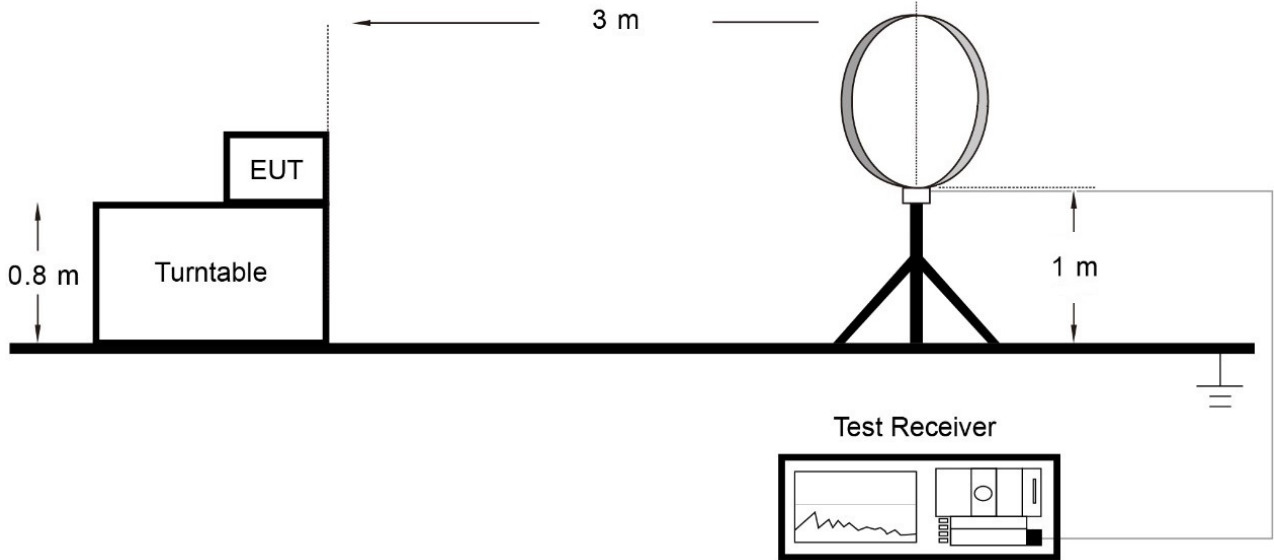

Below 1GHz Test Setup:

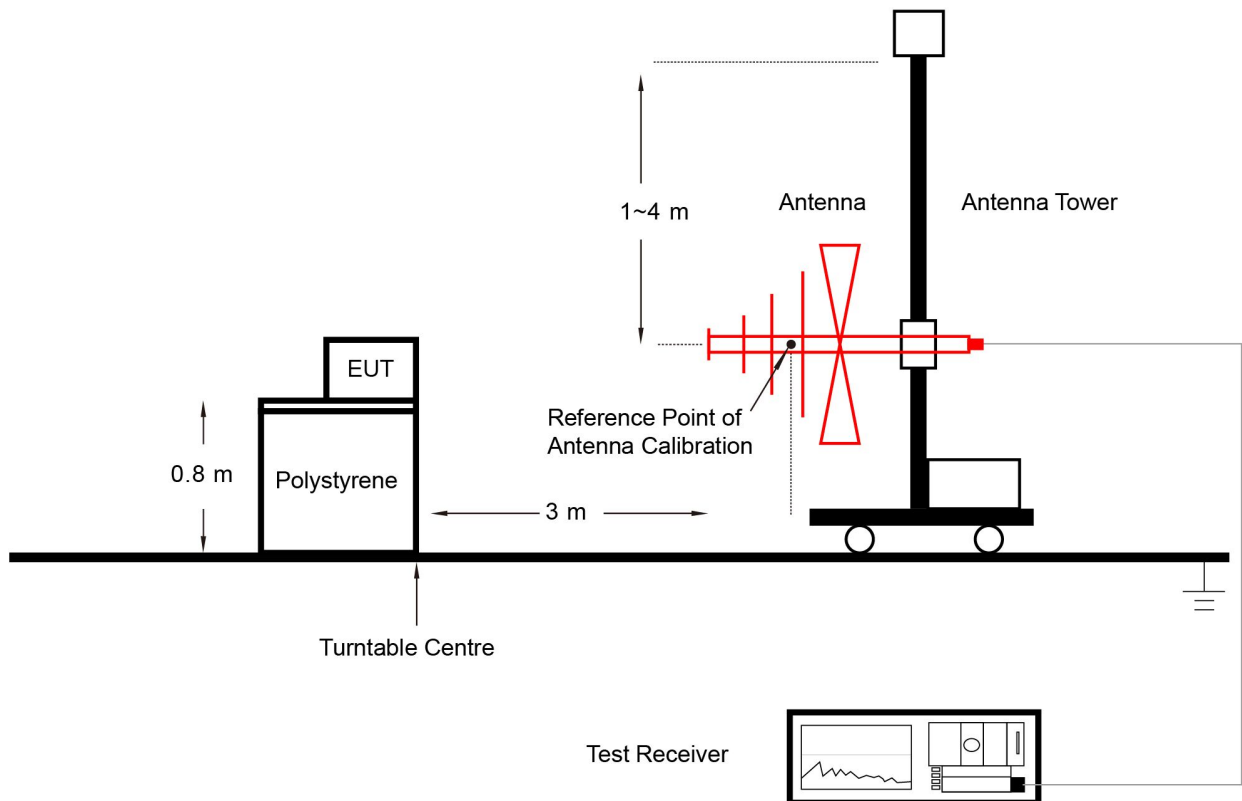

Above 1GHz Test Setup:

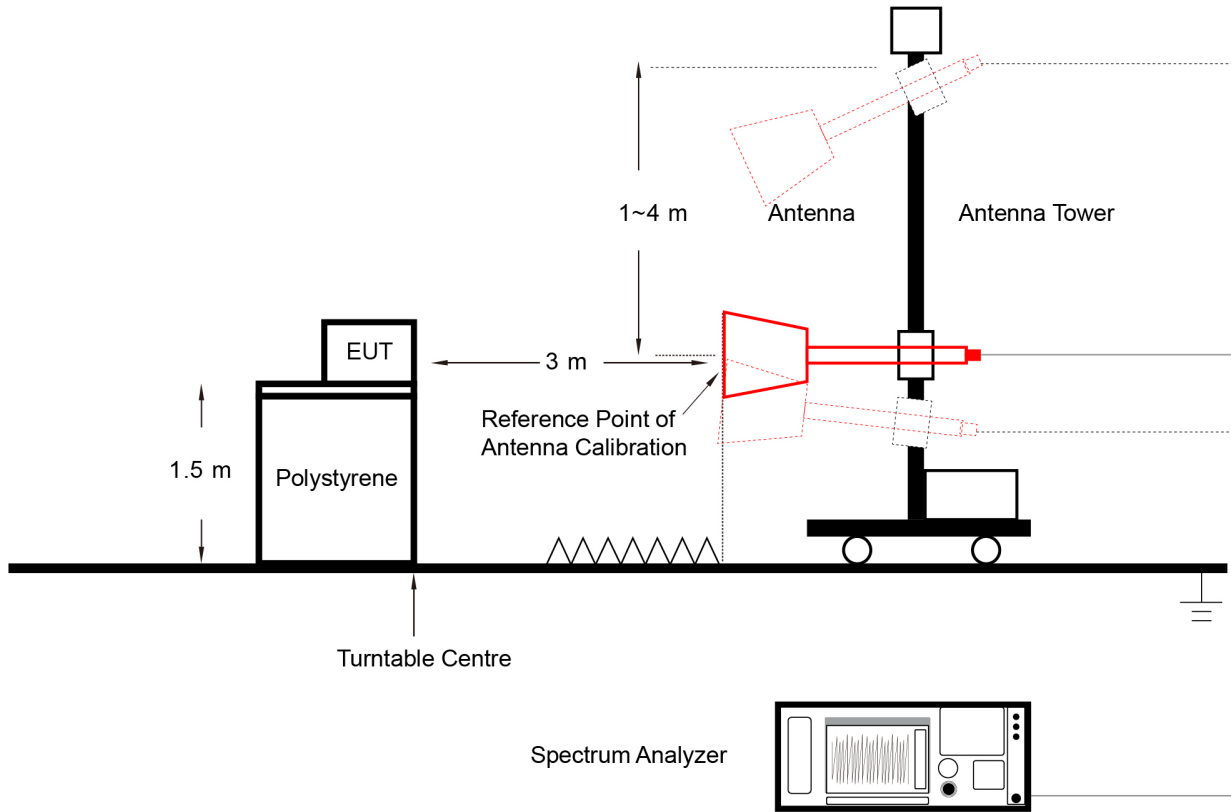

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. Average Type = Voltage
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

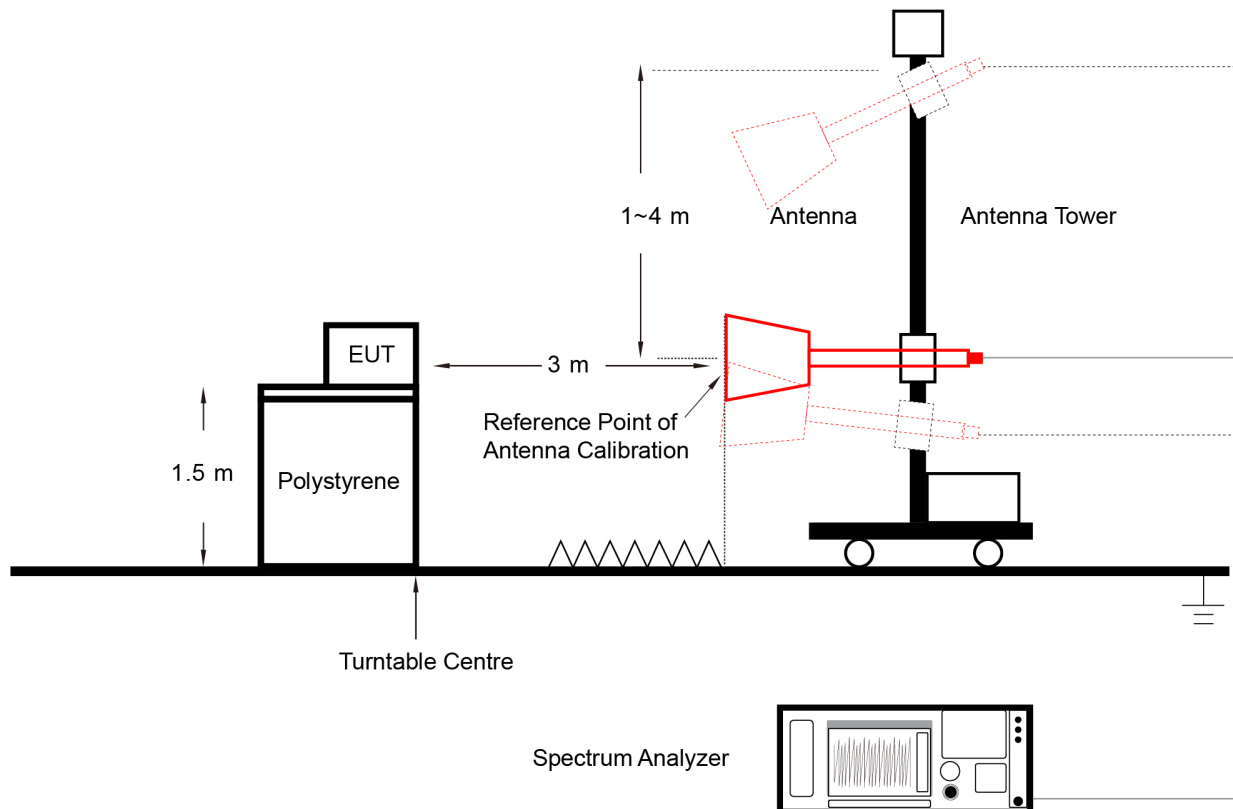

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

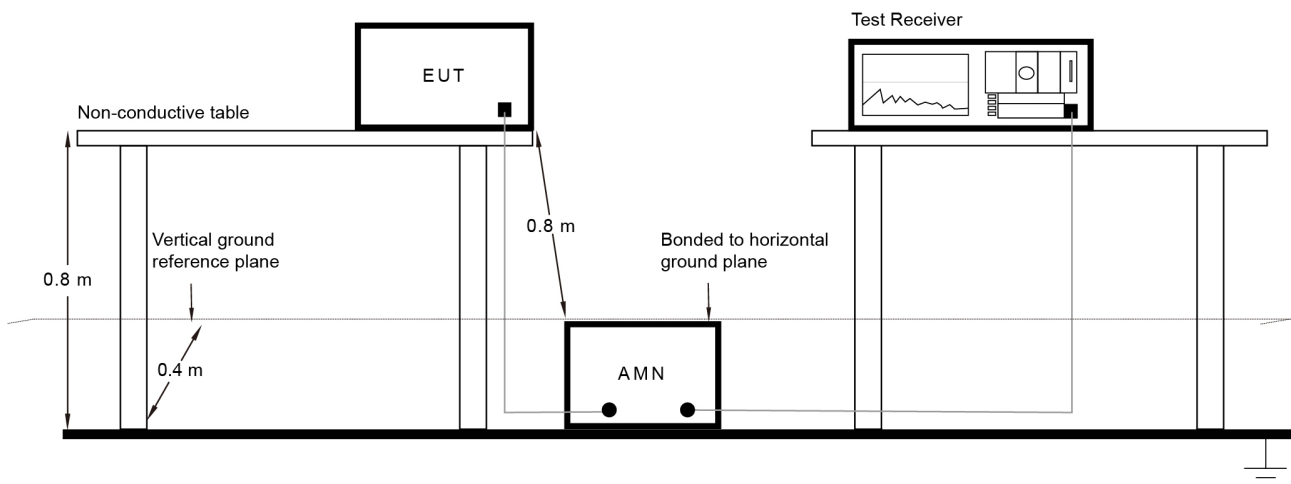

6.8.3. Test Result


The device is powered by a Li-Polymer battery, so this item is not applicable.

Appendix A – Test Result

A.1 Duty Cycle Test Result

Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2023-04-20		


Modulation	T (Transmission Duration)	Duty Cycle
GFSK	1.296ms	33.53%

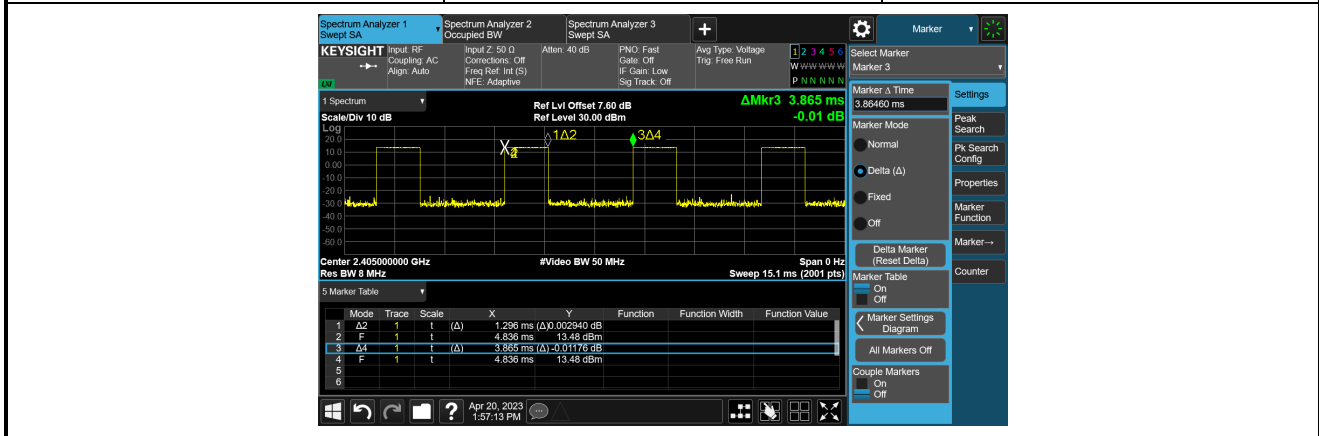

A.2 6dB Bandwidth Test Result

Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2023-04-23		

Modulation	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	11	2405	0.5553	≥ 0.5	Pass
	18	2440	0.5606	≥ 0.5	Pass
	25	2475	0.5623	≥ 0.5	Pass

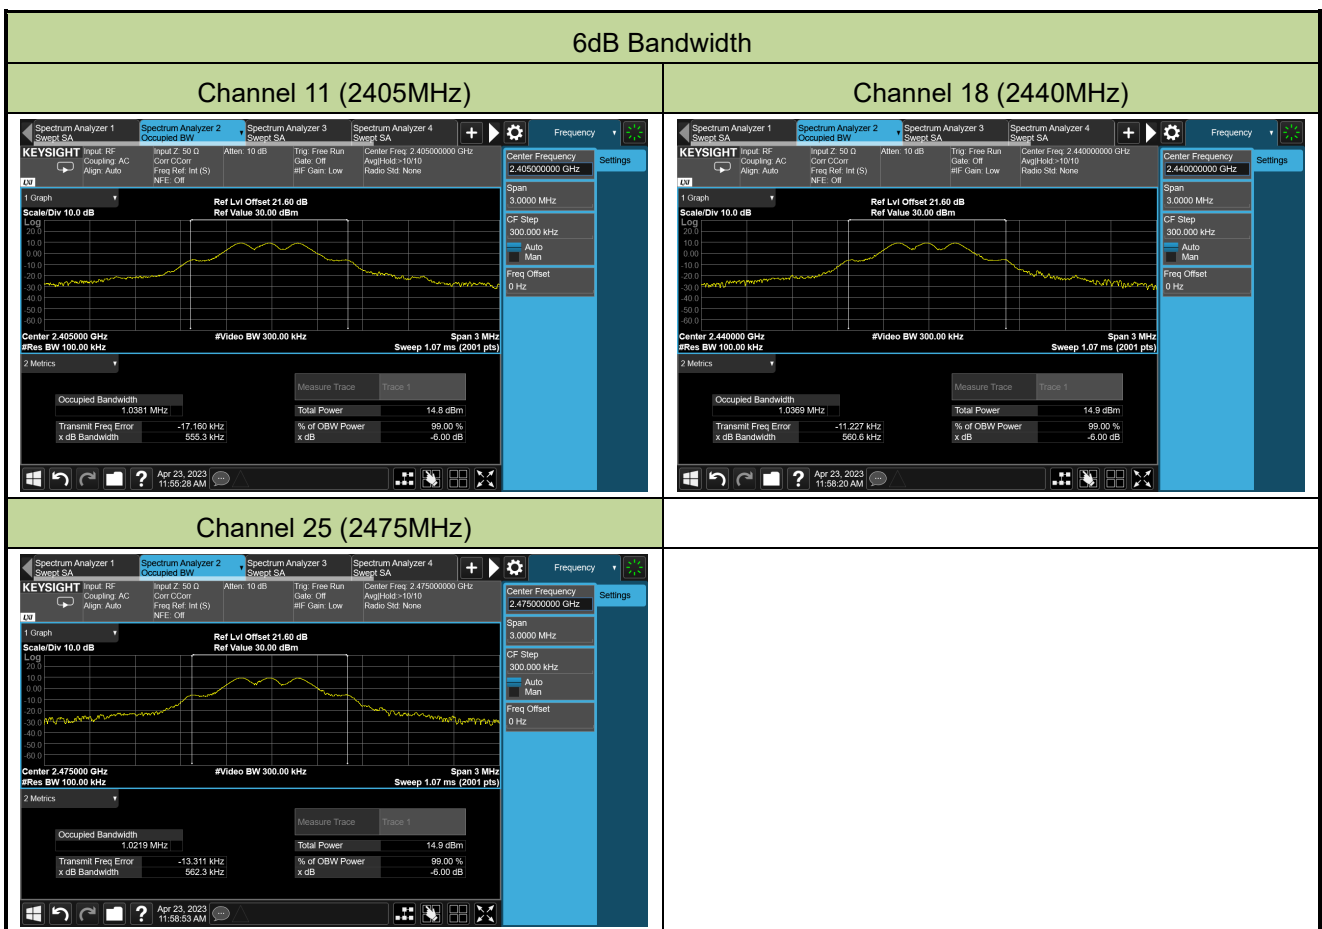

A.3 Output Power Test Result

Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2023-04-23		


Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
GFSK	11	2405	9.10	≤ 30.00	Pass
	18	2440	9.24	≤ 30.00	Pass
	25	2475	9.25	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2023-04-23		

Modulation	Channel No.	Frequency (MHz)	Duty Cycle	AV PSD (dBm/3kHz)	Total AV PSD (dBm/3kHz)	Limit (dBm / 3kHz)	Result
GFSK	11	2405	33.53%	2.452	7.198	≤ 8.00	Pass
	18	2440	33.53%	2.841	7.587	≤ 8.00	Pass
	25	2475	33.53%	2.914	7.660	≤ 8.00	Pass


Note: Total AV PSD (dBm/3kHz) = AV PSD (dBm/3kHz) + 10*log (1/Duty Cycle).

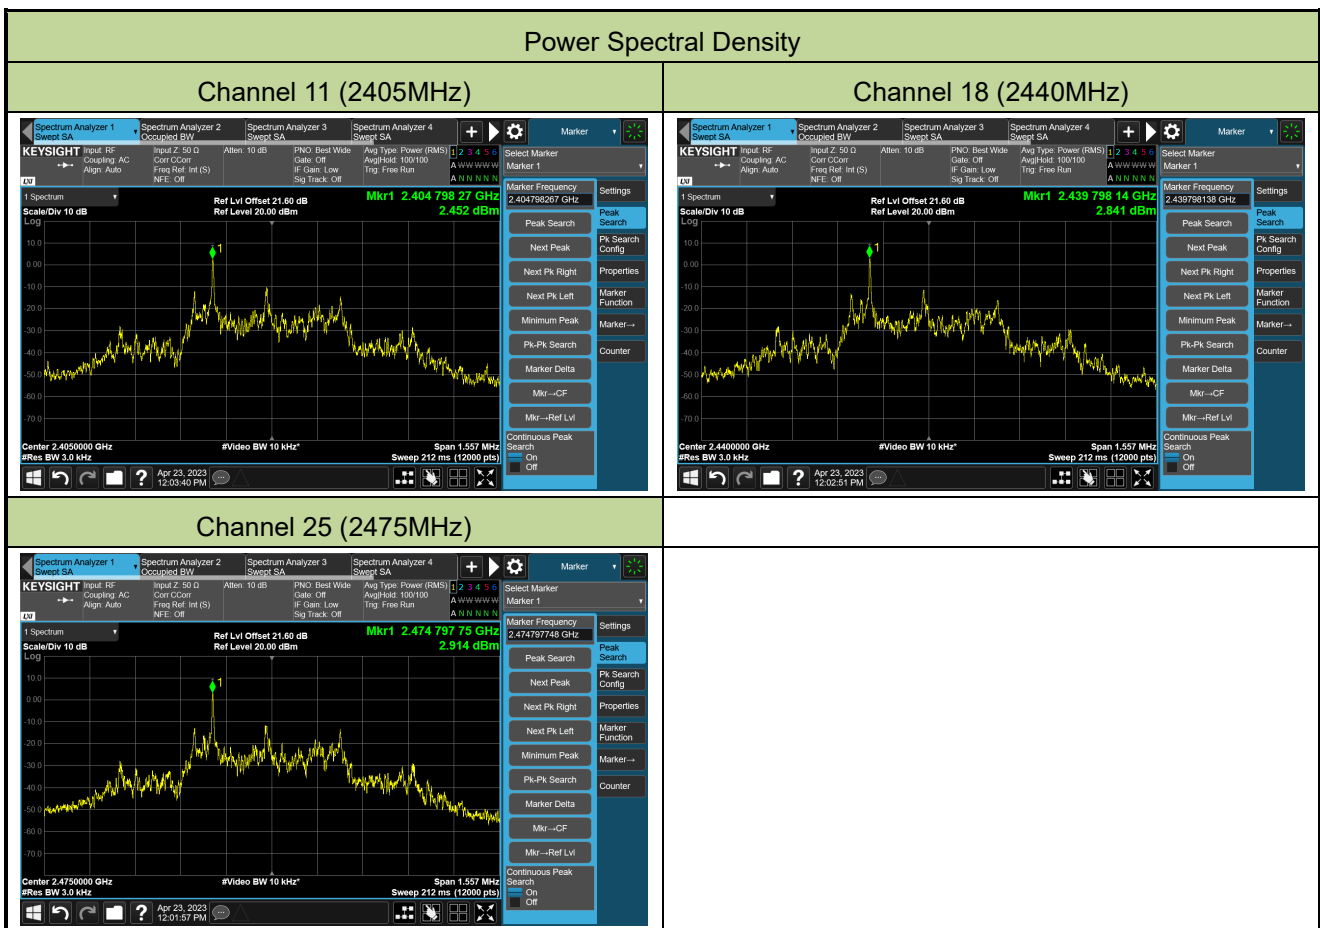

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2023-04-23		

Modulation	Channel No.	Frequency (MHz)	Limit (dBc)	Result
GFSK	11	2405	> 30	Pass
	18	2440	> 30	Pass
	25	2475	> 30	Pass

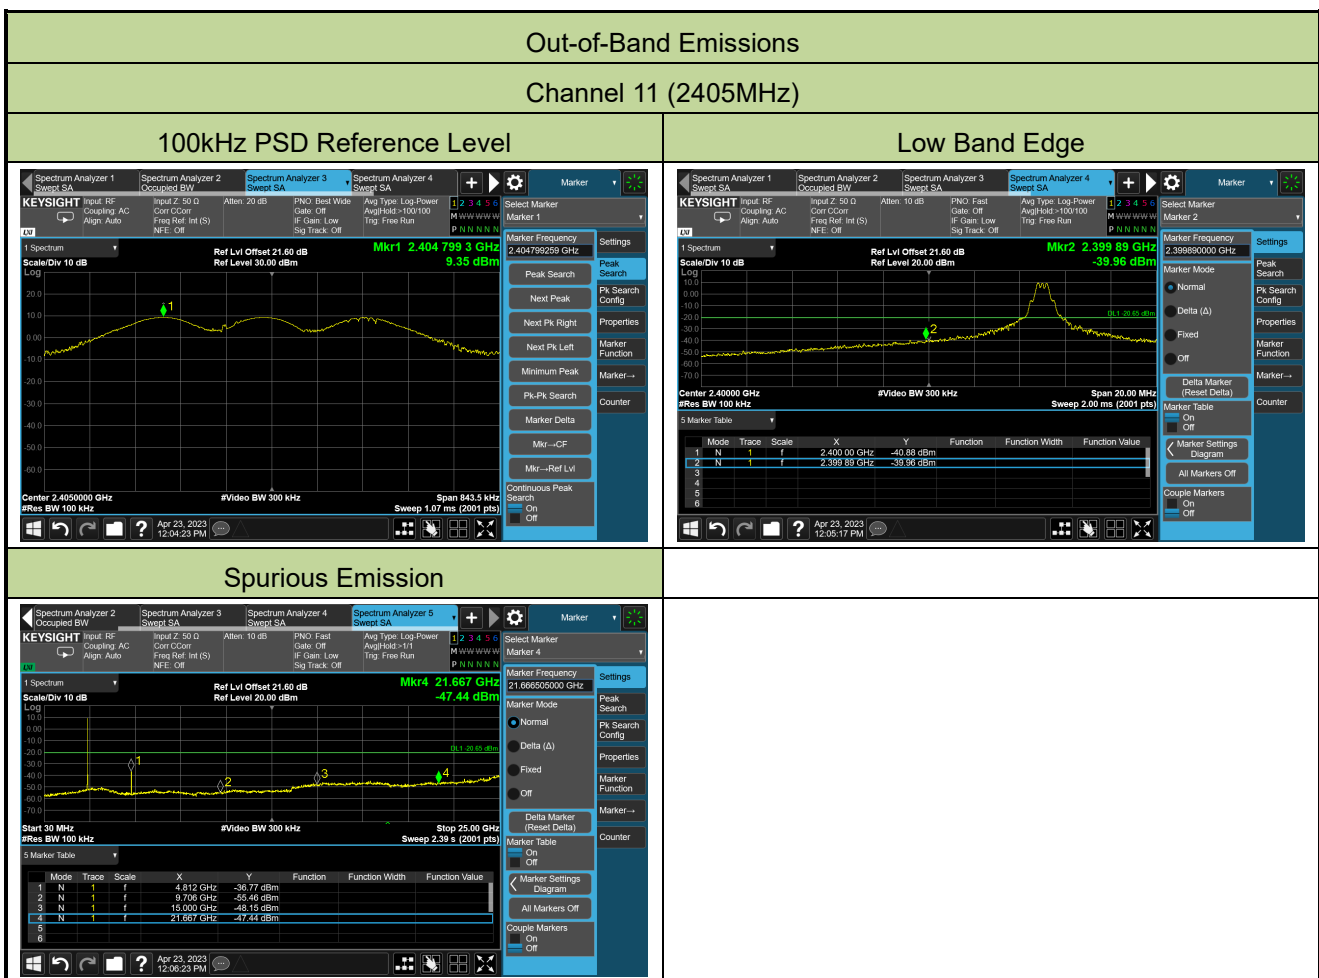


Channel 18 (2440MHz)

100kHz PSD Reference Level

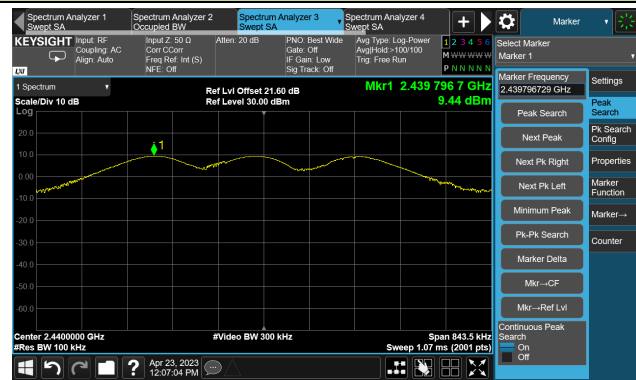


Spurious Emission

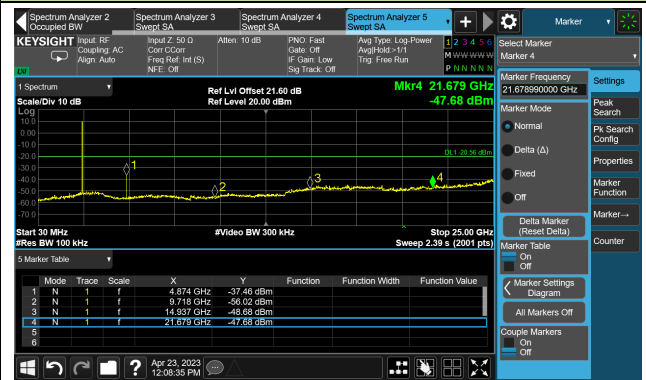


Channel 25 (2475MHz)


100kHz PSD Reference Level

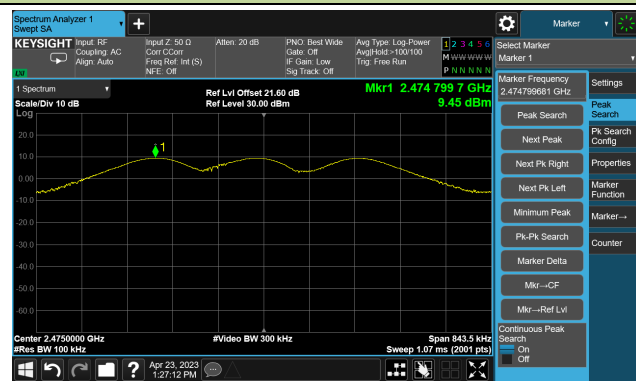

High Band Edge

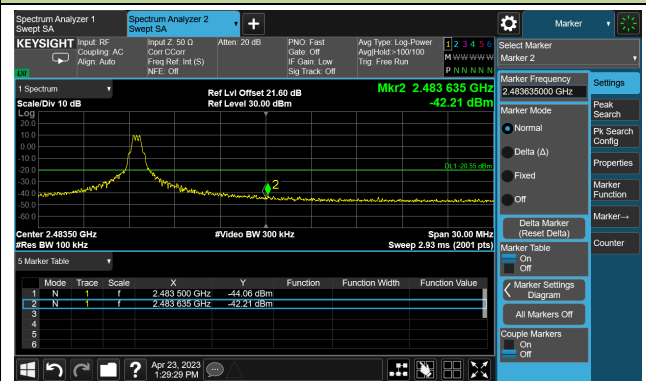

Spurious Emission

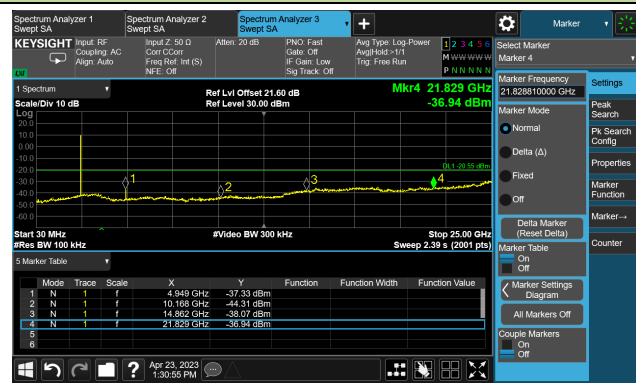

A.6 Radiated Spurious Emission Test Result

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-05-22		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	3711.5	37.2	-0.4	36.8	74.0	-37.2	Peak	Horizontal
	4808.0	49.3	3.3	52.6	74.0	-21.4	Peak	Horizontal
	4808.0	49.0	3.3	52.3	54.0	-1.7	AV	Horizontal
	10970.5	30.5	16.0	46.5	74.0	-27.5	Peak	Horizontal
	4808.0	43.5	3.3	46.8	74.0	-27.2	Peak	Vertical
	7400.5	31.0	11.7	42.7	74.0	-31.3	Peak	Vertical
	11506.0	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical
18	4876.0	46.5	3.0	49.5	74.0	-24.5	Peak	Horizontal
	7315.5	39.1	11.4	50.5	74.0	-23.5	Peak	Horizontal
	11276.5	29.8	16.9	46.7	74.0	-27.3	Peak	Horizontal
	4876.0	45.6	3.0	48.6	74.0	-25.4	Peak	Vertical
	7324.0	35.0	11.4	46.4	74.0	-27.6	Peak	Vertical
	12075.5	31.8	16.8	48.6	74.0	-25.4	Peak	Vertical
25	4952.5	50.5	3.1	53.6	74.0	-20.4	Peak	Horizontal
	4952.5	50.5	3.1	53.6	54.0	-0.4	AV	Horizontal
	7426.0	38.8	11.7	50.5	74.0	-23.5	Peak	Horizontal
	11489.0	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
	4952.5	49.7	3.1	52.8	74.0	-21.2	Peak	Vertical
	4952.5	49.5	3.1	52.6	54.0	-1.4	AV	Vertical
	7426.0	38.3	11.7	50.0	74.0	-24.0	Peak	Vertical
	12186.0	32.0	17.7	49.7	74.0	-24.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit at 2475MHz	

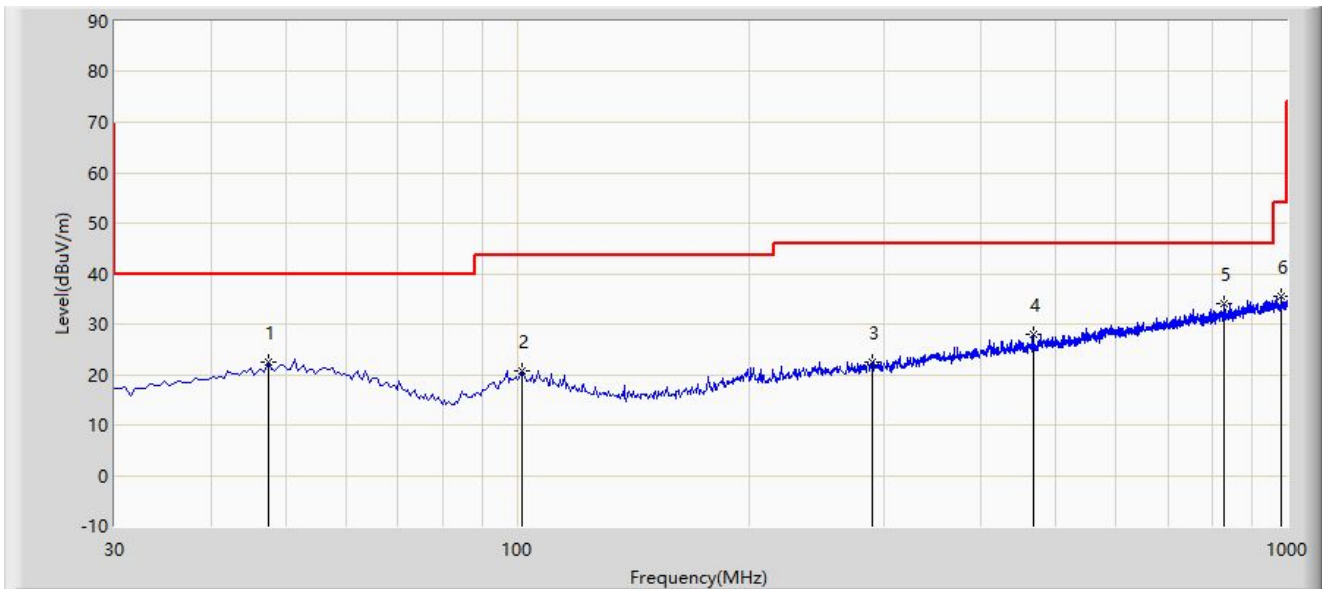

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		47.460	22.541	2.245	-17.459	40.000	20.296	PK
2		101.295	20.593	1.976	-22.907	43.500	18.618	PK
3		288.990	22.500	1.631	-23.500	46.000	20.869	PK
4		467.955	28.064	3.693	-17.936	46.000	24.371	PK
5	*	827.340	34.112	3.985	-11.888	46.000	30.127	PK
6		984.480	35.415	3.648	-18.585	54.000	31.767	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit at 2475MHz	

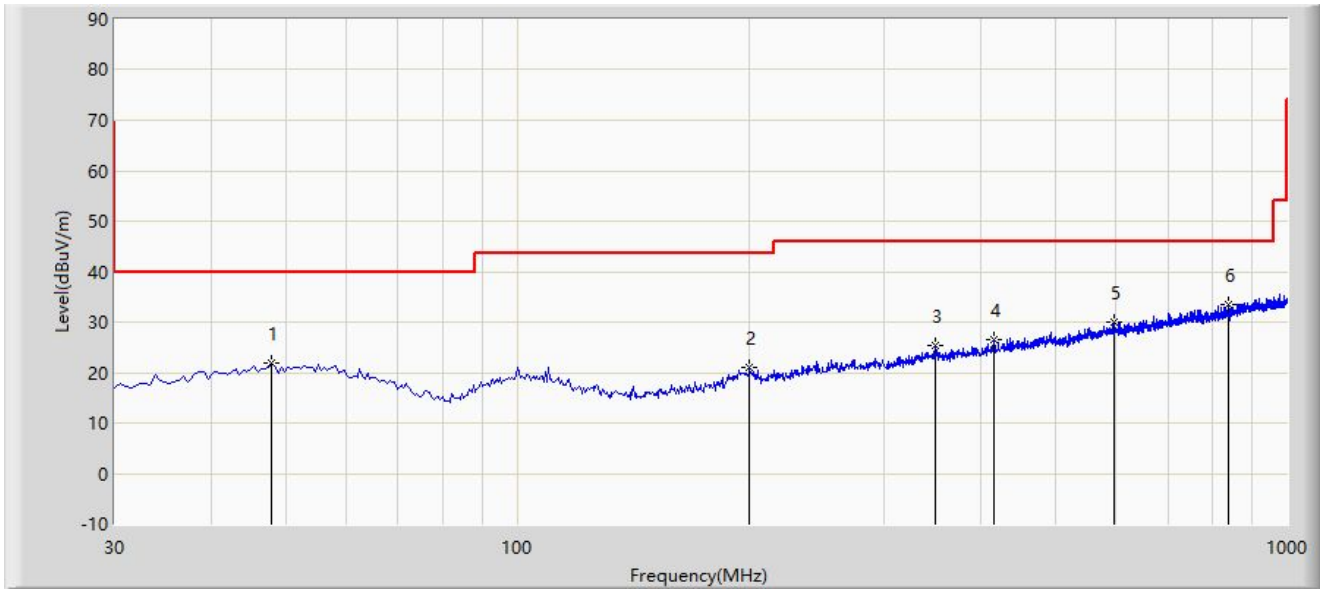

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		47.945	21.937	1.601	-18.063	40.000	20.336	PK
2		200.235	21.143	2.285	-22.357	43.500	18.858	PK
3		348.645	25.271	2.437	-20.729	46.000	22.833	PK
4		416.060	26.649	2.936	-19.351	46.000	23.713	PK
5		595.025	30.101	3.084	-15.899	46.000	27.017	PK
6	*	838.980	33.400	3.184	-12.600	46.000	30.216	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit at 2405MHz	

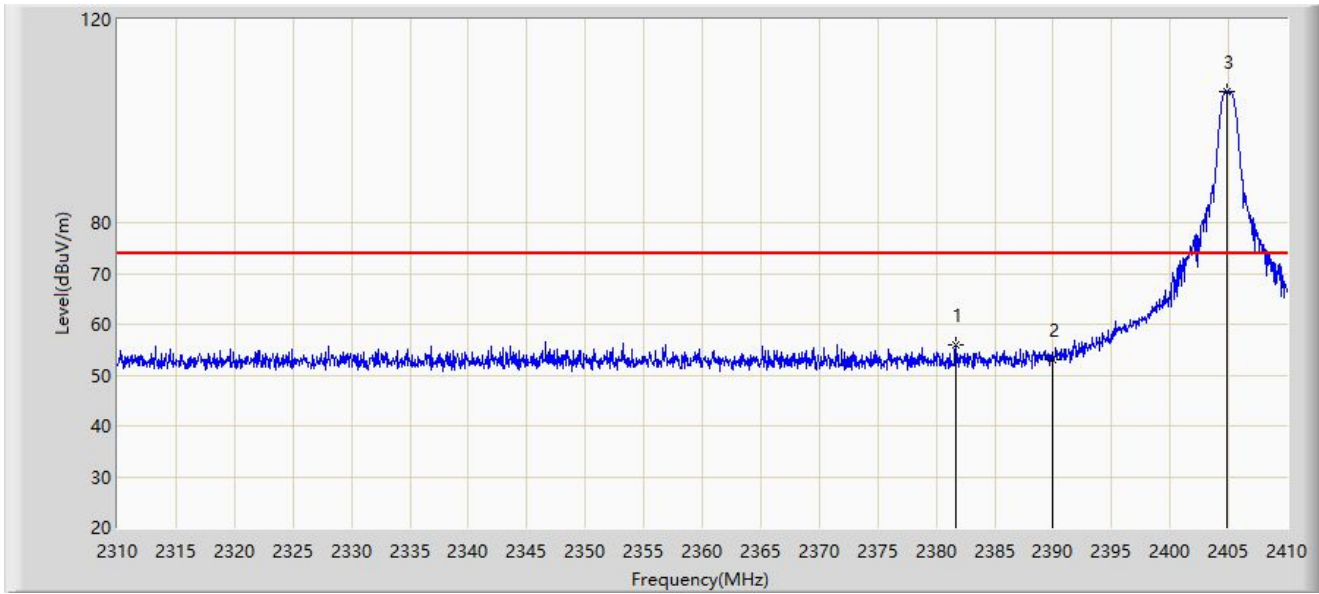


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2381.700	55.901	24.244	-18.099	74.000	31.657	PK
2		2390.000	52.970	21.355	-21.030	74.000	31.615	PK
3		2404.800	105.902	74.361	N/A	N/A	31.541	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit at 2405MHz	

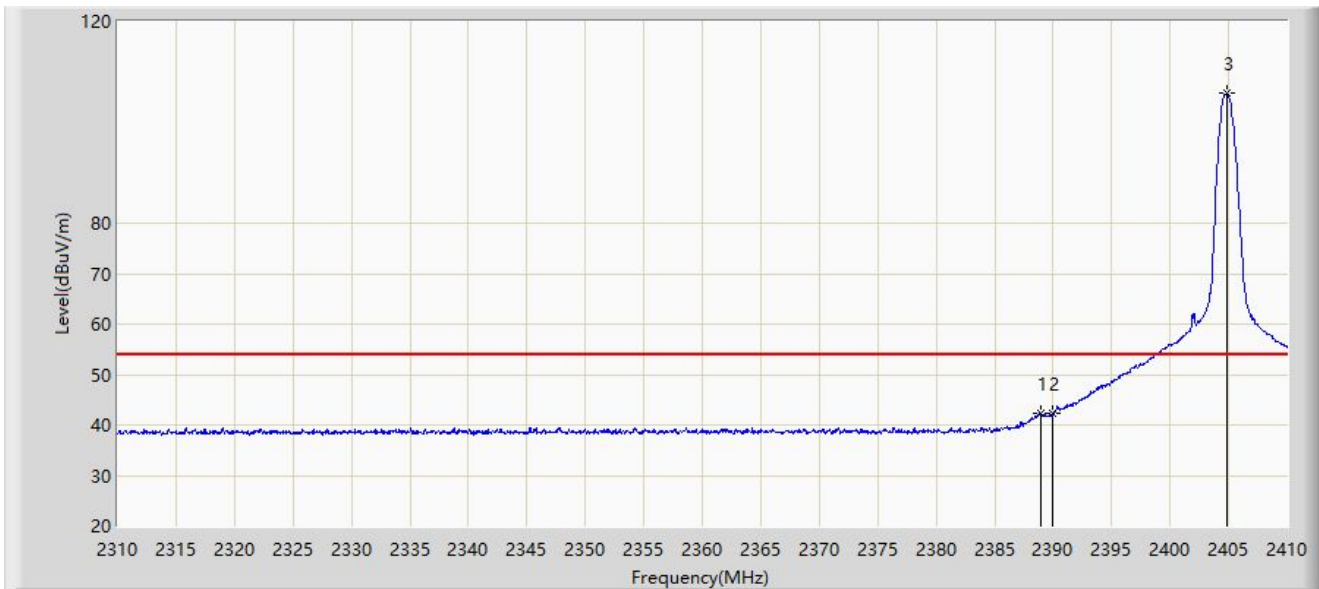


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.900	42.382	10.760	-11.618	54.000	31.622	AV
2		2390.000	42.185	10.570	-11.815	54.000	31.615	AV
3		2404.850	105.732	74.191	N/A	N/A	31.541	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit at 2405MHz	

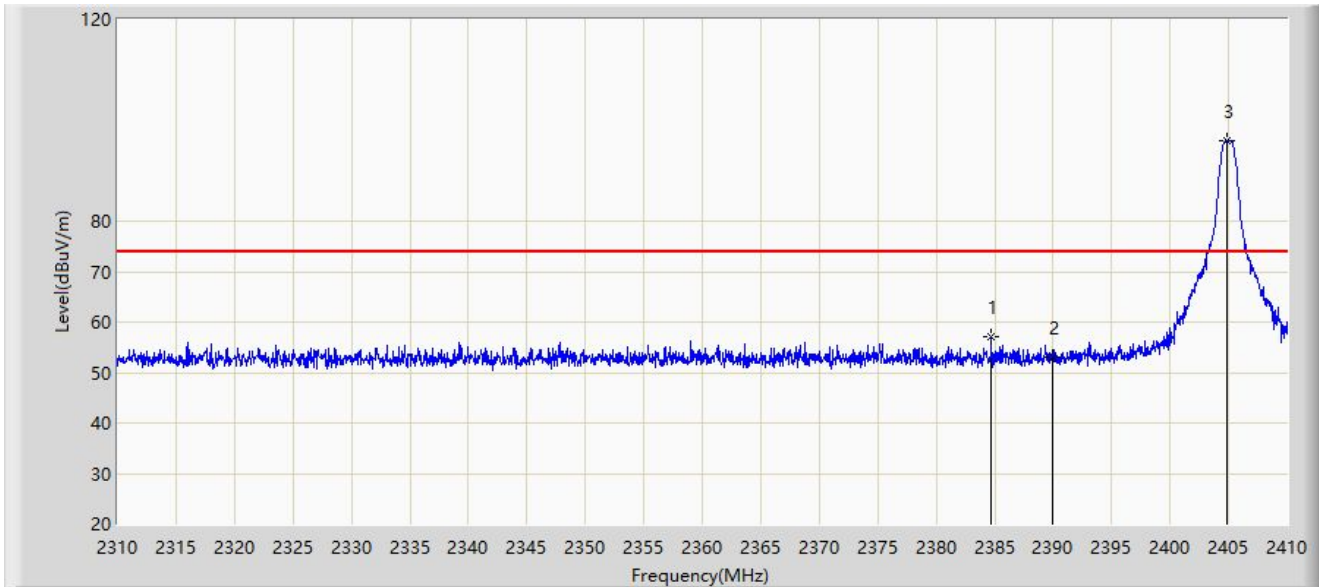


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.700	57.088	25.440	-16.912	74.000	31.648	PK
2		2390.000	52.942	21.327	-21.058	74.000	31.615	PK
3		2404.800	95.968	64.427	N/A	N/A	31.541	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit at 2405MHz	

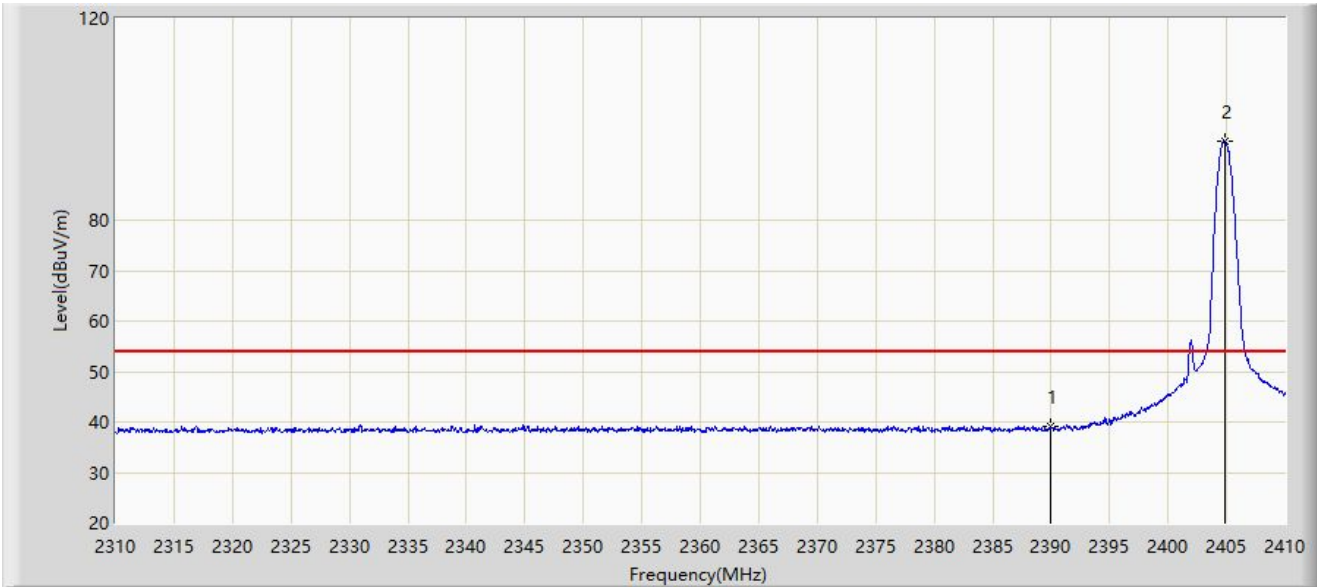


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	39.013	7.398	-14.987	54.000	31.615	AV
2		2404.800	95.766	64.225	N/A	N/A	31.541	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit by Zigbee at 2475MHz	

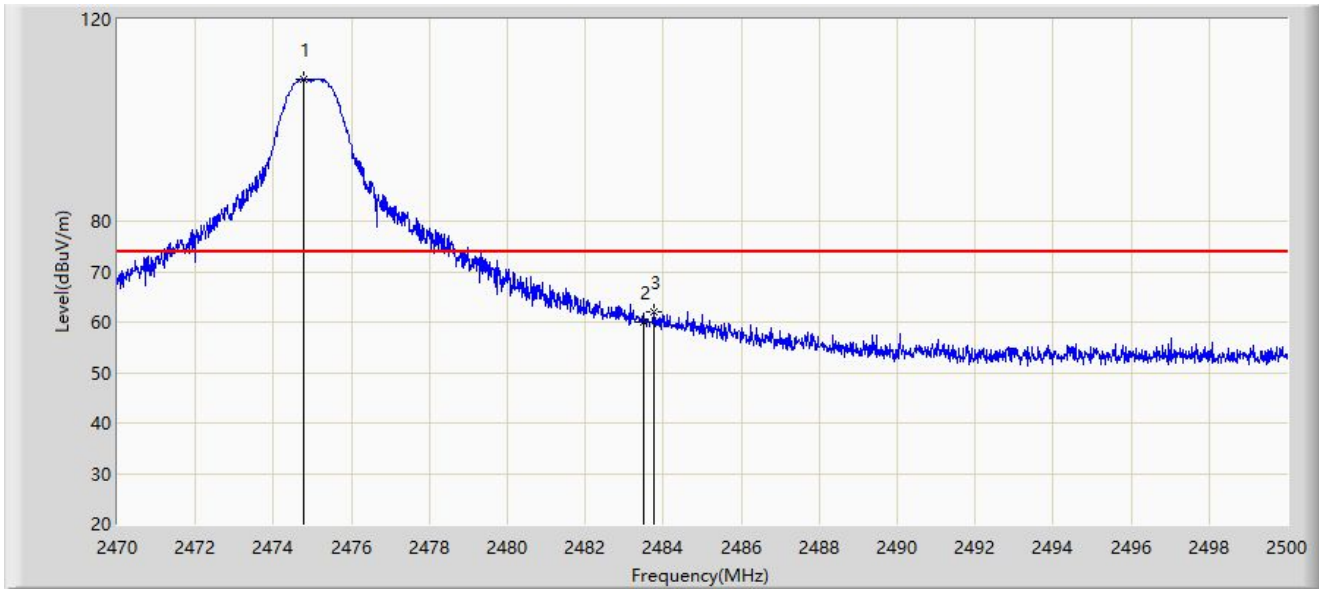


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.770	108.092	76.591	N/A	N/A	31.501	PK
2		2483.500	60.120	28.620	-13.880	74.000	31.500	PK
3	*	2483.755	62.131	30.630	-11.869	74.000	31.501	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit by Zigbee at 2475MHz	

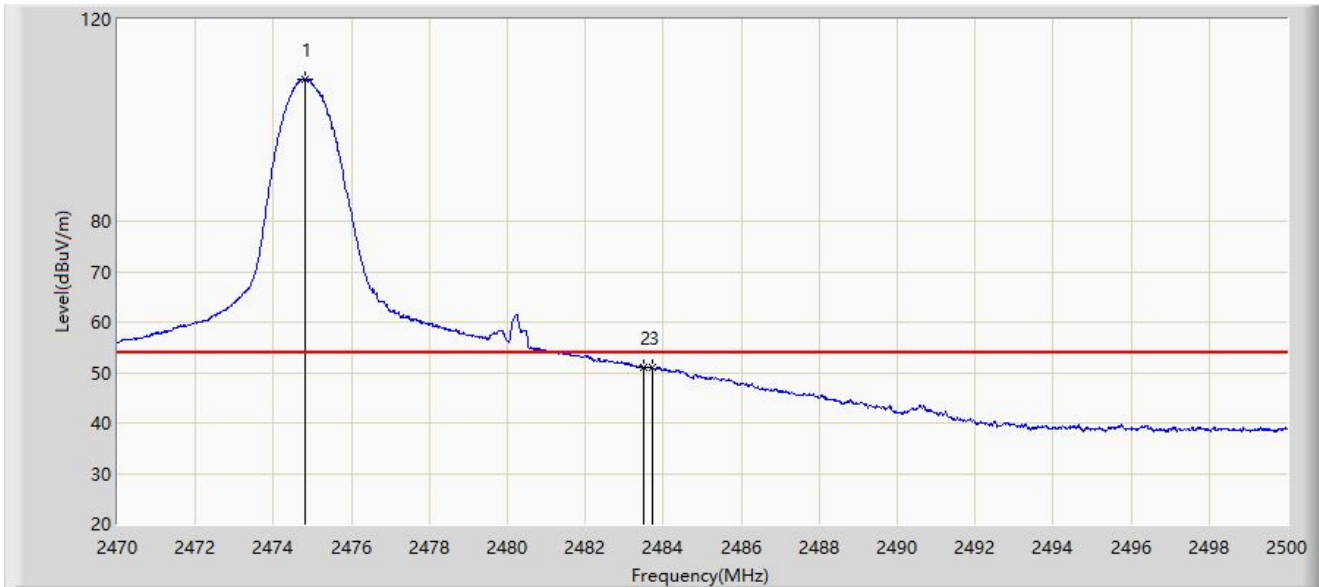


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.830	108.089	76.588	N/A	N/A	31.501	AV
2		2483.500	50.940	19.440	-3.060	54.000	31.500	AV
3	*	2483.710	51.086	19.585	-2.914	54.000	31.501	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit by Zigbee at 2475MHz	

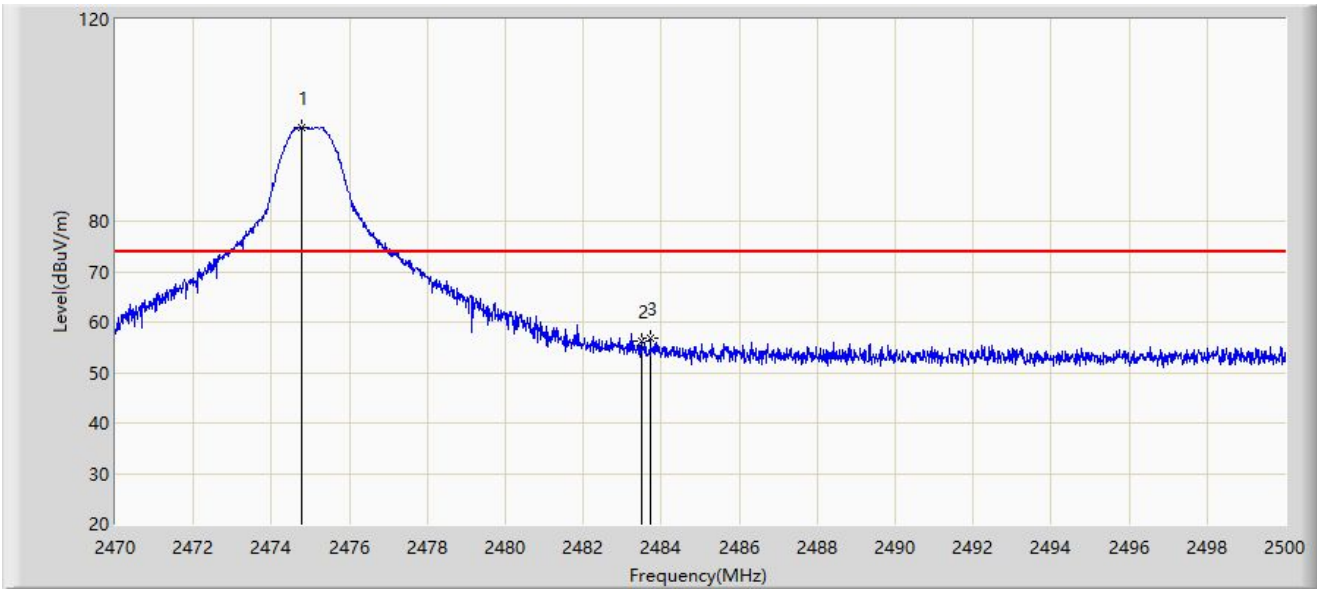


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.785	98.648	67.147	N/A	N/A	31.501	PK
2		2483.500	56.303	24.803	-17.697	74.000	31.500	PK
3	*	2483.725	56.837	25.336	-17.163	74.000	31.501	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2023-05-22
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Duet RTF	Power: By Battery
Test Mode: Transmit by Zigbee at 2475MHz	

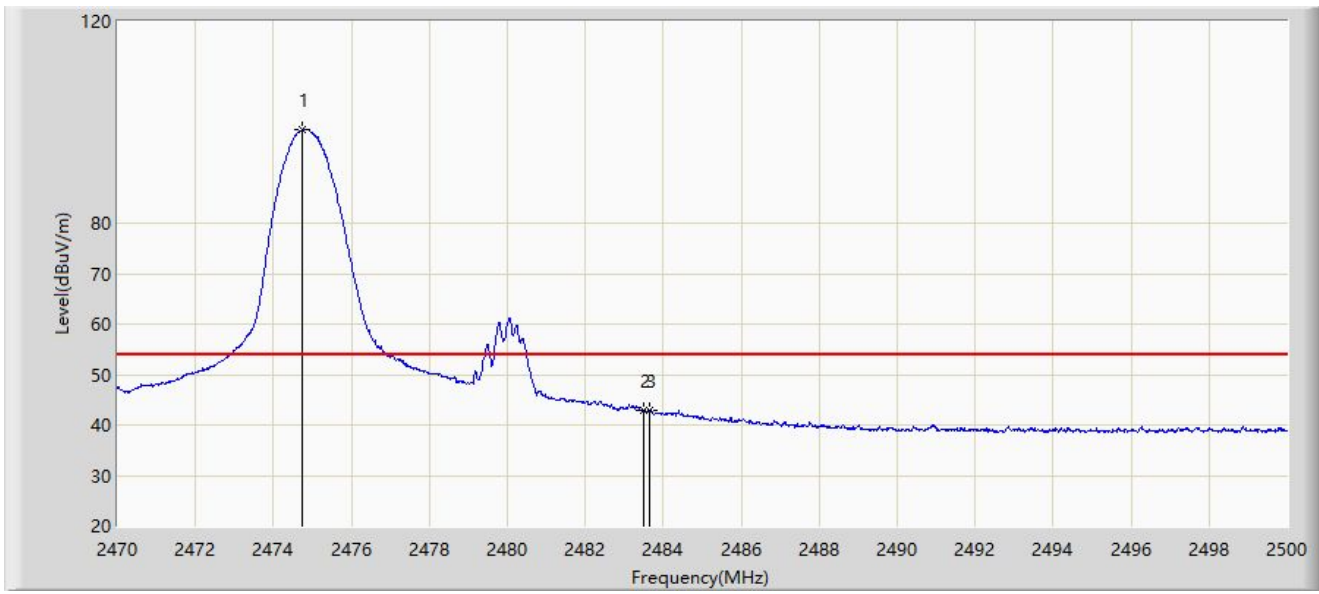

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2474.740	98.499	66.998	N/A	N/A	31.501	AV
2		2483.500	42.804	11.304	-11.196	54.000	31.500	AV
3	*	2483.650	42.961	11.460	-11.039	54.000	31.501	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Appendix B – Test Setup Photograph

Refer to “2305RSU047-UT” file.

Appendix C – EUT Photograph

Refer to “2305RSU047-UE” file.

_____ The End _____