

# CENTRE OF TESTING SERVICE INTERNATIONAL

**OPERATE ACCORDING TO ISO/IEC 17025** 

# FCC ID/IC TEST REPORT

TEST REPORT NUMBER: CGZ3170302-00242-EFI



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China





TEST REPORT For FCC ID/IC					
47 CFR P	47 CFR PART 15 OCT, 2016; RSS-210 Issue 9				
Report Reference No	CGZ3170302-00242-EFI				
Date of issue	. 13 March 2017				
Testing Laboratory Name	CENTRE OF TESTING SERVICE CO., LTD.				
Address	A101,No.65,Zhuji Highway,Tianhe District,Guangzhou, China				
Testing location/ procedure	Full application of Harmonised standards ■				
	Partial application of Harmonised standards $\square$				
	Other standard testing method $\square$				
Applicant's name	Horizon Hobby, LLC				
Address	4105 Fieldstone Road, Champaign, IL 61822, USA				
Test specification					
Standard	. 47 CFR PART 15 OCT, 2016; RSS-210 Issue 9; RSS-Gen Issue 4				
	ANSI C63.10:2013				
Test Report Form No	CTSEMC-1.0				
TRF Originator	CENTRE OF TESTING SERVICE CO., LTD.				
Master TRF	Dated 2009-01				
CENTRE OF TESTING SERVICE C	O., LTD. All rights reserved.				
CENTRE OF TESTING SERVICE C material. CENTRE OF TESTING SE	in whole or in part for non-commercial purposes as long as the CO., LTD is acknowledged as copyright owner and source of the ERVICE CO., LTD takes no responsibility for and will not assume liability er's interpretation of the reproduced material due to its placement and				
Test item description	:: Ascent MTx				
Trade Mark	Revolution				
Manufacturer	. Horizon Hobby, LLC				
Model/Type reference	. RVOF1100				
Ratings	. Battery 1.5V*4				
Operating Frequency	2405.0MHz ~2475.0MHz				
Result	Positive				

Compiled by:

Supervised by:

Approved by:

Kate zhang / Fileadministrators

Duke yang / Technique principal

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





# FCC ID/IC -- TEST REPORT

Test Report No. : CGZ3170302-00242-EFI 

13 March 2017
Date of issue

Type / Model	RVOF1100
EUT	Ascent MTx
Applicant	Horizon Hobby, LLC
Address	4105 Fieldstone Road, Champaign, IL 61822, USA
Telephone	+1-217 4033657
Fax	1
Contact	Erin Hassan
Manufacturer	Horizon Hobby, LLC
Address	4105 Fieldstone Road, Champaign, IL 61822, USA
Telephone	+1-217 4033657
Fax	
Contact	Erin Hassan
Factory	Horizon Hobby, LLC
Address	4105 Fieldstone Road, Champaign, IL 61822, USA
Telephone	+1-217 4033657
Fax	1
Contact	Erin Hassan

# Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.



# **TABLE OF CONTENTS**

<u>Description</u>	Page
1.TEST STANDARDS	5
2.SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	
3.EQUIPMENT UNDER TEST	5
3.1 Power supply system utilised	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	
3.4 EUT CONFIGURATION	
4.TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 Test facility	
4.3 Environmental conditions	7
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	8
5.SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6.POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	9
6.2. BLOCK DIAGRAM OF TEST SETUP	
6.3. POWER LINE CONDUCTED EMISSION TEST LIMITS	
6.4.Test Procedure	
6.5. POWER LINE CONDUCTED EMISSION TEST RESULTS	
7.RADIATED DISTURBANCE (ELECTRIC FIELD)	
7.1.Test Equipment	
7.2.BLOCK DIAGRAM OF TEST SETUP	10
7.3.RADIATED EMISSION LIMIT:	
7.4.TEST PROCEDURE	
7.5.RADIATED EMISSION TEST RESULTS	12
8.BAND EDGE COMPLIANCE TEST	20
8.1. Test Equipment	20
8.2. TEST INFORMATION	
Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.	

CENTRE OF TESTING SERVICE CO., LTD.

# FCC ID:BRWRVOF1100 IC:6157A-RVOF1100 CENTRE OF TESTING SERVICE





8.3. TEST PROCEDURE	20
8.4. TEST RESULTS	20
9. 99% BANDWIDTH	25
9.1 TEST PROCEDURE	25
9.2. TEST EQUIPMENT	25
9.3. TEST RESULTS	25
10 ANTENNA REQUIREMENTS	28
10.1 STANDARD APPLICABLE	28
10.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	28
11.DEVIATION TO TEST SPECIFICATIONS	20
II.DEVIATION TO TEST SPECIFICATIONS	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





# 1.TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2016
- RSS-210 Issue 9
- RSS-Gen Issue 4
- ANSI C63.10:2013

# 2.SUMMARY

#### 2.1 GENERAL REMARKS

Date of receipt of test sample	02 March 2017
Testing commenced on	02~13 March 2017
Testing concluded on	13 March 2017

#### 2.2 FINAL ASSESSMENT

The FCC/IC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- □ **not** fulfilled.

The equipment under test

- fulfils the FCC/IC requirements cited on page 1.
- **does not** fulfil the FCC/IC requirements cited on page 1.

# 3.EQUIPMENT UNDER TEST

# 3.1 Power supply system utilised

Power supply voltage : ■ Battery 1.5V\*4

# 3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

#### 3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- ☐ TX- Y position
- ☐ TX- Zposition
- TX- X position

Operation mode 1:TX-X Position Low (2405MHz) , TX-X Position Middle (2445MHz ), TX-X Position High (2475MHz)

Note:Operation mode 1 TX -X position of EUT is the radiated test worst case; so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





# 3.4 EUT configuration

# 3.4.1. Description of configuration (EUT)

Description	:	Ascent MTx
Model Number	:	RVOF1100
Operation frequency	:	2405~ 2475 MHz ISM Band
Modulation Technology	:	GFSK Modulation
Antenna	:	Internal fix antenna, met requirement of FCC 15.203; 2dBi

# 3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





# 4.TEST ENVIRONMENT

# 4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

# 4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

# IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011.

# FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

#### 4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

# 4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- ☐ The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

# 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170302-00242-EFI Page 7 of 28





# 4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

<sup>(1).</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

# 5. Summary of standards and results

# 5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION				
Description of Test Item	Standard	Results		
Conducted Emission Test	FCC Part 15 § 15.207 RSS-Gen Issue 4§ 7.2.4 ANSI C63.10:2013	N/A		
Radiated Emission Test	RSS-Gen Issue 4§ 7.2 RSS-210 Issue 9 § B.10 FCC Part 15 C § 15.249 FCC Part 15 § 209 ANSI C63.10:2013	PASSED		
Receiver Spurious Emissions	RSS-Gen Issue 4§ 4.10 ANSI C63.10:2013	PASSED		
Band Edge Compliance Test	RSS-210 Issue 9 § 4.1 RSS-Gen Issue 4 § 8.10 FCC Part 15 C § 15.249 ANSI C63.10:2013	PASSED		
99% Bandwidth	RSS-Gen Issue 4 § 6.6 ANSI C63.10:2013	PASSED		
N/A is an abbreviation for Not Applicable.				

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





# 6. Power Line Conducted Emission Test

# **6.1.Test Equipment**

Conducted Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2016/10
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2016/10
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2016/10
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2016/10
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2016/10

# 6.2. Block Diagram of Test Setup

EUT

(EUT: Ascent MTx)

## 6.3. Power Line Conducted Emission Test Limits

Standard: RSS-Gen: 7.2.4, FCC Part 15: 15.207, ANSI C63.10:2013

		Maximum RF Line Voltage		
Frequency		Quasi-Peak Level	Average Level	
requeriey		dB(μV)	dB(μV)	
150kHz	~ 500kHz	66 ~ 56*	56 ~ 46*	
500kHz	~ 5MHz	56	46	
5MHz	~ 30MHz	60	50	

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 6.4.Test Procedure

The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

# 6.5. Power Line Conducted Emission Test Results

Note: The EUT is power supply by battery, Not applicable.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn






# 7. Radiated disturbance (electric field)

# 7.1.Test Equipment

Radiated disturbance (electric field)					
Item	m Test Equipment Manufacturer Model No. Serial No. Last Ca				
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2016/10
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2016/03
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2016/03
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2016/03
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2016/03
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2016/10

# 7.2.Block Diagram of Test Setup

# 7.2.1 Block Diagram of connection between EUT and simulators

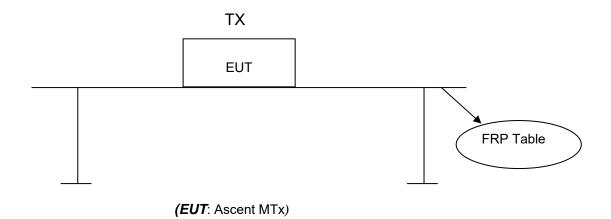

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471


Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





#### 7.2.2 Anechoic Chamber Setup Diagram

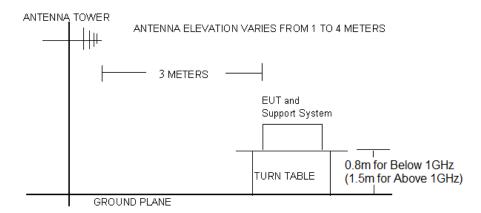

# 7.3. Radiated Emission Limit:

Standard: FCC 15.249, FCC 15.209; RSS-Gen:7.2; RSS-210 B.10.

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

FRE	QUEN	CY	DISTANCE	FIELD STRENGTHS LIMIT		
	MHz		Meters	μV/m	dB(μV)/m	
0.009	~	0.490	300	2400/F(kHz)		
0.490	~	1.705	30	24000/F(kHz)		
1.705	~	30	30	30		
30	~	88	3	100	40.0	
88	~	216	3	150	43.5	
216	~	960	3	200	46.0	
960	~	1000	3	500	54.0	
Λ.	Above 1000		3	Other:74.0 dB(μV)/m (Peak)		
Above 1000		000	3	54.0 dB(μV)/m (Average)		

Remark:

- (1) Emission level  $dB\mu V = 20 \log Emission level \mu V/m$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





#### 7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high (1.5m for above 1GHz) above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 2MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

#### 7.5. Radiated Emission Test Results

#### PASSED.

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

# FCC ID:BRWRVOF1100 IC:6157A-RVOF1100 CENTRE OF TESTING SERVICE





Test Mode:	TX –X Position Mode	Result:	■ - passed
Frequency range:	9KHz~30MHz		$\square$ - not passed

No.	Frequency (MHz)	Factor (dB)		Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
Remark: The test result reading value is to low, margin all > 20dB of the limit.							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


# FCC ID:BRWRVOF1100 IC:6157A-RVOF1100 CENTRE OF TESTING SERVICE





Channel:	TX –X Position	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	30MHz-1GHz		

EUT	Ascent MTx
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	02~13 March 2017
Operator	Duke
MODEL NO	RVOF1100

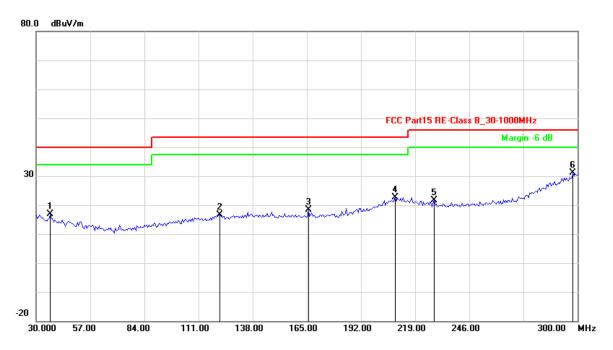


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	37.0341	-16.08	32.87	16.79	40.00	-23.21	QP	
2	121.4429	-16.03	32.61	16.58	43.50	-26.92	QP	
3	165.8116	-15.39	33.69	18.30	43.50	-25.20	QP	
4	209.0982	-9.77	32.52	22.75	43.50	-20.75	QP	
5	228.5772	-11.15	32.74	21.59	46.00	-24.41	QP	
6	297.8357	-1.70	32.83	31.13	46.00	-14.87	QP	
Remark	Remark: Other frequency mini margin all >6 dB of Limit							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





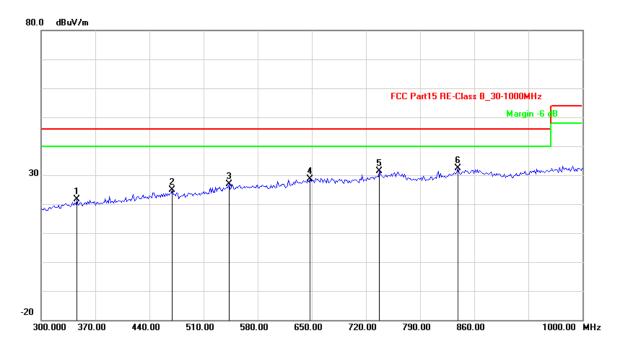

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	346.2925	-11.19	32.85	21.66	46.00	-24.34	QP	
2	469.7394	-8.00	32.81	24.81	46.00	-21.19	QP	
3	542.6853	-5.82	32.79	26.97	46.00	-19.03	QP	
4	647.8957	-3.25	31.77	28.52	46.00	-17.48	QP	
5	737.6753	-1.80	33.14	31.34	46.00	-14.66	QP	
6	838.6773	-0.77	33.04	32.27	46.00	-13.73	QP	
Remark	Remark: Other frequency mini margin all >6 dB of Limit							

# FCC ID:BRWRVOF1100 IC:6157A-RVOF1100 CENTRE OF TESTING SERVICE





Channel:	TX –X Position Low CH	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2405.00	7.04	85.47	92.51	114.00	-21.49	Peak
2	2405.00	7.04	84.51	91.55	94.00	-2.45	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3116.232	4.36	47.61	51.97	74.00	-22.03	peak	
2	3116.232	4.36	35.29	39.65	54.00	-14.35	AVG	
3	5122.244	6.29	47.89	54.18	74.00	-19.82	peak	
4	5122.244	6.29	36.55	42.84	54.00	-11.16	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

Channel:	TX –X Position Middle CH	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2445.00	7.27	86.20	93.47	114.00	-20.53	Peak
2	2445.00	7.27	84.78	92.05	94.00	-1.95	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1661.323	2.76	48.58	51.34	74.00	-22.66	peak
2	1661.323	2.76	37.27	40.03	54.00	-13.97	AVG
3	5563.126	7.59	49.57	57.16	74.00	-16.84	peak
4	5563.126	7.59	38.10	45.69	54.00	-8.31	AVG
Remark: Other frequency mini margin all >20 dB of Limit							

Channel:	TX –X Position High CH	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	1GHz-26.5GHz		'

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2475.00	7.44	84.47	91.91	114.00	-22.09	Peak
2	2475.00	7.44	83.51	90.95	94.00	-3.05	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1639.279	2.63	47.98	50.61	74.00	-23.39	peak	
2	1639.279	2.63	36.33	38.96	54.00	-15.04	AVG	
3	4681.363	4.86	46.90	51.76	74.00	-22.24	peak	
4	4681.363	4.86	35.01	39.87	54.00	-14.13	AVG	
Remark: Other frequency mini margin all >20 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





Channel: TX –X Position Result: □ - passed □ - not passed Frequency range: 30MHz-1GHz

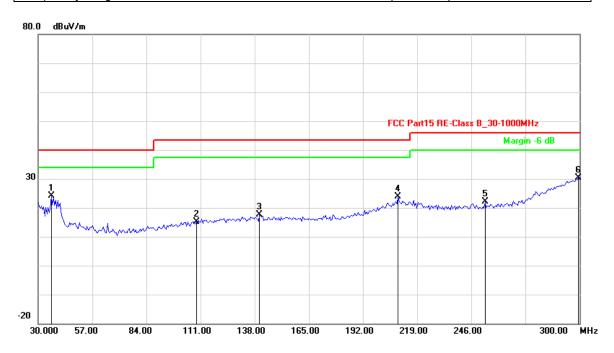

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	36.4929	-16.01	40.15	24.14	40.00	-15.86	QP		
2	108.9979	-16.77	32.01	15.24	43.50	-28.26	QP		
3	140.3807	-15.41	33.05	17.64	43.50	-25.86	QP		
4	209.6392	-9.66	33.55	23.89	43.50	-19.61	QP		
5	252.9258	-10.82	32.86	22.04	46.00	-23.96	QP		
6	299.4589	-1.27	31.67	30.40	46.00	-15.60	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





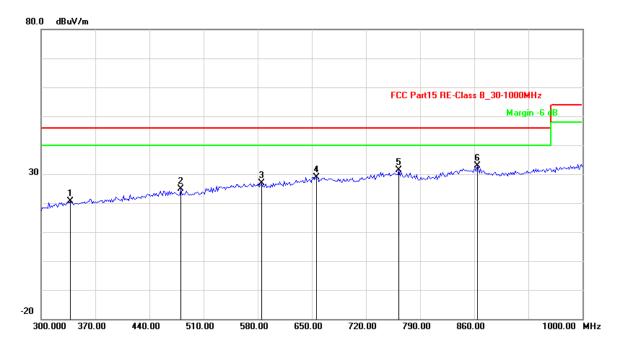

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	337.8758	-11.55	32.22	20.67	46.00	-25.33	QP
2	480.9619	-7.88	32.83	24.95	46.00	-21.05	QP
3	584.7695	-5.46	32.41	26.95	46.00	-19.05	QP
4	656.3126	-3.16	32.13	28.97	46.00	-17.03	QP
5	762.9259	-1.75	33.13	31.38	46.00	-14.62	QP
6	863.9279	-0.51	33.37	32.86	46.00	-13.14	QP
Remark: Other frequency mini margin all >6 dB of Limit							

# FCC ID:BRWRVOF1100 IC:6157A-RVOF1100 CENTRE OF TESTING SERVICE





Channel:	TX –X Position Low CH	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2405.00	7.04	86.18	93.22	114.00	-20.78	Peak
2	2405.00	7.04	84.71	91.75	94.00	-2.25	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1617.234	2.50	47.33	49.83	74.00	-24.17	peak
2	1617.234	2.50	35.56	38.06	54.00	-15.94	AVG
3	5122.244	6.29	48.21	54.50	74.00	-19.50	peak
4	5122.244	6.29	36.36	42.65	54.00	-11.35	AVG
Remark: Other frequency mini margin all >20 dB of Limit							

Channel:	TX –X Position Middle CH	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2445.00	7.27	83.76	91.03	114.00	-22.97	Peak
2	2445.00	7.27	83.01	90.28	94.00	-3.72	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3160.321	4.27	46.81	51.08	74.00	-22.92	peak
2	3160.321	4.27	35.78	40.05	54.00	-13.95	AVG
3	5519.038	7.46	48.69	56.15	74.00	-17.85	peak
4	5519.038	7.46	37.22	44.68	54.00	-9.32	AVG
Remark: Other frequency mini margin all >20 dB of Limit							

Channel:	TX –X Position High CH	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		'

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2475.00	7.44	84.37	91.81	114.00	-22.19	Peak
2	2475.00	7.44	83.24	90.68	94.00	-3.32	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1749.499	3.27	48.60	51.87	74.00	-22.13	peak	
2	1749.499	3.27	36.78	40.05	54.00	-13.95	AVG	
3	4637.275	4.71	47.88	52.59	74.00	-21.41	peak	
4	4637.275	4.71	35.67	40.38	54.00	-13.62	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

Note:Level=Reading+Factor. Margin= Level - Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced otner than in tuil except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





# 8. Band Edge Compliance test

# 8.1. Test Equipment

Band Edge Compliance test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2016/10	
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2016/03	
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2016/03	

#### 8.2. Test Information

EUT	Ascent MTx
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	02~13 March 2017
Operator	Duke
MODEL NO	RVOF1100

# 8.3. Test procedure

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setp 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz; VBW=1KHz(1/On time) / Sweep=AUTO

#### 8.4. Test Results

#### PASSED.

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





# **Band Edges (Low)**

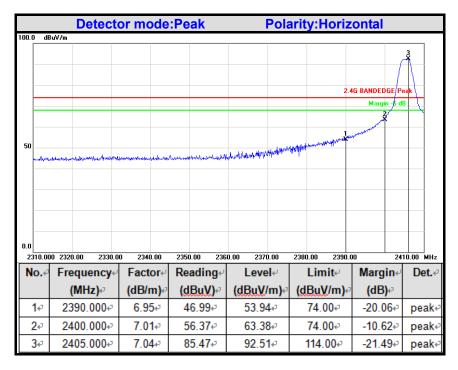

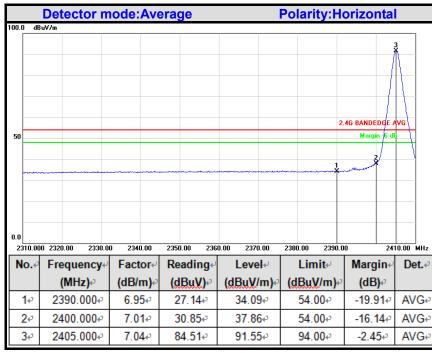



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.





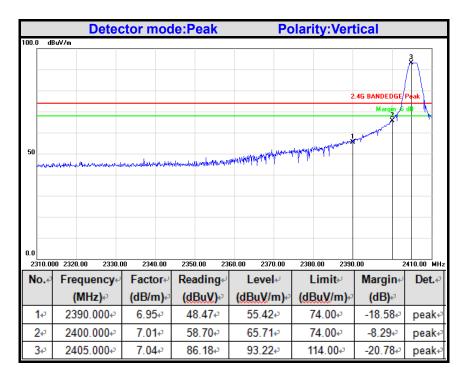

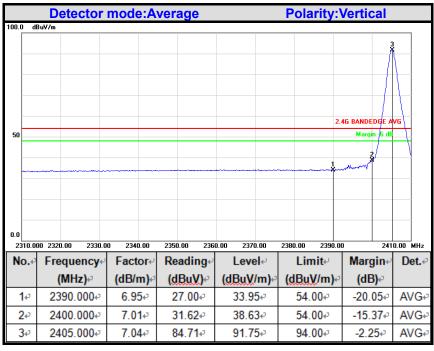

#### CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





# Band Edges (High)

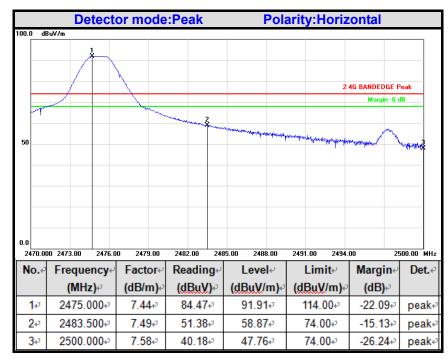

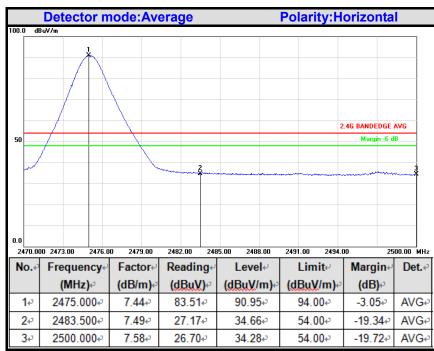

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

#### CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





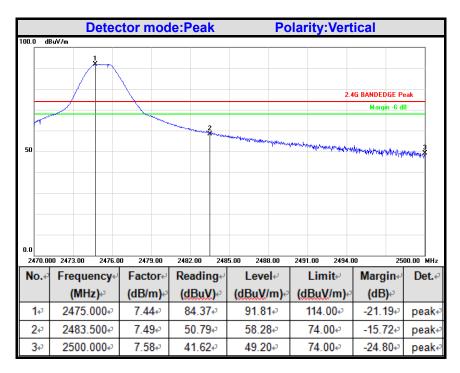

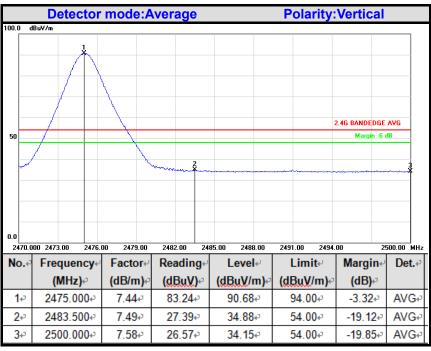

CENTRE OF TESTING SERVICE CO., LTD.





# 9. 99% bandwidth

# 9.1 Test procedure

According to RSS-Gen 4 6.6 The Ascent MTx output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

# 9.2. Test Equipment

Band Edge Compliance test							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2016/03		
2	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2016/03		

#### 9.3. Test Results

# PASSED.

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2405	1.520
Middle	2445	1.560
High	2475	1.760

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.









#### CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn









# 10 Antenna Requirements

# 10.1 Standard Applicable

The EUT is Internal fix Antenna with 2dBi, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

# 10.2 Antenna Construction and Directional Gain

Antenna type: Internal fix Antenna

Antenna Gain: 2dBi

# 11. Deviation to test specifications

The following identical model(s):

N/A

Belong to the tested device:

Product description: **Ascent MTx**Model name: **RVOF1100** 

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.