



RF MEASUREMENT REPORT

FCC ID: BRWSPMR1275
Applicant: Horizon Hobby, LLC
Product: SLT6
Model No.: SPMR1275
Brand Name: Horizon Hobby
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2022-11-11
Test Date: 2023-02-18 ~ 2023-02-24

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

| Report No. | Version | Description | Issue Date | Note |
|---------------|---------|----------------|------------|-------|
| 2211RSU028-U1 | V01 | Initial Report | 2023-03-30 | Valid |
| | | | | |

CONTENTS

| Description | Page |
|--|-----------|
| 1. General Information | 5 |
| 1.1. Applicant | 5 |
| 1.2. Manufacturer | 5 |
| 1.3. Testing Facility | 5 |
| 1.4. Product Information..... | 6 |
| 1.5. Radio Specification under Test | 6 |
| 1.6. Working Frequencies | 7 |
| 2. Test Configuration | 8 |
| 2.1. Test System Connection Diagram..... | 8 |
| 2.2. Test Software | 8 |
| 2.3. Applied Standards..... | 8 |
| 2.4. Test Environment Condition | 9 |
| 3. Antenna Requirements | 10 |
| 4. Measuring Instrument | 11 |
| 5. Decision Rules and Measurement Uncertainty | 12 |
| 5.1. Decision Rules | 12 |
| 5.2. Measurement Uncertainty..... | 12 |
| 6. Test Result..... | 13 |
| 6.1. Summary..... | 13 |
| 6.2. 6dB Bandwidth Measurement..... | 14 |
| 6.2.1. Test Limit | 14 |
| 6.2.2. Test Procedure..... | 14 |
| 6.2.3. Test Setting | 14 |
| 6.2.4. Test Setup | 14 |
| 6.2.5. Test Result | 14 |
| 6.3. Output Power Measurement..... | 15 |
| 6.3.1. Test Limit | 15 |
| 6.3.2. Test Procedure..... | 15 |
| 6.3.3. Test Setting | 15 |
| 6.3.4. Test Setup | 15 |
| 6.3.5. Test Result | 15 |
| 6.4. Power Spectral Density Measurement | 16 |
| 6.4.1. Test Limit | 16 |
| 6.4.2. Test Procedure..... | 16 |
| 6.4.3. Test Setting | 16 |

| | | |
|---|---|-----------|
| 6.4.4. | Test Setup | 16 |
| 6.4.5. | Test Result | 16 |
| 6.5. | Conducted Band Edge and Out-of-Band Emissions Measurement | 17 |
| 6.5.1. | Test Limit | 17 |
| 6.5.2. | Test Procedure | 17 |
| 6.5.3. | Test Settintg | 17 |
| 6.5.4. | Test Setup | 18 |
| 6.5.5. | Test Result | 18 |
| 6.6. | Radiated Spurious Emission Measurement..... | 19 |
| 6.6.1. | Test Limit | 19 |
| 6.6.2. | Test Procedure | 19 |
| 6.6.3. | Test Setting | 19 |
| 6.6.4. | Test Setup | 21 |
| 6.6.5. | Test Result | 22 |
| 6.7. | Radiated Restricted Band Edge Measurement | 23 |
| 6.7.1. | Test Limit | 23 |
| 6.7.2. | Test Procedure | 24 |
| 6.7.3. | Test Setting | 24 |
| 6.7.4. | Test Setup | 25 |
| 6.7.5. | Test Result | 25 |
| 6.8. | AC Conducted Emissions Measurement | 26 |
| 6.8.1. | Test Limit | 26 |
| 6.8.2. | Test Setup | 26 |
| 6.8.3. | Test Result | 26 |
| Appendix A - Test Result..... | | 27 |
| A.1 | Duty Cycle Test Result..... | 27 |
| A.2 | 6dB Bandwidth Test Result | 28 |
| A.3 | Output Power Test Result | 29 |
| A.4 | Power Spectral Density Test Result..... | 30 |
| A.5 | Conducted Band Edge and Out-of-Band Emissions Test Result..... | 31 |
| A.6 | Radiated Spurious Emission Test Result..... | 33 |
| A.7 | Radiated Restricted Band Edge Test Result..... | 37 |
| A.8 | AC Conducted Emissions Test Result | 53 |
| Appendix B - Test Setup Photograph | | 54 |
| Appendix C - EUT Photograph | | 55 |

1.4. Product Information

| | |
|---|-------------------|
| Product Name | SLT6 |
| Model No. | SPMR1275 |
| Sample No. | 20230223Sample#04 |
| Wireless Specification | 2403 ~ 2480MHz |
| Working Voltage | 4 * AA Batteries |
| Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. | |

1.5. Radio Specification under Test

| | |
|--------------------|------------------|
| Frequency | 2403 ~ 2480MHz |
| Channel Number | 75 |
| Type of modulation | GFSK |
| Antenna Type | Monopole antenna |
| Antenna Gain | 2.84dBi |


1.6. Working Frequencies

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| - | - | 01 | 2403 MHz | 02 | 2404 MHz |
| 03 | 2405 MHz | 04 | 2406 MHz | 05 | 2407 MHz |
| 06 | 2408 MHz | 07 | 2409 MHz | 08 | 2410 MHz |
| 09 | 2411 MHz | 10 | 2412 MHz | 11 | 2413 MHz |
| 12 | 2414 MHz | 13 | 2415 MHz | 14 | 2416 MHz |
| 15 | 2417 MHz | 16 | 2418 MHz | 17 | 2419 MHz |
| 18 | 2420 MHz | 19 | 2421 MHz | 20 | 2422 MHz |
| 21 | 2423 MHz | 22 | 2424 MHz | 23 | 2425 MHz |
| 24 | 2426 MHz | 25 | 2427 MHz | 26 | 2428 MHz |
| 27 | 2429 MHz | 28 | 2430 MHz | 29 | 2431 MHz |
| 30 | 2432 MHz | 31 | 2433 MHz | 32 | 2434 MHz |
| 33 | 2435 MHz | 34 | 2436 MHz | 35 | 2437 MHz |
| 36 | 2438 MHz | 37 | 2439 MHz | 38 | 2440 MHz |
| 39 | 2441 MHz | 40 | 2442 MHz | 41 | 2443 MHz |
| 42 | 2444 MHz | 43 | 2445 MHz | 44 | 2446 MHz |
| 45 | 2447 MHz | 46 | 2448 MHz | 47 | 2449 MHz |
| 48 | 2450 MHz | 49 | 2451 MHz | 50 | 2452 MHz |
| 51 | 2453 MHz | 52 | 2454 MHz | 53 | 2455 MHz |
| 54 | 2456 MHz | 55 | 2457 MHz | 56 | 2458 MHz |
| 57 | 2459 MHz | 58 | 2460 MHz | 59 | 2461 MHz |
| 60 | 2462 MHz | 61 | 2463 MHz | 62 | 2464 MHz |
| 63 | 2465 MHz | 64 | 2466 MHz | 65 | 2467 MHz |
| 66 | 2468 MHz | 67 | 2469 MHz | 68 | 2470 MHz |
| 69 | 2471 MHz | 70 | 2472 MHz | 71 | 2473 MHz |
| 72 | 2474 MHz | 73 | 2475 MHz | 74 | 2476 MHz |
| 78 | 2480 MHz | - | - | - | - |

2. Test Configuration

2.1. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing.

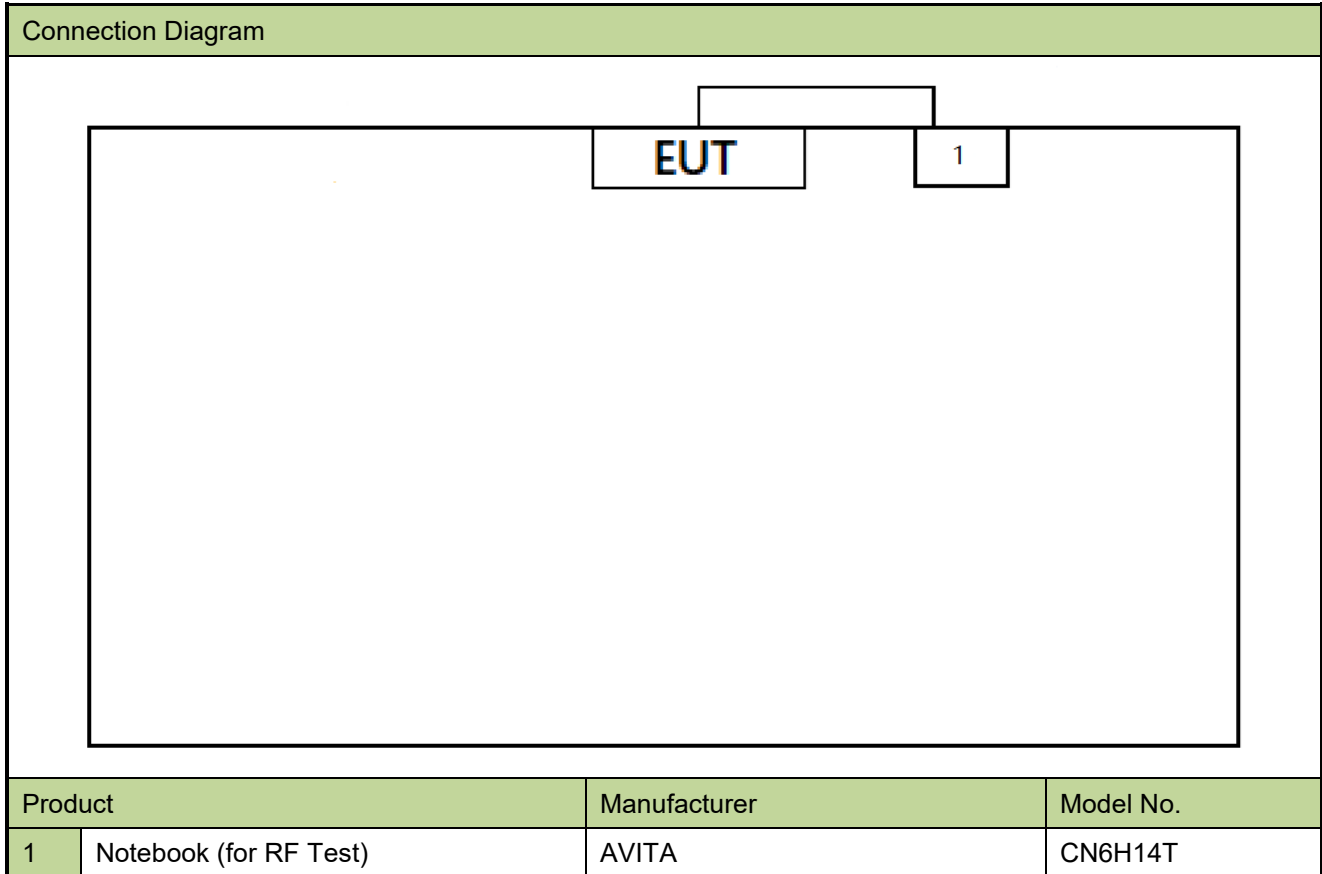

2.2. Test Software

The device can operate by powered on, so the test does not use software.

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.4. Test Environment Condition

| | |
|---------------------|-----------|
| Ambient Temperature | 15 ~ 35°C |
| Relative Humidity | 20 ~75%RH |

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

| Instrument | Manufacturer | Model No. | Asset No. | Cali. Interval | Cali. Due Date | Test Site |
|------------------------|--------------|------------|-------------|----------------|----------------|---------------|
| EMI Test Receiver | R&S | ESR7 | MRTSUE06001 | 1 year | 2023-12-28 | WZ-AC1 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | MRTSUE06023 | 1 year | 2023-08-22 | WZ-AC1 |
| Loop Antenna | Schwarzbeck | FMZB 1519 | MRTSUE06025 | 1 year | 2023-09-29 | WZ-AC1/WZ-AC2 |
| Preamplifier | Agilent | 83017A | MRTSUE06076 | 1 year | 2023-05-08 | WZ-AC1 |
| TRILOG Antenna | Schwarzbeck | VULB 9168 | MRTSUE06172 | 1 year | 2023-06-21 | WZ-AC1 |
| Anechoic Chamber | TDK | WZ-AC1 | MRTSUE06212 | 1 year | 2023-04-21 | WZ-AC1 |
| Thermohygrometer | testo | 608-H1 | MRTSUE06403 | 1 year | 2023-06-06 | WZ-AC1 |
| Signal Analyzer | Keysight | N9010B | MRTSUE06607 | 1 year | 2023-12-28 | WZ-AC1 |
| Thermohygrometer | testo | 608-H1 | MRTSUE11039 | 1 year | 2023-11-01 | WZ-AC1 |
| TRILOG Antenna | Schwarzbeck | VULB 9162 | MRTSUE06022 | 1 year | 2023-05-20 | WZ-AC2 |
| EMI Test Receiver | Agilent | N9038A | MRTSUE06125 | 1 year | 2023-06-04 | WZ-AC2 |
| Thermohygrometer | Mingle | ETH529 | MRTSUE06170 | 1 year | 2023-11-27 | WZ-AC2 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | MRTSUE06171 | 1 year | 2023-10-13 | WZ-AC2 |
| Preamplifier | Schwarzbeck | BBV 9718 | MRTSUE06176 | 1 year | 2023-05-08 | WZ-AC2 |
| Anechoic Chamber | RIKEN | WZ-AC2 | MRTSUE06213 | 1 year | 2023-04-21 | WZ-AC2 |
| Two-Line V-Network | R&S | ENV216 | MRTSUE06002 | 1 year | 2023-06-04 | WZ-SR2 |
| Symmetrical Attenuator | Schwarzbeck | SYMAT 40 | MRTSUE06117 | 1 year | 2023-04-10 | WZ-SR2 |
| Shielding Room | MIX-BEP | WZ-SR2 | MRTSUE06215 | 5 years | 2026-12-20 | WZ-SR2 |
| Thermohygrometer | testo | 608-H1 | MRTSUE06404 | 1 year | 2023-06-06 | WZ-SR2 |
| EMI Test Receiver | R&S | ESR3 | MRTSUE06909 | 1 year | 2023-10-27 | WZ-SR2 |
| USB Power Sensor | Keysight | U2021XA | MRTSUE06446 | 1 year | 2023-06-04 | WZ-SR5 |
| Thermohygrometer | testo | 608-H1 | MRTSUE06402 | 1 year | 2023-06-06 | WZ-SR5 |
| Shielding Room | HUAMING | WZ-SR5 | MRTSUE06442 | N/A | N/A | WZ-SR5 |
| Signal Analyzer | Keysight | N9010B | MRTSUE06457 | 1 year | 2023-06-04 | WZ-SR5 |
| Attenuator | MVE | MVE2213 | MRTSUE11086 | 1 year | 2023-06-09 | WZ |
| Attenuator | MVE | MVE2213 | MRTSUE11087 | 1 year | 2023-06-09 | WZ |

| Software | Version | Function |
|--|-------------|------------------------|
| EMI Software | V3.0.0 | EMI Test Software |
| Controller_MF 7802 | 2.03C | RE Antenna & Turntable |
| Agilent Power Analyzer/Agilent Power Panel | V R03.09.00 | Power |

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

| | |
|--|----------------------|
| AC Conducted Emission Measurement | |
| Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): | |
| 9kHz~150kHz: | 3.58dB |
| 150kHz~30MHz: | 3.20dB |
| Radiated Disturbance | |
| Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): | |
| Coaxial: | 9kHz~30MHz: 2.59dB |
| Coplanar: | 9kHz~30MHz: 2.60dB |
| Horizontal: | 30MHz~200MHz: 3.85dB |
| | 200MHz~1GHz: 4.36dB |
| | 1GHz~40GHz: 4.98dB |
| Vertical: | 30MHz~200MHz: 4.06dB |
| | 200MHz~1GHz: 5.28dB |
| | 1GHz~40GHz: 4.91dB |
| Spurious Emissions, Conducted | |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): | |
| 2.3dB | |
| Output Power | |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): | |
| 1.5dB | |
| Power Spectrum Density | |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): | |
| 2.3dB | |
| Occupied Bandwidth | |
| Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): | |
| 3.2% | |

6. Test Result

6.1. Summary

| FCC Section(s) | Test Description | Test Condition | Verdict |
|------------------|---|----------------|---------|
| 15.247(a)(2) | 6dB Bandwidth | Conducted | Pass |
| 15.247(b)(3) | Output Power | | Pass |
| 15.247(e) | Power Spectral Density | | Pass |
| 15.247(d) | Band Edge / Out-of-Band Emissions | | Pass |
| 15.205 15.209 | General Field Strength (Restricted Bands and Radiated Emission) | Radiated | Pass |
| 15.207 | AC Conducted Emissions 150kHz - 30MHz | Line Conducted | Pass |

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

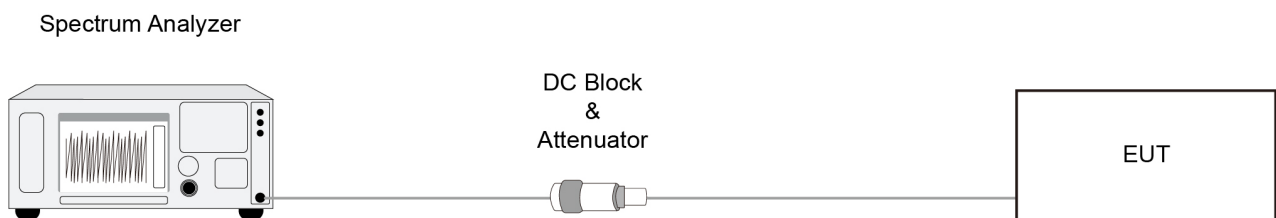

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.1.3

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW \leq 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

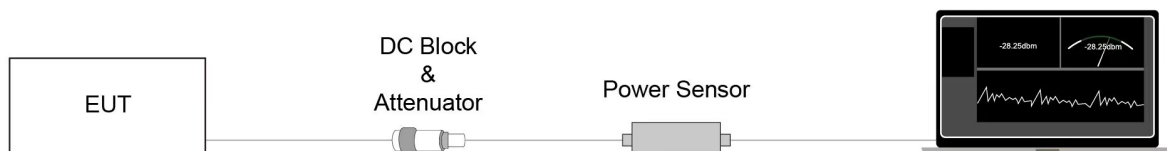

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10-2013 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

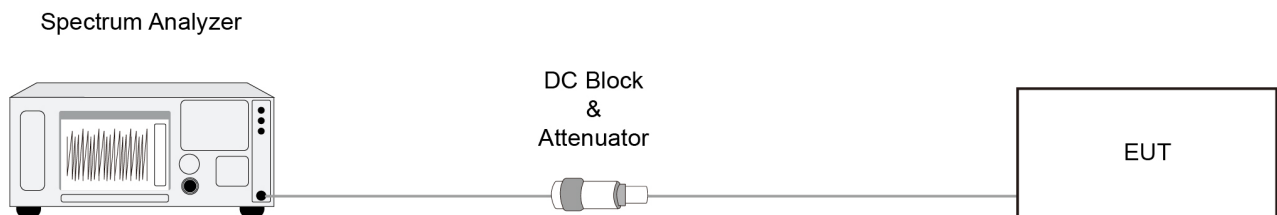

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|--------------------------|-------------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

| Frequency | RBW |
|---------------|---------------|
| 9 ~ 150 kHz | 200 ~ 300 Hz |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000MHz | 1MHz |

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

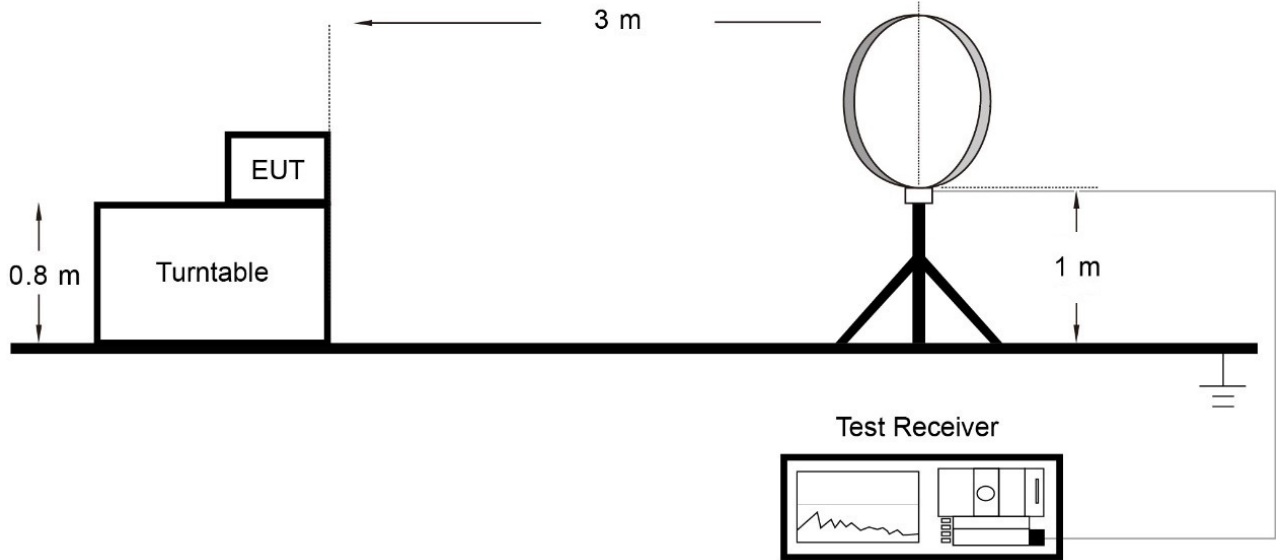

Below 1GHz Test Setup:

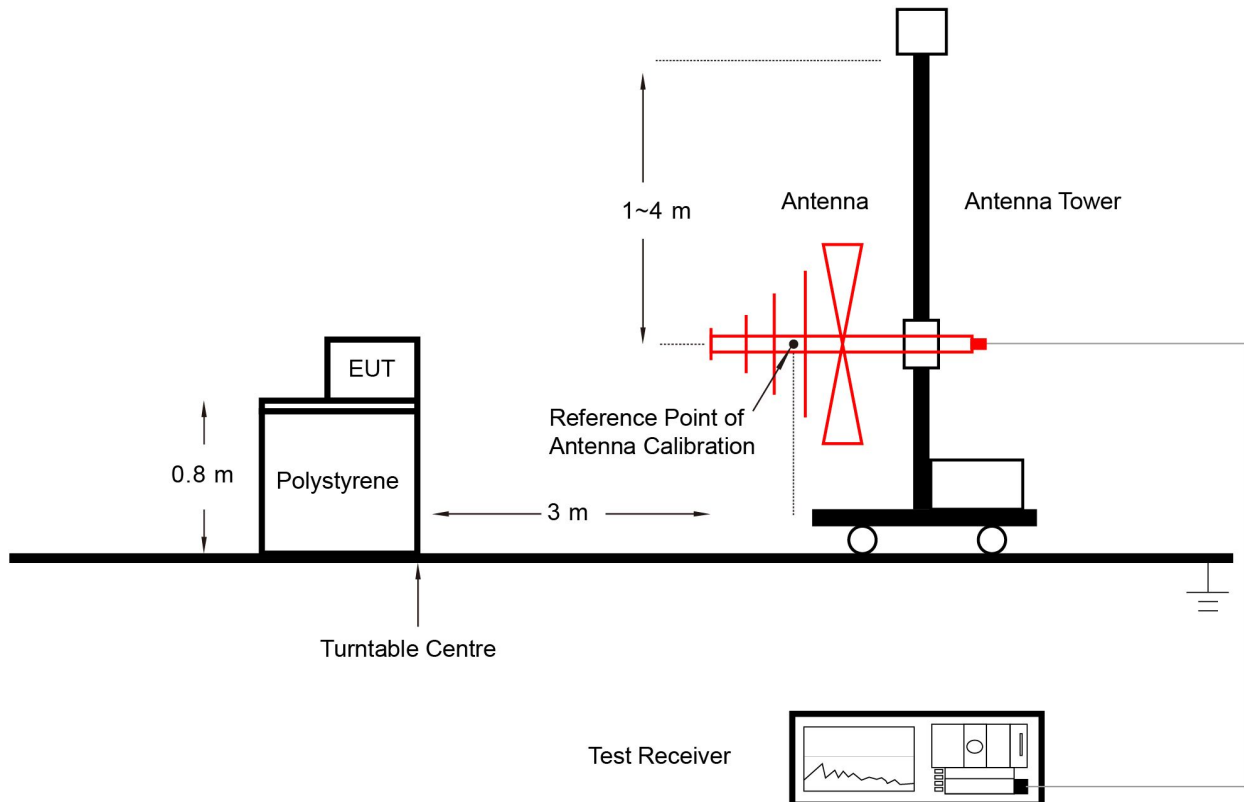

Above 1GHz Test Setup:

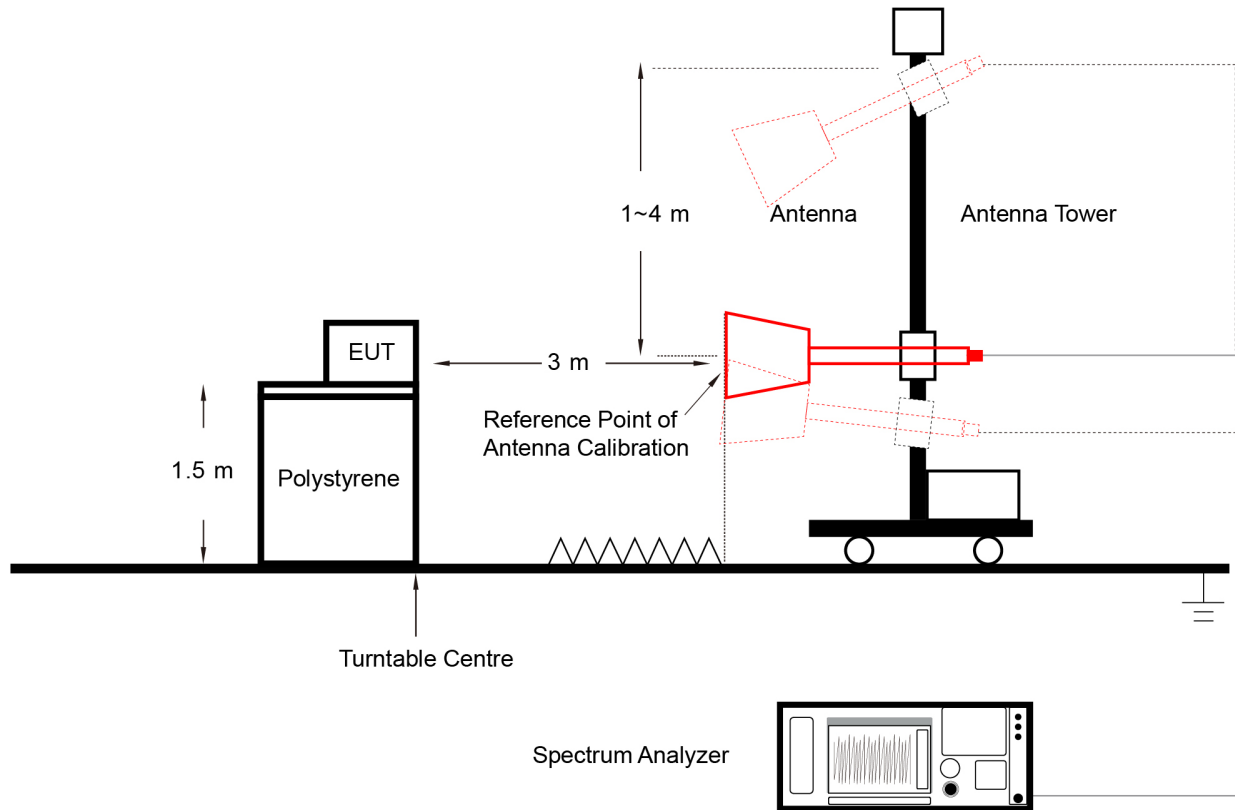

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | -- | -- | -- |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|--------------------------|-------------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW \geq 1/T
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak

6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

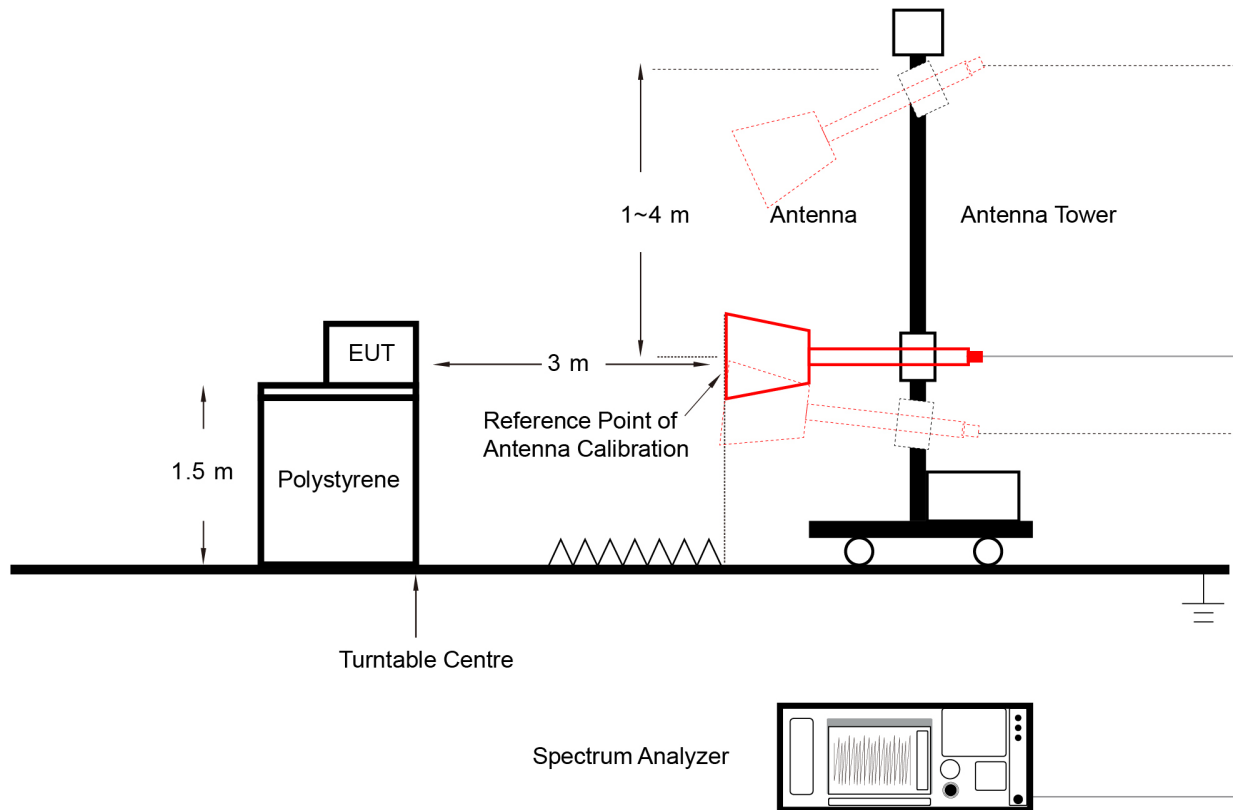

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits | | |
|---|-----------|-----------|
| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

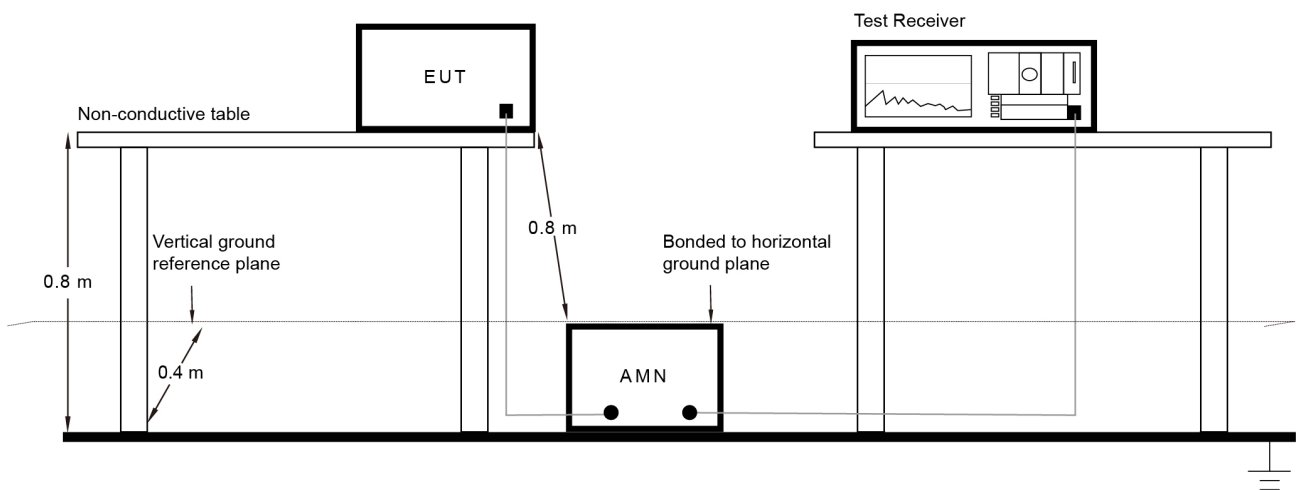

6.8.3. Test Result

Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

| | | | |
|-----------|------------|---------------|-----------|
| Test Site | WZ-SR5 | Test Engineer | Luis Yang |
| Test Date | 2023-02-21 | | |

| Duty Cycle | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------|-------|----------|----------------|----------------|----------------|----------------|---|---|---|-----|----------|-----------|---|---|---|---|----------|-----------|---|---|---|-----|----------|----------|---|---|---|---|----------|-----------|---|---|---|-----|----------|-----------|---|---|---|---|----------|-----------|
| 15.94% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Duty Cycle (T = Transmission Duration) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (T = 950µs) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>The screenshot shows a Keysight Spectrum Analyzer interface. The main display shows a pulse train waveform with several markers labeled X1 through X6. The marker table at the bottom left is as follows:</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ</td> <td>1</td> <td>(Δ)</td> <td>470.0 µs</td> <td>0.4248 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td>2.800 ms</td> <td>10.49 dBm</td> </tr> <tr> <td>3</td> <td>Δ</td> <td>1</td> <td>(Δ)</td> <td>480.0 µs</td> <td>2.322 dB</td> </tr> <tr> <td>4</td> <td>F</td> <td>1</td> <td>t</td> <td>4.410 ms</td> <td>8.477 dBm</td> </tr> <tr> <td>5</td> <td>Δ</td> <td>1</td> <td>(Δ)</td> <td>5.960 ms</td> <td>0.2680 dB</td> </tr> <tr> <td>6</td> <td>F</td> <td>1</td> <td>t</td> <td>2.800 ms</td> <td>10.49 dBm</td> </tr> </tbody> </table> <p>The interface also shows a 'Marker Table' on the right side with settings for 'Marker Δ Time' (5.96000 ms), 'Marker Mode' (Delta (Δ)), and 'Marker Function' (Counter).</p> | | Mode | Trace | Scale | Function | Function Width | Function Value | 1 | Δ | 1 | (Δ) | 470.0 µs | 0.4248 dB | 2 | F | 1 | t | 2.800 ms | 10.49 dBm | 3 | Δ | 1 | (Δ) | 480.0 µs | 2.322 dB | 4 | F | 1 | t | 4.410 ms | 8.477 dBm | 5 | Δ | 1 | (Δ) | 5.960 ms | 0.2680 dB | 6 | F | 1 | t | 2.800 ms | 10.49 dBm |
| Mode | Trace | Scale | Function | Function Width | Function Value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ | 1 | (Δ) | 470.0 µs | 0.4248 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | t | 2.800 ms | 10.49 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Δ | 1 | (Δ) | 480.0 µs | 2.322 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | F | 1 | t | 4.410 ms | 8.477 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Δ | 1 | (Δ) | 5.960 ms | 0.2680 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | F | 1 | t | 2.800 ms | 10.49 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

A.2 6dB Bandwidth Test Result

| | | | |
|-----------|------------|---------------|-----------|
| Test Site | WZ-SR5 | Test Engineer | Luis Yang |
| Test Date | 2023-02-21 | | |

| Channel No. | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 01 | 2403 | 0.6863 | ≥ 0.5 |
| 39 | 2440 | 0.7012 | ≥ 0.5 |
| 78 | 2480 | 0.5921 | ≥ 0.5 |



A.3 Output Power Test Result

| | | | |
|-----------|------------|---------------|-----------|
| Test Site | WZ-SR5 | Test Engineer | Luis Yang |
| Test Date | 2023-02-21 | | |

Test Result of Peak Output Power

| Channel No. | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Result |
|-------------|-----------------|------------------|-------------|--------|
| 01 | 2403 | 13.32 | ≤ 30.00 | Pass |
| 39 | 2440 | 13.12 | ≤ 30.00 | Pass |
| 74 | 2476 | 12.66 | ≤ 30.00 | Pass |
| 78 | 2480 | -22.18 | ≤ 30.00 | Pass |


Test Result of Average Output Power (Reporting Only)

| Channel No. | Frequency (MHz) | Average Power (dBm) | Limit (dBm) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 01 | 2403 | 13.15 | ≤ 30.00 | Pass |
| 39 | 2440 | 12.93 | ≤ 30.00 | Pass |
| 74 | 2476 | 12.49 | ≤ 30.00 | Pass |
| 78 | 2480 | -37.66 | ≤ 30.00 | Pass |

A.4 Power Spectral Density Test Result

| | | | |
|-----------|------------|---------------|-----------|
| Test Site | WZ-SR5 | Test Engineer | Luis Yang |
| Test Date | 2023-02-21 | | |

| Channel No. | Frequency (MHz) | PK PSD (dBm / 3kHz) | Limit (dBm / 3kHz) | Result |
|-------------|-----------------|---------------------|--------------------|--------|
| 01 | 2403 | 2.70 | ≤ 8.00 | Pass |
| 39 | 2440 | 1.98 | ≤ 8.00 | Pass |
| 78 | 2480 | -43.88 | ≤ 8.00 | Pass |



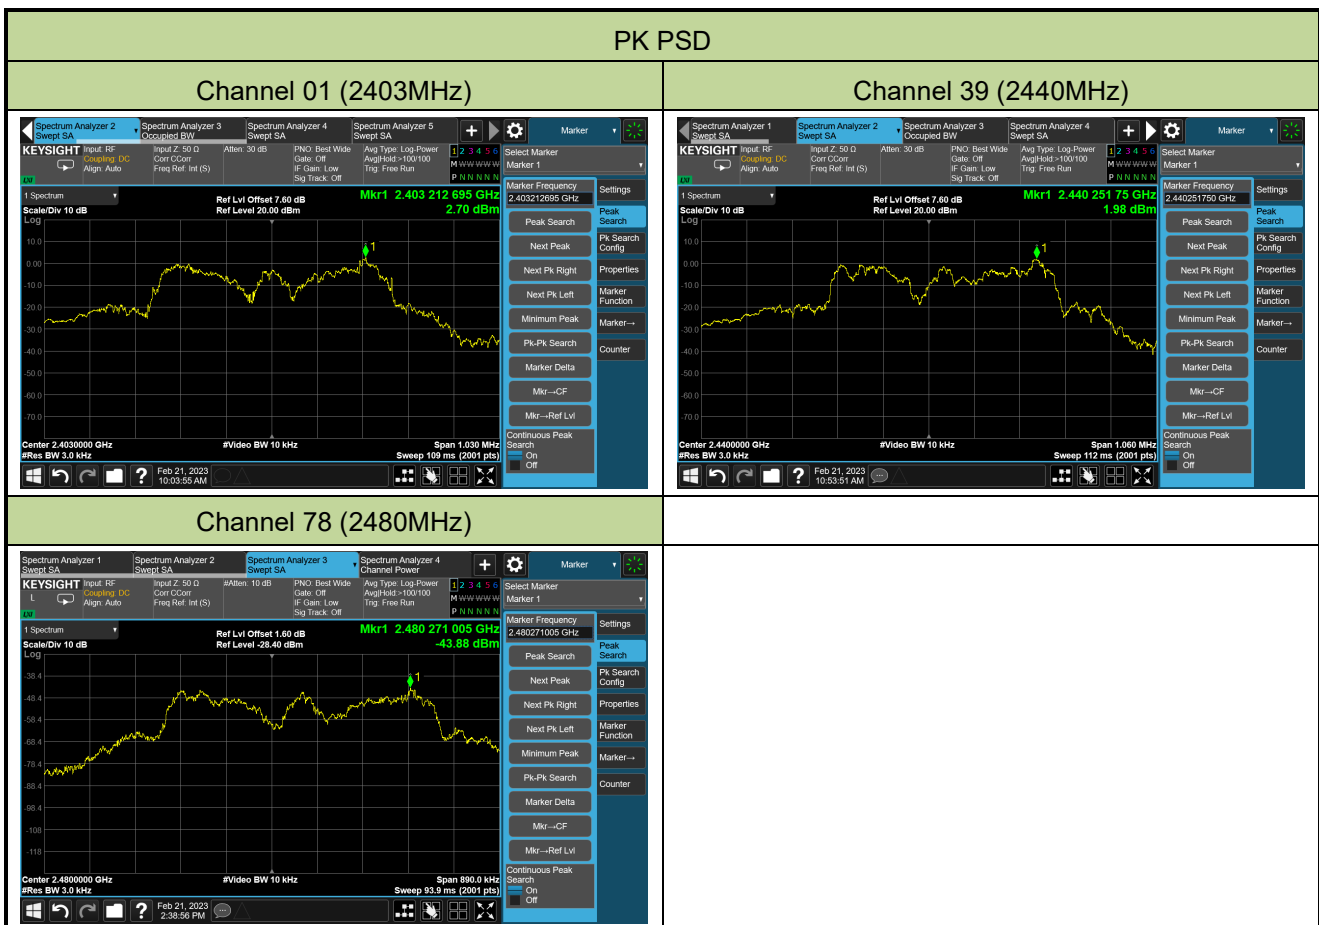


A.5 Conducted Band Edge and Out-of-Band Emissions Test Result

| | | | |
|-----------|------------|---------------|-----------|
| Test Site | WZ-SR5 | Test Engineer | Luis Yang |
| Test Date | 2023-02-21 | | |

| Channel No. | Frequency (MHz) | Limit (dBc) | Result |
|-------------|-----------------|-------------|--------|
| 01 | 2403 | 20 | Pass |
| 38 | 2440 | 20 | Pass |
| 78 | 2480 | 20 | Pass |

Out-of-Band Emissions Channel 01 (2403MHz) 100kHz PSD Reference Level

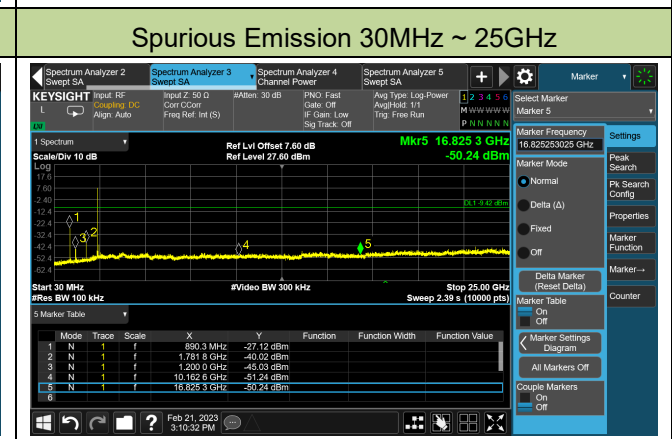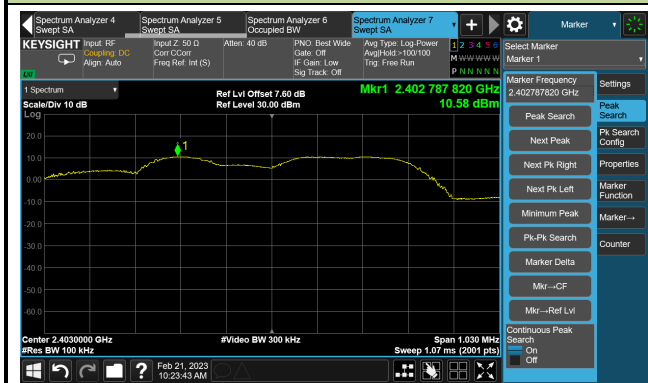


Channel 38 (2440MHz)

100kHz PSD Reference Level




Spurious Emission 30MHz ~ 25GHz


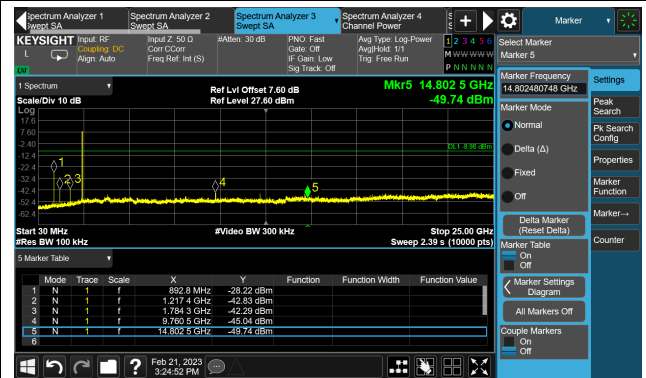


Channel 78 (2480MHz)

100kHz PSD Reference Level

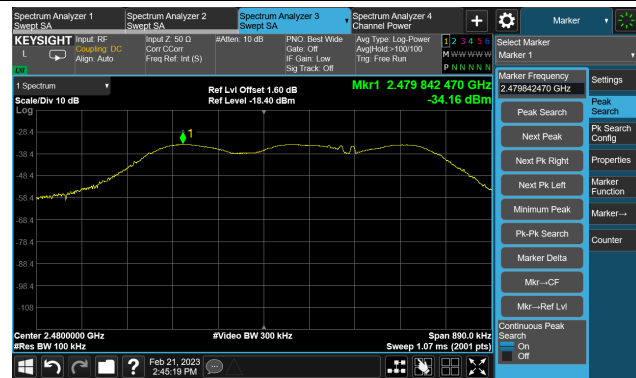

Low Band Edge

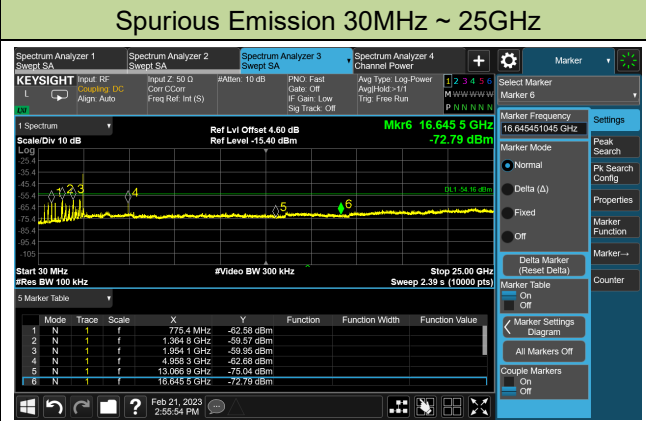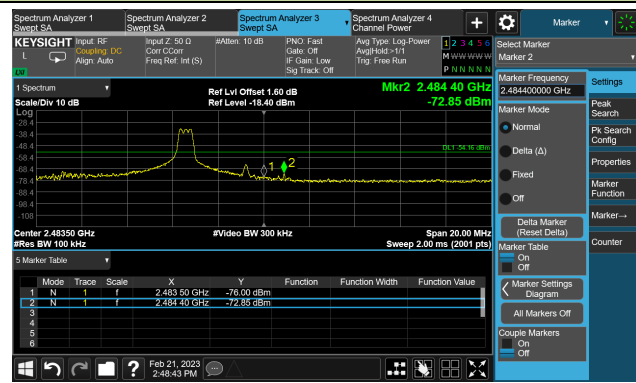

A.6 Radiated Spurious Emission Test Result

| | | | |
|-----------|---|---------------|------------|
| Test Site | WZ-AC1 | Test Engineer | Carl Jiang |
| Test Date | 2023-02-18 | | |
| Remark: | 1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. | | |


| Test Channel | Frequency (MHz) | Reading Level (dB μ V) | Factor (dB/m) | Measure Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------------|---------------|------------------------------|----------------------|-------------|----------|--------------|
| 01 | 4808.0 | 54.3 | 2.8 | 57.1 | 74.0 | -16.9 | Peak | Horizontal |
| | 4808.0 | 38.2 | 2.8 | 41.0 | 54.0 | -13.0 | Average | Horizontal |
| | 11021.5 | 36.5 | 13.4 | 49.9 | 74.0 | -24.1 | Peak | Horizontal |
| | 12016.0 | 45.2 | 12.3 | 57.5 | 74.0 | -16.5 | Peak | Horizontal |
| | 12016.0 | 29.1 | 12.3 | 41.4 | 54.0 | -12.6 | Average | Horizontal |
| | 4808.0 | 58.8 | 2.8 | 61.6 | 74.0 | -12.4 | Peak | Vertical |
| | 4808.0 | 42.7 | 2.8 | 45.5 | 54.0 | -8.5 | Average | Vertical |
| | 11421.0 | 36.8 | 12.9 | 49.7 | 74.0 | -24.3 | Peak | Vertical |
| | 12016.0 | 42.8 | 12.3 | 55.1 | 74.0 | -18.9 | Peak | Vertical |
| | 12016.0 | 26.8 | 12.3 | 39.1 | 54.0 | -14.9 | Average | Vertical |
| 38 | 4876.0 | 58.9 | 2.8 | 61.7 | 74.0 | -12.3 | Peak | Horizontal |
| | 4876.0 | 42.8 | 2.8 | 45.6 | 54.0 | -8.4 | Average | Horizontal |
| | 7324.0 | 43.6 | 7.9 | 51.5 | 74.0 | -22.5 | Peak | Horizontal |
| | 7324.0 | 27.5 | 7.9 | 35.4 | 54.0 | -18.6 | Average | Horizontal |
| | 12203.0 | 44.3 | 12.1 | 56.4 | 74.0 | -17.6 | Peak | Horizontal |
| | 12203.0 | 28.2 | 12.1 | 40.3 | 54.0 | -13.7 | Average | Horizontal |
| | 4876.0 | 59.0 | 2.8 | 61.8 | 74.0 | -12.2 | Peak | Vertical |
| | 4876.0 | 42.9 | 2.8 | 45.7 | 54.0 | -8.3 | Average | Vertical |
| | 7324.0 | 43.6 | 7.9 | 51.5 | 74.0 | -22.5 | Peak | Vertical |
| | 7324.0 | 27.5 | 7.9 | 35.4 | 54.0 | -18.6 | Average | Vertical |
| | 12203.0 | 44.3 | 12.1 | 56.4 | 74.0 | -17.6 | Peak | Vertical |
| | 12203.0 | 28.2 | 12.1 | 40.3 | 54.0 | -13.7 | Average | Vertical |
| 78 | 8199.5 | 35.7 | 8.6 | 44.3 | 74.0 | -29.7 | Peak | Horizontal |
| | 11115.0 | 37.1 | 12.8 | 49.9 | 74.0 | -24.1 | Peak | Horizontal |
| | 12441.0 | 38.2 | 12.0 | 50.2 | 74.0 | -23.8 | Peak | Horizontal |
| | 8233.5 | 37.7 | 8.5 | 46.2 | 74.0 | -27.8 | Peak | Vertical |
| | 10792.0 | 35.6 | 13.6 | 49.2 | 74.0 | -24.8 | Peak | Vertical |
| | 12109.5 | 36.9 | 12.1 | 49.0 | 74.0 | -25.0 | Peak | Vertical |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-02-24 |
| Limit: FCC_Part15.209_RSE(3m) | Engineer: Edith Yu |
| Probe: VULB9162_30-7000MHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2440MHz | |

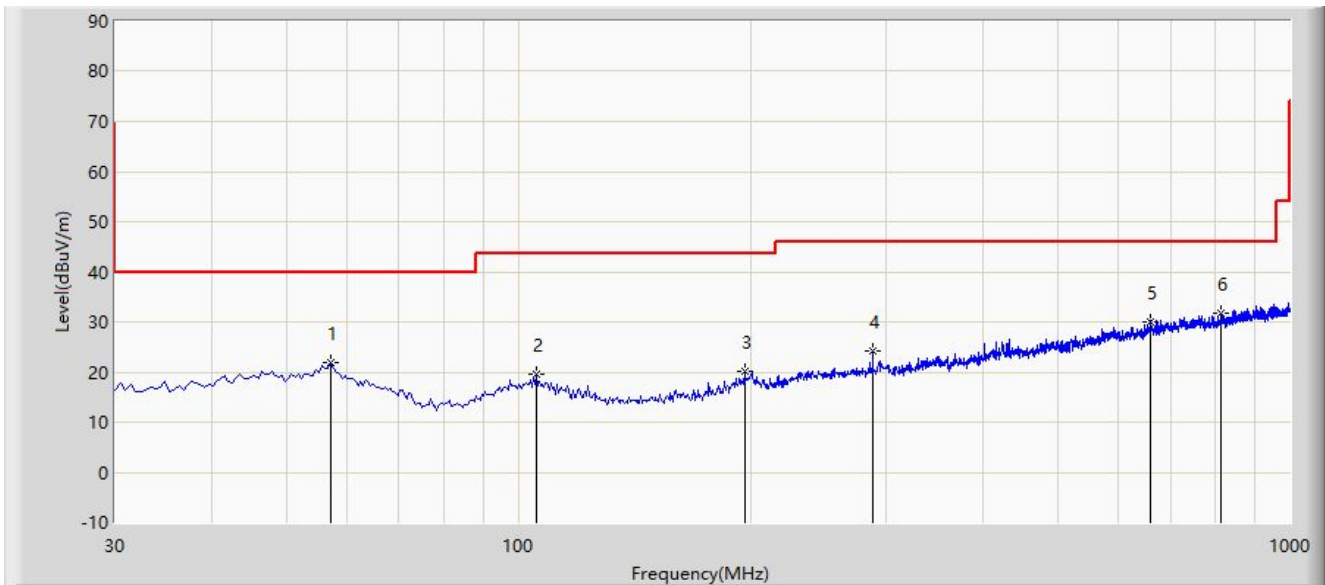

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 57.160 | 21.753 | 1.725 | -18.247 | 40.000 | 20.028 | PK |
| 2 | | 105.660 | 19.527 | 1.003 | -23.973 | 43.500 | 18.524 | PK |
| 3 | | 196.355 | 20.176 | 1.389 | -23.324 | 43.500 | 18.787 | PK |
| 4 | | 288.020 | 24.200 | 3.478 | -21.800 | 46.000 | 20.722 | PK |
| 5 | | 658.560 | 29.919 | 2.109 | -16.081 | 46.000 | 27.810 | PK |
| 6 | * | 814.245 | 31.741 | 1.890 | -14.259 | 46.000 | 29.851 | PK |

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC2 | Test Date: 2023-02-24 |
| Limit: FCC_Part15.209_RSE(3m) | Engineer: Edith Yu |
| Probe: VULB9162_30-7000MHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2440MHz | |

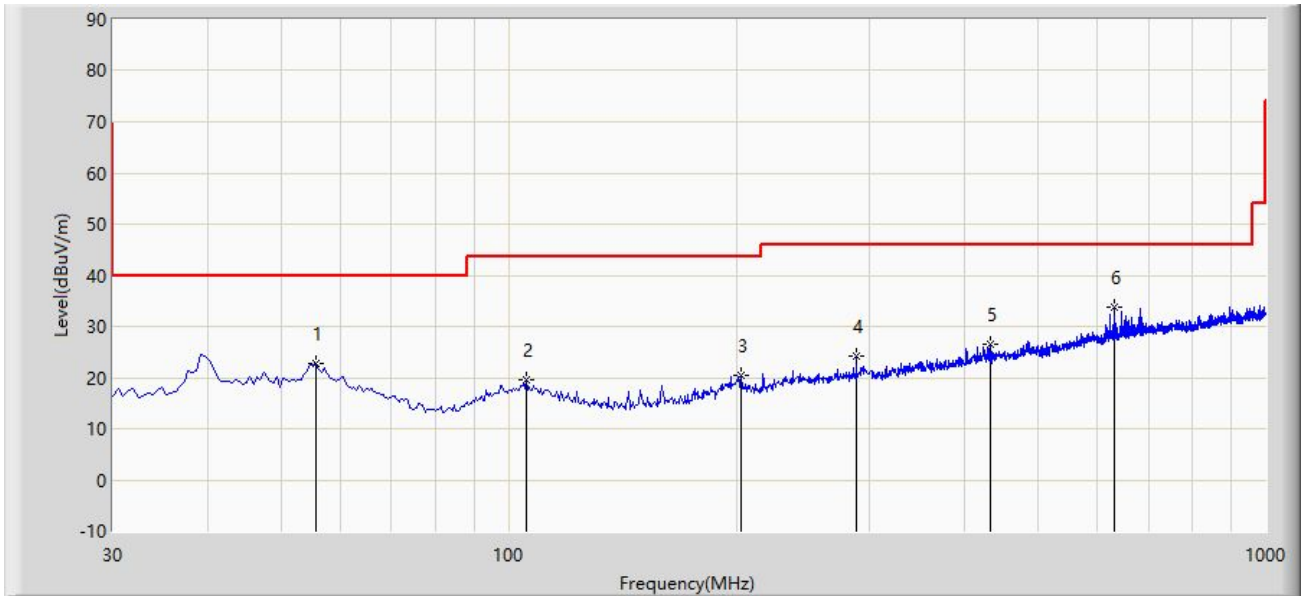

| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 55.705 | 22.791 | 2.595 | -17.209 | 40.000 | 20.195 | PK |
| 2 | | 105.660 | 19.527 | 1.003 | -23.973 | 43.500 | 18.524 | PK |
| 3 | | 202.660 | 20.465 | 1.907 | -23.035 | 43.500 | 18.558 | PK |
| 4 | | 288.020 | 24.200 | 3.478 | -21.800 | 46.000 | 20.722 | PK |
| 5 | | 432.065 | 26.540 | 2.783 | -19.460 | 46.000 | 23.757 | PK |
| 6 | * | 632.370 | 33.626 | 6.362 | -12.374 | 46.000 | 27.264 | PK |

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2403MHz | |

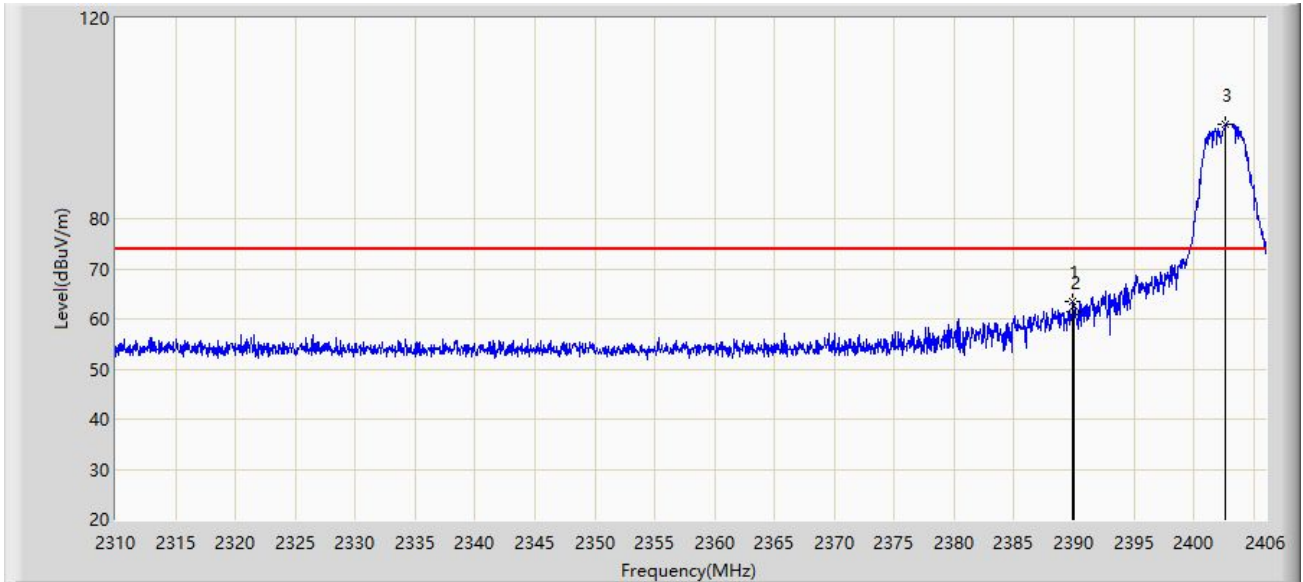


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | * | 2389.872 | 63.355 | 32.363 | -10.645 | 74.000 | 30.992 | PK |
| 2 | | 2390.000 | 61.469 | 30.477 | -12.531 | 74.000 | 30.992 | PK |
| 3 | | 2402.640 | 98.766 | 67.779 | N/A | N/A | 30.987 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2403MHz | |

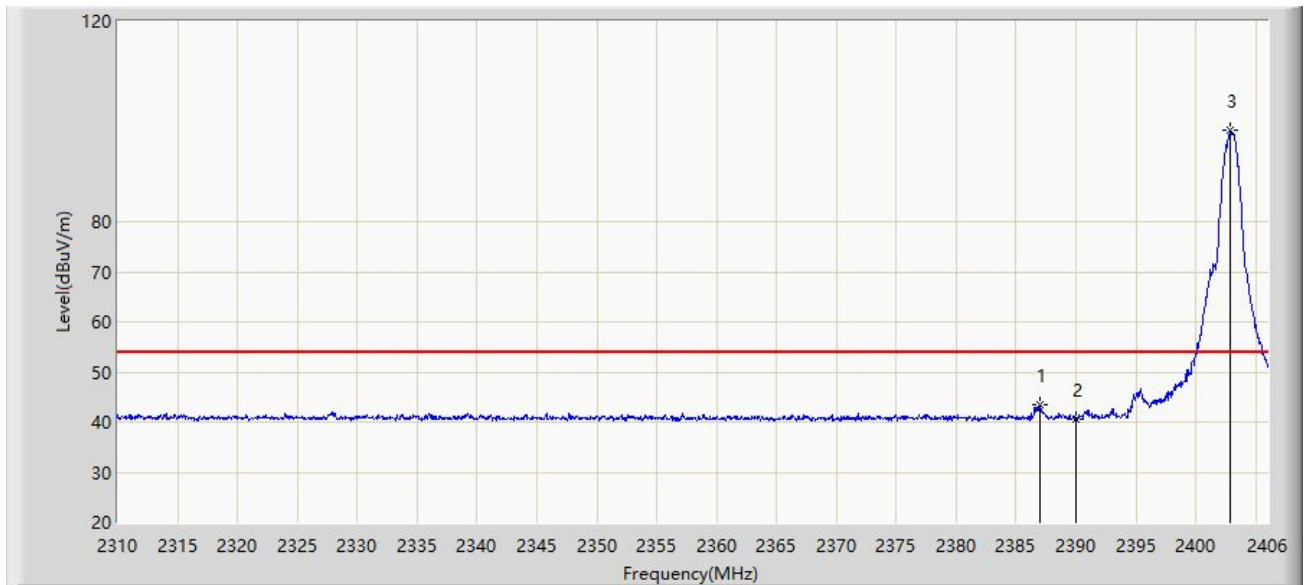


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2386.944 | 43.345 | 12.351 | -10.655 | 54.000 | 30.993 | AV |
| 2 | | 2390.000 | 40.705 | 9.713 | -13.295 | 54.000 | 30.992 | AV |
| 3 | | 2402.928 | 98.137 | 67.151 | N/A | N/A | 30.985 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2403MHz | |

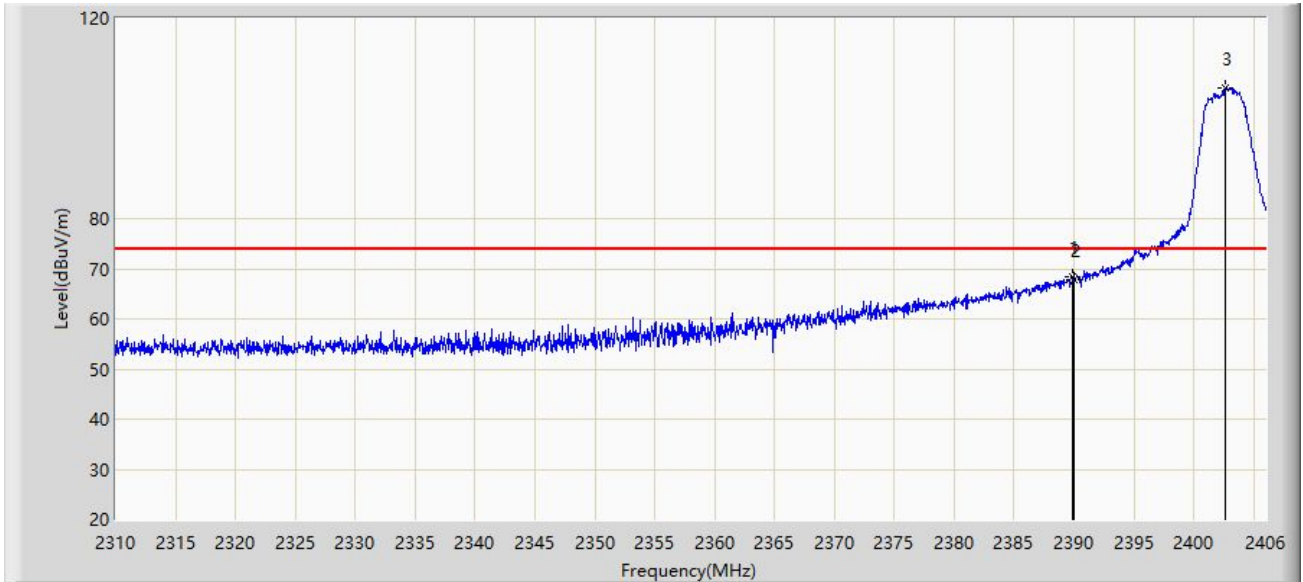


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2389.872 | 68.423 | 37.431 | -5.577 | 74.000 | 30.992 | PK |
| 2 | | 2390.000 | 67.782 | 36.790 | -6.218 | 74.000 | 30.992 | PK |
| 3 | | 2402.640 | 105.953 | 74.966 | N/A | N/A | 30.987 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2403MHz | |

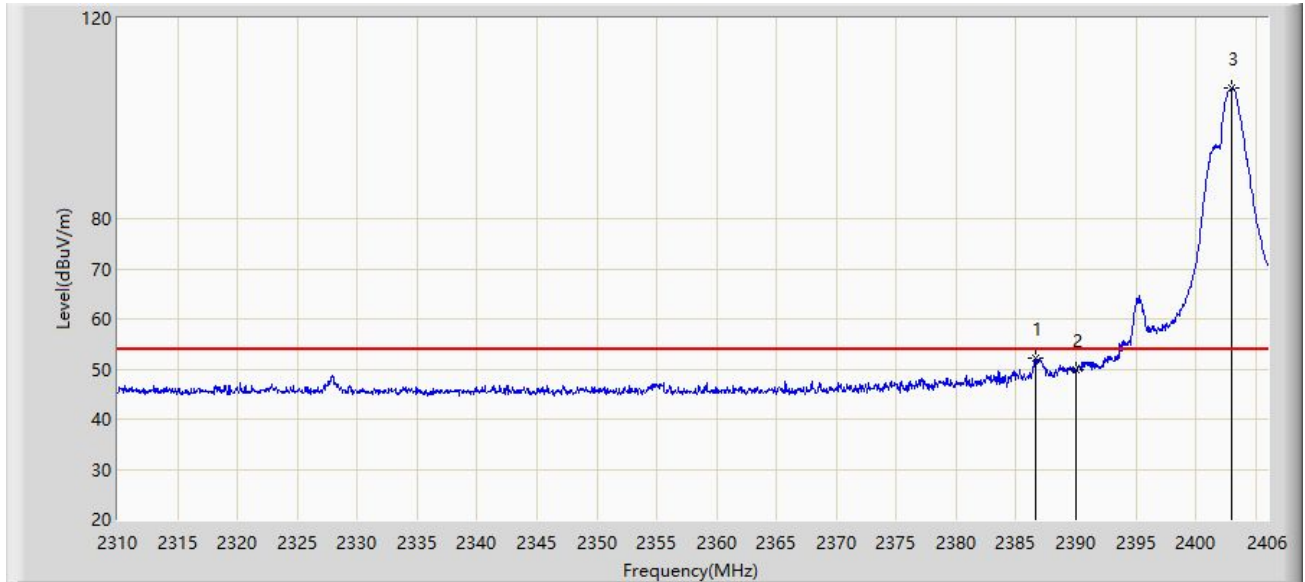


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | * | 2386.608 | 52.202 | 21.208 | -1.798 | 54.000 | 30.994 | AV |
| 2 | | 2390.000 | 49.865 | 18.873 | -4.135 | 54.000 | 30.992 | AV |
| 3 | | 2403.024 | 105.985 | 75.000 | N/A | N/A | 30.985 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2440MHz | |

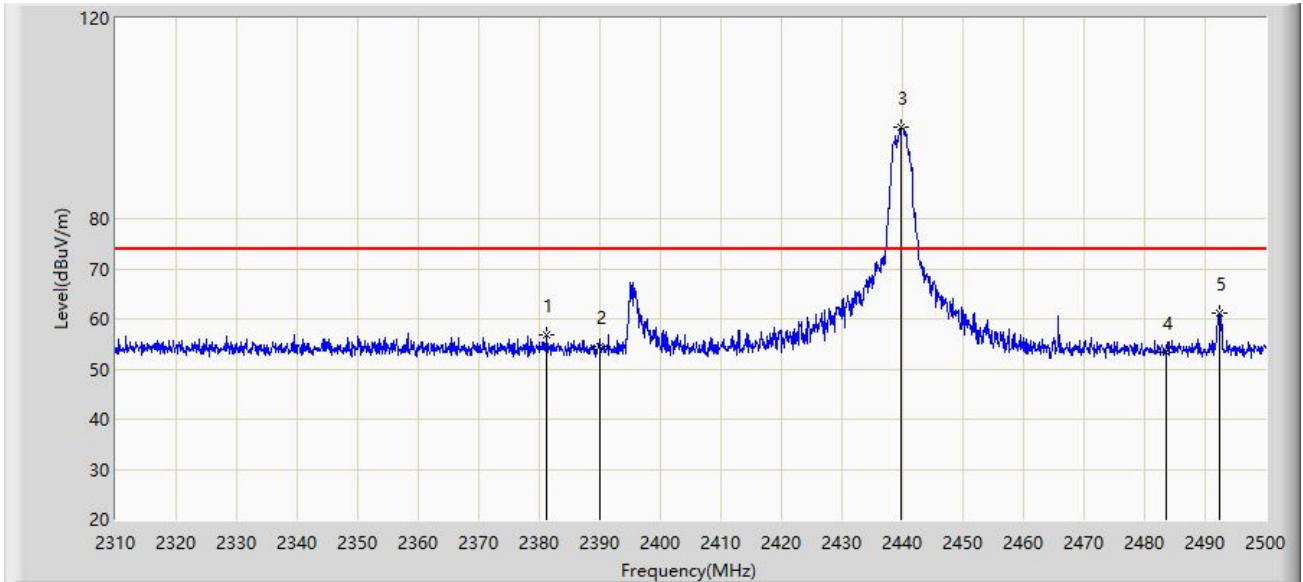


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2381.250 | 56.953 | 25.946 | -17.047 | 74.000 | 31.007 | PK |
| 2 | | 2390.000 | 54.599 | 23.607 | -19.401 | 74.000 | 30.992 | PK |
| 3 | | 2439.675 | 98.153 | 67.289 | N/A | N/A | 30.864 | PK |
| 4 | | 2483.500 | 53.260 | 22.369 | -20.740 | 74.000 | 30.892 | PK |
| 5 | * | 2492.495 | 61.295 | 30.416 | -12.705 | 74.000 | 30.880 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2440MHz | |

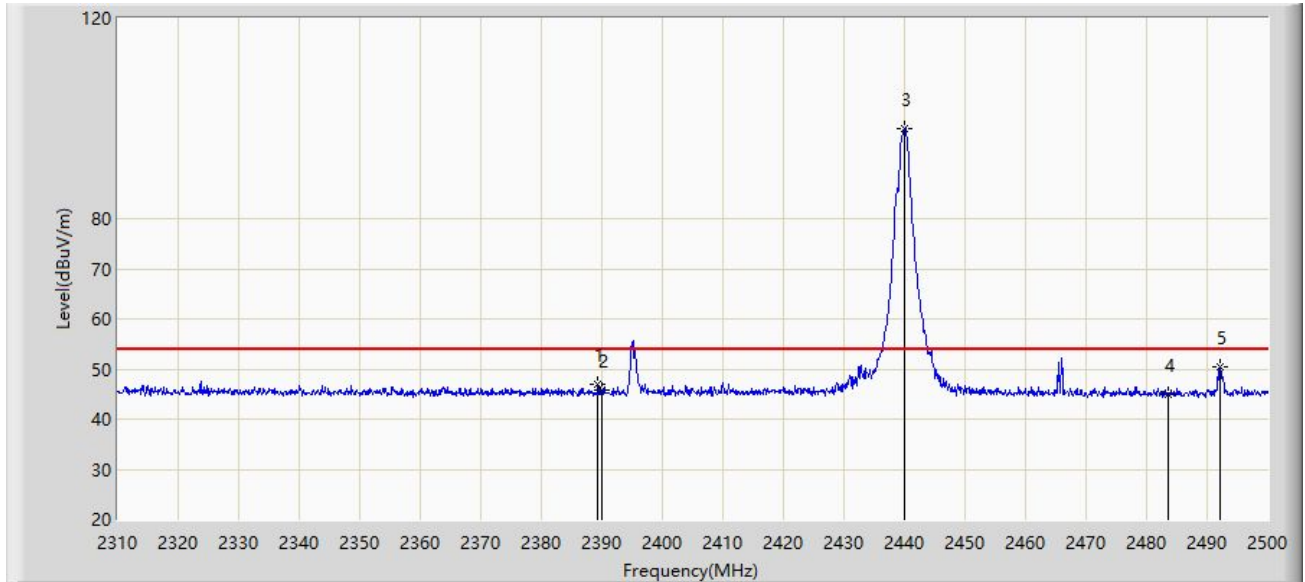


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2389.325 | 46.872 | 15.879 | -7.128 | 54.000 | 30.992 | AV |
| 2 | | 2390.000 | 45.658 | 14.666 | -8.342 | 54.000 | 30.992 | AV |
| 3 | | 2440.055 | 97.873 | 67.008 | N/A | N/A | 30.865 | AV |
| 4 | | 2483.500 | 44.992 | 14.101 | -9.008 | 54.000 | 30.892 | AV |
| 5 | * | 2492.115 | 50.380 | 19.502 | -3.620 | 54.000 | 30.879 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2440MHz | |

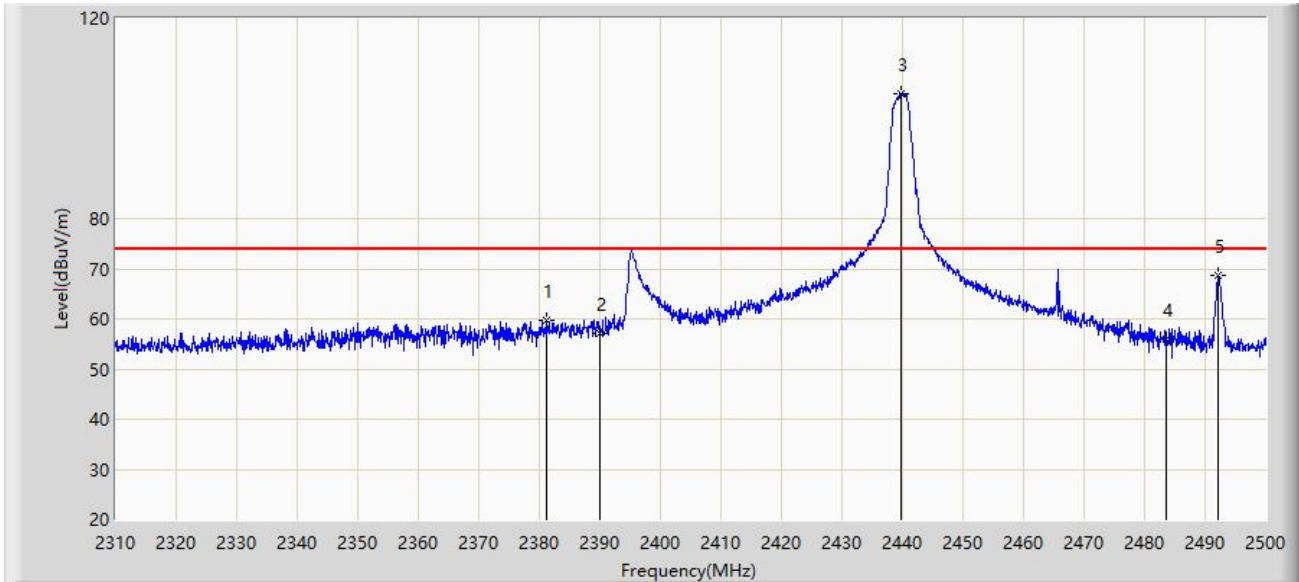


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2381.155 | 59.727 | 28.720 | -14.273 | 74.000 | 31.008 | PK |
| 2 | | 2390.000 | 57.162 | 26.170 | -16.838 | 74.000 | 30.992 | PK |
| 3 | | 2439.675 | 104.983 | 74.119 | N/A | N/A | 30.864 | PK |
| 4 | | 2483.500 | 55.948 | 25.057 | -18.052 | 74.000 | 30.892 | PK |
| 5 | * | 2492.210 | 68.619 | 37.740 | -5.381 | 74.000 | 30.879 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2440MHz | |

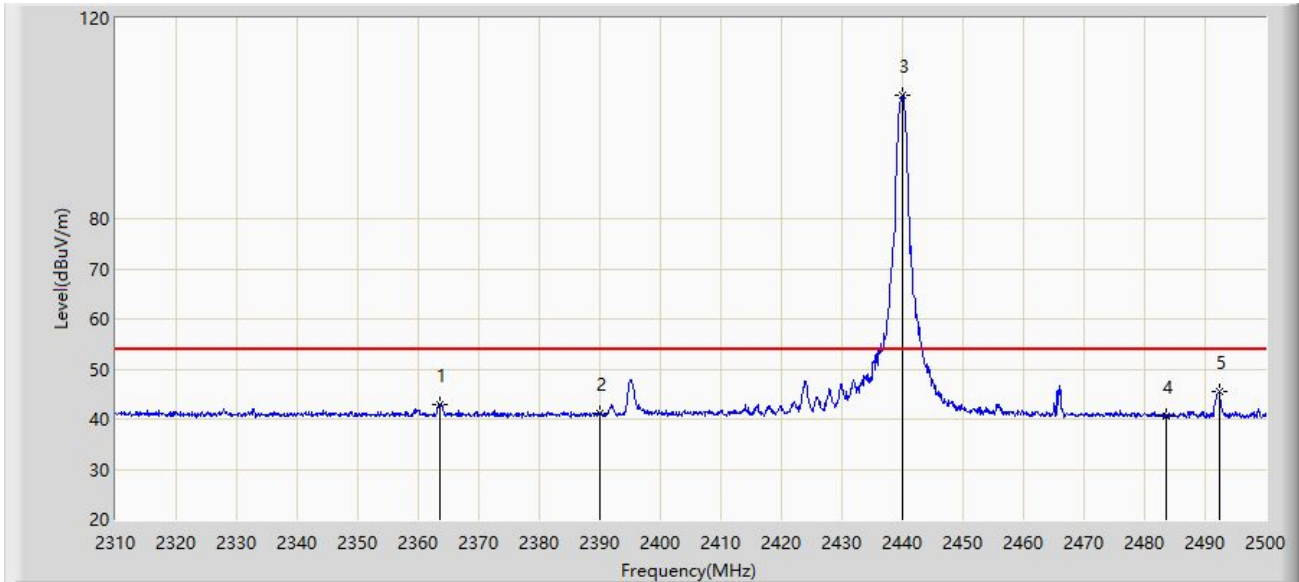


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2363.675 | 42.949 | 11.862 | -11.051 | 54.000 | 31.088 | AV |
| 2 | | 2390.000 | 41.025 | 10.033 | -12.975 | 54.000 | 30.992 | AV |
| 3 | | 2440.055 | 104.547 | 73.682 | N/A | N/A | 30.865 | AV |
| 4 | | 2483.500 | 40.638 | 9.747 | -13.362 | 54.000 | 30.892 | AV |
| 5 | * | 2492.305 | 45.538 | 14.659 | -8.462 | 54.000 | 30.879 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2476MHz | |

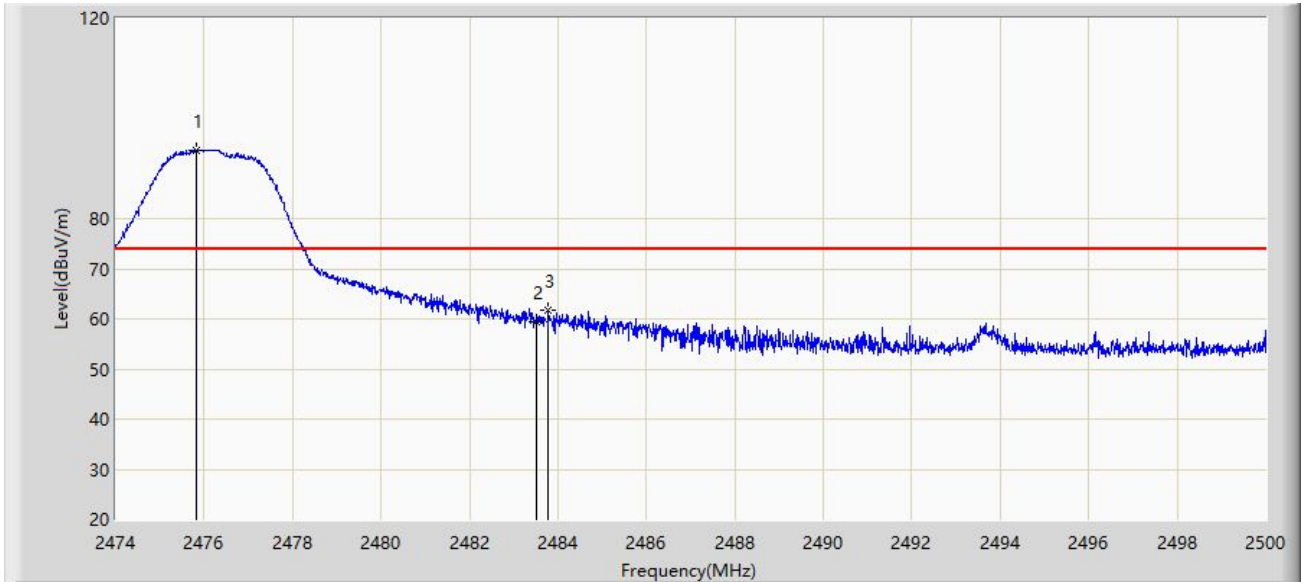


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2475.833 | 93.708 | 62.803 | N/A | N/A | 30.905 | PK |
| 2 | | 2483.500 | 59.475 | 28.584 | -14.525 | 74.000 | 30.892 | PK |
| 3 | * | 2483.789 | 61.655 | 30.764 | -12.345 | 74.000 | 30.891 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2476MHz | |

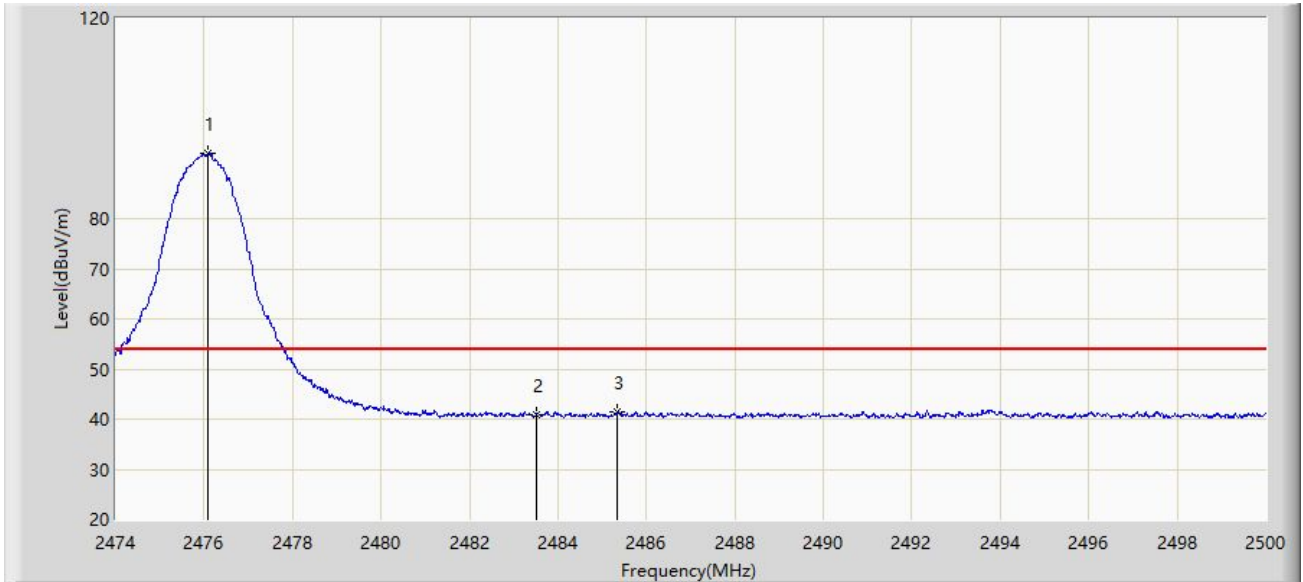


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2476.093 | 92.922 | 62.017 | N/A | N/A | 30.905 | AV |
| 2 | | 2483.500 | 40.838 | 9.947 | -13.162 | 54.000 | 30.892 | AV |
| 3 | * | 2485.349 | 41.573 | 10.685 | -12.427 | 54.000 | 30.889 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2476MHz | |

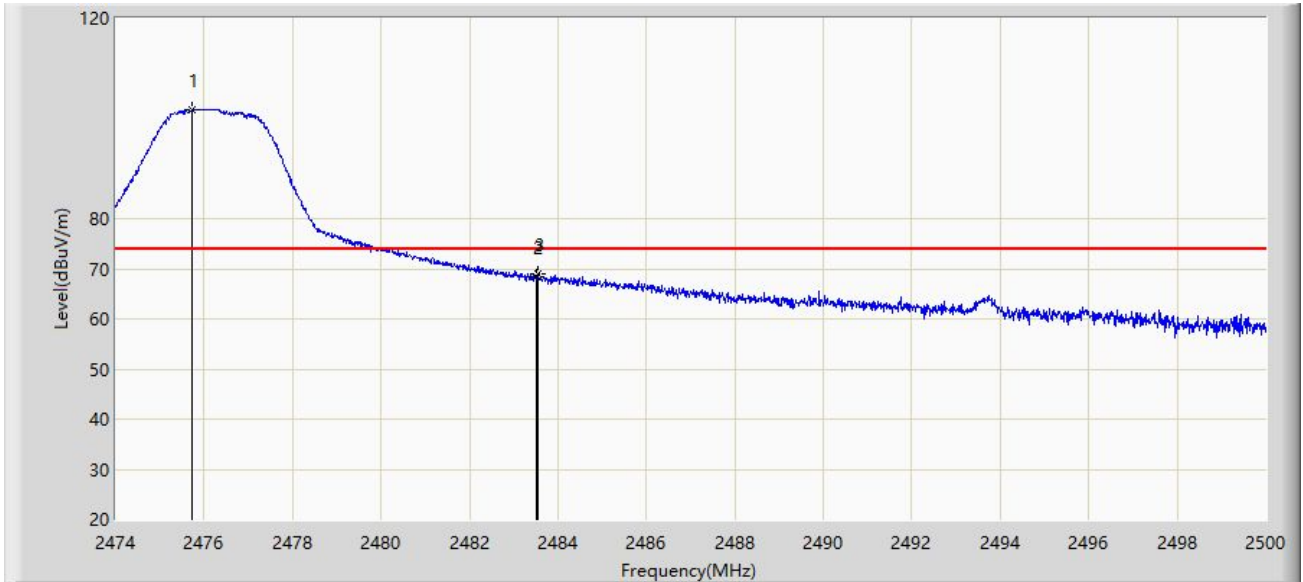


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2475.729 | 101.712 | 70.806 | N/A | N/A | 30.906 | PK |
| 2 | | 2483.500 | 68.335 | 37.444 | -5.665 | 74.000 | 30.892 | PK |
| 3 | * | 2483.542 | 69.012 | 38.121 | -4.988 | 74.000 | 30.892 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2476MHz | |

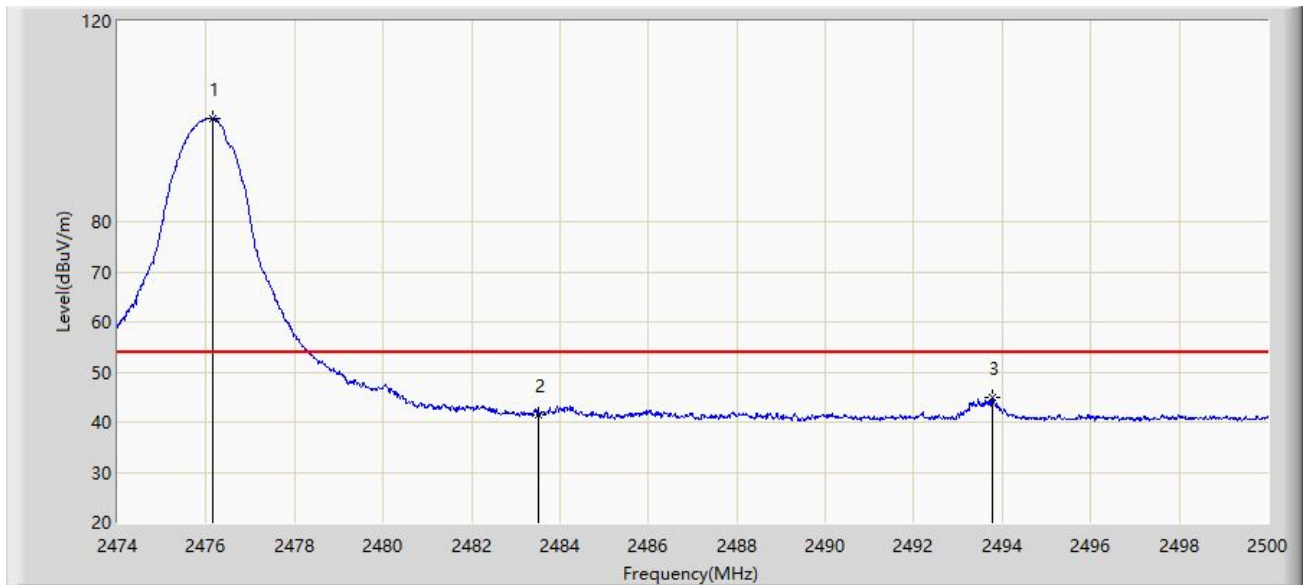


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2476.158 | 100.604 | 69.699 | N/A | N/A | 30.905 | AV |
| 2 | | 2483.500 | 41.531 | 10.640 | -12.469 | 54.000 | 30.892 | AV |
| 3 | * | 2493.773 | 44.911 | 14.029 | -9.089 | 54.000 | 30.883 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2480MHz | |

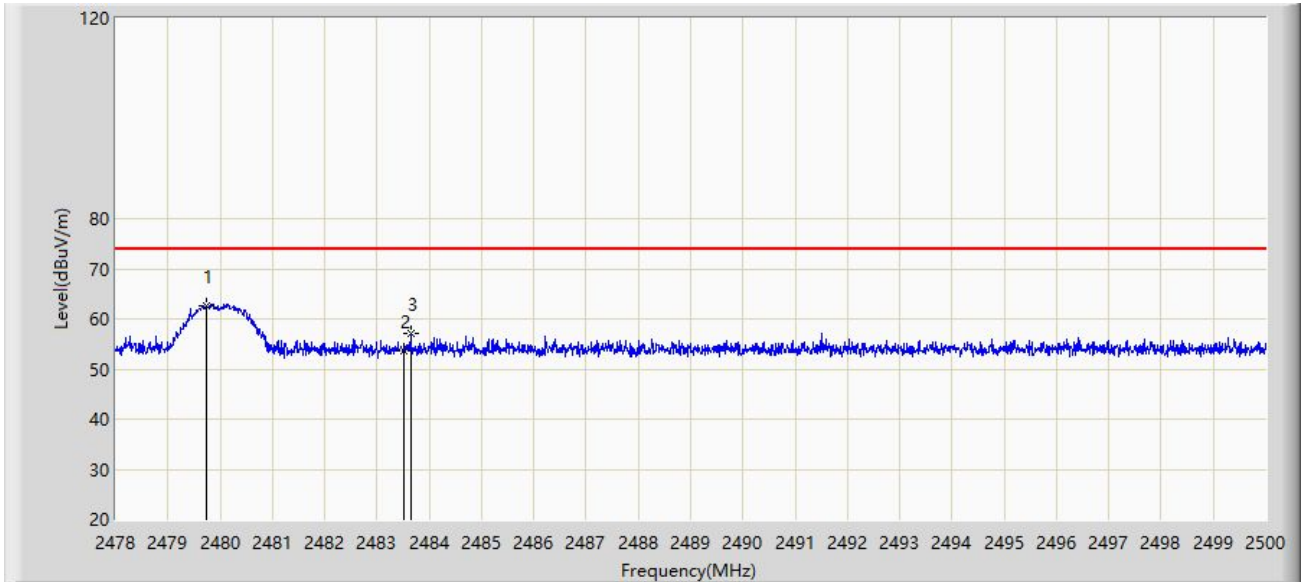


| No | Mark | Frequency (MHz) | Measure Level (dB μ V/m) | Reading Level (dB μ V) | Margin (dB) | Limit (dB μ V/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------------|----------------------------|-------------|----------------------|---------------|------|
| 1 | | 2479.749 | 62.723 | 31.825 | N/A | N/A | 30.897 | PK |
| 2 | | 2483.500 | 53.584 | 22.693 | -20.416 | 74.000 | 30.892 | PK |
| 3 | * | 2483.643 | 57.001 | 26.110 | -16.999 | 74.000 | 30.892 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Horizontal |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2480MHz | |

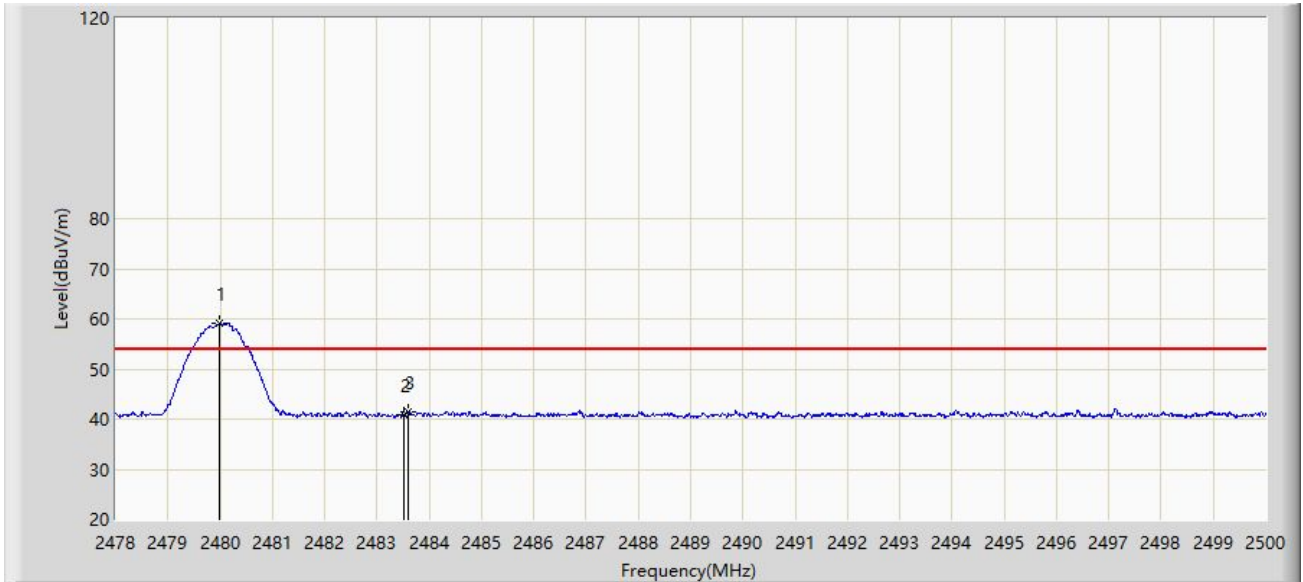


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2479.980 | 59.028 | 28.131 | N/A | N/A | 30.897 | AV |
| 2 | | 2483.500 | 40.743 | 9.852 | -13.257 | 54.000 | 30.892 | AV |
| 3 | * | 2483.610 | 41.360 | 10.469 | -12.640 | 54.000 | 30.892 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2480MHz | |

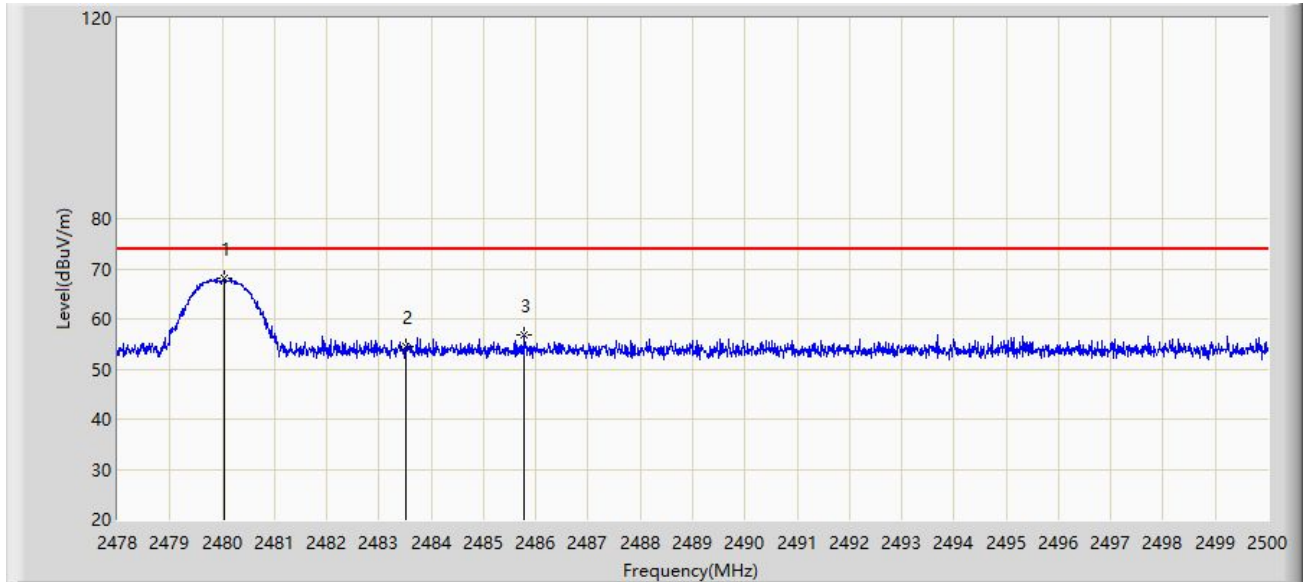


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2480.046 | 68.003 | 37.106 | N/A | N/A | 30.897 | PK |
| 2 | | 2483.500 | 54.478 | 23.587 | -19.522 | 74.000 | 30.892 | PK |
| 3 | * | 2485.788 | 56.768 | 25.880 | -17.232 | 74.000 | 30.888 | PK |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

| | |
|--------------------------------|-----------------------|
| Site: WZ-AC1 | Test Date: 2023-02-18 |
| Limit: FCC_2.4G_RE(3m) | Engineer: Carl Jiang |
| Probe: BBHA9120D_1167_1-18GHz | Polarity: Vertical |
| EUT: SLT6 | Power: By Battery |
| Test Mode: Transmit at 2480MHz | |

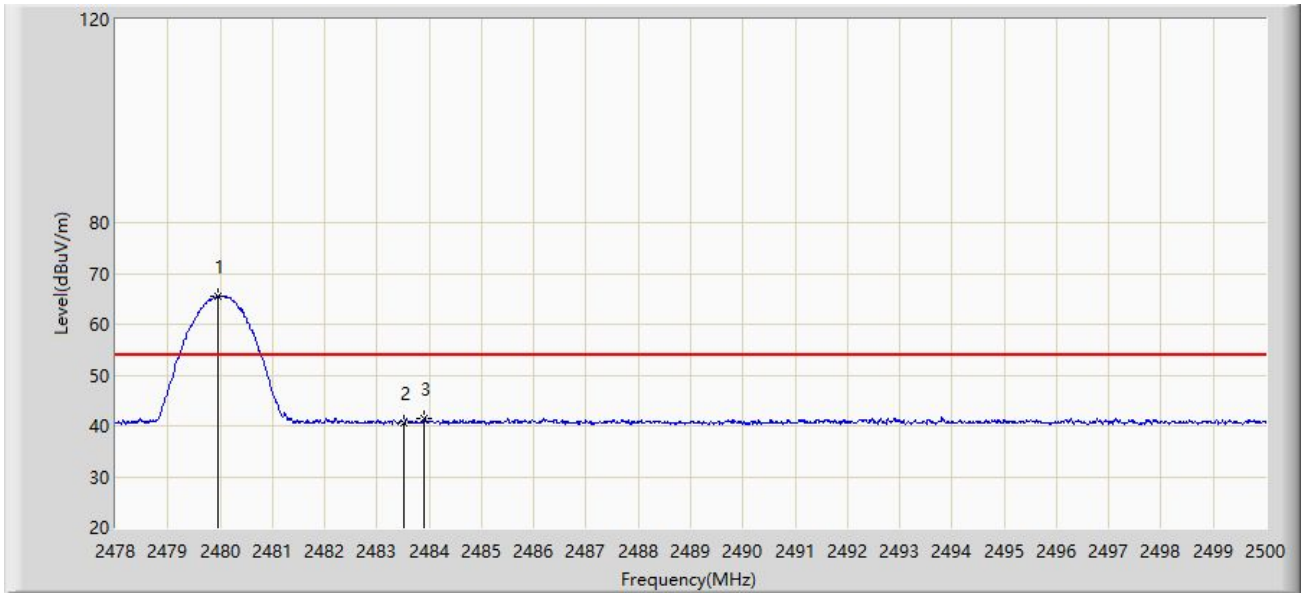

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1 | | 2479.958 | 65.570 | 34.673 | N/A | N/A | 30.897 | AV |
| 2 | | 2483.500 | 40.724 | 9.833 | -13.276 | 54.000 | 30.892 | AV |
| 3 | * | 2483.907 | 41.399 | 10.508 | -12.601 | 54.000 | 30.891 | AV |

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

The device is only powered by 4 * AA batteries, so this test item is not applicable.

Appendix B - Test Setup Photograph

Refer to "2211RSU028-UT" file.

Appendix C - EUT Photograph

Refer to "2211RSU028-UE" file.

_____ The End _____