

TEST REPORT

Reference No...... : WTF21D12149221W001
FCC ID : BRWSPMR14000
Applicant..... : Horizon Hobby, LLC.
Address..... : 2904 Research Rd, Champaign, IL 61822 United States
Manufacturer : Horizon Hobby, LLC.
Address..... : 2904 Research Rd., Champaign, IL, 61822 United States
Product..... : iX14
Model(s) : SPMR14000, SPMR140001
Standards..... : FCC 47CFR Part15 Subpart C §15.247
Date of Receipt sample : 2021-12-30
Date of Test : 2021-12-30 to 2022-03-01
Date of Issue..... : 2022-03-15
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:


Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998


Fax: +86-769-2267 6828

Compiled by:



Andy Feng /Project Engineer

Approved by:



Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
4.4 TEST FACILITY	7
4.5 SUBCONTRACTED.....	7
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	7
4.7 TEST MODE	8
5 TEST SUMMARY	9
6 EQUIPMENT USED DURING TEST	10
6.1 EQUIPMENTS LIST	10
6.2 DESCRIPTION OF SUPPORT UNITS	11
6.3 MEASUREMENT UNCERTAINTY	11
6.4 TEST EQUIPMENT CALIBRATION	11
7 DUTY CYCLE.....	12
8 CONDUCTED EMISSION	14
8.1 E.U.T. OPERATION	14
8.2 EUT SETUP	14
8.3 MEASUREMENT DESCRIPTION	14
8.4 CONDUCTED EMISSION TEST RESULT	15
9 RADIATED EMISSIONS.....	19
9.1 EUT OPERATION.....	19
9.2 TEST SETUP	20
9.3 SPECTRUM ANALYZER SETUP	21
9.4 TEST PROCEDURE	22
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	22
9.6 SUMMARY OF TEST RESULTS	23
10 CONDUCTED SPURIOUS EMISSIONS.....	30
10.1 TEST PROCEDURE.....	30
10.2 TEST RESULT	31
11 BAND EDGE MEASUREMENT	46
11.1 TEST PROCEDURE	46
11.2 TEST RESULT	47
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	50
12.1 TEST PROCEDURE:.....	50
12.2 TEST RESULT:	50
13 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	59
13.1 TEST PROCEDURE:.....	59
13.2 TEST RESULT:	60
14 POWER SPECTRAL DENSITY	66

14.1	TEST PROCEDURE:.....	66
14.2	TEST RESULT:	67
15	ANTENNA REQUIREMENT	73
16	RF EXPOSURE.....	73
17	PHOTOGRAPHS OF TEST SETUP AND EUT.....	73

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF21D12149221 W001	2021-12-30	2021-12-30 to 2022-03-01	2022-03-15	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	iX14
Model(s):	SPMR14000, SPMR140001
Model Description:	Only the model name are difference. Model SPMR14000 was tested in this report.
Wi-Fi Specification:	2.4G-802.11b/g/n HT20
Hardware Version:	X14_SOM_3566_V02
Software Version:	rk3566_r-userdebug 11 RQ1D.210105.003 eng.work.20211123.195427 release-keys

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n HT20: 2412~2462MHz BLE:2402-2480MHz
Max. RF output power:	WiFi(2.4G): 17.02dBm BLE(1M): 4.44dBm BLE(2M): 4.54dBm
Modulation Technology:	WiFi: CCK, OFDM BLE:GFSK
Antenna installation:	WiFi: internal permanent antenna BLE: internal permanent antenna
Antenna Gain:	2.02dBi
Ratings:	Battery DC 3.7V, 10500mAh

4.3 Channel List

Wi-Fi

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	EMI Test Receiver	R&S	ESCI	100947	2021-07-26	1Year
2	LISN	R&S	ENV216	101215	2021-07-26	1Year
3	Cable	Top	TYPE16(3.5M)	-	2021-07-26	1Year
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	EMI Test Receiver	R&S	ESCI	101155	2021-07-26	1Year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	2021-07-26	1Year
3	Limiter	York	MTS-IMP-136	261115-001-0024	2021-07-26	1Year
4	Cable	LARGE	RF300	-	2021-07-26	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	1Year
2	Amplifier	Agilent	8447D	2944A10178	2021-07-26	1Year
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2021-08-23	1Year
4	Coaxial Cable	Top	TYPE16(13M)	-	2021-04-26	1Year
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-30	1Year
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2021-07-30	1Year
7	Broadband Pre-amplifier	COMPLIANCE	PAP-1G18	2004	2021-07-26	1Year
8	Coaxial Cable	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2021-04-26	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Test Receiver	R&S	ESCI	101296	2021-04-26	1Year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-10-30	1Year
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2021-04-29	1Year
4	Amplifier	ANRITSU	MH648A	M43381	2021-04-26	1Year
5	Cable	HUBER+SUHNER	CBL2	525178	2021-04-26	1Year
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	1Year
2	Spectrum Analyzer	R&S	FSP40	100501	2021-07-29	1Year
3	Signal Analyzer	Agilent	N9010A	MY50520207	2021-04-19	1Year

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	0.8440	0.9480	0.89	89.03	0.50	-1.01
802.11g	0.1740	0.2800	0.62	62.14	2.07	-4.13
802.11n-HT20	0.1620	0.2660	0.61	60.90	2.15	-4.31


Remark:

Duty cycle=On Time/period;


Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$


Wi-Fi 802.11b

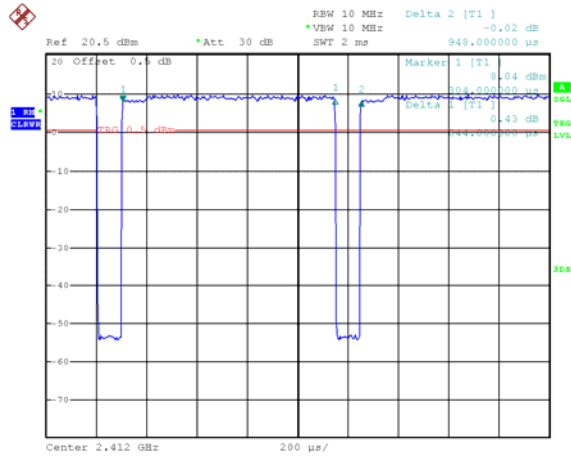

Wi-Fi 802.11g

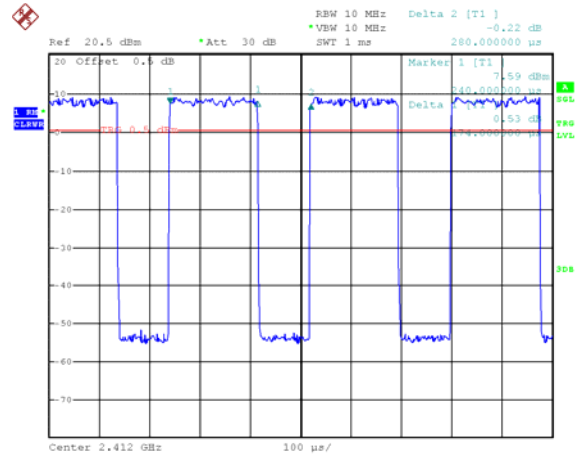

Wi-Fi 802.11n-HT20

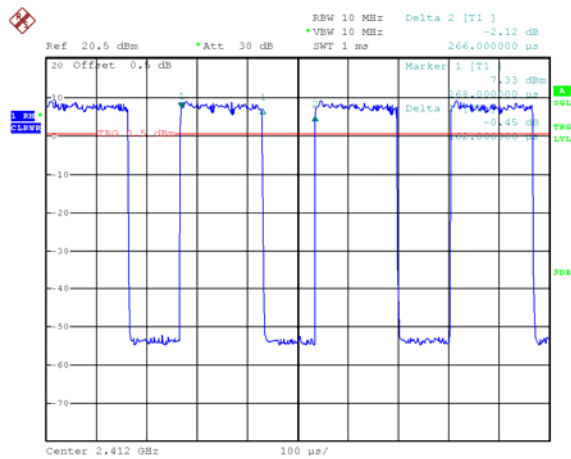

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46
0.5 to 5	56	46
5 to 30	60	50

8.1 E.U.T. Operation

Operating Environment :

Temperature: 21.5 °C

Humidity: 51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

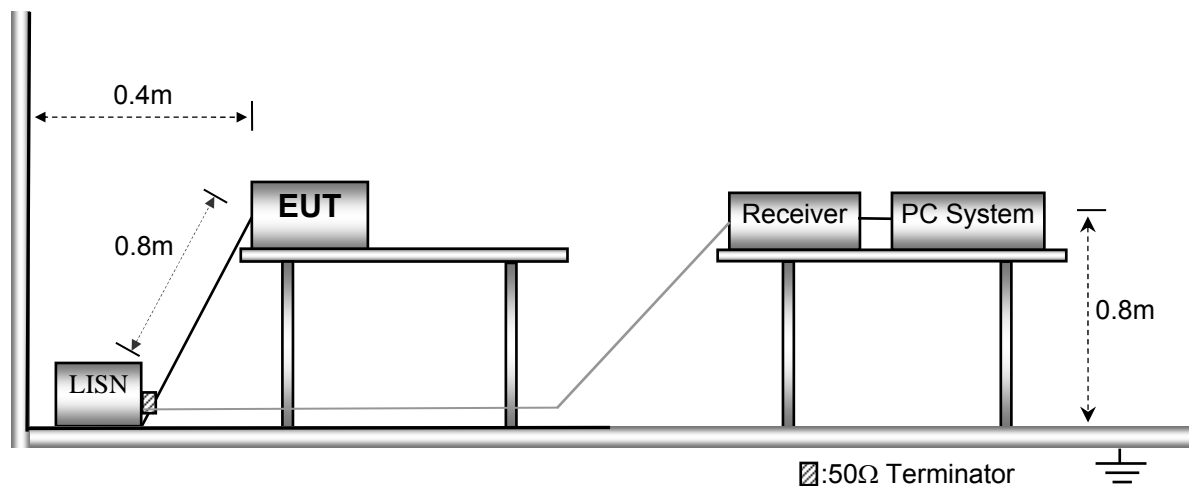

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode (802.11b mode low channel)

Live line:

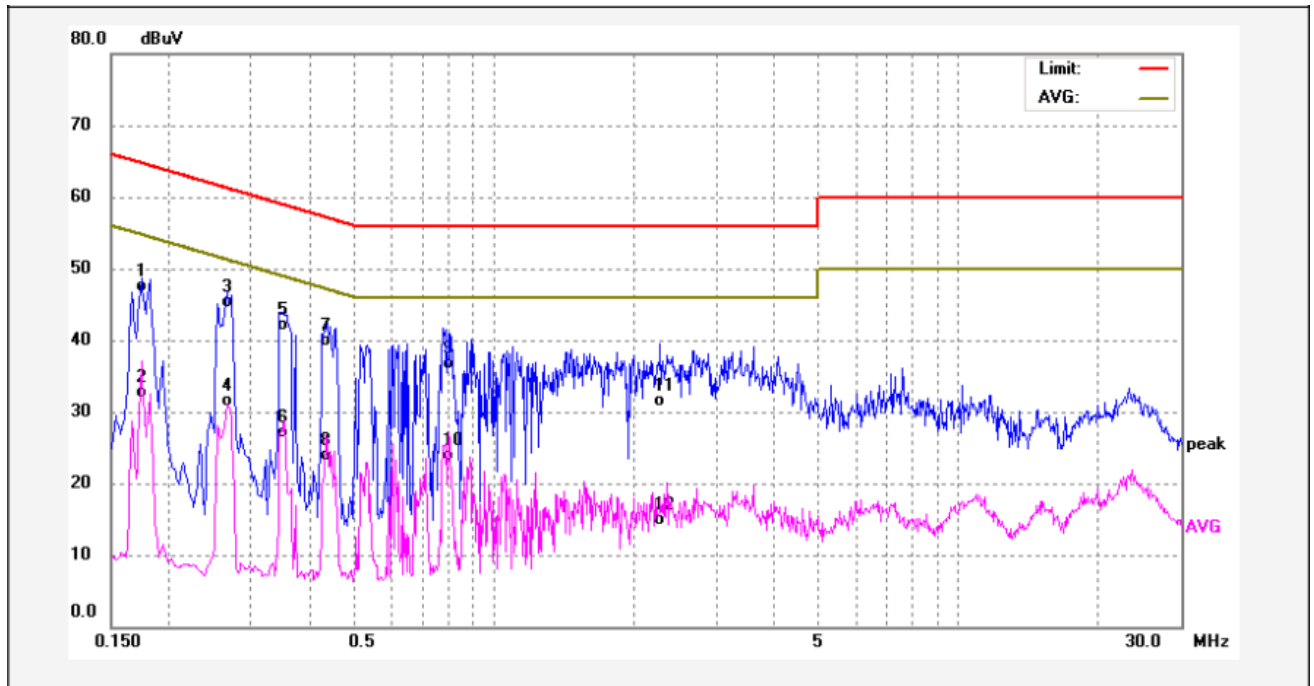

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1740	35.42	12.00	47.42	64.76	-17.34	QP	
2	0.1740	20.63	12.00	32.63	54.76	-22.13	AVG	
3	0.2660	33.49	11.81	45.30	61.24	-15.94	QP	
4	0.2660	19.63	11.81	31.44	51.24	-19.80	AVG	
5	0.3540	30.42	11.74	42.16	58.87	-16.71	QP	
6	0.3540	15.45	11.74	27.19	48.87	-21.68	AVG	
7	0.4340	28.19	11.74	39.93	57.18	-17.25	QP	
8	0.4340	12.24	11.74	23.98	47.18	-23.20	AVG	
9	0.7980	24.88	11.90	36.78	56.00	-19.22	QP	
10	0.7980	11.95	11.90	23.85	46.00	-22.15	AVG	
11	2.2820	19.57	11.96	31.53	56.00	-24.47	QP	
12	2.2820	2.93	11.96	14.89	46.00	-31.11	AVG	


Neutral line:

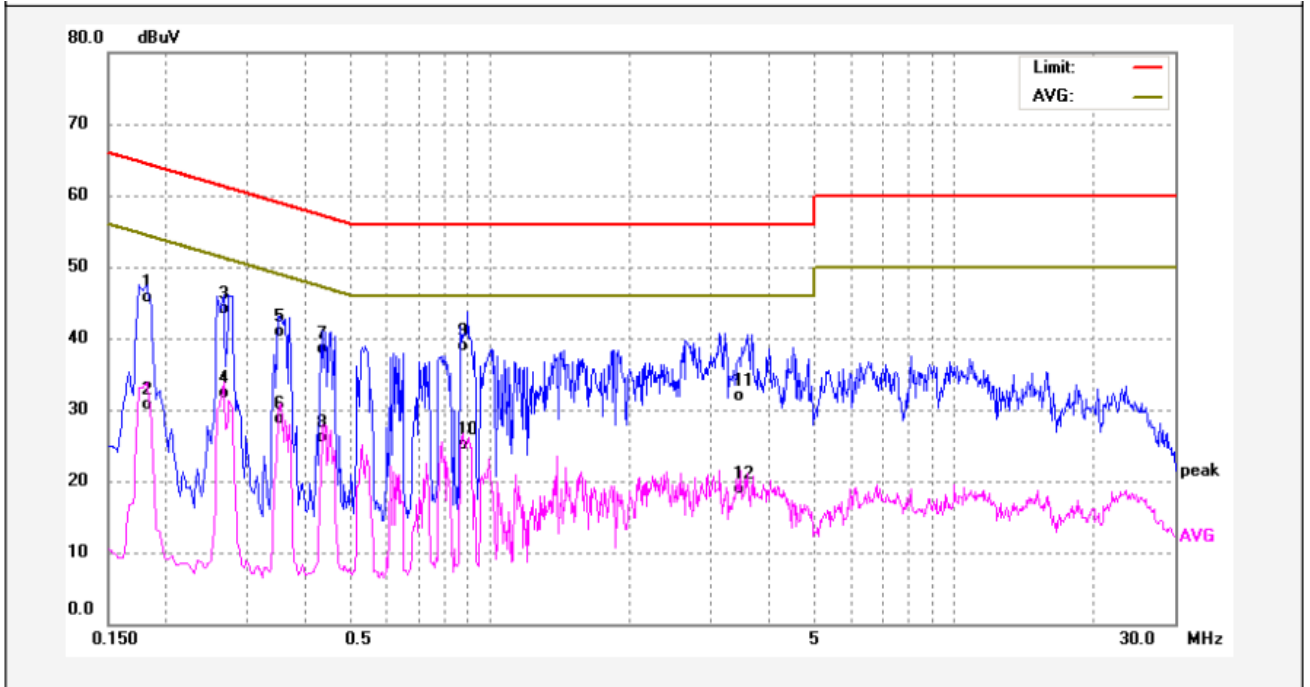

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1819	34.24	11.41	45.65	64.39	-18.74	QP	
2	0.1819	19.22	11.41	30.63	54.39	-23.76	AVG	
3	0.2660	32.84	11.28	44.12	61.24	-17.12	QP	
4	0.2660	20.96	11.28	32.24	51.24	-19.00	AVG	
5	0.3540	29.72	11.21	40.93	58.87	-17.94	QP	
6	0.3540	17.52	11.21	28.73	48.87	-20.14	AVG	
7	0.4340	27.40	11.17	38.57	57.18	-18.61	QP	
8	0.4340	14.90	11.17	26.07	47.18	-21.11	AVG	
9	0.8740	27.59	11.30	38.89	56.00	-17.11	QP	
10	0.8740	13.83	11.30	25.13	46.00	-20.87	AVG	
11	3.4620	20.47	11.52	31.99	56.00	-24.01	QP	
12	3.4620	7.33	11.52	18.85	46.00	-27.15	AVG	


Worst Mode: BLE mode (low channel)

Live line:

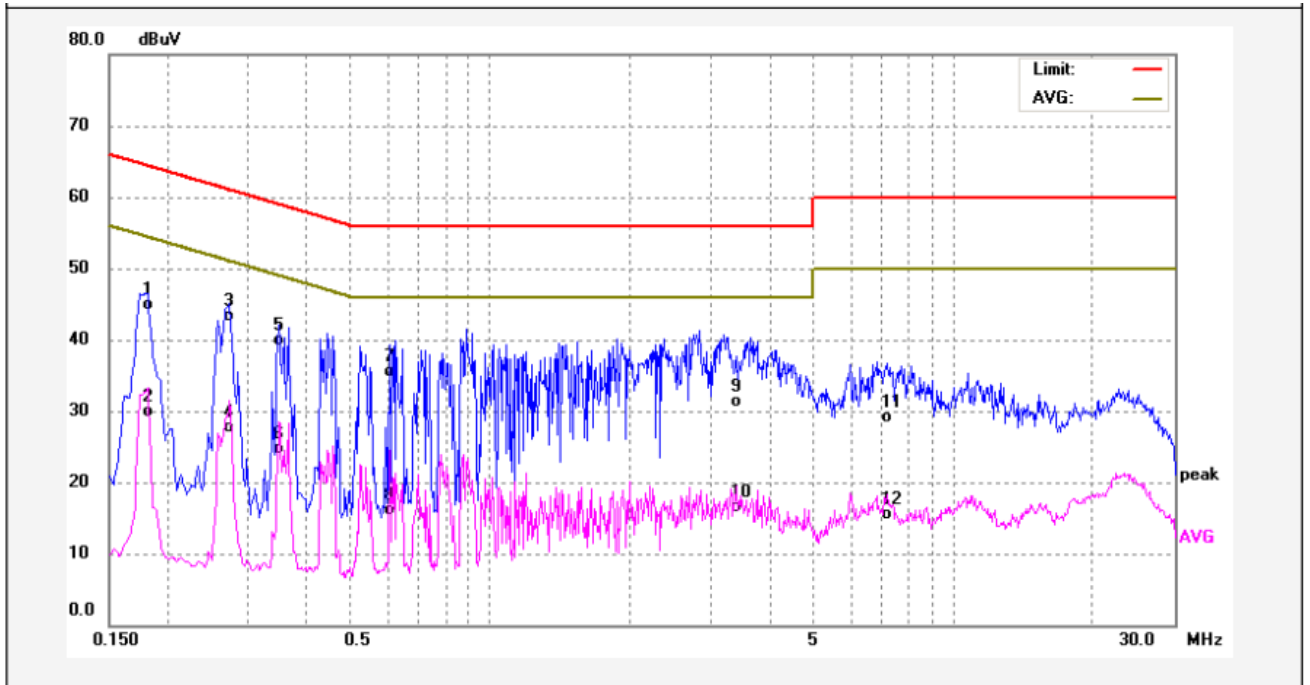

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1819	32.87	11.98	44.85	64.39	-19.54	QP	
2	0.1819	17.95	11.98	29.93	54.39	-24.46	AVG	
3	0.2740	31.45	11.79	43.24	60.99	-17.75	QP	
4	0.2740	15.99	11.79	27.78	50.99	-23.21	AVG	
5	0.3500	28.16	11.74	39.90	58.96	-19.06	QP	
6	0.3500	13.01	11.74	24.75	48.96	-24.21	AVG	
7	0.6060	23.76	11.82	35.58	56.00	-20.42	QP	
8	0.6060	4.22	11.82	16.04	46.00	-29.96	AVG	
9	3.3900	19.14	12.10	31.24	56.00	-24.76	QP	
10	3.3900	4.41	12.10	16.51	46.00	-29.49	AVG	
11	7.1780	17.24	11.89	29.13	60.00	-30.87	QP	
12	7.1780	3.69	11.89	15.58	50.00	-34.42	AVG	

Neutral line:

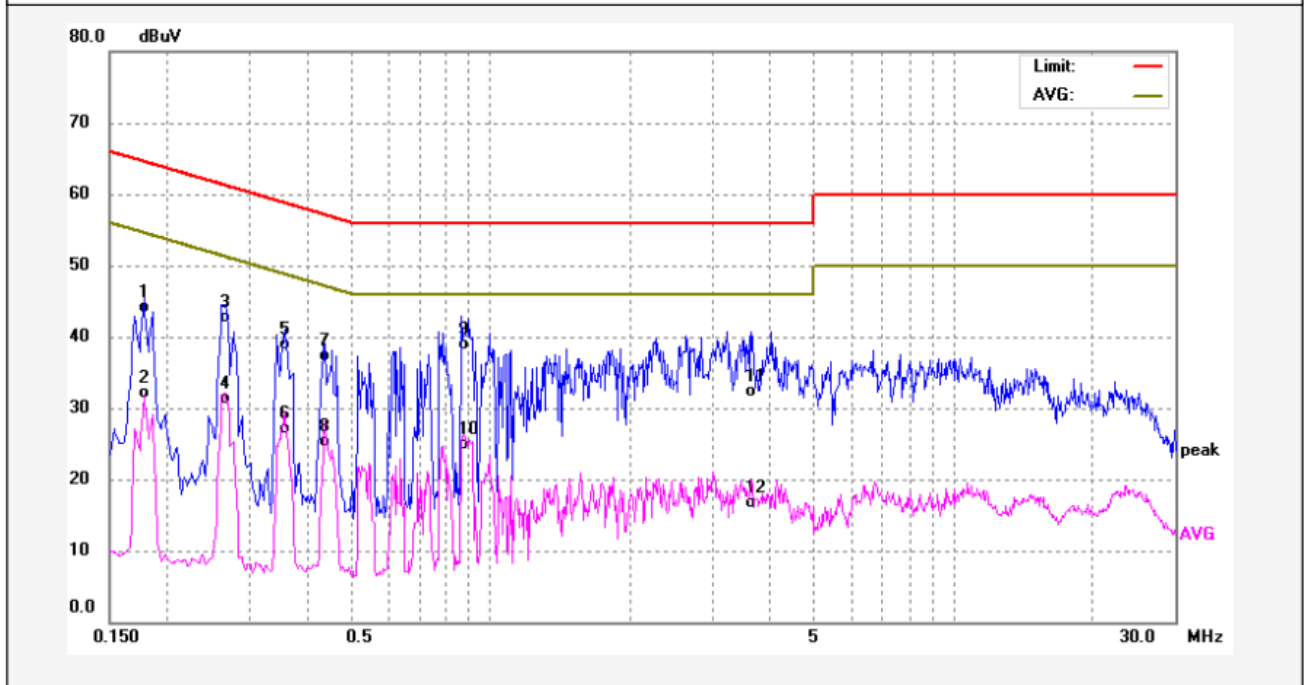

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	32.74	11.43	44.17	64.57	-20.40	QP	
2	0.1780	20.66	11.43	32.09	54.57	-22.48	AVG	
3	0.2660	31.37	11.28	42.65	61.24	-18.59	QP	
4	0.2660	20.04	11.28	31.32	51.24	-19.92	AVG	
5	0.3580	27.75	11.21	38.96	58.77	-19.81	QP	
6	0.3580	15.95	11.21	27.16	48.77	-21.61	AVG	
7	0.4380	26.09	11.17	37.26	57.10	-19.84	QP	
8	0.4380	14.19	11.17	25.36	47.10	-21.74	AVG	
9	0.8740	27.53	11.30	38.83	56.00	-17.17	QP	
10	0.8740	13.65	11.30	24.95	46.00	-21.05	AVG	
11	3.6540	20.77	11.53	32.30	56.00	-23.70	QP	
12	3.6540	5.26	11.53	16.79	46.00	-29.21	AVG	

9 Radiated Emissions

Test Requirement: FCC 47CFR Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in TX transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

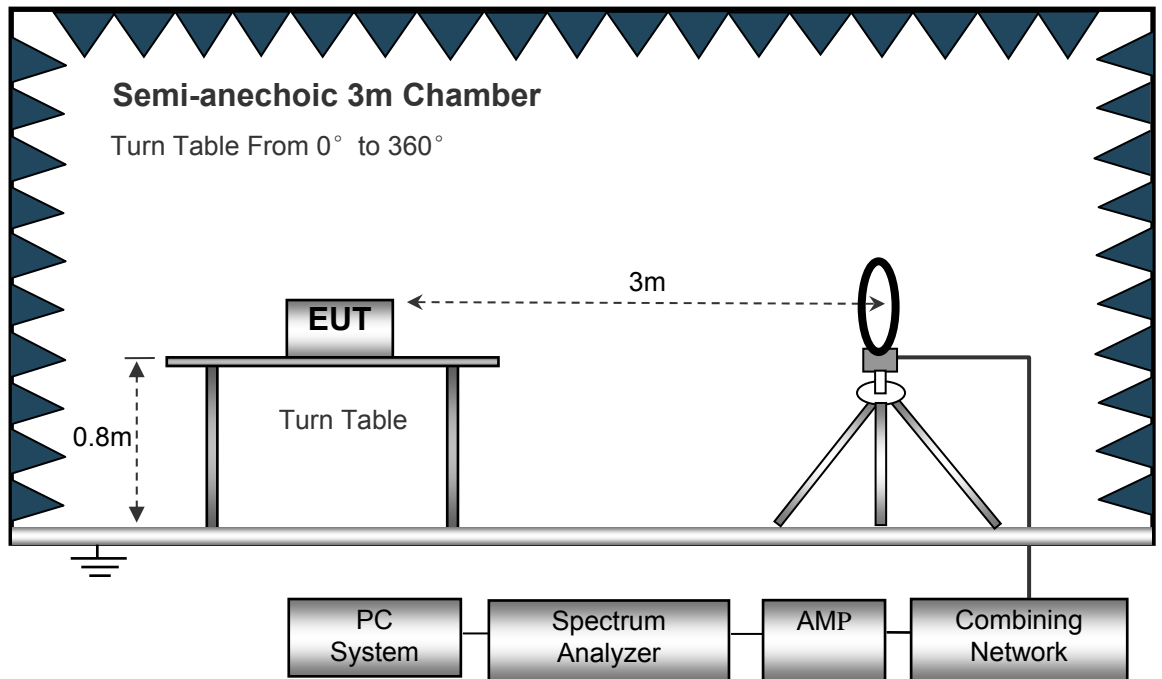

The test setup for emission measurement from 30 MHz to 1 GHz.

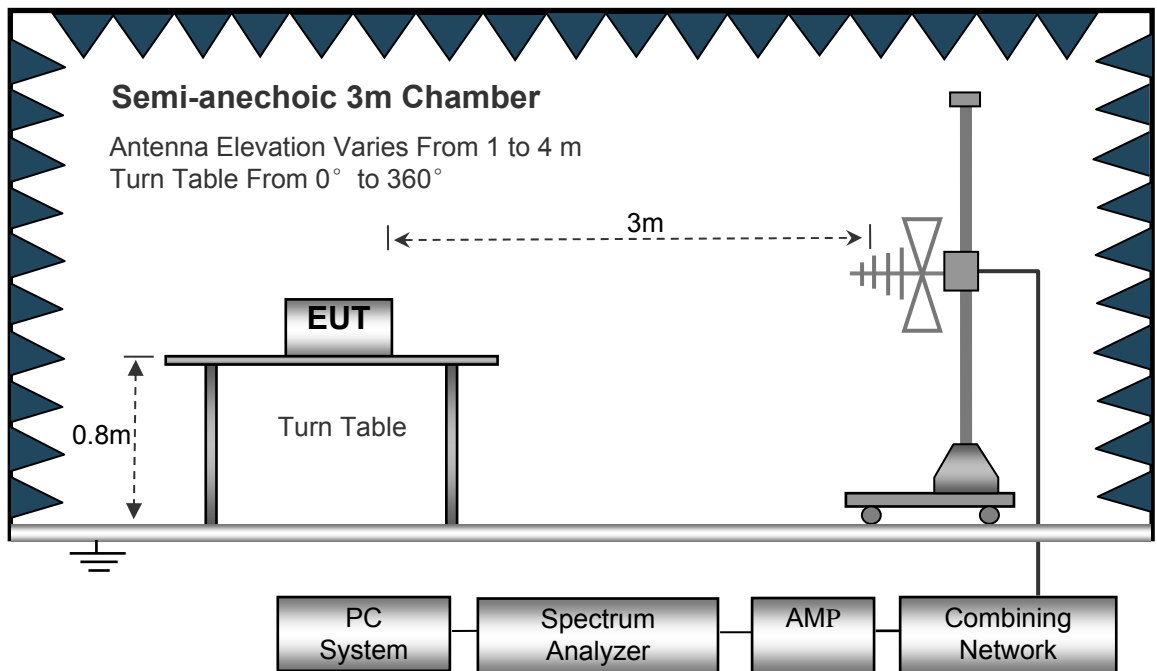

The test setup for emission measurement above 1 GHz.

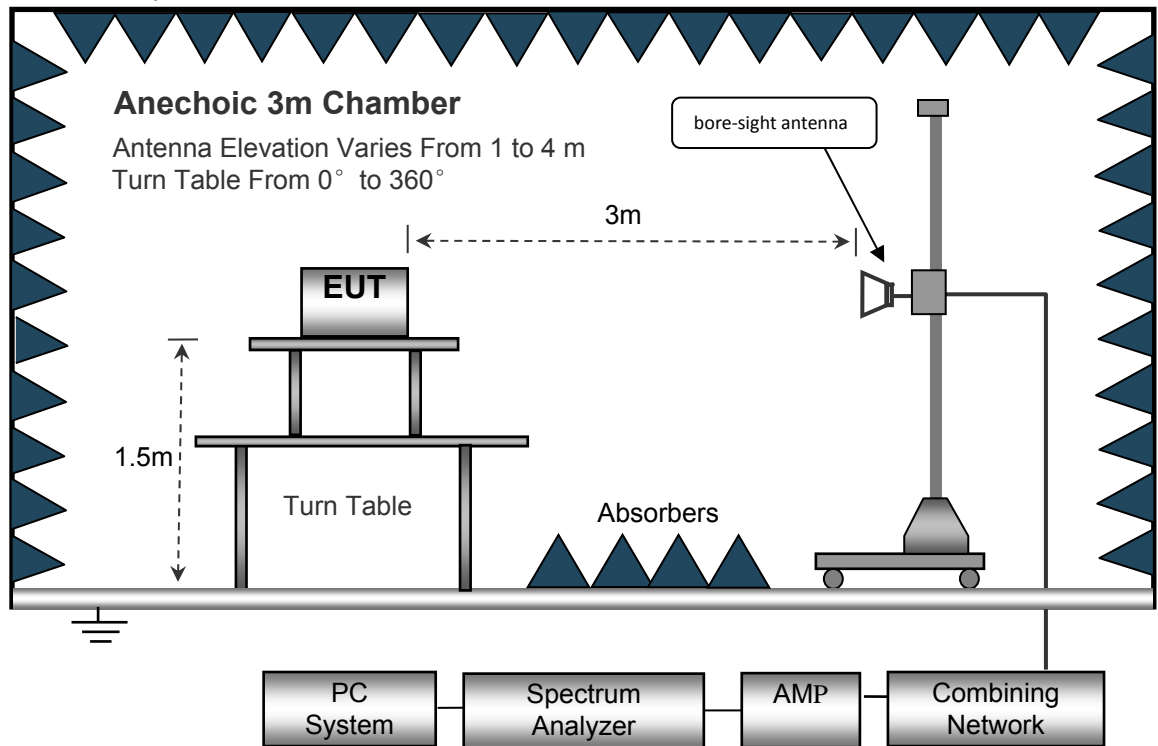

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

WiFi:

Test Frequency: 9kHz ~ 30MHz

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.031	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.763	25.46	QP	21.35	40.00	6.81	29.54	-22.73
25.640	25.12	QP	20.67	40.00	5.79	29.54	-23.75
802.11g							
6.032	25.41	QP	21.84	40.00	7.25	29.54	-22.29
15.764	25.76	QP	21.35	40.00	7.11	29.54	-22.43
25.631	25.32	QP	20.67	40.00	5.99	29.54	-23.55
802.11n(HT20)							
6.045	25.71	QP	21.84	40.00	7.55	29.54	-21.99
15.736	25.43	QP	21.35	40.00	6.78	29.54	-22.76
25.480	25.65	QP	20.67	40.00	6.32	29.54	-23.22

Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
223.24	38.59	QP	202	2.0	H	-11.62	26.97	46.00	-19.03
223.24	29.47	QP	145	1.4	V	-11.62	17.85	46.00	-28.15
4824.00	50.34	PK	291	1.5	V	-1.06	49.28	74.00	-24.72
4824.00	48.35	Ave	291	1.5	V	-1.06	47.29	54.00	-6.71
7236.00	44.58	PK	257	1.4	H	1.33	45.91	74.00	-28.09
7236.00	43.19	Ave	257	1.4	H	1.33	44.52	54.00	-9.48
2343.14	46.22	PK	188	1.9	V	-13.19	33.03	74.00	-40.97
2343.14	39.75	Ave	188	1.9	V	-13.19	26.56	54.00	-27.44
2381.28	44.30	PK	92	1.2	H	-13.14	31.16	74.00	-42.84
2381.28	36.12	Ave	92	1.2	H	-13.14	22.98	54.00	-31.02
2499.18	44.03	PK	45	2.0	V	-13.08	30.95	74.00	-43.05
2499.18	37.74	Ave	45	2.0	V	-13.08	24.66	54.00	-29.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.24	39.08	QP	200	1.8	H	-11.62	27.46	46.00	-18.54
223.24	28.20	QP	163	1.9	V	-11.62	16.58	46.00	-29.42
4874.00	50.01	PK	98	1.1	V	-0.62	49.39	74.00	-24.61
4874.00	47.73	Ave	98	1.1	V	-0.62	47.11	54.00	-6.89
7311.00	43.44	PK	235	1.5	H	2.21	45.65	74.00	-28.35
7311.00	41.79	Ave	235	1.5	H	2.21	44.00	54.00	-10.00
2331.58	46.52	PK	159	1.2	V	-13.19	33.33	74.00	-40.67
2331.58	37.31	Ave	159	1.2	V	-13.19	24.12	54.00	-29.88
2360.30	42.51	PK	75	1.1	H	-13.14	29.37	74.00	-44.63
2360.30	37.77	Ave	75	1.1	H	-13.14	24.63	54.00	-29.37
2488.67	44.74	PK	29	1.9	V	-13.08	31.66	74.00	-42.34
2488.67	38.19	Ave	29	1.9	V	-13.08	25.11	54.00	-28.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
223.24	37.60	QP	83	1.6	H	-11.62	25.98	46.00	-20.02
223.24	28.24	QP	322	1.9	V	-11.62	16.62	46.00	-29.38
4924.00	49.17	PK	213	1.4	V	-0.24	48.93	74.00	-25.07
4924.00	47.63	Ave	213	1.4	V	-0.24	47.39	54.00	-6.61
7386.00	42.78	PK	280	1.1	H	2.84	45.62	74.00	-28.38
7386.00	42.95	Ave	280	1.1	H	2.84	45.79	54.00	-8.21
2310.15	46.35	PK	293	1.4	V	-13.19	33.16	74.00	-40.84
2310.15	39.86	Ave	293	1.4	V	-13.19	26.67	54.00	-27.33
2381.77	43.01	PK	272	1.5	H	-13.14	29.87	74.00	-44.13
2381.77	37.05	Ave	272	1.5	H	-13.14	23.91	54.00	-30.09
2499.72	43.45	PK	39	1.3	V	-13.08	30.37	74.00	-43.63
2499.72	36.03	Ave	39	1.3	V	-13.08	22.95	54.00	-31.05

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BT BLE:**Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.262	25.48	QP	21.84	40.00	7.32	29.54	-22.22
15.730	24.49	QP	21.35	40.00	5.84	29.54	-23.70
25.680	25.59	QP	20.67	40.00	6.26	29.54	-23.28

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
268.16	35.26	QP	77	1.5	H	-13.35	21.91	46.00	-24.09
268.16	40.27	QP	140	1.3	V	-13.35	26.92	46.00	-19.08
4804.00	45.26	PK	321	1.6	V	-1.06	44.20	74.00	-29.80
4804.00	43.85	Ave	321	1.6	V	-1.06	42.79	54.00	-11.21
7206.00	44.53	PK	280	1.7	H	1.33	45.86	74.00	-28.14
7206.00	38.57	Ave	280	1.7	H	1.33	39.90	54.00	-14.10
2311.05	45.11	PK	15	1.5	V	-13.19	31.92	74.00	-42.08
2311.05	38.32	Ave	15	1.5	V	-13.19	25.13	54.00	-28.87
2381.77	43.27	PK	257	1.9	H	-13.14	30.13	74.00	-43.87
2381.77	38.47	Ave	257	1.9	H	-13.14	25.33	54.00	-28.67
2499.73	43.49	PK	192	2.0	V	-13.08	30.41	74.00	-43.59
2499.73	38.10	Ave	192	2.0	V	-13.08	25.02	54.00	-28.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
268.16	35.82	QP	266	1.1	H	-13.35	22.47	46.00	-23.53
268.16	39.62	QP	296	1.4	V	-13.35	26.27	46.00	-19.73
4880.00	43.46	PK	358	1.2	V	-0.62	42.84	74.00	-31.16
4880.00	45.19	Ave	358	1.2	V	-0.62	44.57	54.00	-9.43
7320.00	43.31	PK	155	1.4	H	2.21	45.52	74.00	-28.48
7320.00	39.39	Ave	155	1.4	H	2.21	41.60	54.00	-12.40
2342.27	45.03	PK	220	2.0	V	-13.19	31.84	74.00	-42.16
2342.27	39.50	Ave	220	2.0	V	-13.19	26.31	54.00	-27.69
2353.31	42.40	PK	43	1.5	H	-13.14	29.26	74.00	-44.74
2353.31	38.88	Ave	43	1.5	H	-13.14	25.74	54.00	-28.26
2488.13	42.32	PK	296	1.4	V	-13.08	29.24	74.00	-44.76
2488.13	36.38	Ave	296	1.4	V	-13.08	23.30	54.00	-30.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
268.16	37.31	QP	281	1.4	H	-13.35	23.96	46.00	-22.04
268.16	38.46	QP	99	1.6	V	-13.35	25.11	46.00	-20.89
4960.00	42.31	PK	209	1.4	V	-0.24	42.07	74.00	-31.93
4960.00	44.61	Ave	209	1.4	V	-0.24	44.37	54.00	-9.63
7440.00	44.23	PK	30	1.4	H	2.84	47.07	74.00	-26.93
7440.00	36.29	Ave	30	1.4	H	2.84	39.13	54.00	-14.87
2311.83	45.82	PK	171	1.8	V	-13.19	32.63	74.00	-41.37
2311.83	37.15	Ave	171	1.8	V	-13.19	23.96	54.00	-30.04
2359.52	44.48	PK	342	1.2	H	-13.14	31.34	74.00	-42.66
2359.52	38.85	Ave	342	1.2	H	-13.14	25.71	54.00	-28.29
2491.80	44.70	PK	253	1.8	V	-13.08	31.62	74.00	-42.38
2491.80	37.74	Ave	253	1.8	V	-13.08	24.66	54.00	-29.34

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≈ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\approx [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.


10.2 Test Result

Remark: For the WIFI, Both antenna 0 and antenna 1 are tested, and only the worst data antenna 0 is put in the report


9KHz – 30MHz

802.11b


Low Channel

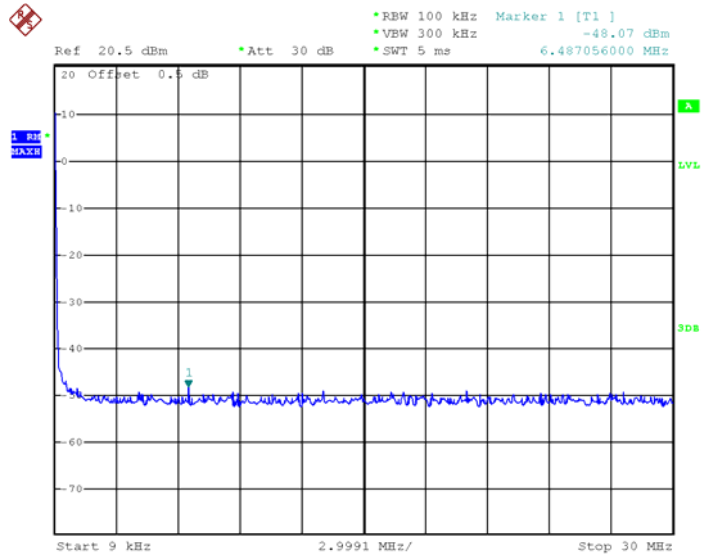

Middle Channel

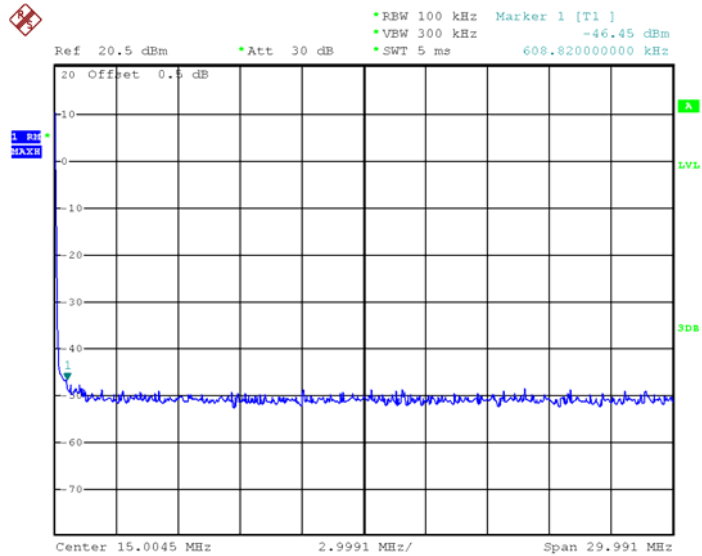




High Channel

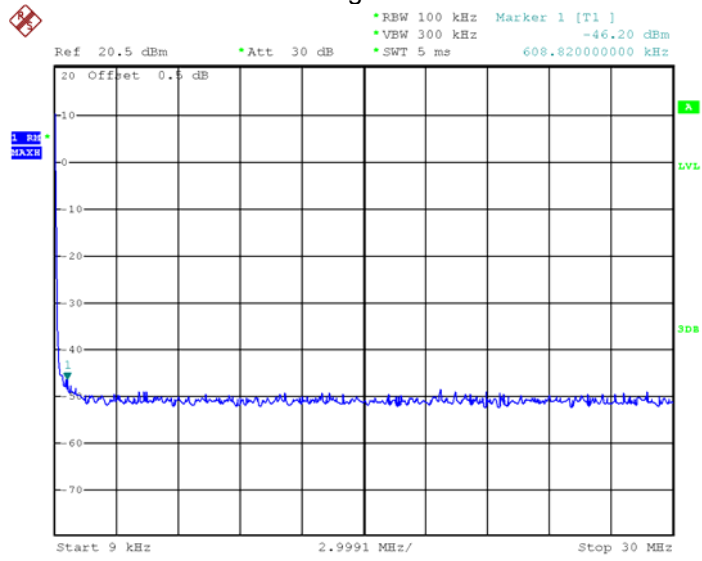

802.11g


Low Channel

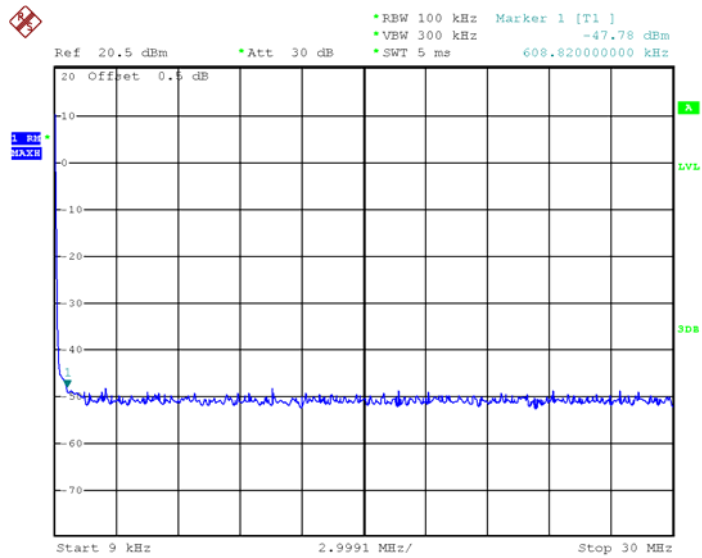

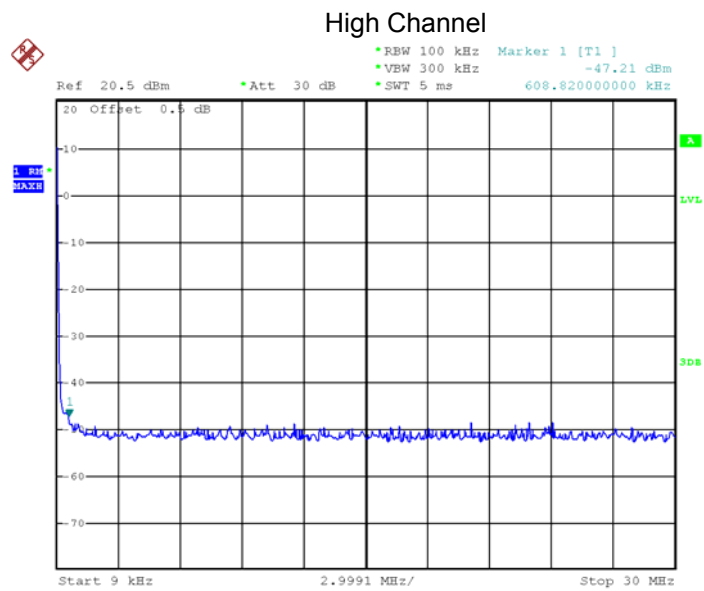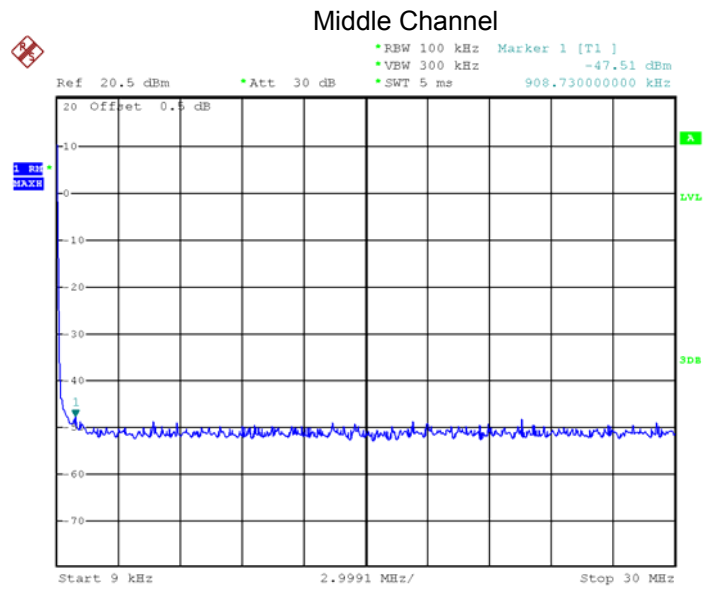



802.11n HT20

Low Channel

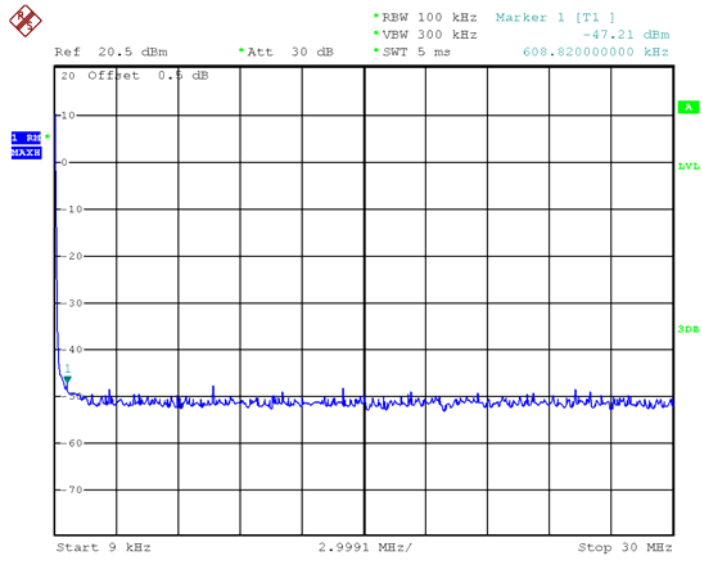


Middle Channel

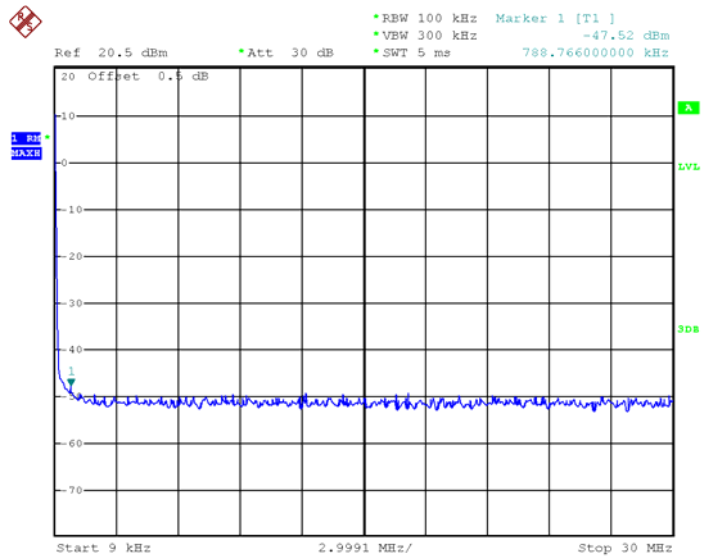

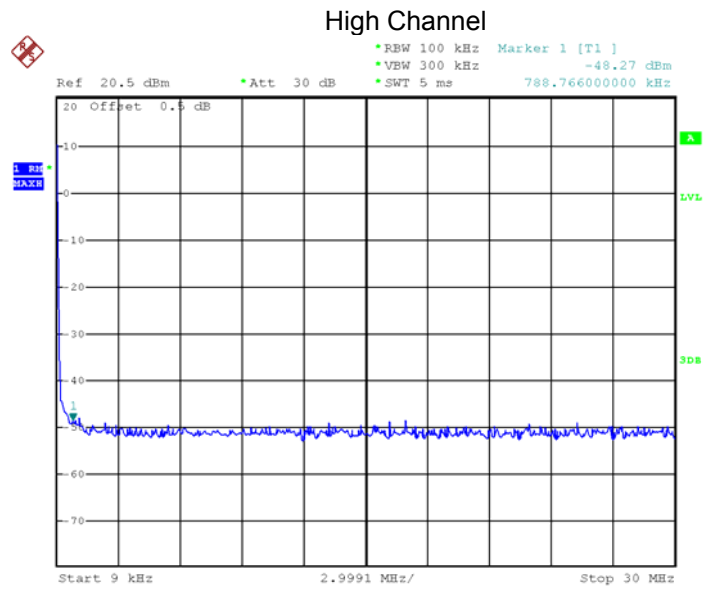


BLE(1M)


Low Channel

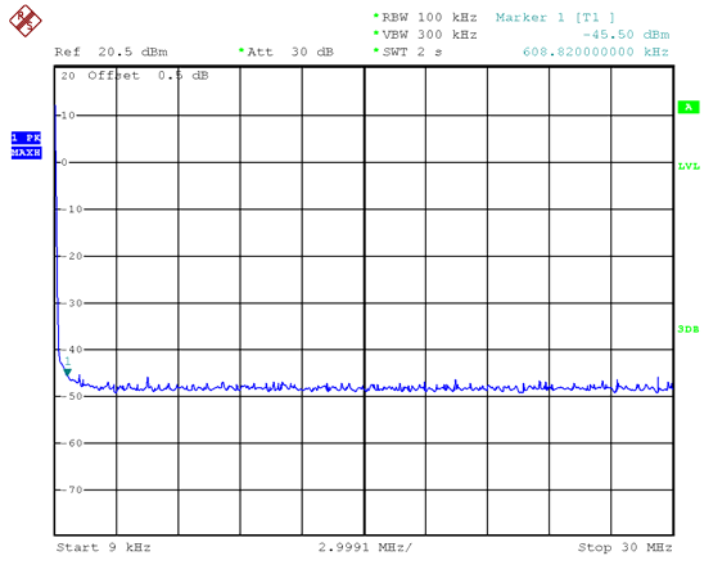

Middle Channel

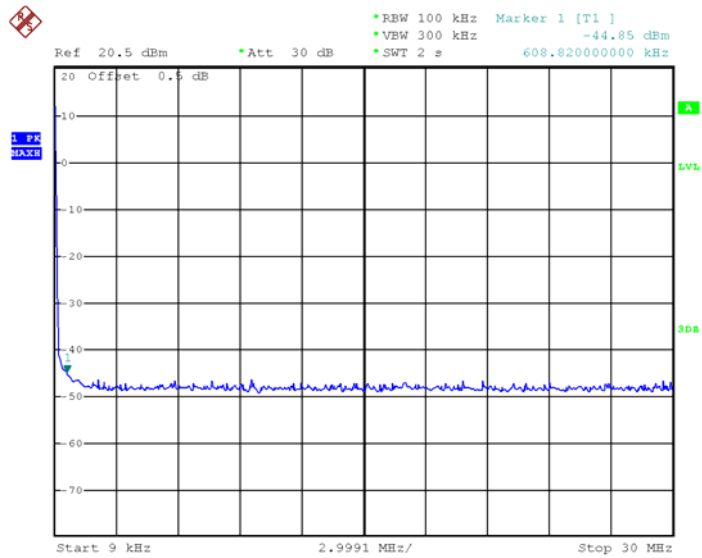


High Channel

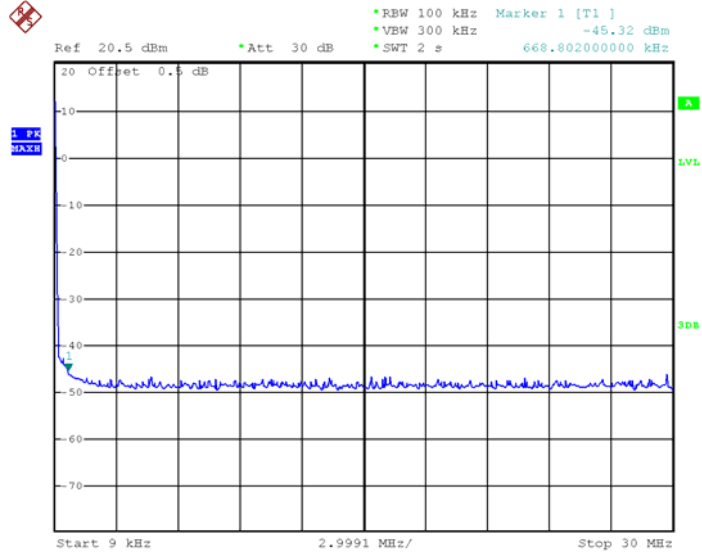


BLE(2M)


Low Channel

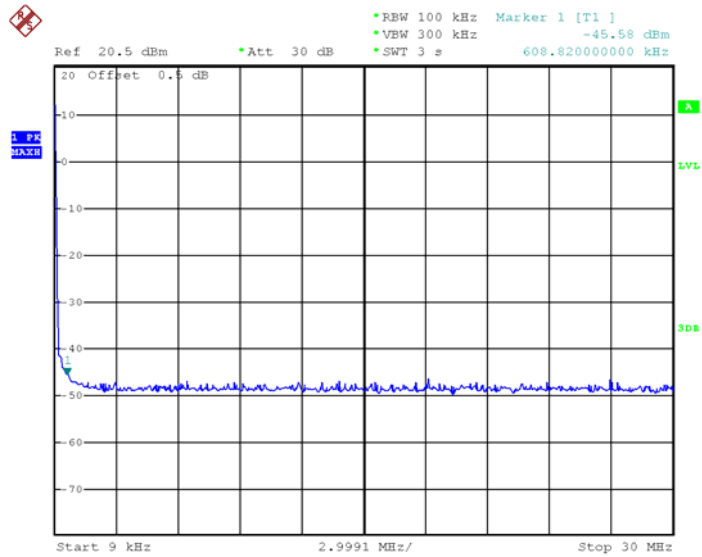

Middle Channel

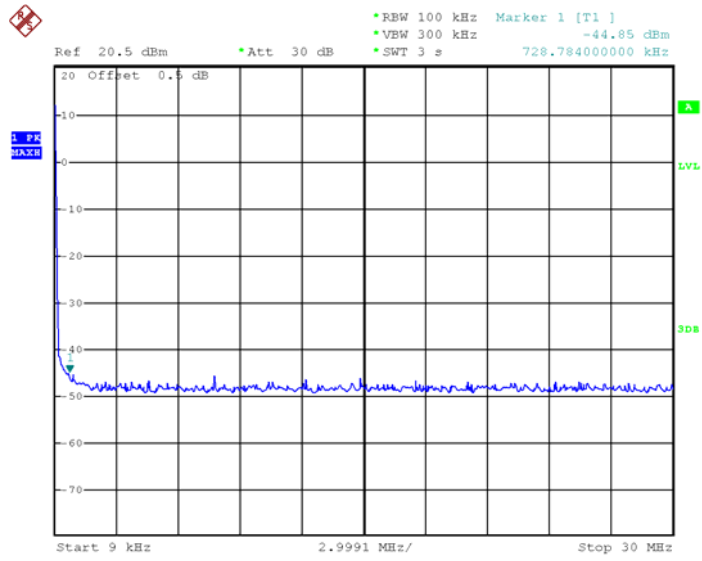


High Channel

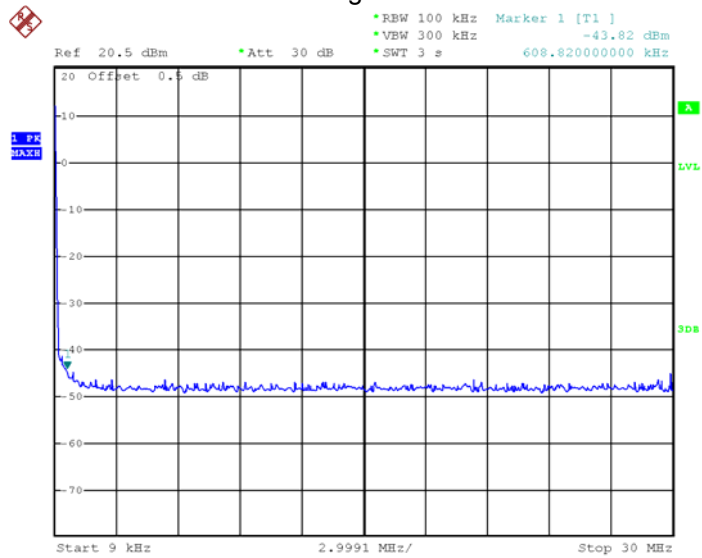


Above 30MHz

802.11b

Low Channel

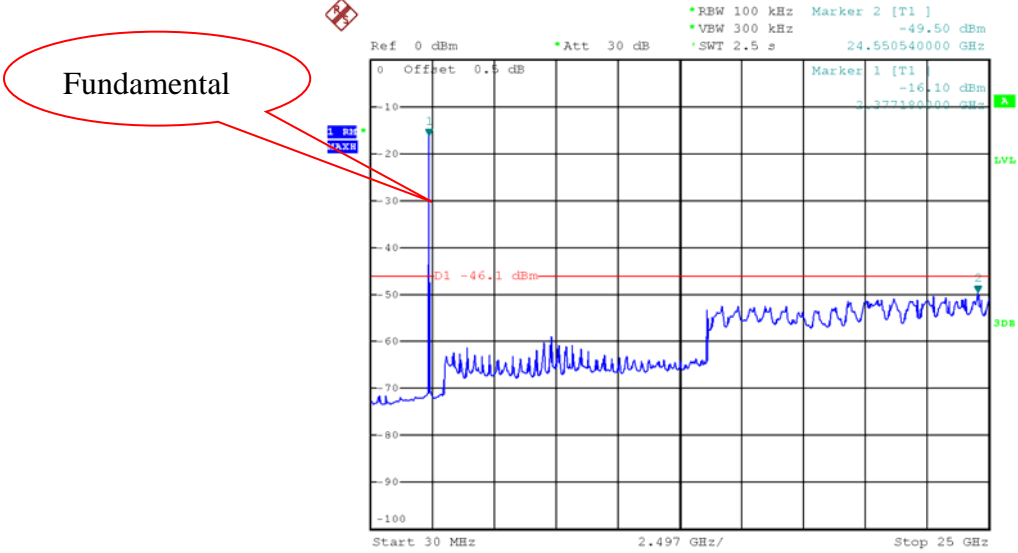


Middle Channel

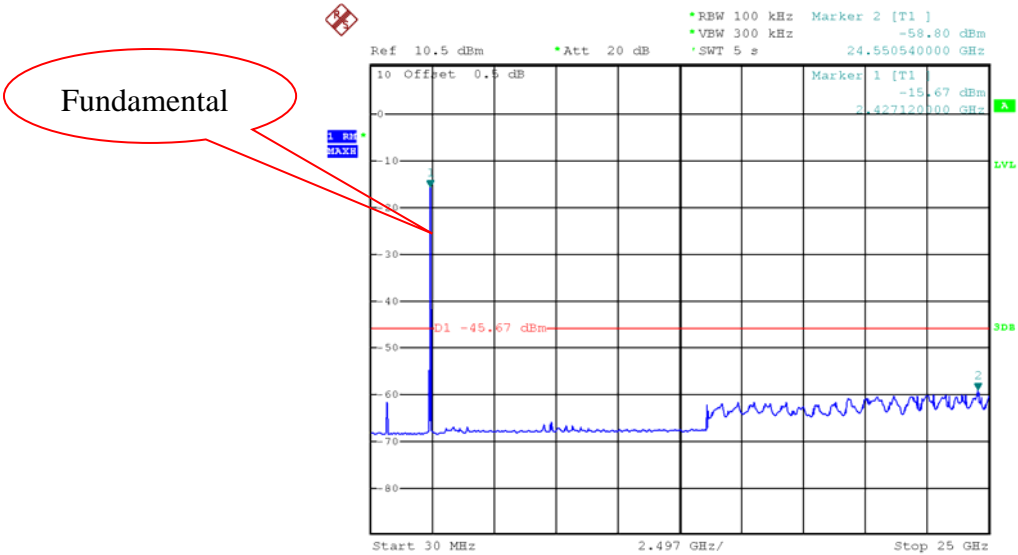

High Channel


Fundamental

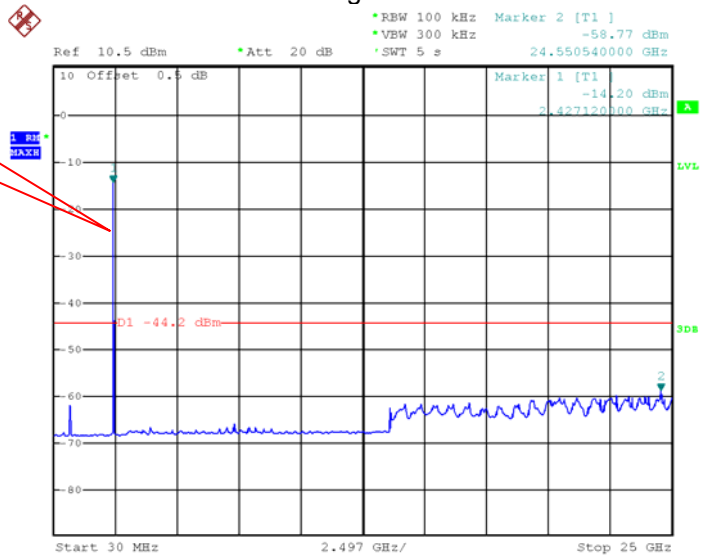


802.11g

Fundamental


Low Channel

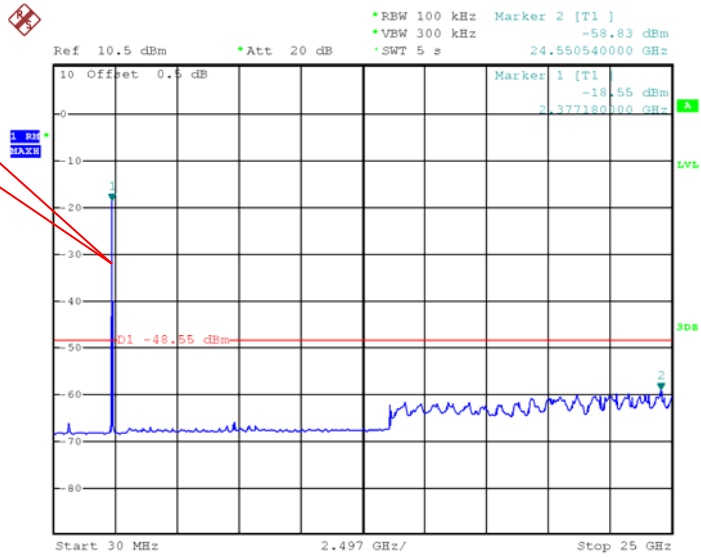

Middle Channel

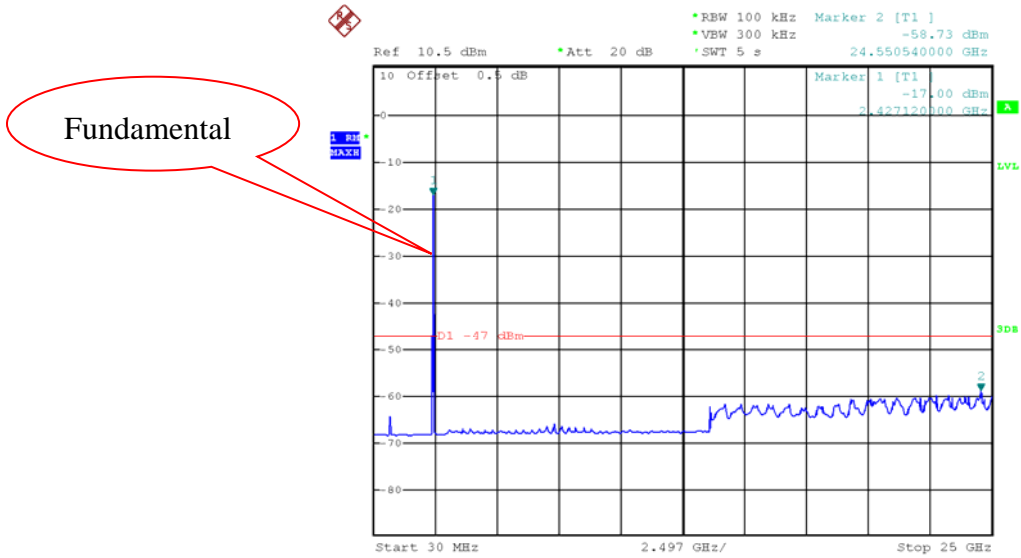


High Channel

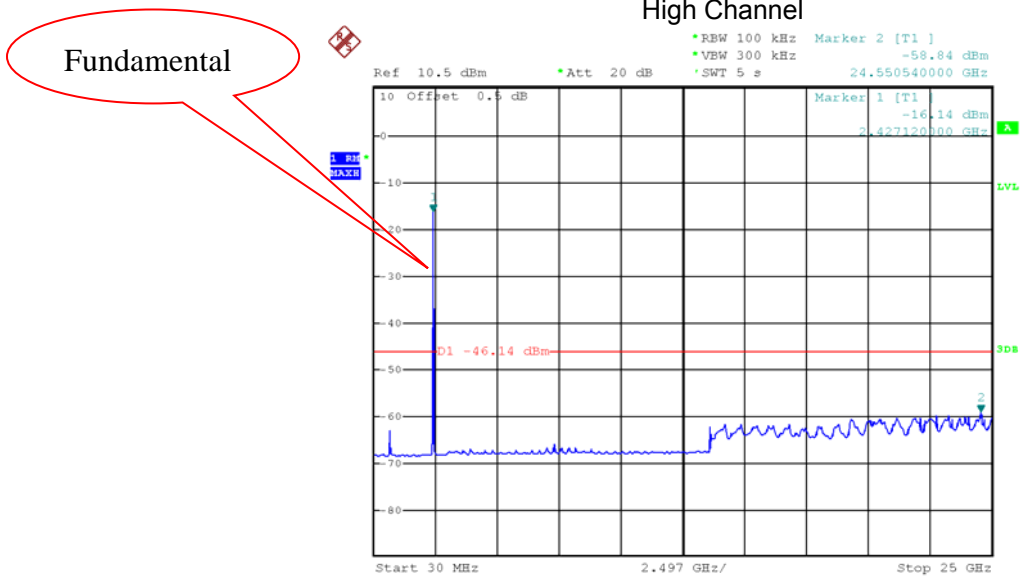

802.11n HT20


Low Channel

Fundamental

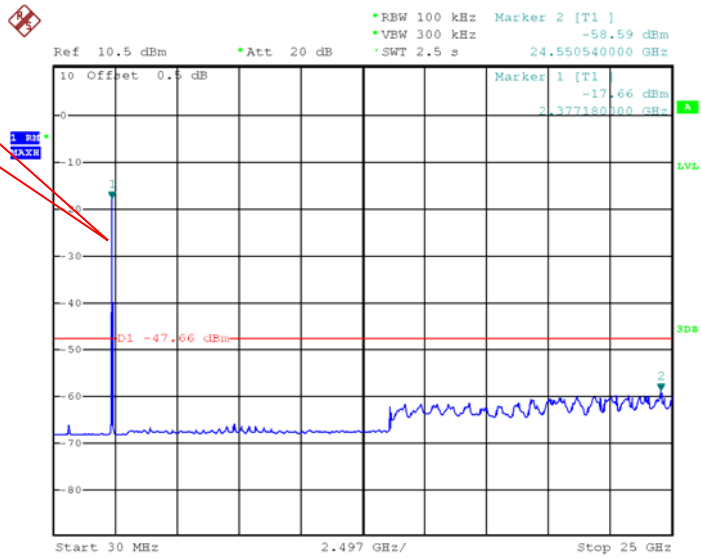


Middle Channel

Fundamental

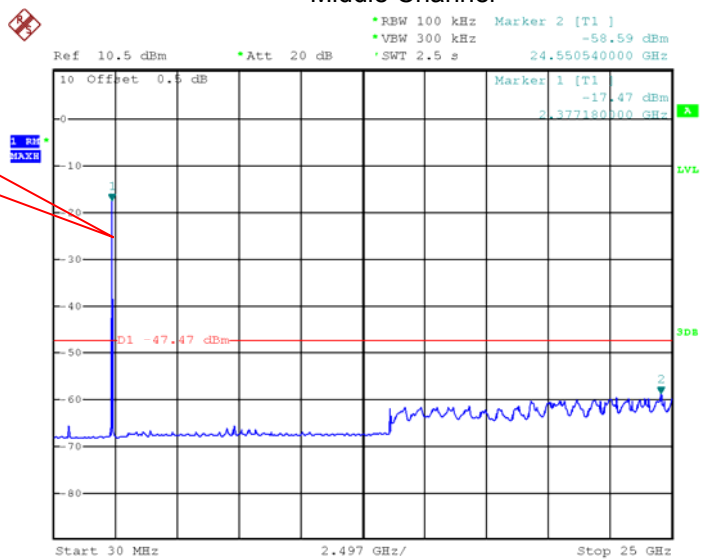


Fundamental

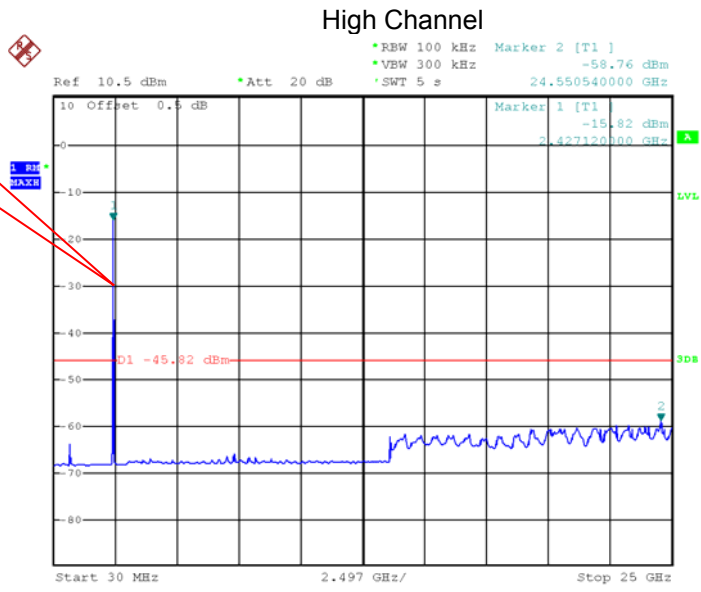


BLE(1M) Low Channel

Fundamental

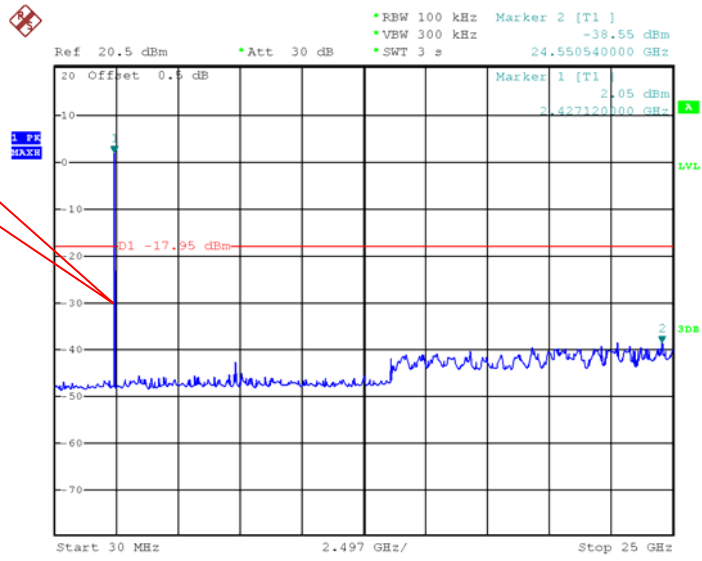


Middle Channel

Fundamental

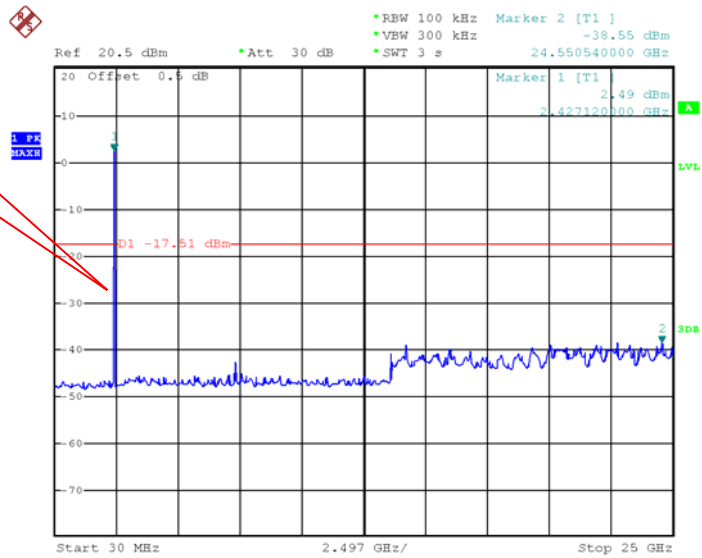

High Channel

Fundamental

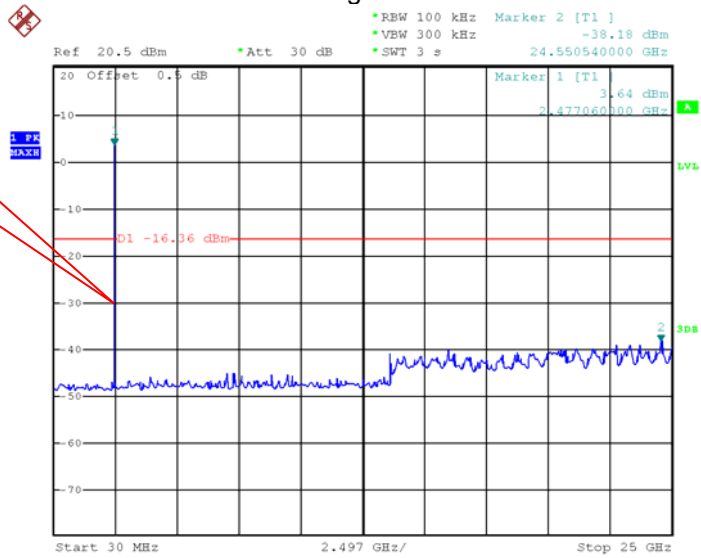

11 Band Edge Measurement

Test Requirement: FCC 47CFR Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Limit:

Test Mode: Transmitting


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


11.2 Test Result

Test result plots shown as follows:


TX 11b: Band edge-left side

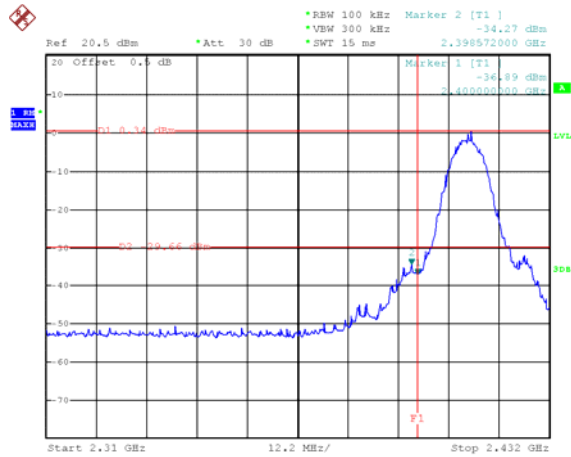


TX 11b: Band edge-right side

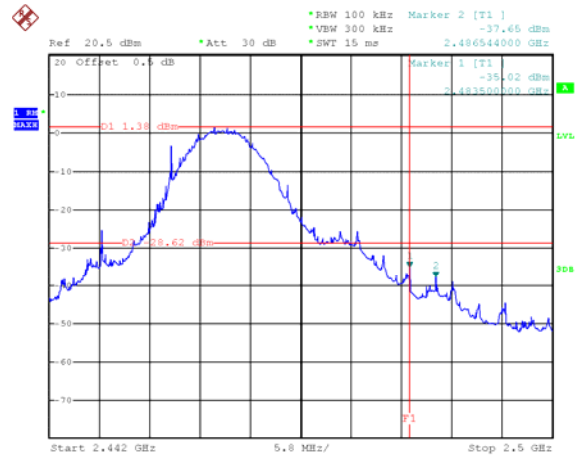


TX 11g: Band edge-left side

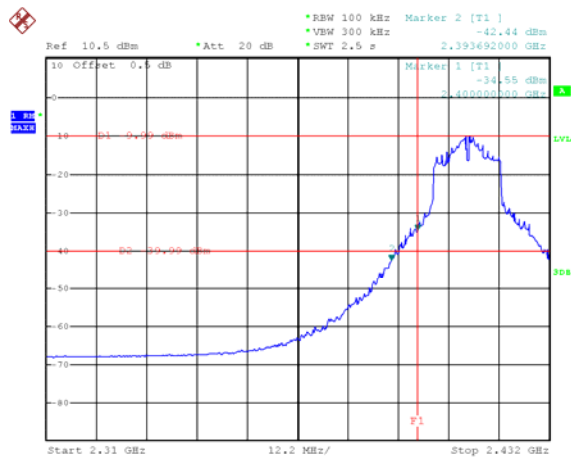


TX 11g: Band edge-right side

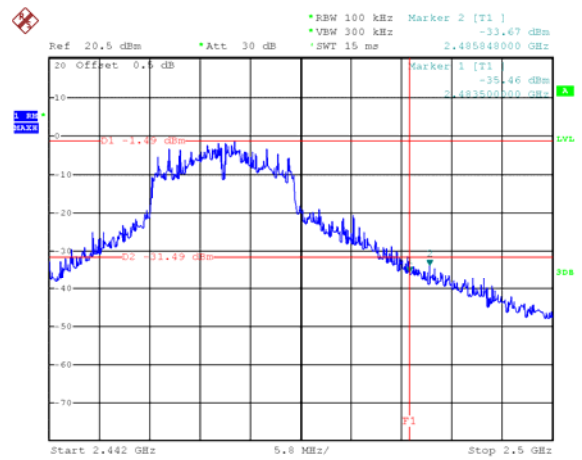


TX 11n HT20: Band edge-left side

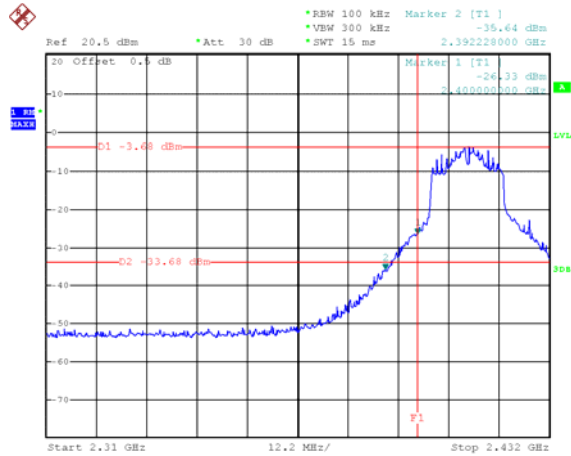


TX 11n HT20: Band edge-right side

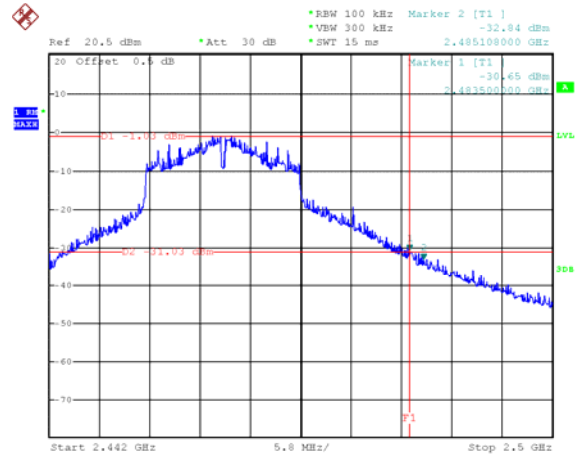


BLE(1M): Band edge-left side

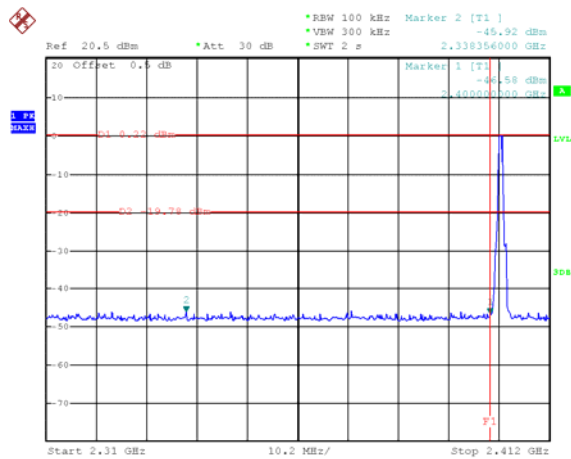


BLE(1M): Band edge-right side

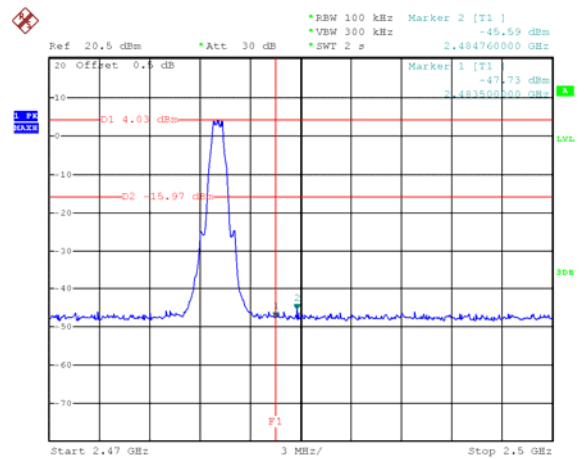

BLE(2M): Band edge-left side

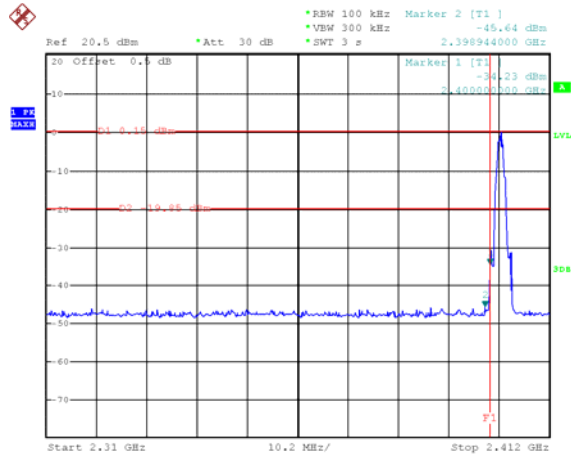

BLE(2M): Band edge-right side

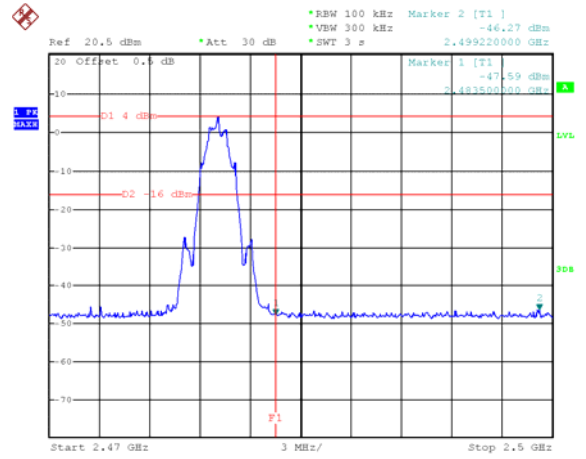

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode:	Transmitting

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

12.2 Test Result:



Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	8.224	12.288
	Channel 6	7.648	12.352
	Channel 11	7.584	12.768
TX 11g	Channel 1	15.532	17.776
	Channel 6	15.224	17.908
	Channel 11	15.224	17.820
TX 11n HT20	Channel 1	16.104	18.304
	Channel 6	16.368	18.348
	Channel 11	15.620	18.304
BLE(1M)	Channel 0	0.726	1.062
	Channel 19	0.714	1.062
	Channel 39	0.726	1.062
BLE(2M)	Channel 0	1.120	2.080
	Channel 19	1.112	2.072
	Channel 39	1.128	2.080

Test result plot:



6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

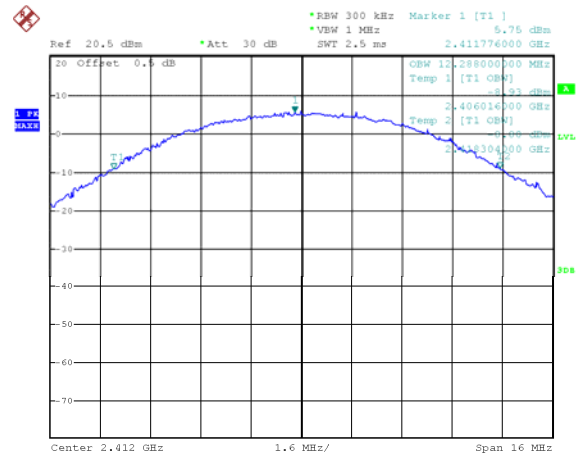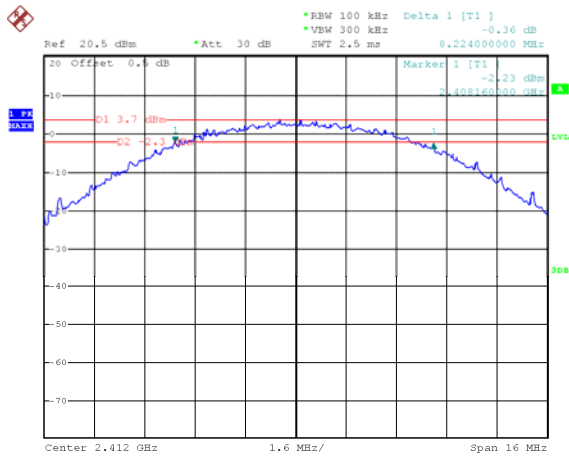



Mode: TX 11b channel 6

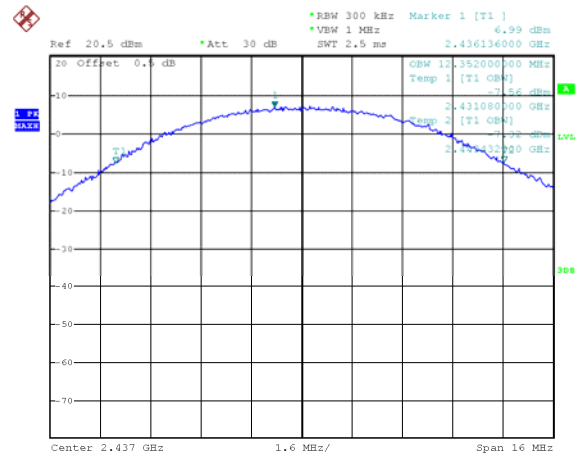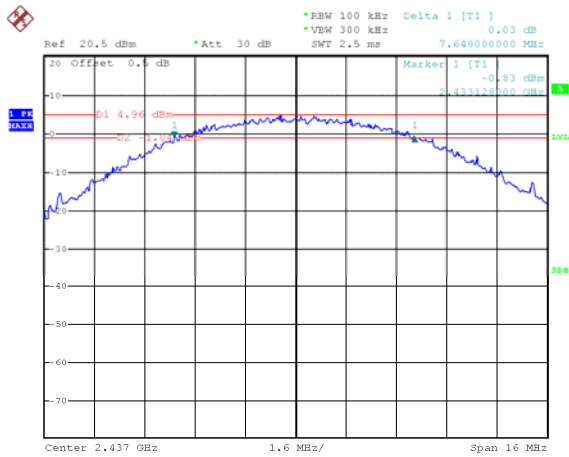



6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 11

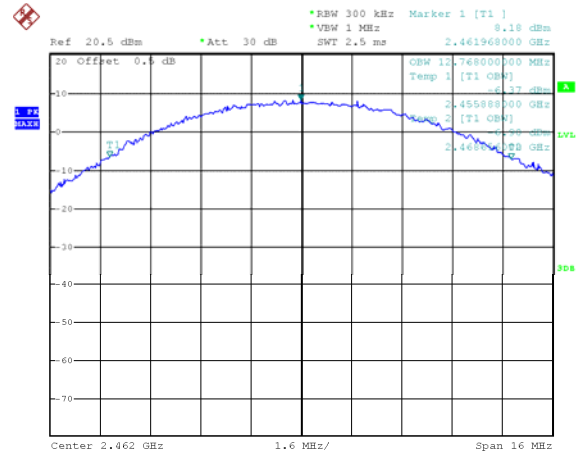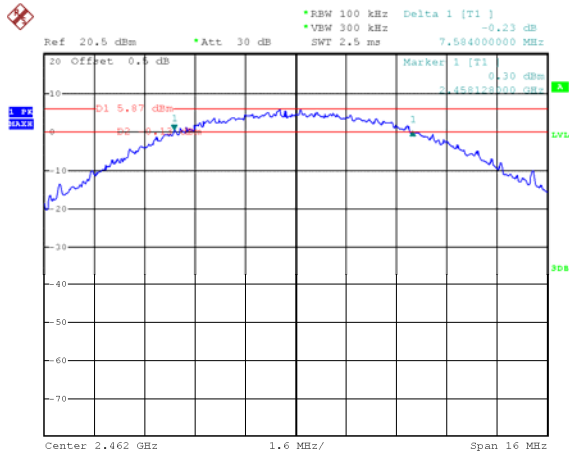



Mode: TX 11g channel 1

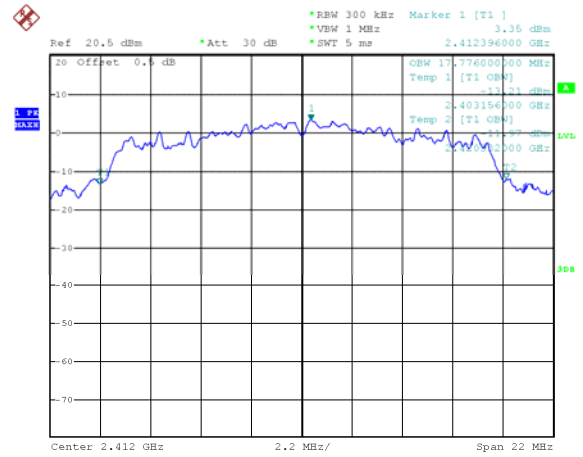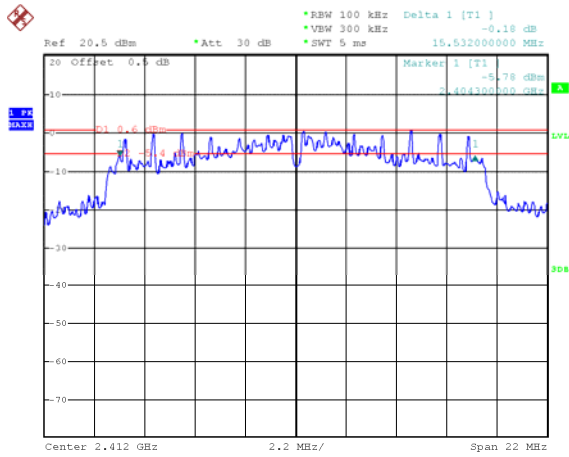



6 dB Bandwidth

99% Bandwidth

Mode: TX 11g channel 6

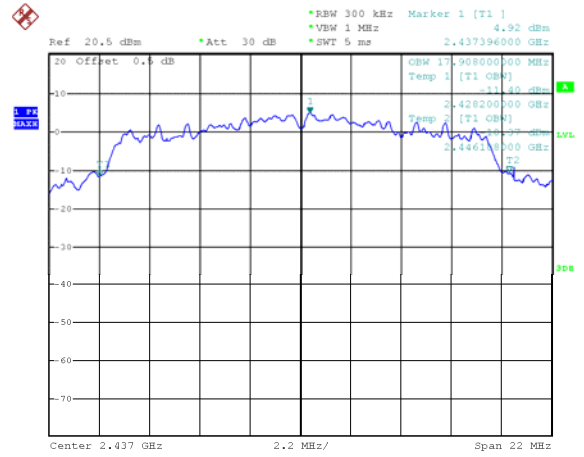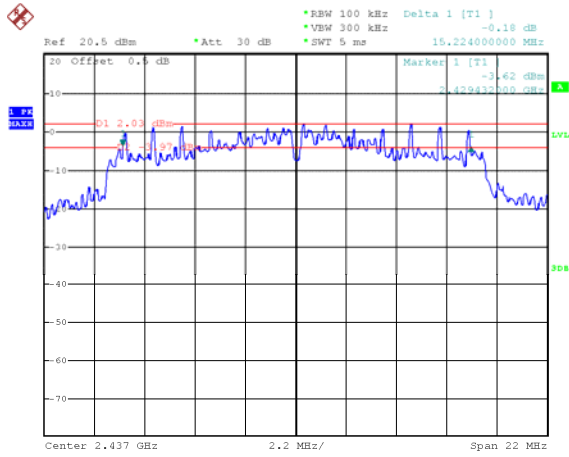



Mode: TX 11g channel 11

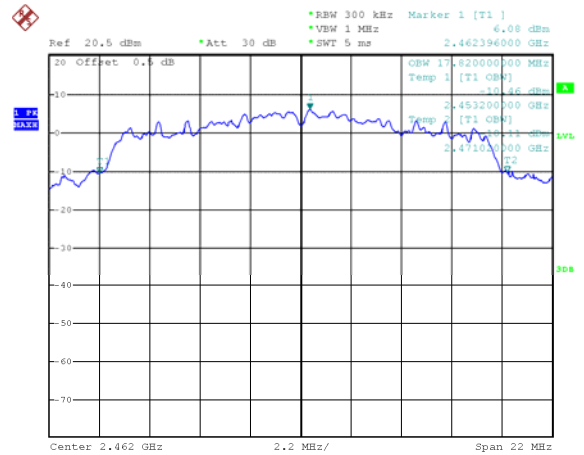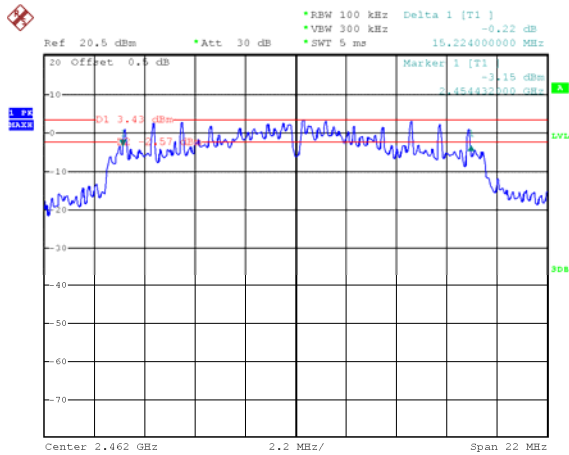



6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 1

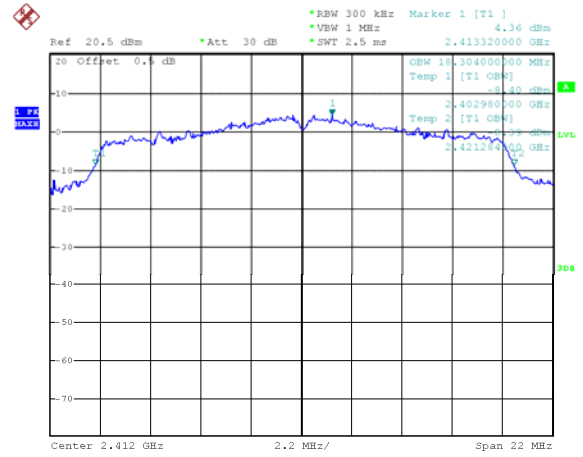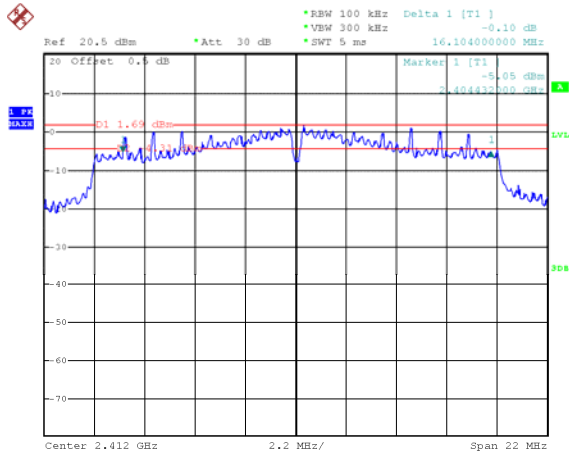



Mode: TX 11n HT20 channel 6

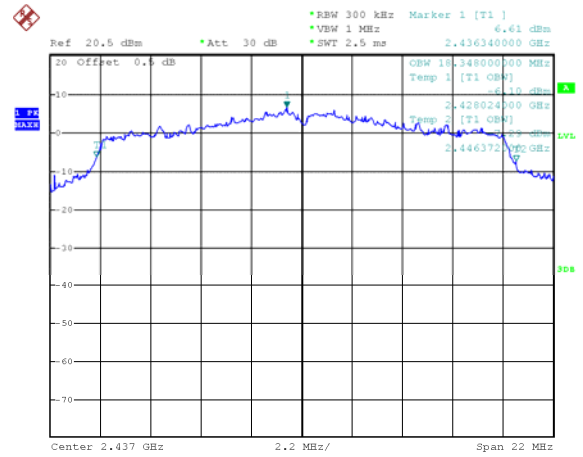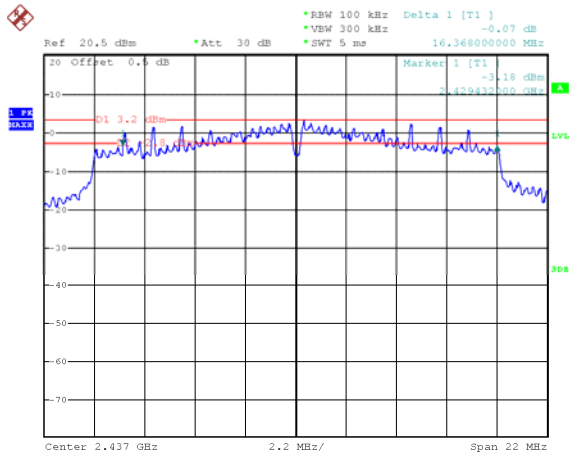



6 dB Bandwidth

99% Bandwidth

BLE(1M): channel 19

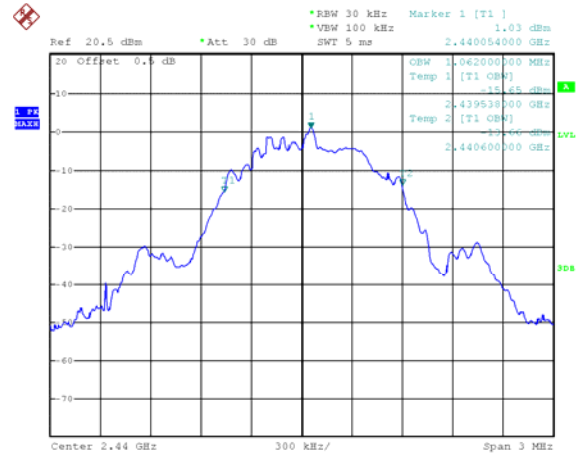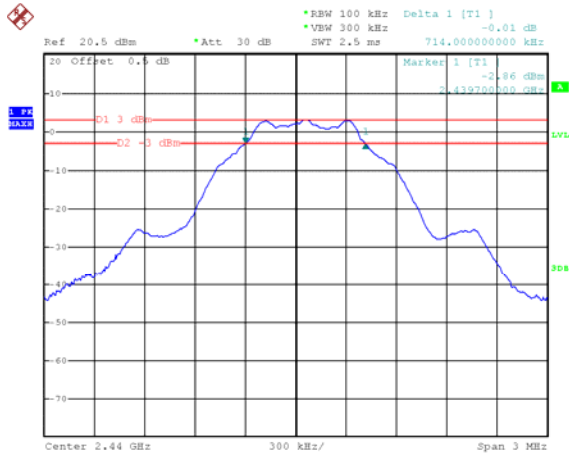



BLE(1M): channel 39

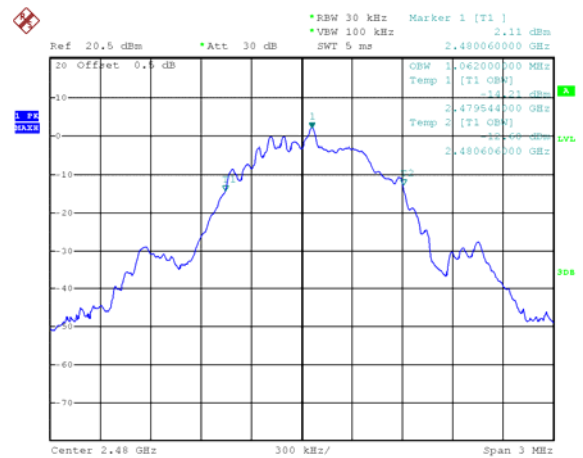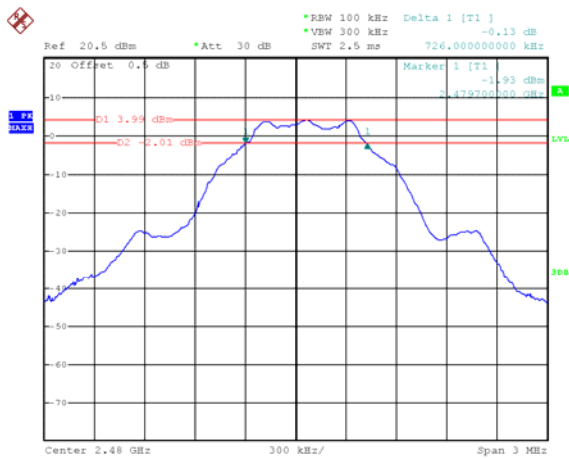



6 dB Bandwidth

99% Bandwidth

BLE(2M): channel 0

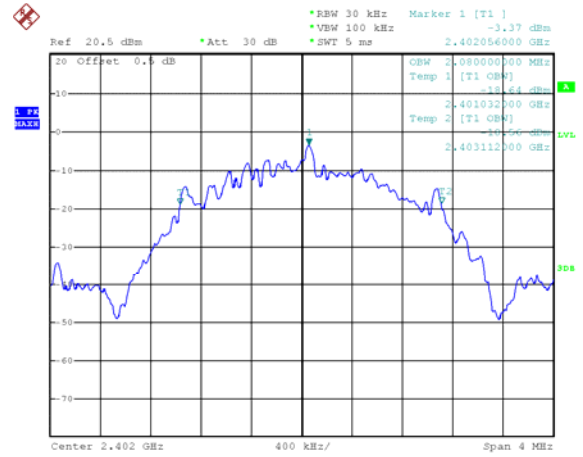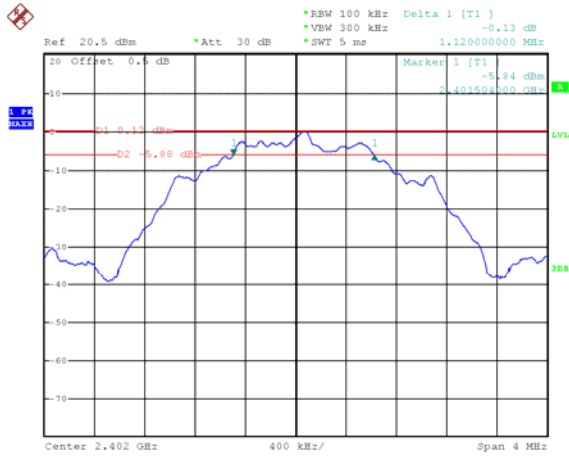



BLE(2M): channel 19

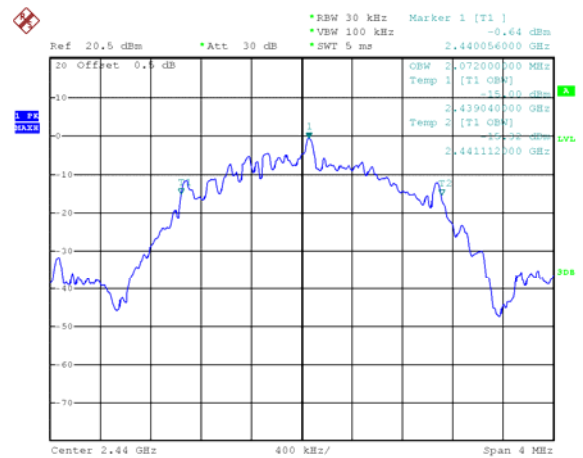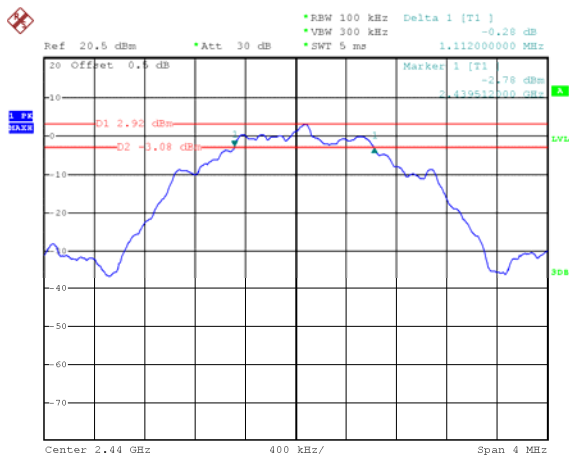

6 dB Bandwidth

99% Bandwidth

BLE(2M): channel 39

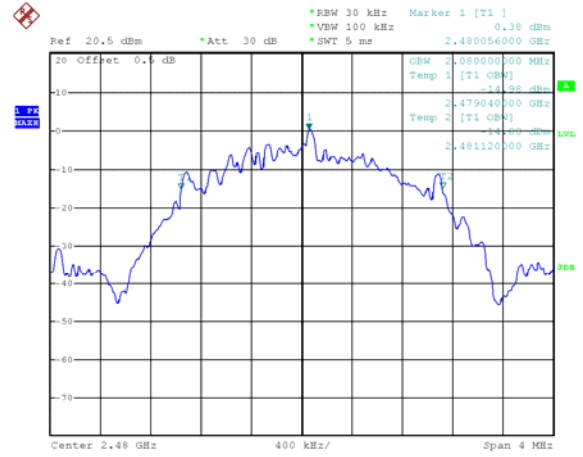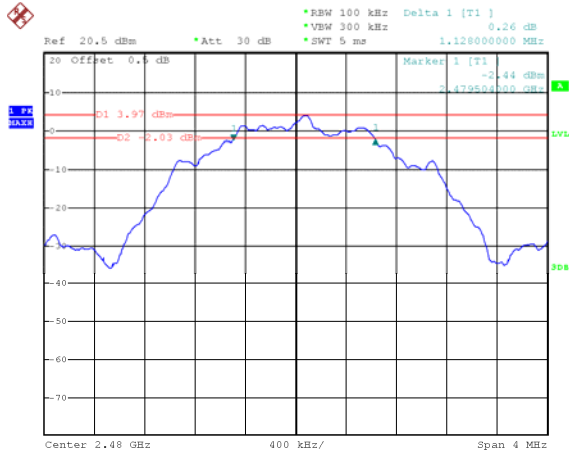

13 Maximum Peak conducted Output Power

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

13.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW \geq DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.


Subclause 11.9.2 of ANSI C63.10 is applicable.

13.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	12.79	1W/30dBm
	Middle-2437	14.28	1W/30dBm
	High-2462	15.28	1W/30dBm
TX 11g	Low-2412	13.64	1W/30dBm
	Middle-2437	15.17	1W/30dBm
	High-2462	16.14	1W/30dBm
TX 11n HT20	Low-2412	14.59	1W/30dBm
	Middle-2437	16.07	1W/30dBm
	High-2462	17.02	1W/30dBm
BLE(1M)	Low-2402	0.70	1W/30dBm
	Middle-2440	3.44	1W/30dBm
	High-2480	4.44	1W/30dBm
BLE(2M)	Low-2402	0.78	1W/30dBm
	Middle-2440	3.58	1W/30dBm
	High-2480	4.54	1W/30dBm

Test Plot:


Mode: TX 11b channel 1

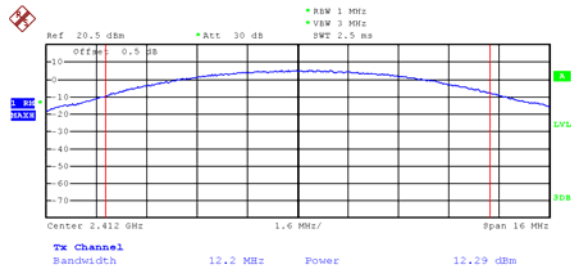


Mode: TX 11b channel 6

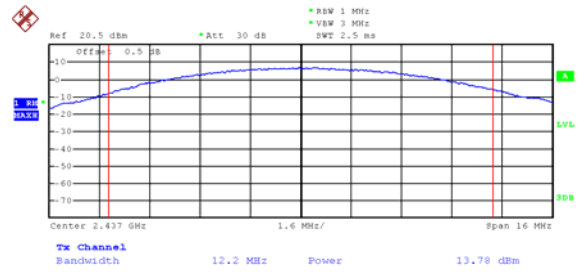


Mode: TX 11b channel 11

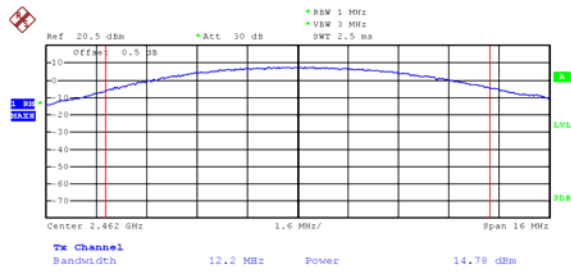


Mode: TX 11g channel 1

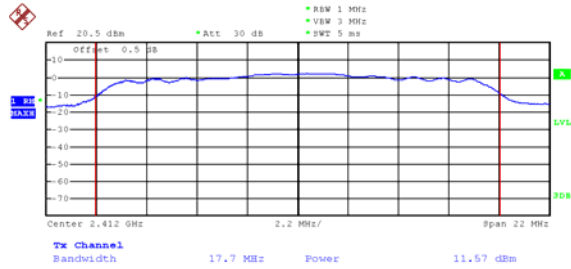


Mode: TX 11g channel 6

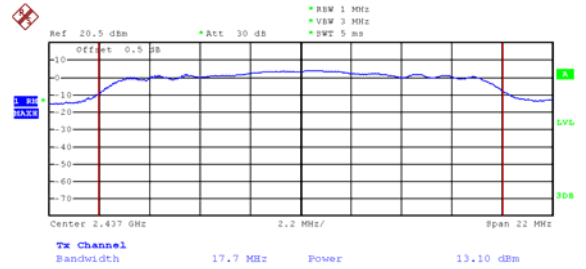


Mode: TX 11g channel 11

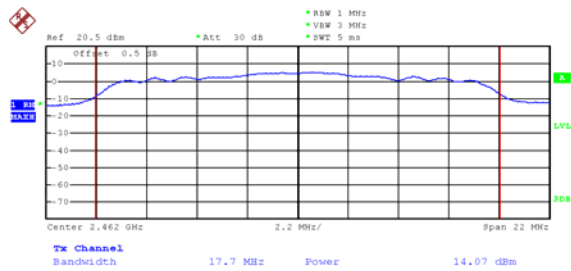


Mode: TX 11n HT20 channel 1

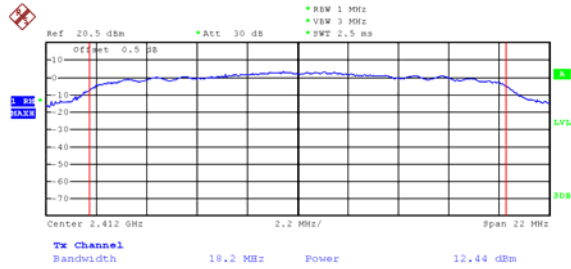


Mode: TX 11n HT20 channel 6

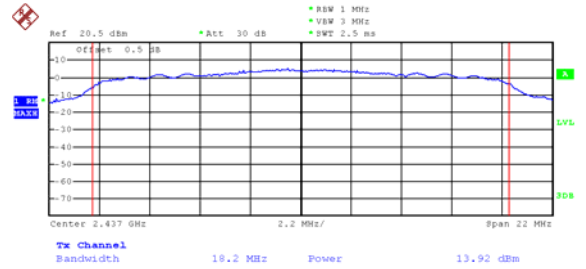


Mode: TX 11n HT20 channel 11

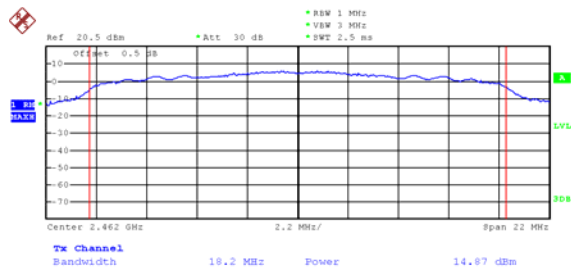


BLE(1M): channel 0

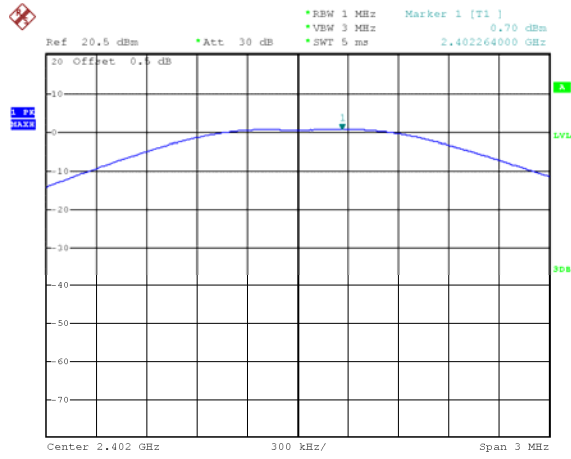


BLE(1M): channel 19

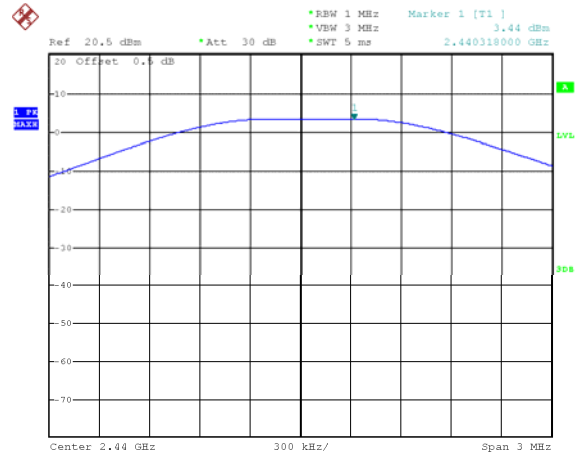


BLE(1M): channel 39

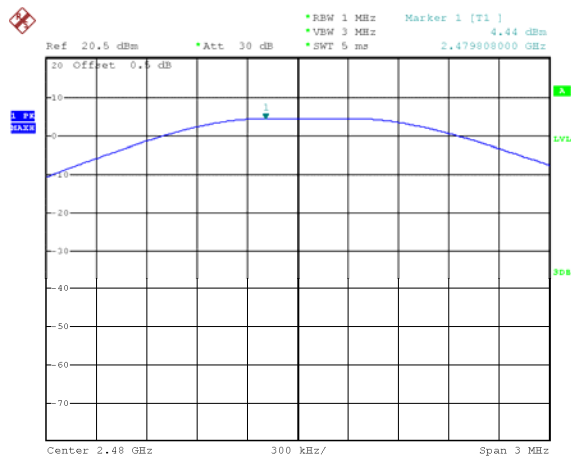


BLE(2M): channel 0

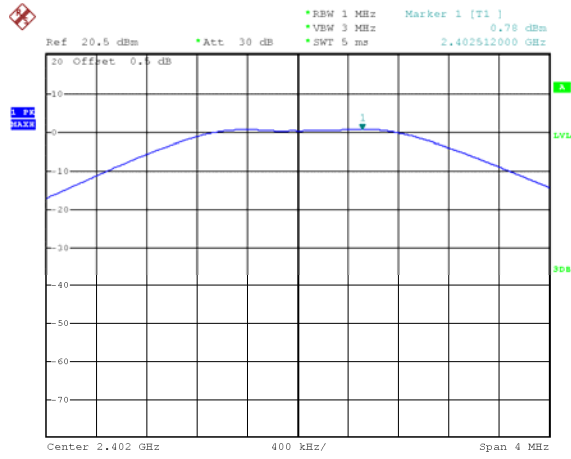

BLE(2M): channel 19

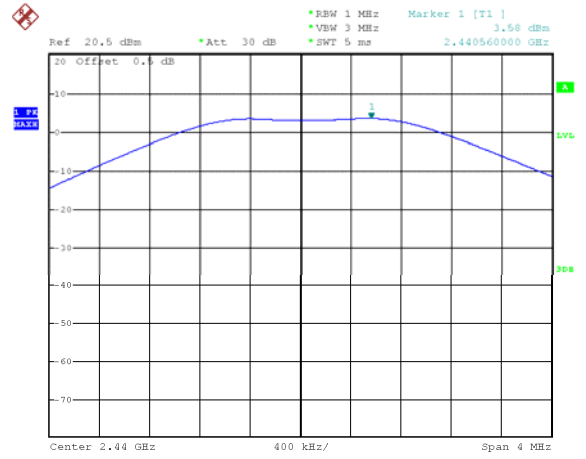

BLE(2M): channel 39

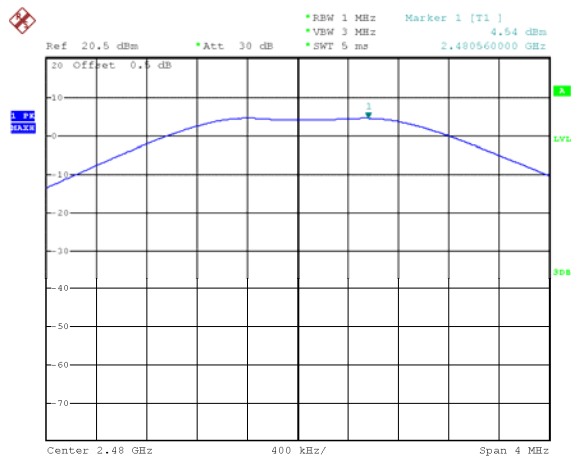

14 Power Spectral density

Test Requirement:	FCC 47CFR Part 15 Section 15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

14.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD


Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

14.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-20.29	8dBm per 3kHz
	Middle-2437	-19.17	8dBm per 3kHz
	High-2462	-17.92	8dBm per 3kHz
TX 11g	Low-2412	-19.76	8dBm per 3kHz
	Middle-2437	-18.03	8dBm per 3kHz
	High-2462	-17.61	8dBm per 3kHz
TX 11n HT20	Low-2412	-20.31	8dBm per 3kHz
	Middle-2437	-18.79	8dBm per 3kHz
	High-2462	-17.51	8dBm per 3kHz
BLE(1M)	Low-2402	-13.55	8dBm per 3kHz
	Middle-2440	-10.73	8dBm per 3kHz
	High-2480	-9.71	8dBm per 3kHz
BLE(2M)	Low-2402	-16.43	8dBm per 3kHz
	Middle-2440	-13.56	8dBm per 3kHz
	High-2480	-12.50	8dBm per 3kHz

Test Plot:


Mode: TX 11b channel 1

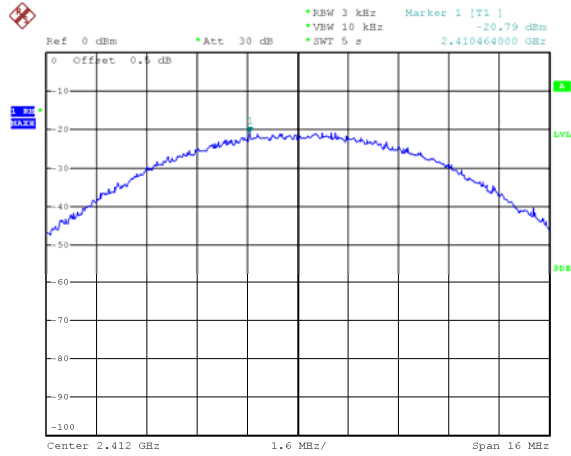


Mode: TX 11b channel 6

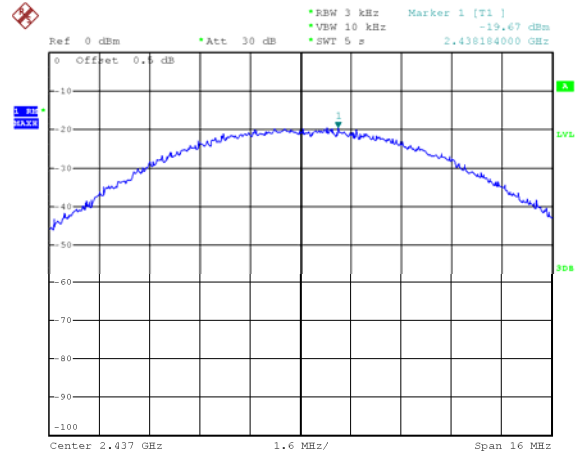


Mode: TX 11b channel 11

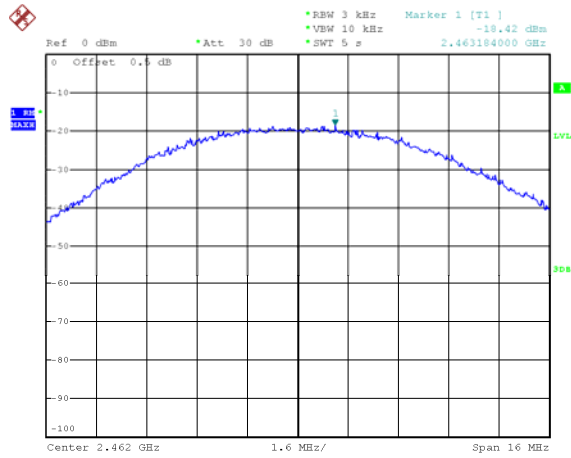


Mode: TX 11g channel 1

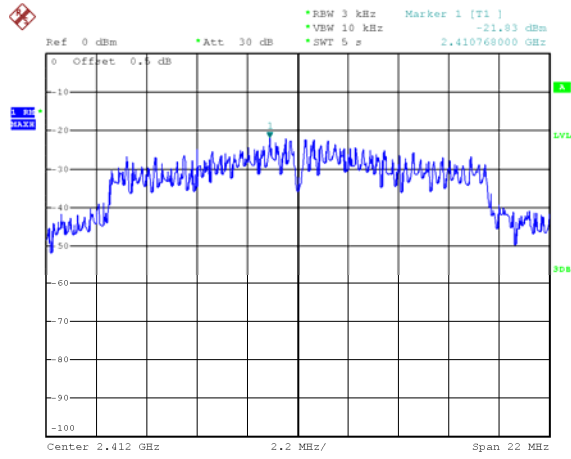


Mode: TX 11g channel 6

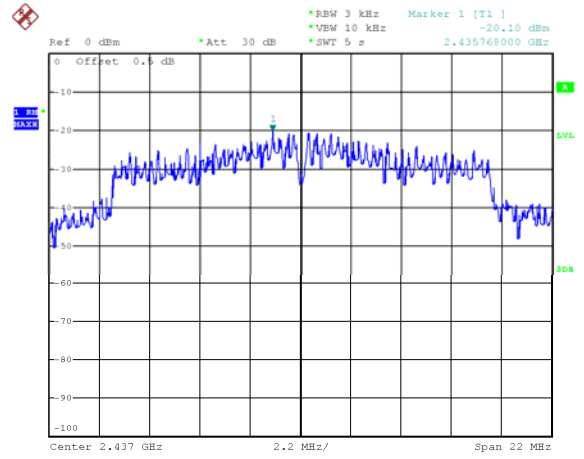


Mode: TX 11g channel 11

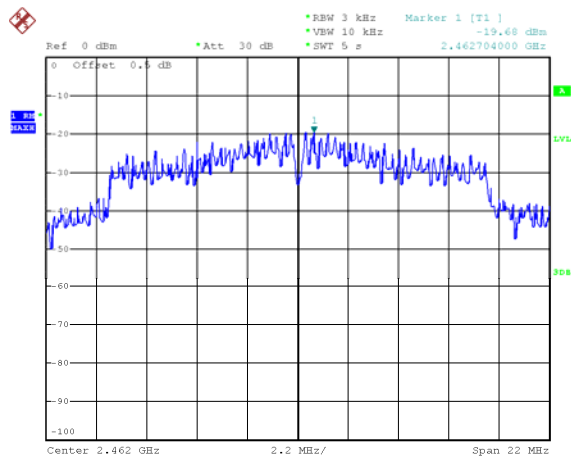


Mode: TX 11n HT20 channel 1

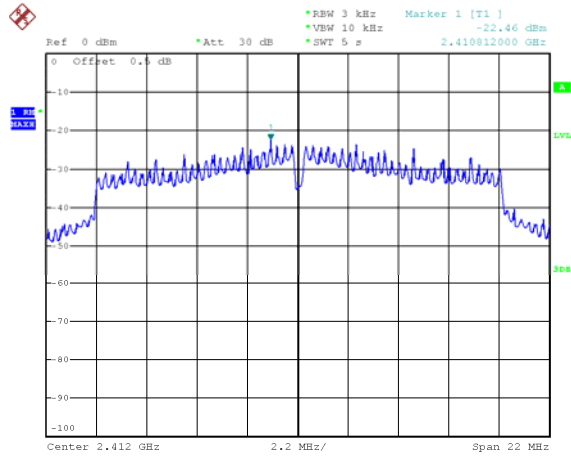


Mode: TX 11n HT20 channel 6

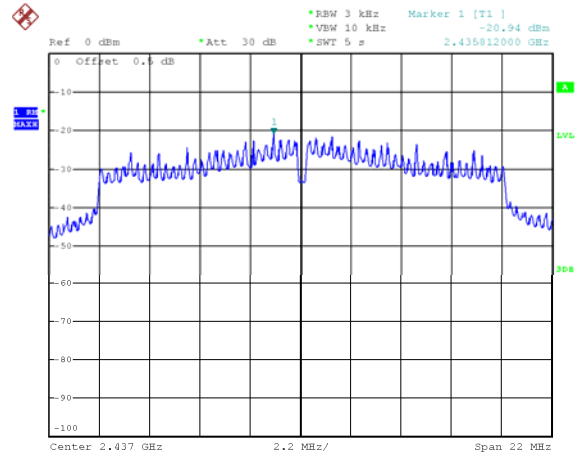


Mode: TX 11n HT20 channel 11

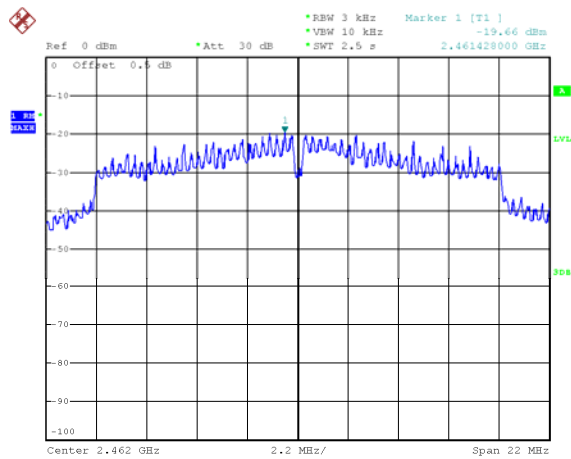


BLE(1M): channel 0

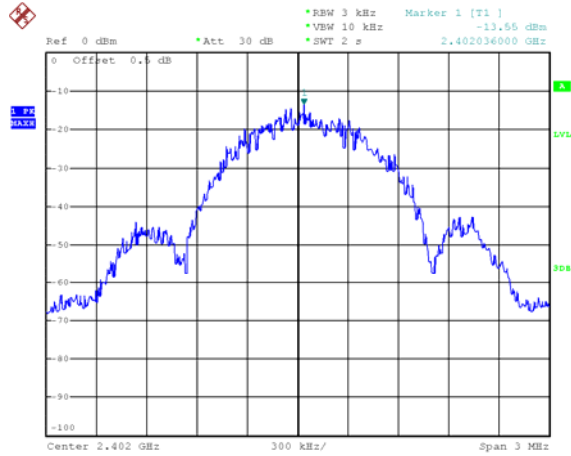


BLE(1M): channel 19

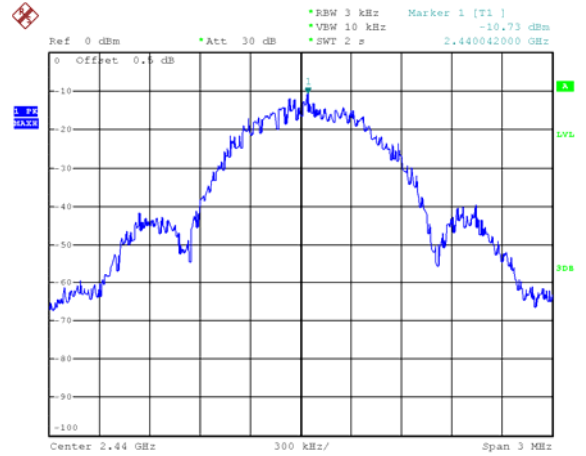


BLE(1M): channel 39

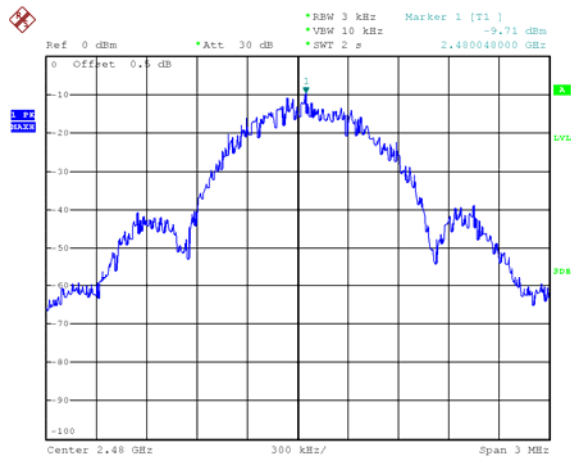


BLE(2M): channel 0

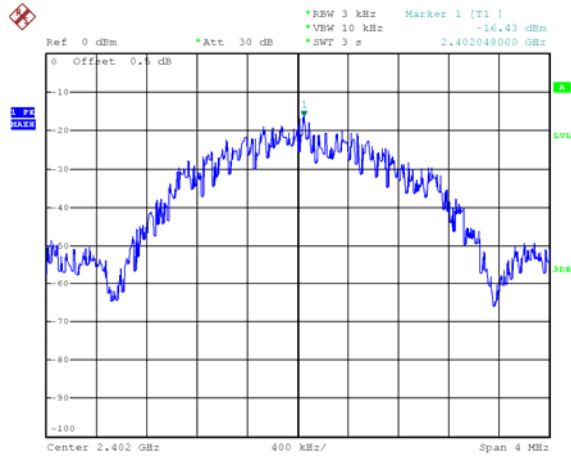

BLE(2M): channel 19

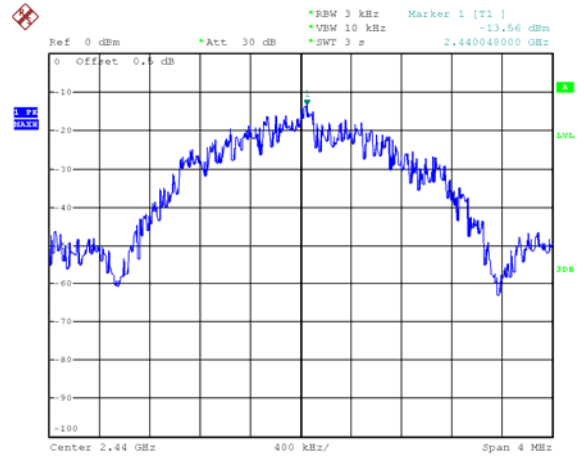

BLE(2M): channel 39

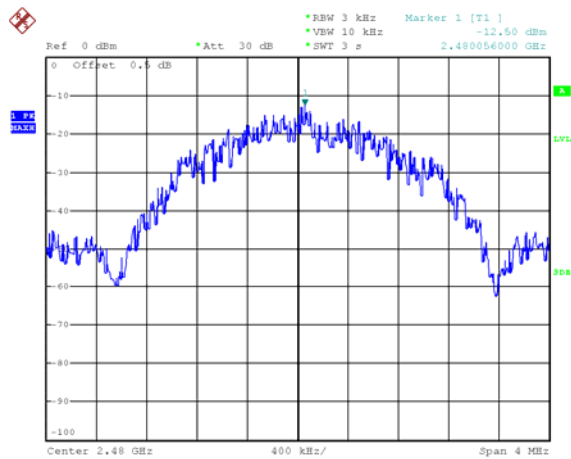

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Note: Please refer to SAR Test Report: WTF21D12149221W007.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-SPMR14000-Photos.

=====**End of Report**=====