

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID/IC TEST REPORT

TEST REPORT NUMBER : CGZ3160425-00373-EFI



CENTRE OF TESTING SERVICE CO., LTD. A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China





TEST REPORT For FCC ID/IC				
47 CFR PART 15 OCT, 2015; RSS-210 Issue 8				
Report Reference No	CGZ3160425-00373-EFI			
Date of issue	03 May 2016			
Testing Laboratory Name	CENTRE OF TESTING SERVICE CO., LTD.			
Address	A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China			
Testing location/ procedure	Full application of Harmonised standards			
	Partial application of Harmonised standards \Box			
	Other standard testing method \Box			
Applicant's name	Horizon Hobby, LLC			
Address	4105 Fieldstone Road, Champaign, IL 61822, USA			
Test specification				
Standard	47 CFR PART 15 OCT, 2015; RSS-210 Issue 8; RSS-Gen Issue 4			
	ANSI C63.10:2013			
Test Report Form No	CTSEMC-1.0			
TRF Originator	CENTRE OF TESTING SERVICE CO., LTD.			
Master TRF	Dated 2009-01			
CENTRE OF TESTING SERVICE CO	O., LTD. All rights reserved.			
CENTRE OF TESTING SERVICE CO material. CENTRE OF TESTING SEI	in whole or in part for non-commercial purposes as long as the O., LTD is acknowledged as copyright owner and source of the RVICE CO., LTD takes no responsibility for and will not assume liability r's interpretation of the reproduced material due to its placement and			
Test item description	Surface Receiver with Telemetry			
Trade Mark	Spektrum			
Manufacturer	Horizon Hobby, LLC			
Model/Type reference	SPMSR4000T			
Ratings	Battery 6V			
Operating Frequency	2404.0MHz ~2476.0MHz			
Result	Positive			

Compiled by:

Kate zhang / Fileadministrators

Supervised by:

Duke yang / Technique principal

Approved by:

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3160425-00373-EFI





FCC ID/IC -- TEST REPORT

Test Report No. :	CGZ3160425-00373-EFI	03 May 2016 Date of issue	
Type / Model	SPMSR4000T		
EUT	Surface Receiver with Telemetry		
Applicant	Horizon Hobby, LLC		
Address	4105 Fieldstone Road, Champaign, IL 61822	2, USA	
Telephone	+1-217 4033657		
Fax	/		
Contact	Erin Hassan		
Manufacturer	Horizon Hobby, LLC		
Address	4105 Fieldstone Road, Champaign, IL 61822	2, USA	
Telephone	+1-217 4033657		
Fax	/		
Contact	Erin Hassan		
Factory	Horizon Hobby, LLC		
Address	4105 Fieldstone Road, Champaign, IL 61822, USA		
Telephone	+1-217 4033657		
Fax	/		
Contact	Erin Hassan		

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





TABLE OF CONTENTS

Description	Page
1.TEST STANDARDS	5
2.SUMMARY	5
2.1 GENERAL REMARKS	
2.2 FINAL ASSESSMENT	Э
3.EQUIPMENT UNDER TEST	5
3.1 POWER SUPPLY SYSTEM UTILISED	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	
3.3 EUT OPERATION MODE	
3.4 EUT CONFIGURATION	6
4.TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 TEST FACILITY	
4.3 ENVIRONMENTAL CONDITIONS	
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	
5.SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6.POWER LINE CONDUCTED EMISSION TEST	9
6.1.TEST EQUIPMENT	9
6.2. BLOCK DIAGRAM OF TEST SETUP	9
6.3. Power Line Conducted Emission Test Limits	9
6.4.Test Procedure	9
6.5. Power Line Conducted Emission Test Results	9
7.RADIATED DISTURBANCE (ELECTRIC FIELD)	10
7.1.TEST EQUIPMENT	10
7.2.BLOCK DIAGRAM OF TEST SETUP	
7.3.RADIATED EMISSION LIMIT :	
7.4.Test Procedure	
7.5.RADIATED EMISSION TEST RESULTS	
8.BAND EDGE COMPLIANCE TEST	24
8.1. TEST EQUIPMENT	
8.2. TEST INFORMATION	
Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.	
CENTRE OF TESTING SERVICE CO., LTD. A101, No.65, Zhuii Highway.Tianhe District, Guangzhou, China	

See Reverse For Terms And Conditions of Service

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471





8.3. Test procedure	
8.4. TEST RESULTS	24
9. 99% BANDWIDTH	29
9.1 Test procedure	
9.2. TEST EQUIPMENT	
9.3. TEST RESULTS	29
10.DEVIATION TO TEST SPECIFICATIONS	

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





1.TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2015
- RSS-210 Issue 8
- RSS-Gen Issue 4
- ANSI C63.10:2013

2.SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	25 April 2016
Testing commenced on	25~29 April 2016
Testing concluded on	03 May 2016

2.2 FINAL ASSESSMENT

The FCC/IC requirements pertaining to the technical standards and tested operation modes are

fulfilled.

□ - **not** fulfilled.

The equipment under test

- fulfils the FCC/IC requirements cited on page 1.
- **does not** fulfil the FCC/IC requirements cited on page 1.

3.EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : Battery 6V

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: **1** Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- □ TX- Y position
- □ TX- Zposition
- TX- X position

Operation mode 1:TX-X Position Low (2404MHz) , TX-X Position Middle (2440MHz),

TX-X Position High (2476MHz)

Note:Operation mode 1 TX -X position of EUT is the radiated test worst case; so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District,	Guangzhou, China	
Tel: +86-20-85543113 (32 lines)	Fax: +86-20-38780406	
Complaint line: +86-20-85533471	E-mail: cts@cts-lab.com.cn	



3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	Surface Receiver with Telemetry
Model Number	:	SPMSR4000T
Operation frequency	:	2404~ 2476 MHz ISM Band
Modulation Technology	:	DSSS Modulation
Antenna	:	Internal antenna, met requirement of FCC 15.203

3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





4.TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

 A101, No.65, Zhuji Highway,Tianhe District,
 Guangzhou, China

 Tel: +86-20-85543113 (32 lines)
 Fax: +86-20-38780406

 Complaint line: +86-20-85533471
 E-mail: cts@cts-lab.com.cn



4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
	30MHz~300MHz	±3.14dB	(1)
Radiation emission (3m)	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

(1).This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Results	
Conducted Emission Test	FCC Part 15 § 15.207 RSS-Gen Issue 4§ 7.2.4 ANSI C63.10:2013	N/A	
Radiated Emission Test	RSS-Gen Issue 4§ 7.2 RSS-210 Issue 8 § A2.9 FCC Part 15 C § 15.249 FCC Part 15 § 209 ANSI C63.10:2013	PASSED	
Receiver Spurious Emissions	RSS-Gen Issue 4§ 4.10 ANSI C63.10:2013	PASSED	
Band Edge Compliance Test	RSS-210 Issue 8 § 1.1 RSS-Gen Issue 4 § 8.10 FCC Part 15 C § 15.249 ANSI C63.10:2013	PASSED	
99% Bandwidth	RSS-Gen Issue 4 § 6.6 ANSI C63.10:2013	PASSED	
N/A is an abbreviation for Not Applicable.			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





6. Power Line Conducted Emission Test

6.1.Test Equipment

Conduct	Conducted Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2015/10	
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2015/10	
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2015/10	
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2015/10	
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2015/10	

6.2. Block Diagram of Test Setup



(EUT: Surface Receiver with Telemetry)

6.3. Power Line Conducted Emission Test Limits

Standard:RSS-Gen:7.2.4,FCC Part 15 : 15.207,ANSI C63.10:2013

		Maximum RF Line Voltage		
Frequency		Quasi-Peak Level	Average Level	
	,	dB(µV)	dB(µV)	
150kHz	~ 500kHz	66 ~ 56*	56 ~ 46*	
500kHz	~ 5MHz	56	46	
5MHz	~ 30MHz	60	50	

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.4.Test Procedure

The Notebook Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD. A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

A101, No.65, Zhuji Highway, Tianhe District,	Guang
Tel: +86-20-85543113 (32 lines)	Fax: +
Complaint line: +86-20-85533471	E-mail:

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn






7. Radiated disturbance (electric field)

7.1.Test Equipment

Radia	Radiated disturbance (electric field)									
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.					
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2015/10					
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2016/03					
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2016/03					
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2016/03					
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2016/03					
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2015/10					

7.2.Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

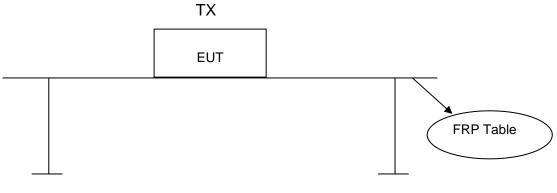

(EUT: Surface Receiver with Telemetry)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



7.2.2 Anechoic Chamber Setup Diagram

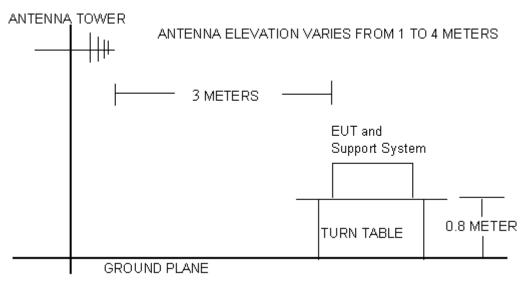

7.3.Radiated Emission Limit :

Standard: FCC 15.249 , FCC 15.209; RSS-Gen:7.2; RSS-210 A2.9.

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

FRE	FREQUENCY DISTANCE		FIELD STREN	FIELD STRENGTHS LIMIT		
	MHz		Meters	μV/m	dB(µV)/m	
0.009	~	0.490	300	2400/F(kHz)		
0.490	~	1.705	30	24000/F(kHz)		
1.705	~	30	30	30		
30	~	88	3	100	40.0	
88	~	216	3	150	43.5	
216	~	960	3	200	46.0	
960	~	1000	3	500	54.0	
AI	Above 1000		3	Other:74.0 dB(μ 54.0 dB(μV)/n		

(1) Emission level $dB\mu V = 20 \log Emission level \mu V/m$ Remark:

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 2MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5.Radiated Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





Test Mode:	TX – X Position Mode	Result:	- passed
Frequency range:	9KHz~30MHz		- not passed

No.	Frequency (MHz)	Factor (dB)	•	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
Rem	Remark: The test result reading value is to low, margin all > 10dB of the limit.								

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471


Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





Channel:	TX –X Position	Result:	- passed
Test point:	Horizontal		Image: - not passed
Frequency range:	30MHz-1GHz		

EUT	Surface Receiver with Telemetry
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	25~29 April 2016
Operator	Duke
MODEL NO	SPMSR4000T

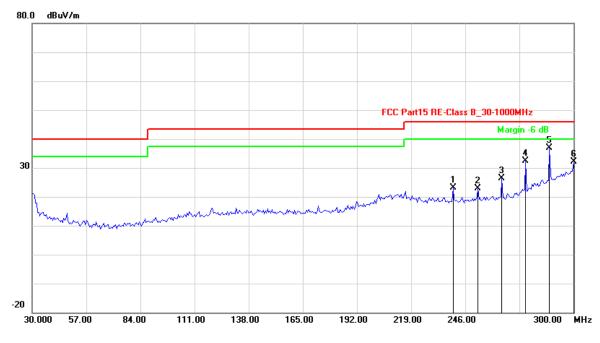

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	239.9399	-11.56	34.63	23.07	46.00	-22.93	QP		
2	252.3848	-11.31	34.12	22.81	46.00	-23.19	QP		
3	264.2886	-10.52	36.85	26.33	46.00	-19.67	QP		
4	276.1924	-8.26	40.73	32.47	46.00	-13.53	QP		
5	288.0962	-4.65	41.60	36.95	46.00	-9.05	QP		
6	300.0000	-1.42	33.48	32.06	46.00	-13.94	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





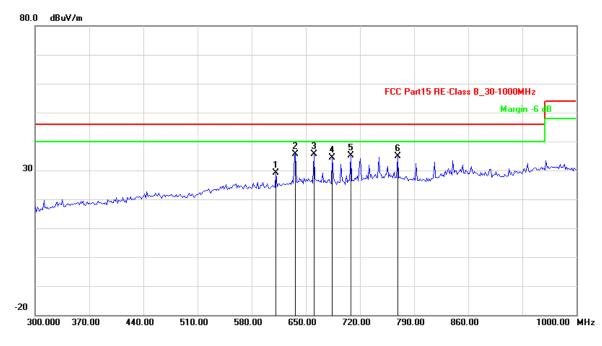

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	611.4228	-5.02	34.27	29.25	46.00	-16.75	QP		
2	636.6733	-3.85	39.40	35.55	46.00	-10.45	QP		
3	660.5210	-3.33	38.90	35.57	46.00	-10.43	QP		
4	684.3687	-3.56	38.00	34.44	46.00	-11.56	QP		
5	708.2164	-3.36	38.45	35.09	46.00	-10.91	QP		
6	768.5371	-2.22	37.12	34.90	46.00	-11.10	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

Channel:

Test point:

Frequency range:



Result:

- passed

- not passed

TX – X Position Low CH

Horizontal

1GHz-26.5GHz



No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.
	(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2404.00	-6.83	94.04	87.21	114.00	-26.79	Peak
2	2404.00	-6.83	91.40	84.57	94.00	-9.43	AVG
NI -		F = = (= =	Destruction		1 ···· · · ·		Det
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4064.128	0.02	36.78	36.80	74.00	-37.20	peak
2	4064.128	0.02	21.04	21.06	54.00	-32.94	AVG
3	7106.212	8.82	35.35	44.17	74.00	-29.83	peak
4	7106.212	8.82	21.59	30.41	54.00	-23.59	AVG
Remark	: Other frequer	icy mini ma	rgin all >6 dB o	of Limit			
Channel	:	TX –X Pos	sition Middle C	Н	Result:	- passed	
Test poi		Horizonta				- not passe	ed
requen	cy range:	1GHz-26.	5GHz				-
	-	_					
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2440.00	-6.62	94.14	87.52	114.00	-26.48	Peak
2	2440.00	-6.62	91.01	84.39	94.00	-9.61	AVG
	-						
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3226.453	-2.67	37.70	35.03	74.00	-38.97	
1 2	3226.453 3226.453	-2.67 -2.67	37.70 22.81	35.03 20.14	74.00 54.00		
						-38.97	AVG
2	3226.453	-2.67	22.81	20.14	54.00	-38.97 -33.86	AVG peak
2 3 4	3226.453 7216.433	-2.67 9.23 9.23	22.81 35.59 21.62	20.14 44.82 30.85	54.00 74.00	-38.97 -33.86 -29.18	AVG peak
2 3 4 Remark	3226.453 7216.433 7216.433 : Other frequer	-2.67 9.23 9.23 icy mini ma	22.81 35.59 21.62 rgin all >6 dB o	20.14 44.82 30.85	54.00 74.00 54.00	-38.97 -33.86 -29.18 -23.15	AVG peak
2 3 4 Remark Channel	3226.453 7216.433 7216.433 : Other frequen	-2.67 9.23 9.23 acy mini ma	22.81 35.59 21.62 rgin all >6 dB o	20.14 44.82 30.85	54.00 74.00 54.00 Result: ∎	-38.97 -33.86 -29.18 -23.15 - passed	AVG peak AVG
2 3 4 Remark Channel Test poir	3226.453 7216.433 7216.433 : Other frequen : nt:	-2.67 9.23 9.23 Icy mini ma TX –X Pos Horizonta	22.81 35.59 21.62 rgin all >6 dB of sition High CH	20.14 44.82 30.85	54.00 74.00 54.00 Result: ∎	-38.97 -33.86 -29.18 -23.15	AVG peak AVG
2 3 4 Remark Channel Test poir	3226.453 7216.433 7216.433 : Other frequen	-2.67 9.23 9.23 acy mini ma	22.81 35.59 21.62 rgin all >6 dB of sition High CH	20.14 44.82 30.85	54.00 74.00 54.00 Result: ∎	-38.97 -33.86 -29.18 -23.15 - passed	peak AVG peak AVG
2 3 Remark Channel Fest poin	3226.453 7216.433 7216.433 : Other frequer : nt: cy range:	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.	22.81 35.59 21.62 rgin all >6 dB o sition High CH	20.14 44.82 30.85	54.00 74.00 54.00 Result: ∎	-38.97 -33.86 -29.18 -23.15 - passed - not passe	AVG peak AVG
2 3 4 Remark Channel Test poir	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency	-2.67 9.23 9.23 Icy mini ma TX –X Pos Horizonta 1GHz-26.9	22.81 35.59 21.62 rgin all >6 dB o sition High CH 5GHz Reading	20.14 44.82 30.85 of Limit	54.00 74.00 54.00 Result: ■ □	-38.97 -33.86 -29.18 -23.15 - passed - not passe Margin	AVG peak AVG
2 3 Remark Channel Test poir Frequen	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz)	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB)	22.81 35.59 21.62 rgin all >6 dB o sition High CH 5GHz Reading (dBuV)	20.14 44.82 30.85 of Limit Level (dBuV/m)	54.00 74.00 54.00 Result: ∎ Limit (dBuV/m)	-38.97 -33.86 -29.18 -23.15 - passed - not passed Margin (dB)	AVG peak AVG ed Det.
2 3 Remark Channel Fest poin	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz) 2476.00	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB) -6.40	22.81 35.59 21.62 rgin all >6 dB o sition High CH 5GHz Reading (dBuV) 93.85	20.14 44.82 30.85 of Limit Level (dBuV/m) 87.45	54.00 74.00 54.00 Result: ■ □	-38.97 -33.86 -29.18 -23.15 - passed - not passed - not passed Margin (dB) -26.55	AVG peak AVG ed Det.
2 3 4 Remark Channel Fest poin Frequen	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz)	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB)	22.81 35.59 21.62 rgin all >6 dB o sition High CH 5GHz Reading (dBuV)	20.14 44.82 30.85 of Limit Level (dBuV/m)	54.00 74.00 54.00 Result: ∎ Limit (dBuV/m) 114.00	-38.97 -33.86 -29.18 -23.15 - passed - not passed Margin (dB)	AVG peak AVG ed Det.
2 3 4 Remark Channel Fest poin Frequen	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz) 2476.00	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB) -6.40	22.81 35.59 21.62 rgin all >6 dB o sition High CH 5GHz Reading (dBuV) 93.85	20.14 44.82 30.85 of Limit Level (dBuV/m) 87.45	54.00 74.00 54.00 Result: ∎ Limit (dBuV/m) 114.00	-38.97 -33.86 -29.18 -23.15 - passed - not passed - not passed Margin (dB) -26.55	AVG peak AVG ed Det. Peak AVG
2 3 4 Remark Channel Test poin Frequen No. 1 2	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz) 2476.00 2476.00 Frequency	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB) -6.40 -6.40	22.81 35.59 21.62 rgin all >6 dB o sition High CH 5GHz Reading (dBuV) 93.85 90.59 Reading	20.14 44.82 30.85 of Limit Level (dBuV/m) 87.45 84.19 Level	54.00 74.00 54.00 Result: ■ Limit (dBuV/m) 114.00 94.00 Limit	-38.97 -33.86 -29.18 -23.15 - passed - not passed - not passed Margin (dB) -26.55 -9.81 Margin	AVG peak AVG
2 3 4 Remark Channel Test poir Frequen No. 1 2 No.	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz) 2476.00 2476.00 2476.00 Frequency (MHz) 4306.613	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB) -6.40 -6.40 Factor (dB) 0.91	22.81 35.59 21.62 rgin all >6 dB of sition High CH 5GHz Reading (dBuV) 93.85 90.59 Reading (dBuV) 36.30	20.14 44.82 30.85 of Limit (dBuV/m) 87.45 84.19 Level (dBuV/m)	54.00 74.00 54.00 Result: ■ Limit (dBuV/m) 114.00 94.00 Limit (dBuV/m) 74.00	-38.97 -33.86 -29.18 -23.15 - passed - not passed - not passed - not passed - not passed - 26.55 -9.81 -26.55 -9.81 -36.79	AVG peak AVG ed Det. Peak AVG Det. peak
2 3 4 Remark Channel Test poir Frequen No. 1 2 No. 1	3226.453 7216.433 7216.433 : Other frequen : nt: cy range: Frequency (MHz) 2476.00 2476.00 Frequency (MHz)	-2.67 9.23 9.23 icy mini ma TX –X Pos Horizonta 1GHz-26.9 Factor (dB) -6.40 -6.40 Factor (dB)	22.81 35.59 21.62 rgin all >6 dB of sition High CH 5GHz Reading (dBuV) 93.85 90.59 Reading (dBuV)	20.14 44.82 30.85 of Limit (dBuV/m) 87.45 84.19 Level (dBuV/m) 37.21	54.00 74.00 54.00 Result: ■ Limit (dBuV/m) 114.00 94.00	-38.97 -33.86 -29.18 -23.15 - passed - not passed - not passed Margin (dB) -26.55 -9.81 Margin (dB)	AVG peak AVG Det. Peak AVG

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn







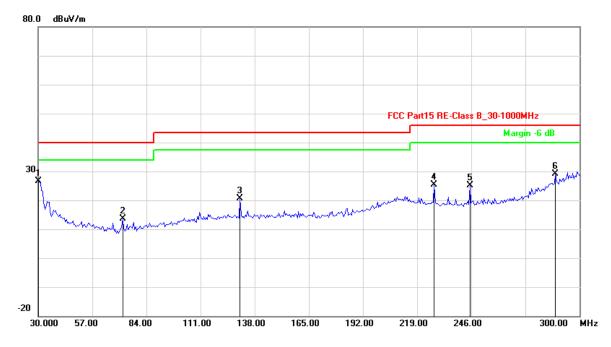

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	30.0000	-16.04	42.77	26.73	40.00	-13.27	QP		
2	72.2044	-20.58	34.20	13.62	40.00	-26.38	QP		
3	130.6413	-16.13	36.78	20.65	43.50	-22.85	QP		
4	227.4950	-11.47	36.97	25.50	46.00	-20.50	QP		
5	245.3507	-11.51	36.52	25.01	46.00	-20.99	QP		
6	288.0962	-4.65	33.68	29.03	46.00	-16.97	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





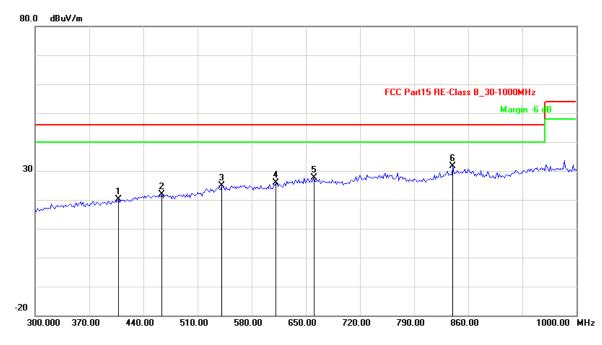

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	408.0160	-10.18	30.30	20.12	46.00	-25.88	QP	
2	464.1283	-8.36	30.35	21.99	46.00	-24.01	QP	
3	541.2826	-6.11	30.94	24.83	46.00	-21.17	QP	
4	611.4228	-5.02	30.78	25.76	46.00	-20.24	QP	
5	660.5210	-3.33	31.01	27.68	46.00	-18.32	QP	
6	840.0802	-0.88	32.61	31.73	46.00	-14.27	QP	
Remark	Remark: Other frequency mini margin all >6 dB of Limit							

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

Channel:

Test point:



TX – X Position Low CH

Vertical



Result: ■ - passed

□ - not passed

l est poi		Vertical				- not passe	ed
Frequer	ncy range:	1GHz-26.	5GHz			-	
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2404.00	-6.83	99.24	92.41	114.00	-21.59	Peak
2	2404.00	-6.83	96.34	89.51	94.00	-4.49	AVG
			L		1		
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3865.731	-0.59	40.47	39.88	74.00	-34.12	peak
2	3865.731	-0.59	24.95	24.36	54.00	-29.64	AVG
3	7591.182	10.48	39.04	49.52	74.00	-24.48	peak
4	7591.182	10.48	24.73	35.21	54.00	-18.79	AVG
Remark	: Other frequer	ncy mini ma	irgin all >6 dB	of Limit			
Channe			sition Middle C	H	Result:	- passed	
Test poi		Vertical				- not passe	ed
requer	ncy range:	1GHz-26.	5GHz				
		-					
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2440.00	-6.62	99.13	92.51	114.00	-21.49	Peak
2	2440.00	-6.62	96.28	89.66	94.00	-4.34	AVG
					•		
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3821.643	-0.72	36.65	35.93	74.00	-38.07	peak
2	3821.643	-0.72	22.30	21.58	54.00	-32.42	AVG
3	7723.447	10.76	36.31	47.07	74.00	-26.93	peak
4	7723.447	10.76	21.93	32.69	54.00	-21.31	AVG
Remark	: Other frequer	ncy mini ma	rgin all >6 dB	of Limit			
Channe	l:	TX –X Po	sition High CH		Result:	- passed	
Test poi		Vertical	J			- not passe	h
	ncy range:	1GHz-26.	5GHz			- 101 passe	^{ju}
No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2476.00	-6.40	98.97	92.57	114.00	-21.43	Peak
	2476.00	-6.40	95.62	89.22	94.00	-4.78	AVG
2				•			
2							
2 No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
		Factor (dB) -0.59	Reading (dBuV) 36.16			(dB)	
No.	(MHz) 3865.731	(dB) -0.59	(dBuV) 36.16	(dBuV/m) 35.57	(dBuV/m) 74.00	(dB) -38.43	peak
No.	(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	

Remark: Other frequency mini margin all >6 dB of Limit

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn






Channel:	RX	Result:	- passed
Test point:	Horizontal		Image: - not passed
Frequency range:	30MHz-1GHz		

EUT	Surface Receiver with Telemetry			
Test Condition	mbient Temperature: 25°C Humidity: 56%			
Test distance	Meter			
Test Date:	25~29 April 2016			
Operator	Duke			
MODEL NO	SPMSR4000T			

80.0 dBuV/m

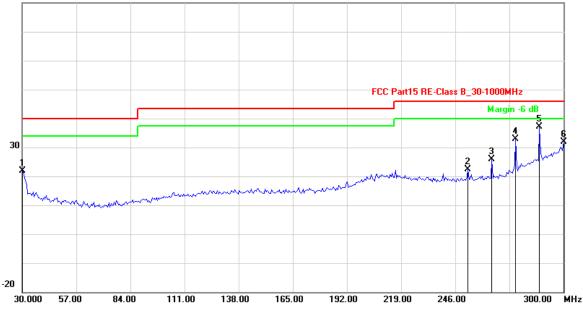

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	30.0000	-16.04	37.99	21.95	40.00	-18.05	QP	
2	252.3848	-11.31	33.70	22.39	46.00	-23.61	QP	
3	264.2886	-10.52	36.37	25.85	46.00	-20.15	QP	
4	276.1924	-8.26	41.11	32.85	46.00	-13.15	QP	
5	288.0962	-4.65	41.87	37.22	46.00	-8.78	QP	
6	300.0000	-1.42	33.36	31.94	46.00	-14.06	QP	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





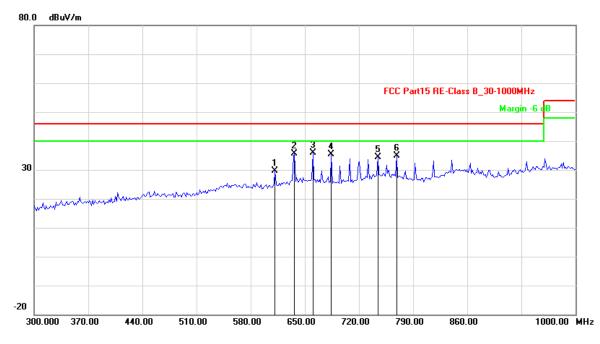

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	611.4228	-5.02	34.68	29.66	46.00	-16.34	QP	
2	636.6733	-3.85	39.53	35.68	46.00	-10.32	QP	
3	660.5210	-3.33	39.29	35.96	46.00	-10.04	QP	
4	684.3687	-3.56	38.96	35.40	46.00	-10.60	QP	
5	744.6894	-1.82	36.32	34.50	46.00	-11.50	QP	
6	768.5371	-2.22	37.01	34.79	46.00	-11.21	QP	
Remark	Remark: Other frequency mini margin all >6 dB of Limit							

Channel:	RX	Result:	- passed
Test point:	Horizontal		- not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3843.687	-0.65	36.59	35.94	74.00	-38.06	peak	
2	3843.687	-0.65	20.82	20.17	54.00	-33.83	AVG	
3	6555.110	7.65	39.72	47.37	74.00	-26.63	peak	
4	6555.110	7.65	25.20	32.85	54.00	-21.15	AVG	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471


Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





Channel:	RX	Result:	- passed
Test point:	Vertical		□ - not passed
Frequency range:	30MHz-1GHz		



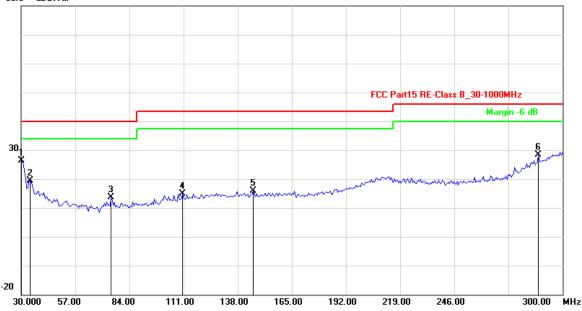

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	30.0000	-16.04	42.32	26.28	40.00	-13.72	QP	
2	34.3287	-16.60	35.89	19.29	40.00	-20.71	QP	
3	74.9098	-20.36	34.02	13.66	40.00	-26.34	QP	
4	110.6212	-17.26	32.15	14.89	43.50	-28.61	QP	
5	145.7916	-16.00	32.00	16.00	43.50	-27.50	QP	
6	288.0962	-4.65	32.98	28.33	46.00	-17.67	QP	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





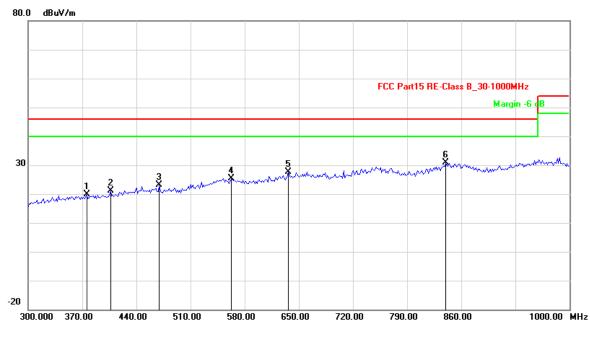

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	375.7515	-10.92	30.72	19.80	46.00	-26.20	QP	
2	406.6132	-10.24	31.48	21.24	46.00	-24.76	QP	
3	469.7395	-8.33	31.41	23.08	46.00	-22.92	QP	
4	562.3246	-5.65	30.94	25.29	46.00	-20.71	QP	
5	636.6733	-3.85	31.58	27.73	46.00	-18.27	QP	
6	840.0802	-0.88	31.81	30.93	46.00	-15.07	QP	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

Channel:	RX	Result:	- passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3358.717	-2.16	38.26	36.10	74.00	-37.90	peak
2	3358.717	-2.16	24.90	22.74	54.00	-31.26	AVG
3	6136.273	6.87	40.82	47.69	74.00	-26.31	peak
4	6136.273	6.87	25.82	32.69	54.00	-21.31	AVG
Remark: Other frequency mini margin all >6 dB of Limit							

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





8.Band Edge Compliance test

8.1. Test Equipment

Band Edge Compliance test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2015/10
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2016/03
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2016/03

8.2. Test Information

EUT	Surface Receiver with Telemetry
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	25~29 April 2016
Operator	Duke
MODEL NO	SPMSR4000T

8.3. Test procedure

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz ; VBW=3KHz(1/on Time) / Sweep=AUTO

8.4. Test Results

PASSED.

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

Toot Made	Channel	Test Result Highest Emission (dBuv/m)			
Test Mode	Marked Frequency	Horizontal		Vertical	
		Peak	Average	Peak	Average
	2390MHz	29.09	19.45	32.55	21.07
Low Channel	2400MHz	40.10	32.78	48.77	37.82
	2483.5MHz	31.79	22.52	34.72	24.79
High Channel	2500MHz	30.92	24.32	32.02	25.87

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101	, No.65,	Zhuji Hig	hway,Tianh
Tel:	+86-20-85	5543113	(32 lines)
Com	plaint line:	+86-20-	85533471

 anhe District,
 Guangzhou, China


 s)
 Fax: +86-20-38780406

 1
 E-mail: cts@cts-lab.com.cn





Band Edges (Low)

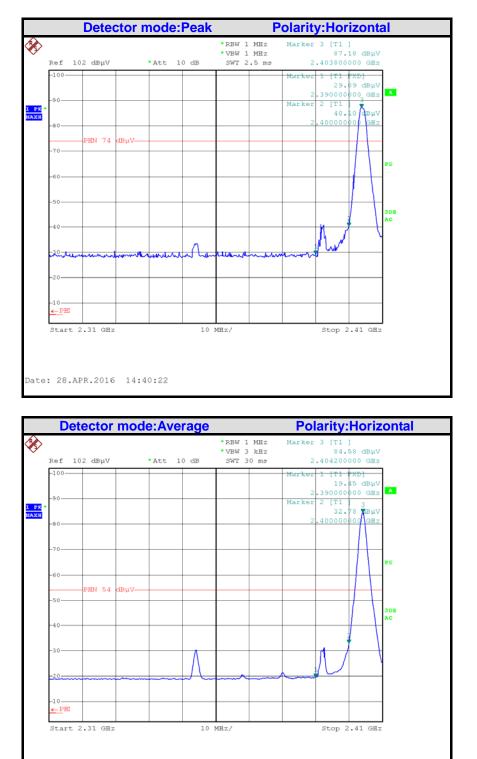

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn


Date: 28.APR.2016 14:43:01


See Reverse For Terms And Conditions of Service

Report No.: CGZ3160425-00373-EFI





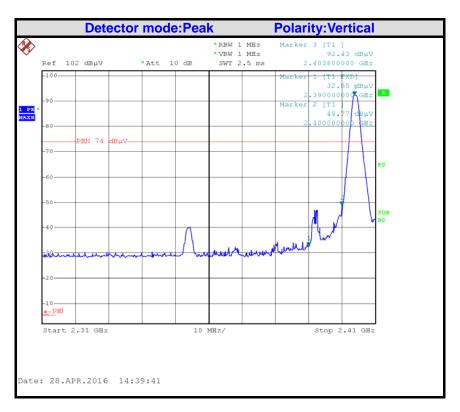

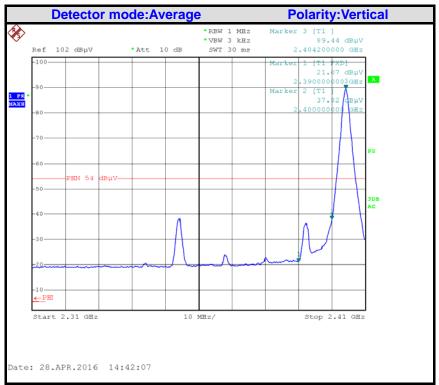

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471


Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





Band Edges (High)

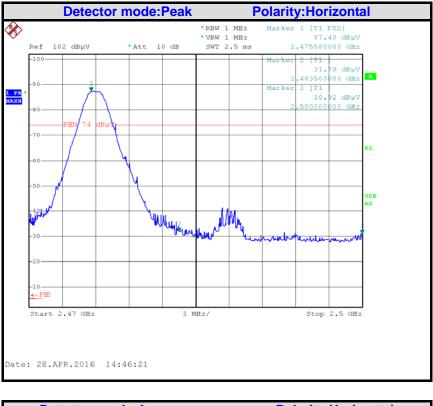

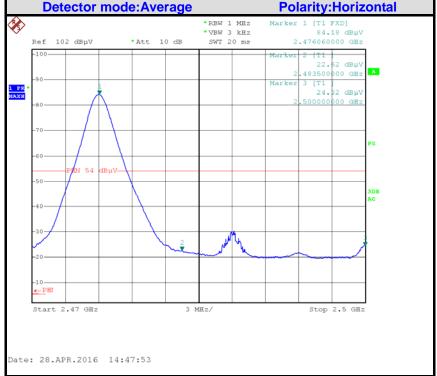

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





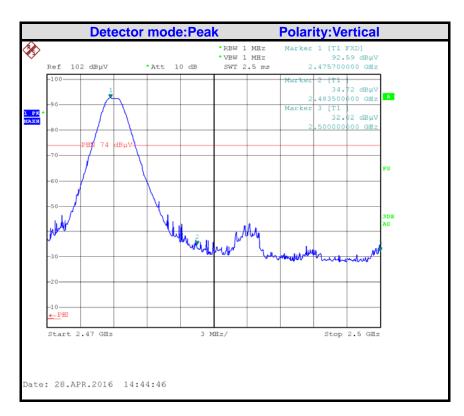

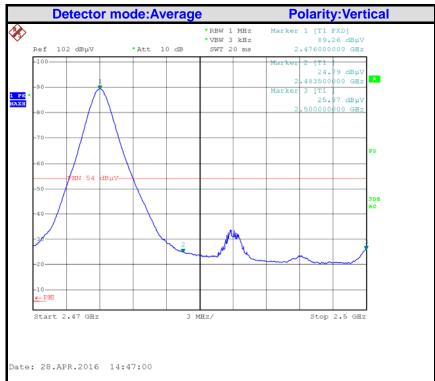

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





9.99% bandwidth

9.1 Test procedure

According to RSS-210 A1.1.3 and RSS-Gen 4.6.1 The Surface Receiver with Telemetry output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

9.2. Test Equipment

Band I	Band Edge Compliance test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2016/03/30		
2	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2016/03/25		

9.3. Test Results

PASSED.

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2404	1.156
Middle	2440	1.168
High	2476	1.200

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn







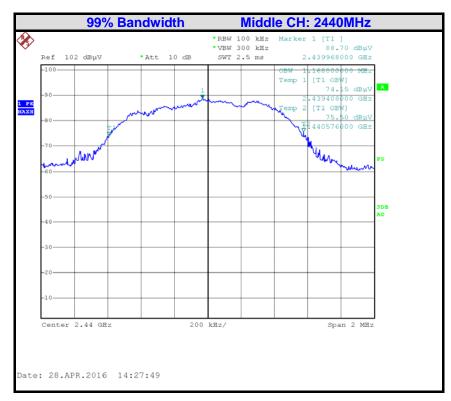


CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





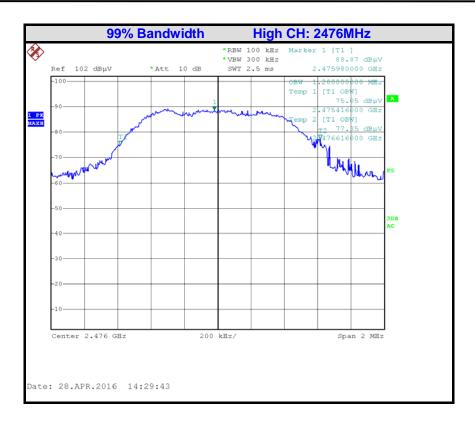

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





10. Deviation to test specifications

The following identical model(s):

SPMSR6000T

Belong to the tested device:

Product description: Surface Receiver with Telemetry . Model name: SPMSR4000T

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn