



# MEASUREMENT REPORT

## FCC PART 15.249 / RSS-210

---

**FCC ID:** BRWWACO1T  
**IC:** 6157A-WACO1T  
**Application:** Horizon Hobby, LLC  
  
**Application Type:** Certification  
**Product:** Waco RF Module  
**Model No.:** Waco  
**FCC Classification:** Low Power Communication Device Transmitter (DXX)  
**FCC Rule Part(s):** Part 15.249  
**IC Rule(s):** RSS-210 Issue 9, RSS-GEN Issue 5  
**Test Procedure(s):** ANSI C63.10 - 2013  
**Test Date:** August 06 ~ September 19, 2019

Reviewed By: *Sunny Sun*  
( Sunny Sun )

Approved By: *Robin Wu*  
( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
1907RSU060-U1	Rev. 01	Initial Report	09-19-2019	Valid

---

## CONTENTS

Description	Page
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Equipment Description .....	7
2.2. Operation Frequency and Channel List.....	7
2.3. Test Configuration .....	8
2.4. EMI Suppression Device(s)/Modifications .....	8
2.5. Labeling Requirements .....	8
<b>3. DESCRIPTION OF TEST .....</b>	<b>9</b>
3.1. Evaluation Procedure .....	9
3.2. AC Line Conducted Emissions.....	9
3.3. Radiated Emissions.....	10
<b>4. ANTENNA REQUIREMENTS .....</b>	<b>11</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>12</b>
<b>6. MEASUREMENT UNCERTAINTY .....</b>	<b>14</b>
<b>7. TEST RESULT .....</b>	<b>15</b>
7.1. Summary .....	15
7.2. Conducted Emission .....	16
7.2.1. Test Limit .....	16
7.2.2. Test Setup .....	16
7.2.3. Test Result.....	17
7.3. Radiated Emission .....	19
7.3.1. Test Limit .....	19
7.3.2. Test Setup .....	20
7.3.3. Test Result.....	21
7.4. Radiated Restricted Band Edge Measurement .....	25
7.4.1. Test Limit .....	25
7.4.2. Test Setup .....	28
7.4.3. Test Result.....	29
7.5. 20dB Spectrum Bandwidth Measurement .....	37
7.5.1. Test Limit .....	37
7.5.2. Test Procedure used .....	37

---

7.5.3.	Test Setting.....	37
7.5.4.	Test Setup .....	37
7.5.5.	Test Result.....	38
7.6.	99% Bandwidth Measurement .....	39
7.6.1.	Test Limit .....	39
7.6.2.	Test Procedure used .....	39
7.6.3.	Test Setting.....	39
7.6.4.	Test Setup .....	39
7.6.5.	Test Result.....	40
<b>8.</b>	<b>CONCLUSION.....</b>	<b>41</b>
	<b>Appendix A - Test Setup Photograph.....</b>	<b>42</b>
	<b>Appendix B - EUT Photograph .....</b>	<b>43</b>

## §2.1033 General Information

<b>Applicant:</b>	Horizon Hobby, LLC
<b>Applicant Address:</b>	2904 Research Rd. Champaign, IL 61822
<b>Manufacturer:</b>	Horizon Hobby, LLC
<b>Manufacturer Address:</b>	2904 Research Rd. Champaign, IL 61822
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	Waco RF Module
Model No.:	Waco
Frequency Range:	2402 ~ 2478 MHz
Channel Number:	23
Type of Modulation:	GFSK
Hardware Version:	A
Software Version:	1.0
Antenna Type:	Integral Antenna
Antenna Gain:	1.3dBi

### 2.2. Operation Frequency and Channel List

Channel	Frequency	Channel	Frequency
00	2402 MHz	12	2440 MHz
01	2404 MHz	13	2446 MHz
02	2407 MHz	14	2450 MHz
03	2411 MHz	15	2456 MHz
04	2414 MHz	16	2459 MHz
05	2417 MHz	17	2463 MHz
06	2420 MHz	18	2466 MHz
07	2424 MHz	19	2469 MHz
08	2427 MHz	20	2473 MHz
09	2430 MHz	21	2476 MHz
10	2433 MHz	22	2478 MHz
11	2437 MHz	--	--

Note: The engineer test sample was provided by the manufacturer, it was configured into fixed frequency T<sub>x</sub> status after power on.

### **2.3. Test Configuration**

The EUT was tested as described in this report is in compliance with the requirements limits of FCC Rules Part 15.207, 15.209, 15.215 and 15.249. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

### **2.4. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

### **2.5. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

#### RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labeling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labeling option, see Notice 2014–DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.



### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the requirements provided in FCC 15.207, 15.209, 15.215 and 15.249 were performed in the report of the EUT.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150 kHz to 30 MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9 kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

#### **4. ANTENNA REQUIREMENTS**

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**Conclusion:**

This unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

### Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2019/09/25
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2019/10/19
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

### Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2019/10/19
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2019/11/09
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2019/12/13
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

## Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2019/11/16
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2019/10/18
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2019/11/16
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2019/11/16
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
e3	V8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement - SR2</b>	
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):	
150kHz~30MHz: 3.46dB	
<b>Radiated Emission Measurement - AC1</b>	
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):	
Horizontal: 30MHz~300MHz: 4.07dB	
300MHz~1GHz: 3.63dB	
1GHz~18GHz: 4.16dB	
Vertical: 30MHz~300MHz: 4.18dB	
300MHz~1GHz: 3.60dB	
1GHz~18GHz: 4.76dB	
<b>Radiated Emission Measurement - AC2</b>	
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):	
Horizontal: 30MHz~300MHz: 3.75dB	
300MHz~1GHz: 3.53dB	
1GHz~18GHz: 4.28dB	
Vertical: 30MHz~300MHz: 3.86dB	
300MHz~1GHz: 3.53dB	
1GHz~18GHz: 4.33dB	

## 7. TEST RESULT

### 7.1. Summary

RSS Section(s)	FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-Gen Clause 8.8	15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.2
RSS-Gen Clause 8.9; RSS-210 Annex A B.10	15.209 15.249	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.3 & 7.4
N/A	15.215(c)	20dB Spectrum Bandwidth	20 dB bandwidth of the emission in the specific band	Conducted	Pass	Section 7.5
RSS-GEN Clause 6.7	N/A	99% Occupied Bandwidth	N/A		Pass	Section 7.6

**Notes:**

1. All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## 7.2. Conducted Emission


### 7.2.1. Test Limit

FCC Part 15.207 & RSS-Gen Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.2.2. Test Setup

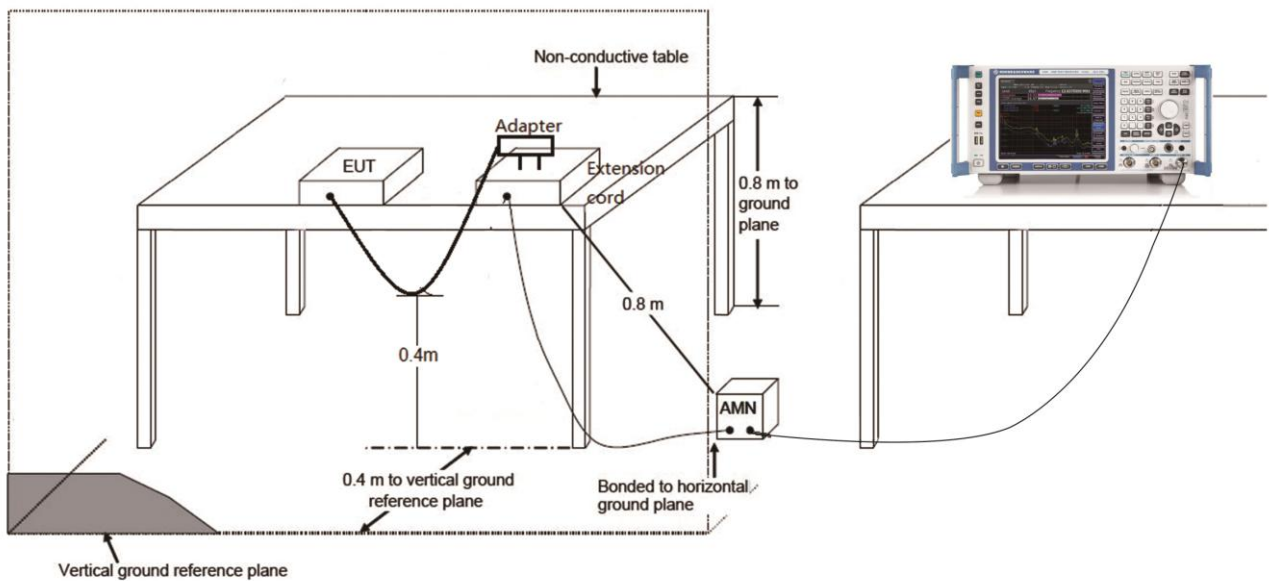



### 7.2.3. Test Result

Site: SR2	Time: 2019/08/22 - 11:03
Limit: FCC_Part15.207_CE_AC Power	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Waco RF Module	Power: AC 120V/60Hz
Transmit at channel 00 (2402MHz)	

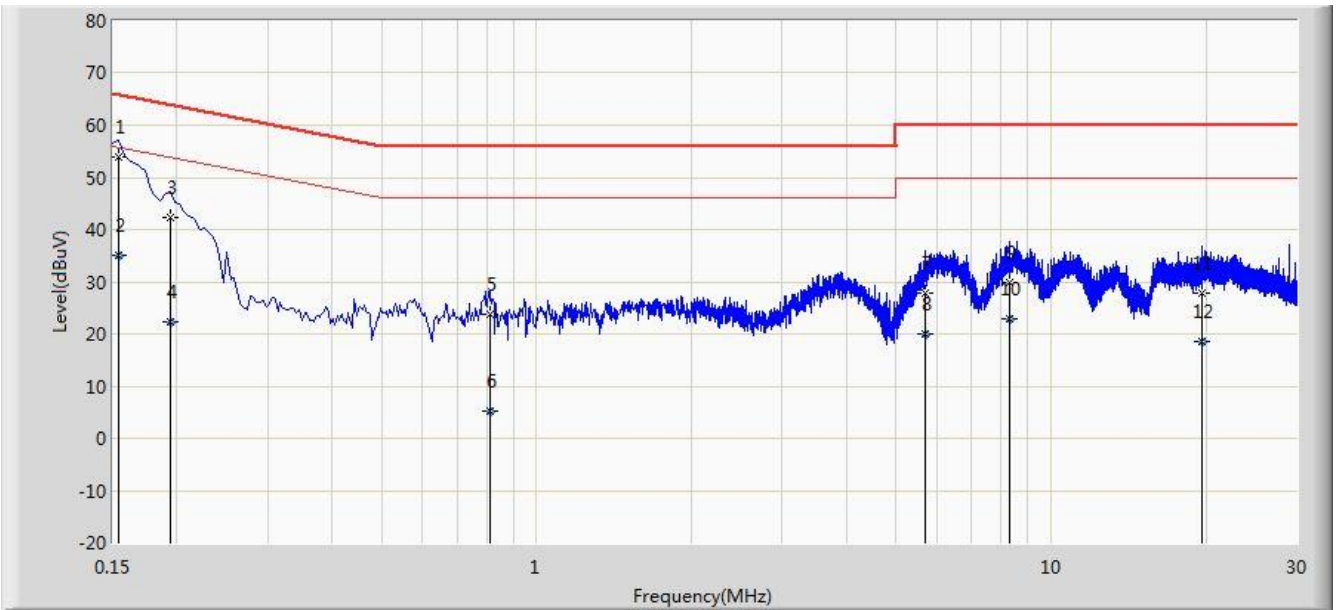


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	53.849	43.109	-11.932	65.781	10.740	QP
2			0.154	35.193	24.453	-20.588	55.781	10.740	AV
3			0.194	42.201	32.185	-21.662	63.864	10.017	QP
4			0.194	22.289	12.272	-31.575	53.864	10.017	AV
5			0.814	23.640	13.636	-32.360	56.000	10.004	QP
6			0.814	5.160	-4.844	-40.840	46.000	10.004	AV
7			5.686	27.845	17.749	-32.155	60.000	10.097	QP
8			5.686	20.109	10.012	-29.891	50.000	10.097	AV
9			8.302	29.949	19.784	-30.051	60.000	10.165	QP
10			8.302	22.848	12.683	-27.152	50.000	10.165	AV
11			19.650	27.860	17.747	-32.140	60.000	10.113	QP
12			19.650	18.443	8.330	-31.557	50.000	10.113	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2019/08/22 - 11:09
Limit: FCC_Part15.207_CE_AC Power	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Waco RF Module	Power: AC 120V/60Hz
Transmit at channel 00 (2402MHz)	

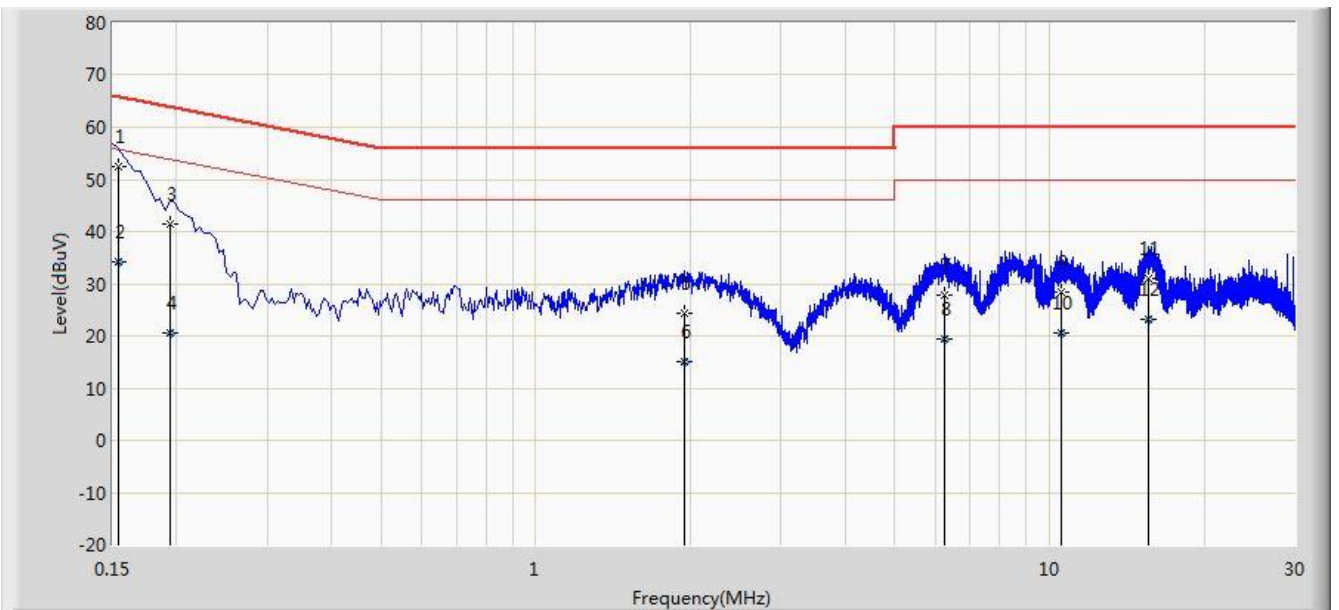

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	52.502	41.786	-13.280	65.781	10.716	QP
2			0.154	34.147	23.431	-21.634	55.781	10.716	AV
3			0.194	41.582	31.561	-22.281	63.864	10.021	QP
4			0.194	20.538	10.517	-33.326	53.864	10.021	AV
5			1.942	24.435	14.559	-31.565	56.000	9.876	QP
6			1.942	15.166	5.291	-30.834	46.000	9.876	AV
7			6.246	27.902	17.765	-32.098	60.000	10.137	QP
8			6.246	19.485	9.348	-30.515	50.000	10.137	AV
9			10.518	28.364	18.218	-31.636	60.000	10.146	QP
10			10.518	20.549	10.403	-29.451	50.000	10.146	AV
11			15.598	31.113	21.006	-28.887	60.000	10.107	QP
12			15.598	23.079	12.973	-26.921	50.000	10.107	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

### 7.3. Radiated Emission

#### 7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.249 & RSS-210		
Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (uV/m)
902 ~ 908	50	500
2400 ~ 2483.5	50	500
5725 ~ 5875	50	500
24000 ~ 24250	250	2500


Note: FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 & RSS-Gen		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100**	3
88 ~ 216	150**	3
216 ~ 960	200**	3
Above 960	500	3


Note 1: The lower limit shall apply at the transition frequency.  
 Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.  
 Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).

### 7.3.2. Test Setup

#### Below 1GHz Test Setup:

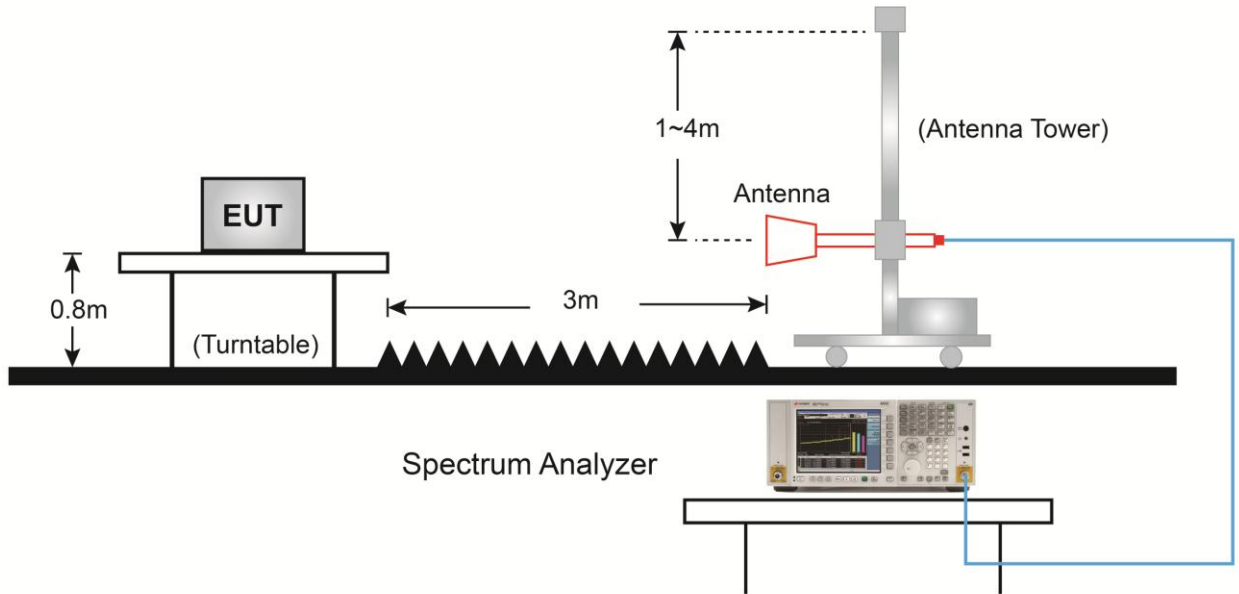

#### Above 1GHz Test Setup:

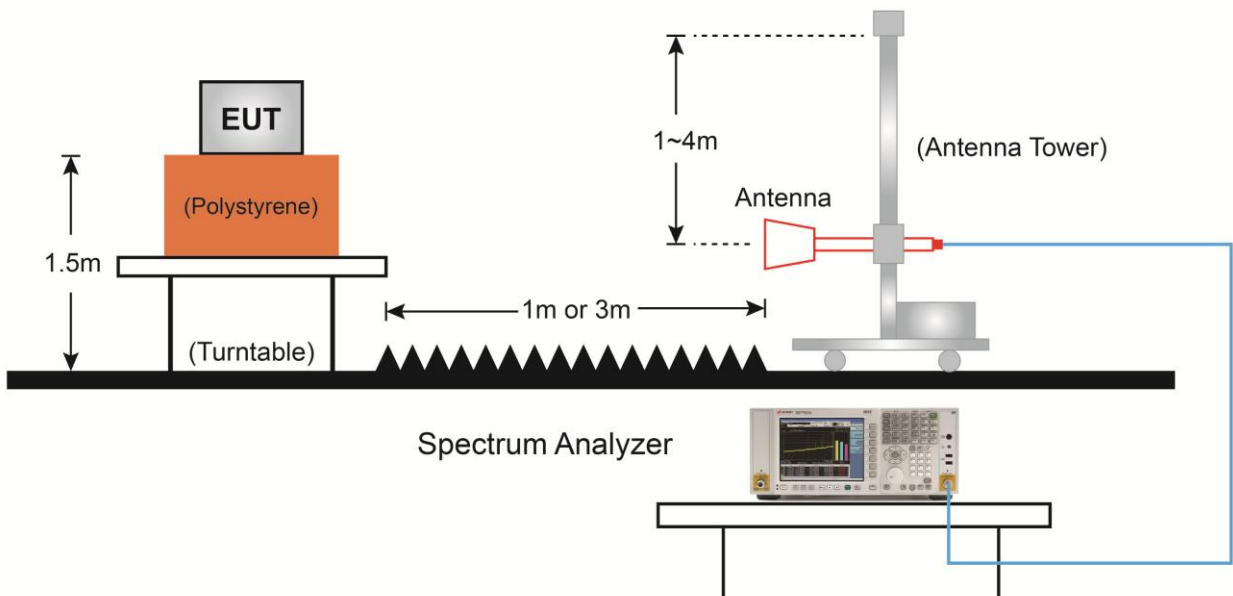

### 7.3.3. Test Result

Product	Waco RF Module	Temperature	24°C
Test Engineer	Cloud Guo	Relative Humidity	59%
Test Site	AC1	Test Date	2019/08/06 ~ 2019/09/18
Remark	<b>Fundamental</b> Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
2402	65.2	31.4	96.6	114.0	-17.4	PK	Horizontal
	48.4	31.4	79.9	94.0	-14.1	AV	Horizontal
	58.0	31.4	89.4	114.0	-24.6	PK	Vertical
	43.5	31.4	74.9	94.0	-19.1	AV	Vertical
2440	64.1	31.4	95.5	114.0	-18.5	PK	Horizontal
	48.2	31.4	79.6	94.0	-14.4	AV	Horizontal
	58.1	31.4	89.5	114.0	-24.5	PK	Vertical
	44.3	31.4	75.7	94.0	-18.3	AV	Vertical
2478	64.6	31.4	96.0	114.0	-18.0	PK	Horizontal
	48.7	31.4	80.1	94.0	-13.9	AV	Horizontal
	58.7	31.4	90.1	114.0	-23.9	PK	Vertical
	44.5	31.4	75.9	94.0	-18.1	AV	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: All readings below 1GHz are peak, above 1GHz are performed with peak and/or average measurements as necessary.

Product	Waco RF Module	Temperature	24°C
Test Engineer	Snake Ni	Relative Humidity	59%
Test Site	AC1	Test Date	2019/08/06
Remark:	<b>Harmonics Radiated Emission - 2402MHz</b>		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
64.0	10.9	12.8	23.7	40.0	-16.3	QP	Horizontal
127.5	10.5	13.8	24.3	43.5	-19.2	QP	Horizontal
32.9	20.2	13.9	34.1	40.0	-5.9	QP	Vertical
72.2	22.7	11.3	34.0	40.0	-6.0	QP	Vertical
4094.0	37.5	0.9	38.4	74.0 (Note 2)	-35.6	PK	Horizontal
4804.0	46.6	3.5	50.1	74.0 (Note 2)	-23.9	PK	Horizontal
6712.0	34.6	8.7	43.3	74.0 (Note 2)	-30.7	PK	Horizontal
7206.0	40.4	11.7	52.1	74.0 (Note 2)	-21.9	PK	Horizontal
4085.5	36.9	0.9	37.8	74.0 (Note 2)	-36.2	PK	Vertical
4804.0	43.2	3.5	46.7	74.0 (Note 2)	-27.3	PK	Vertical
6559.0	34.5	8.3	42.8	74.0 (Note 2)	-31.2	PK	Vertical
7206.0	41.2	11.7	52.9	74.0 (Note 2)	-21.1	PK	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	Waco RF Module	Temperature	24°C
Test Engineer	Snake Ni	Relative Humidity	59%
Test Site	AC1	Test Date	2019/09/18
Remark:	<b>Harmonics Radiated Emission - 2440MHz</b>		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
62.0	11.5	13.2	24.7	40.0	-15.3	QP	Horizontal
167.7	10.3	14.7	25.0	43.5	-18.5	QP	Horizontal
32.9	20.1	13.9	34.0	40.0	-6.0	QP	Vertical
42.1	21.8	14.5	36.3	40.0	-3.7	QP	Vertical
4876.0	47.0	3.6	50.6	74.0 (Note 2)	-23.4	PK	Horizontal
7324.0	40.9	12.0	52.9	74.0 (Note 2)	-21.1	PK	Horizontal
8692.5	32.8	12.4	45.2	74.0 (Note 2)	-28.8	PK	Horizontal
9738.0	33.4	13.8	47.2	74.0 (Note 2)	-26.8	PK	Horizontal
4876.0	40.5	3.6	44.1	74.0 (Note 2)	-29.9	PK	Vertical
7315.5	41.1	11.9	53.0	74.0 (Note 2)	-21.0	PK	Vertical
8616.0	31.7	12.1	43.8	74.0 (Note 2)	-30.2	PK	Vertical
9908.0	33.7	14.2	47.9	74.0 (Note 2)	-26.1	PK	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	Waco RF Module	Temperature	24°C
Test Engineer	Snake Ni	Relative Humidity	59%
Test Site	AC1	Test Date	2019/08/06
Remark:	<b>Harmonics Radiated Emission - 2478MHz</b>		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
48.9	6.1	14.3	20.4	40.0	-19.6	QP	Horizontal
123.6	14.1	13.6	27.7	43.5	-15.8	QP	Horizontal
45.8	22.0	14.3	36.3	40.0	-3.7	QP	Vertical
60.0	23.1	13.5	36.6	40.0	-3.4	QP	Vertical
4956.0	46.0	3.5	49.5	74.0 (Note 2)	-24.5	PK	Horizontal
7434.0	41.8	11.8	53.6	74.0 (Note 2)	-20.4	PK	Horizontal
7842.5	32.7	11.5	44.2	74.0 (Note 2)	-29.8	PK	Horizontal
8658.5	31.9	12.3	44.2	74.0 (Note 2)	-29.8	PK	Horizontal
4956.0	38.9	3.5	42.4	74.0 (Note 2)	-31.6	PK	Vertical
7434.0	41.9	11.8	53.7	74.0 (Note 2)	-20.3	PK	Vertical
8616.0	32.1	12.1	44.2	74.0 (Note 2)	-29.8	PK	Vertical
10001.5	32.3	14.3	46.6	74.0 (Note 2)	-27.4	PK	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.



## 7.4. Radiated Restricted Band Edge Measurement

### 7.4.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ]	Measured Distance [Meter]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**For RSS-Gen Section 8.10 Requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for license exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	


All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ]	Magnetic Field Strength (H-Field) [ $\mu\text{A}/\text{m}$ ]	Measured Distance [Meters]
0.009 - 0.490 <sup>1</sup>	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

Note: The emission limits for the bands 9 - 90 kHz and 110 - 490 kHz are based on measurements employing a linear average detector.


#### 7.4.2. Test Setup

##### 1GHz ~ 18GHz Test Setup:

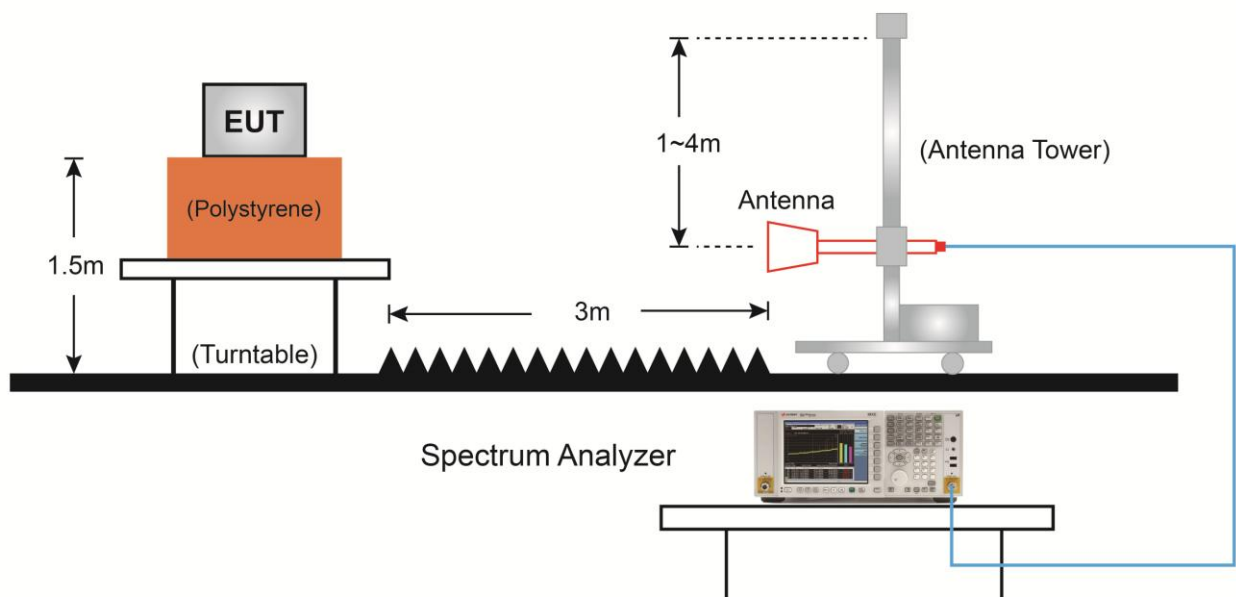

### 7.4.3. Test Result

Site: AC1	Time: 2019/08/06 - 08:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2402MHz	

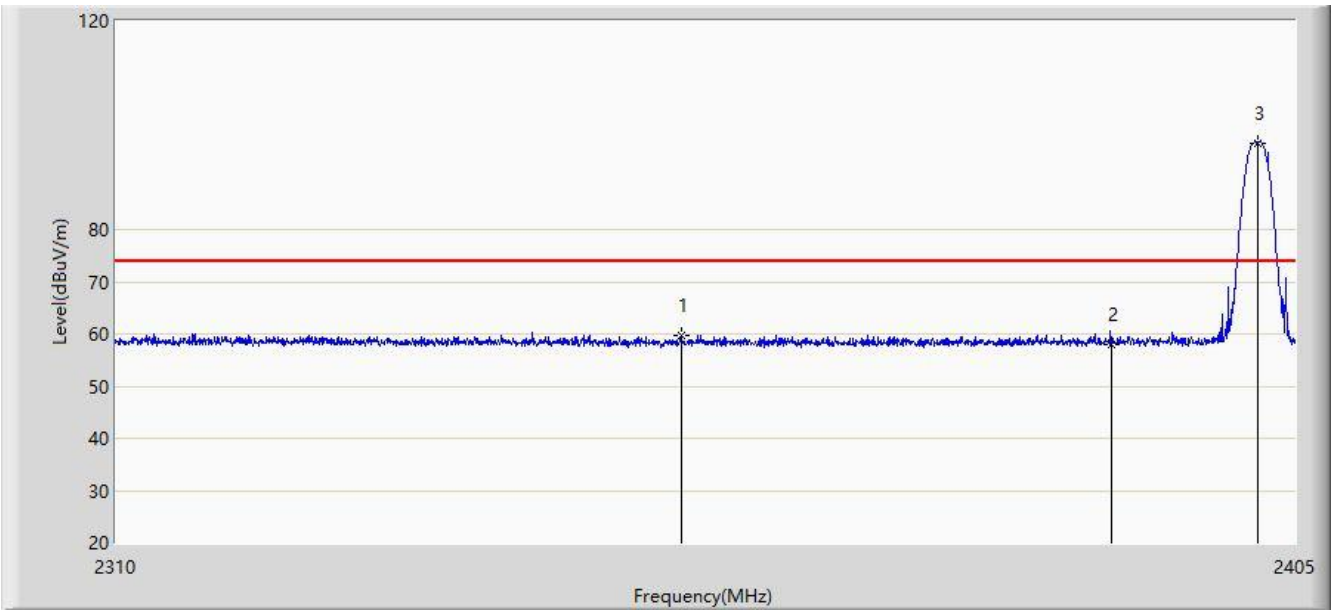


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.077	59.614	28.126	-14.386	74.000	31.489	PK
2			2390.000	58.040	26.591	-15.960	74.000	31.449	PK
3		*	2401.913	96.608	65.186	22.608	74.000	31.422	PK

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 08:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2402MHz	

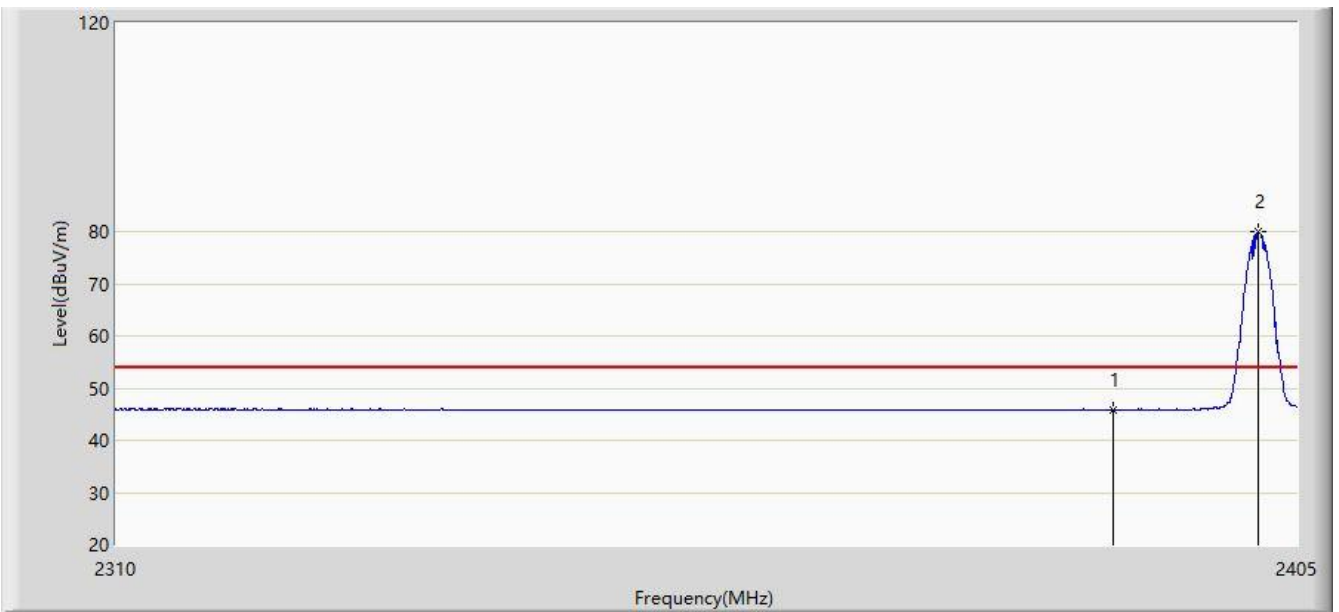


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.836	14.387	-8.164	54.000	31.449	AV
2		*	2401.817	79.862	48.440	25.862	54.000	31.422	AV

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 08:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2402MHz	

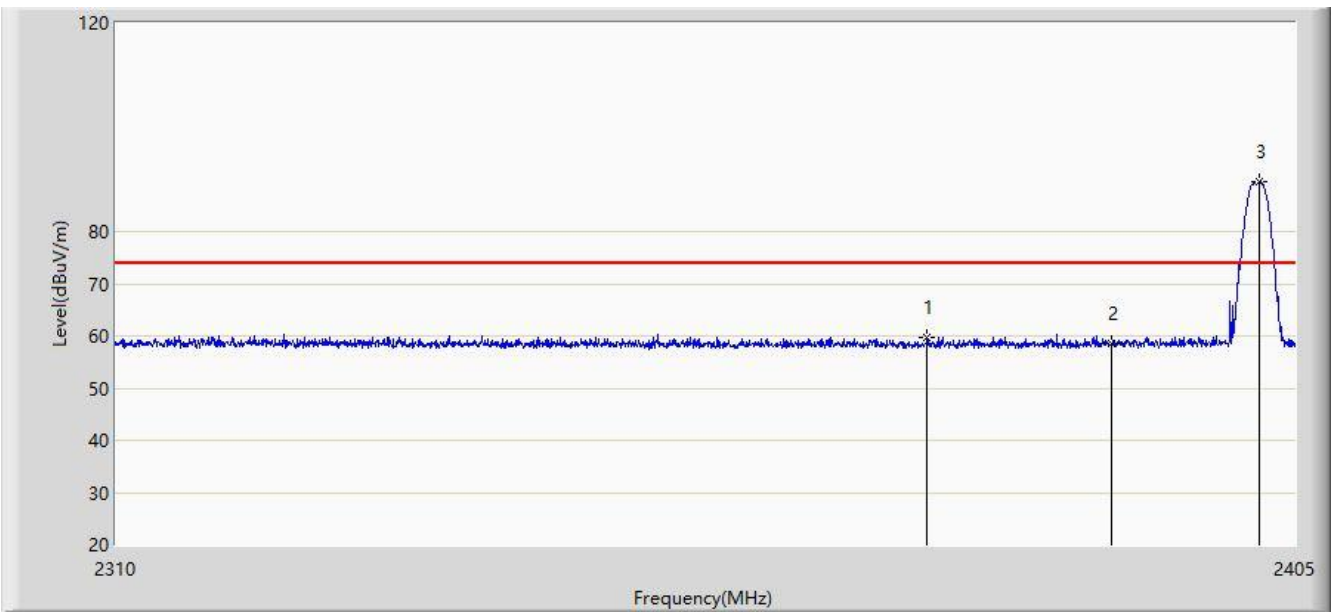


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.980	59.751	28.301	-14.249	74.000	31.450	PK
2			2390.000	58.413	26.964	-15.587	74.000	31.449	PK
3		*	2402.103	89.442	58.021	15.442	74.000	31.421	PK

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 08:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2402MHz	

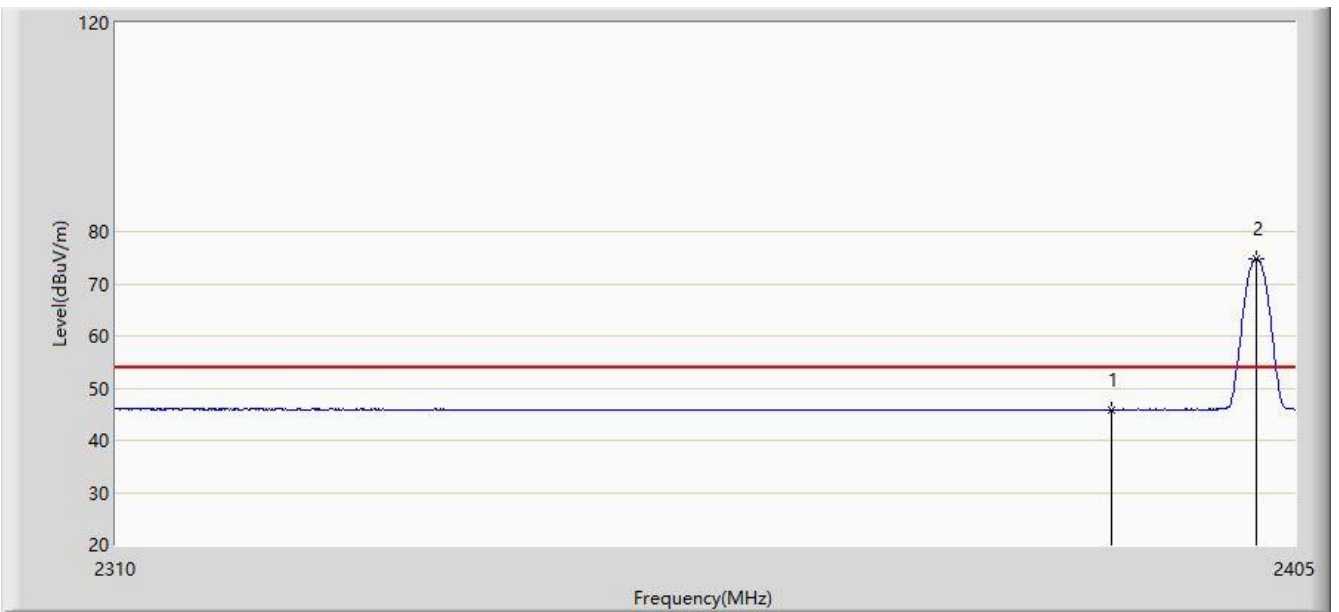


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.843	14.394	-8.157	54.000	31.449	AV
2		*	2401.817	74.872	43.450	20.872	54.000	31.422	AV

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2019/08/06 - 07:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2478MHz	

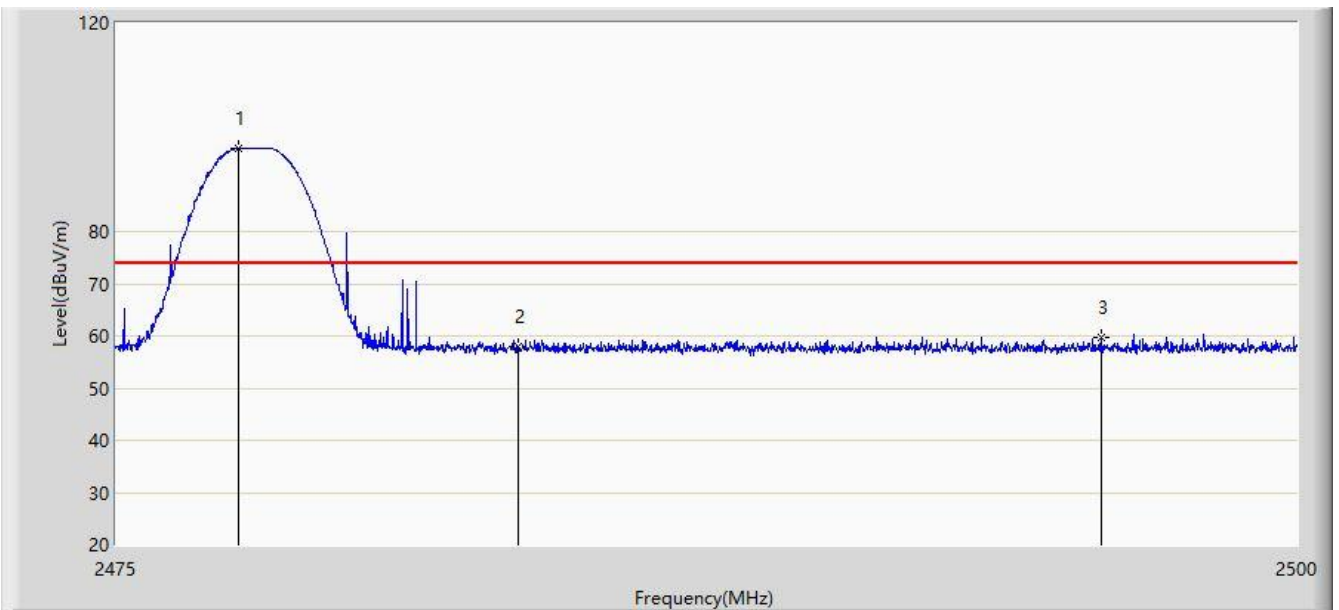


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2477.575	95.969	64.585	21.969	74.000	31.384	PK
2			2483.500	57.977	26.574	-16.023	74.000	31.403	PK
3			2495.837	59.598	28.153	-14.402	74.000	31.445	PK

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 07:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2478MHz	

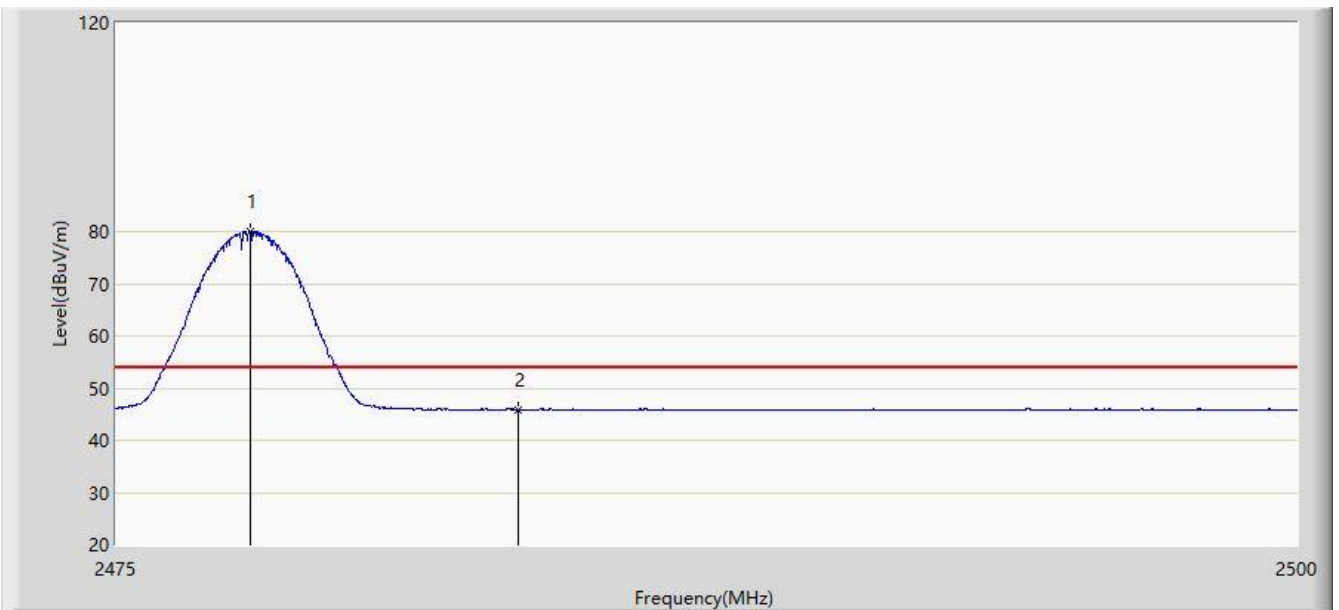


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2477.850	80.095	48.710	26.095	54.000	31.384	AV
2			2483.500	45.899	14.496	-8.101	54.000	31.403	AV

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 07:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2478MHz	

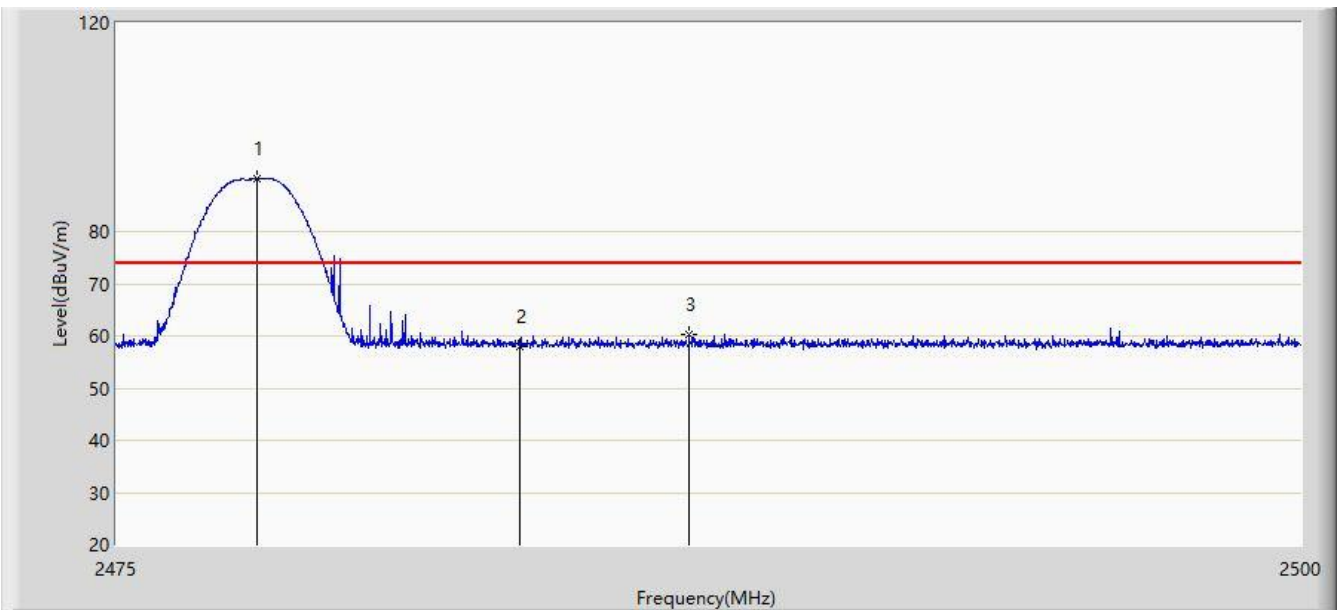


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2477.962	90.067	58.682	16.067	74.000	31.385	PK
2			2483.500	58.039	26.636	-15.961	74.000	31.403	PK
3			2487.062	60.226	28.811	-13.774	74.000	31.415	PK

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Waco RF Module	Power: DC 3.3V
Test Mode: Transmit at Channel 2478MHz	

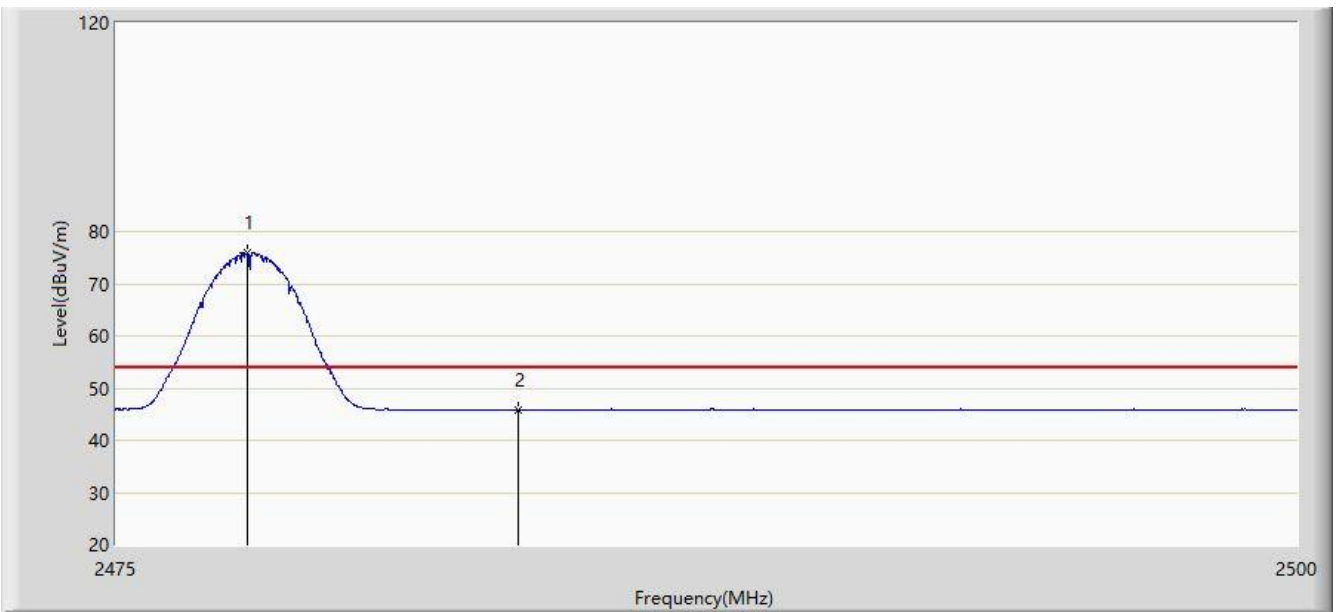

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2477.775	75.856	44.472	21.856	54.000	31.384	AV
2			2483.500	45.889	14.486	-8.111	54.000	31.403	AV

Note: Peak Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.5. 20dB Spectrum Bandwidth Measurement

### 7.5.1. Test Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission in the specific band.


### 7.5.2. Test Procedure used

ANSI C63.10 Clause 6.9.2

### 7.5.3. Test Setting

1. Set the spectrum span range to overlap the nominal center frequency
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize and marker the highest level
8. Determine the display level (the highest level - 20dB) and place two markers, one at the lowest frequency and the other at the highest frequency


### 7.5.4. Test Setup

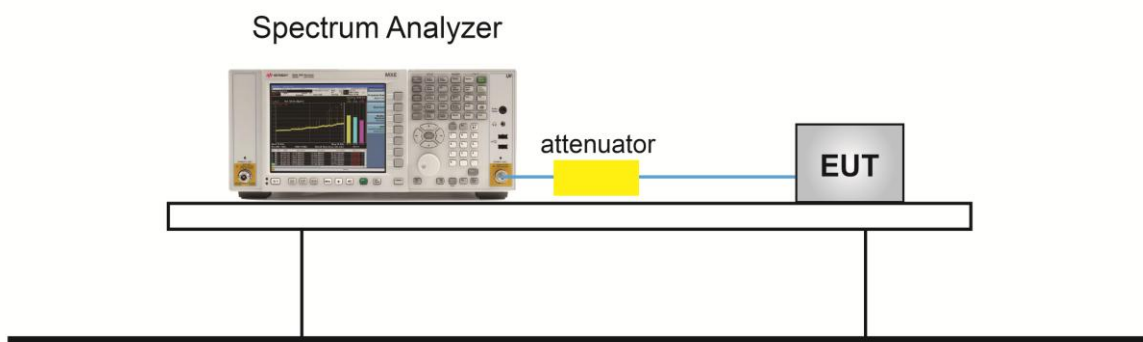

7.5.5. Test Result

Product	Waco RF Module	Temperature	24°C
Test Engineer	Snake Ni	Relative Humidity	59%
Test Site	AC1	Test Date	2019/09/19

Frequency (MHz)	Frequency Range (MHz)	Frequency Range (MHz)	Result
2402	2401.45	--	Pass
2478	--	2478.59	Pass

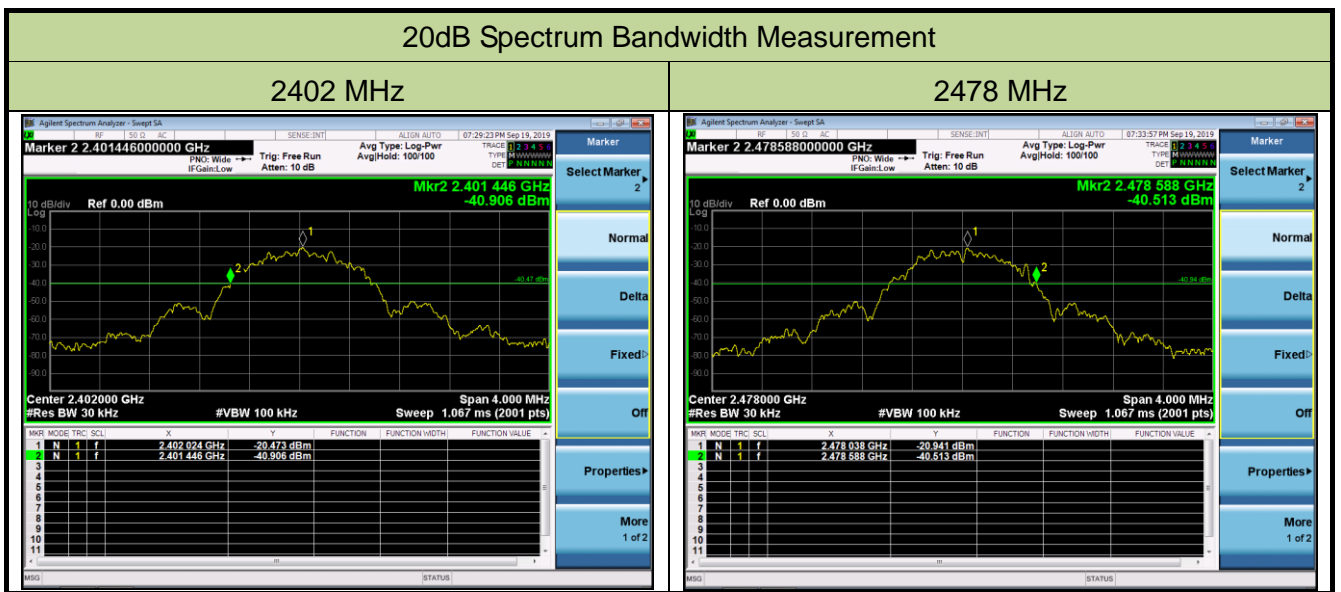

## 7.6. 99% Bandwidth Measurement

### 7.6.1. Test Limit

N/A


### 7.6.2. Test Procedure used

ANSI C63.10 Section 6.9

### 7.6.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 99% bandwidth measurement. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% to 5% of the OBW.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.


### 7.6.4. Test Setup

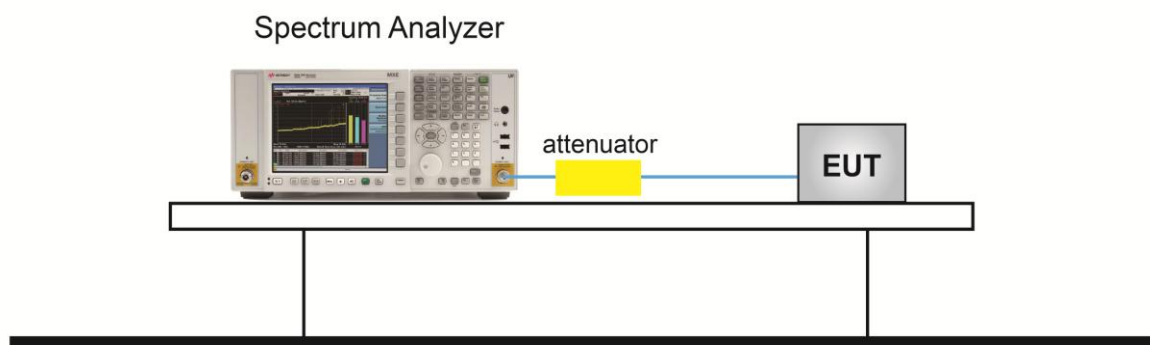

**7.6.5. Test Result**

Product	Waco RF Module	Temperature	24°C
Test Engineer	Snake Ni	Relative Humidity	59%
Test Site	AC1	Test Date	2019/08/22 ~ 2019/09/19

Frequency (MHz)	99% Bandwidth (MHz)
2402	1.06
2440	1.05
2478	1.05

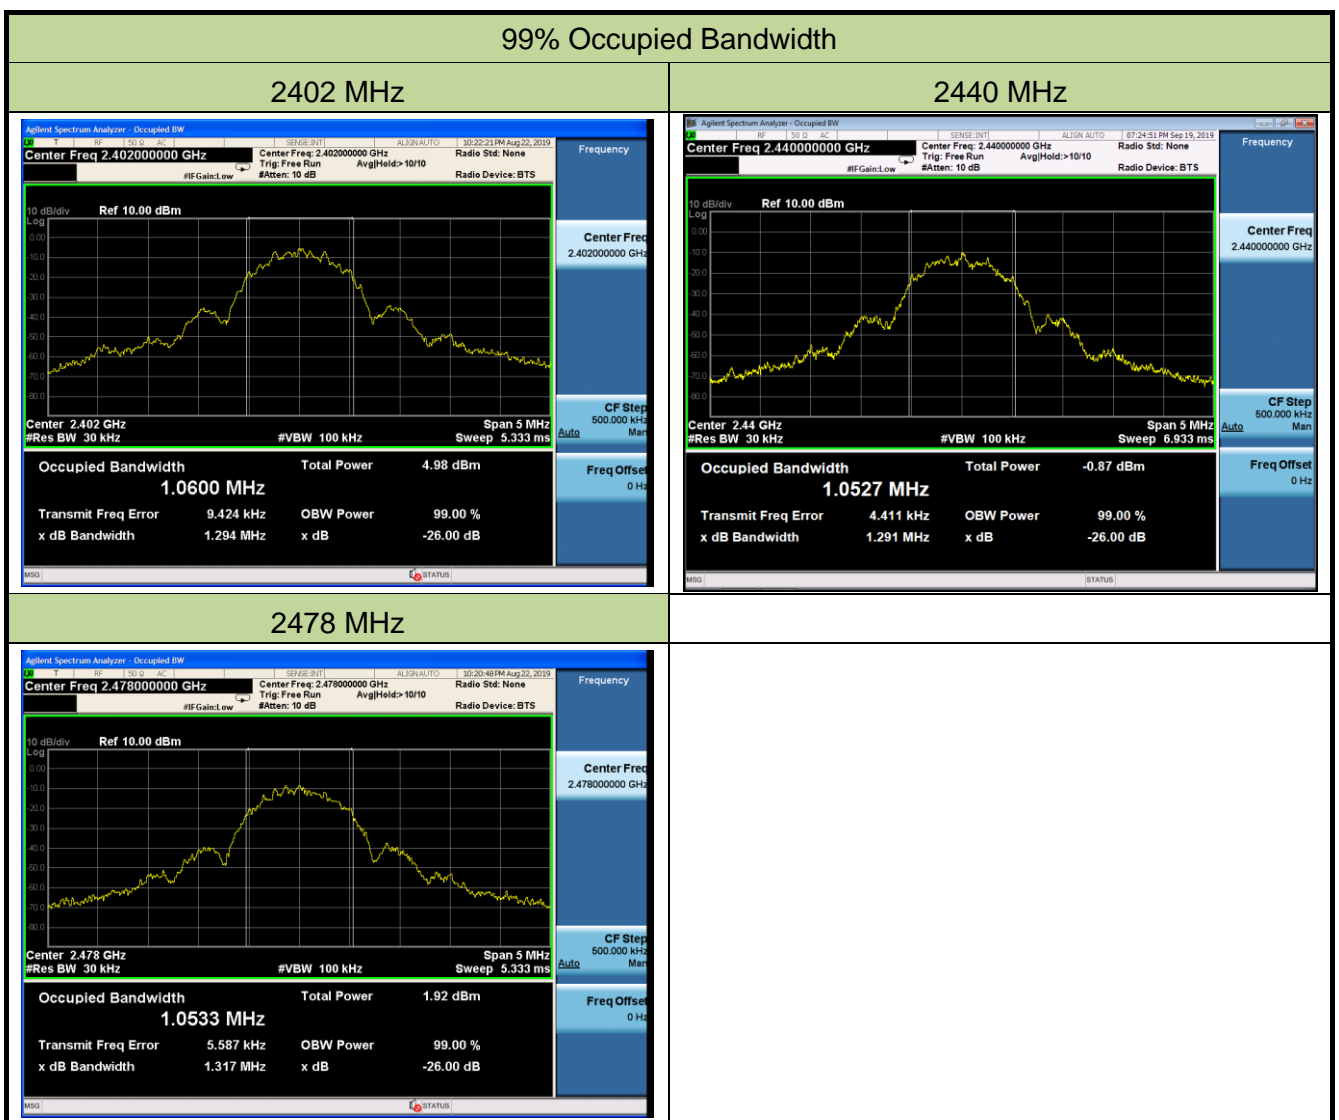



## 8. CONCLUSION

The data collected relate only the item(s) tested and show that unit is in compliance with Part 15C of the FCC Rules and ISED Rules.

---

The End

## Appendix A - Test Setup Photograph

Refer to "1907RSU060-UT" file.

## Appendix B - EUT Photograph

Refer to "1907RSU060-UE" file.