

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 39 von 76
Page 39 of 76

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Tx @ High channel (EDR)
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 001
 Result: Pass ✓
 Comment: Test distance is 3m, Horizontal

Subrange 1
 Frequency Range: 1GHz-18GHz
 Receiver: TUV FSP30
 Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

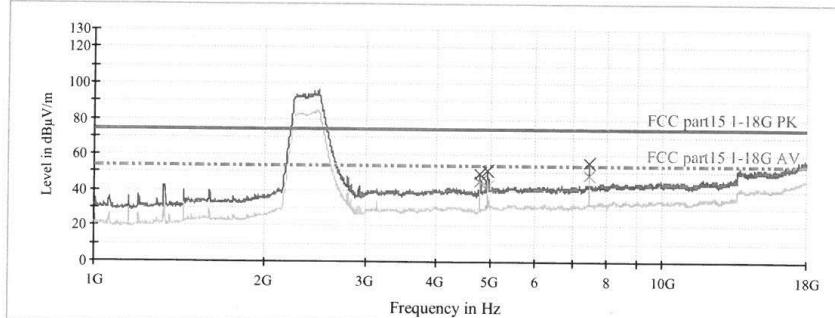

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dBμV/m)
4800.000000	49.7	1000.0	1000.000	H	-3.8	24.3	74.0
4959.000000	51.6	1000.0	1000.000	H	-3.2	22.4	74.0
7441.000000	56.0	1000.0	1000.000	H	0.3	18.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dBμV/m)
4800.000000	45.3	1000.0	1000.000	H	-3.8	8.7	54.0
4959.000000	42.6	1000.0	1000.000	H	-3.2	11.4	54.0
7441.000000	48.4	1000.0	1000.000	H	0.3	5.6	54.0



Date: 8/28/2014 - Time: 1:07:34

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 40 von 76
Page 40 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Tx @ High channel (EDR)
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 001
 Result: Pass 
 Comment: Test distance is 3m, Vertical



Subrange 1
 Frequency Range: 1GHz-18GHz
 Receiver: TUV FSP30
 Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

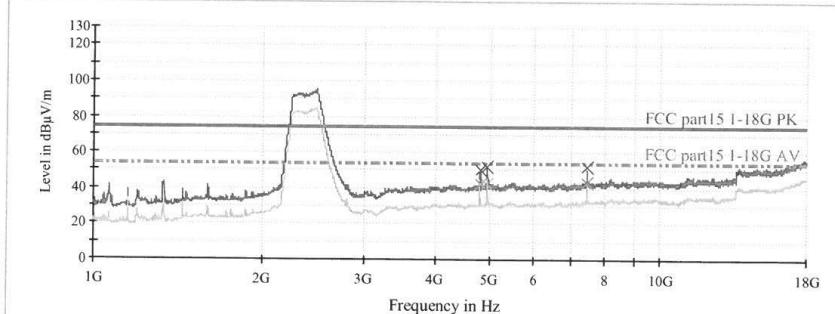

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dBμV/m)
4814.000000	50.8	1000.0	1000.000	V	-3.7	23.2	74.0
4959.000000	52.1	1000.0	1000.000	V	-3.2	21.9	74.0
7441.000000	52.2	1000.0	1000.000	V	0.3	21.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dBμV/m)
4814.000000	42.6	1000.0	1000.000	V	-3.7	11.4	54.0
4959.000000	42.7	1000.0	1000.000	V	-3.2	11.3	54.0
7441.000000	43.5	1000.0	1000.000	V	0.3	10.5	54.0

Sign-off Test Data



Date: 8/28/2014 - Time: 1:15:29

Tested by: _____

Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 41 von 76
Page 41 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Tx @ Mid channel (EDR)
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 001
 Result: Pass ✓
 Comment: Test distance is 3m, Horizontal

Subrange 1
 Frequency Range: 1GHz-18GHz
 Receiver: TUV FSP30
 Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

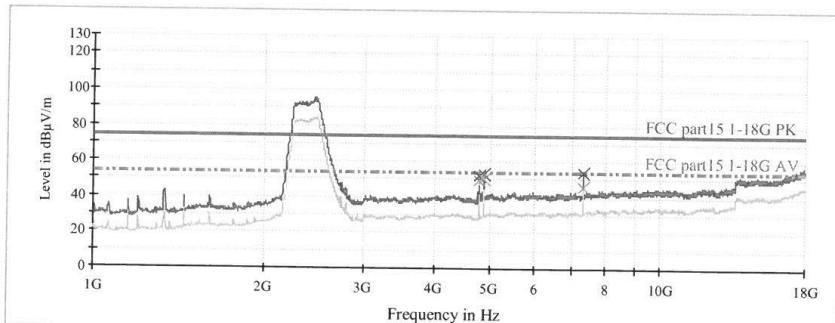

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dBμV/m)
4800.000000	52.2	1000.0	1000.000	H	-3.8	21.8	74.0
4882.000000	52.9	1000.0	1000.000	H	-3.5	21.1	74.0
7324.000000	54.3	1000.0	1000.000	H	-0.4	19.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dBμV/m)
4800.000000	49.7	1000.0	1000.000	H	-3.8	4.3	54.0
4882.000000	50.6	1000.0	1000.000	H	-3.5	3.4	54.0
7324.000000	46.2	1000.0	1000.000	H	-0.4	7.8	54.0



Date: 8/28/2014 - Time: 1:25:31

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 42 von 76
Page 42 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Tx @ Mid channel (EDR)
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 002
 Result: Pass ✓
 Comment: Test distance is 3m, Vertical



Subrange 1
 Frequency Range: 1GHz-18GHz
 Receiver: TUV FSP30
 Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

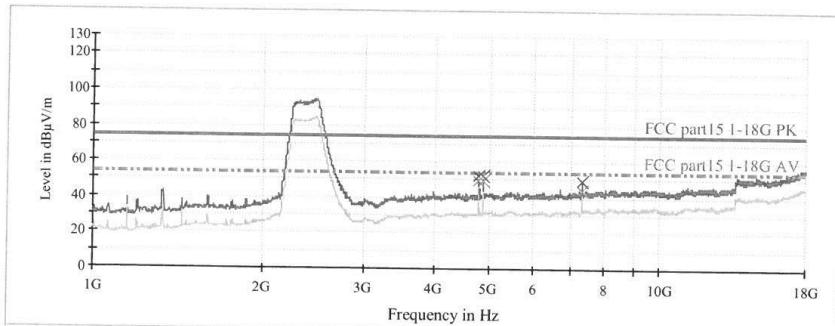

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dBμV/m)
4800.000000	52.4	1000.0	1000.000	V	-3.8	21.6	74.0
4882.000000	52.2	1000.0	1000.000	V	-3.5	21.8	74.0
7322.000000	49.9	1000.0	1000.000	V	-0.4	24.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dBμV/m)
4800.000000	49.9	1000.0	1000.000	V	-3.8	4.1	54.0
4882.000000	49.5	1000.0	1000.000	V	-3.5	4.5	54.0
7322.000000	44.0	1000.0	1000.000	V	-0.4	10.0	54.0



Date: 8/28/2014 - Time: 1:20:46

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 43 von 76
Page 43 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Tx @ Low channel (EDR)
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 002
 Result: Pass
 Comment: Test distance is 3m, Horizontal



Subrange 1
 Frequency Range: 1GHz-18GHz
 Receiver: TUV FSP30
 Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

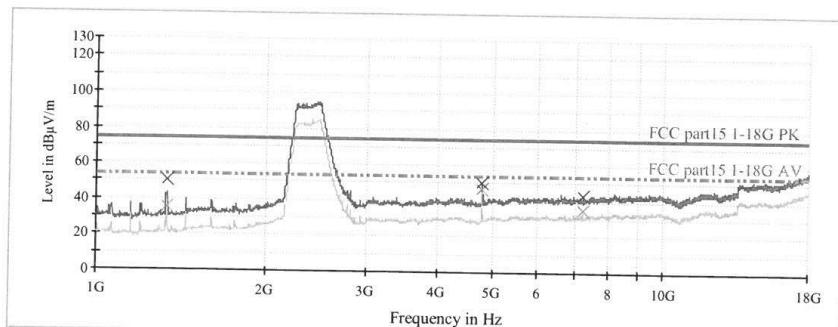

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dB μ V/m)
1332.000000	50.4	1000.0	1000.000	H	-14.0	23.6	74.0
4804.000000	50.1	1000.0	1000.000	H	-3.7	23.9	74.0
7205.000000	43.4	1000.0	1000.000	H	0.1	30.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dB μ V/m)
1332.000000	35.4	1000.0	1000.000	H	-14.0	18.6	54.0
4804.000000	47.2	1000.0	1000.000	H	-3.7	6.8	54.0
7205.000000	35.1	1000.0	1000.000	H	0.1	18.9	54.0

Sign-off Test Data



Date: 8/28/2014 - Time: 1:33:03

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 44 von 76
Page 44 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel (EDR)
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 002
Result: Pass ✓
Comment: Test distance is 3m, Vertical



Subrange 1
Frequency Range: 1GHz-18GHz
Receiver: TUV FSP30
Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

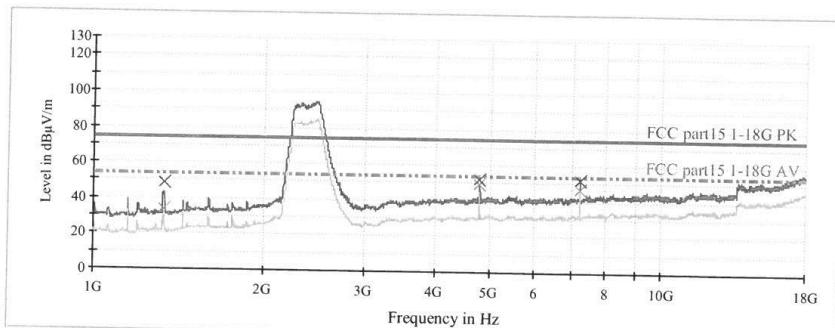

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dBμV/m)
1332.000000	48.9	1000.0	1000.000	V	-14.0	25.1	74.0
4804.000000	52.1	1000.0	1000.000	V	-3.7	21.9	74.0
7205.000000	52.2	1000.0	1000.000	V	0.1	21.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dBμV/m)
1332.000000	33.9	1000.0	1000.000	V	-14.0	20.1	54.0
4804.000000	49.1	1000.0	1000.000	V	-3.7	4.9	54.0
7205.000000	46.9	1000.0	1000.000	V	0.1	7.1	54.0



Date: 8/28/2014 - Time: 1:39:18

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 45 von 76
Page 45 of 76

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Play music with Bluetooth
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

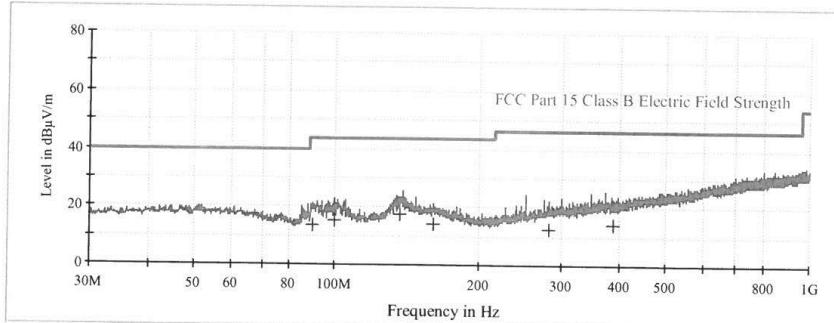

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
89.400000	13.7	1000.0	120.000	H	10.7	29.8	43.5
99.700000	15.4	1000.0	120.000	H	11.1	28.1	43.5
136.600000	17.6	1000.0	120.000	H	14.5	25.9	43.5
160.000000	14.1	1000.0	120.000	H	15.6	29.4	43.5
281.950000	12.6	1000.0	120.000	H	15.5	33.4	46.0
387.800000	14.4	1000.0	120.000	H	18.3	31.6	46.0

Sign-off Test Data

YJX
2014-09-11
CL

HCH
2014-09-12
Checked

Date: 9/10/2014 - Time: 6:38:16

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 46 von 76
Page 46 of 76

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Play music with Bluetooth
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

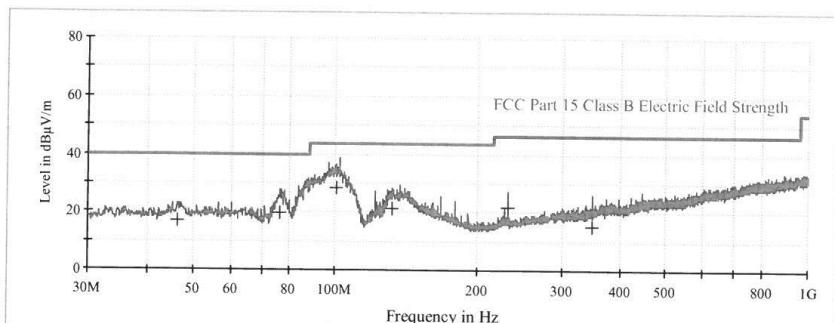

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
46.250000	16.9	1000.0	120.000	V	14.9	23.1	40.0
76.200000	19.5	1000.0	120.000	V	12.0	20.5	40.0
100.200000	28.2	1000.0	120.000	V	11.1	15.3	43.5
132.450000	21.3	1000.0	120.000	V	14.1	22.2	43.5
231.300000	21.9	1000.0	120.000	V	13.2	24.1	46.0
347.900000	15.2	1000.0	120.000	V	17.3	30.8	46.0



Date: 9/10/2014 - Time: 6:34:26

Tested by checked Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 47 von 76
Page 47 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Rx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 002
Result: Pass
Comment: Test distance is 3m, Horizontal

YJX
2014-09-01
Checked

Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

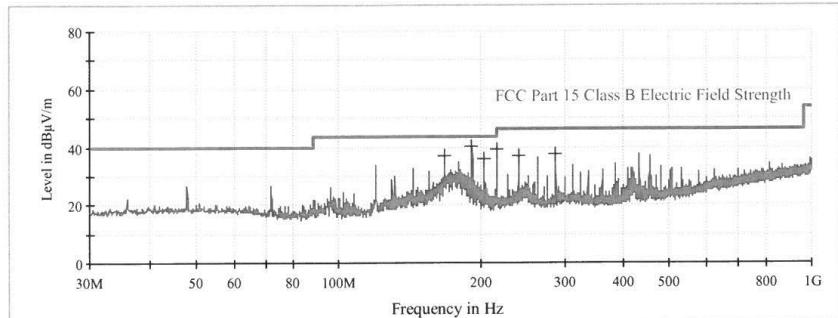

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
168.000000	36.9	1000.0	120.000	H	15.2	6.6	43.5
192.000000	40.3	1000.0	120.000	H	13.0	3.2	43.5
204.000000	36.0	1000.0	120.000	H	12.5	7.5	43.5
216.000000	39.0	1000.0	120.000	H	12.6	4.5	43.5
240.000000	37.2	1000.0	120.000	H	13.7	8.8	46.0
288.000000	37.3	1000.0	120.000	H	15.7	8.7	46.0

Sign-off Test Data
YJX
2014-09-01
Checked
HCH
2014-09-02
Checked

Date: 8/28/2014 - Time: 5:43:24

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 48 von 76
Page 48 of 76

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Rx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 001
Result: Pass 001
Comment: Test distance is 3m, Vertical

Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

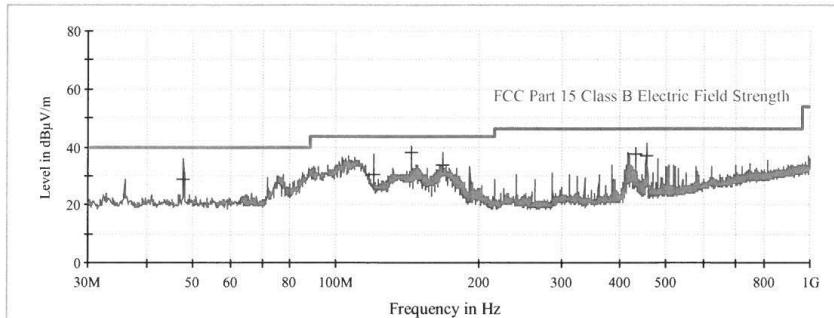

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
47.950000	28.8	1000.0	120.000	V	14.9	11.2	40.0
119.950000	30.6	1000.0	120.000	V	13.1	12.9	43.5
144.000000	38.2	1000.0	120.000	V	15.3	5.3	43.5
168.000000	33.5	1000.0	120.000	V	15.2	10.0	43.5
432.050000	37.3	1000.0	120.000	V	19.6	8.7	46.0
453.050000	36.9	1000.0	120.000	V	20.1	9.1	46.0

Sign-off Test Data



Date: 8/28/2014 - Time: 5:39:03

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 49 von 76
Page 49 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Rx @ Mid channel
Climate Condition: 23 °C; 50 %RH;
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 002
Result: Pass
Comment: Test distance is 3m, Horizontal



Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

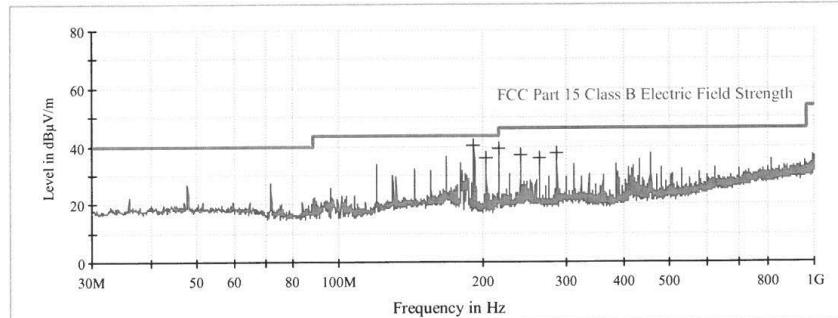

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
192.000000	40.2	1000.0	120.000	H	13.0	3.3	43.5
204.000000	36.0	1000.0	120.000	H	12.5	7.5	43.5
216.000000	39.0	1000.0	120.000	H	12.6	4.5	43.5
240.000000	37.0	1000.0	120.000	H	13.7	9.0	46.0
264.000000	35.7	1000.0	120.000	H	14.7	10.3	46.0
288.000000	37.3	1000.0	120.000	H	15.7	8.7	46.0

Sign-off Test Data



Date: 8/28/2014 - Time: 5:33:11

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 50 von 76
Page 50 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
Test Item: Tower Stereo System
Identification: ITSB-300W
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Rx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174024892
Report No: 16059704 002
Result: Pass ✓
Comment: Test distance is 3m, Vertical

YJX
2014-09-01
Checked

Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

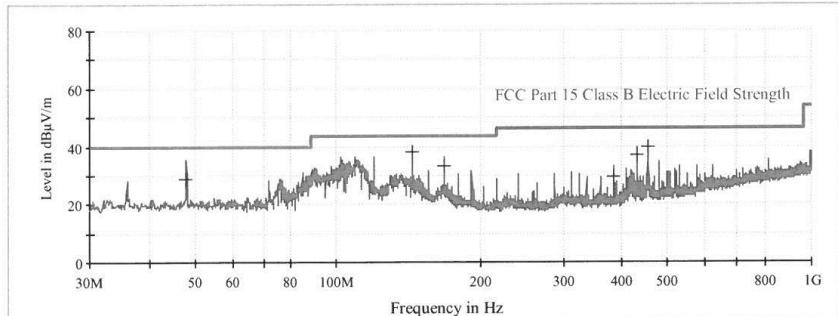

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
47.950000	28.8	1000.0	120.000	V	14.9	11.2	40.0
144.000000	38.2	1000.0	120.000	V	15.3	5.3	43.5
168.000000	33.2	1000.0	120.000	V	15.2	10.3	43.5
384.050000	29.4	1000.0	120.000	V	18.3	16.6	46.0
432.050000	37.2	1000.0	120.000	V	19.6	8.8	46.0
454.750000	39.8	1000.0	120.000	V	20.1	6.2	46.0

Sign-off Test Data

YJX
2014-09-01
Checked

HCH
2014-09-02
Checked

Date: 8/28/2014 - Time: 5:35:58

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 51 von 76
Page 51 of 76

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Rx @ Low channel
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 001
 Result: Pass 002
 Comment: Test distance is 3m, Horizontal

Subrange 1
 Frequency Range: 30M-1GHz
 Receiver: TUV ESCI
 Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

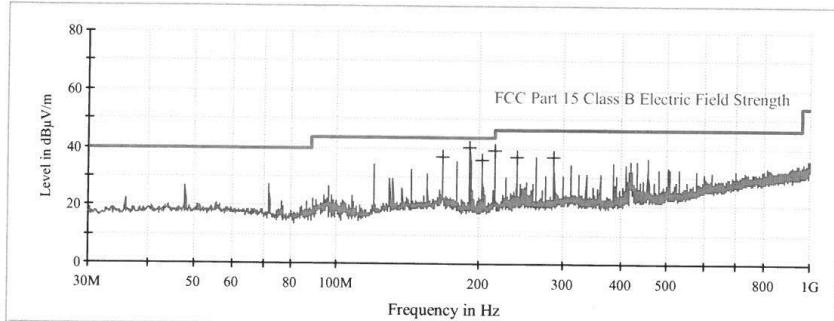

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
168.000000	36.8	1000.0	120.000	H	15.2	6.7	43.5
192.000000	40.3	1000.0	120.000	H	13.0	3.2	43.5
204.000000	36.0	1000.0	120.000	H	12.5	7.5	43.5
216.000000	39.0	1000.0	120.000	H	12.6	4.5	43.5
240.000000	37.1	1000.0	120.000	H	13.7	8.9	46.0
288.000000	37.3	1000.0	120.000	H	15.7	8.7	46.0



Date: 8/28/2014 - Time: 5:29:30

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 52 von 76
Page 52 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Rx @ Low channel
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 001
 Result: Pass
 Comment: Test distance is 3m, Vertical




Subrange 1
 Frequency Range: 30M-1GHz
 Receiver: TUV ESCI
 Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

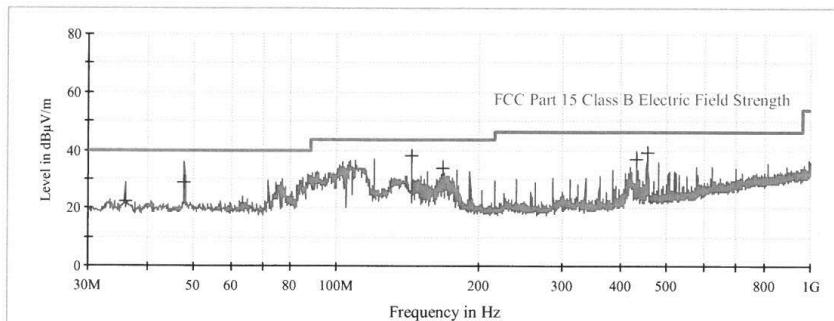

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
35.950000	22.3	1000.0	120.000	V	14.3	17.7	40.0
47.950000	28.8	1000.0	120.000	V	14.9	11.2	40.0
144.000000	38.2	1000.0	120.000	V	15.3	5.3	43.5
168.000000	33.6	1000.0	120.000	V	15.2	9.9	43.5
432.050000	37.3	1000.0	120.000	V	19.6	8.7	46.0
454.750000	39.1	1000.0	120.000	V	20.1	6.9	46.0

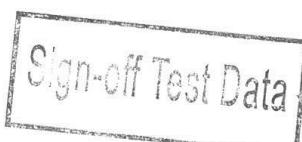

Date: 8/28/2014 - Time: 5:26:04

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:
16059704 002
Test Report No.

Seite 53 von 76
Page 53 of 76

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Allike
 Test Item: Tower Stereo System
 Identification: ITSB-300W
 Test Standard: FCC Part 15.209
 Test Detail: RE
 Operation Mode: Rx @ High channel
 Climate Condition: 23 °C; 50 %RH; 101 kPa.
 Test Voltage/ Freq: AC 120 V/ 60 Hz
 Receipt No: 174024892
 Report No: 16059704 002
 Result: Pass
 Comment: Test distance is 3m, Horizontal



Subrange 1
 Frequency Range: 1GHz-18GHz
 Receiver: TUV FSP30
 Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

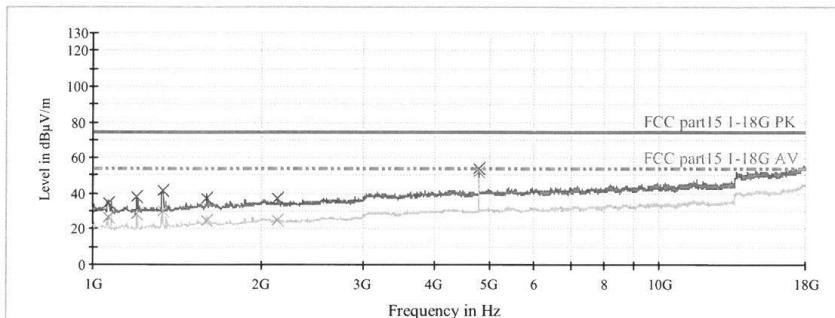


Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit (dBμV/m)
1066.000000	34.9	1000.0	1000.000	H	-15.3	39.1	74.0
1198.000000	38.4	1000.0	1000.000	H	-15.4	35.6	74.0
1332.000000	41.6	1000.0	1000.000	H	-14.6	32.4	74.0
1597.000000	37.2	1000.0	1000.000	H	-12.4	36.8	74.0
2131.000000	36.9	1000.0	1000.000	H	-10.8	37.1	74.0
4800.000000	54.0	1000.0	1000.000	H	-4.1	20.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit (dBμV/m)
1066.000000	26.5	1000.0	1000.000	H	-15.3	27.5	54.0
1198.000000	28.1	1000.0	1000.000	H	-15.4	25.9	54.0
1332.000000	30.4	1000.0	1000.000	H	-14.6	23.6	54.0
1597.000000	24.7	1000.0	1000.000	H	-12.4	29.3	54.0
2131.000000	24.9	1000.0	1000.000	H	-10.8	29.1	54.0
4800.000000	51.0	1000.0	1000.000	H	-4.1	3.0	54.0

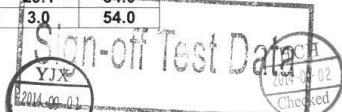

Date: 8/28/2014 - Time: 2:32:10

Tested by: _____ Reviewed by: _____