

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM120400214401

Email: ee.shenzhen@sgs.com Page: 1 of 74

# **FCC REPORT**

Application No: SZEM1204002144RF

**Applicant:** D&M Holdings Inc.

Factory: Dongguan Tai Sing Audio Technology Limited

**Product Name:** Bluetooth Headset

Model No.(EUT): AH-W200 Adding model No.: AH-W150

FCC ID: BV2-AH-W200

**Standards:** FCC CFR Title 47 Part 15 (2011)

**Date of Receipt:** 2012-05-09

**Date of Test:** 2012-05-10 to 2012-05-30

**Date of Issue:** 2012-06-20

Test Result: PASS \*

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

<sup>. \*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM120400214401

Page: 2 of 74

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	FCC CFR Title 47 Part 15C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	FCC CFR Title 47 Part 15C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	FCC CFR Title 47 Part 15C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	FCC CFR Title 47 Part 15C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	FCC CFR Title 47 Part 15C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	FCC CFR Title 47 Part 15C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	FCC CFR Title 47 Part 15C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	FCC CFR Title 47 Part 15C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	FCC CFR Title 47 Part 15C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	FCC CFR Title 47 Part 15C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	FCC CFR Title 47 Part 15C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Remark:

Model No.: AH-W200, AH-W150

Only the model AH-W200 was tested, their RF parts are identical which including electrical circuit design, layout, components used and internal wiring, the differences of the two headset is AH-W200 have 3.5mm aux in, AAC and APT-X additional function. Also their cosmetic is different.



Report No.: SZEM120400214401

Page: 3 of 74

# 3 Contents

			Page
1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3	CC	ONTENTS	3
4		COVER PAGE	
	4.1 4.2 4.3 4.4 4.5 4.6 4.7	GENERAL DESCRIPTION OF EUT TEST ENVIRONMENT AND MODE DESCRIPTION OF SUPPORT UNITS TEST LOCATION TEST FACILITY	
_	4.8 4.9 4.10	ABNORMALITIES FROM STANDARD CONDITIONS  OTHER INFORMATION REQUESTED BY THE CUSTOMER  TEST INSTRUMENTS LIST	
5			
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8	CONDUCTED EMISSIONS  CONDUCTED PEAK OUTPUT POWER  20DB OCCUPY BANDWIDTH  CARRIER FREQUENCIES SEPARATION  HOPPING CHANNEL NUMBER  DWELL TIME	
	5.9		
	5.	RADIATED SPURIOUS EMISSION	
	5.12	BAND EDGE (KADIATED EMISSION)	65-74



Report No.: SZEM120400214401

Page: 4 of 74

# 4 General Information

# 4.1 Client Information

Applicant:	D&M Holdings Inc.
Address of Applicant:	2-1 Nisshin-cho, Kawasaki-ku Kawasaki, 210-8569 Japan
Factory:	Dongguan Tai Sing Audio Technology Limited
Address of Factory:	Park Chau Bin, Eastern Town Dongguan, Guangdong Province, P.R.C. (China)

# 4.2 General Description of EUT

Name:	Bluetooth Headset
Model No.:	AH-W200, AH-W150
Trade Mark:	DENON
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Sample Type:	Portable production
Test Software of EUT:	CSR blue suite (manufacturer declare )
Antenna Type and Gain:	Type: Integral Gain: 4.1dBi
Power Supply:	Rechargeable battery Output DC 3.7V 175mAh Input DC 5V from mini USB
Test Voltage:	DC 5V



Report No.: SZEM120400214401

Page: 5 of 74

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### Note

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEM120400214401

Page: 6 of 74

# 4.3 Test Environment and Mode

Operating Environment:				
Temperature:	22.0 °C			
Humidity:	54 % RH			
Atmospheric Pressure:	1006 mbar			

# 4.4 Description of Support Units

The EUT has been tested with associated equipment below

Description	Manufacturer	Model No.
Adapter	N/A	N/A

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.





Report No.: SZEM120400214401

Page: 7 of 74

# 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### • Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

### 4.7 Deviation from Standards

None.

# 4.8 Abnormalities from Standard Conditions

None

# 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM120400214401

Page: 8 of 74

# 4.10 Test Instruments List

RE i	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	Coaxial cable	SGS	N/A	SEL0028	2013-05-29		
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29		
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29		
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29		
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17		
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26		
11	Band filter	Amindeon	82346	SEL0094	2013-05-17		

Con	Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10			
2	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2013-05-17			
3	LISN	Rohde & Schwarz	ENV216	SEL0152	2012-10-23			
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-05-17			
5	Coaxial Cable	SGS	N/A	SEL0024	2013-05-29			



Report No.: SZEM120400214401

Page: 9 of 74

RF conducted							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23		
2	Coaxial cable	SGS	N/A	SEL0028	2013-05-29		

	General used equipment							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27			
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27			
3	Barometer	ChangChun	DYM3	SEL0088	2013-05-17			



Report No.: SZEM120400214401

Page: 10 of 74

# 5 Test results and Measurement Data

# 5.1 Antenna Requirement

**Standard requirement:** FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.1dBi.

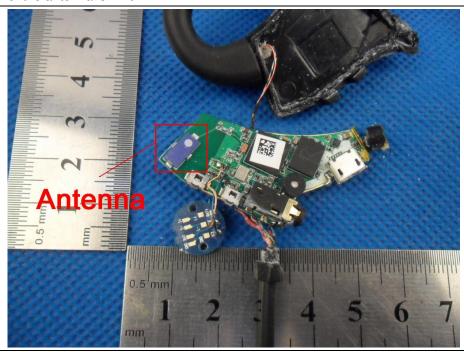



Report No.: SZEM120400214401

Page: 11 of 74


# 5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207	,			
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Fueron and the (NALL)	Limit (d	BuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm				
Test Procedure:	<ol> <li>The mains terminal disturble room.</li> <li>The EUT was connected to the room.</li> </ol>	o AC power source thro	ough a LISN 1 (Line		
	Impedance Stabilization N		•		
	impedance. The power cal				
	connected to a second LISN 2, which was bonded to the ground				
	reference plane in the same way as the LISN 1 for the unit being				
	measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.  3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.				
	placed on the horizontal ground reference plane,  1) The test was performed with a vertical ground reference plane. The rear				
	4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The				
		~	•		
	vertical ground reference p		•		
	reference plane. The LISN	•	•		
	unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.  5) In order to find the maximum emission, the relative positions of				
			•		
	equipment and all of the interface cables must be changed according to				
	ANSI C63.10: 2009 on cor	nducted measurement.			



Report No.: SZEM120400214401

Page: 12 of 74

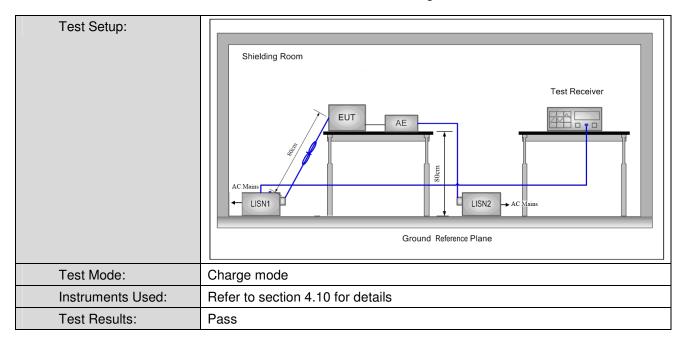

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM120400214401

Page: 13 of 74

#### Live line:

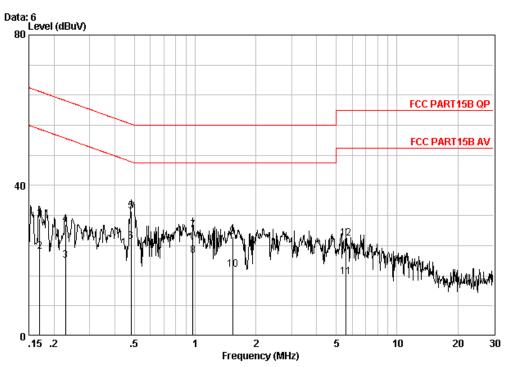

Site : Shielding Room

Condition : FCC PART15B QP CE-20101216 LINE

Job No.

Mode : Charge

******									
			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	-	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.16944	0.04	9.60	21.60	31.24	64.99	-33.75	QP
2		0.16944	0.04	9.60	12.81	22.45	54.99	-32.54	Average
3		0.22797	0.04	9.60	10.52	20.16	52.52	-32.36	Average
4		0.22797	0.04	9.60	19.90	29.54	62.52	-32.98	QP
5 @		0.48119	0.06	9.60	23.40	33.06	56.32	-23.26	QP
6 0		0.48119	0.06	9.60	15.43	25.09	46.32	-21.23	Average
7		0.97354	0.08	9.70	18.30	28.08	56.00	-27.92	QP
8 0		0.97354	0.08	9.70	11.55	21.32	46.00	-24.68	Average
9		1.535	0.10	9.70	16.50	26.30	56.00	-29.70	QP
10		1.535	0.10	9.70	7.83	17.64	46.00	-28.36	Average
11		5.564	0.18	9.83	5.66	15.66	50.00	-34.34	Average
12		5.564	0.18	9.83	15.90	25.91	60.00	-34.09	OP


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120400214401

Page: 14 of 74

#### Neutral line:

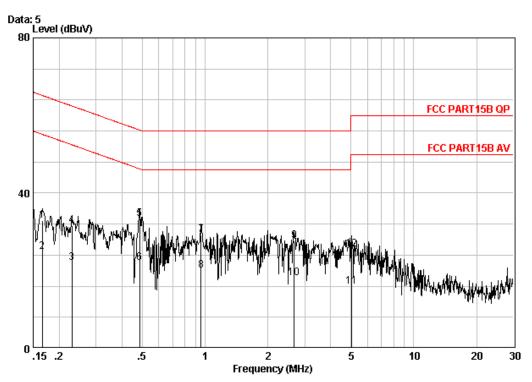

Site : Shielding Room

Condition : FCC PART15B QP CE-20101216 NEUTRAL

Job No.

Mode : Charge

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16589	0.04	9.60	23.30	32.94	65.16	-32.22	QP
2	0.16589	0.04	9.60	15.26	24.90	55.16	-30.27	Average
3	0.23040	0.04	9.60	12.42	22.07	52.44	-30.37	Average
4	0.23040	0.04	9.60	21.90	31.54	62.44	-30.89	QP
5 0	0.48632	0.06	9.60	23.70	33.36	56.23	-22.87	QP
6 0	0.48632	0.06	9.60	12.33	21.99	46.23	-24.24	Average
7	0.95819	0.08	9.70	19.40	29.18	56.00	-26.82	QP
8	0.95819	0.08	9.70	10.20	19.98	46.00	-26.02	Average
9	2.678	0.13	9.73	17.90	27.77	56.00	-28.23	QP
10	2.678	0.13	9.73	8.12	17.99	46.00	-28.01	Average
11	5.058	0.17	9.80	5.93	15.90	50.00	-34.10	Average
12	5.058	0.17	9.80	15.50	25.47	60.00	-34.53	QP

#### Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM120400214401

Page: 15 of 74

# 5.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:		
Limit:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
	20dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4$ DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		



Report No.: SZEM120400214401

Page: 16 of 74

#### **Measurement Data**

Measurement Data					
	GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.69	20.00	Pass		
Middle	3.32	20.00	Pass		
Highest	2.77	20.00	Pass		
	π/4DQPSK m	node			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.23	20.00	Pass		
Middle	2.82	20.00	Pass		
Highest	2.12	20.00	Pass		
	8DPSK mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.34	20.00	Pass		
Middle	2.99	20.00	Pass		
Highest	2.35	20.00	Pass		






Report No.: SZEM120400214401


Page: 17 of 74

### Test plot as follows:

Test mode: GFSK Test channel: Lowest

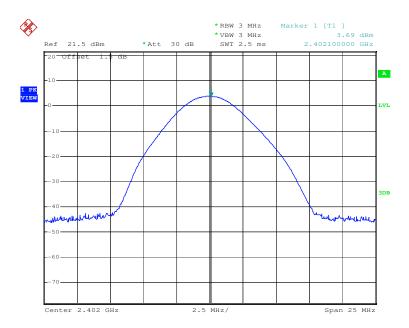

Test mode: GFSK Test channel: Middle

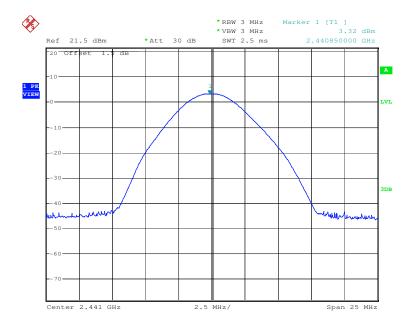





Report No.: SZEM120400214401

Page: 18 of 74

Test mode: GFSK Test channel: Highest

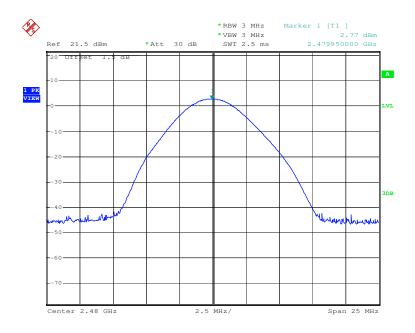

Test mode: π/4DQPSK Test channel: Lowest

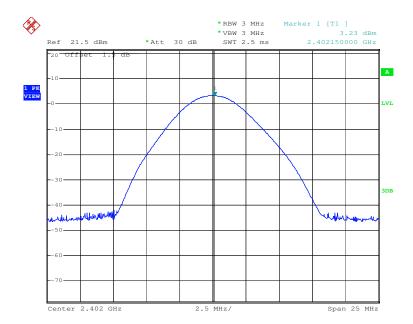





Report No.: SZEM120400214401

Page: 19 of 74

Test mode: π/4DQPSK Test channel: Middle

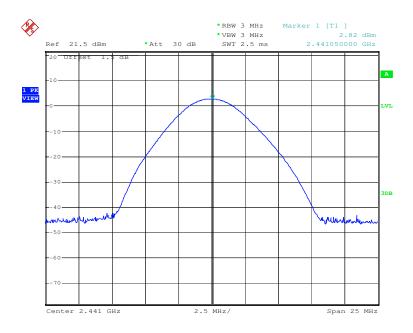



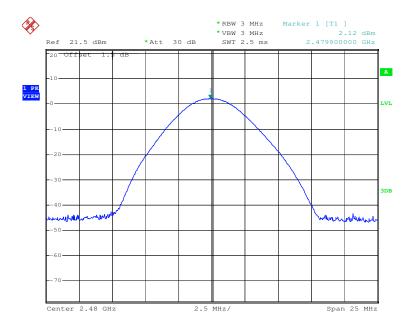





Report No.: SZEM120400214401

Page: 20 of 74

Test mode: 8DPSK Test channel: Lowest

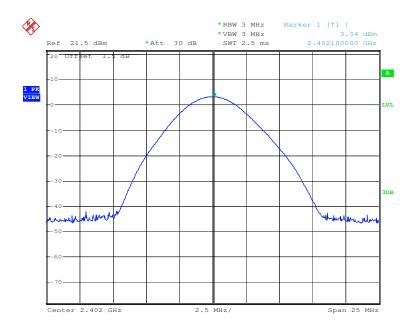

Test mode: 8DPSK Test channel: Middle

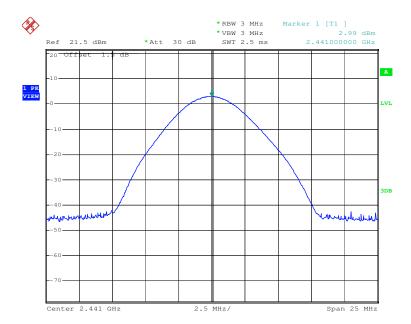




Report No.: SZEM120400214401

Page: 21 of 74

Test mode: 8DPSK Test channel: Highest

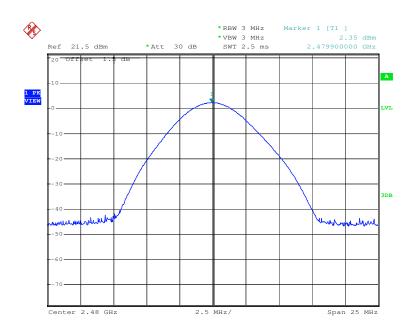




Report No.: SZEM120400214401

Page: 22 of 74

# 5.4 20dB Occupy Bandwidth

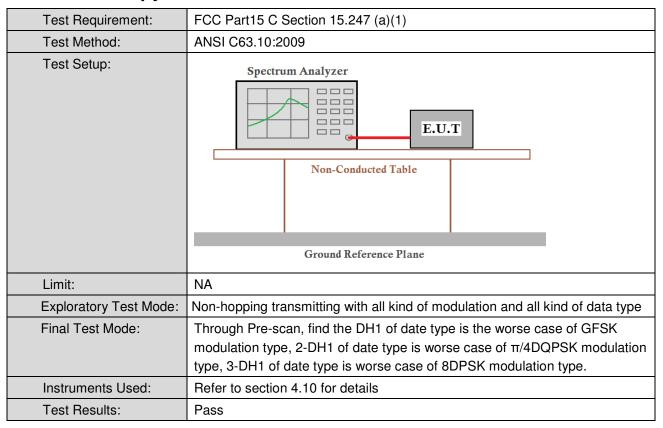

#### **Measurement Data**

Test channel	20dB Occupy Bandwidth (kHz)			
rest channel	GFSK	π/4DQPSK	8DPSK	
Lowest	804	1200	1206	
Middle	798	1212	1212	
Highest	810	1224	1212	




Report No.: SZEM120400214401


Page: 23 of 74

# Test plot as follows:

Test mode: GFSK Test channel: Lowest

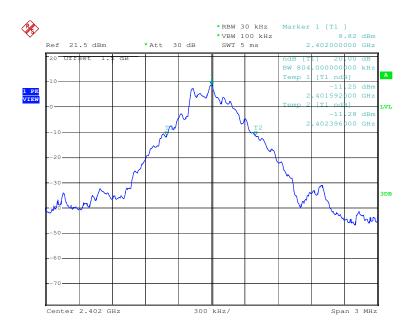



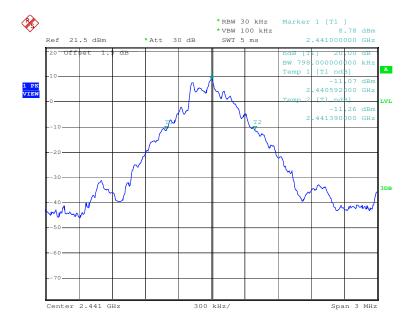






Report No.: SZEM120400214401

Page: 24 of 74

Test mode: GFSK Test channel: Highest

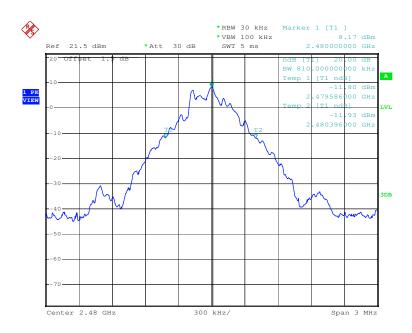



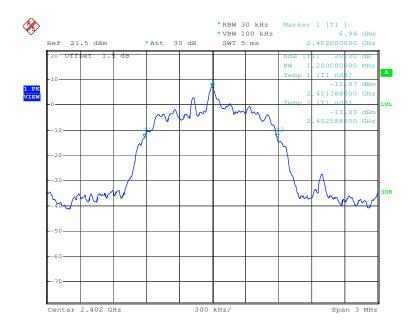





Report No.: SZEM120400214401

Page: 25 of 74

Test mode: π/4DQPSK Test channel: Middle

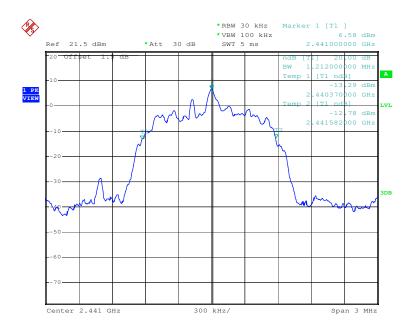



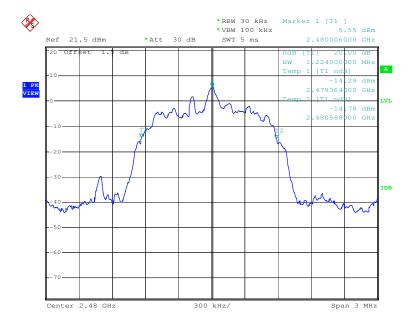





Report No.: SZEM120400214401

Page: 26 of 74

Test mode: 8DPSK Test channel: Lowest

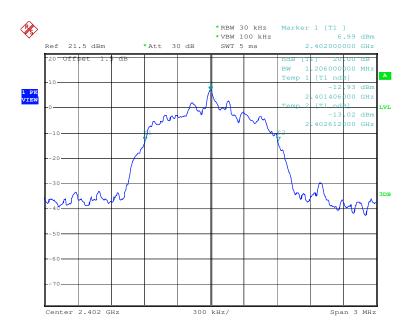

Test mode: 8DPSK Test channel: Middle

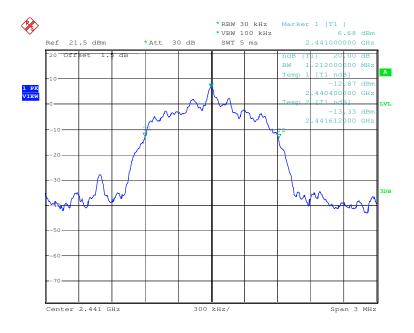






Report No.: SZEM120400214401

Page: 27 of 74

Test mode: 8DPSK Test channel: Highest

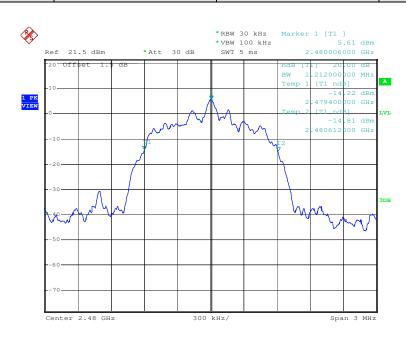



Report No.: SZEM120400214401

Page: 28 of 74

# 5.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.		
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		



Report No.: SZEM120400214401

Page: 29 of 74

#### **Measurement Data**

Measurement Data					
	GFSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1005	≥816	Pass		
Middle	1000	≥816	Pass		
Highest	1000	≥816	Pass		
	π/4DQPSK m	node			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1000	≥816	Pass		
Middle	1000	≥816	Pass		
Highest	1000	≥816	Pass		
	8DPSK mo	de			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1000	≥816	Pass		
Middle	1000	≥816	Pass		
Highest	1000	≥816	Pass		

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	810	540
π/4DQPSK	1224	816
8DPSK	1212	808




Report No.: SZEM120400214401


Page: 30 of 74

#### Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
1 CSt III CGC.	l ai oik	1 Cot oriarinor.	LOWCSI

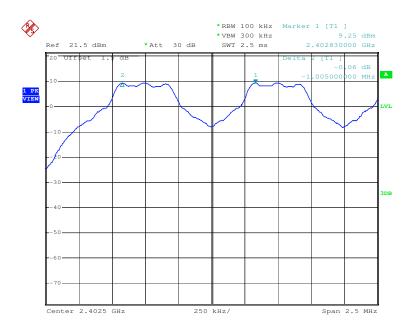



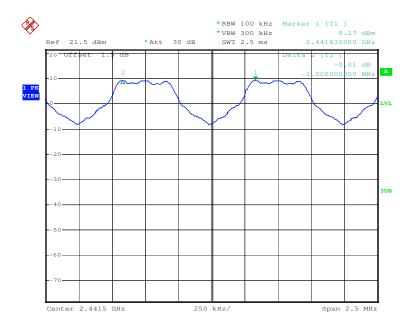





Report No.: SZEM120400214401

Page: 31 of 74

Test mode: GFSK Test channel: Highest

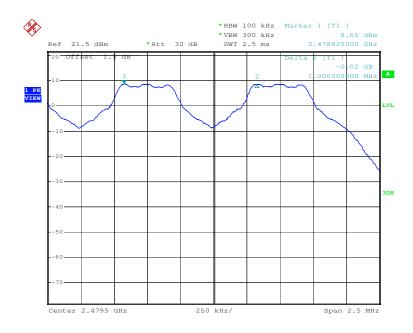



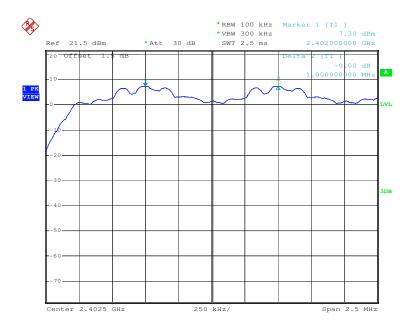






Report No.: SZEM120400214401

Page: 32 of 74

Test mode: π/4DQPSK Test channel: Middle

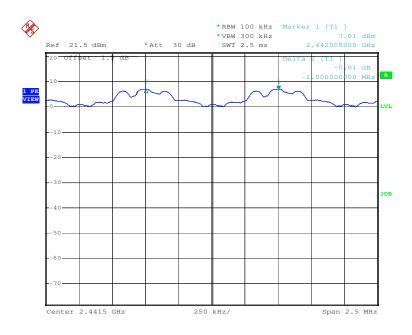



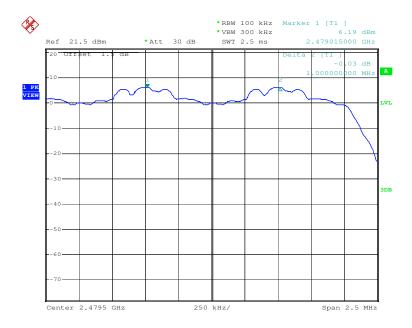





Report No.: SZEM120400214401

Page: 33 of 74

Test mode: 8DPSK Test channel: Lowest

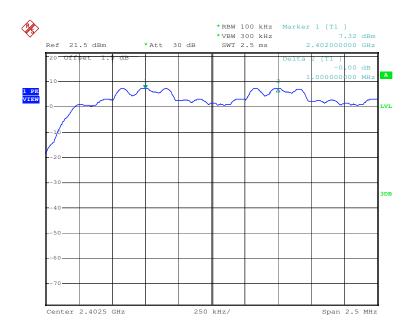



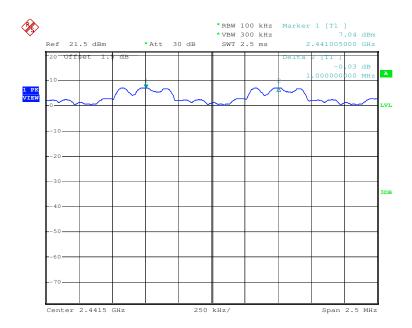




Report No.: SZEM120400214401

Page: 34 of 74

Test mode: 8DPSK Test channel: Highest

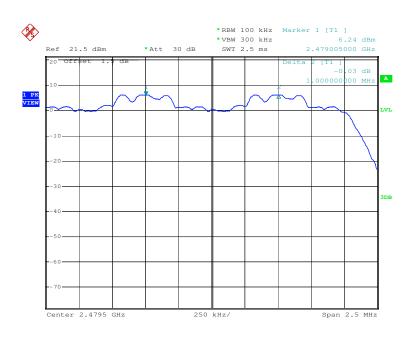




Report No.: SZEM120400214401

Page: 35 of 74

# 5.6 Hopping Channel Number

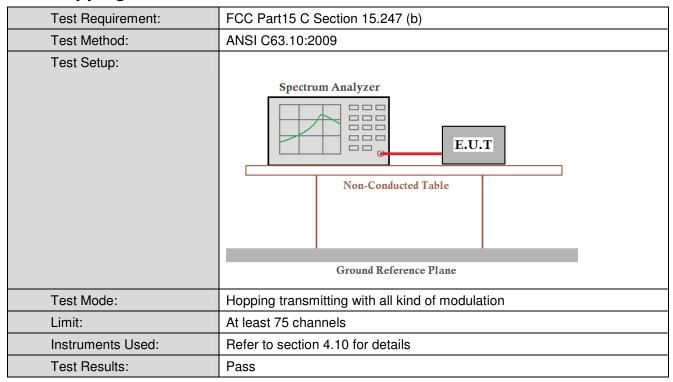

#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥75
π/4DQPSK	79	≥75
8DPSK	79	≥75




Report No.: SZEM120400214401


Page: 36 of 74

### Test plot as follows

Test mode: GFSK

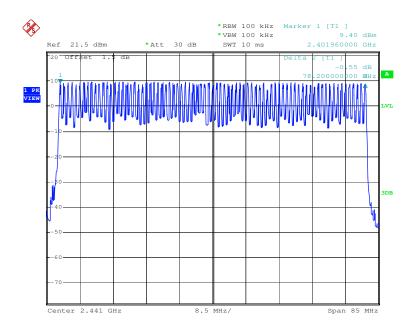

Test mode: π/4DQPSK

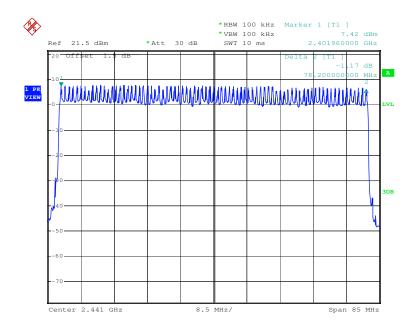






Report No.: SZEM120400214401

Page: 37 of 74

Test mode: 8DPSK

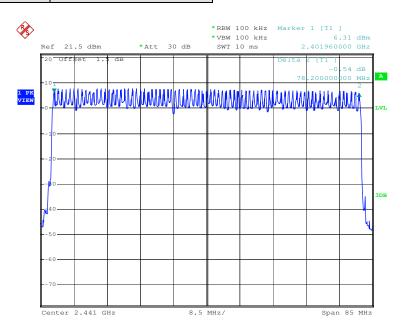




Report No.: SZEM120400214401

Page: 38 of 74

#### 5.7 Dwell Time

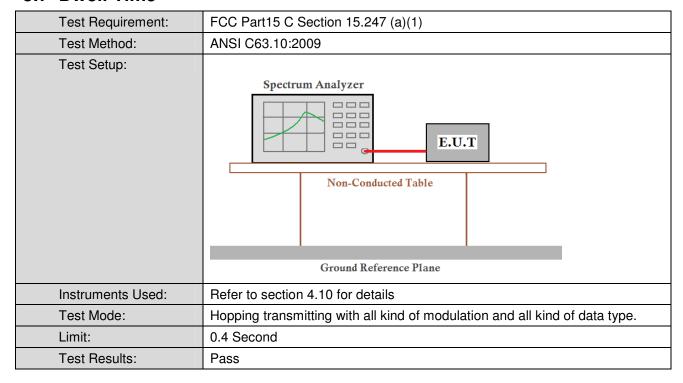

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1664	0.4
GFSK	DH3	0.2848	0.4
	DH5	0.3227	0.4
	2-DH1	0.1712	0.4
π/4DQPSK	2-DH3	0.2856	0.4
	2-DH5	0.1957	0.4
	3-DH1	0.1696	0.4
8DPSK	3-DH3	0.2848	0.4
	3-DH5	0.3259	0.4

#### Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)\*total number=dwell time (ms)

The lowest channel (2402MHz), as below:

DH1 time slot=0.520 (ms)\*total number=166.4 (ms)
DH3 time slot=1.780 (ms)\* total number = 284.8 (ms)

DH5 time slot=3.025(ms)\* total number = 322.7 (ms)




Report No.: SZEM120400214401


Page: 39 of 74

#### Test plot as follows

Test Packet: DH1

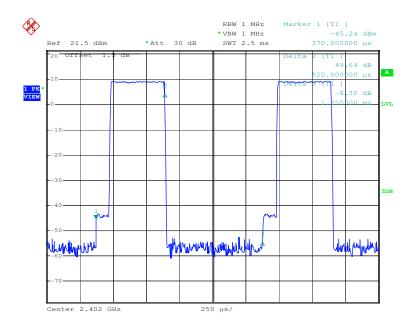

Test Packet: DH3

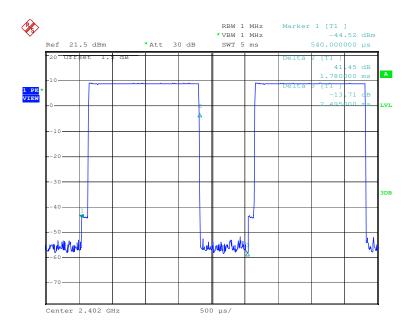





Report No.: SZEM120400214401

Page: 40 of 74

Test Packet: DH5

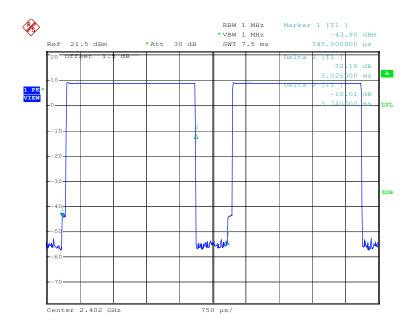

Test Packet: 2-DH1

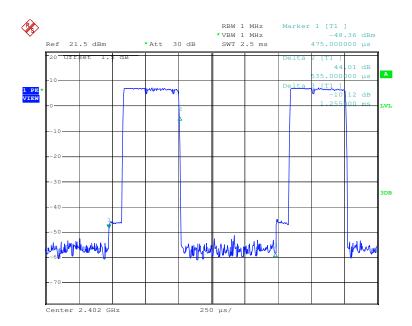





Report No.: SZEM120400214401

Page: 41 of 74

Test Packet: 2-DH3

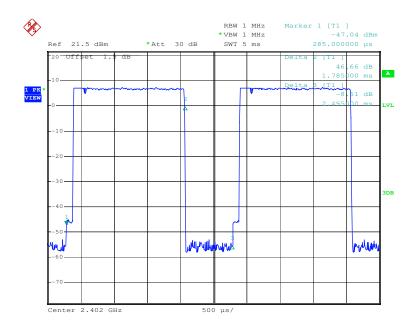

Test Packet: 2-DH5

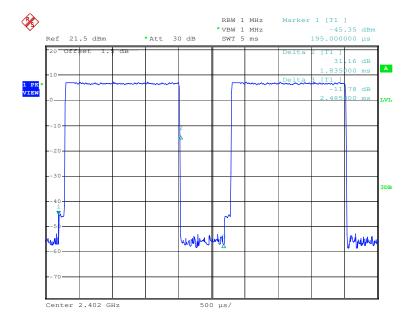





Report No.: SZEM120400214401

Page: 42 of 74

Test Packet: 3-DH1

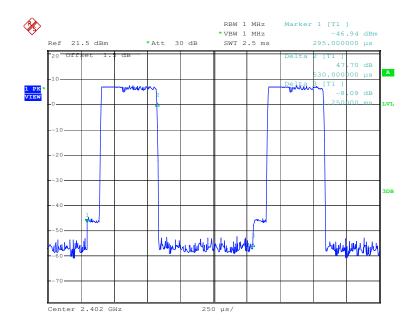

Test Packet: 3-DH3

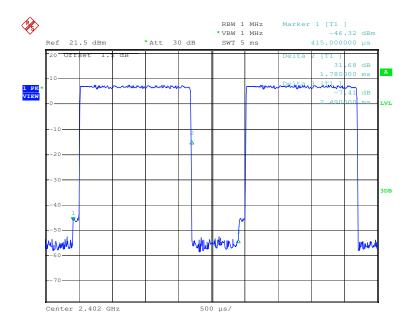




Report No.: SZEM120400214401

Page: 43 of 74

Test Packet: 3-DH5

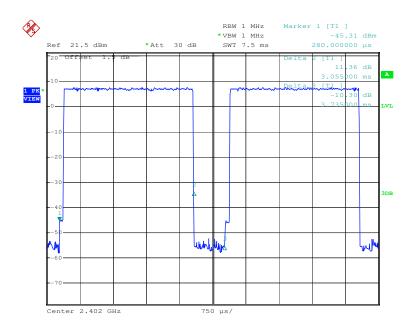



Report No.: SZEM120400214401

Page: 44 of 74

# 5.8 Band-edge for RF Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane						
	Remark:						
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type						
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Instruments Used:	Refer to section 4.10 for details						
Test Results:	Pass						





Report No.: SZEM120400214401

Page: 45 of 74

### Test plot as follows:

Test mode: GFSK Test channel: Lowest

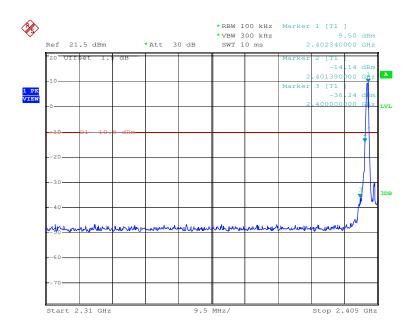

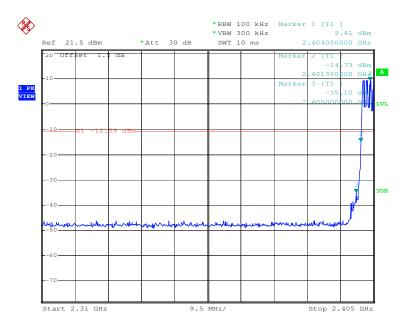





Report No.: SZEM120400214401

Page: 46 of 74

Test mode: GFSK Test channel: Highest

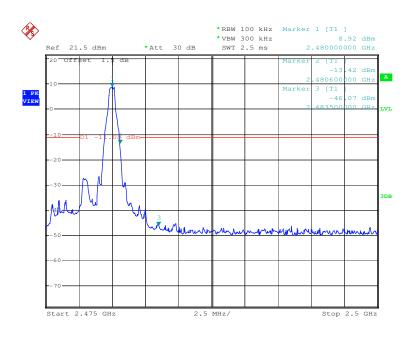

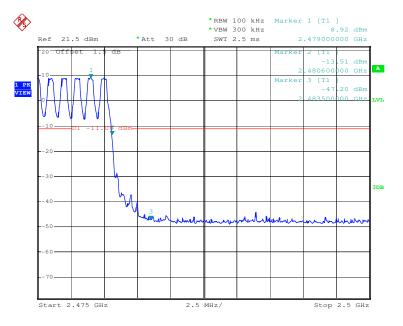







Report No.: SZEM120400214401

Page: 47 of 74

Test mode: π/4DQPSK Test channel: Lowest

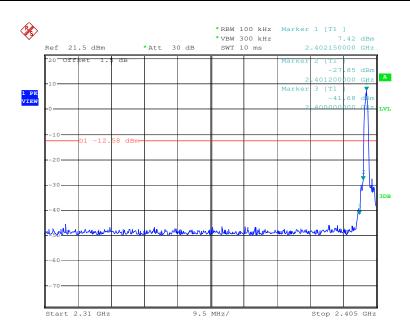

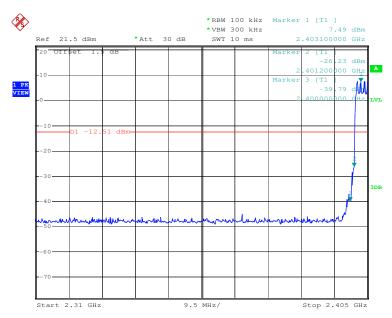





Report No.: SZEM120400214401

Page: 48 of 74

Test mode: π/4DQPSK Test channel: Highest

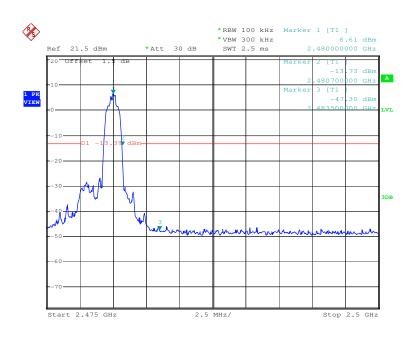

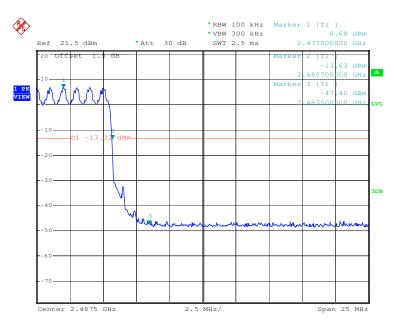





Report No.: SZEM120400214401

Page: 49 of 74

Test mode: 8DPSK Test channel: Lowest

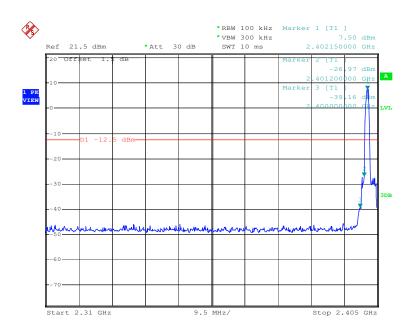

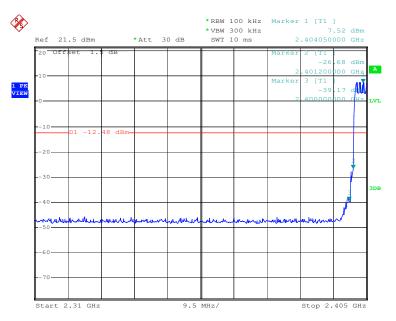





Report No.: SZEM120400214401

Page: 50 of 74

Test mode: 8DPSK Test channel: Highest

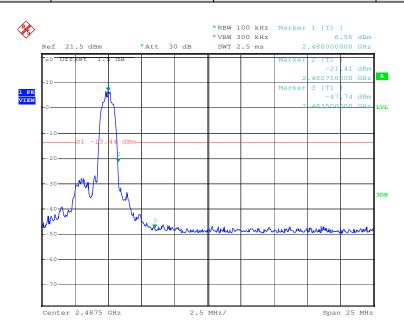

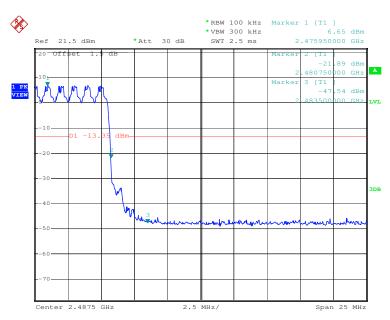



Report No.: SZEM120400214401

Page: 51 of 74

# 5.9 Spurious RF Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane						
	Remark:						
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.						
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Instruments Used:	Refer to section 4.10 for details						
Test Results:	Pass						




Report No.: SZEM120400214401

Page: 52 of 74

Test mode: GFSK Test channel: Lowest

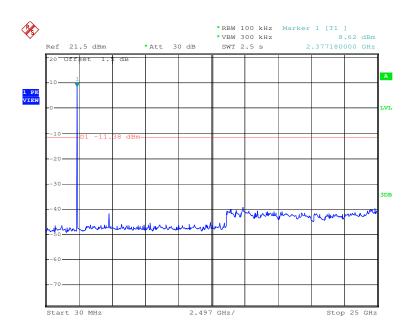



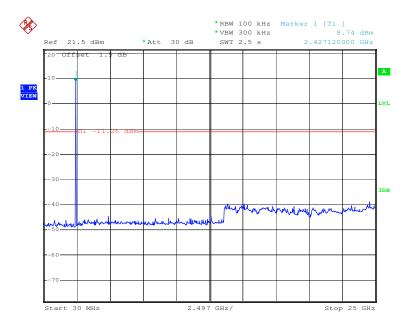





Report No.: SZEM120400214401

Page: 53 of 74

Test mode: GFSK Test channel: Highest

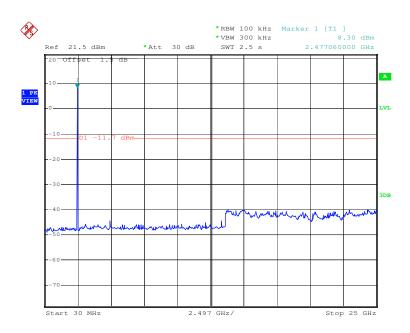



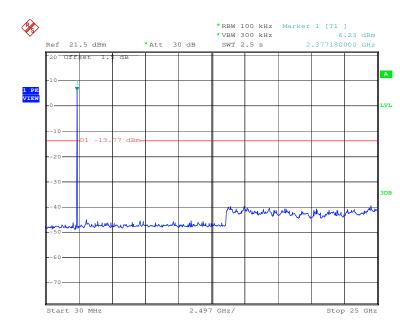





Report No.: SZEM120400214401

Page: 54 of 74

Test mode: π/4DQPSK Test channel: Middle

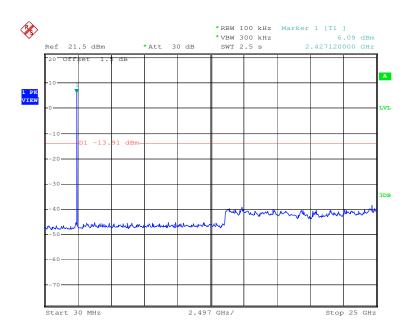



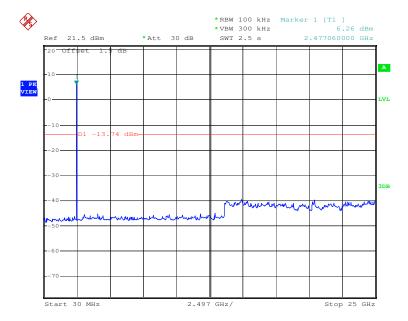





Report No.: SZEM120400214401

Page: 55 of 74

Test mode: 8DPSK Test channel: Lowest

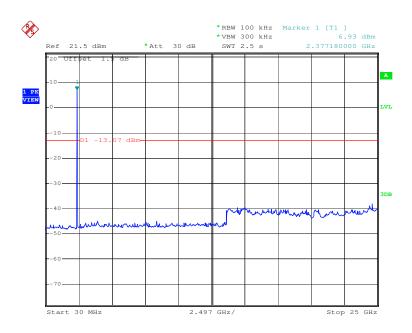



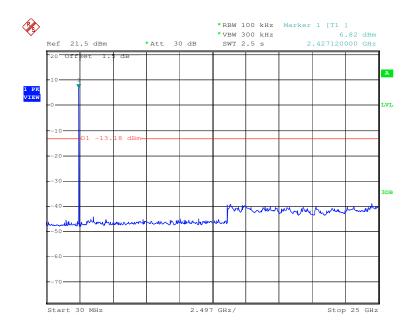




Report No.: SZEM120400214401

Page: 56 of 74

Test mode: 8DPSK Test channel: Highest

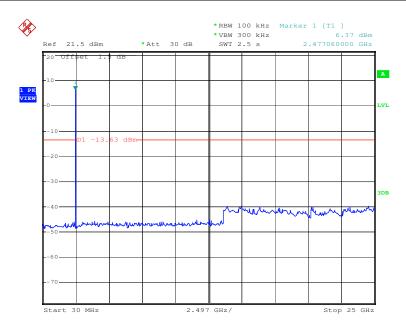





Report No.: SZEM120400214401

Page: 57 of 74

# 5.10 Pseudorandom Frequency Hopping Sequence

#### Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

## **EUT Pseudorandom Frequency Hopping Sequence**


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29-1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.




Report No.: SZEM120400214401

Page: 58 of 74

# 5.11 Radiated Spurious Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement D	Distance: 3m	(Sem	ni-Anecho	ic Chambei	r)			
Receiver Setup:	Frequency	Detector		RBW	VBW	Remark			
	30MHz- 1GHz	30MHz- Quasi-peak 100kHz 300kHz		Quasi-peak Value					
	Above 1011 Peak 1MHz 3MHz		Peak Value						
	Above 1GHz			1MHz	10Hz	Average Value			
Limit:	Freque	ency	Lin	nit (dBuV/	m @3m)	Remark			
	30MHz-8	8MHz		40.0		Quasi-peak Value			
	88MHz-2	16MHz		43.5	5	Quasi-peak Value			
	216MHz-9	60MHz		46.0	)	Quasi-peak Value			
	960MHz-	-1GHz		54.0	)	Quasi-peak Value			
	Above 1GHz				)	Average Value			
	Above	IGHZ		74.0	)	Peak Value			
Test Setup:									






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120400214401

Page: 59 of 74

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the</li> </ul>
	ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning.  And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM120400214401

Page: 60 of 74

#### 5.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

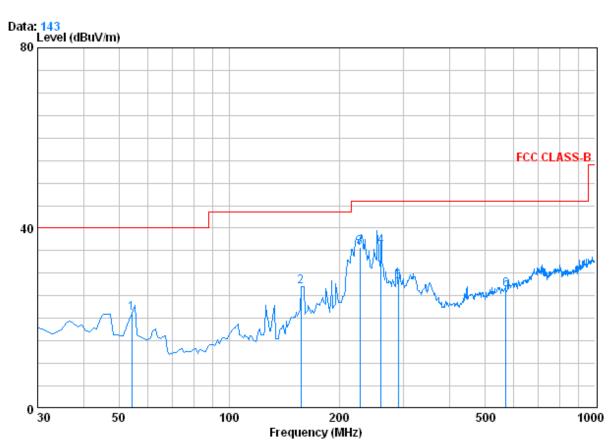

Condition : FCC CLASS-B 3m 0042673 VERTICAL

EUT : 2144RF Test mode : TX mode


		Freq			Preamp Factor	Read Level		Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		54.250	0.80	7.64	27.28	40.04	21.20	40.00	-18.80
2	1	57.070	1.33	9.42	26.87	43.07	26.95	43.50	-16.55
3	2	27.880	1.56	11.59	26.60	49.28	35.83	46.00	-10.17
4	2	59.890	1.72	12.51	26.51	48.28	36.00	46.00	-10.00
5	2	89.960	1.86	13.44	26.43	39.19	28.07	46.00	-17.93
6	5	71.260	2.67	19.07	27.59	32.25	26.41	46.00	-19.59



Report No.: SZEM120400214401

Page: 61 of 74

Test mode: Transmitting Horizontal

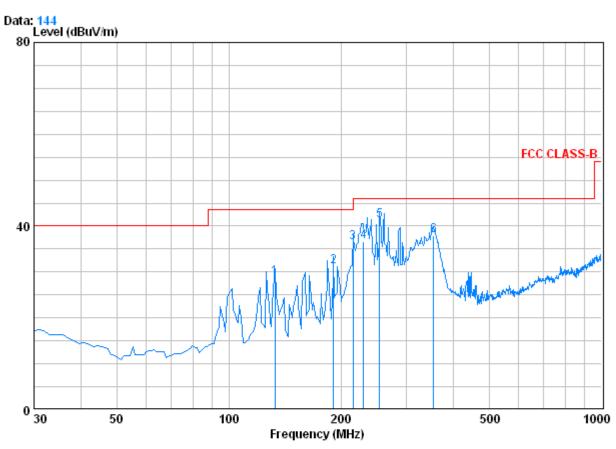

Condition : FCC CLASS-B 3m 0042673 HORIZONTAL

EUT : 2144RF Test mode : TX mode

	_			Preamp	Read		Limit	Over
	Freq	Loss	ractor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	132.820	1.29	7.82	26.99	46.67	28.78	43.50	-14.72
2	191.020	1.39	10.11	26.73	46.49	31.25	43.50	-12.25
3	215.270	1.49	11.01	26.65	50.46	36.32	43.50	-7.18
4	229.820	1.57	11.64	26.59	49.93	36.55	46.00	-9.45
5 @	254.070	1.69	12.40	26.53	53.59	41.15	46.00	-4.85
6	353.980	2.07	15.49	26.83	47.25	37.99	46.00	-8.01



Report No.: SZEM120400214401

Page: 62 of 74

#### 5.11.2 Transmitter Emission above 1GHz

Worse case	mode: (	GFSK(DH1)	Test	channel:	Lowest	Rema	ırk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1601.978	2.58	28.84	39.40	54.24	46.26	74	-27.74	Vertical
4803.892	4.69	34.70	41.63	57.60	55.36	74	-18.64	Vertical
6283.164	5.20	36.04	40.68	48.94	49.50	74	-24.50	Vertical
7470.558	6.08	35.99	39.64	48.55	50.98	74	-23.02	Vertical
10348.050	6.06	38.12	37.59	46.42	53.01	74	-20.99	Vertical
12055.600	6.48	38.95	38.30	46.85	53.98	74	-20.02	Vertical
1602.012	2.58	28.84	39.40	54.02	46.04	74	-27.96	Horizontal
4804.072	4.69	34.70	41.63	60.51	58.27	74	-15.73	Horizontal
6047.776	5.14	35.76	40.87	48.76	48.79	74	-25.21	Horizontal
7624.250	6.23	36.00	39.51	48.60	51.32	74	-22.68	Horizontal
9465.979	6.02	37.16	37.91	47.03	52.30	74	-21.70	Horizontal
11112.520	6.25	38.48	37.91	46.22	53.04	74	-20.96	Horizontal

Worse case	mode:	GFSK(DH1)	) Te	est channel:	Lowest	Rem		ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preample factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limi (dBµV		Over Limit (dB)	Polarization
1601.978	2.58	28.84	39.40	52.46	44.48	54		-9.52	Vertical
4803.892	4.69	34.70	41.63	47.24	45.00	54		-9.00	Vertical
6283.164	5.20	36.04	40.68	36.00	36.56	54		-17.44	Vertical
7470.558	6.08	35.99	39.64	34.72	37.15	54		-16.85	Vertical
10348.050	6.06	38.12	37.59	32.48	39.07	54		-14.93	Vertical
12055.600	6.48	38.95	38.30	34.03	41.16	54		-12.84	Vertical
1602.012	2.58	28.84	39.40	45.88	37.90	54		-16.10	Horizontal
4804.072	4.69	34.70	41.63	51.01	48.77	54		-5.23	Horizontal
6047.776	5.14	35.76	40.87	35.01	35.04	54		-18.96	Horizontal
7624.250	6.23	36.00	39.51	34.66	37.38	54		-16.62	Horizontal
9465.979	6.02	37.16	37.91	32.75	38.02	54		-15.98	Horizontal
11112.520	6.25	38.48	37.91	32.47	39.29	54		-14.71	Horizontal



Report No.: SZEM120400214401

Page: 63 of 74

Worse case	mode:	GFSK(DH1)	) Tes	t channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1626.705	2.59	29.09	39.41	52.00	44.27	74	-29.73	Vertical
4881.972	4.72	34.59	41.68	62.06	59.69	74	-14.31	Vertical
6299.178	5.20	36.06	40.66	48.46	49.06	74	-24.94	Vertical
7624.250	6.23	36.00	39.51	48.42	51.14	74	-22.86	Vertical
10453.950	6.09	38.24	37.64	46.25	52.94	74	-21.06	Vertical
12210.020	6.52	39.11	38.36	47.31	54.58	74	-19.42	Vertical
1626.716	2.59	29.09	39.41	53.10	45.37	74	-28.63	Horizontal
4881.992	4.72	34.59	41.68	59.75	57.38	74	-16.62	Horizontal
6611.326	5.28	36.20	40.40	48.10	49.18	74	-24.82	Horizontal
7566.249	6.19	36.00	39.56	48.00	50.63	74	-23.37	Horizontal
9465.979	6.02	37.16	37.91	46.50	51.77	74	-22.23	Horizontal
11341.140	6.30	38.43	38.00	46.94	53.67	74	-20.33	Horizontal

Worse case	mode:	GFSK(DH1)	) Te	est channel:	Middle	Rem		ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preample factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limi (dBµV		Over Limit (dB)	Polarization
1626.705	2.59	29.09	39.41	50.15	42.42	54		-11.58	Vertical
4881.972	4.72	34.59	41.68	52.61	50.24	54		-3.76	Vertical
6299.178	5.20	36.06	40.66	35.64	36.24	54		-17.76	Vertical
7624.250	6.23	36.00	39.51	35.45	38.17	54		-15.83	Vertical
10453.950	6.09	38.24	37.64	32.98	39.67	54		-14.33	Vertical
12210.020	6.52	39.11	38.36	34.04	41.31	54		-12.69	Vertical
1626.716	2.59	29.09	39.41	47.35	39.62	54		-14.38	Horizontal
4881.992	4.72	34.59	41.68	52.45	50.08	54		-3.92	Horizontal
6611.326	5.28	36.20	40.40	35.33	36.41	54		-17.59	Horizontal
7566.249	6.19	36.00	39.56	35.56	38.19	54		-15.81	Horizontal
9465.979	6.02	37.16	37.91	33.20	38.47	54		-15.53	Horizontal
11341.140	6.30	38.43	38.00	33.14	39.87	54		-14.13	Horizontal



Report No.: SZEM120400214401

Page: 64 of 74

Worse case	mode:	GFSK(DH1)	) Test	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1652.668	2.62	29.21	39.42	50.39	42.80	74	-31.20	Vertical
4960.032	4.76	34.46	41.74	53.61	51.09	74	-22.91	Vertical
6363.645	5.22	36.14	40.61	49.09	49.84	74	-24.16	Vertical
8042.903	6.20	36.01	39.15	48.26	51.32	74	-22.68	Vertical
10165.290	6.01	37.90	37.51	46.39	52.79	74	-21.21	Vertical
12086.330	6.49	38.99	38.31	46.71	53.88	74	-20.12	Vertical
1652.680	2.62	29.21	39.42	53.77	46.18	74	-27.82	Horizontal
4960.028	4.76	34.46	41.74	54.31	51.79	74	-22.21	Horizontal
7547.013	6.17	36.00	39.57	48.17	50.77	74	-23.23	Horizontal
9441.913	6.03	37.14	37.94	46.98	52.21	74	-21.79	Horizontal
10453.950	6.09	38.24	37.64	46.32	53.01	74	-20.99	Horizontal
12334.980	6.55	39.24	38.42	47.64	55.01	74	-18.99	Horizontal
Worse case	mode: 0	GFSK(DH1)	) Test	t channel:	Highest	Rem	ark:	Average
Frequency (MHz)	Cable	Antenna factors	Preamp factor	Reading Level	Emission Level	Limit (dBμV/m)	Over Limit	Polarization
	(dB)	(dB/m)	(dB)	(dBμV)	$(dB\mu V/m)$	(ασμν/π)	(dB)	
1652.668	(dB) 2.62	(dB/m) 29.21	(dB) 39.42	(dBμV) 49.84	(dBμV/m) 42.25	54	(dB) -11.75	Vertical
1652.668 4960.032	, ,	, ,	, ,		` ' '	, ,	` ′	
	2.62	29.21	39.42	49.84	42.25	54	-11.75	Vertical
4960.032	2.62 4.76	29.21 34.46	39.42 41.74	49.84 44.73	42.25 42.21	54 54	-11.75 -11.79	Vertical Vertical
4960.032 6363.645	2.62 4.76 5.22	29.21 34.46 36.14	39.42 41.74 40.61	49.84 44.73 34.91	42.25 42.21 35.66	54 54 54	-11.75 -11.79 -18.34	Vertical Vertical Vertical
4960.032 6363.645 8042.903	2.62 4.76 5.22 6.20	29.21 34.46 36.14 36.01	39.42 41.74 40.61 39.15	49.84 44.73 34.91 34.70	42.25 42.21 35.66 37.76	54 54 54 54	-11.75 -11.79 -18.34 -16.24	Vertical Vertical Vertical Vertical
4960.032 6363.645 8042.903 10165.290	2.62 4.76 5.22 6.20 6.01	29.21 34.46 36.14 36.01 37.90	39.42 41.74 40.61 39.15 37.51	49.84 44.73 34.91 34.70 32.41	42.25 42.21 35.66 37.76 38.81	54 54 54 54 54	-11.75 -11.79 -18.34 -16.24 -15.19	Vertical Vertical Vertical Vertical Vertical
4960.032 6363.645 8042.903 10165.290 12086.330	2.62 4.76 5.22 6.20 6.01 6.49	29.21 34.46 36.14 36.01 37.90 38.99	39.42 41.74 40.61 39.15 37.51 38.31	49.84 44.73 34.91 34.70 32.41 33.55	42.25 42.21 35.66 37.76 38.81 40.72	54 54 54 54 54 54	-11.75 -11.79 -18.34 -16.24 -15.19 -13.28	Vertical Vertical Vertical Vertical Vertical Vertical Vertical
4960.032 6363.645 8042.903 10165.290 12086.330 1652.680	2.62 4.76 5.22 6.20 6.01 6.49 2.62	29.21 34.46 36.14 36.01 37.90 38.99 29.21	39.42 41.74 40.61 39.15 37.51 38.31 39.42	49.84 44.73 34.91 34.70 32.41 33.55 50.33	42.25 42.21 35.66 37.76 38.81 40.72 42.74	54 54 54 54 54 54 54	-11.75 -11.79 -18.34 -16.24 -15.19 -13.28 -11.26	Vertical Vertical Vertical Vertical Vertical Vertical Horizontal
4960.032 6363.645 8042.903 10165.290 12086.330 1652.680 4960.028	2.62 4.76 5.22 6.20 6.01 6.49 2.62 4.76	29.21 34.46 36.14 36.01 37.90 38.99 29.21 34.46	39.42 41.74 40.61 39.15 37.51 38.31 39.42 41.74	49.84 44.73 34.91 34.70 32.41 33.55 50.33 48.56	42.25 42.21 35.66 37.76 38.81 40.72 42.74 46.04	54 54 54 54 54 54 54 54	-11.75 -11.79 -18.34 -16.24 -15.19 -13.28 -11.26 -7.96	Vertical Vertical Vertical Vertical Vertical Vertical Horizontal Horizontal
4960.032 6363.645 8042.903 10165.290 12086.330 1652.680 4960.028 7547.013	2.62 4.76 5.22 6.20 6.01 6.49 2.62 4.76 6.17	29.21 34.46 36.14 36.01 37.90 38.99 29.21 34.46 36.00	39.42 41.74 40.61 39.15 37.51 38.31 39.42 41.74 39.57	49.84 44.73 34.91 34.70 32.41 33.55 50.33 48.56 34.94	42.25 42.21 35.66 37.76 38.81 40.72 42.74 46.04 37.54	54 54 54 54 54 54 54 54 54	-11.75 -11.79 -18.34 -16.24 -15.19 -13.28 -11.26 -7.96 -16.46	Vertical Vertical Vertical Vertical Vertical Vertical Horizontal Horizontal Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Report No.: SZEM120400214401

Page: 65 of 74

# 5.12 Band edge (Radiated Emission)

Test Requirement:	FCC Part15 C Section 15.2	09 and 15.205								
Test Method:	ANSI C63.10: 2009	NSI C63.10: 2009								
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz									
	88MHz-216MHz	88MHz-216MHz 43.5 Quasi-peak Value								
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz 54.0 Average Value									
	74.0 Peak Value									
Test Setup:										






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM120400214401

Page: 66 of 74

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel, the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.</li> <li>i. Repeat above procedures until all frequencies measured was</li> </ul>
F	complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of date type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass
	<u>I</u>






Report No.: SZEM120400214401

Page: 67 of 74

#### Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical

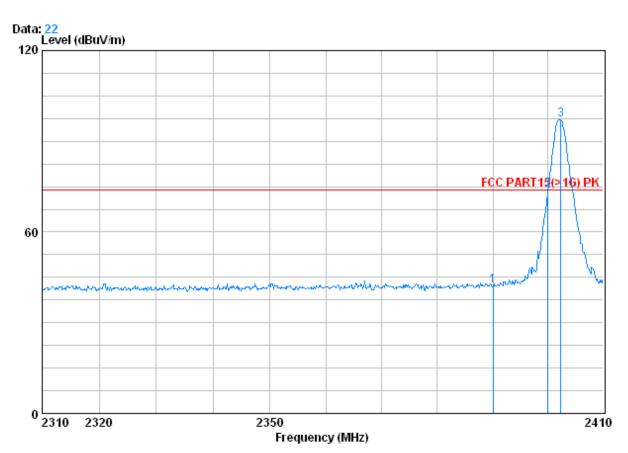

Condition : FCC PART15(>1G) PK 3m VERTICAL

EUT : headphone

test Mode : 2402 Bandedge PK


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	46.47	42.11	74.00	-31.89
2		2400.000	2.98	32.51	39.86	78.36	73.99	74.00	-0.01
3	X	2402.300	2.98	32.51	39.86	101.42	97.05	74.00	23.05



Report No.: SZEM120400214401

Page: 68 of 74

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

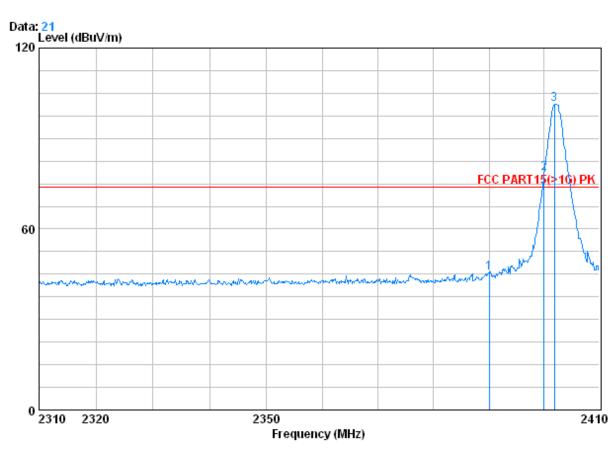

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

EUT : headphone

test Mode : 2402 Bandedge PK


		_	Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	49.90	45.54	74.00	-28.46
2	X	2400.000	2.98	32.51	39.86	82.69	78.32	74.00	4.32
3	X	2401.900	2.98	32.51	39.86	105.70	101.33	74.00	27.33



Report No.: SZEM120400214401

Page: 69 of 74

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Vertical

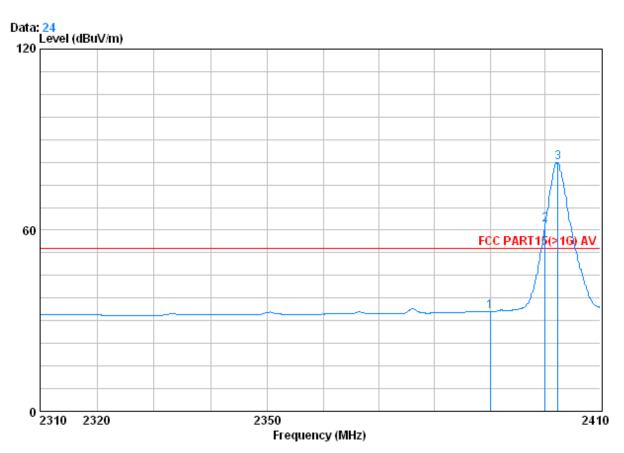

Condition : FCC PART15(>1G) AV 3m VERTICAL

EUT : headphone

test Mode : 2402 Bandedge AV

		Freq			Preamp Factor			Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
:	1	2390.000	2.98	32.51	39.85	37.27	32.91	54.00	-21.09
2	2 X	2400.000	2.98	32.51	39.86	66.13	61.76	54.00	7.76
3	3 @	2402.300	2.98	32.51	39.86	86.86	82.49	54.00	28.49


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120400214401

Page: 70 of 74

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Horizontal

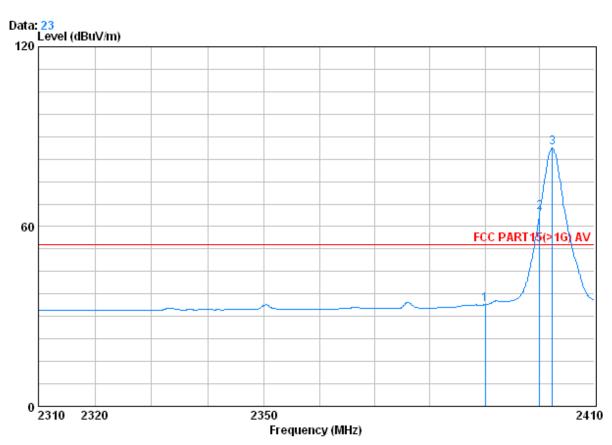

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

EUT : headphone

test Mode : 2402 Bandedge AV


		-	Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	38.24	33.89	54.00	-20.11
2	X	2400.000	2.98	32.51	39.86	69.27	64.90	54.00	10.90
3	0	2402.300	2.98	32.51	39.86	90.54	86.17	54.00	32.17



Report No.: SZEM120400214401

Page: 71 of 74

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical

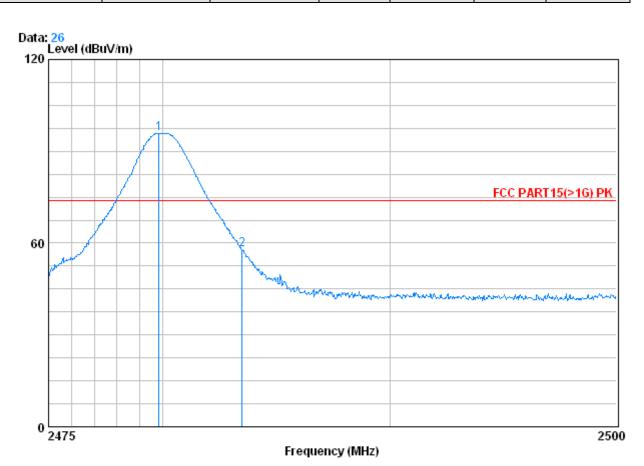

Condition : FCC PART15(>1G) PK 3m VERTICAL

EUT : headphone

test Mode : 2480 Bandedge PK


		Freq			Preamp Factor			Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2479.850 2483.500							21.91 -16.20



Report No.: SZEM120400214401

Page: 72 of 74

Worse case mode:	8DPSK(DH3)	Test channel:	Highest	Remark:	Peak	Horizontal

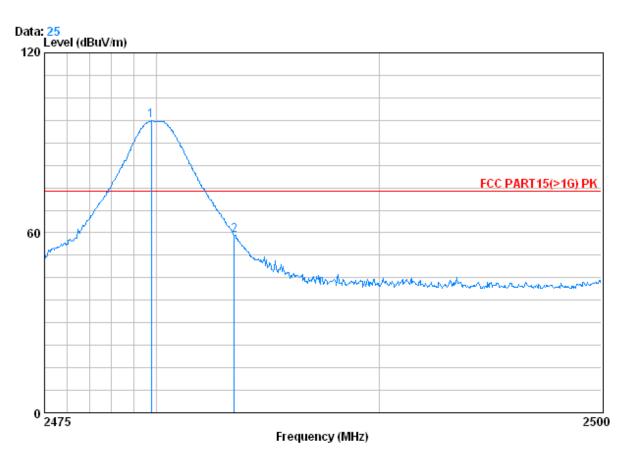

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

EUT : headphone

test Mode : 2480 Bandedge PK

		_	Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		$\mathtt{MHz}$	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2479.775	3.03	32.67	39.92	101.50	97.28	74.00	23.28
2		2483.500	3.03	32.67	39.92	63.36	59.14	74.00	-14.86


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120400214401

Page: 73 of 74

	Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
--	------------------	------------	---------------	---------	---------	---------	----------

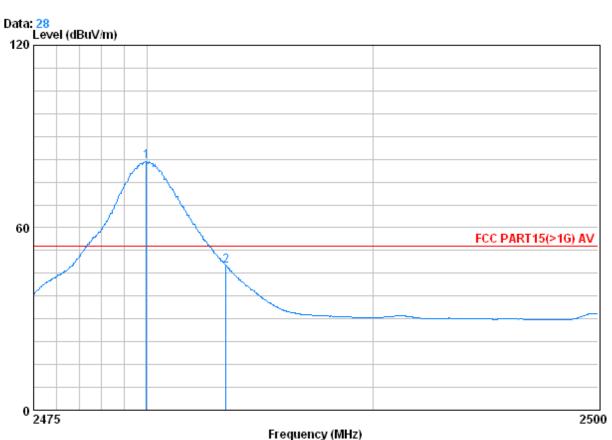

Trequency (n

Condition : FCC PART15(>1G) AV 3m VERTICAL

EUT : headphone

test Mode : 2480 Bandedge AV

	Freq			enna Preamp actor Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2479.975	3.03	32.67	39.92	85.89	81.67	54.00	27.67
2	2483.500	3.03	32.67	39.92	51.65	47.43	54.00	-6.57


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120400214401

Page: 74 of 74

	Ī	Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
--	---	------------------	------------	---------------	---------	---------	---------	------------

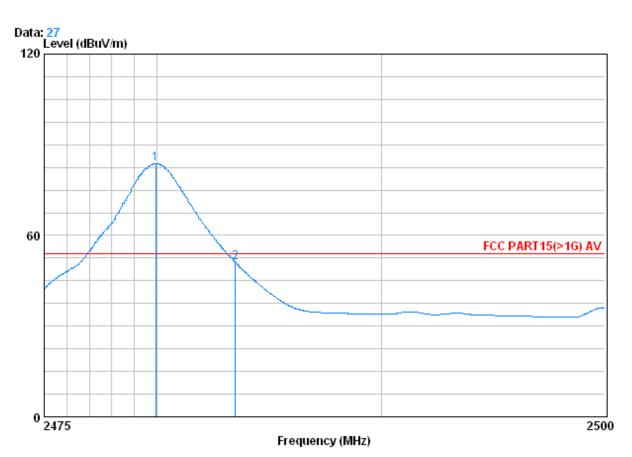

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

EUT : headphone

test Mode : 2480 Bandedge AV

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @ 2	2479.950 2483.500			39.92 39.92				

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor