**BVCAMSUSUP** 

	REVISION										
LTR	ER/ECN NO	DESCRIPTION	DATE	BY	APP'D						
3		REVISED	3/8/11	RSC	JG						

## Removable Label for AMS-1014 (Ultra\*Post VI)

## Specifications


Overall size: (I x w) 125 x 150mm, maximum corner radii, 25mm.

Colour: Black ink on White background

Label Material:50LB white uncoated litho with 447 (removable, rubber based adhesive)

Vendor part number "Technicote 50 EDP/TR447/65#" or equivalent.

Adhesive: Adhesive to be applied to un-printed surface. Adhesive must allow the label to be removed easily up to three months after application, without leaving any tacky residue, or discoloration.

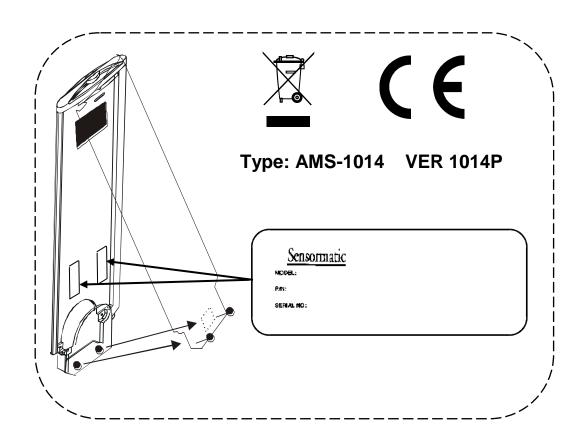

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE USED FOR MANUFACTURING OR ANY PURPOSE DETRIMENTAL TO SENSORMATIC ELECTRONICS. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

DIMENSIONS ARE SHOWN IN: Millimeters TOLERANCES ARE:		: APPROVALS	DATE	SENSORMATIC ELECTRONICS CORP.						
		DRAWN OF DACINI	8/12/10	BOCA RATON, FLORIDA						
	DECIMALS ANGLE X.X = ± .5mm	CERASINI CHECKED	0, 12, 10	LBL,TEMP,U*P VI PR			PRIMA	RY		
	$X.XX = \pm .3mm$ $\pm 1/2$ $X.XXX = \pm .1mm$ DEGRE	ENGR GOEDDERZ	8/12/10	SIZE DRAWING NUMBER						REV
	MATERIAL N/A	APP'D		A	H2412-2526-0					
	FINISH N/A	RELEASE		MSWo	ord	SHEET	1	OF	: '	1