

Appendix III
Test Report Cover Sheet/Performance Test Data

MODEL NUMBER: DEAC MER

MANUFACTURER: Sensormatic Electronics Corp.

TESTED TO RADIO STANDARD SPECIFICATION NO. : RSS 210

OPEN AREA TEST SITE INDUSTRY CANADA NUMBER: IC 3506

FREQUENCY RANGE (or fixed frequency): 58 KhZ

R.F. POWER IN WATTS: n/a

FIELD STRENGTH (at what distance): 16 dBuV/m@300m

OCCUPIED BANDWIDTH (99% BW): 10.7kHz

TYPE OF MODULATION: pulse

EMISSION DESIGNATOR (TRC-43): 10K7PON


TRANSMITTER SPURIOUS (worst case): -6.8dBuV/m@300m

RECEIVER SPURIOUS (worst case): see transmitter

ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above mentioned department standard(s), and that the radio apparatus identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standard have been met.

Signature:



Date: March 11, 2002

NAME AND TITLE (Please print or Type):

Donald J. Umbdenstock

Senior Principal Engineer, Compliance Engineering

Note: This form must be completed and provided with the submission.

FCC ID: BVCDEACMER
IC: 3506A DEACMER

COMPANY	Sensormatic Electronics Corp. 6600 Congress Ave Boca Raton, Florida
PRODUCT TESTED	ScanMax Pro FCC ID: BVCDEACMER IC: 3506A-DEACMER
FCC RULES	15.207, 15.209
IC SPECIFICATIONS	RSS 210
TEST DATE	January 22, February 25, 2002
SUBMITTED BY	Donald J. Umbdenstock

INDEX

I.	SUMMARY OF RESULTS	4
II.	GENERAL INFORMATION	4
	Test Methodology	4
	Test Facility	4
	System Description	5
	15.203 Compliance	5
III.	CONDUCTED EMISSIONS TESTING, 47 CFR 15.207	5
IV.	RADIATED EMISSIONS TESTING, 47 CFR 15.209	6
V.	OCCUPIED BANDWIDTH, RSS 210, Clause 5.9.1	6
VI.	LIST OF MEASUREMENT EQUIPMENT	7
VII.	DATA	8
	Part A – Conducted Emissions	8
	Part B – Radiated Emissions	9
	Part C – 20 dB Bandwidth	10

I. Summary of Results

47 CFR 15.207	CONDUCTED EMISSIONS	COMPLIES
47 CFR 15.209	RADIATED EMISSIONS	COMPLIES
RSS 210: 5.9.1	OCCUPIED BANDWIDTH	PROVIDED

II. General Information

1.1 Test Methodology

Both conducted and radiated emissions testing were performed according to the procedures in ANSI C63.4-1992, and the requirements of 15.31, 15.33, 15.35, 15.207, and 15.209. Radiated emissions measurements below 30 MHz were performed at a distance of 5 meters and the results extrapolated to the distance specified per 15.31 and 15.209.

1.2 Test Facility

Measurements per 15.207 and 15.209 were performed at Sensormatic Electronics Corporation.

The shielded room conducted emissions measurement facility is located at Sensormatic Electronics Corporation Headquarters at 951 Yamato Road, Boca Raton, Florida, 33431. The radiated emissions Open Area Test Site is located at Sensormatic Electronics Corporation manufacturing location, 6600 Congress Avenue, Boca Raton, Florida 33487. These sites have been found acceptable by and are on file with the FCC per FCC Registration Number 90925, and Industry Canada per file number IC 3506.

1.3 Test System Description.

The system consists of an electronics module that houses the transmitter, receiver, deactivator and processor circuitry. The antenna is contained in a plastic enclosure in the shape of a thick pad. It consists of a multi-turn loop antenna wound on an iron core.

The product tested was a pre-production unit built to production drawings.

15.203. The antenna is contained internally to the pad assembly. The pad assembly has a permanently attached cable for transmit, receive, deactivation and signalling. The other end of the cable is fitted with a connector pinned specific to our application making it unique, therefore the antenna is compliant with the requirements of this clause.

III. Conducted Emissions

15.207. Conducted emissions data are presented in Section VII “Data”, Part A, Conducted Emissions. The product demonstrated compliance with the requirements. The product was tested at 120 V, 60 Hz.

IV. Radiated Emissions

15.209. Radiated emissions data for this product are presented in Section VII “Data”, Part B, Radiated Emissions. The product demonstrated compliance with the requirements. Radiated emissions measurements were performed at 5 meters. Propagation loss was determined by extrapolating the results to 300 meters as per 15.31(f)(2), using the square of the inverse linear distance extrapolation as indicated in the rules.

Maximum radiation was determined by first assessing symmetry while applying incremental rotation of the product. The product exhibited quadrant symmetry. Measurements were taken at radials of 22.5° throughout one quadrant; the measurement antenna was rotated for maximum pickup about the vertical and horizontal axis of the measurement antenna at each radial. The maximum emission was determined to be with the measurement loop antenna in the vertical polarization, parallel to the plane of the transmit antenna.

The product was tested at input voltages to the transformer ranging from 102 – 138 V, 60 Hz with no significant change in transmitter output. See Section VII, Part B.

V. Occupied Bandwidth

RSS 210:5.9.1. The 20 dB bandwidth measurements for this product are presented in Section VII “Data”, Part C, Occupied Bandwidth. A bandwidth requirement was not specified for 58 kHz products, so the default 20 dB bandwidth was measured. The HP 8591EM spectrum analyzer cannot measure a bandwidth over 1.8 kHz in quasi-peak detection mode, so the bandwidth was measured in peak detection mode, providing a worst case occupied bandwidth.

VI. LIST OF MEASURING EQUIPMENT

The equipment used for determining compliance of the Ultra Post system with the requirements of 15.207 and 15.209 is marked with an “X” in the first column of the table below.

	<u>Model</u>	<u>Description</u>	<u>Vendor</u>	<u>Serial #</u>
X	ALP -70	Loop Antenna	Electro Metrics	163
	3110B	Biconnical Antenna	Electro Metrics	1017
	3146	Log Periodic Antenna	EMCO	3909
	3825/2	Line Imp Stable Network	EMCO	1562
X	3816/2NM	Line Imp Stable Network	EMCO	9703 1064
	6060B	Frequency Generator	Giga-tronics	5850202
	FM2000	Isotropic Field Monitor	Amplifier Research	15171
	FP2000	Isotropic Field Probe	Amplifier Research	15214
	888	Leveler	Amplifier Research	14998
	75A220	Low Band Amplifier	Amplifier Research	15208
	10W1000A	High Band Amplifier	Amplifier Research	15138
	PEFT Junior	EFT Generator	Haefely Trench	083 180-16
	PEFT Junior	Capacitive Cable Clamp	Haefely Trench	083-078-31
	NSG435	ESD Simulator	Schaffner	1197
	NSG431	ESD Simulator	Schaffner	1267
X	HP8591EM	EMC Analyzer	Hewlett - Packard	3520A00190
		Power Source	Pacific Instruments	
	F-2031	EM Injection Clamp	Fischer Cust. Comm.	30
	FCC-801-M3-16	Coupling Decoupling Nwk	Fischer Cust. Comm.	58
	FCC-801-M3-16	Coupling Decoupling Nwk	Fischer Cust. Comm.	59
	F-33-1	RF Current Probe	Fischer Cust. Comm.	304
	EM 7600	Transient Limiter	Electro-Metrics	187
	Roberts Ant	Tunable Dipole Set	Compliance Design	003282
	Roberts Ant	Tunable Dipole Set	Compliance Design	003283
	HP8594E	Spectrum Analyzer	Hewlett Packard	3246A00300
X	HP8447F Opt 64	Dual Preamplifier	Hewlett Packard	2805A03473

VII. Data

Part A contains conducted emissions data; Part B contains magnetic field radiated emissions data; Part C contains occupied bandwidth data.

Part A

Conducted Emissions

Project Name	Conducted Emissions FCC Class B Limit	Filename	Gen6Deac_CondEMI_FCC_2-25-02.doc
EUT Name	Gen6 Deac	Serial Number	
Engineer	Firas Faham	Phone Number	
Date of Test	02/25/2002 10:24:01 AM	Test Name	Conducted Emission
Reg. Technician	Stephen Krizmanich		

Comments	Line In: 120vac 60hz With Acousto-Link and Sync-Link in Xmit mode
----------	--

Signal List



Signal	Freq (MHz)	Peak Amp (dBuV)	QP Amp (dBuV)	Avg Amp (dBuV)	Adjusted QP (dBuV) #	Limits FCC QP (dBuV)	Comments
1	26.752085	58.20	53.00	38.51	40	48.00	Complies
2	19.654138	55.83	52.81	31.36	39.81	48.00	Complies
3	28.715643	55.00	50.44	38.83	37.44	48.00	Complies
4	11.578645	53.10	50.45	27.94	37.45	48.00	Complies
5	1.184675	52.38	43.85	22.24	30.85	48.00	Complies
6	7.721564	43.26	37.25	29.55	24.25	48.00	Complies

FCC Part 15; Sect 15.207.

"If the level of the emission measured using quasi-peak instrumentation is 6dB or more higher than the level of the same emission measured with instrumentation having an average detector and 9khz minimum bandwidth, that emission is considered broadband and the level obtained with the quasi-peak detector may be reduced by 13dB for comparison to the limit."

Figure 1. L1 Full Range

Figure 2. L2 Full Range

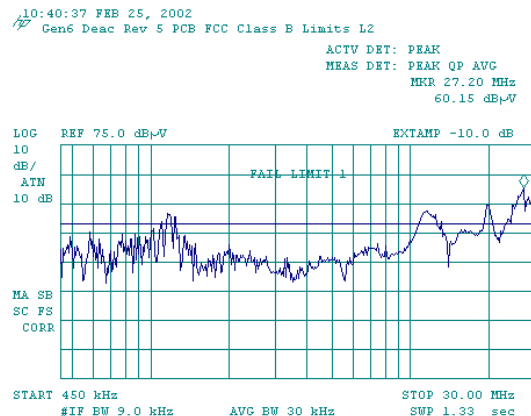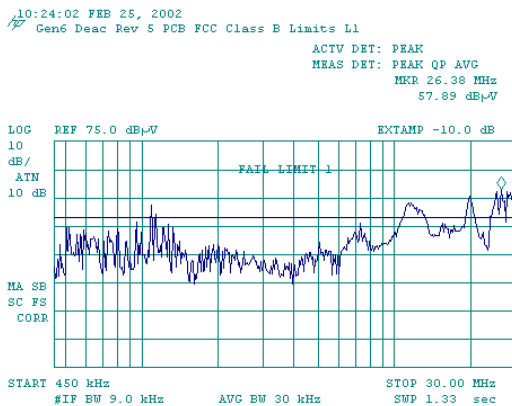

Part B

Radiated Emissions

Project Name	Radiated Emissions	Filename	
EUT Name	Gen6	Serial Number	Prototype
Engineer	Firas Faham	Phone Number	
Date of Test	1/22/02	Test Name	Radiated Emission
Reg. Technician	Stephen Krizmanich	Reviewer	Don Umbdenstock

Comments	<ol style="list-style-type: none"> 1. Average detector specified; peak detector and associated calculations to arrive at average detector measurement used per previous FCC instructions. Calculations to convert to average detection provides "DCCF" below. $20 \log(\text{pulse duration/period}) = 20 \log(1.6 / 5.5555)$. 2. Square law extrapolation used. 3. Measurement distance 5 meters
----------	---

Freq kHz	S.A. dBuV	Det dBuV	BW	Ant Fact dB	DCCF dB	DCF dB	Actual dBuV/m	Limit dBuV/m
58(pwr-15%)	35.4							
58(pwr+15%)	35.4							
58	35.4	pk	9kHz	62.5	-10.8	-71	16.1	32.3/300
116	18.4	pk	9kHz	56.6	-10.8	-71	-6.8	26.3/300
174	12.0	pk	9kHz	53.1	-10.8	-71	-16.7	22.8/300
232	11.8	pk	9kHz	51.9	-10.8	-71	-19.4	20.3/300
290	10.4	pk	9kHz	50.6	-10.8	-71	-22.7	18.4/300
348	nf	pk	9kHz	48.7	-10.8	-71	nf	16.8/300
406	nf	pk	9kHz	47.1	-10.8	-71	nf	15.4/300
464	nf	pk	9kHz	45.7	-10.8	-71	nf	14.3/300
522	amb	pk	9kHz	44.6	-10.8	-31	ambient	33.3/30
580	nf	pk	9kHz	43.5	-10.8	-31	nf	32.3/30

- SA:** Spectrum Analyzer
- Det** Detector
- BW** Band Width
- Ant Fact** Antenna Factor
- DCCF** Duty Cycle Correction Factor
- DCF** Distance Correction Factor: $40 \log(5/300)$; $40 \log(5/30)$
- Actual** Level = SA + Ant Fact + DCCF + DCF. Cable factors are negligible at these frequencies.
- Limit** $20 \log(\text{limit values, uV})$

Part C

Occupied Bandwidth

Project Name	BandWidth Measurement Industry Canada	Filename	Gen6Deac_IndCand_BW_2-26-02.doc
EUT Name	Gen6Deac	Serial Number	
Engineer	Firas Faham	Phone Number	
Date of Test	02/26/2002 7:38:12 AM	Test Name	BandWidth Measurement
Reg. Technician	Stephen Krizmanich		
Comments	Line Input: 120VAC 60Hz Rev 5 PCB; No External or internal ferrites; No Tag on Pad. Sync-Link and Acousto Link connected to Gen6 Deac.		

Figure 1.


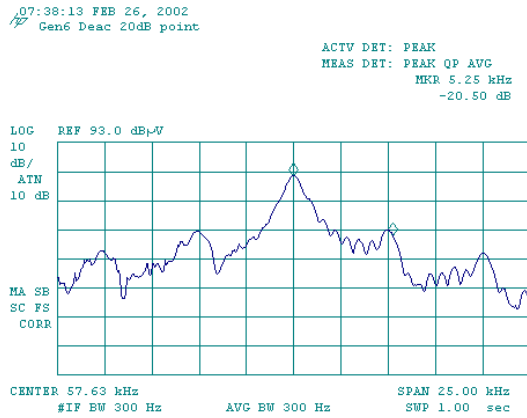


Figure 2.

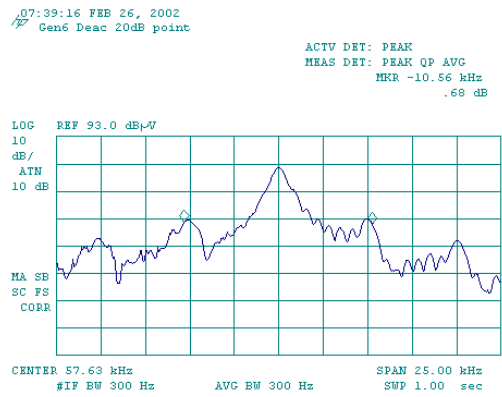

FCC ID: BVCDEACMER
IC: 3506A DEACMER