


REVISIONS					
REV	ECH NO.	DESCRIPTION	DATE	BY	APP'D
A	900221	REL PER ECN	11-2-90	RSC	MM
B	910055	REV PER ECN	2-28-91	SMP	HW
C	910999	REV PER ECN	5-2-91	SMP	TN
D	910187	REV PER ECN	6-14-91	SMP	DU
E	920110	REV PER ECN	4-6-92	TH	DU
F	930185	REV PER ECN	7-17-93	KC	JTD
G	930999	REV PER ECN	12-16-93	LA	K.S.
H	930999	REV PER ECN	12-16-93	TH	DUJ
J	940999	REV PER ECN	6-1-94	RFB	DUJ
K	950999	REV PER ECN	11-29-94	KC	DUJ
M	950999-1B2	REV PER ECN	11-29-94	KC	L.A.
N	950999-278	REV PER ECN	4-19-96	KC	L.A.
P	950999-374	REV PER ECN	6-5-96	KC	L.A.
Q	970999-476	REV PER ECN	6-19-97	DDS	EG

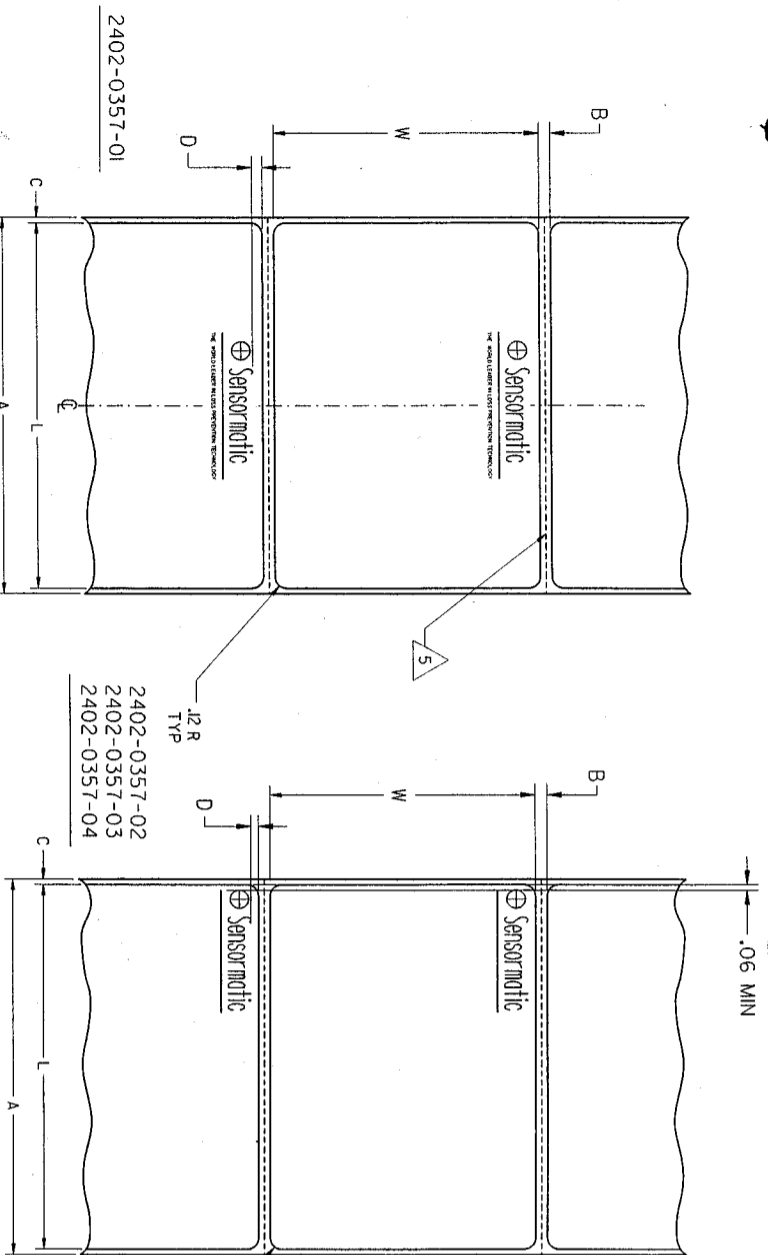

A	B	C	D	W	L	ARTWORK	PART NUMBER	REV
1.38	.13	.06	N.A.	1.25	.625	NONE	2402-0357-11	0
1.75	.13	.06	+ .050 - .025	1.70	.875	NONE	2402-0357-10	0
3.12	.13	.06	N.A.	3.00	1.50	NONE	2402-0357-09	0
4.12	.13	.06	N.A.	4.00	1.75	NONE	2402-0357-08	0
2.12	.13	.06	N.A.	2.00	1.00	NONE	2402-0357-07	0
4.12	.13	.06	.050 ± .025	4.00	1.25	NONE	2402-0357-06	0
4.12	.13	.06	N.A.	4.00	1.00	NONE	2402-0357-05	0
4.12	.13	.06	.050 ± .025	4.00	1.25	8001-01T-02	2402-0357-04	0
2.00	.13	.06	.050 ± .025	1.85	1.70	8001-01T-02	2402-0357-03	0
4.12	.13	.06	.050 ± .025	4.00	1.75	8001-01T-01	2402-0357-02	0
4.12	.13	.06	.050 ± .025	4.00	2.88	8001-01T-01	2402-0357-01	0

COMPUTER GENERATED
DO NOT CHANGE MANUALLY

THIRD ANGLE PROJECTION

THE DRAWING DATA CONTAINS INFORMATION ON PRODUCT IDENTIFICATION AND MUST NOT BE USED FOR PART IDENTIFICATION TO SENSORMATIC ELECTRONICS WITHOUT THE WRITTEN CONSENT OF SENSORMATIC ELECTRONICS. THIS DRAWING WILL BE CONSIDERED AS AN APPROVED TO BE ACCEPTED BY THE CUSTOMER.

DATE	BY	APP'D
11-2-90	RSC	MM
2-28-91	SMP	HW
5-2-91	SMP	TN
6-14-91	SMP	DU
4-6-92	TH	DU
7-17-93	KC	JTD
12-16-93	LA	K.S.
12-16-93	TH	DUJ
6-1-94	RFB	DUJ
11-29-94	KC	DUJ
11-29-94	KC	L.A.
4-19-96	KC	L.A.
6-5-96	KC	L.A.
6-19-97	DDS	EG

- NOTES:
1. MATERIAL/ADHESIVE: FLEXCON COMPUCEL II MM-200-S MT/C 2 MIL METALIZED POLYESTER, UL RECOGNIZED WITH L-23 ADHESIVE OR S.E.C. ENGINEERING APPROVED EQUIVALENT, WITHOUT PIN FEED.
 2. FINISH: MATTE TOP COAT, THERMAL TRANSFER IMPRINTABLE.
 3. COLOR: SILVER MATTE WITH BLACK LETTERING, WITH MARKING PERMANENCE PER UL 969.
 4. REEL SPEC: CORE: 3" MIN I.D. FULL REEL: 7' MAX O.D.
 5. ADD PERFORATION LINE BETWEEN EACH LABEL.