


Appendix S

Emissions inside and outside the sub-band

FCC Part 15.323(d.2) In-band unwanted emission

Test procedure Rev. Draft ANSI 63.17-1998 6.1.6.1
UPCS

EUT	Remote fixed part
Model	BS-330
Applicant	Ascom Tateco AB
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission
Bandwidth used	1.376MHz

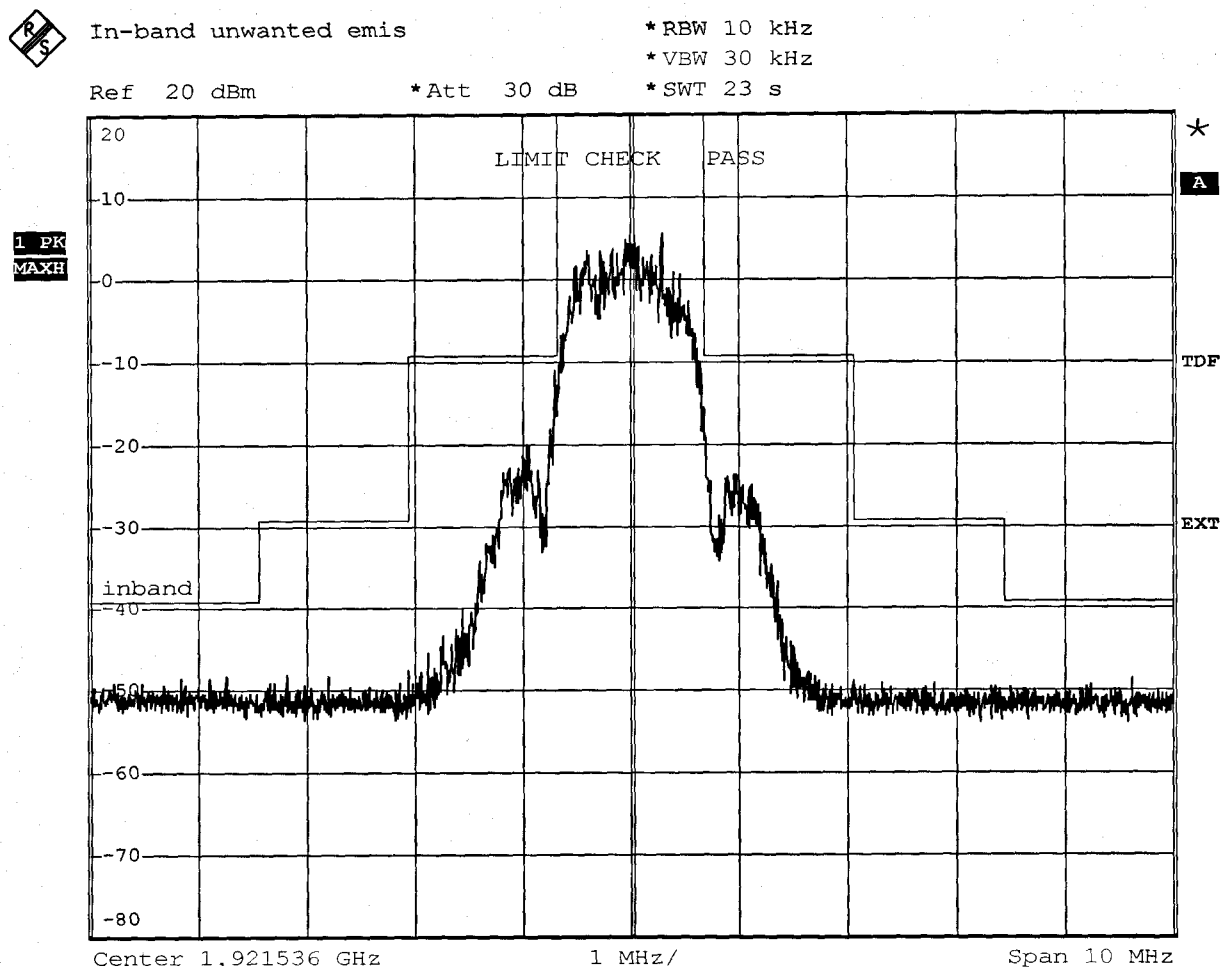

Comment: Ansi C63.17-1998 6.1.6.1
Date: 9.JUL.2005 06:57:14

Measurement diagram

FCC Part 15.323(d.2) In-band unwanted emission

Test procedure Rev. Draft ANSI 63.17-1998 6.1.6.1

UPCS

EUT	Remote fixed part
Model	BS-330
Applicant	Ascom Tateco AB
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission
Bandwidth used	1.376MHz



In-band unwanted emis

*RBW 10 kHz


*VBW 30 kHz

*SWT 23 s

Ref 20 dBm

*Att 30 dB

1 PK
MAXH

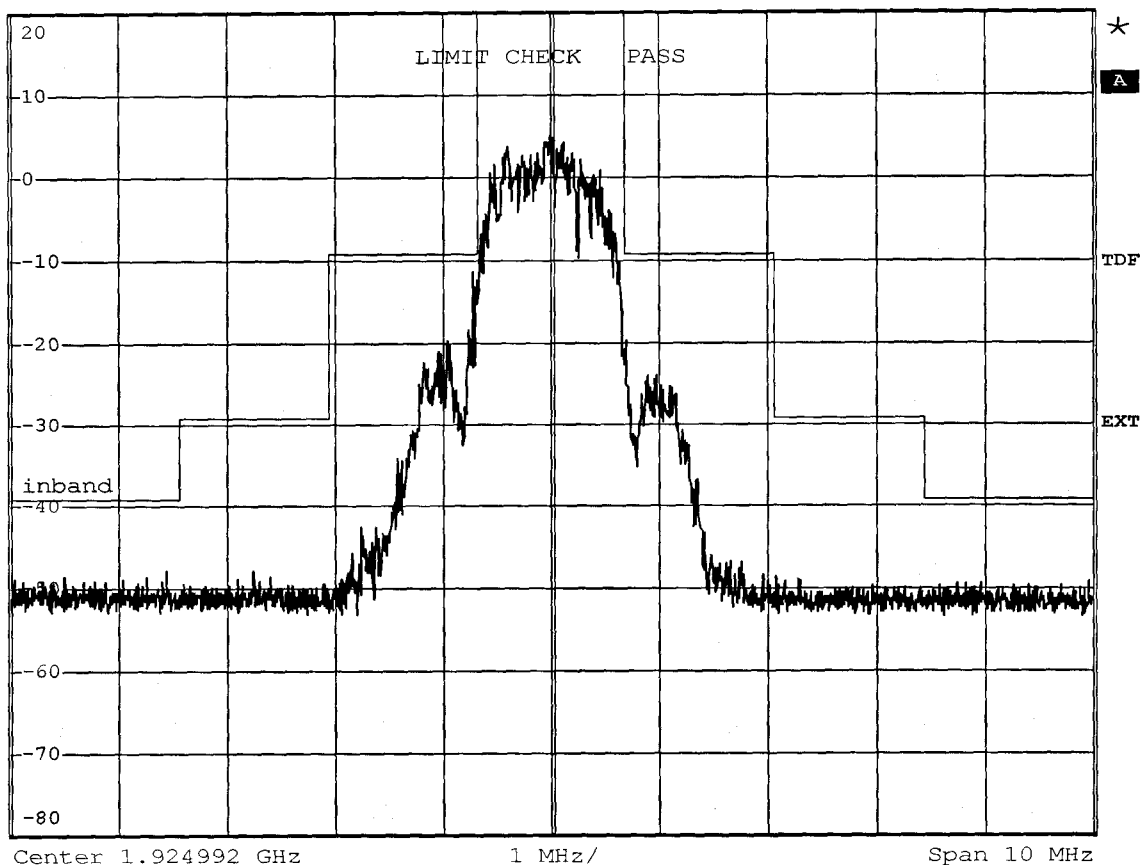

Comment: Ansi C63.17-1998 6.1.6.1

Date: 9.JUL.2005 07:00:01

Measurement diagram

FCC Part 15.323(d.2) In-band unwanted emission

Test procedure Rev. Draft ANSI 63.17-1998 6.1.6.1
UPCS

EUT	Remote fixed part
Model	BS-330
Applicant	Ascom Tateco AB
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission
Bandwidth used	1.376MHz



In-band unwanted emis


*RBW 10 kHz

*VBW 30 kHz

*SWT 23 s

Ref 20 dBm

*Att 30 dB

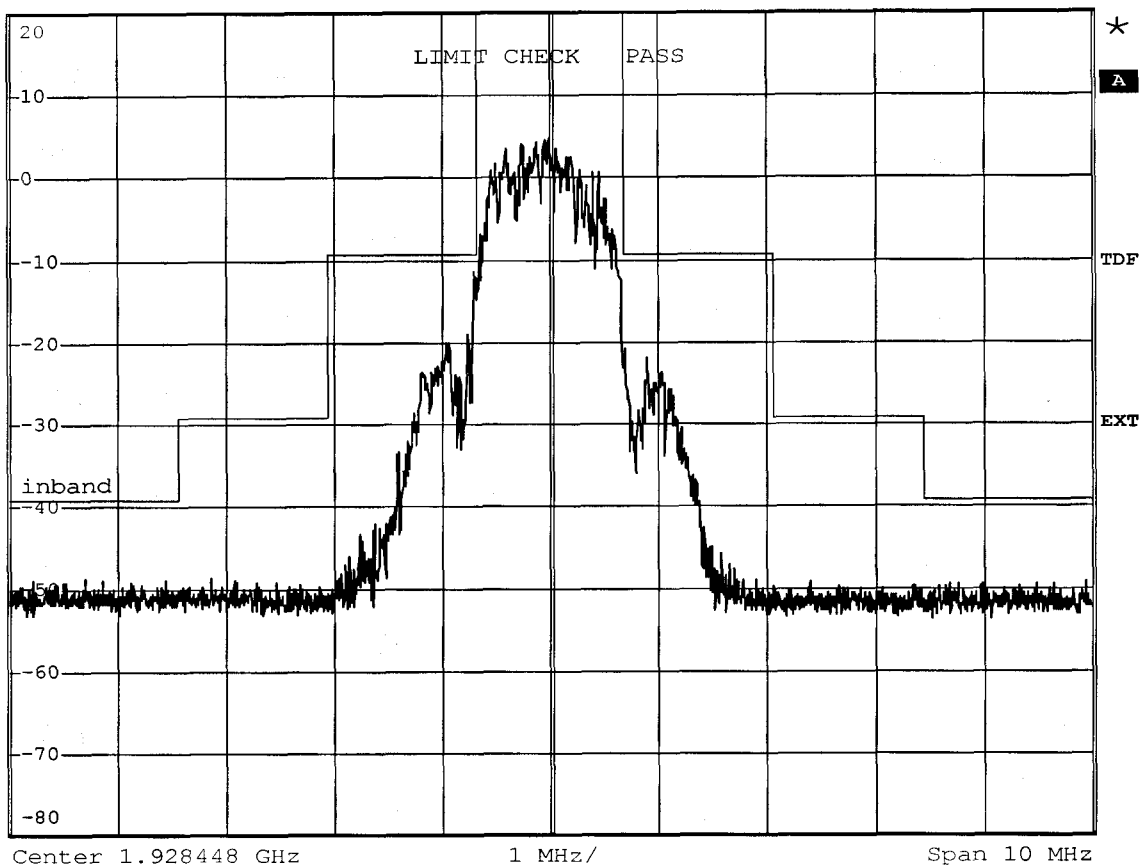1 PK
MAXH

Comment: Ansi C63.17-1998 6.1.6.1

Date: 9.JUL.2005 07:02:26

Measurement diagram

FCC Part 15.323(d.1) Out-of-band emission

Test procedure Rev. Draft ANSI 63.17-1998 6.1.6.2
UPCS

EUT	Remote fixed part
Model	BS-330
Applicant	Ascom Tateco AB
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.2 Out-of-band emission

measurement on the lowest carrier
Carrier=1921.536MHz



Out-of-band emission

*RBW 10 kHz


*VBW 30 kHz

*SWT 23 s

Ref 25 dBm

*Att 40 dB

1 PK
MAXH

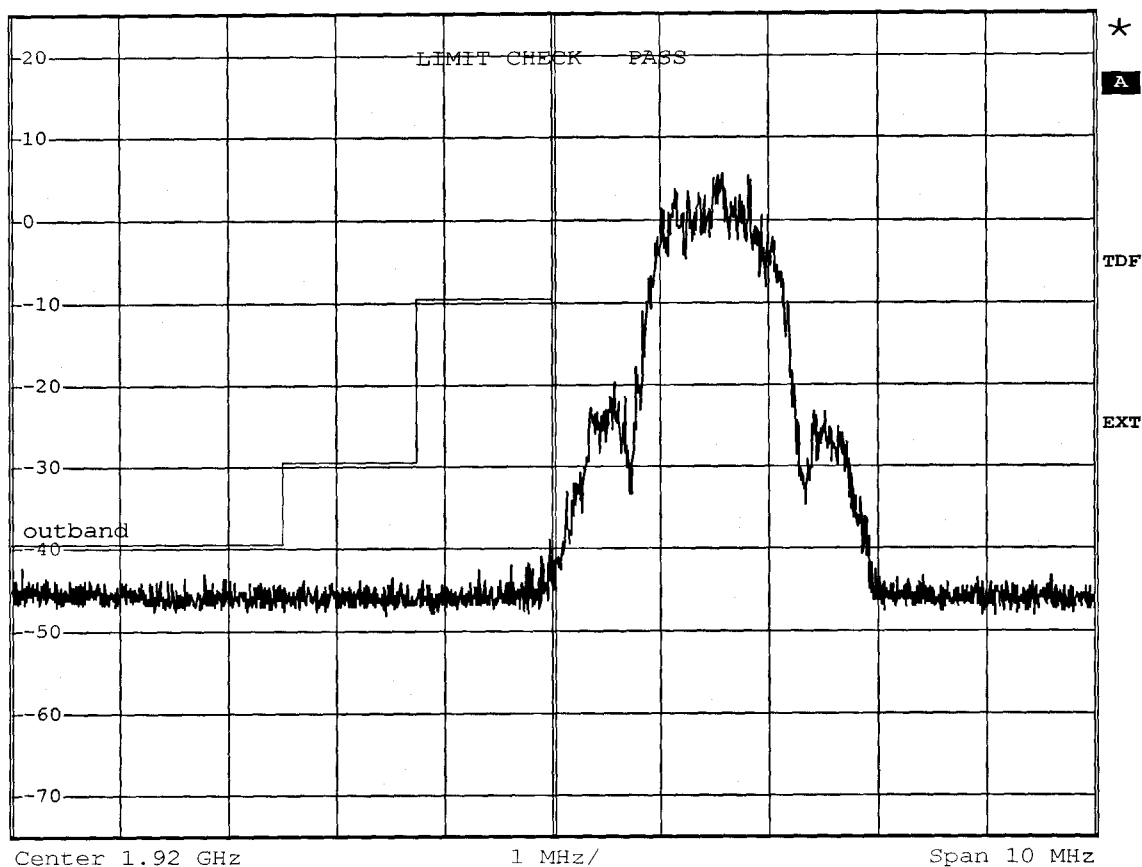

Comment: Ansi C63.17-1998 6.1.6.2
Date: 9.JUL.2005 06:58:30

Measurement diagram

FCC Part 15.323(d.1) Out-of-band emission

Test procedure Rev. Draft ANSI 63.17-1998 6.1.6.2
UPCS

EUT	Remote fixed part
Model	BS-330
Applicant	Ascom Tateco AB
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.2 Out-of-band emission

measurement on the highest carrier
Carrier=1928.448MHz



Out-of-band emission

*RBW 10 kHz


*VBW 30 kHz

*SWT 23 s

Ref 25 dBm

*Att 40 dB

1 PK
MAXH

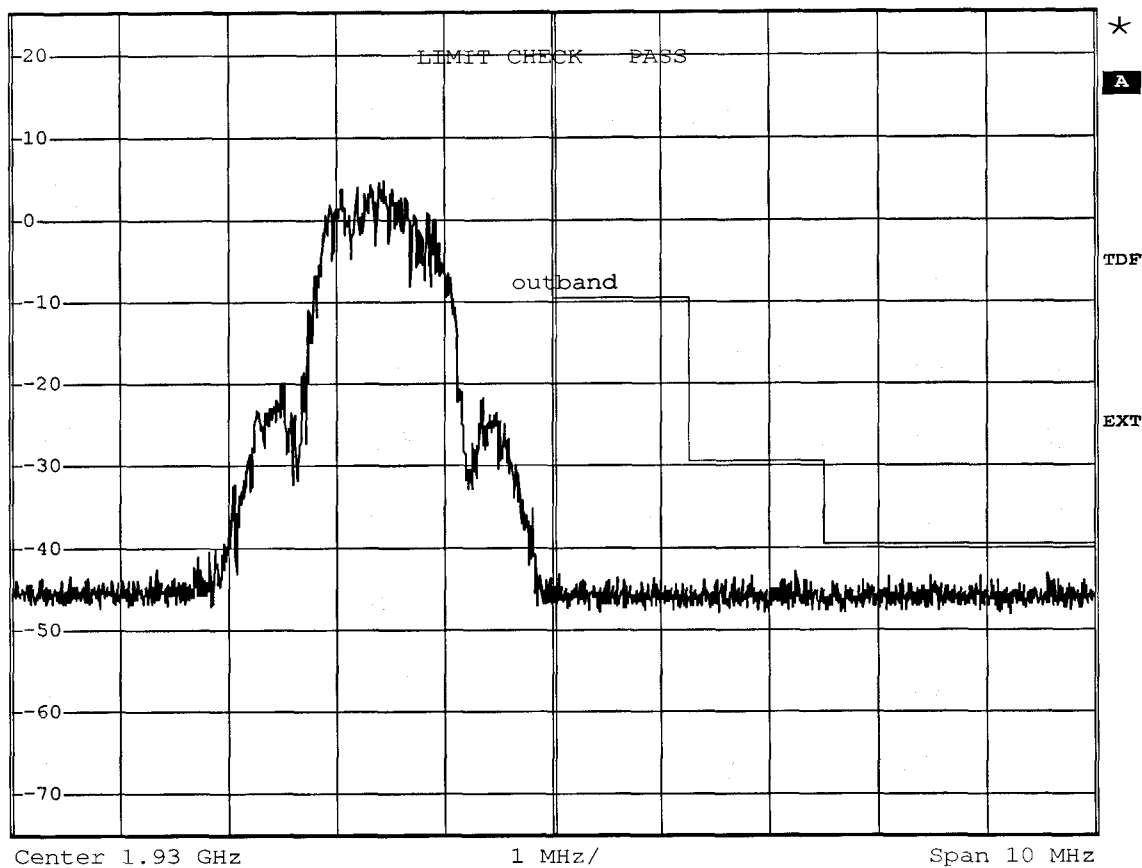


Comment: Ansi C63.17-1998 6.1.6.2

Date: 9.JUL.2005 07:03:37

Measurement diagram


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:62.024MHz Pmax:-66.82dBm RBW: 100 kHz

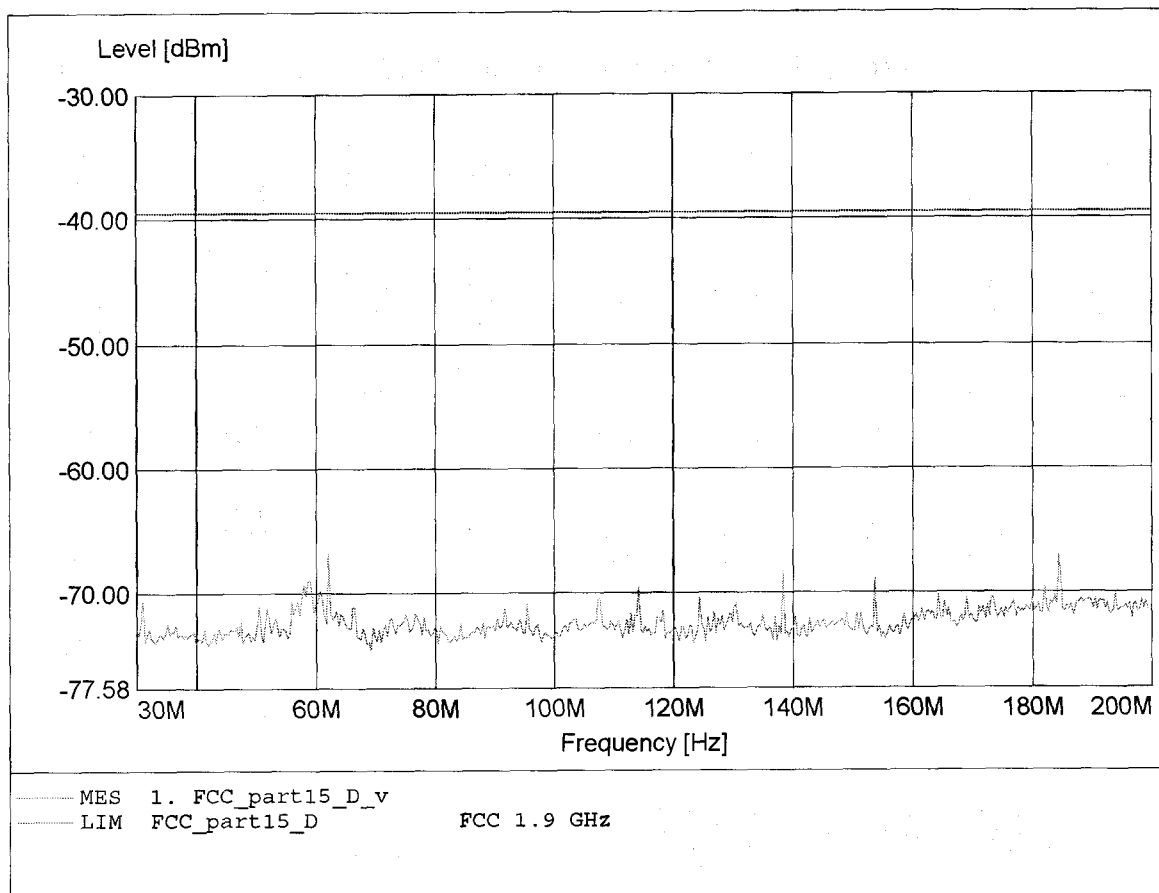


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:184.329MHz Pmax:-68.07dBm RBW: 100 kHz

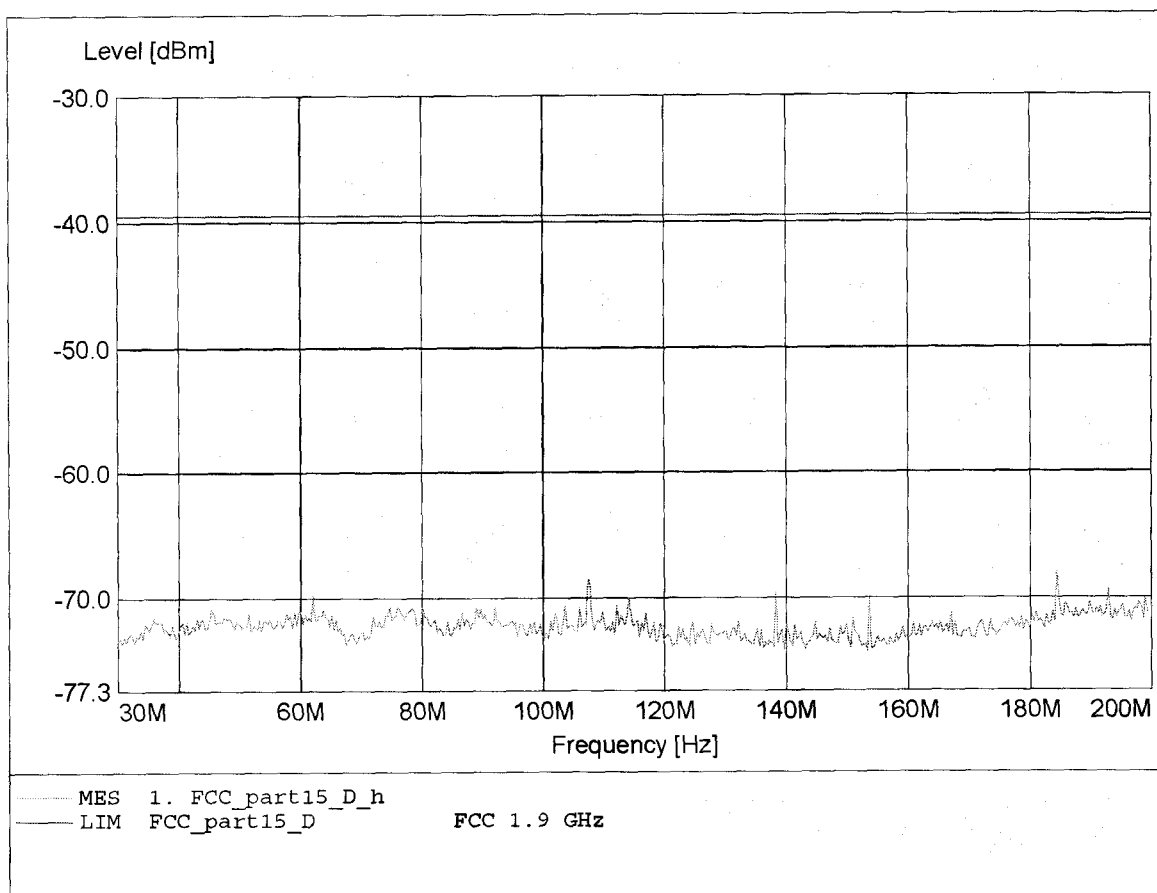


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 275.351MHz Pmax: -64.09dBm RBW: 100 kHz

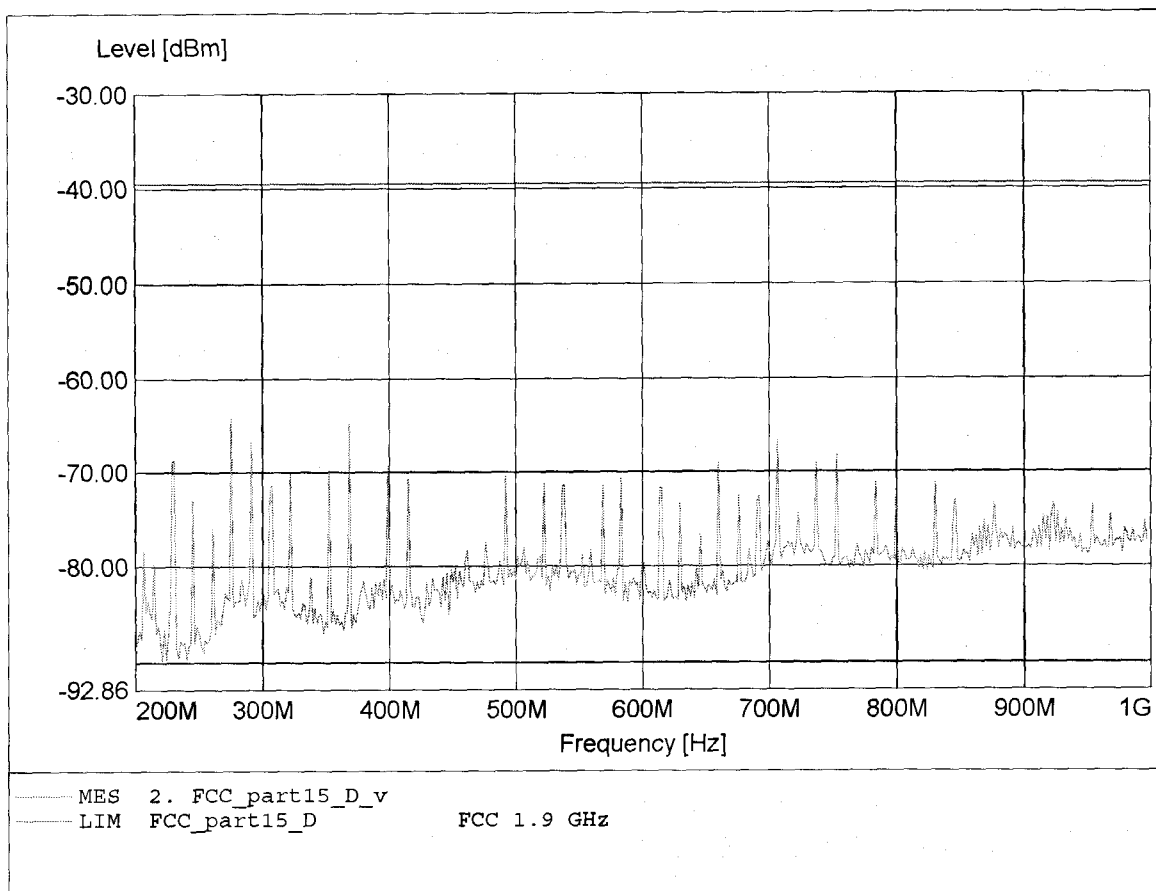


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 753.106MHz Pmax: -62.31dBm RBW: 100 kHz

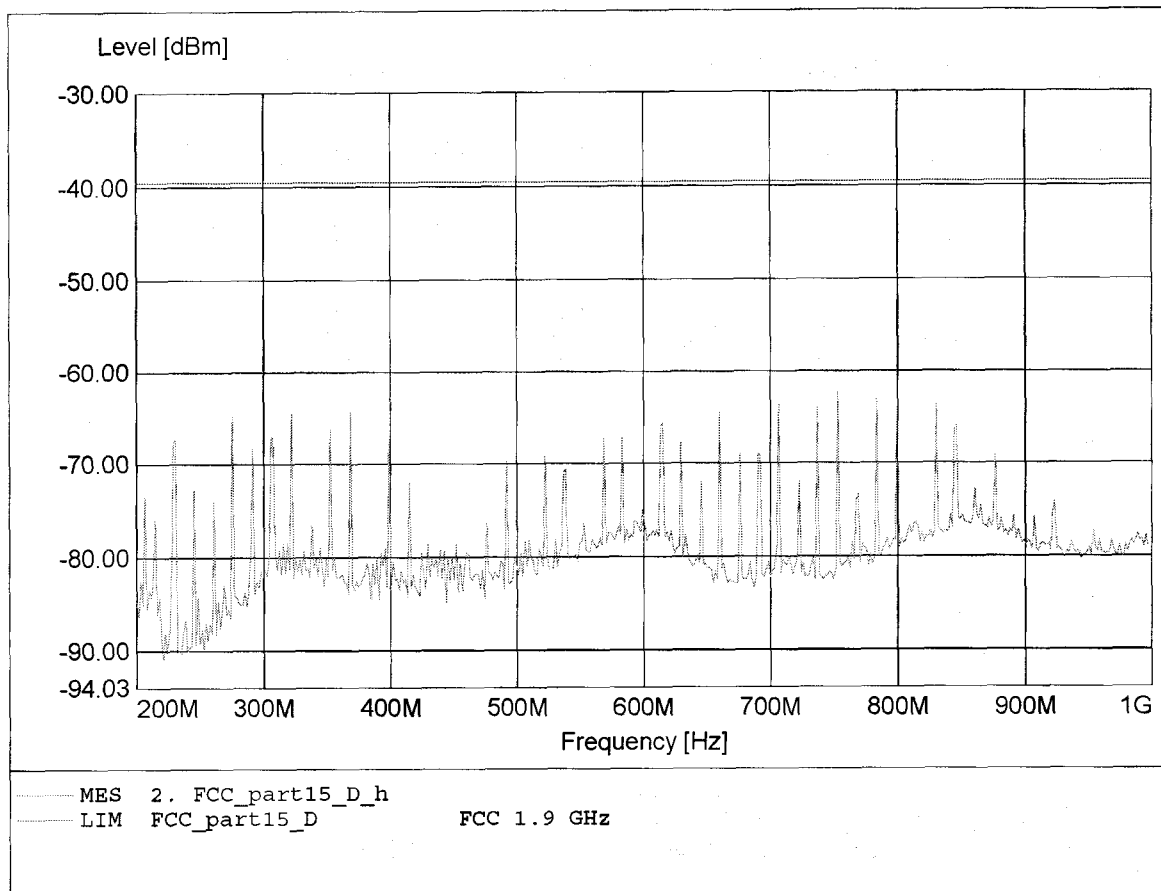


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.911GHz Pmax: -57.57dBm RBW: 1 MHz

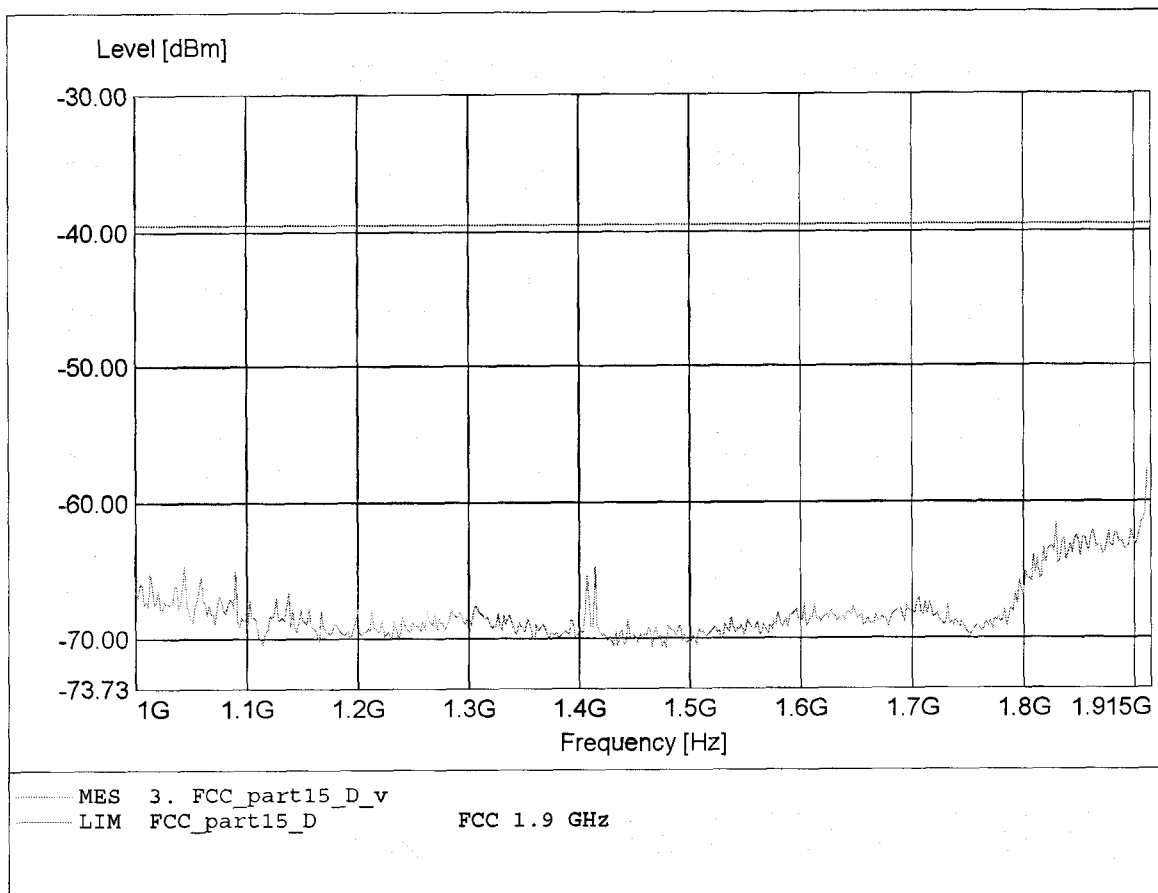


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.911GHz Pmax: -63.07dBm RBW: 1 MHz

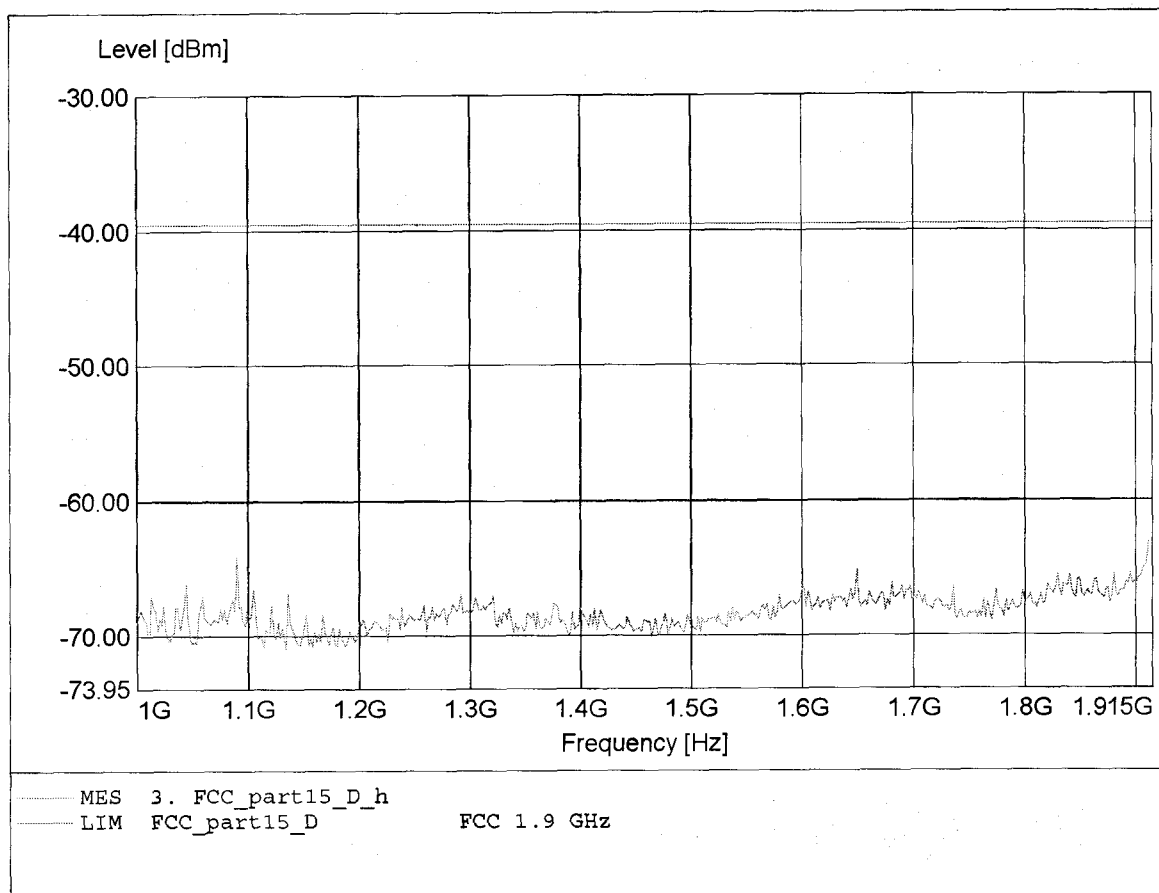


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-48.24dBm RBW:10 kHz

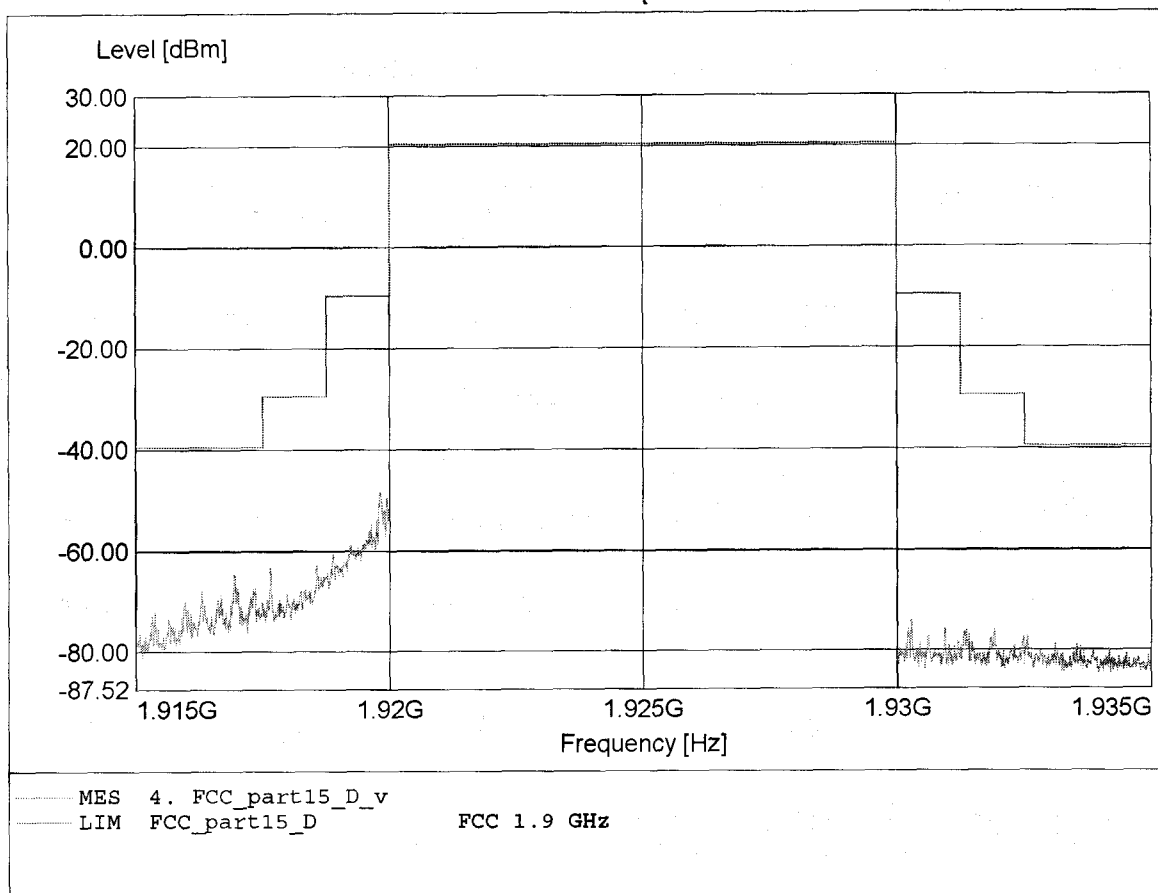


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-55.56dBm RBW:10 kHz

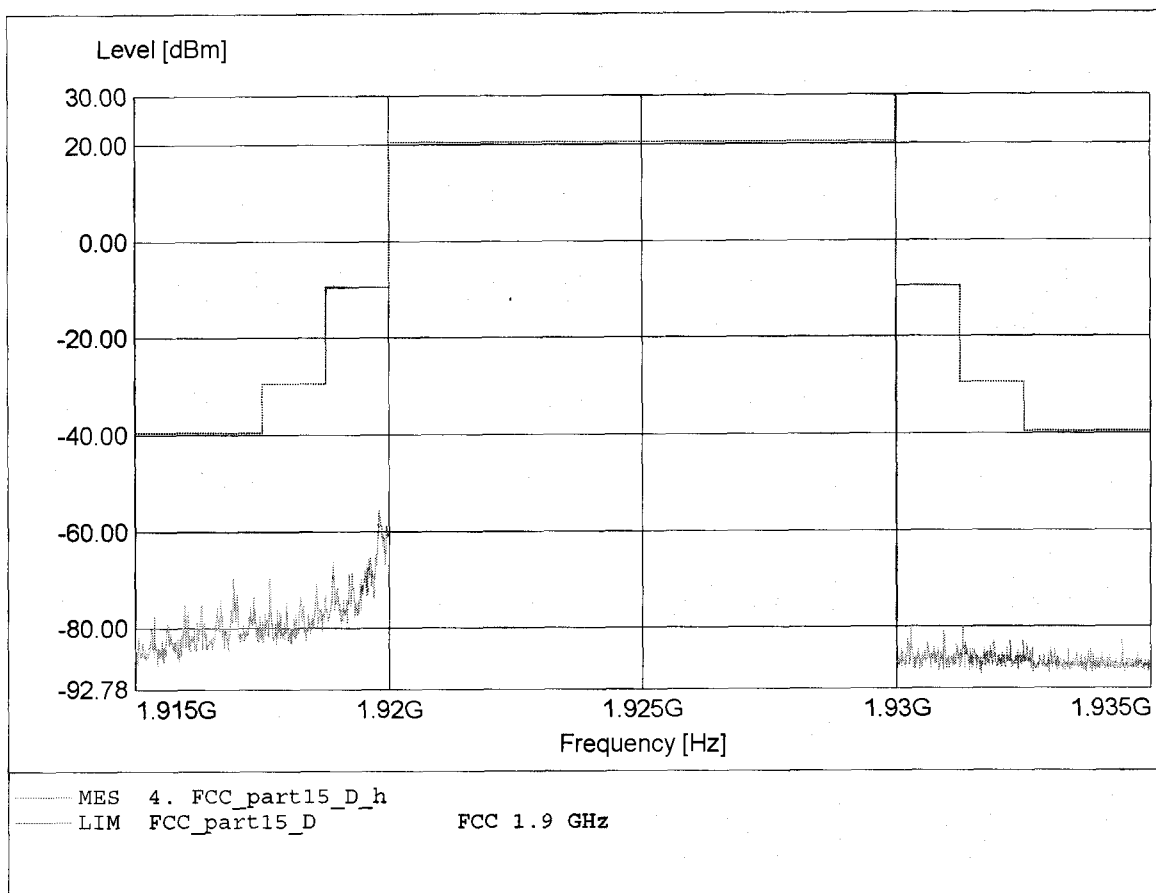


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 2.001GHz Pmax: -48.23dBm RBW: 1 MHz

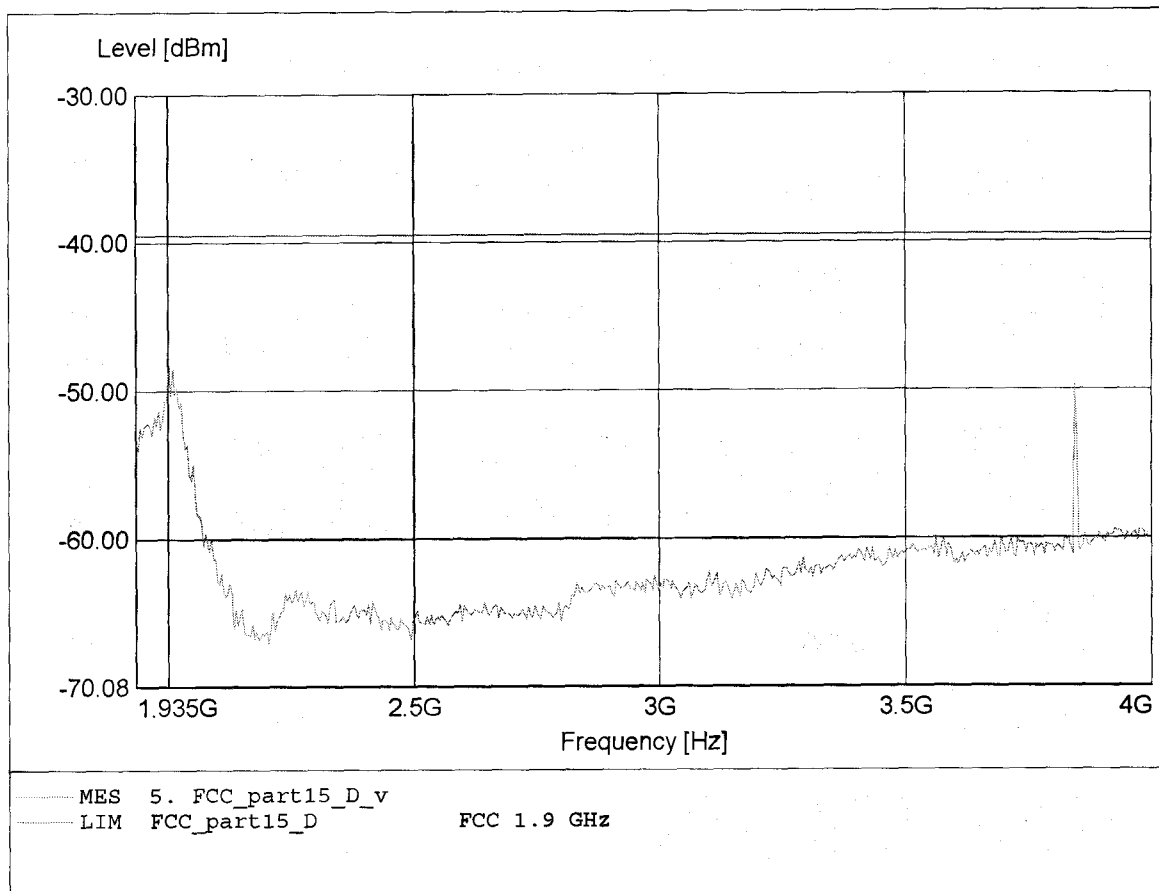


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.843GHz Pmax: -48.35dBm RBW: 1 MHz

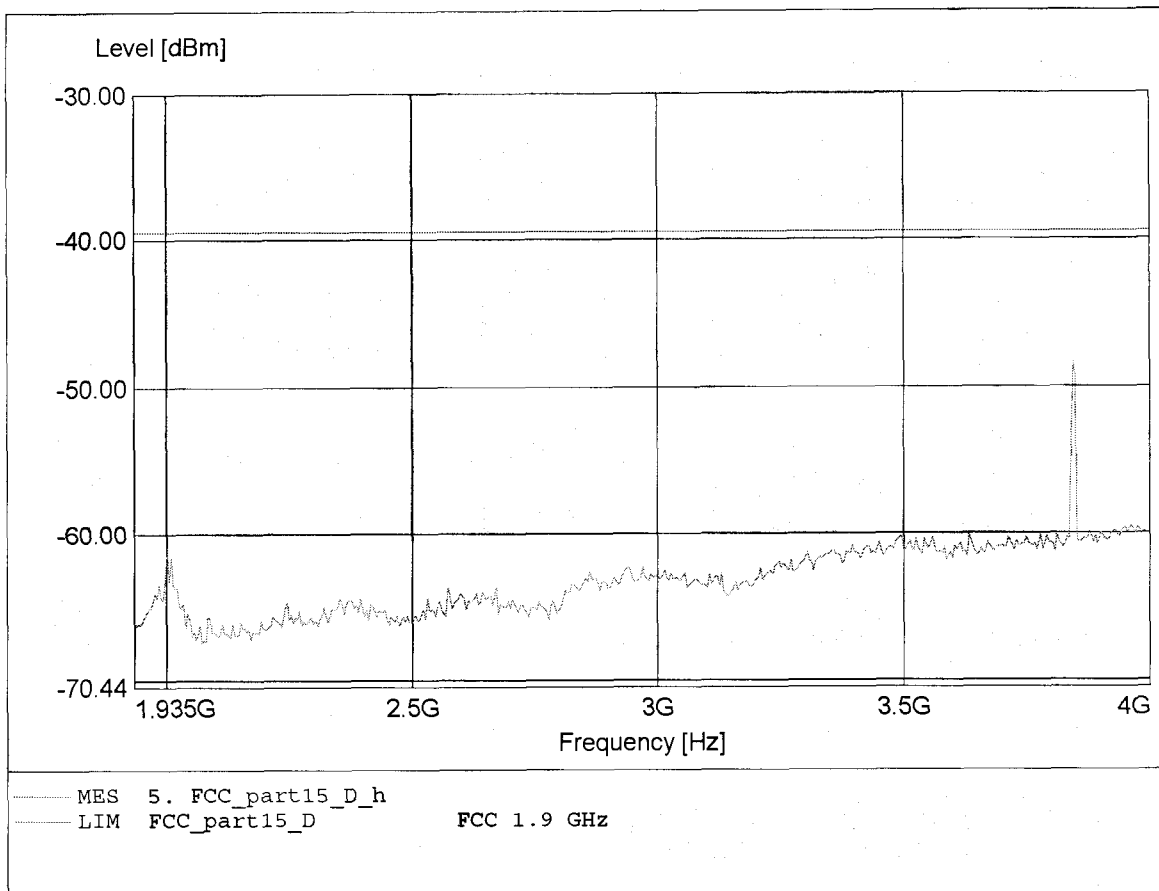


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 62.024MHz Pmax: -66.11dBm RBW: 100 kHz

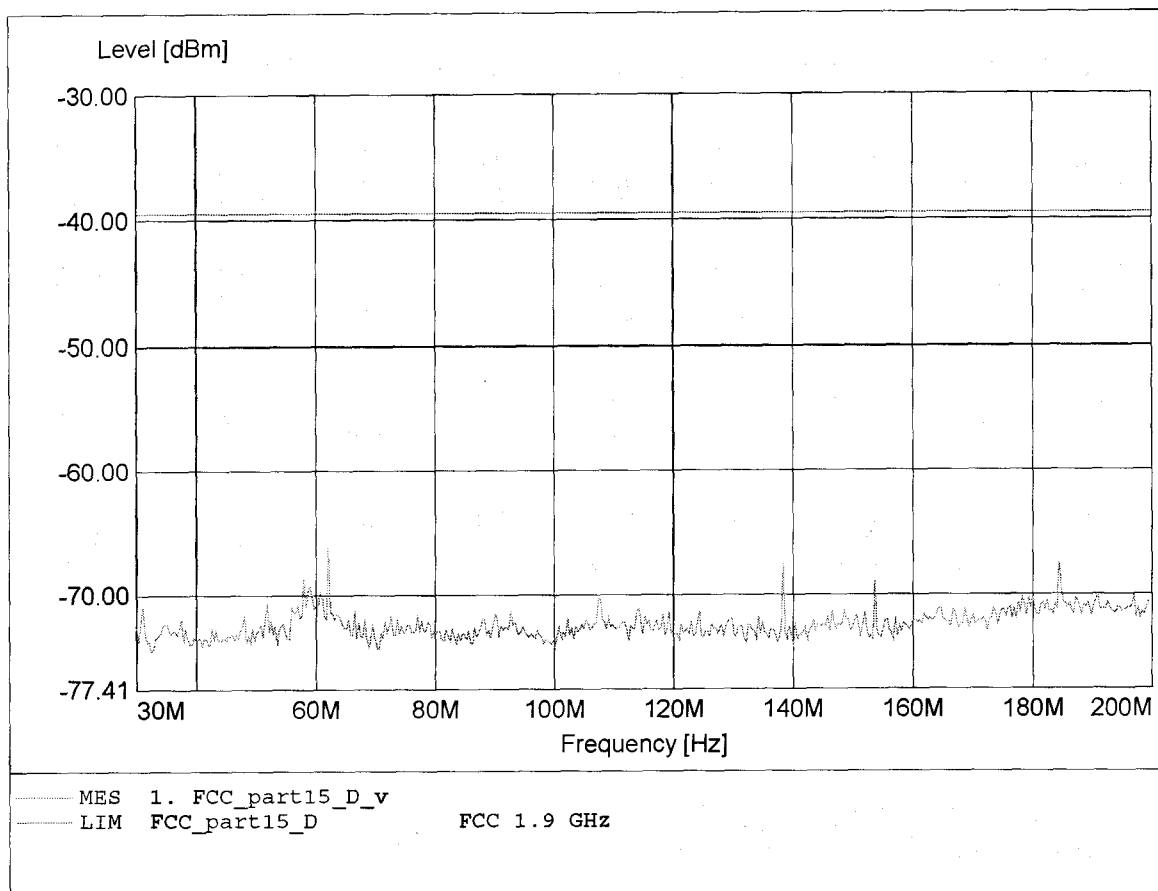


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:107.335MHz Pmax:-67.58dBm RBW: 100 kHz

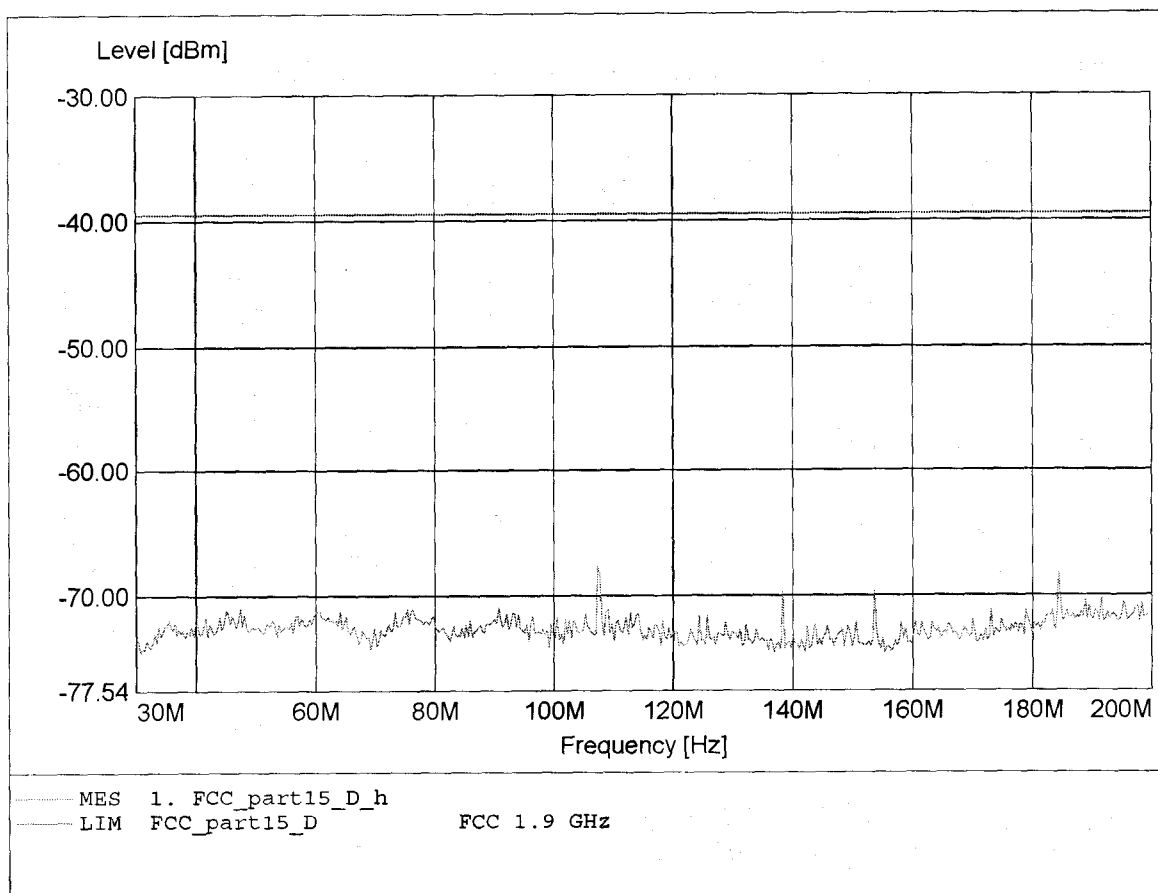


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 275.351MHz Pmax: -64.01dBm RBW: 100 kHz

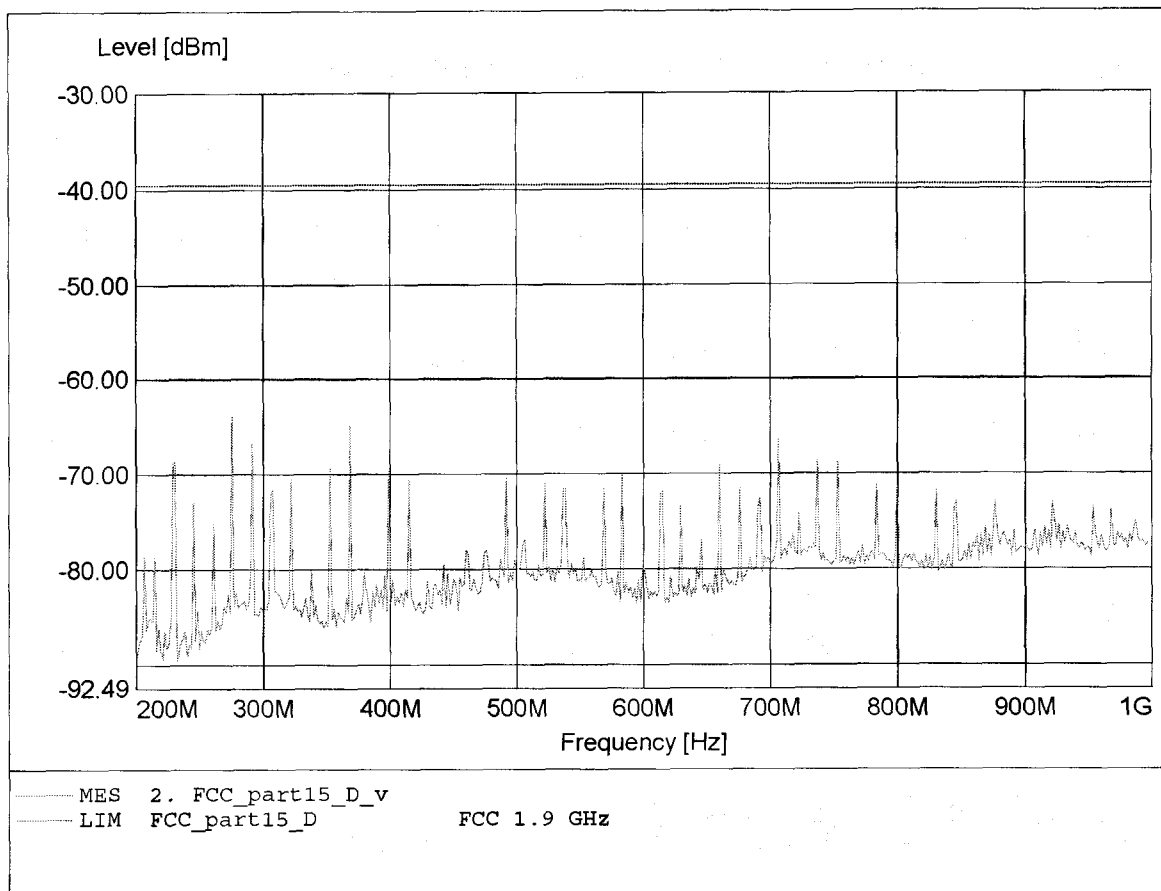


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 753.106MHz Pmax: -61.98dBm RBW: 100 kHz

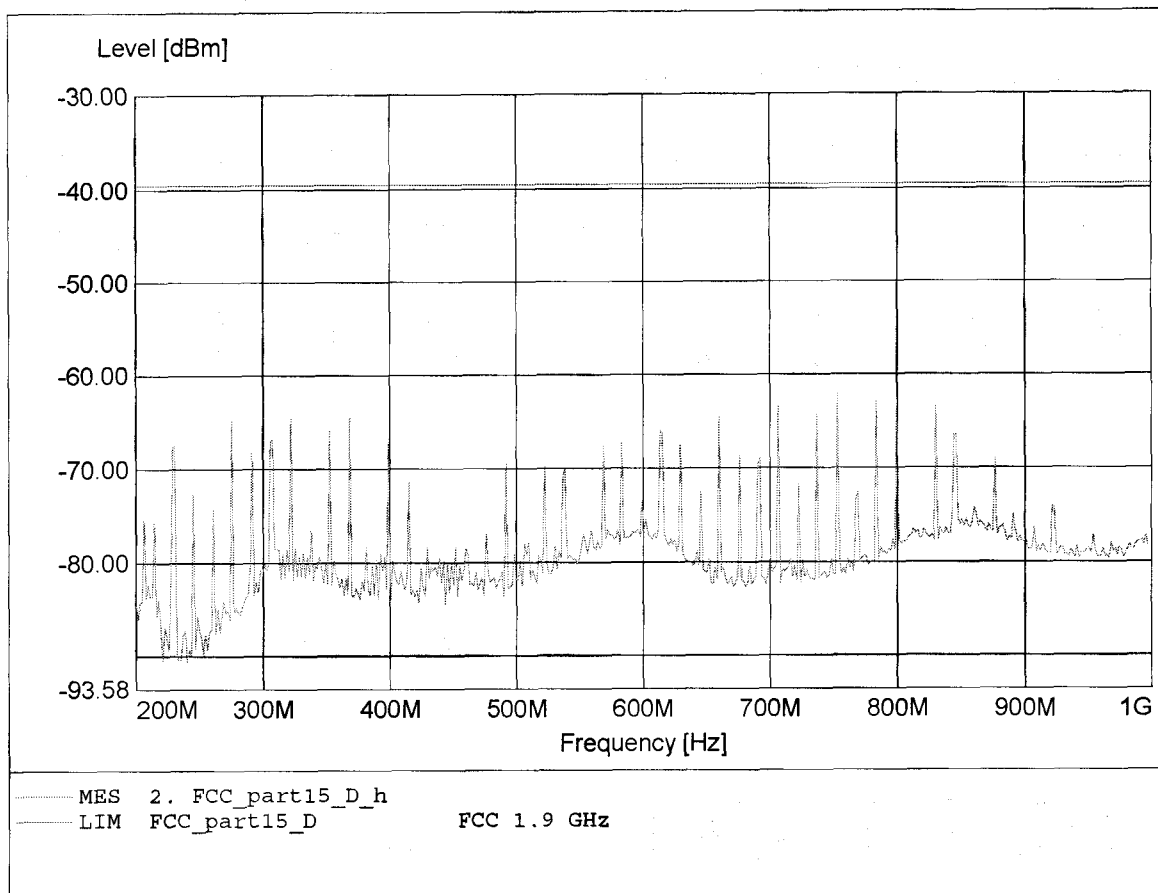


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.911GHz Pmax:-60.20dBm RBW: 1 MHz

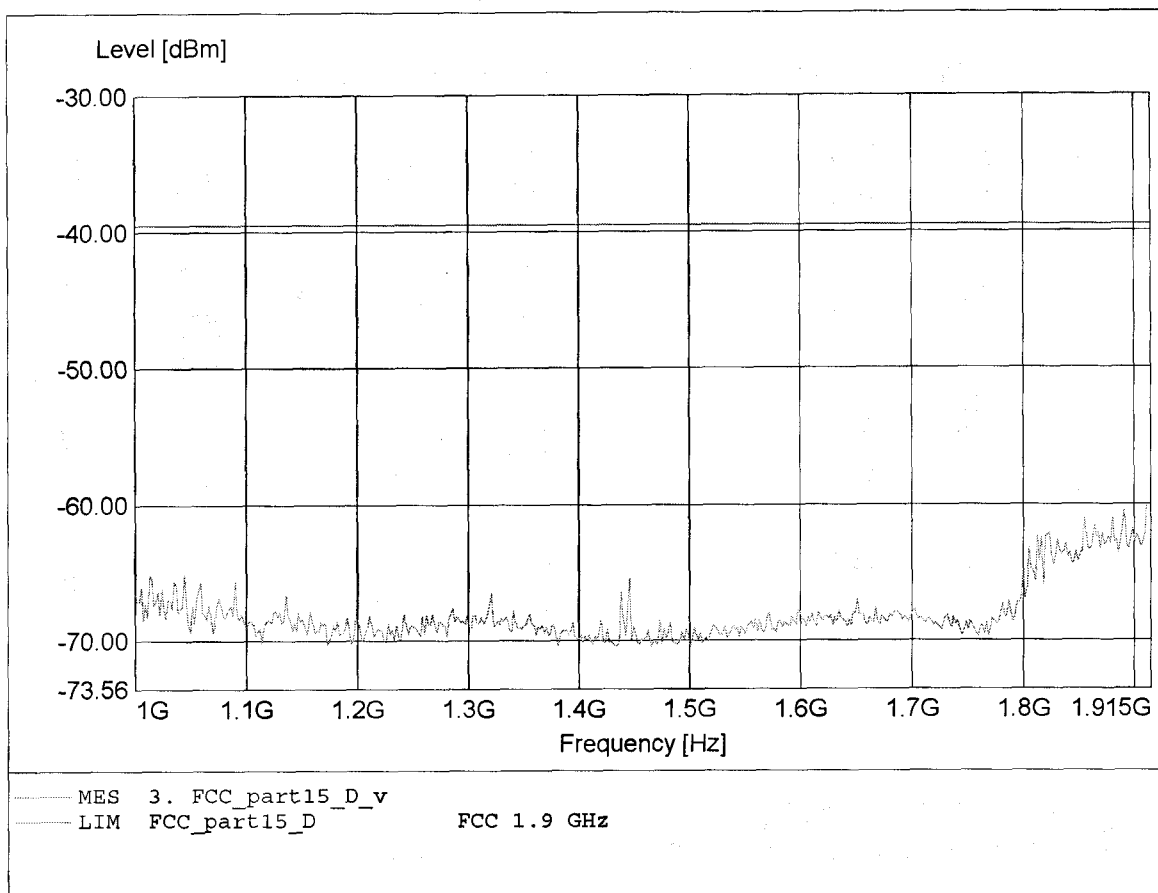


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.902GHz Pmax:-62.84dBm RBW: 1 MHz

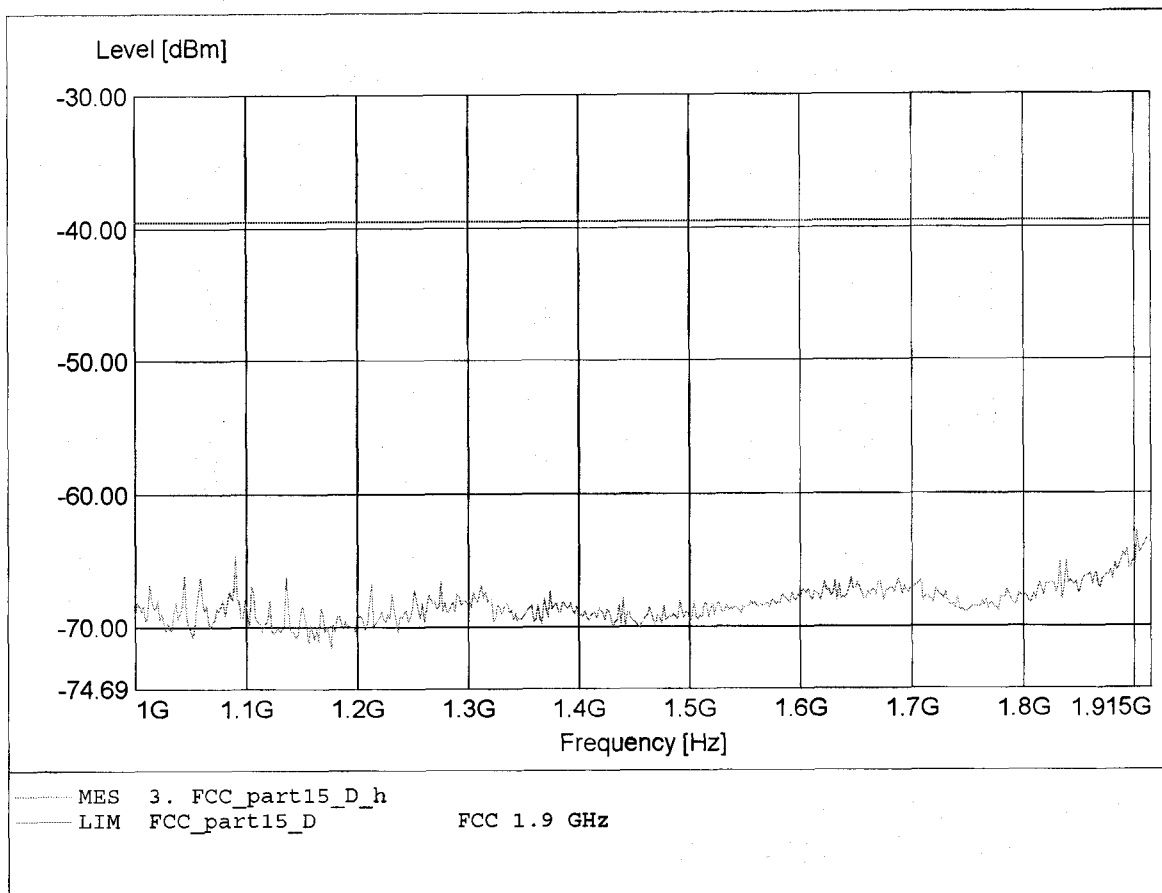


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-65.33dBm RBW:10 kHz

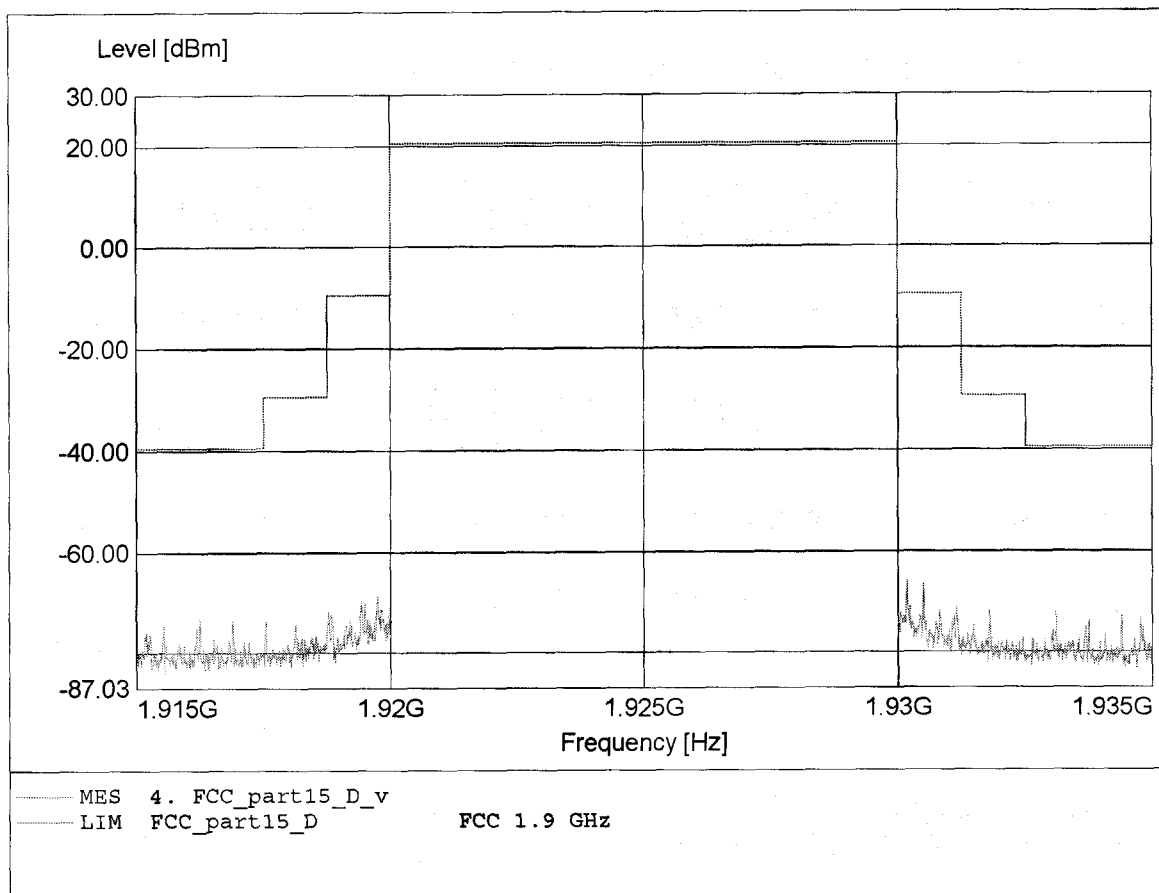


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-72.97dBm RBW:10 kHz

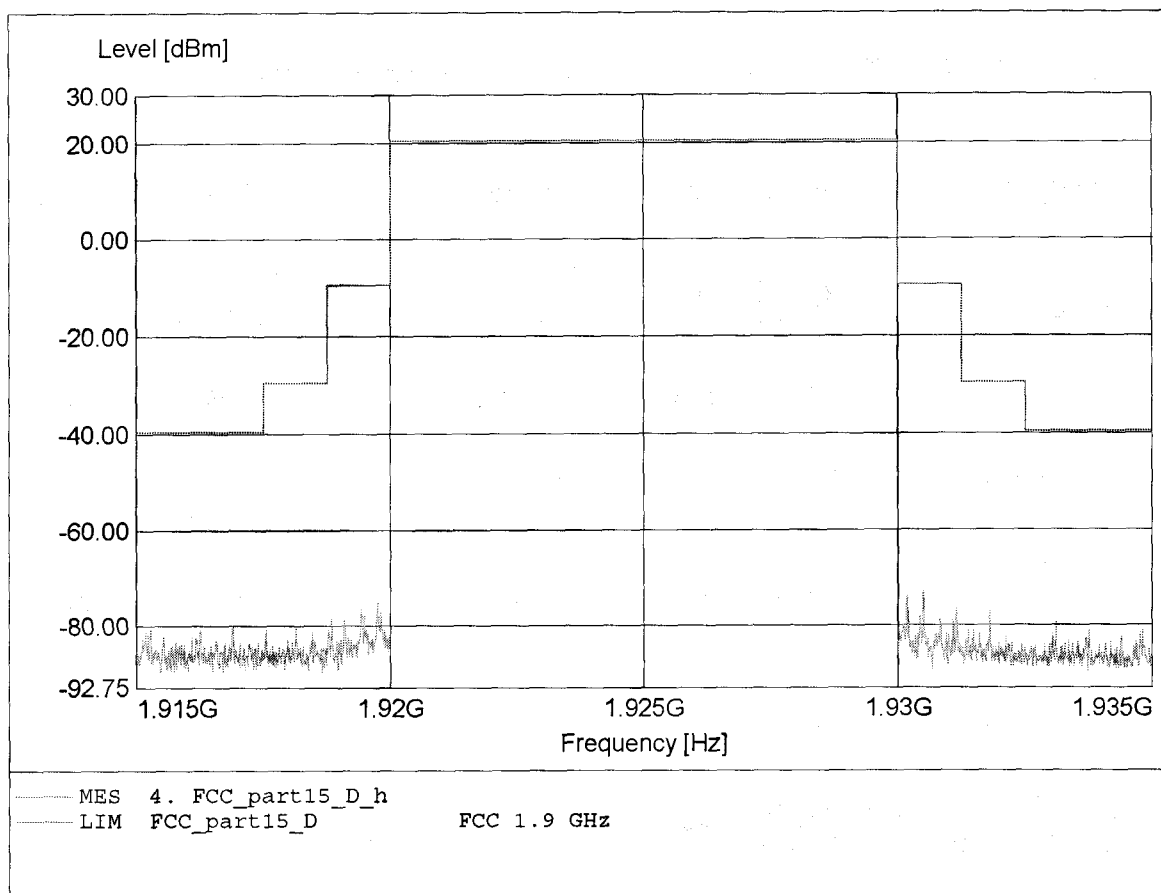


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 2.009GHz Pmax: -48.18dBm RBW: 1 MHz

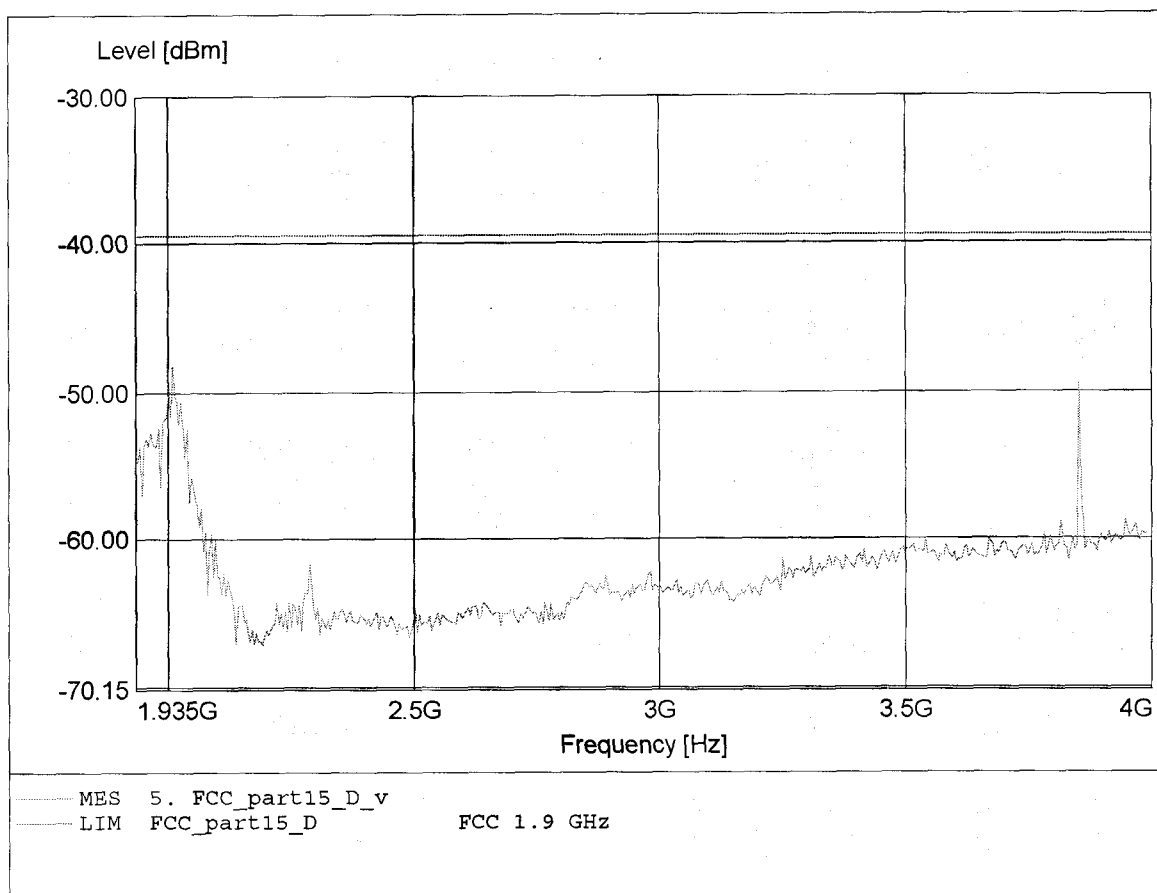


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.851GHz Pmax: -50.08dBm RBW: 1 MHz

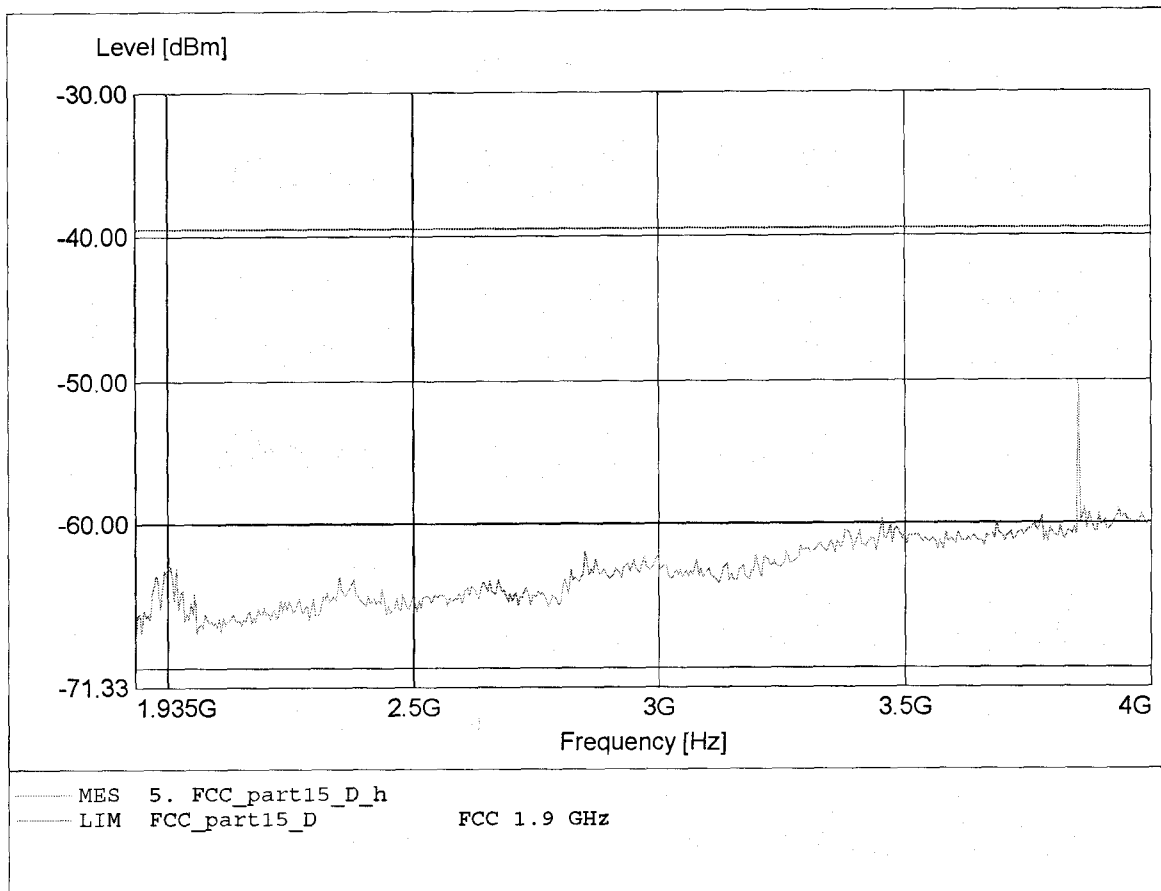


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 62.024MHz Pmax: -66.96dBm RBW: 100 kHz

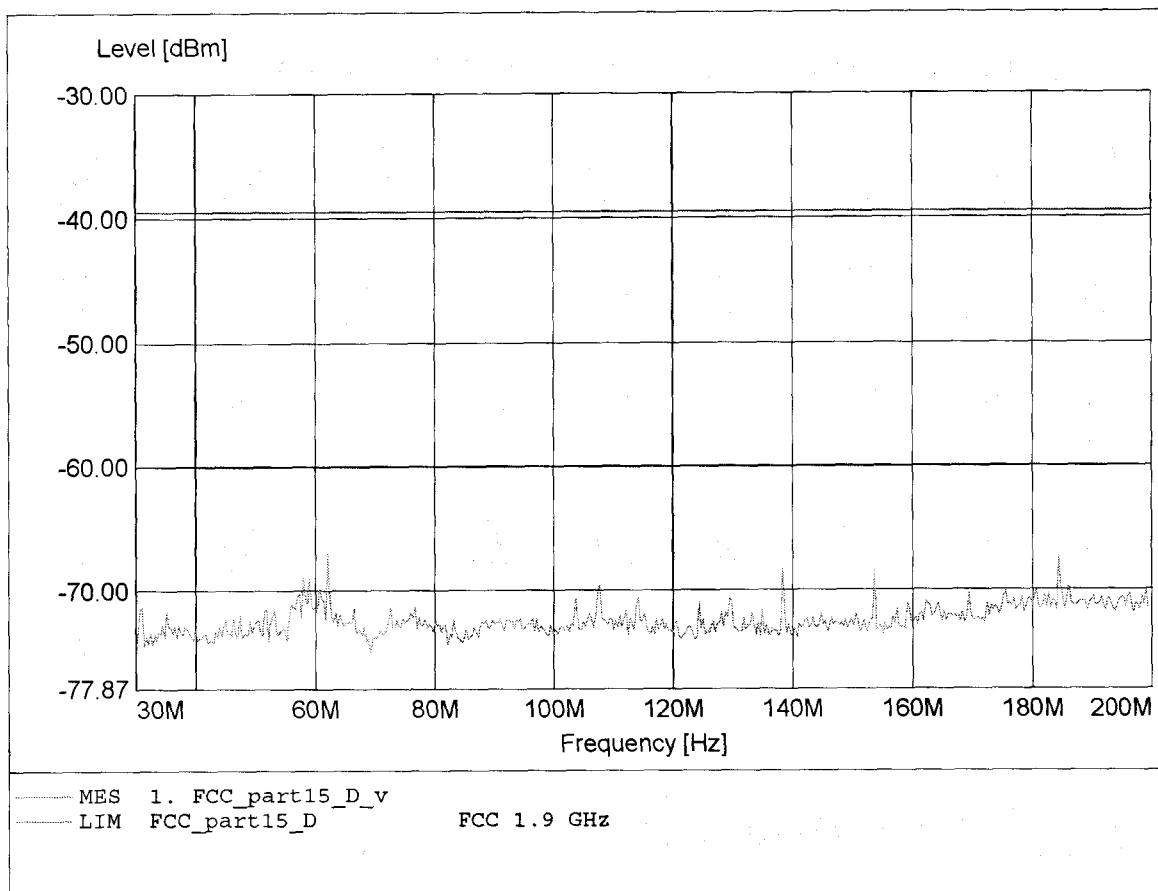


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:184.329MHz Pmax:-68.02dBm RBW: 100 kHz

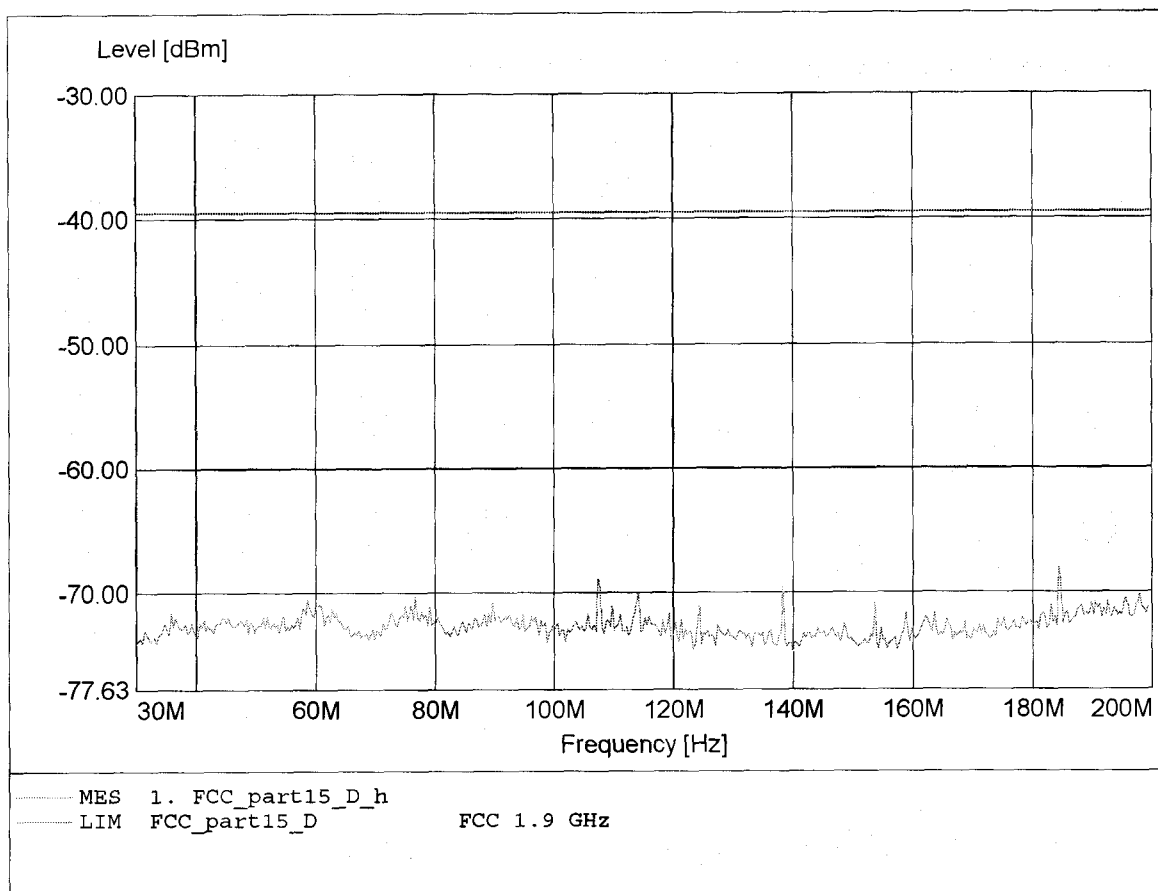


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 275.351MHz Pmax: -64.53dBm RBW: 100 kHz

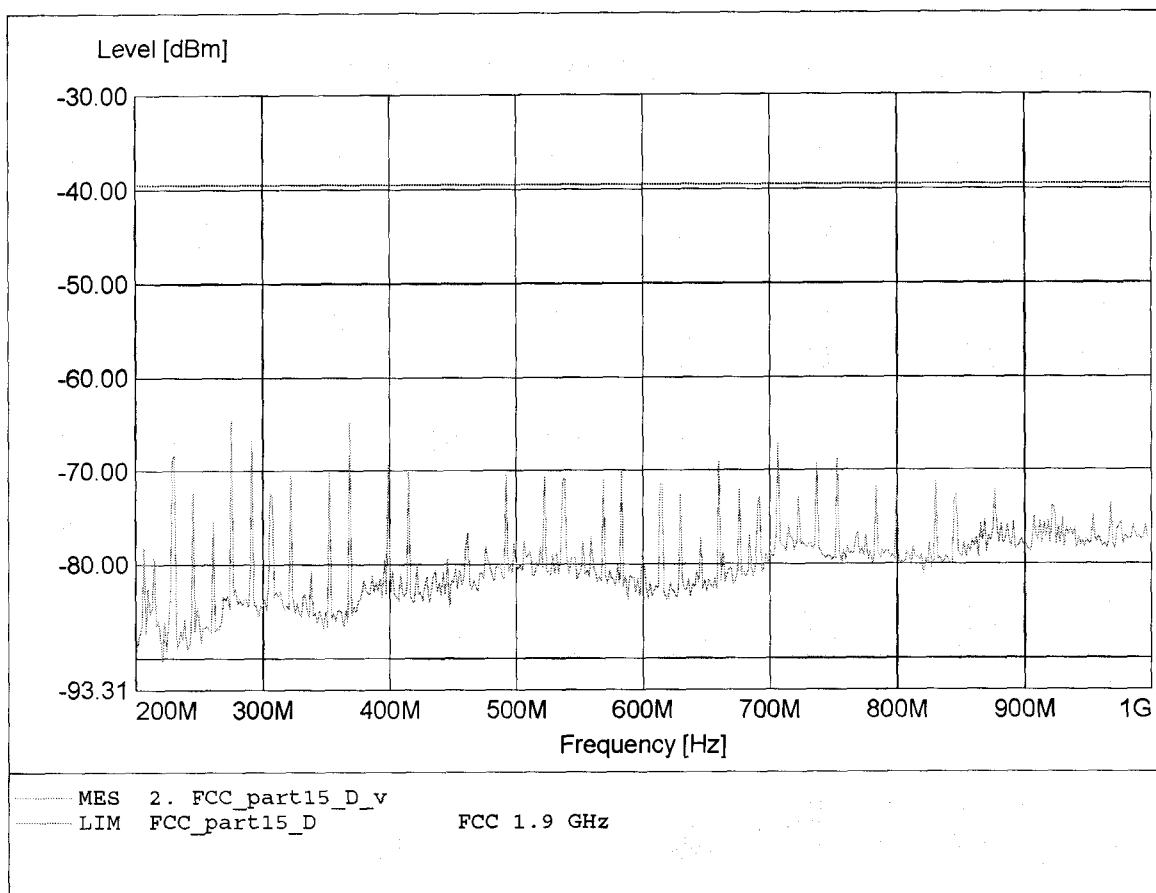


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 753.106MHz Pmax: -62.06dBm RBW: 100 kHz

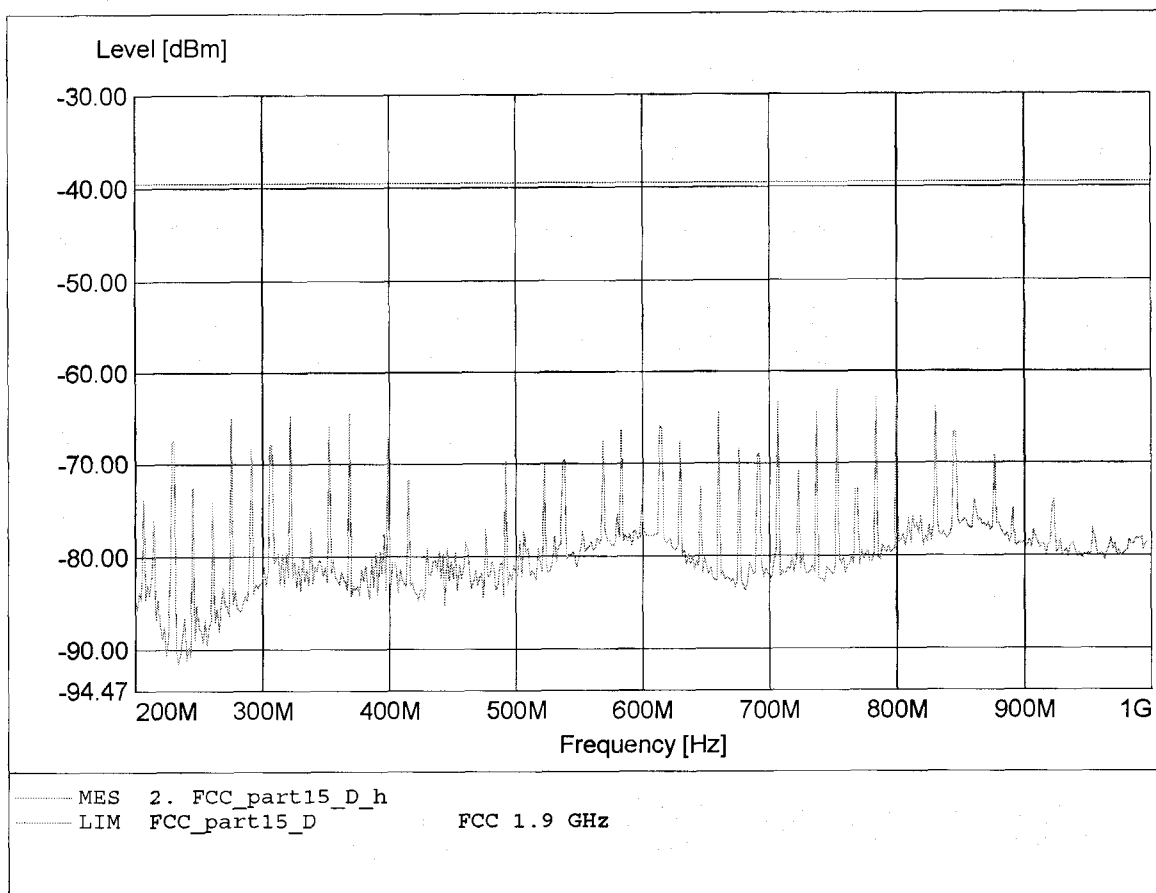


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.893GHz Pmax: -61.55dBm RBW: 1 MHz

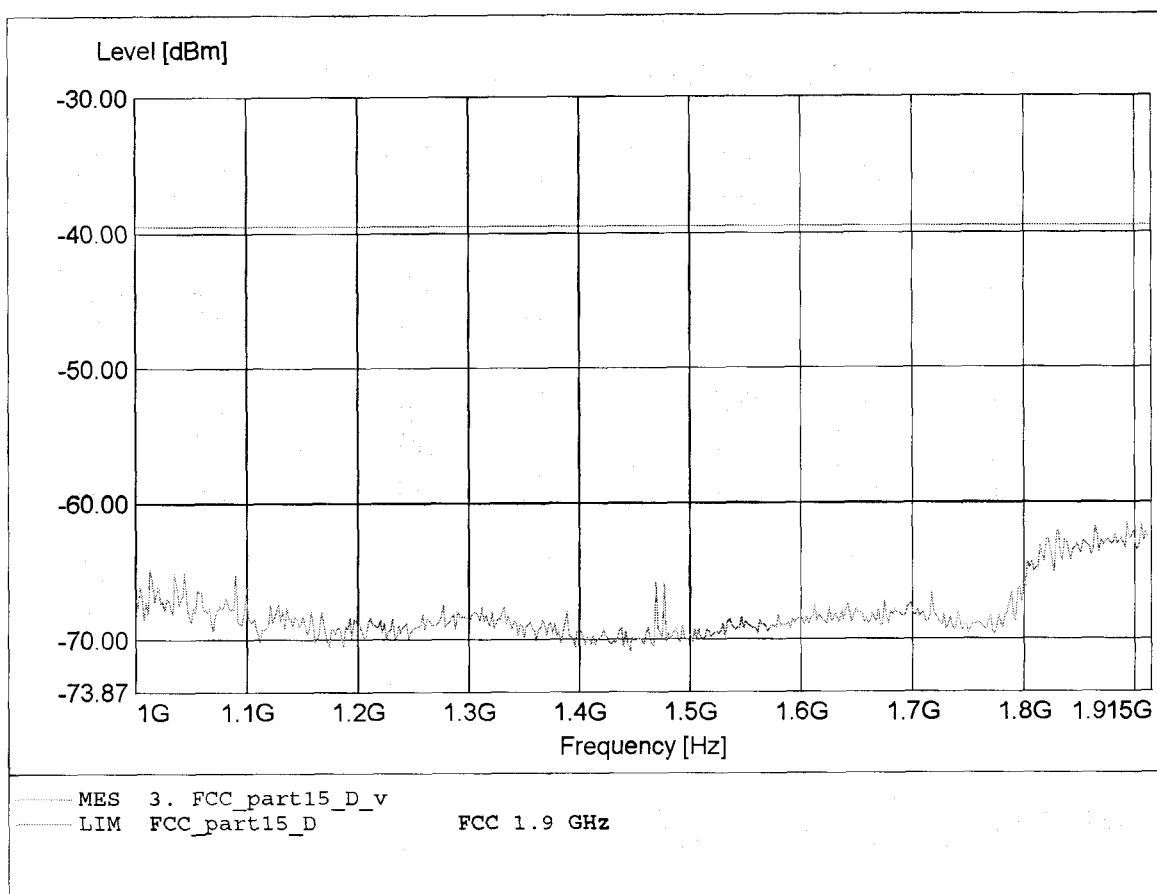


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.090GHz Pmax:-63.44dBm RBW: 1 MHz

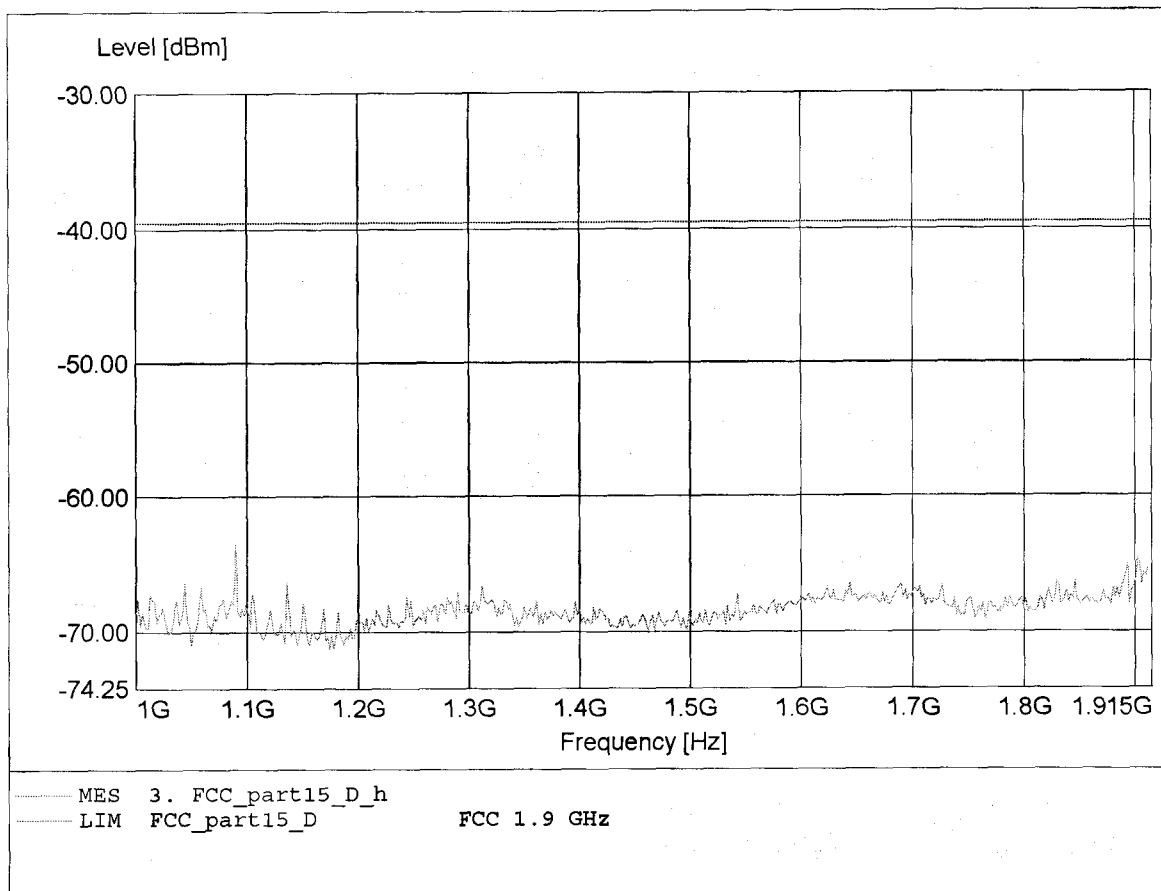


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-45.84dBm RBW:10 kHz

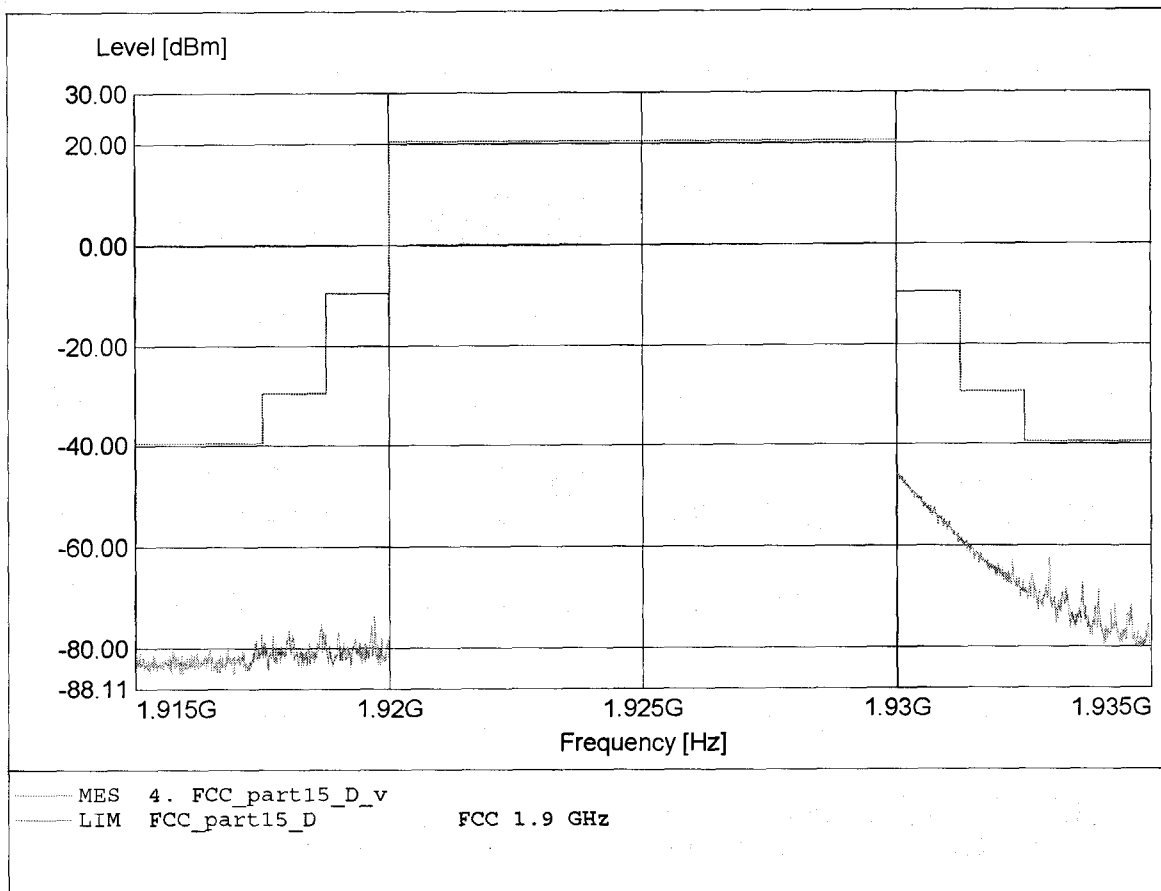


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-60.03dBm RBW:10 kHz

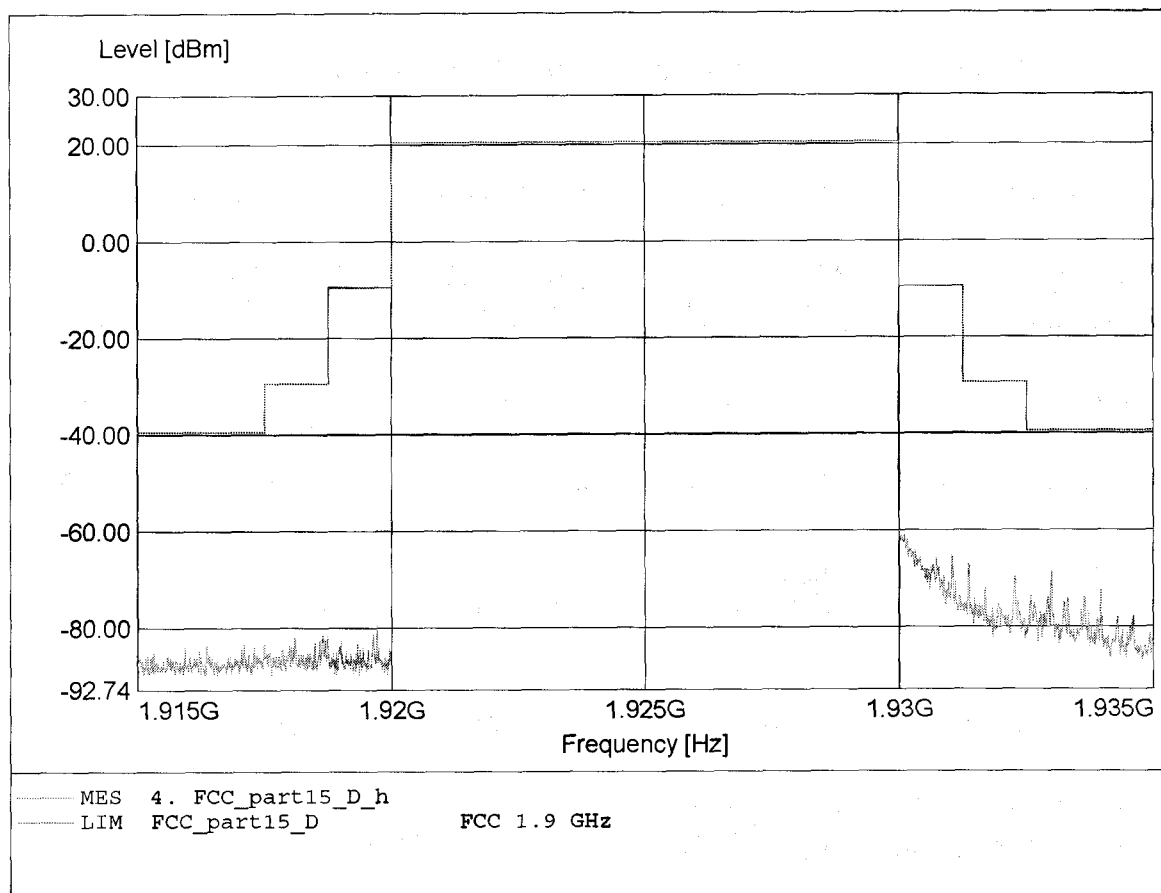


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 2.014GHz Pmax: -49.50dBm RBW: 1 MHz

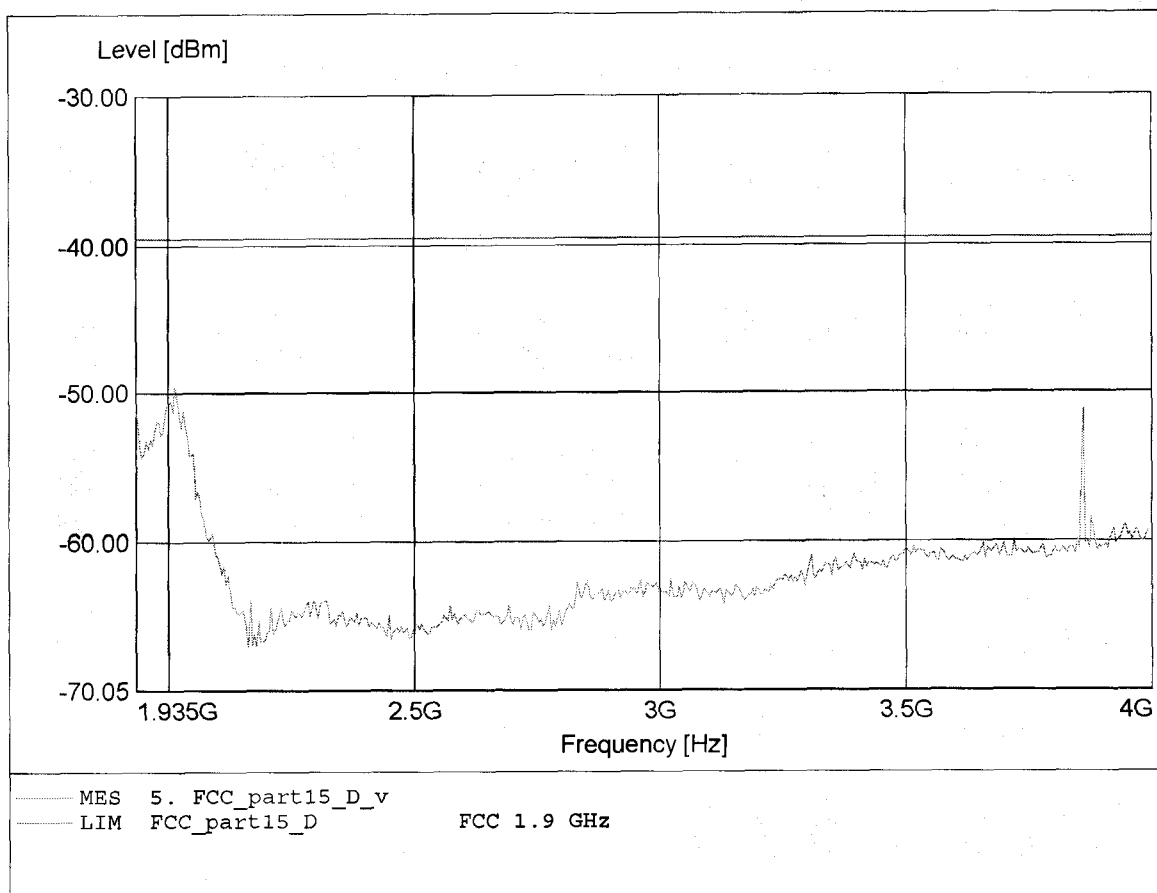

Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D


Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.859GHz Pmax: -50.96dBm RBW: 1 MHz

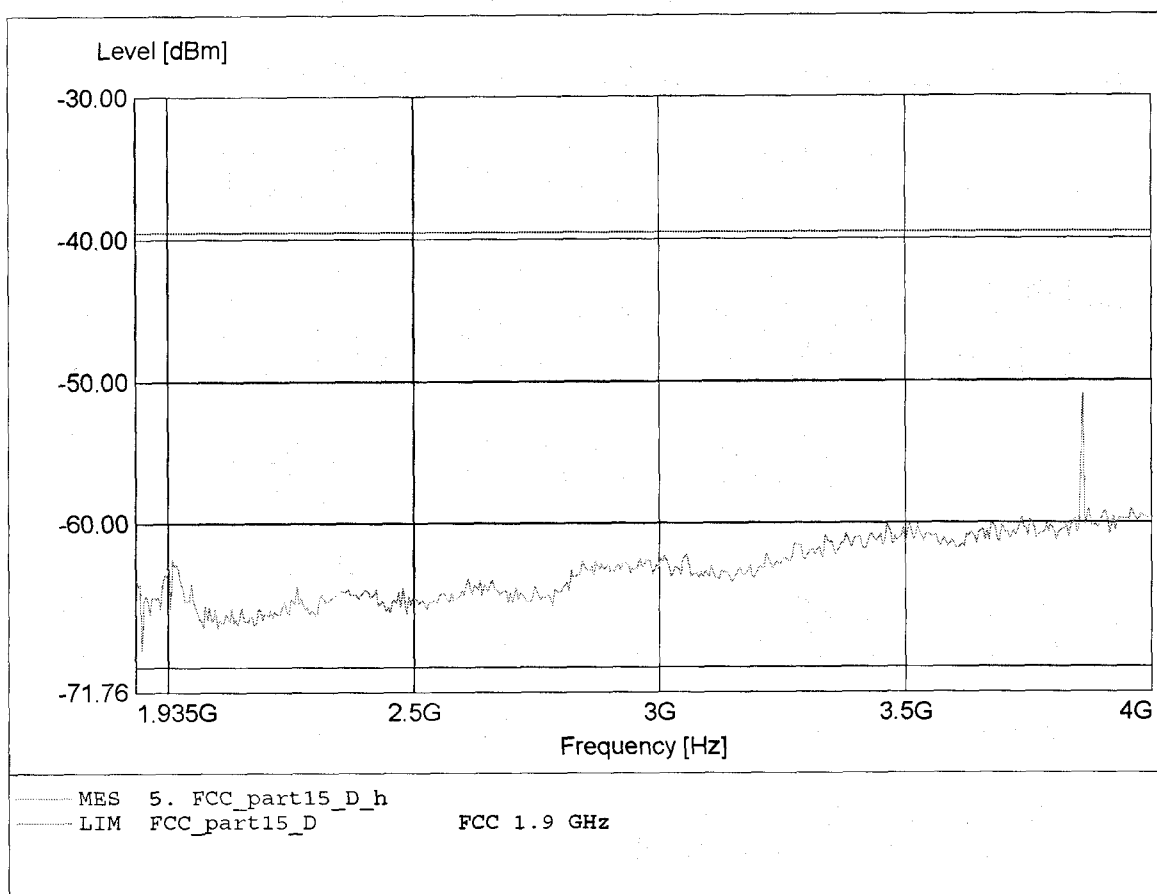

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.844GHz Pmax:-49.35dBm RBW:10 kHz

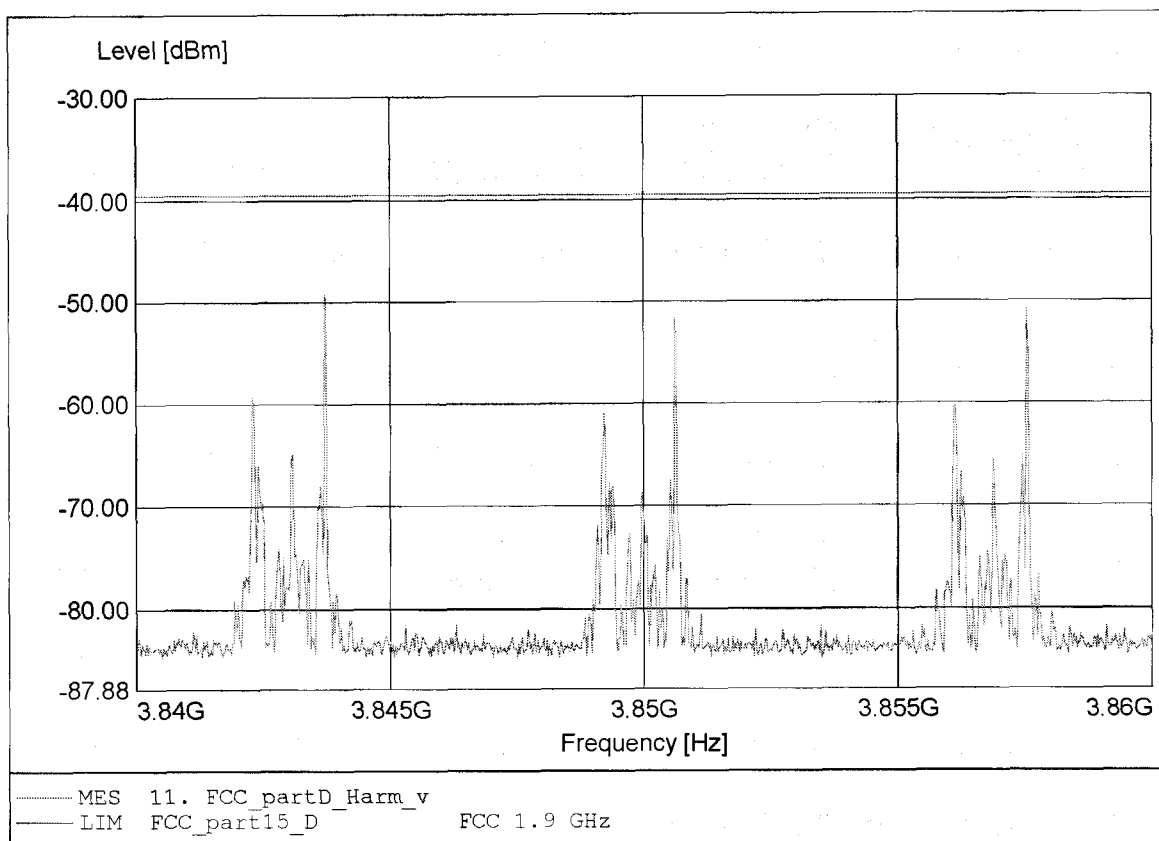

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.851GHz Pmax:-49.25dBm RBW:10 kHz

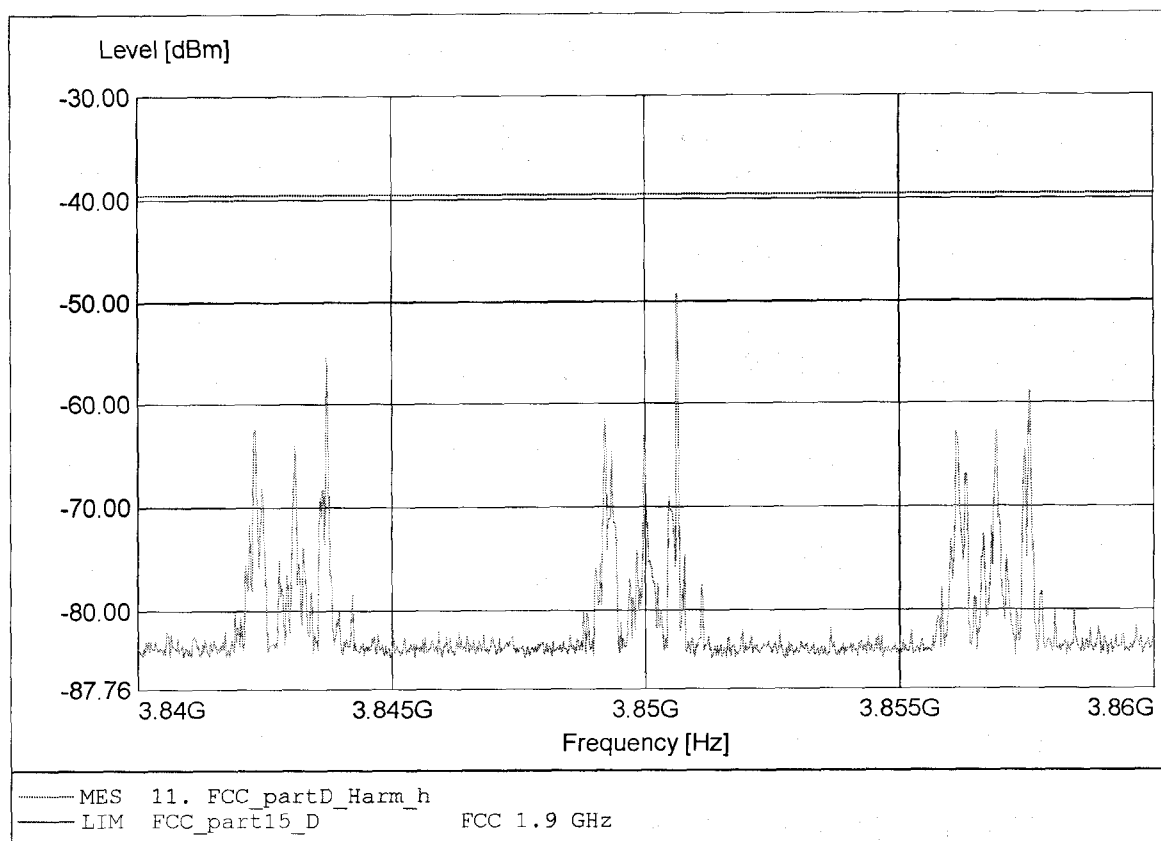

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 5.776GHz Pmax: -63.62dBm RBW: 10 kHz

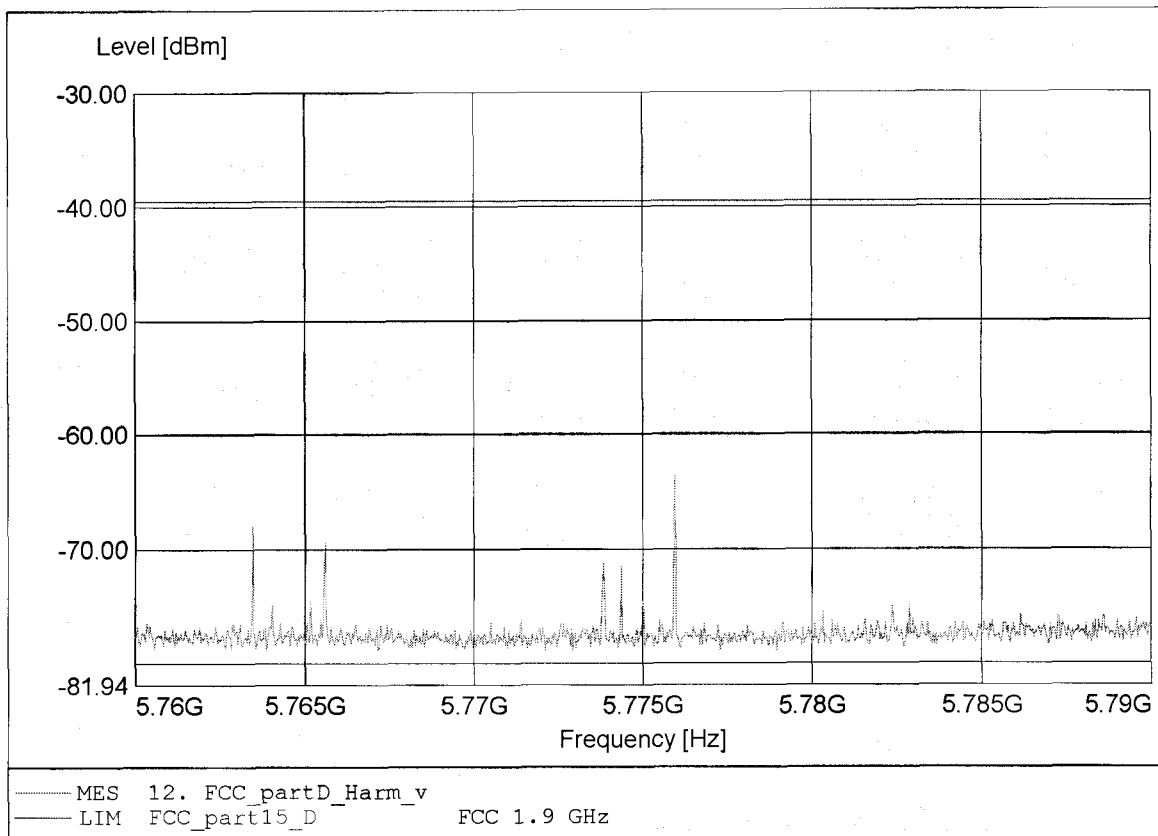

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 5.776GHz Pmax: -58.28dBm RBW: 10 kHz

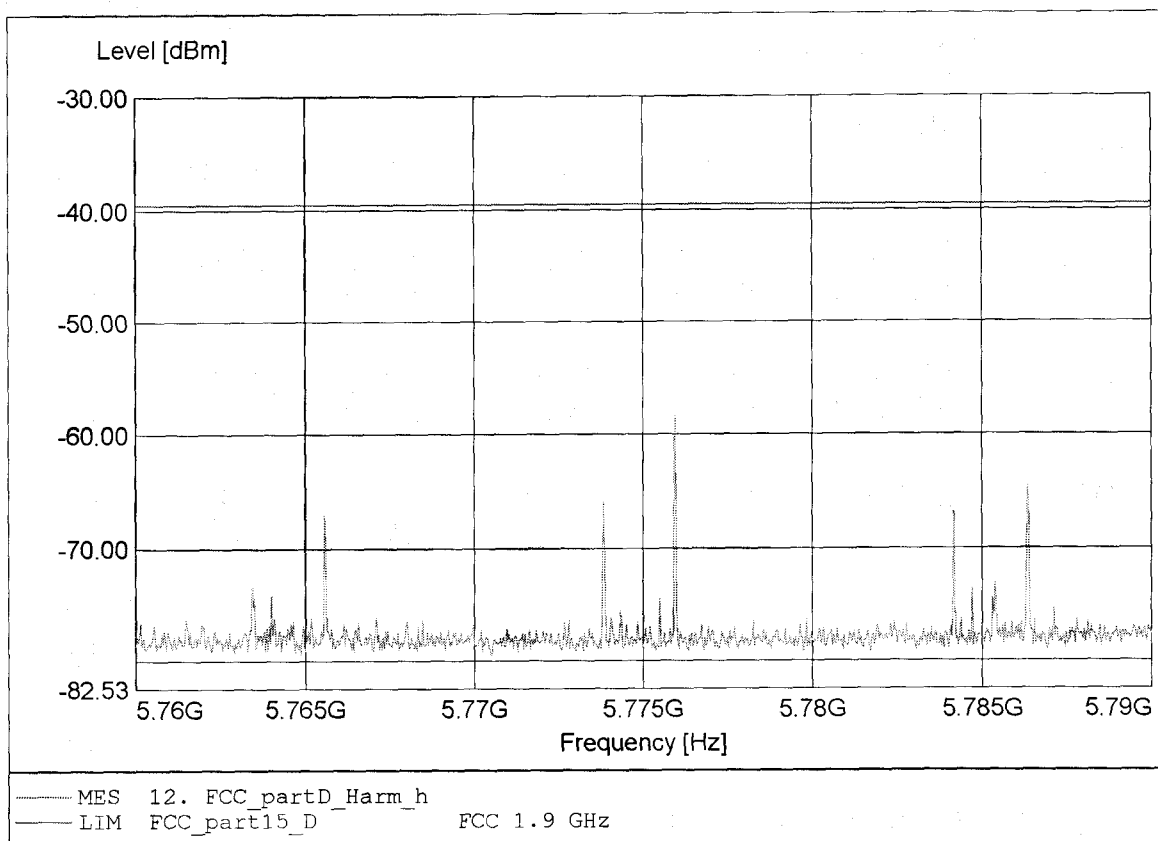

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.712GHz Pmax: -55.05dBm RBW: 10 kHz

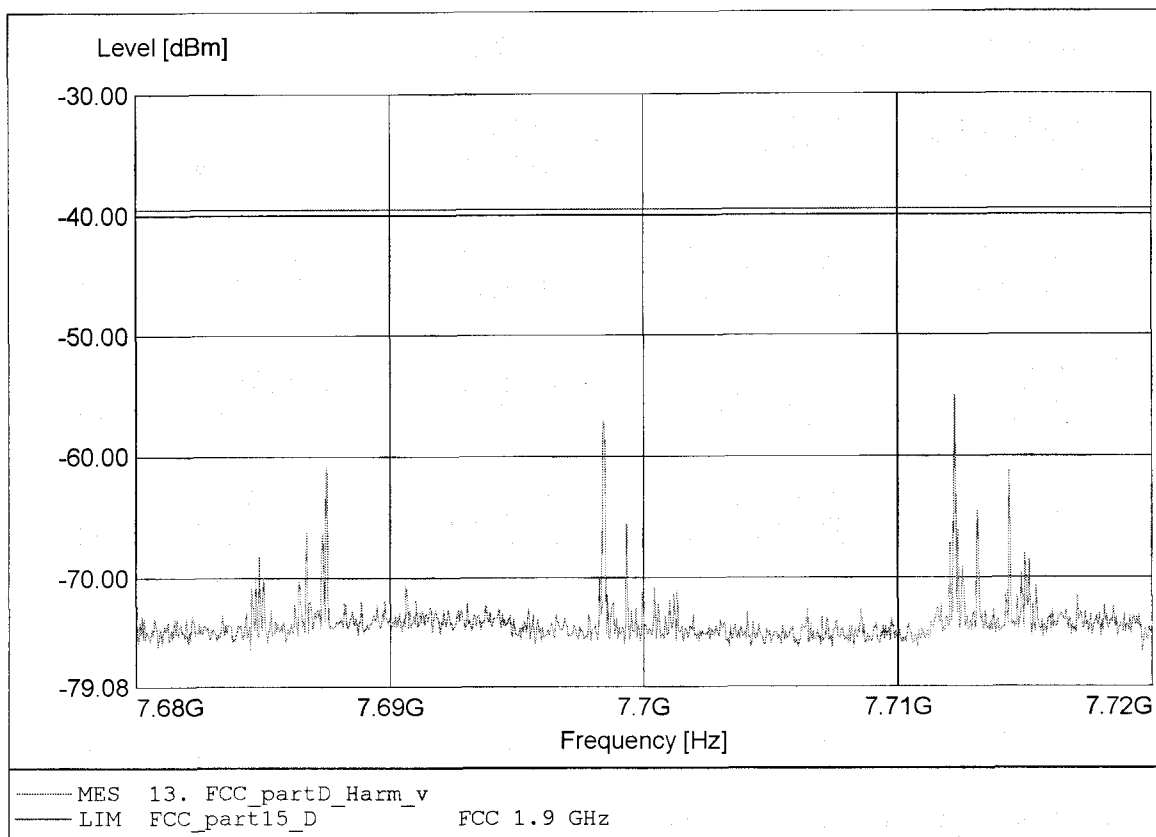

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.715GHz Pmax: -40.99dBm RBW: 10 kHz

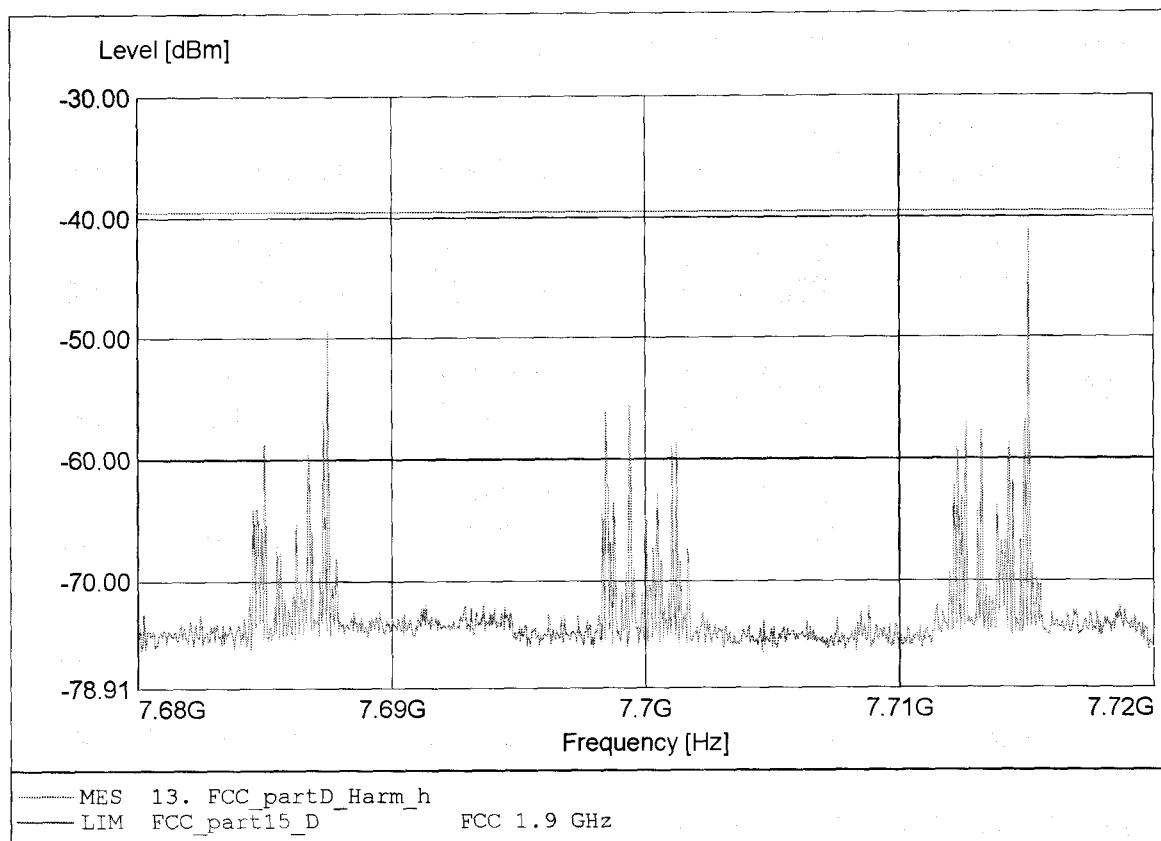

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.609GHz Pmax:-45.43dBm RBW:10 kHz

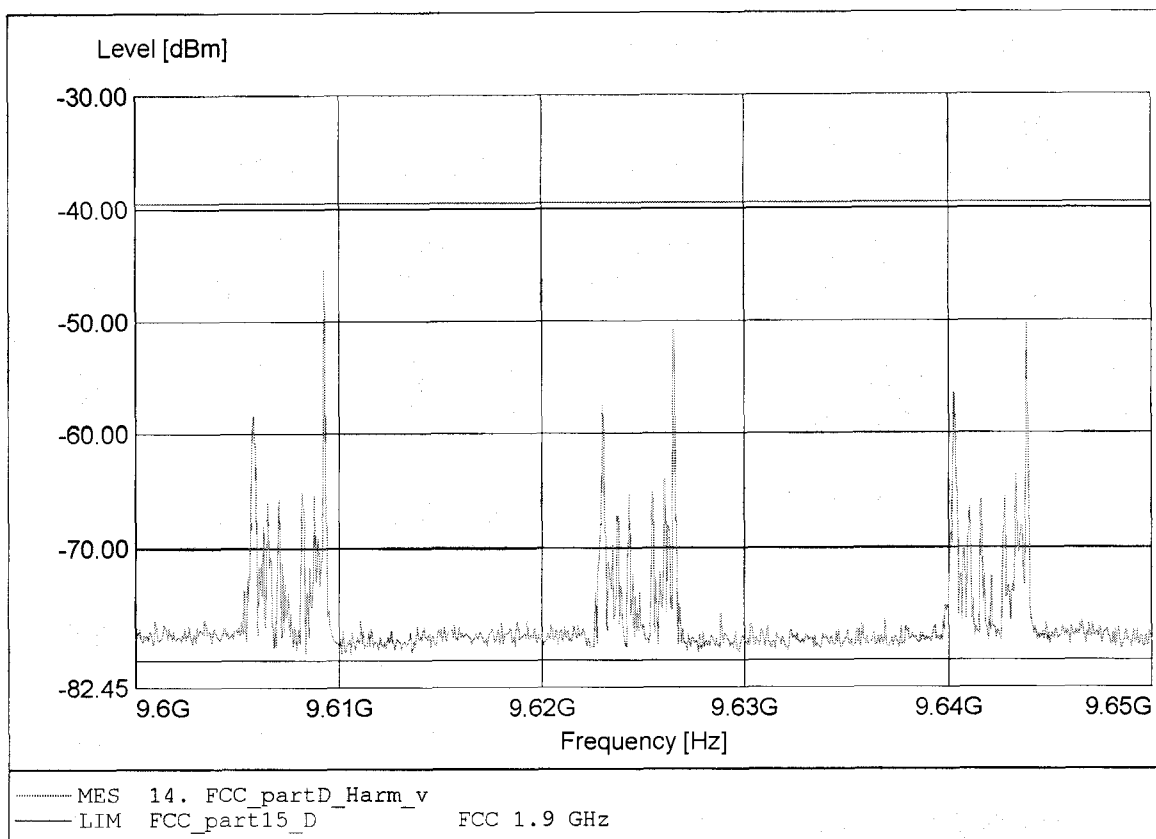

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 9.627GHz Pmax: -41.65dBm RBW: 10 kHz

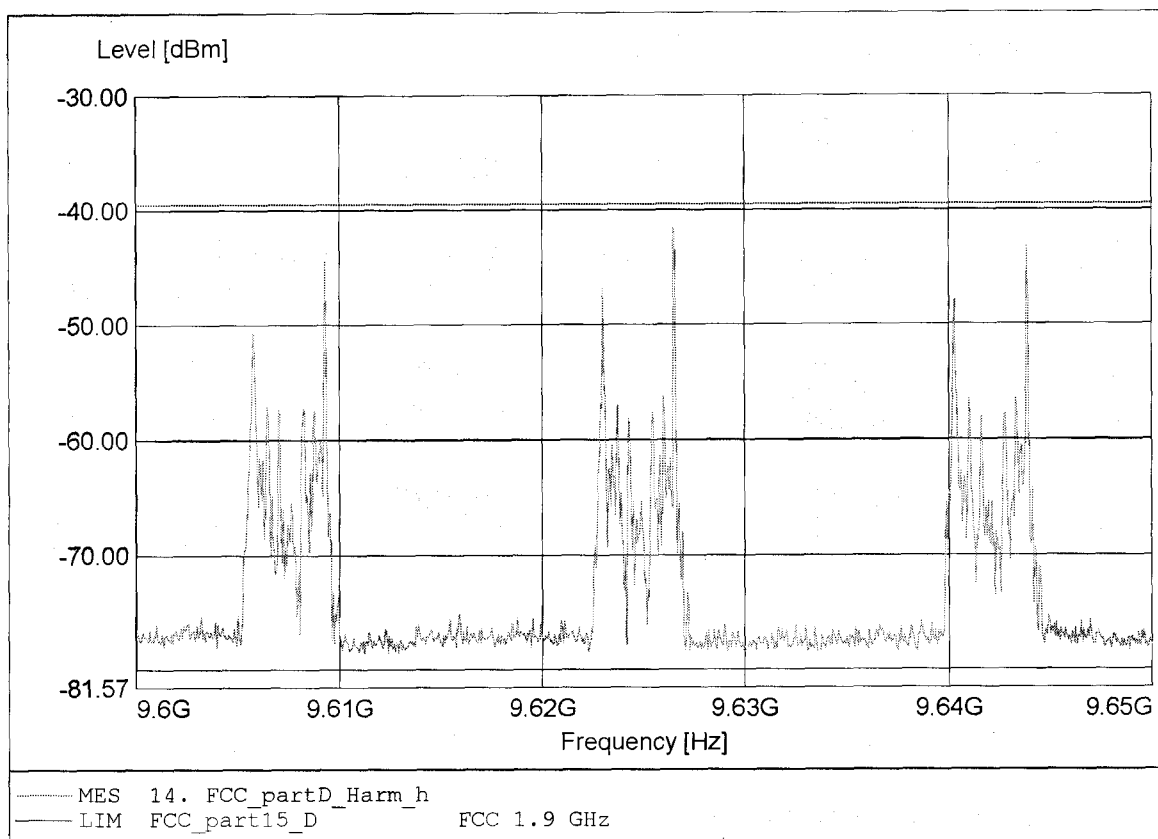

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.573GHz Pmax:-48.81dBm RBW:10 kHz

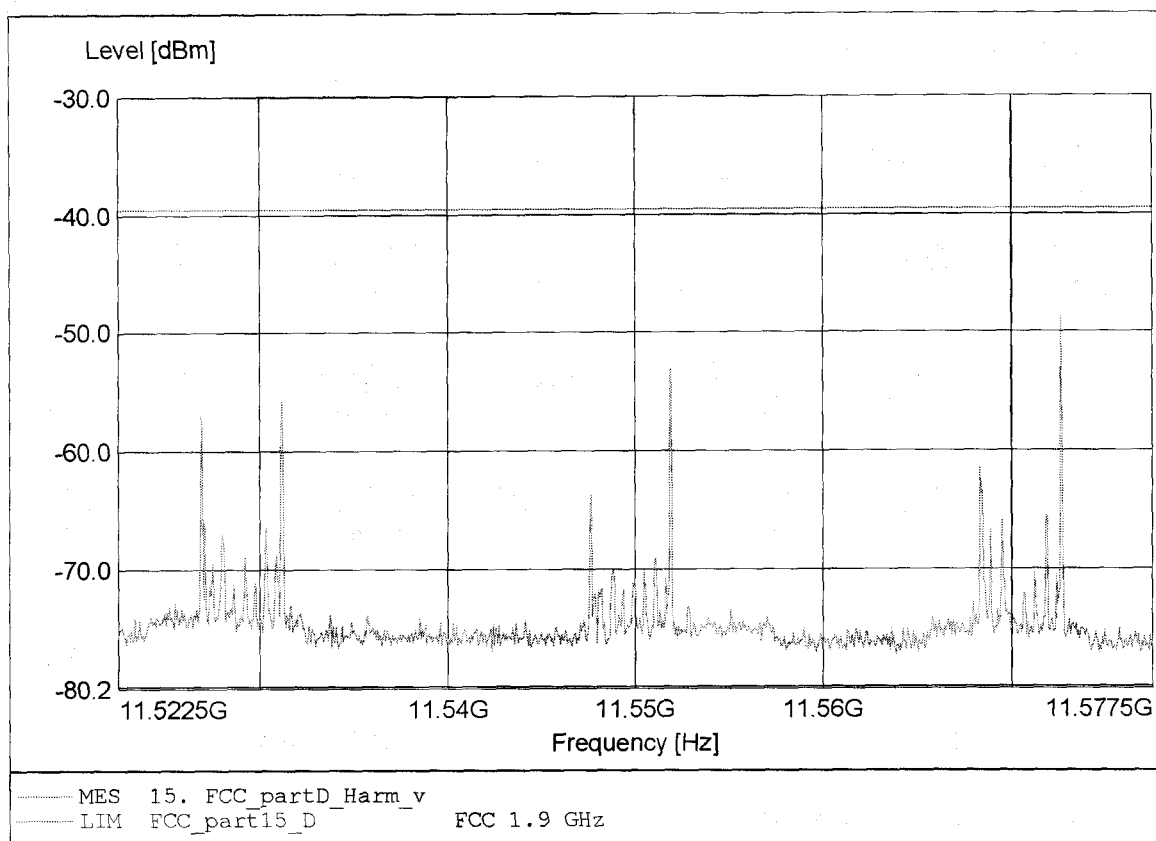

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.573GHz Pmax:-46.52dBm RBW:10 kHz

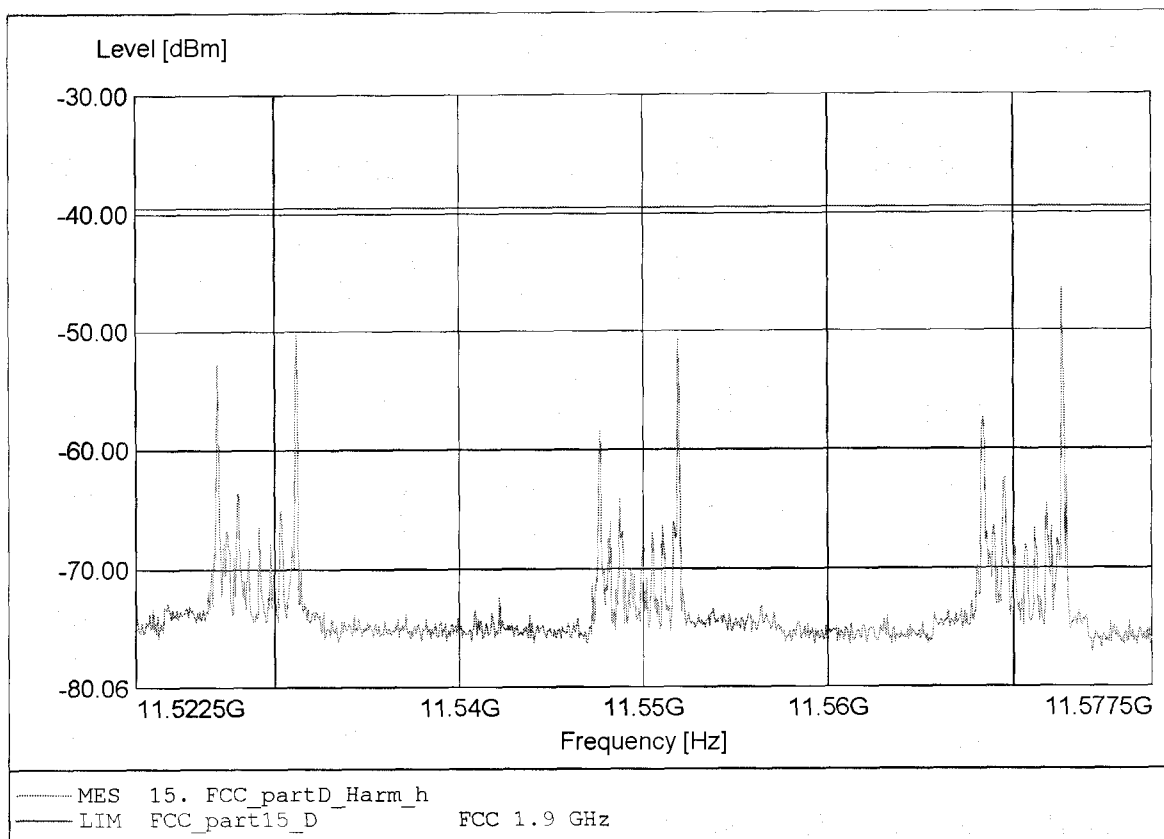

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.477GHz Pmax:-44.57dBm RBW:10 kHz

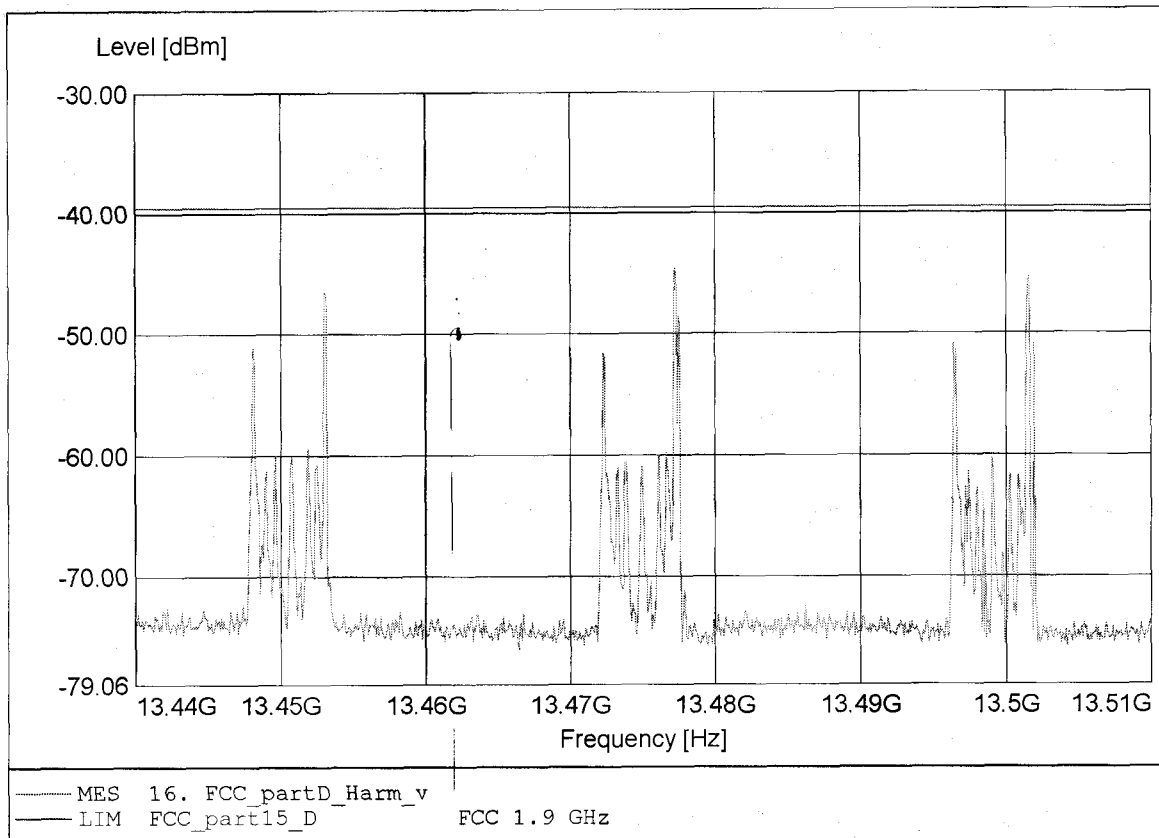

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.502GHz Pmax:-45.77dBm RBW:10 kHz

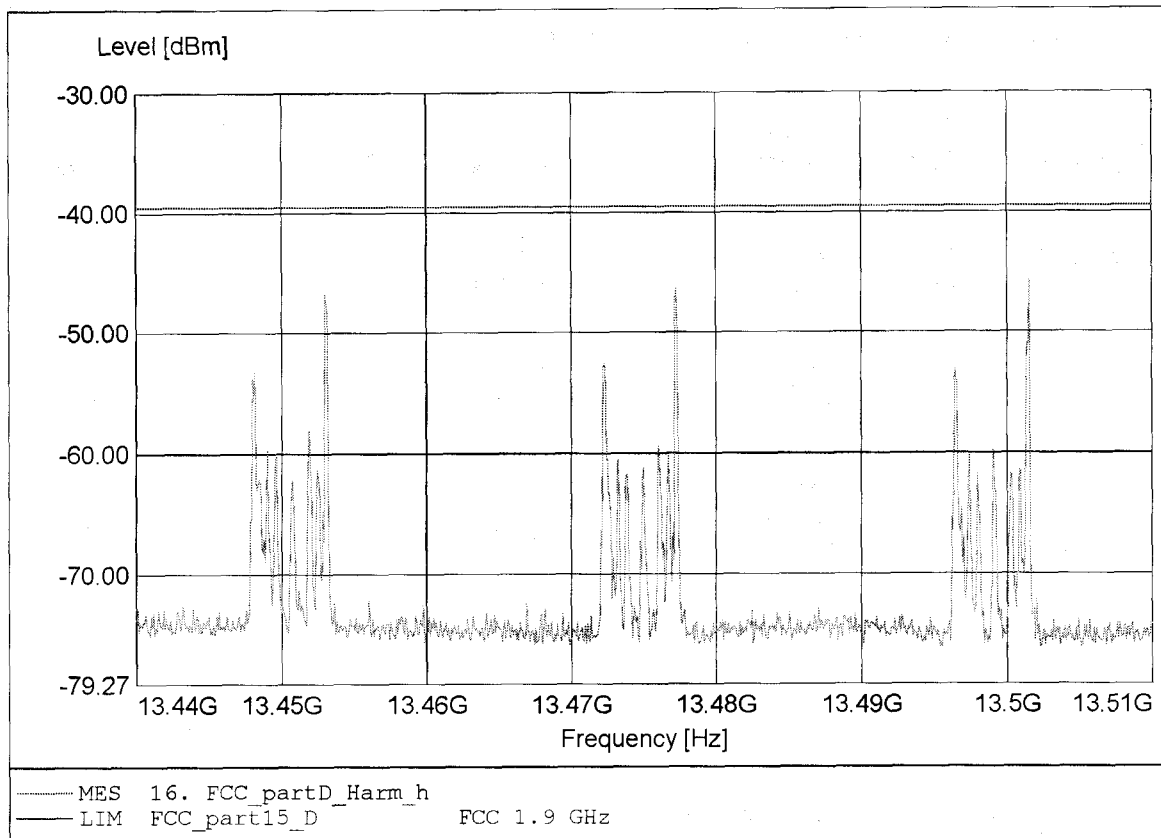

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.375GHz Pmax:-50.19dBm RBW:10 kHz

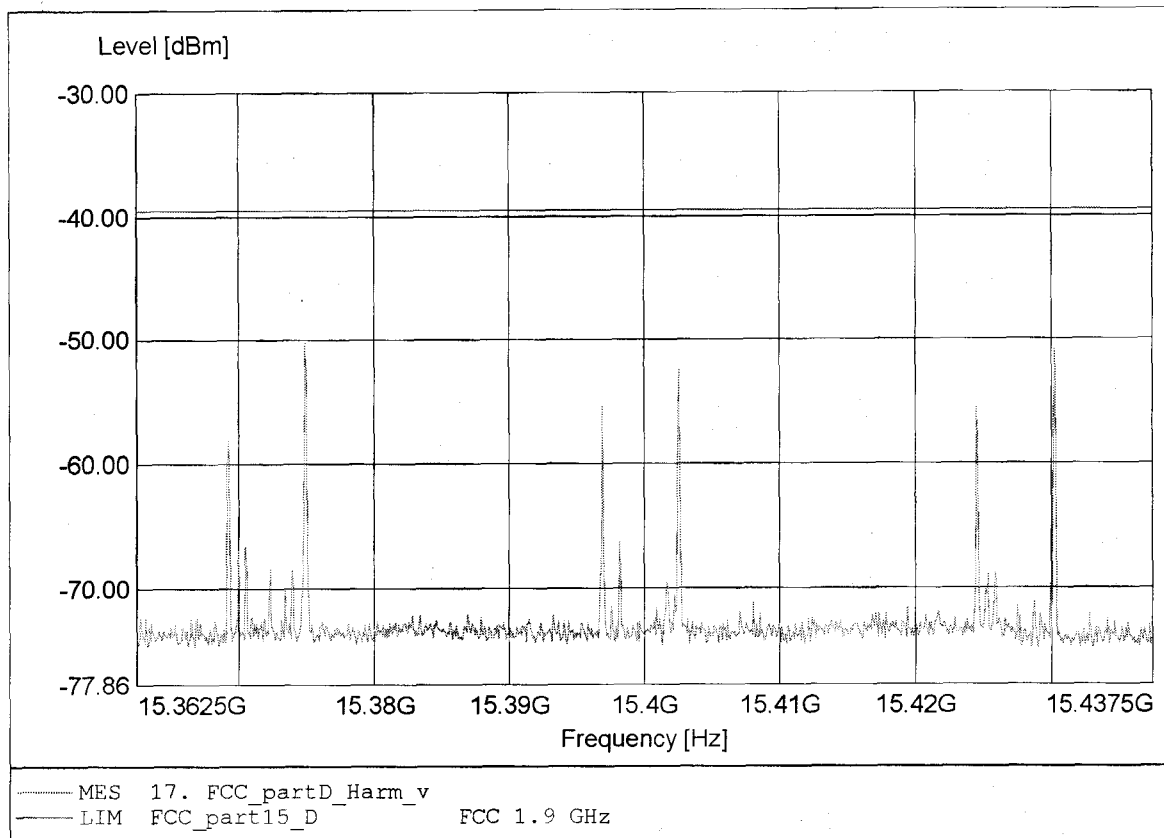

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.375GHz Pmax:-47.01dBm RBW:10 kHz

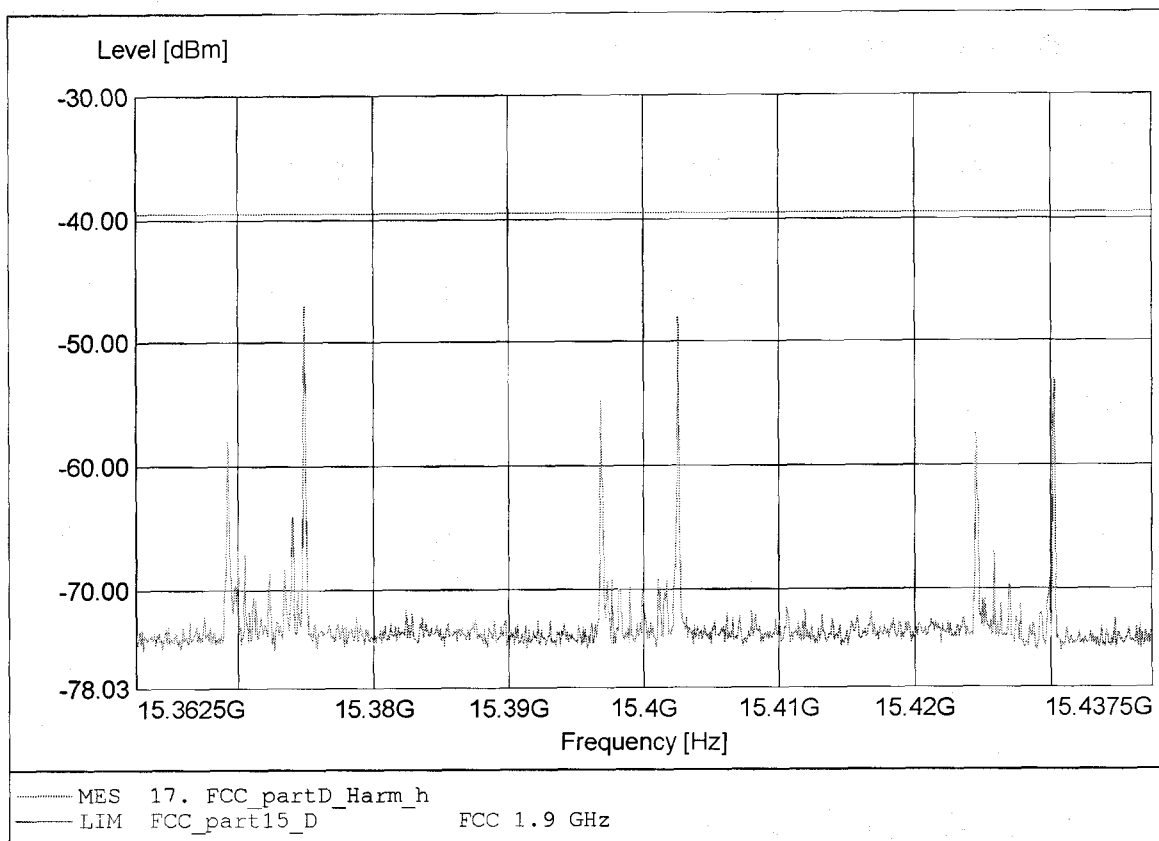

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.328GHz Pmax:-53.54dBm RBW:10 kHz

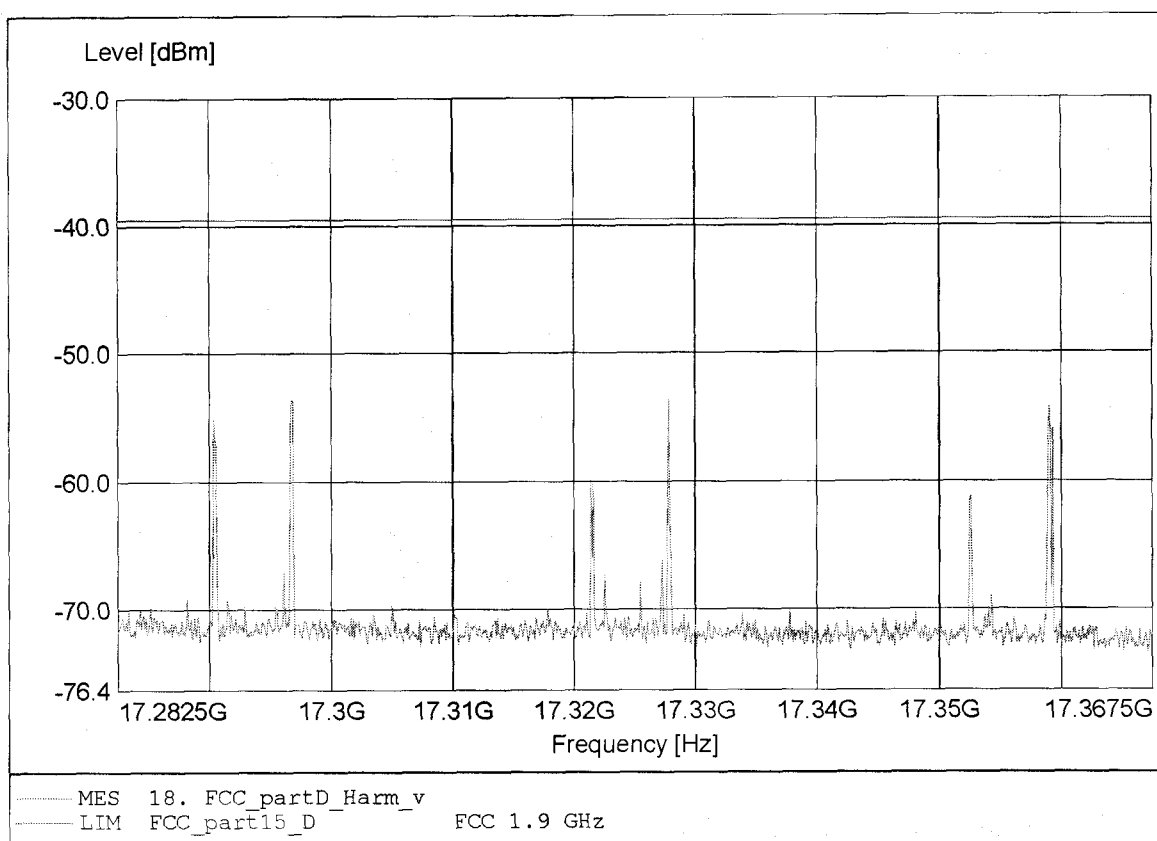

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.328GHz Pmax:-54.74dBm RBW:10 kHz

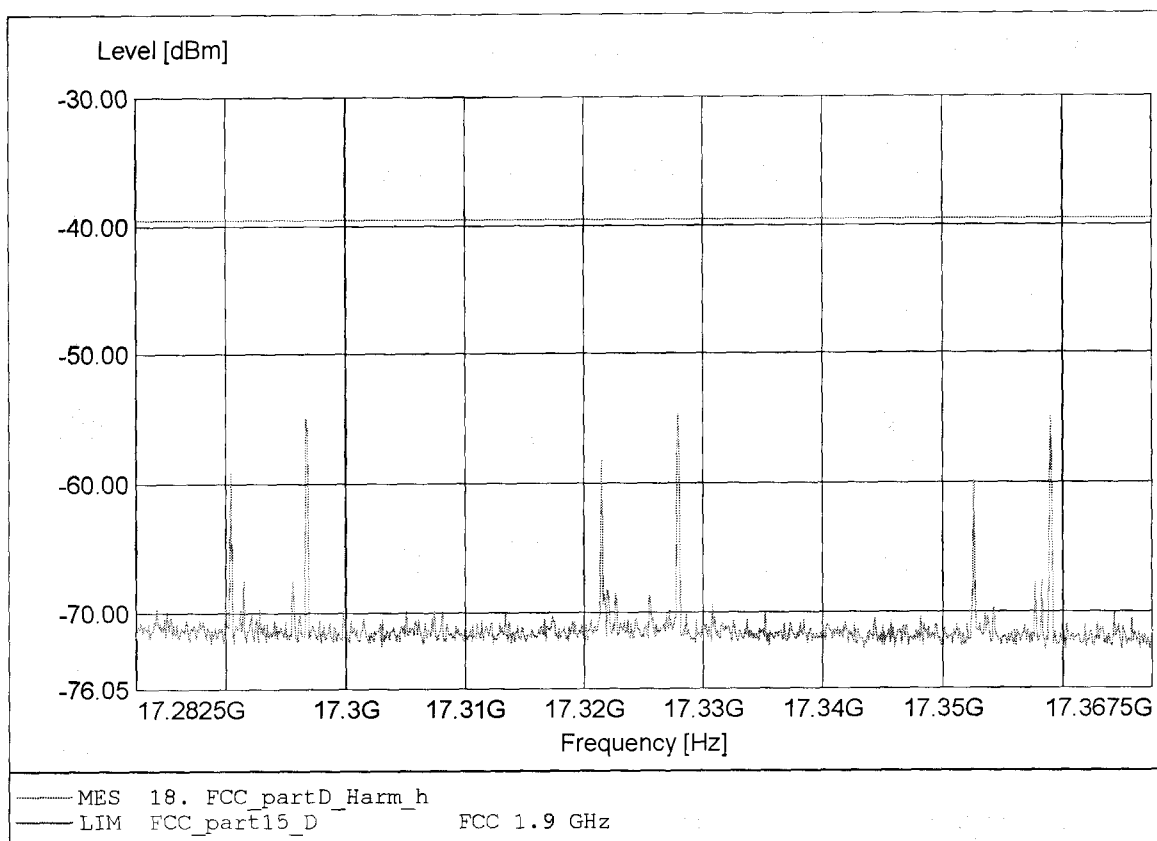

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.253GHz Pmax:-45.54dBm RBW:10 kHz

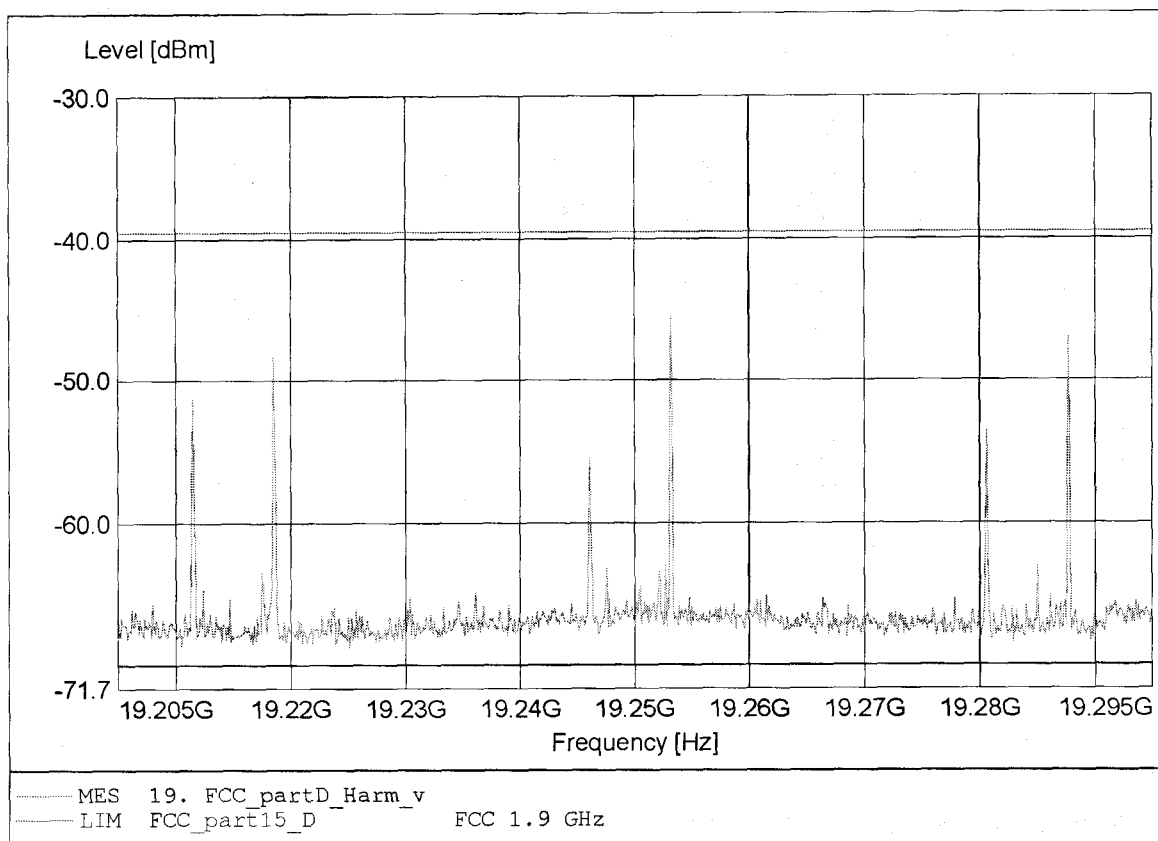

Spurious emissions under normal conditions


FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 1 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.253GHz Pmax:-51.20dBm RBW:10 kHz

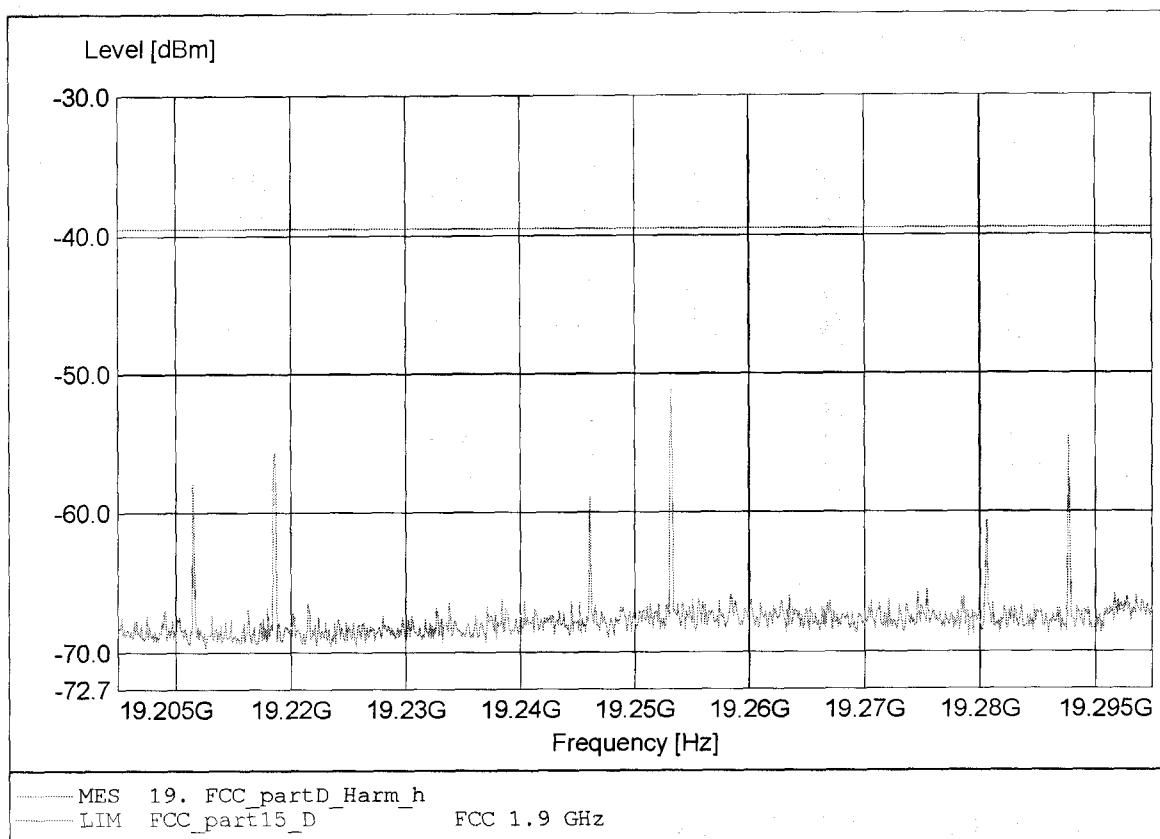


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 62.024MHz Pmax: -67.37dBm RBW: 100 kHz

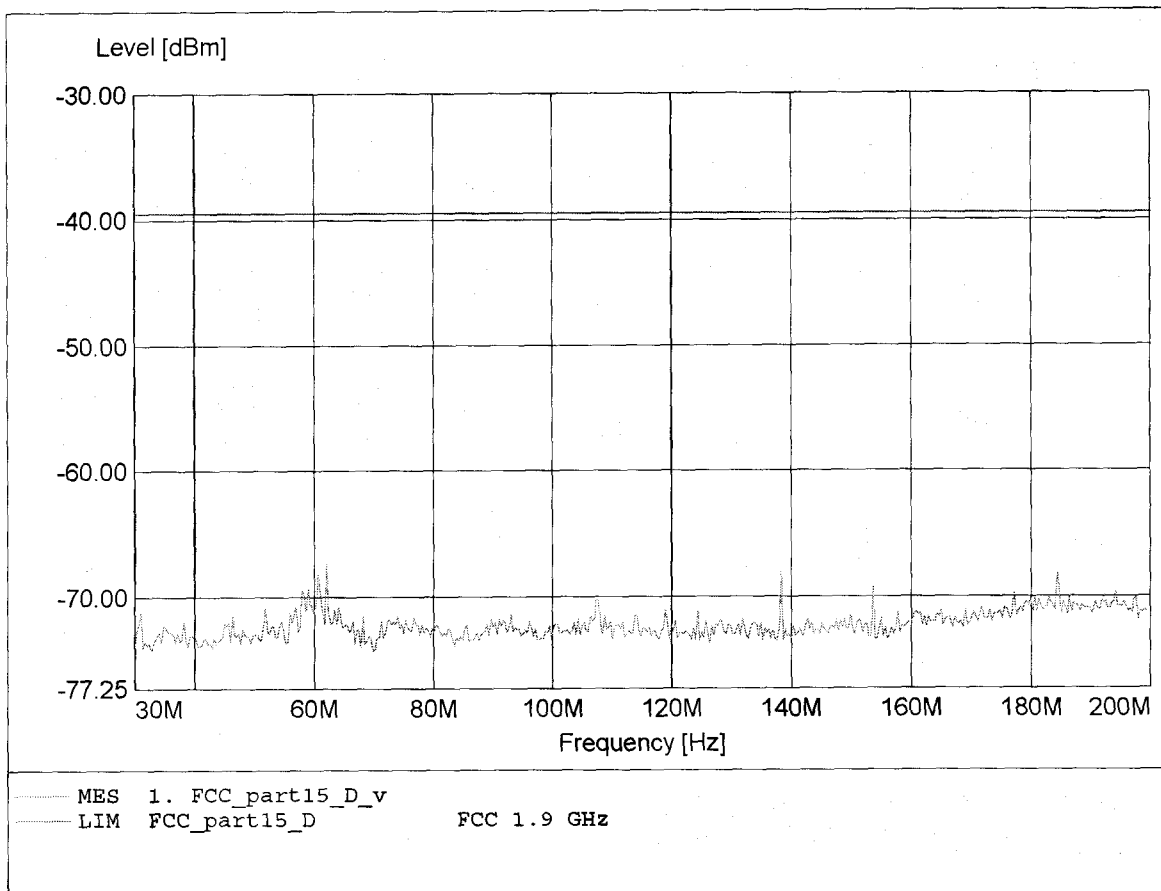


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:184.329MHz Pmax:-68.12dBm RBW: 100 kHz

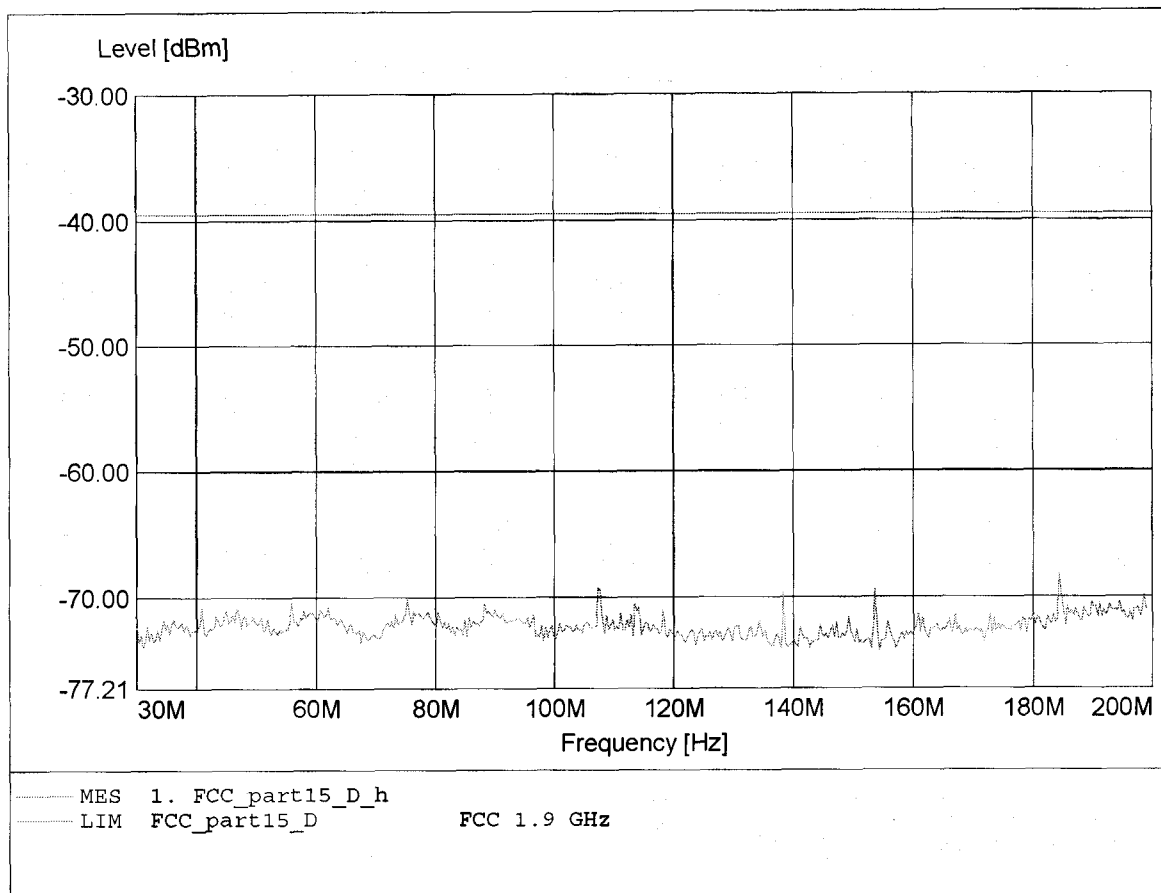


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 275.351MHz Pmax: -61.61dBm RBW: 100 kHz

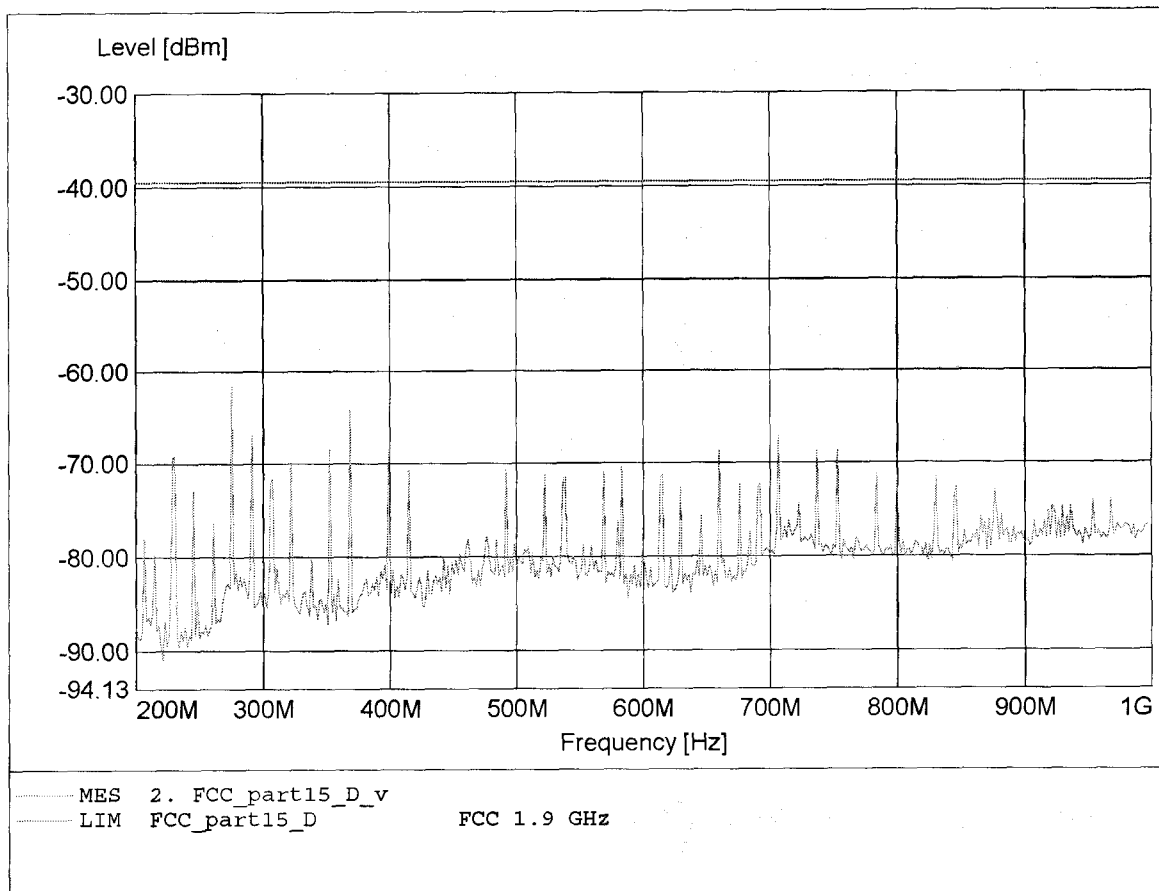


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 753.106MHz Pmax: -61.96dBm RBW: 100 kHz

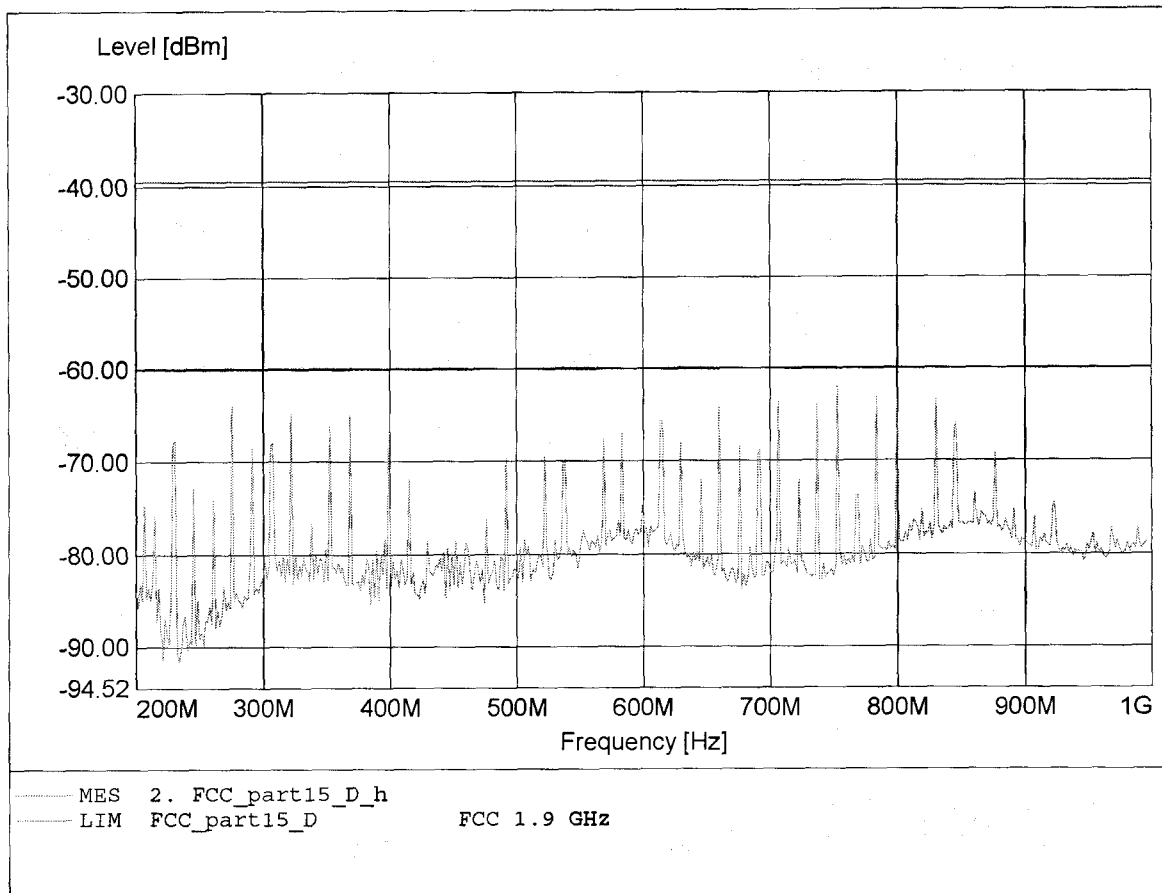


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.911GHz Pmax:-58.41dBm RBW: 1 MHz

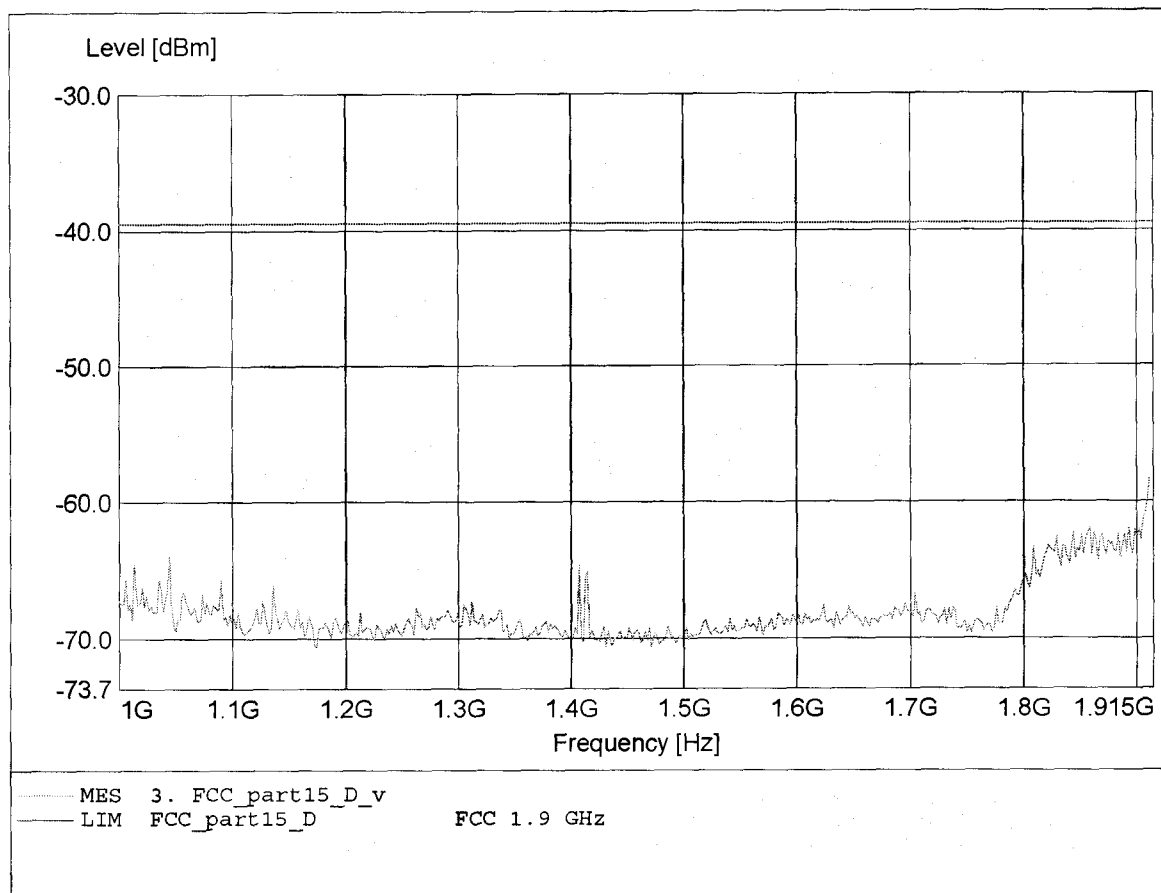


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.911GHz Pmax: -62.98dBm RBW: 1 MHz

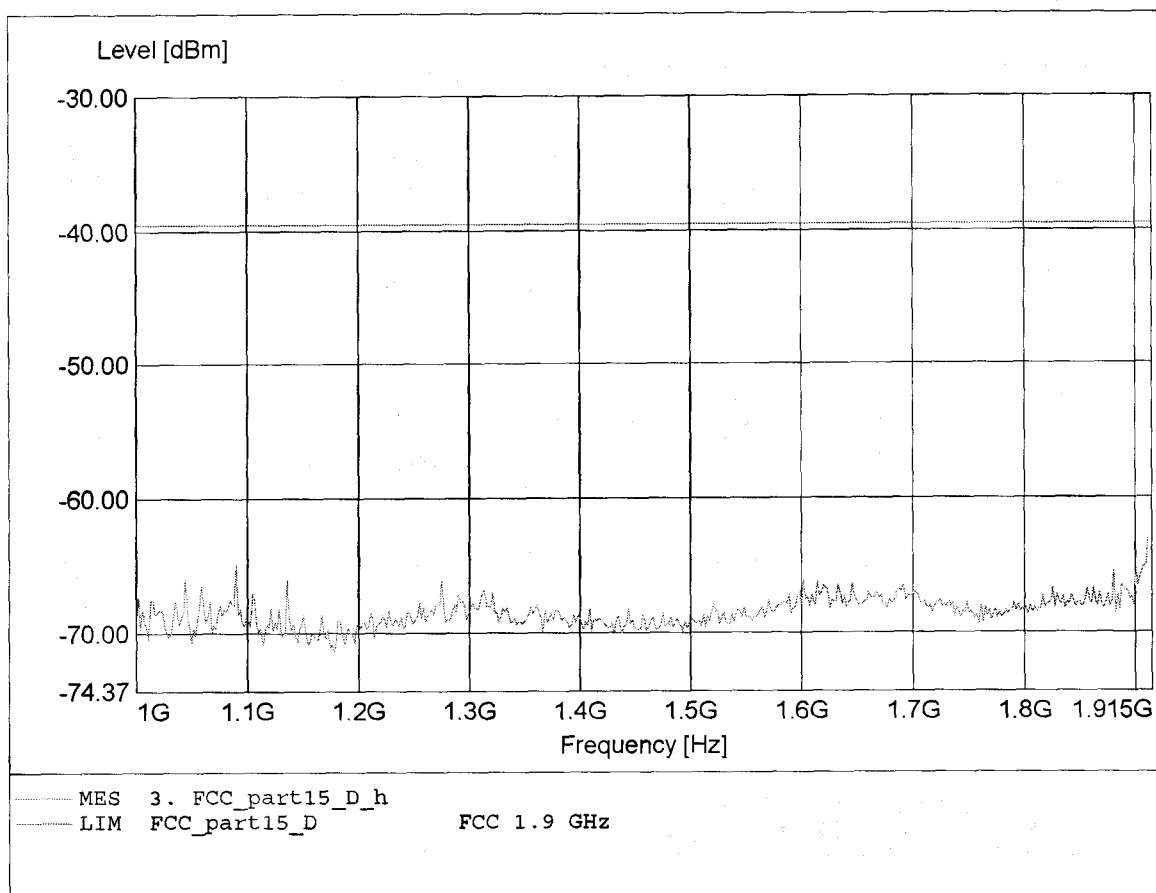


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-48.17dBm RBW:10 kHz

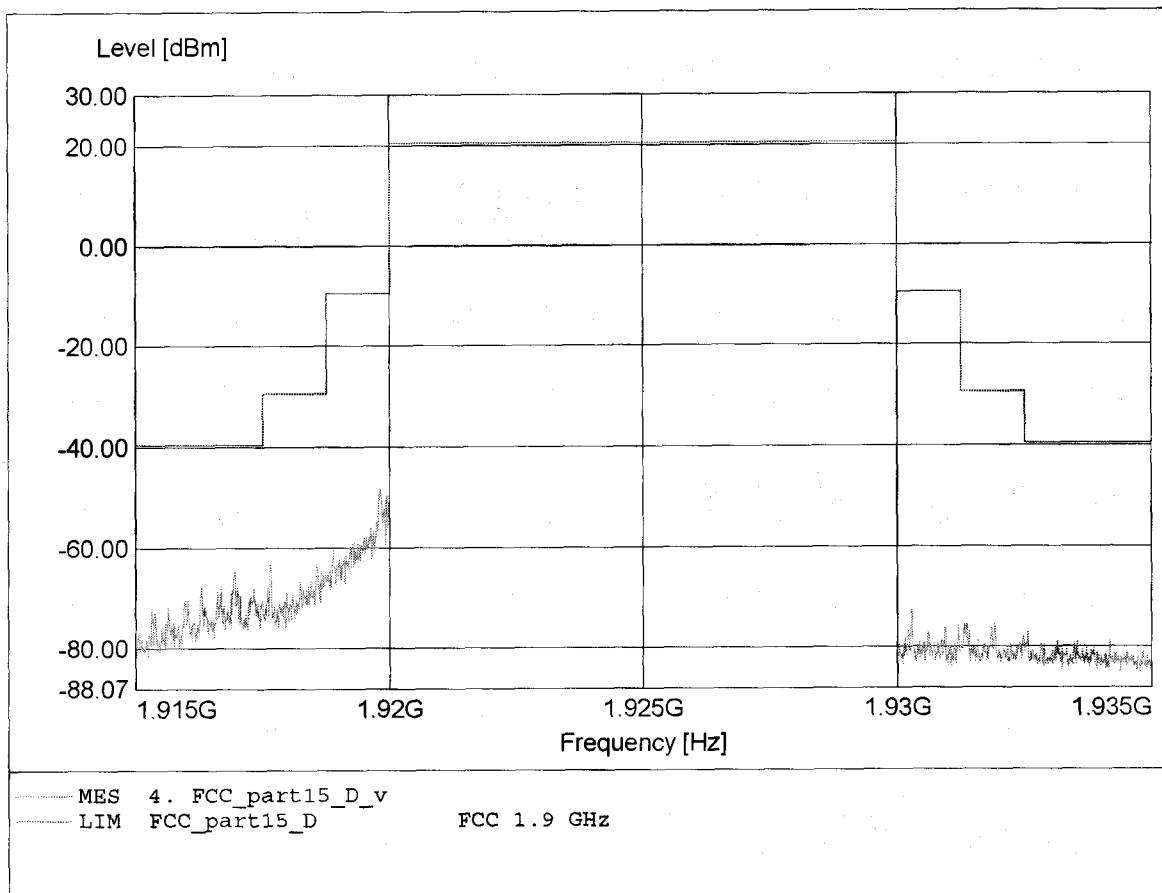


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-56.58dBm RBW:10 kHz

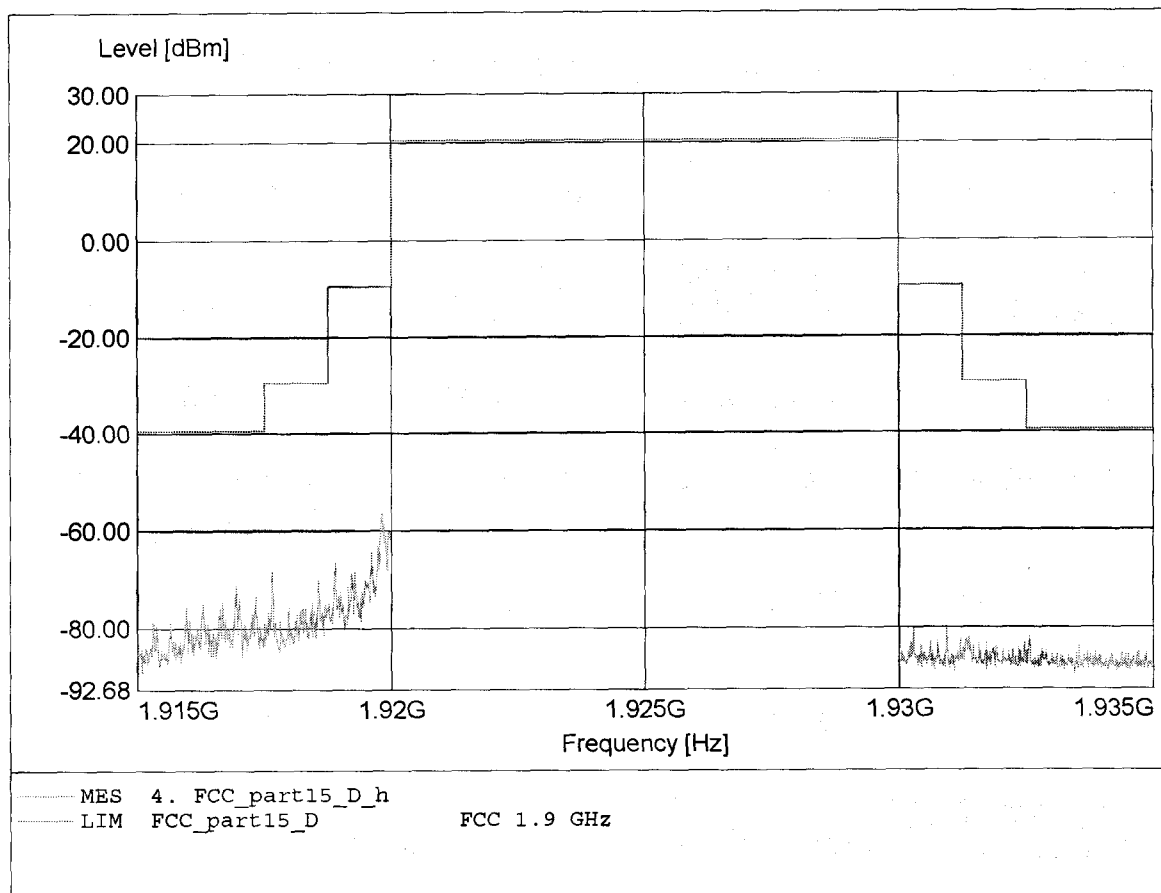

Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 2.018GHz Pmax: -48.76dBm RBW: 1 MHz

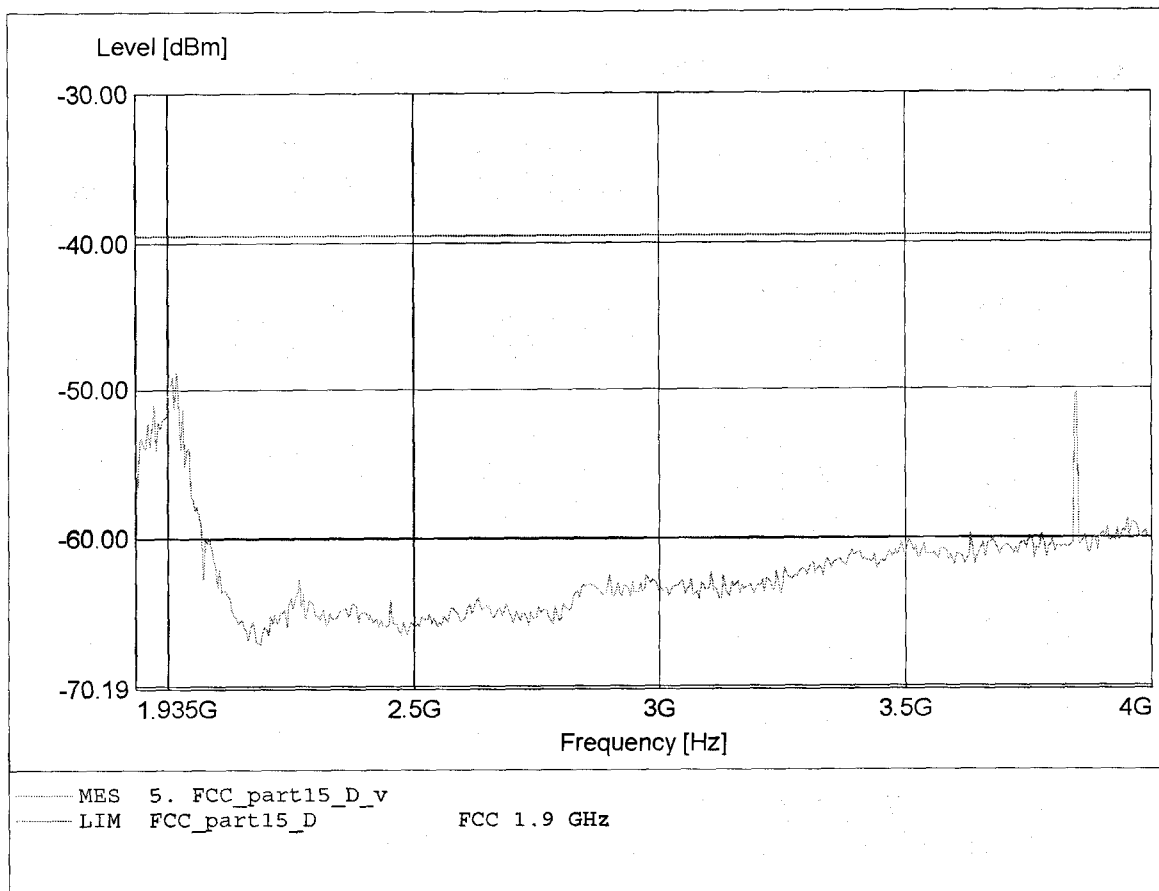

Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.843GHz Pmax: -51.72dBm RBW: 1 MHz

