



Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 62.024MHz Pmax: -65.59dBm RBW: 100 kHz

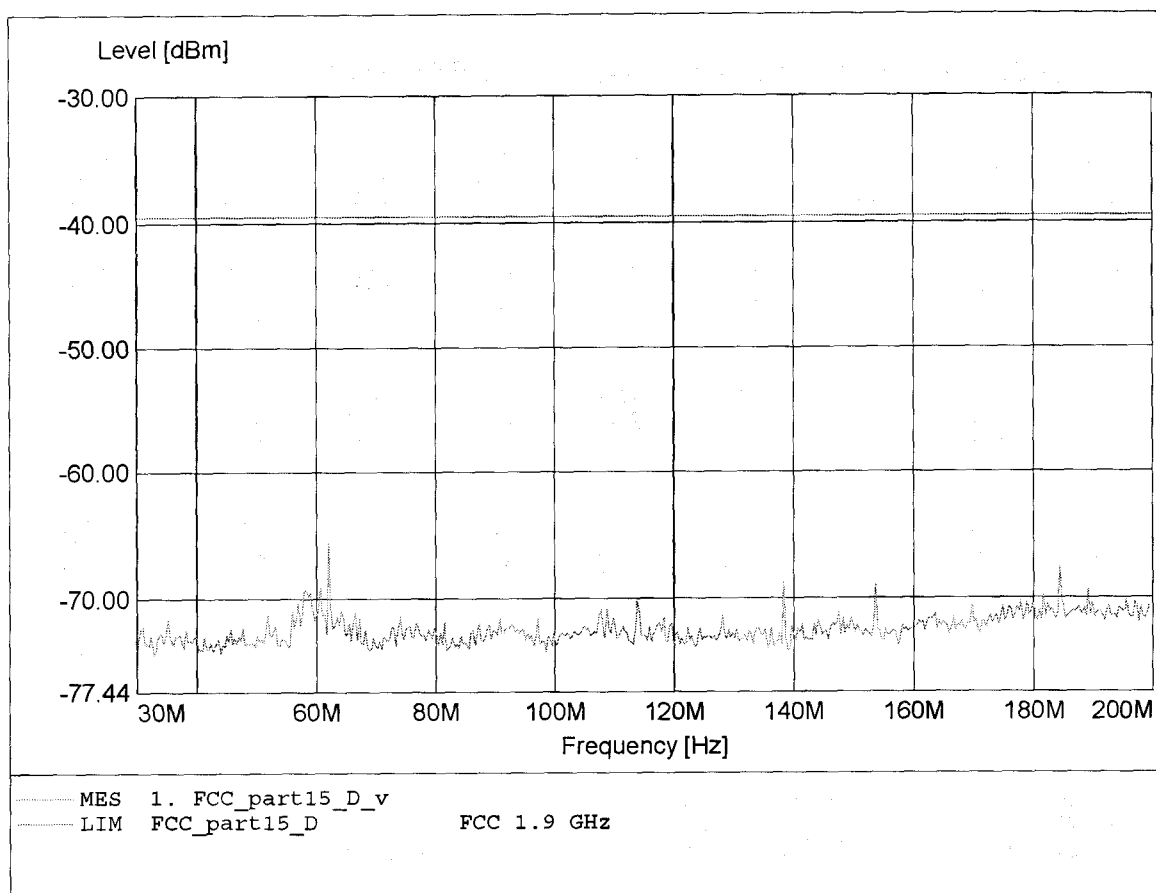


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:184.329MHz Pmax:-67.73dBm RBW: 100 kHz

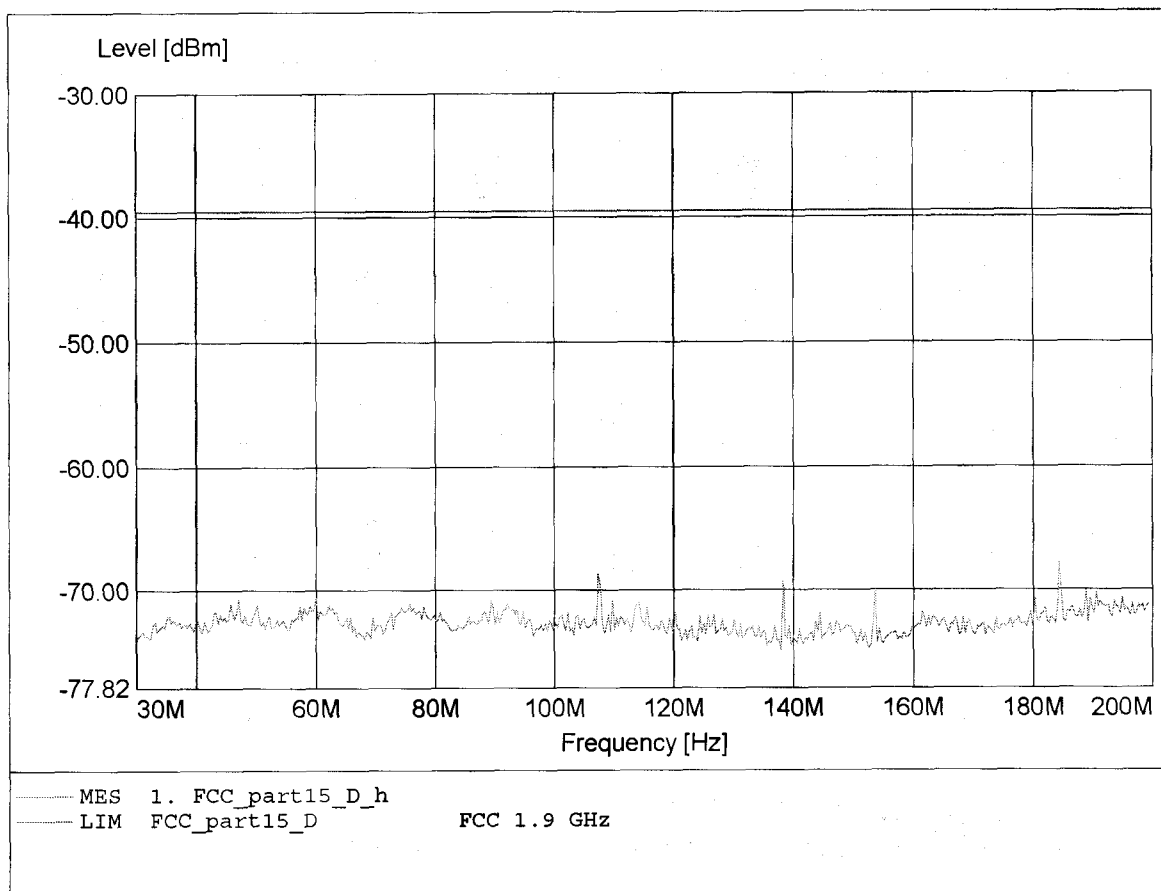


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 275.351MHz Pmax: -61.53dBm RBW: 100 kHz

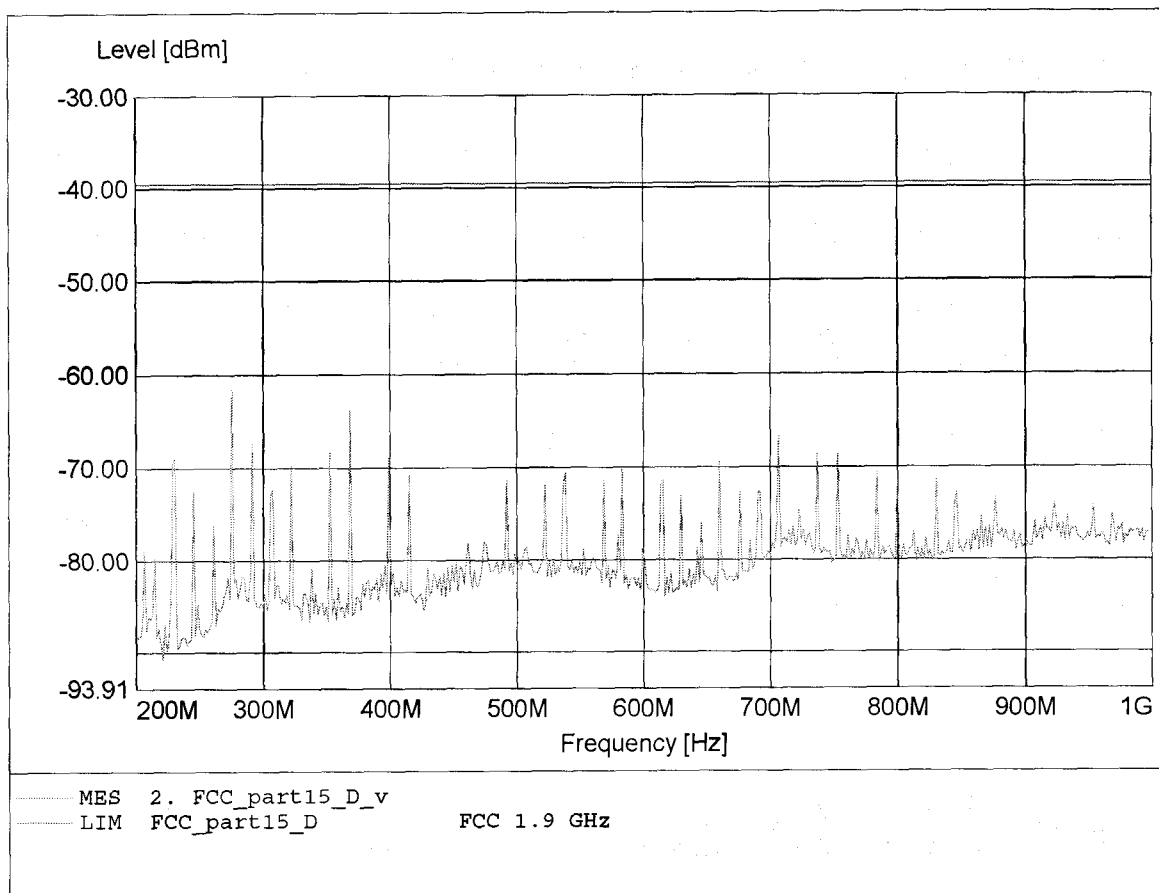


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 753.106MHz Pmax: -61.98dBm RBW: 100 kHz

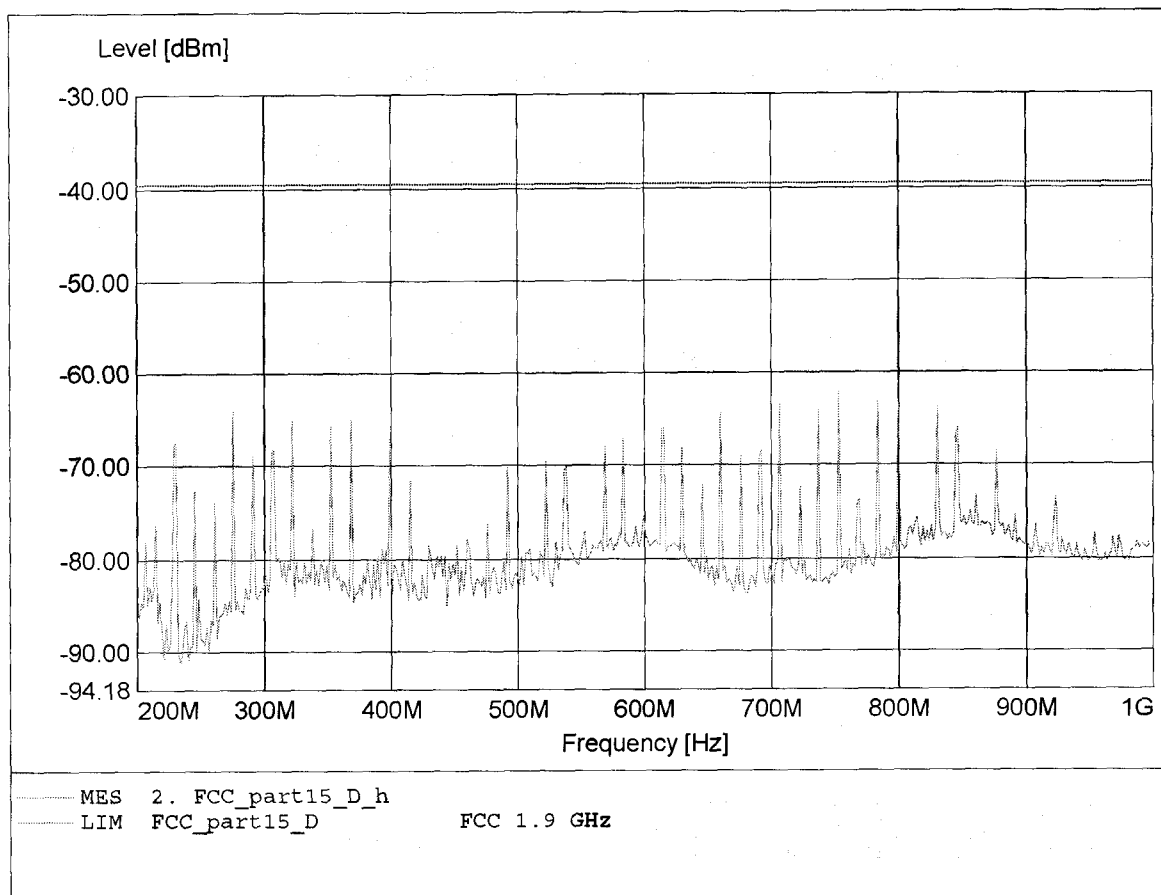


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.911GHz Pmax: -60.42dBm RBW: 1 MHz

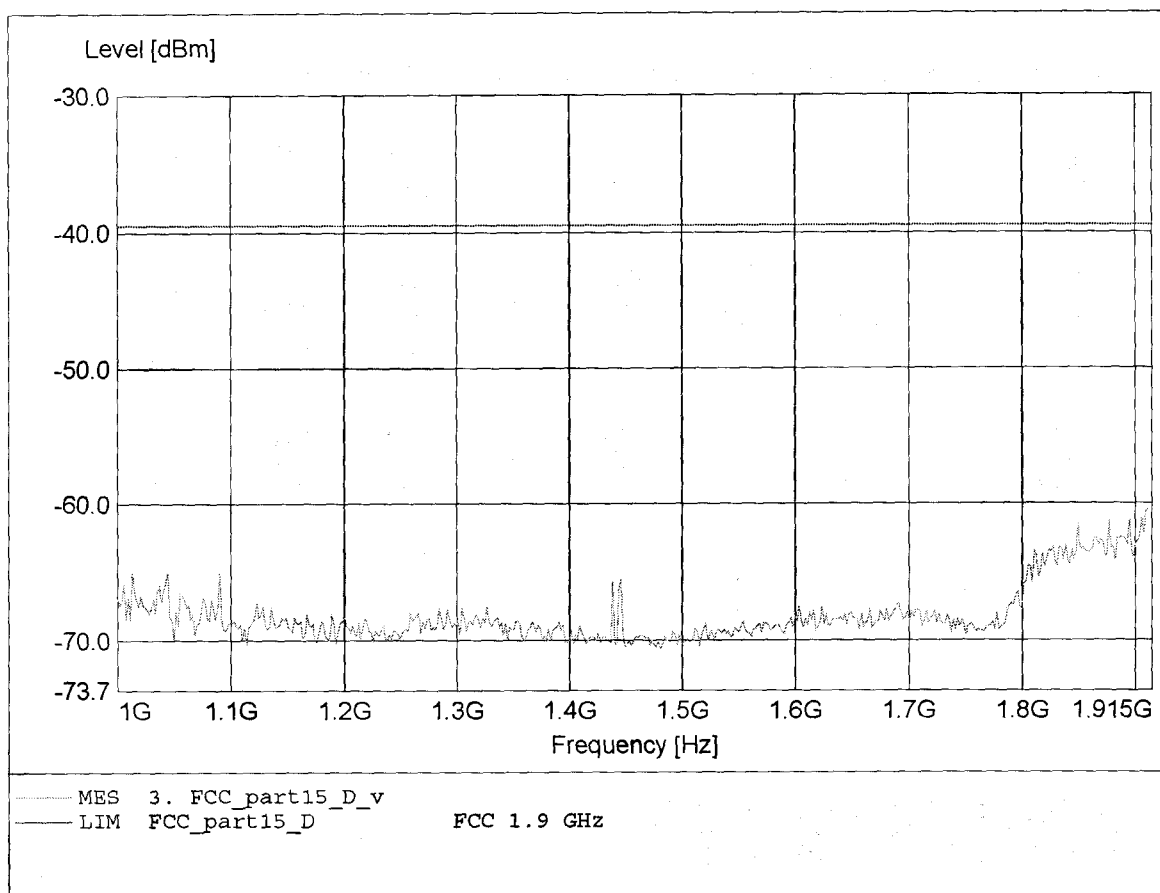


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.090GHz Pmax: -64.66dBm RBW: 1 MHz

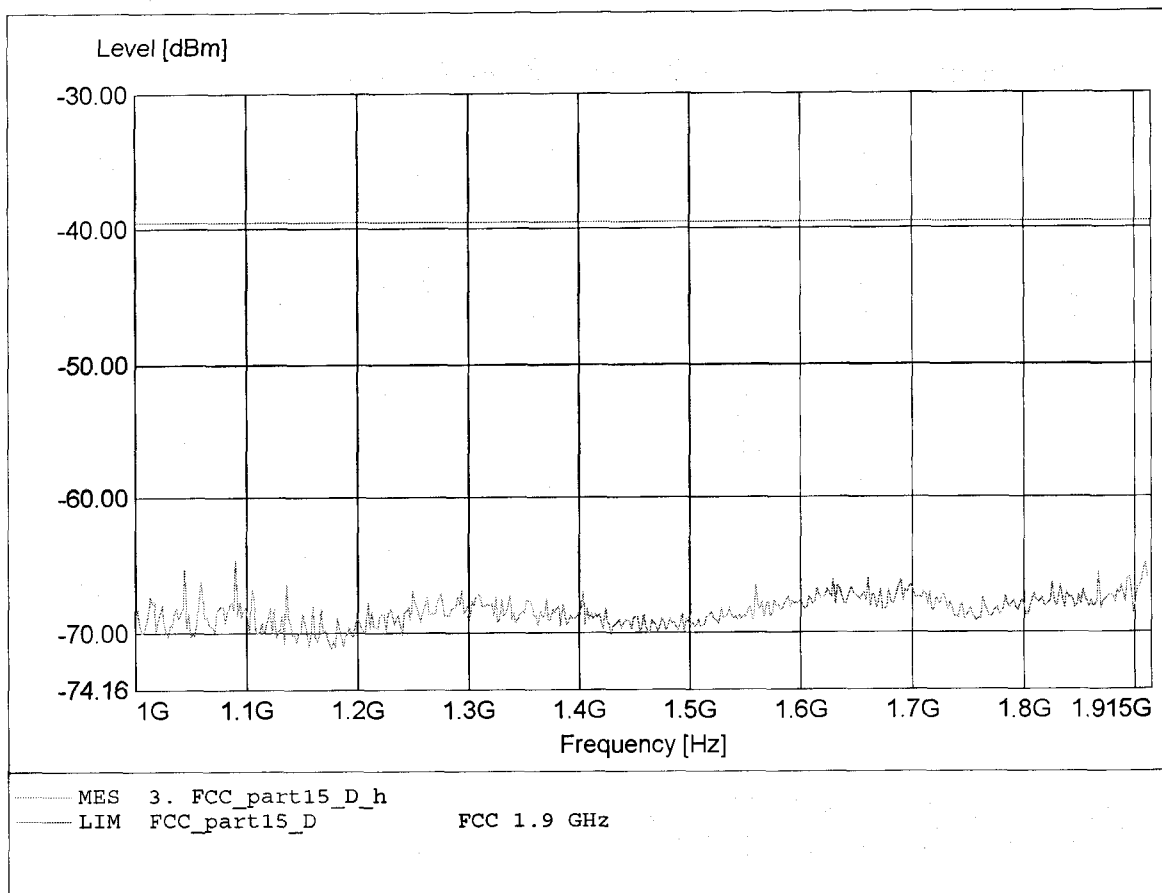


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.930GHz Pmax: -67.07dBm RBW: 10 kHz

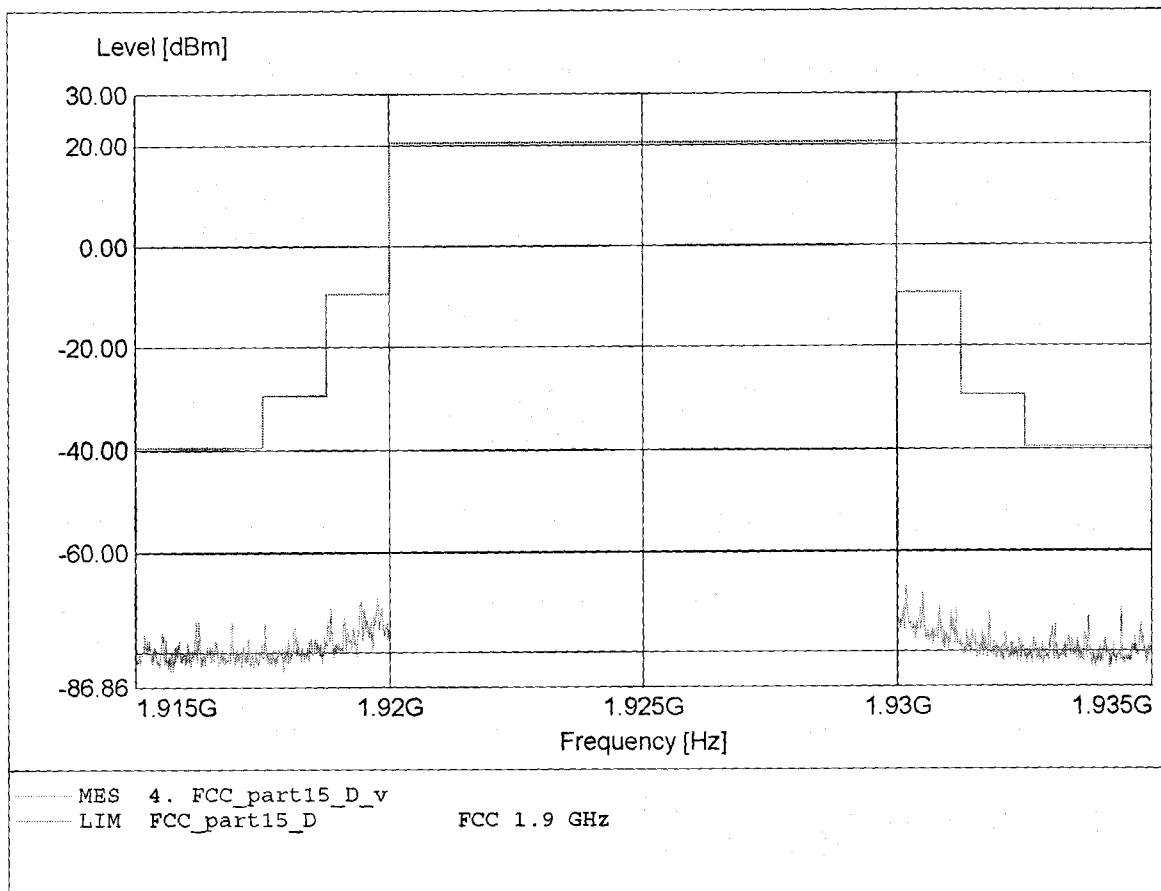


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-72.91dBm RBW:10 kHz

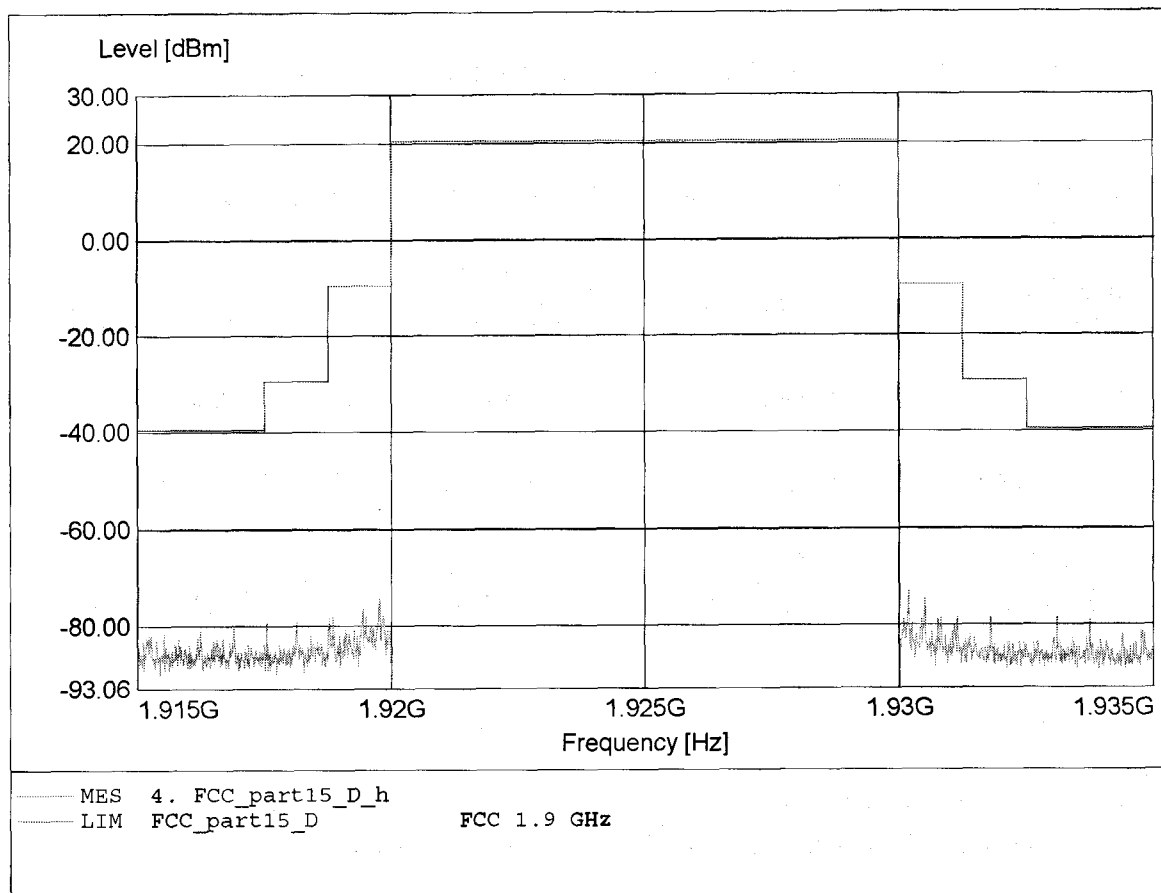


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 2.005GHz Pmax: -49.80dBm RBW: 1 MHz

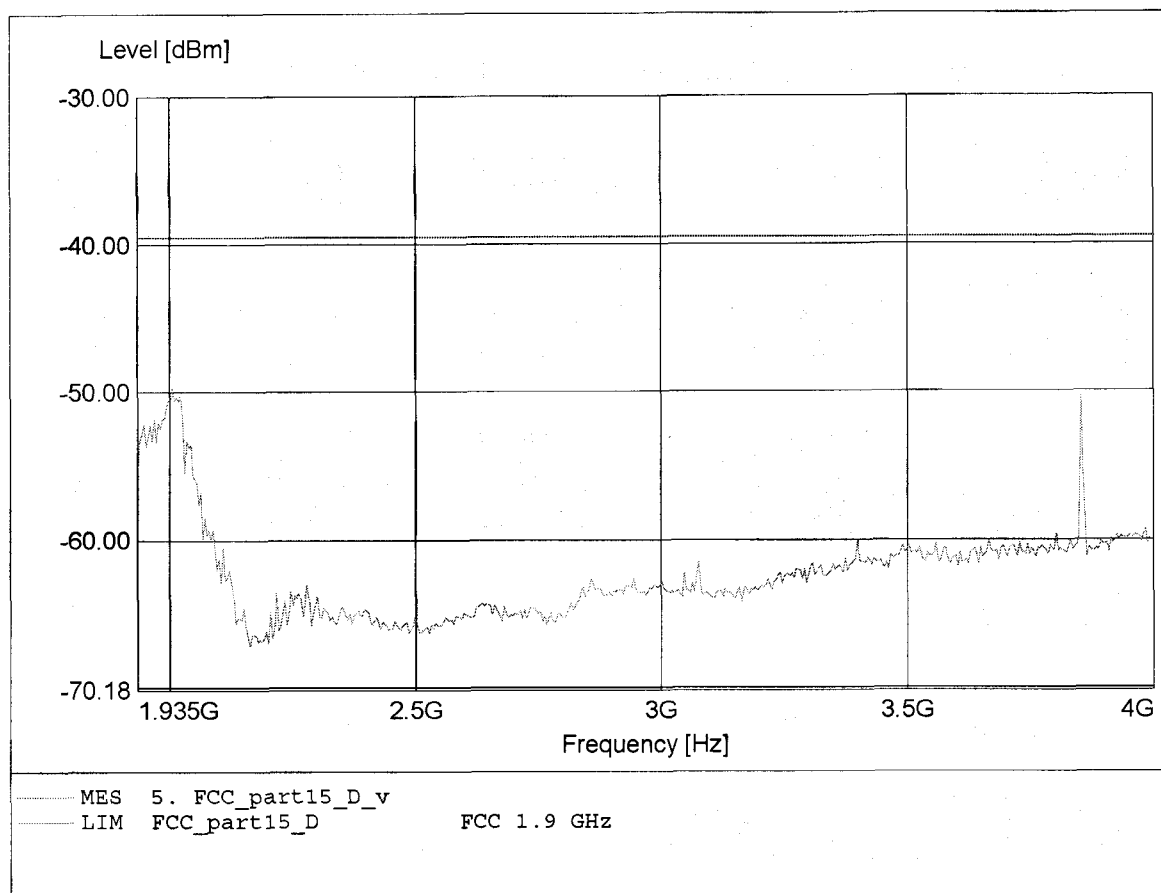


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.851GHz Pmax: -51.72dBm RBW: 1 MHz

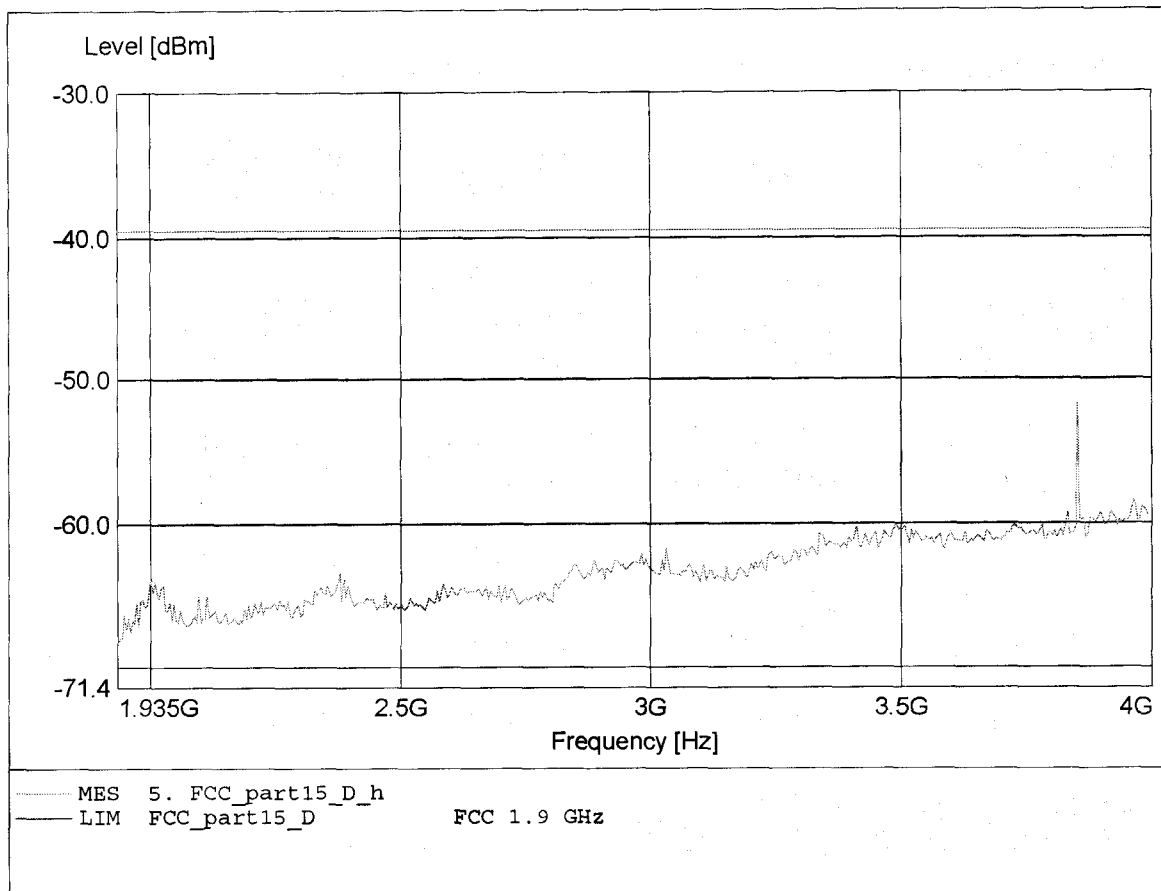


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 62.024MHz Pmax: -66.93dBm RBW: 100 kHz

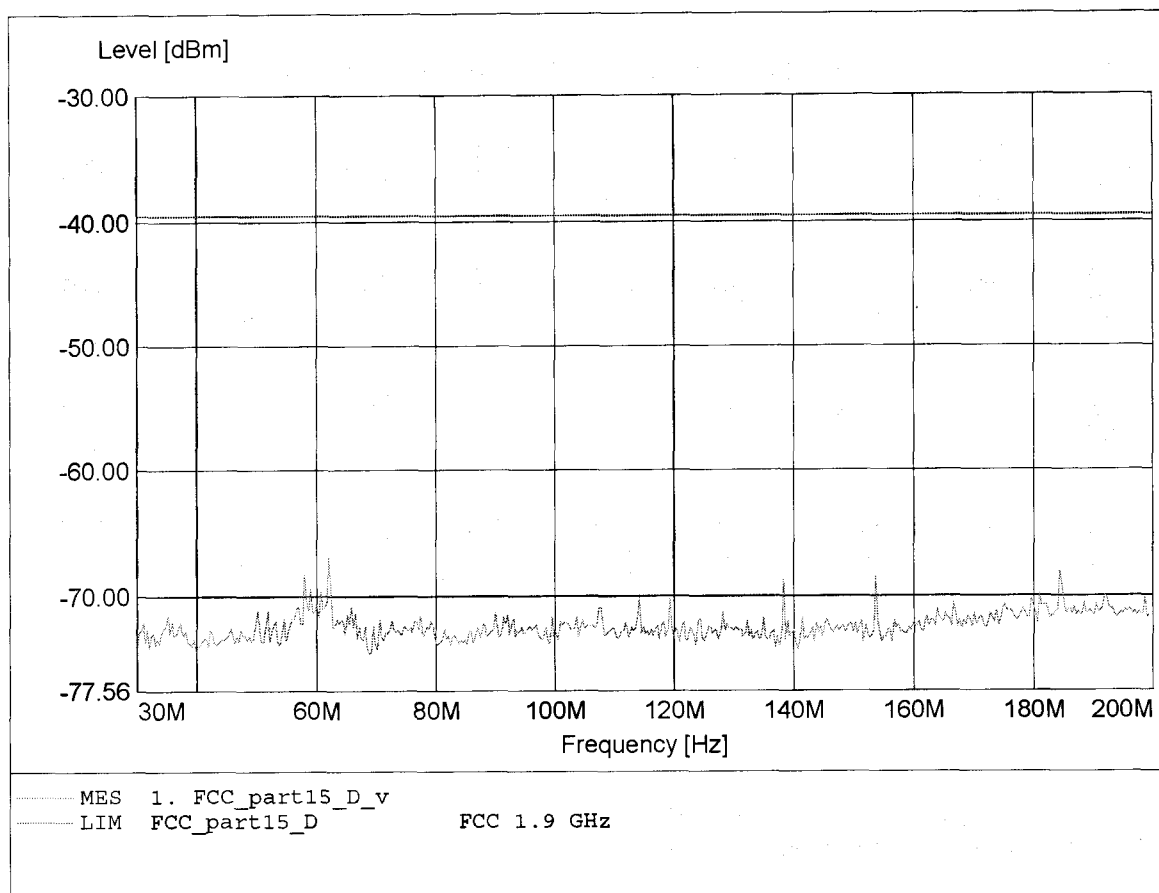


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:184.329MHz Pmax:-68.46dBm RBW: 100 kHz

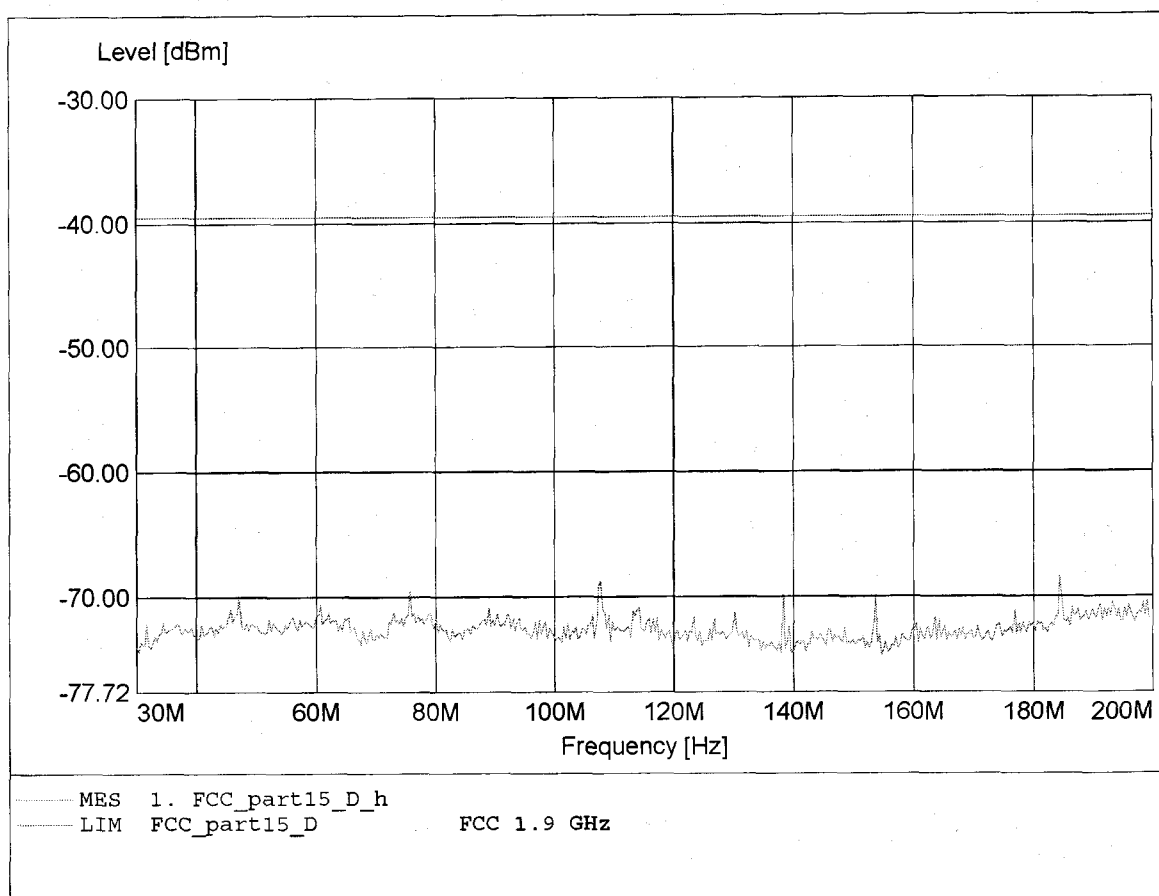


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 275.351MHz Pmax: -61.53dBm RBW: 100 kHz

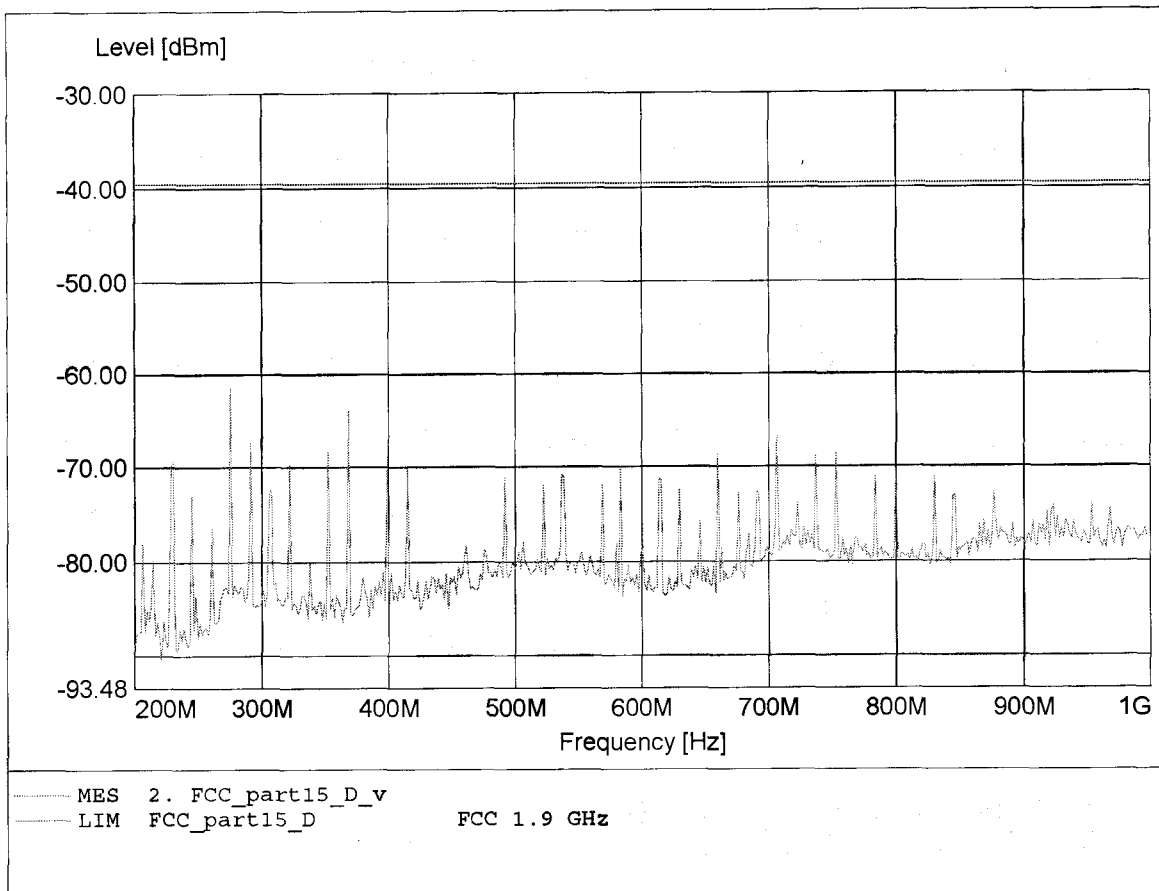


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 753.106MHz Pmax: -61.93dBm RBW: 100 kHz

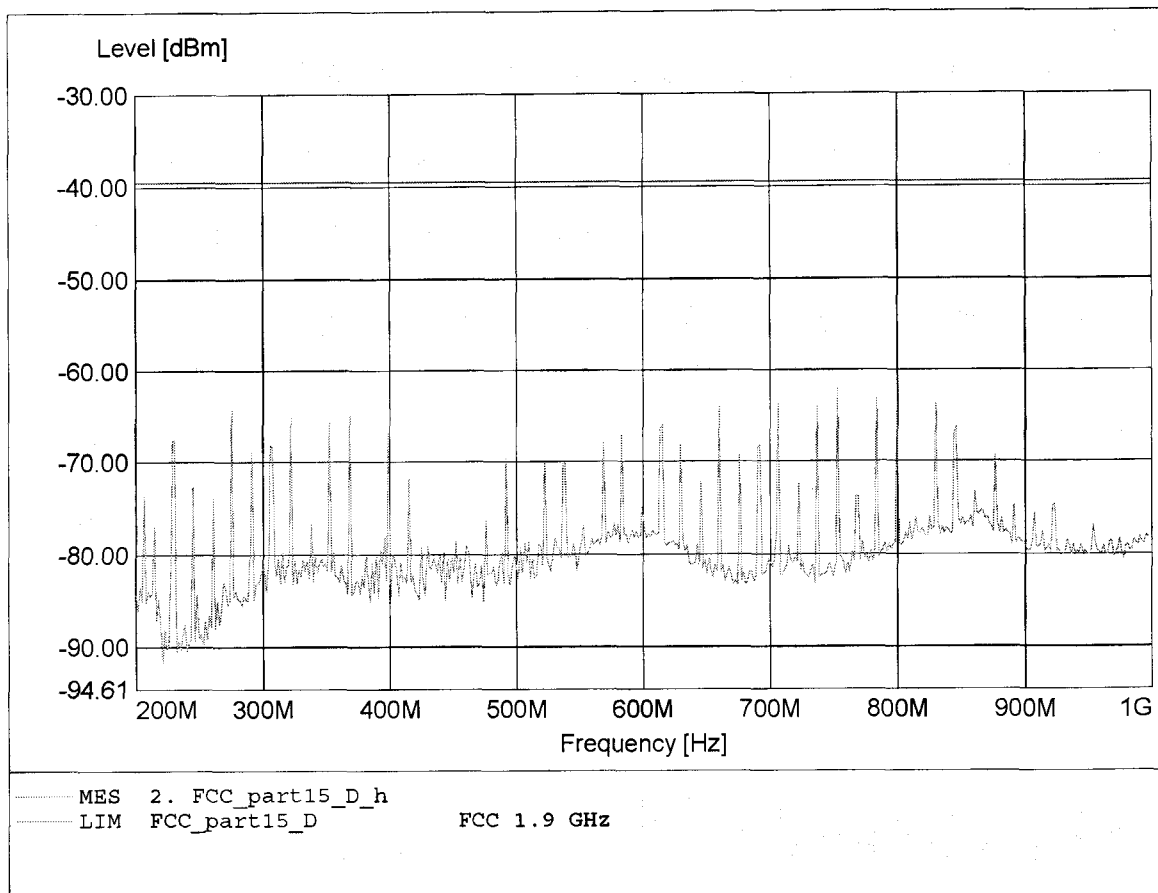


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.911GHz Pmax:-61.48dBm RBW: 1 MHz

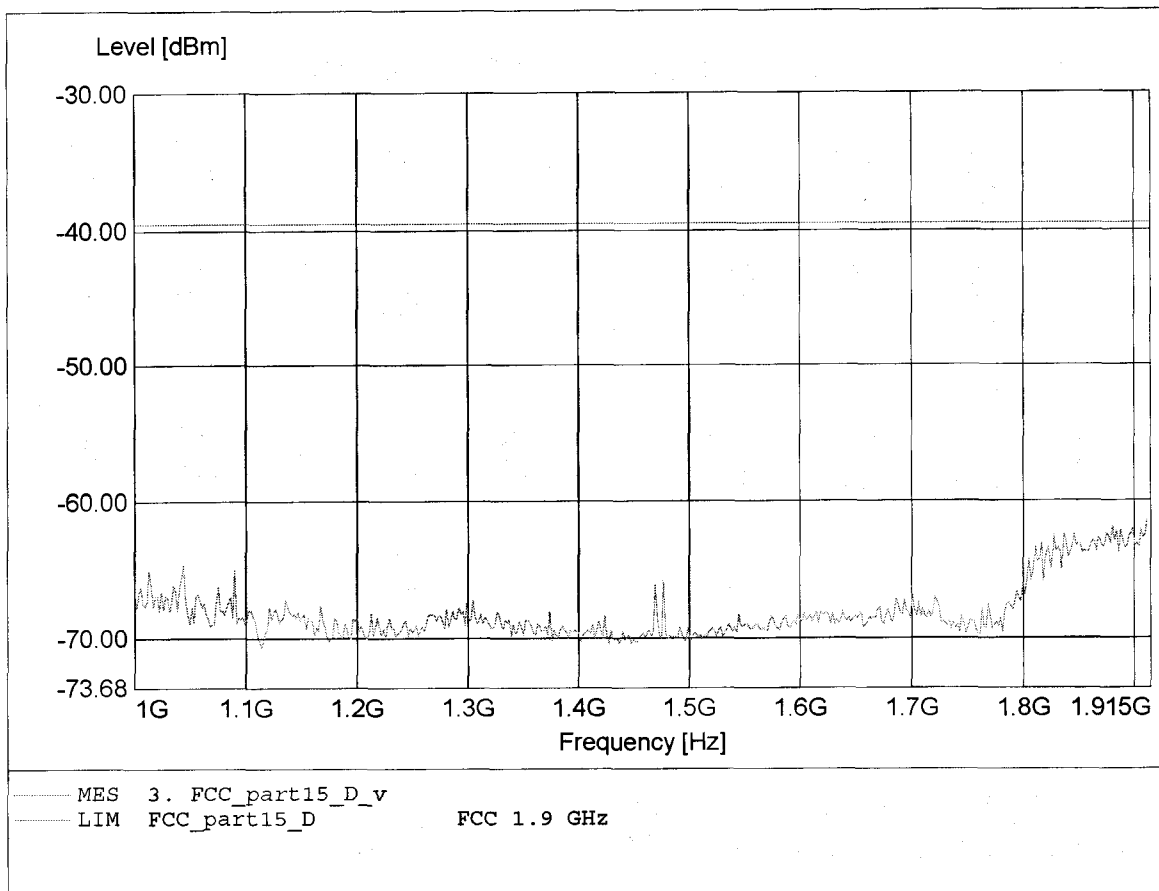


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.909GHz Pmax:-63.69dBm RBW: 1 MHz

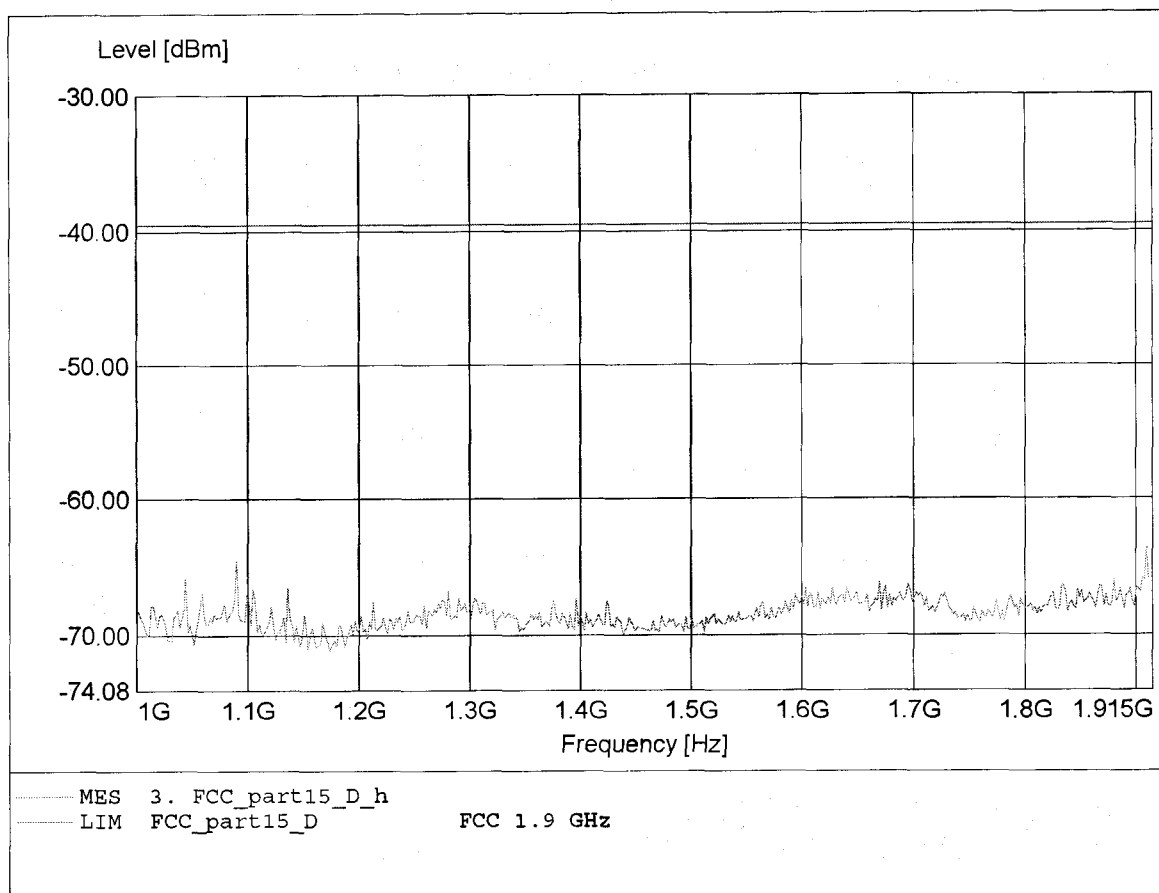


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-45.40dBm RBW:10 kHz

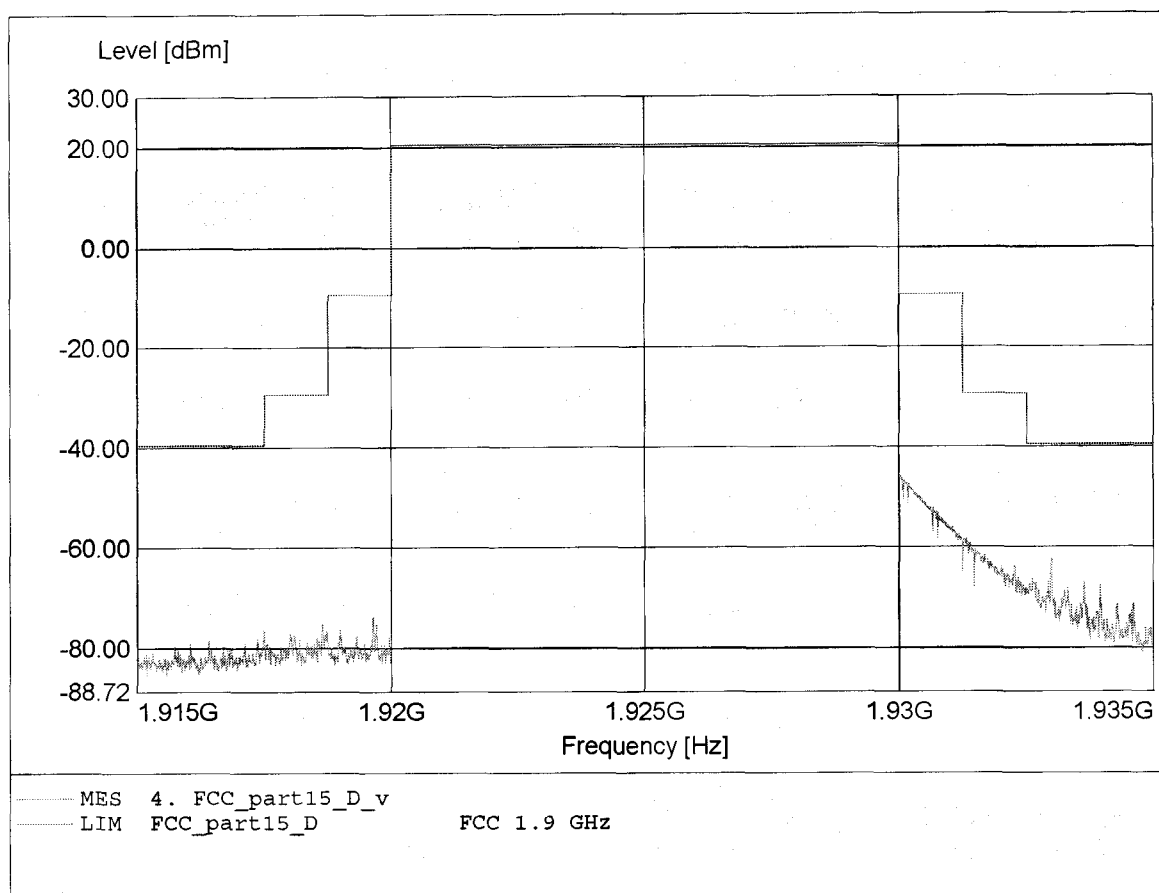


Spurious emissions under normal conditions
FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-61.55dBm RBW:10 kHz

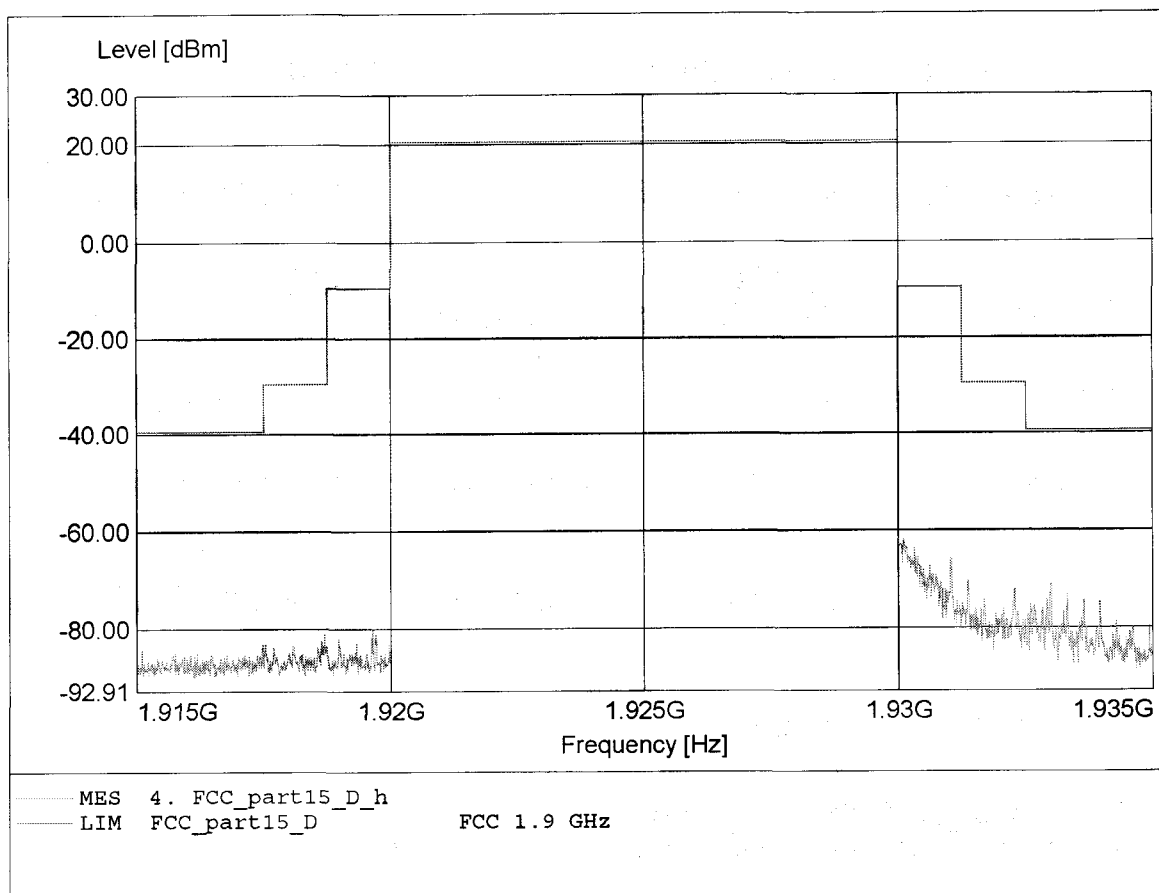


Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D

Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 2.030GHz Pmax: -48.59dBm RBW: 1 MHz

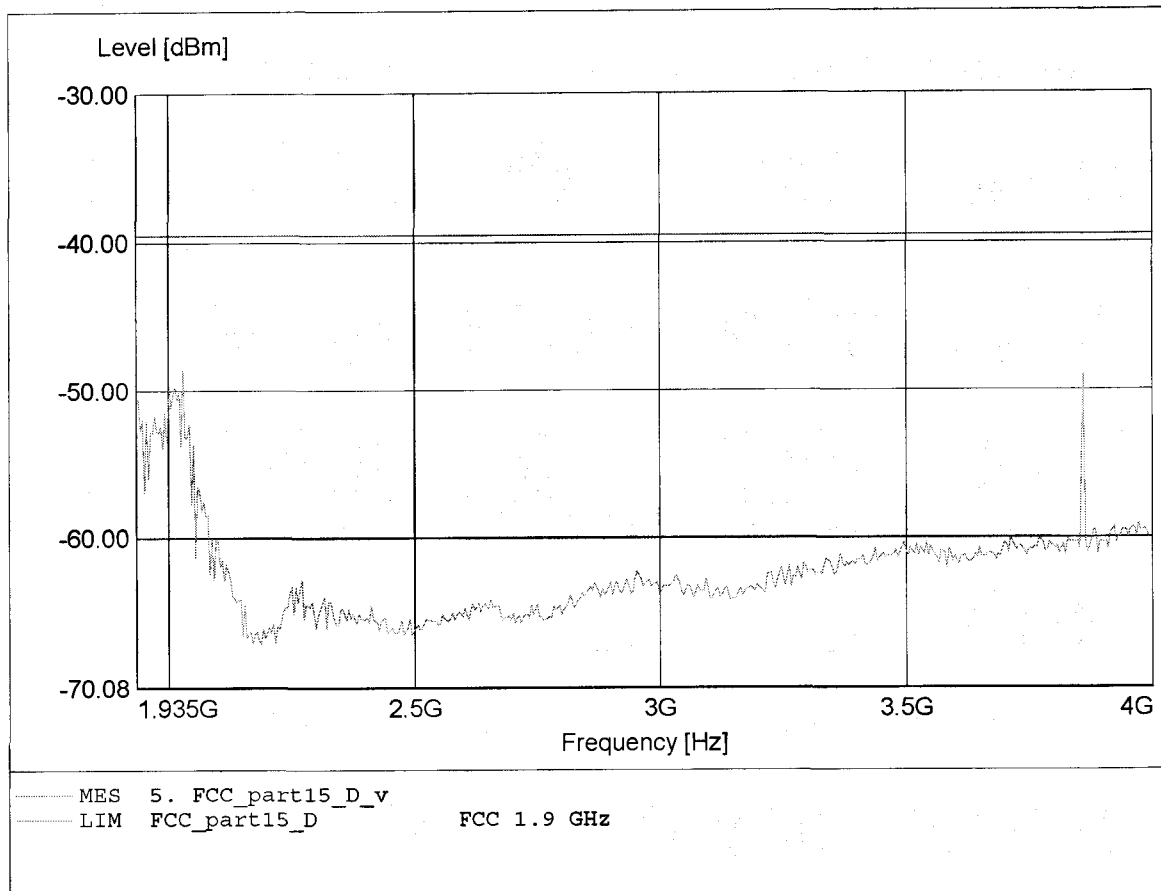

Spurious emissions under normal conditions
FCC RULES PART 15, SUBPART D


Applicant: Ascom Tateco AB
EUT: US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.859GHz Pmax: -50.85dBm RBW: 1 MHz

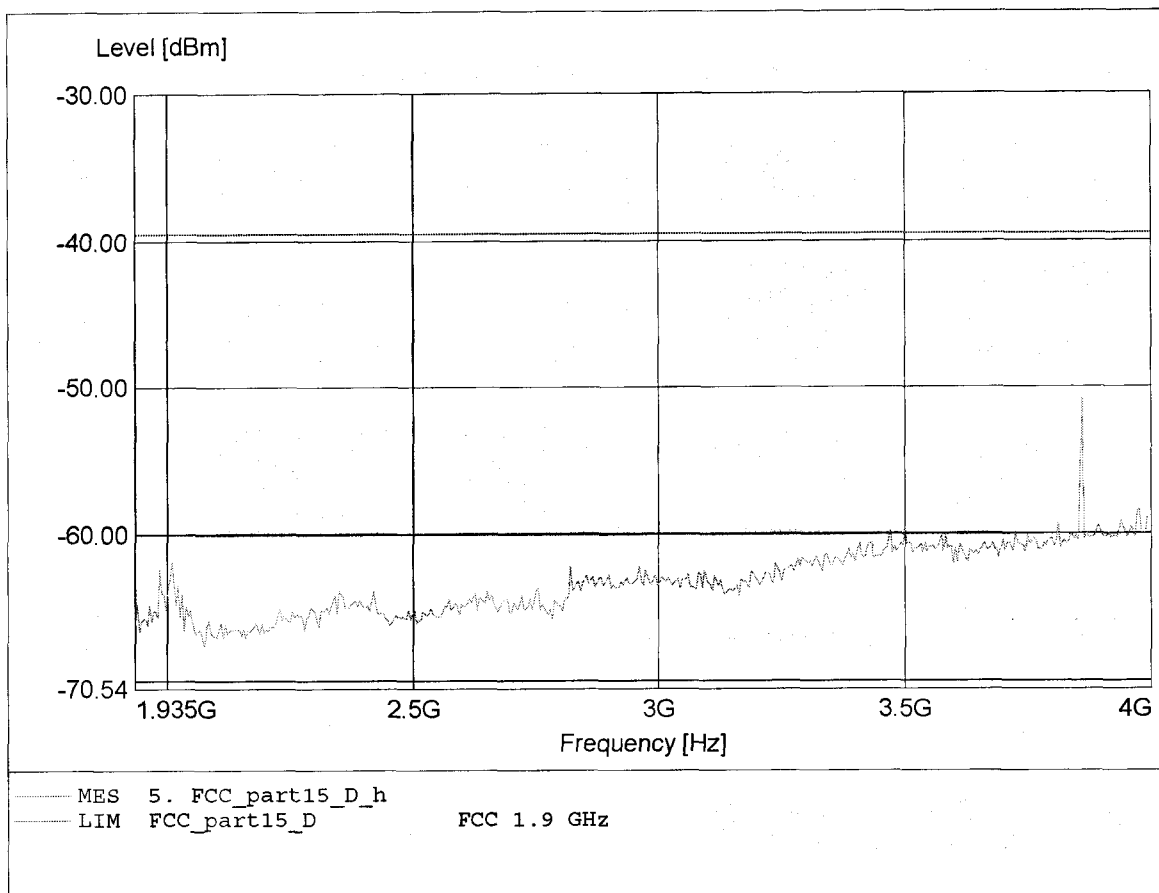

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.851GHz Pmax:-54.10dBm RBW:10 kHz

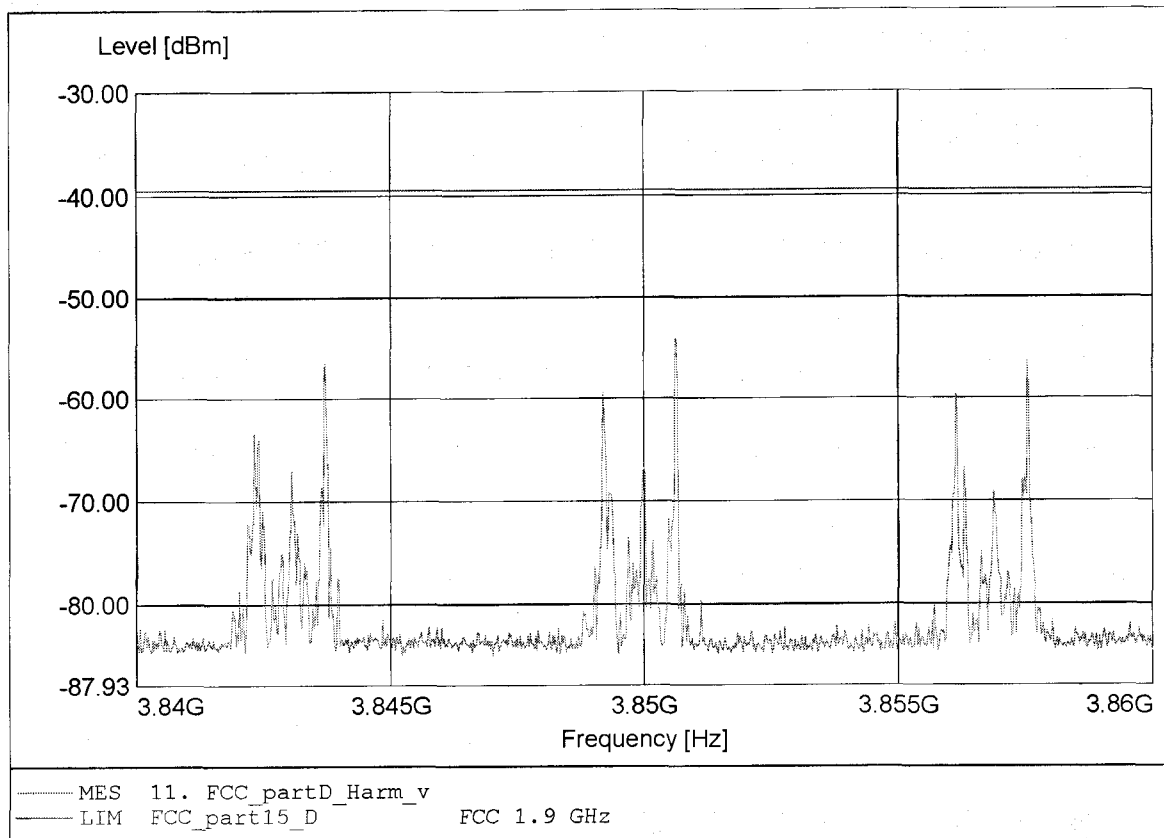

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.844GHz Pmax:-55.45dBm RBW:10 kHz

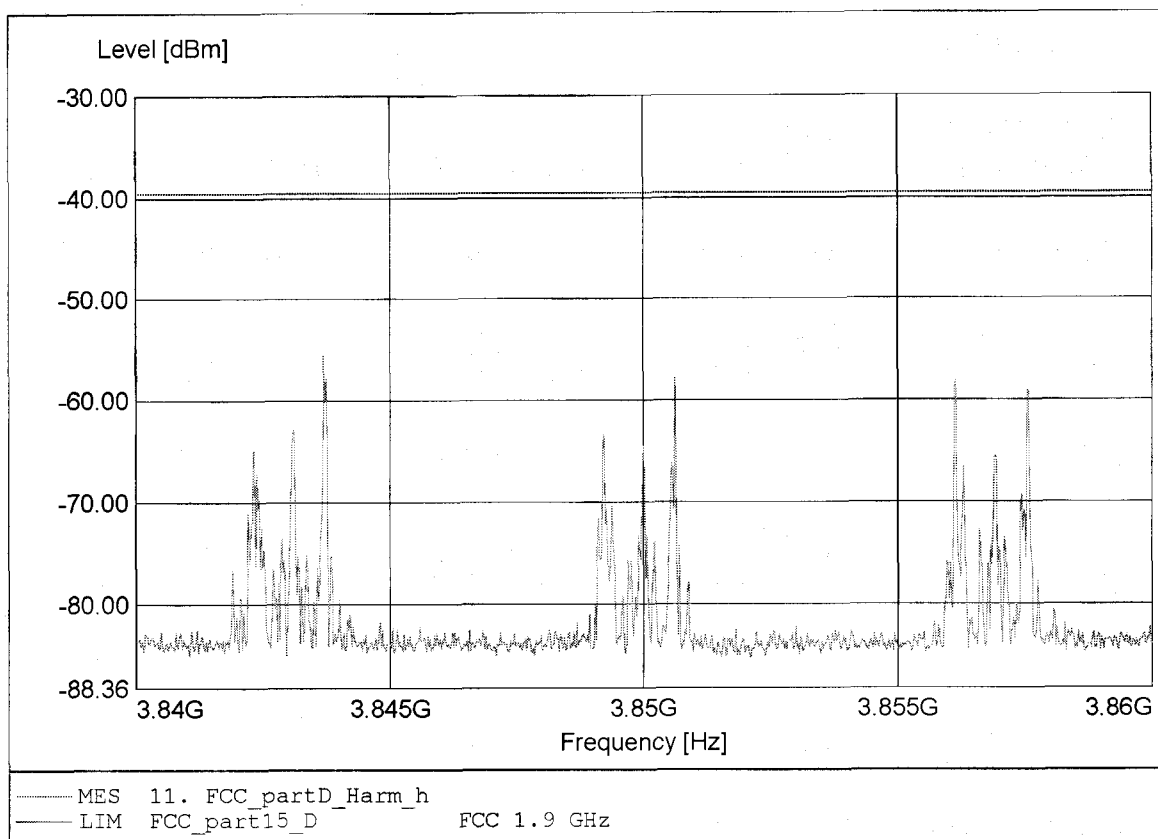

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 5.786GHz Pmax: -58.97dBm RBW: 10 kHz

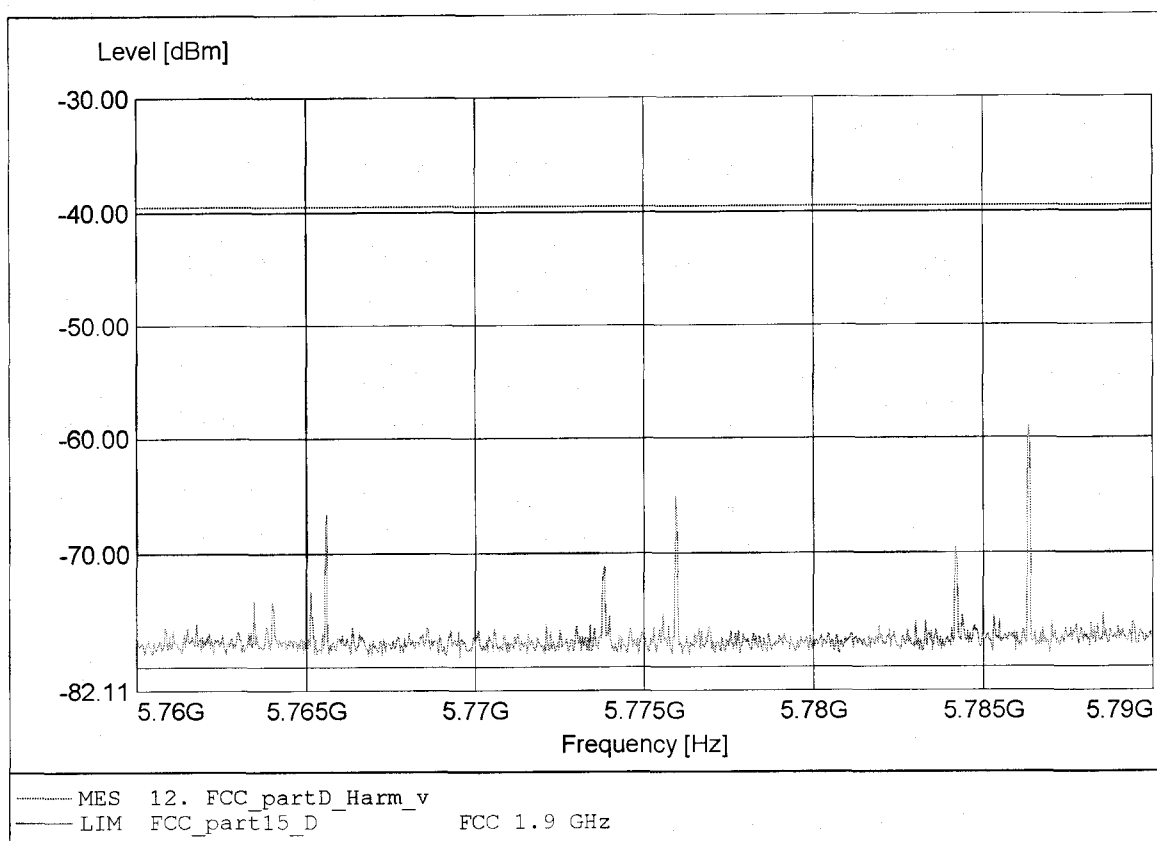

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.786GHz Pmax:-57.55dBm RBW:10 kHz

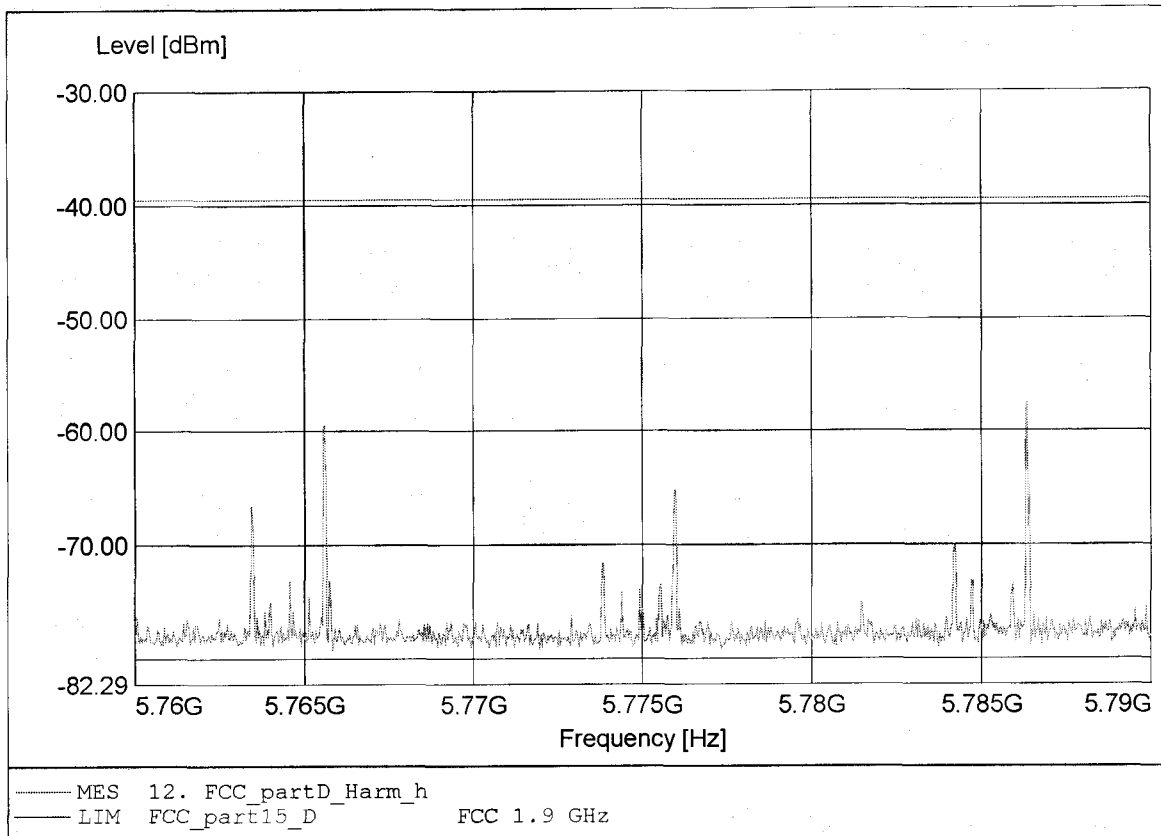

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.712GHz Pmax: -60.23dBm RBW: 10 kHz

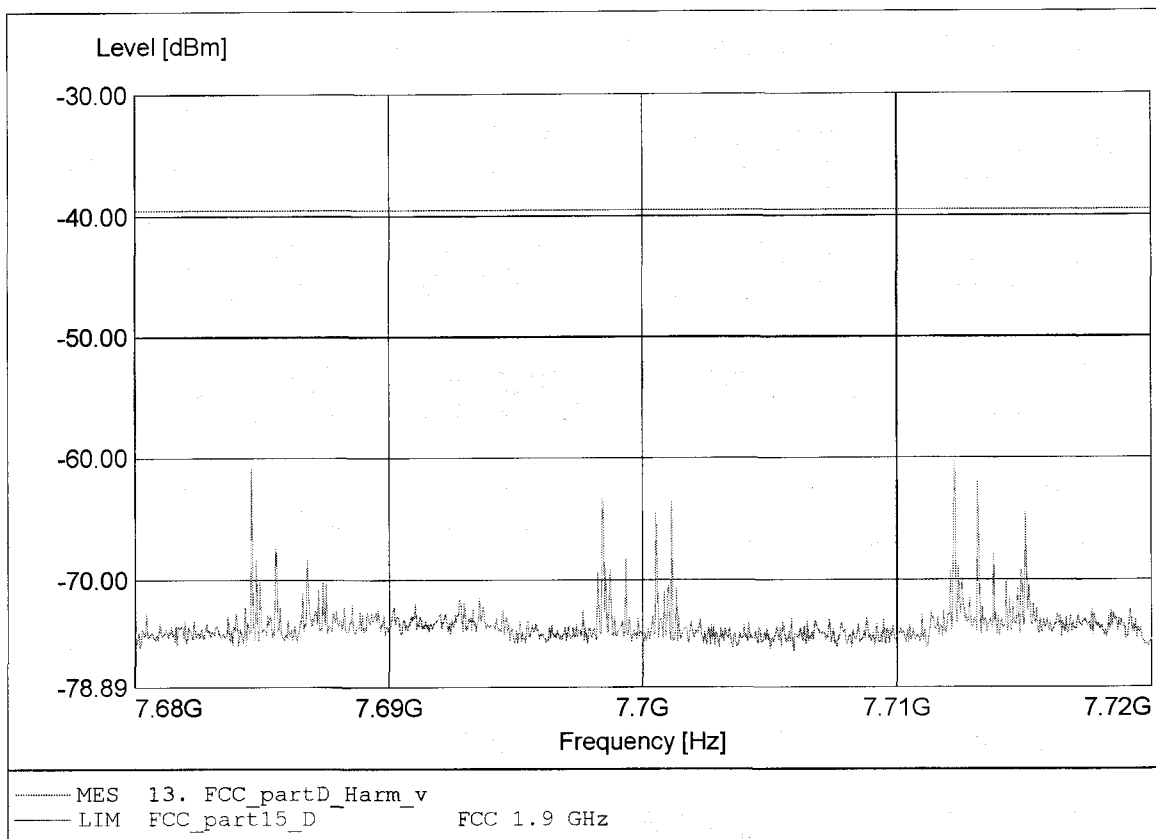

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.701GHz Pmax: -42.27dBm RBW: 10 kHz

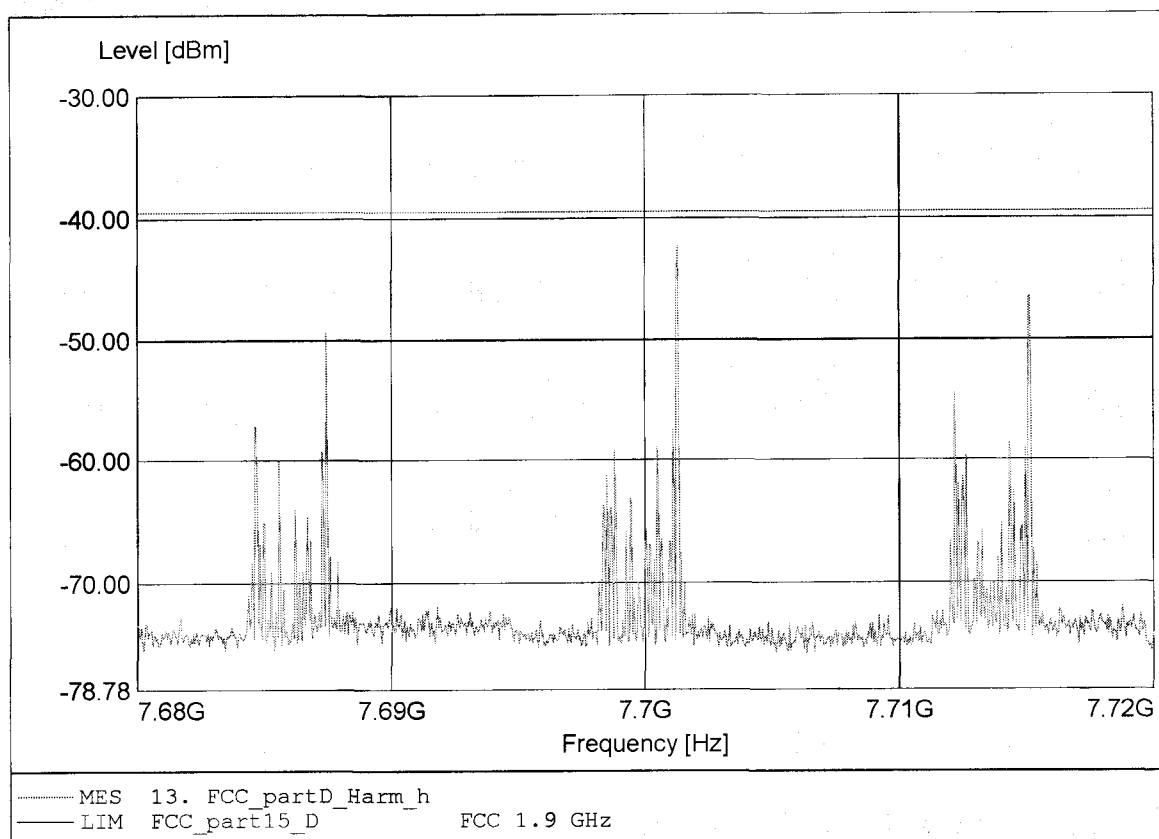

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.609GHz Pmax:-45.21dBm RBW:10 kHz

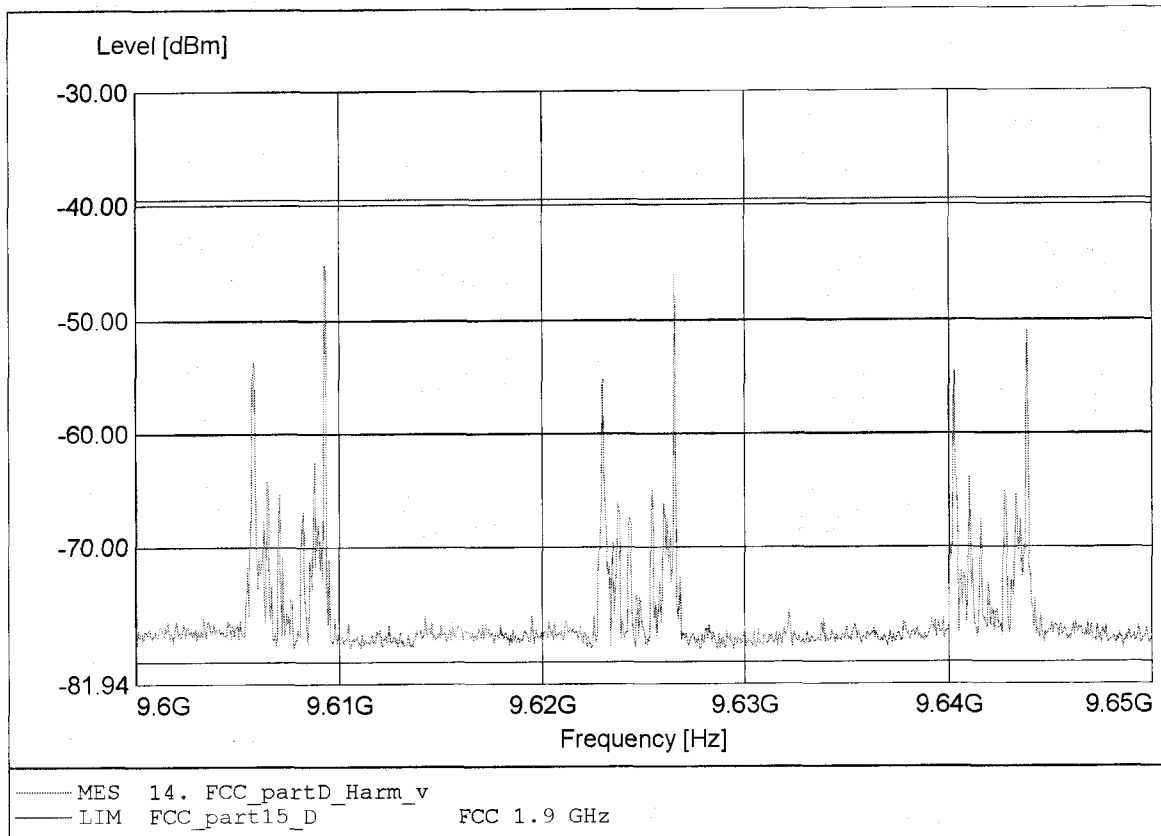

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 9.644GHz Pmax: -40.09dBm RBW: 10 kHz

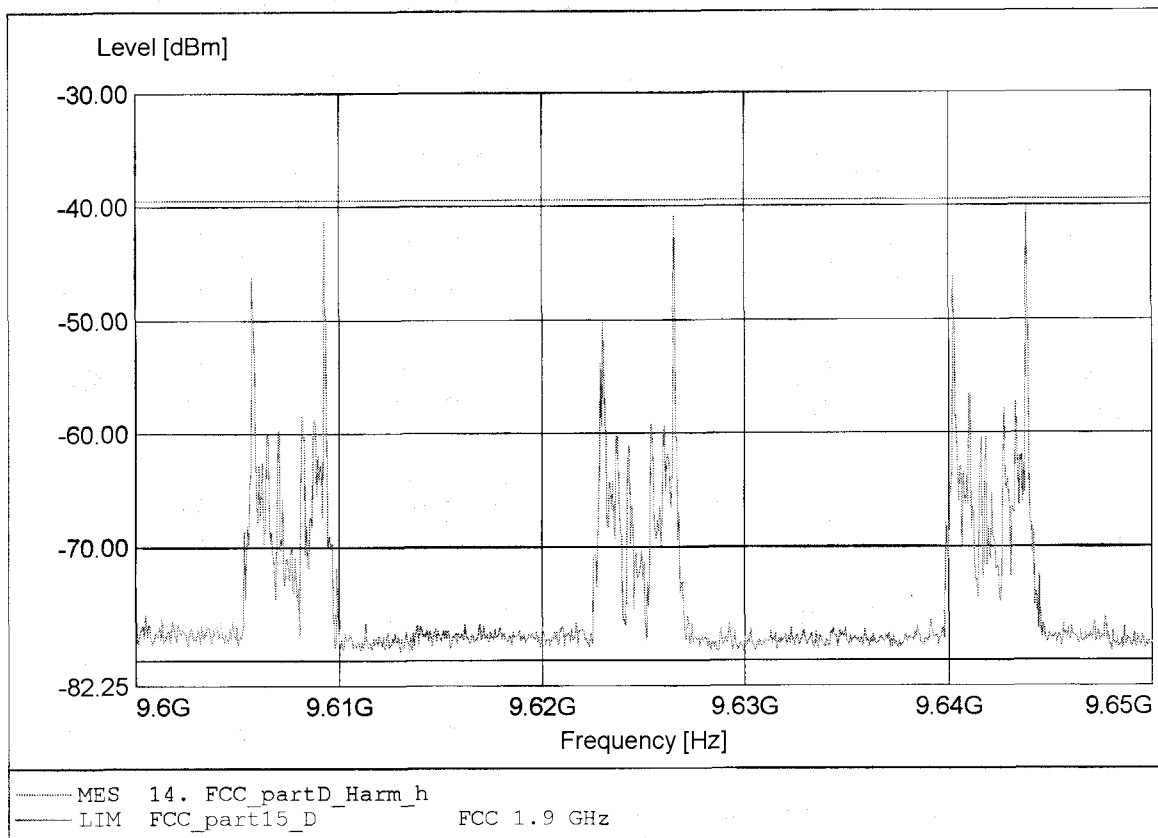

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.531GHz Pmax:-52.94dBm RBW:10 kHz

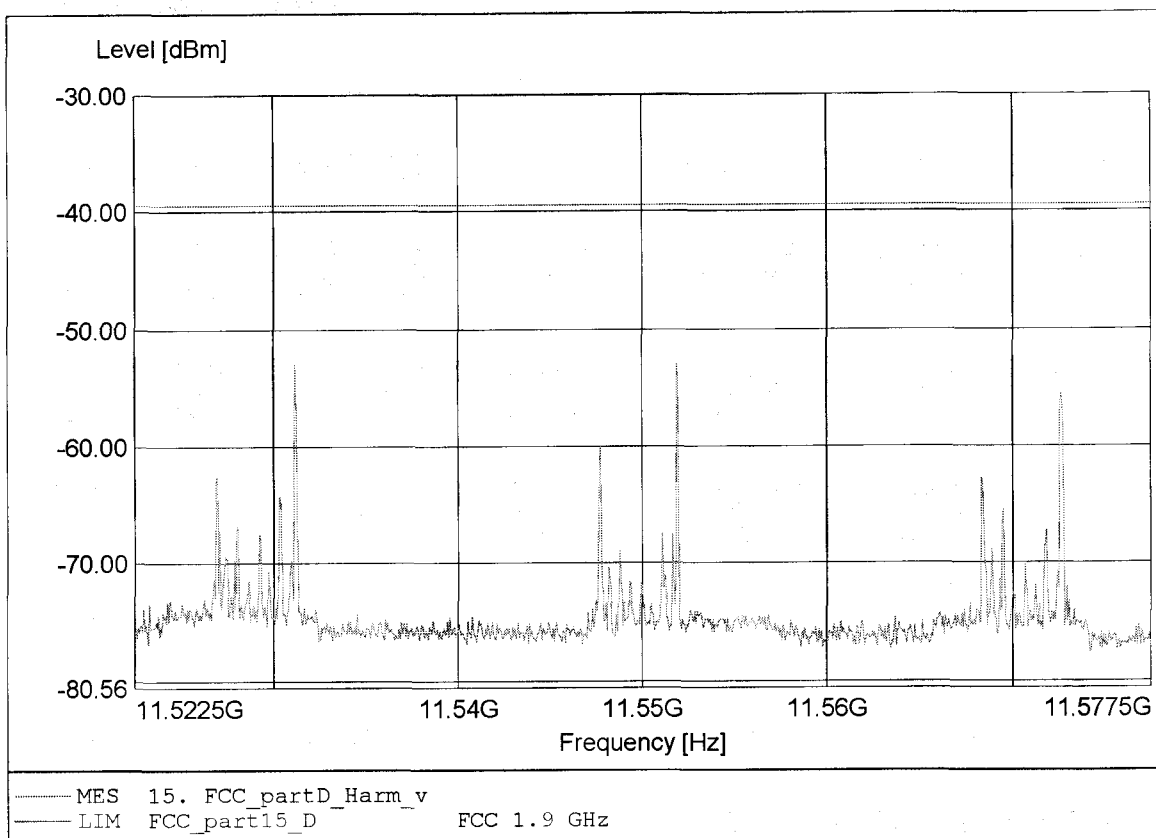

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.552GHz Pmax:-50.27dBm RBW:10 kHz

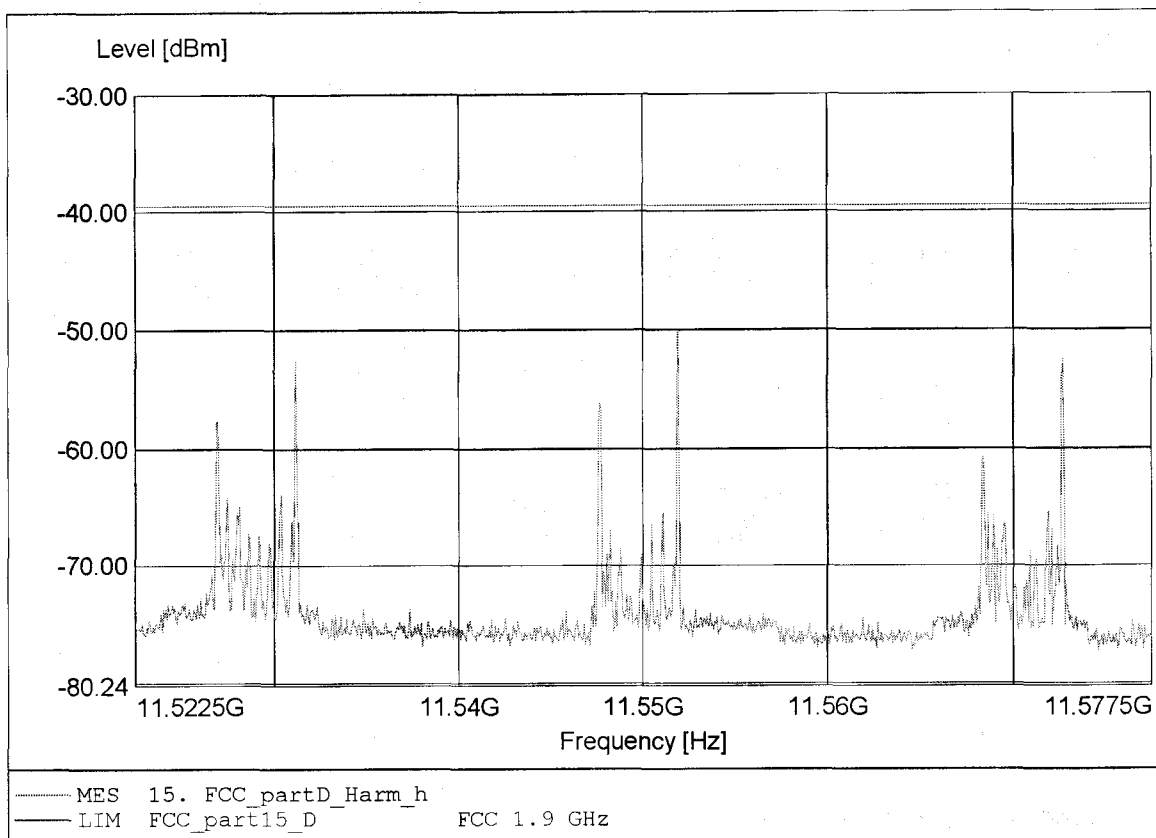

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.477GHz Pmax:-43.12dBm RBW:10 kHz

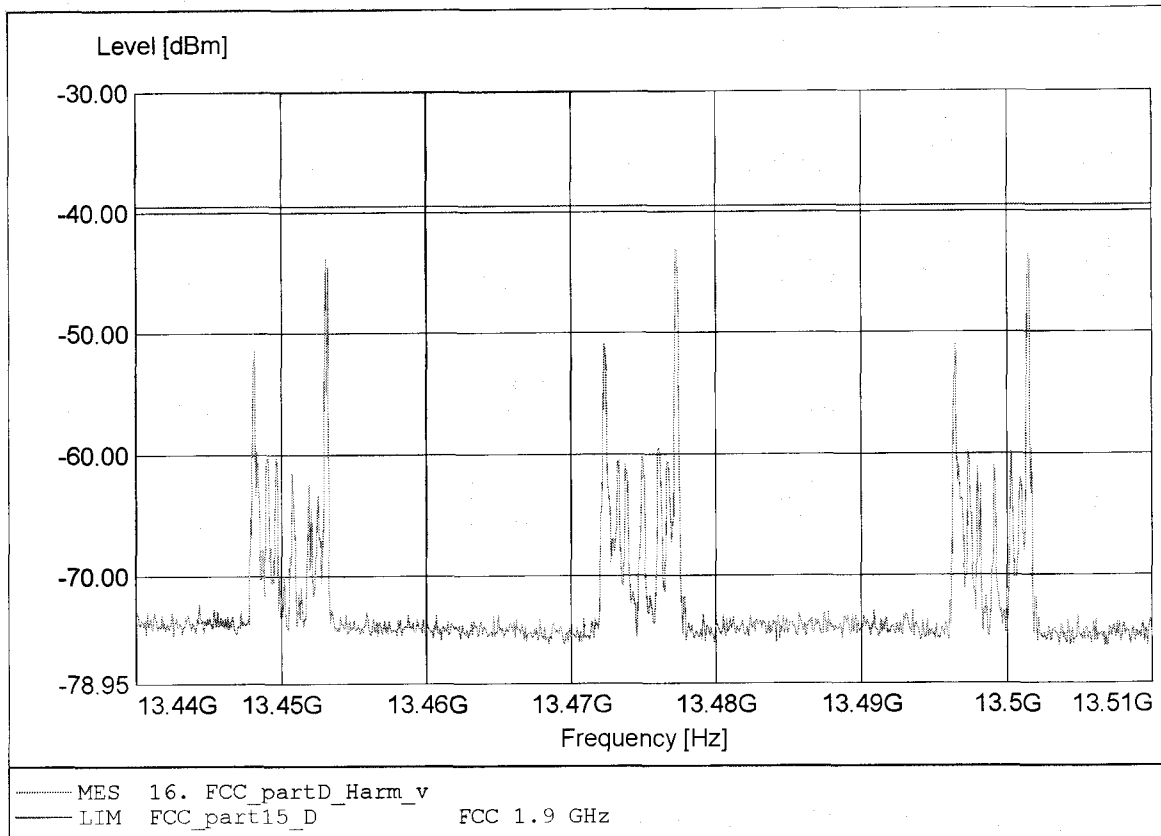

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.477GHz Pmax:-45.64dBm RBW:10 kHz

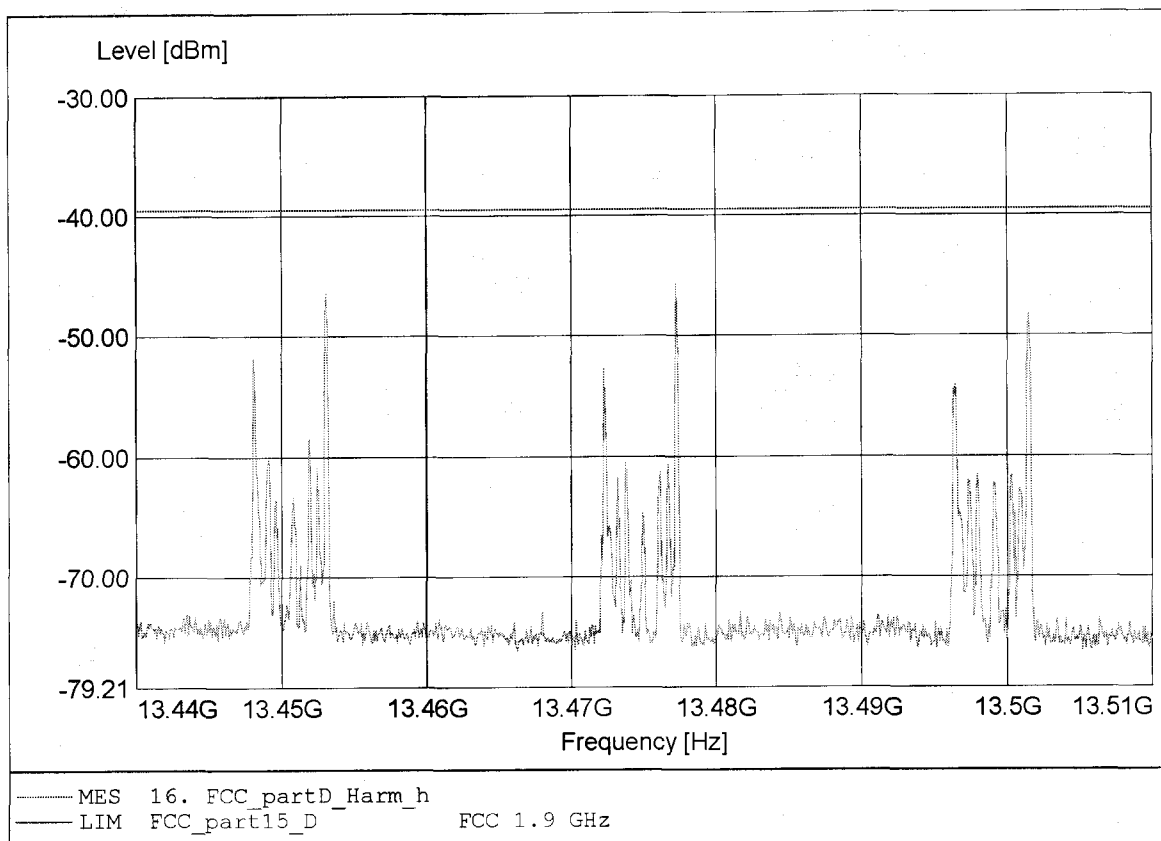

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.430GHz Pmax:-49.55dBm RBW:10 kHz

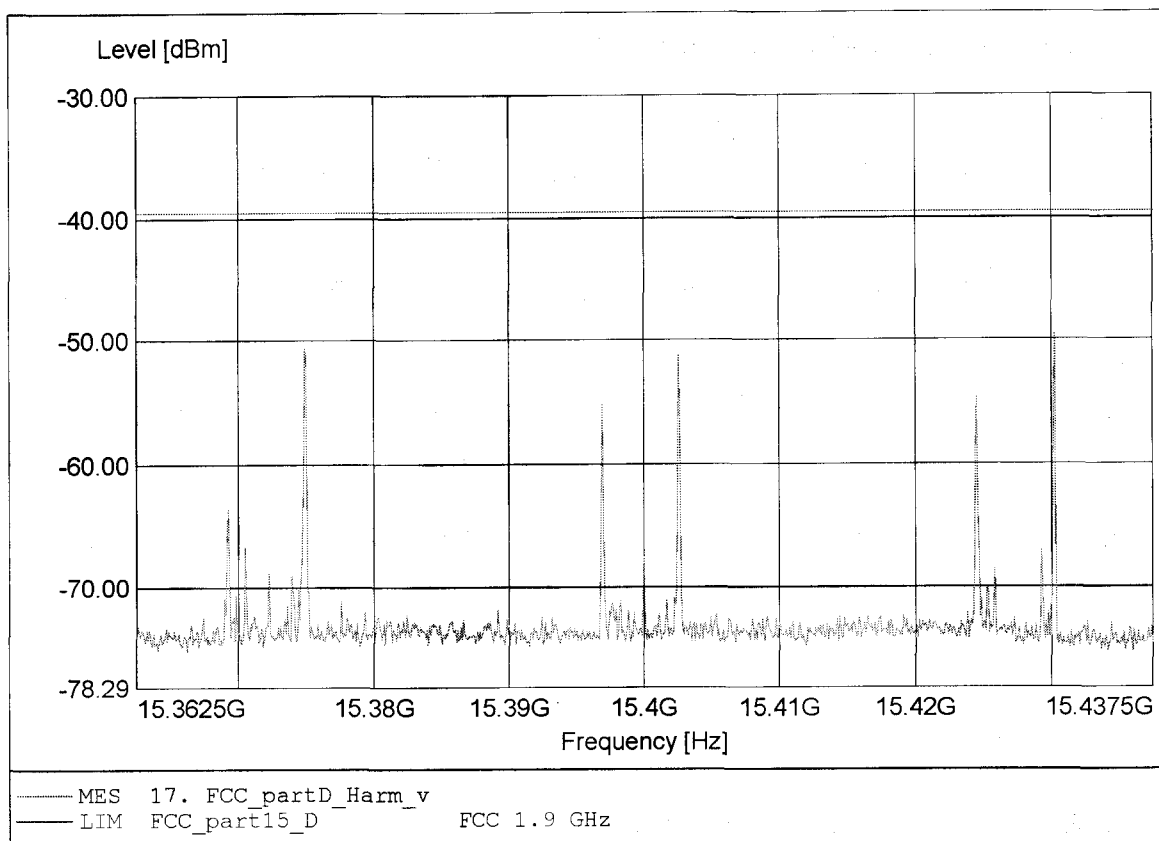

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.375GHz Pmax:-50.77dBm RBW:10 kHz

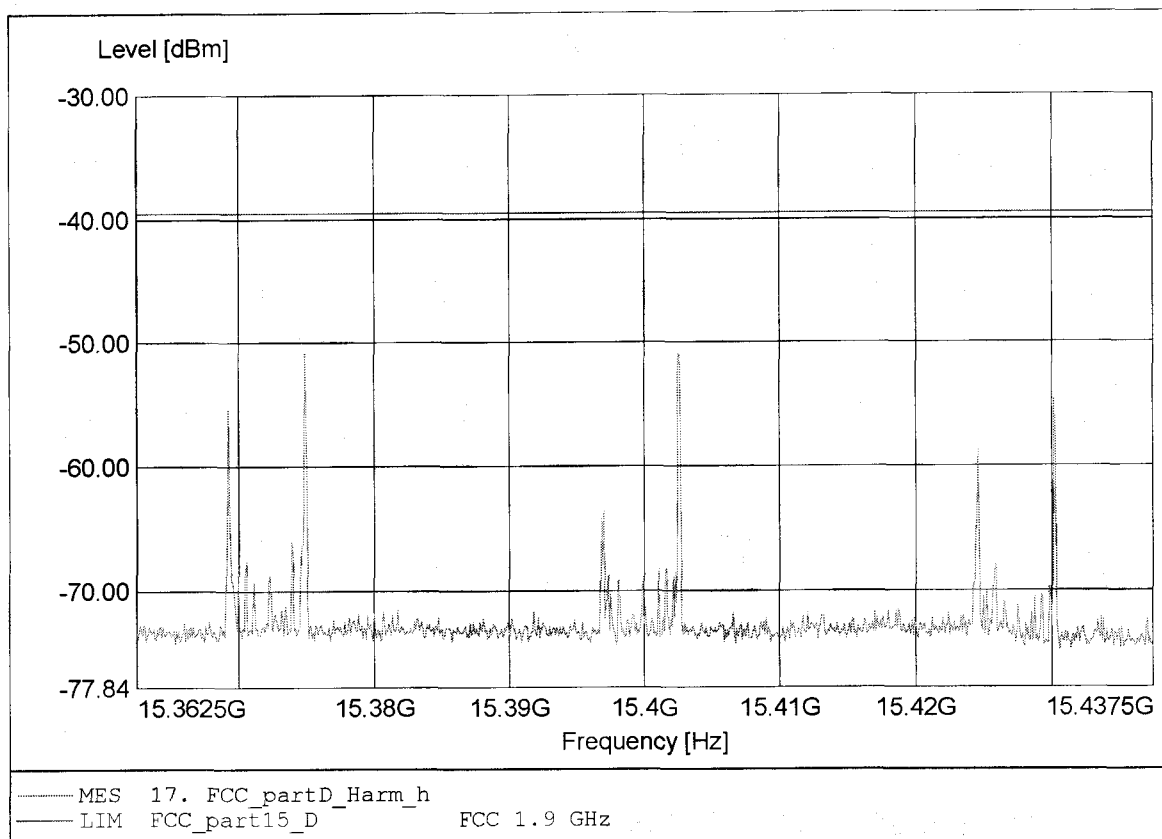

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.359GHz Pmax:-51.96dBm RBW:10 kHz

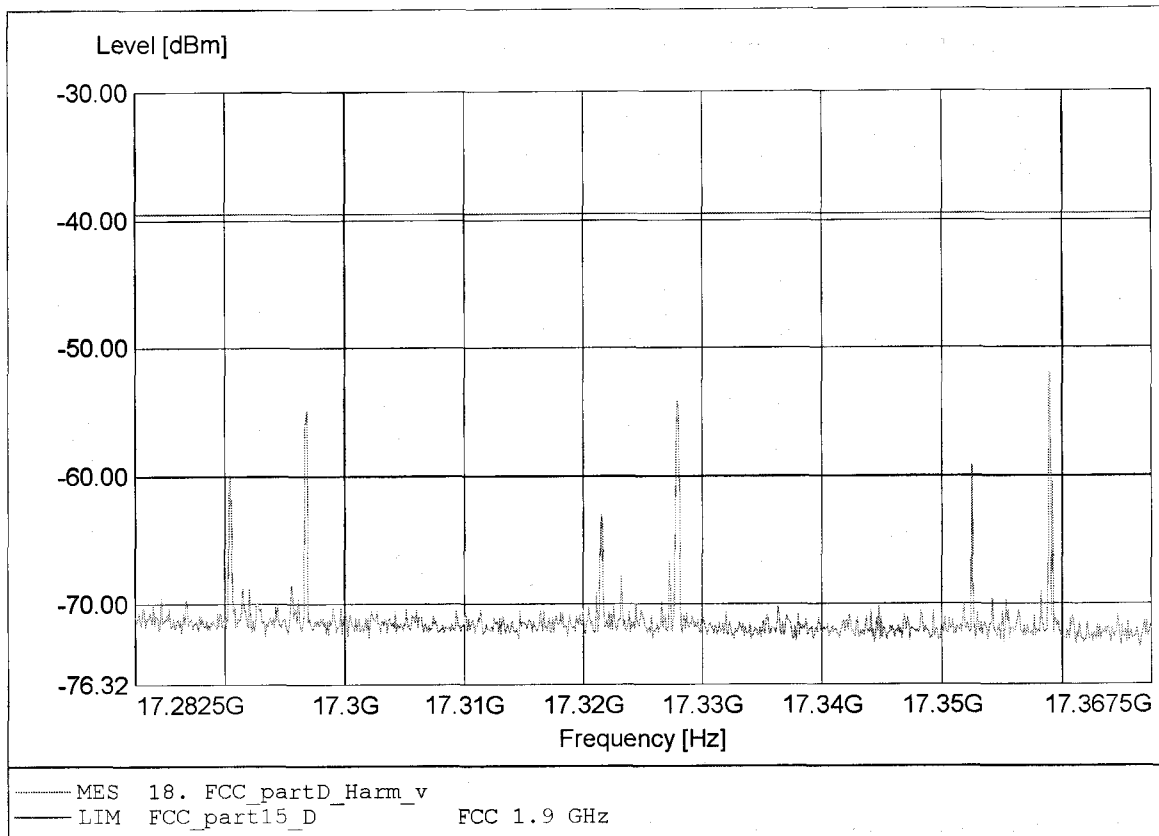

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.297GHz Pmax:-50.39dBm RBW:10 kHz

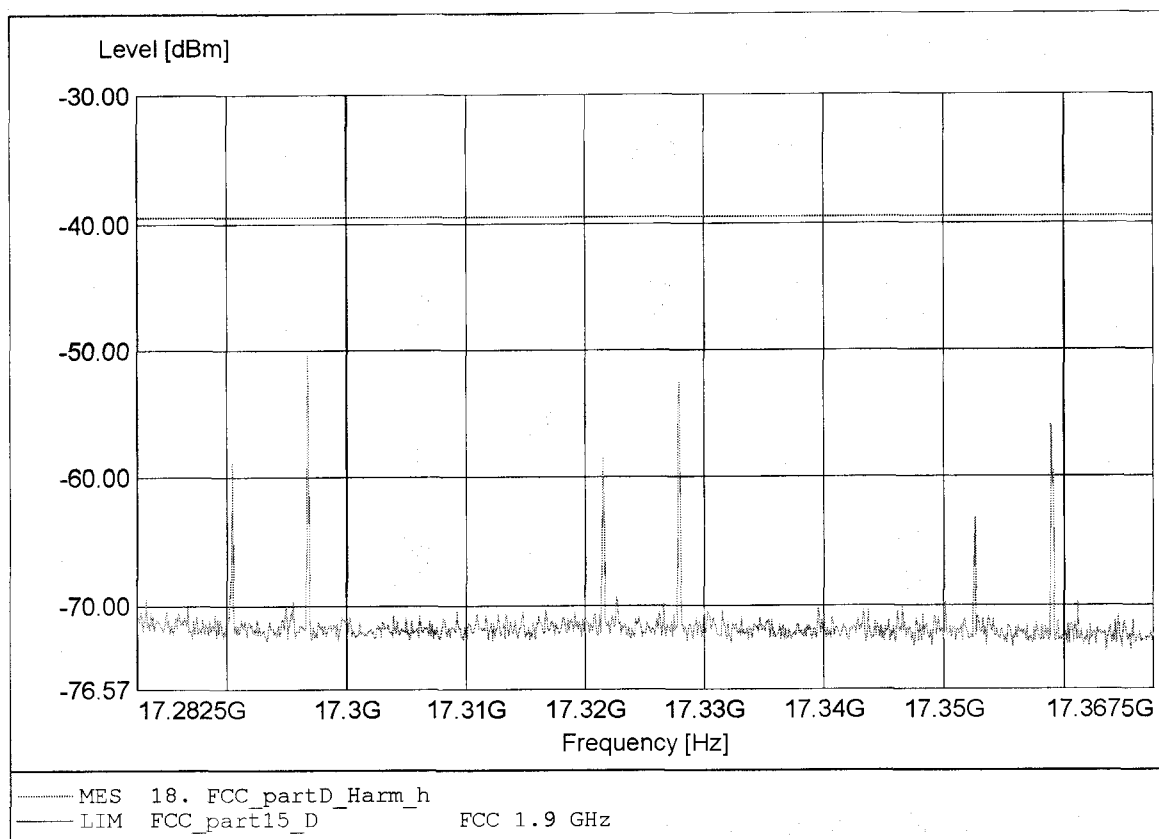

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.219GHz Pmax:-43.58dBm RBW:10 kHz

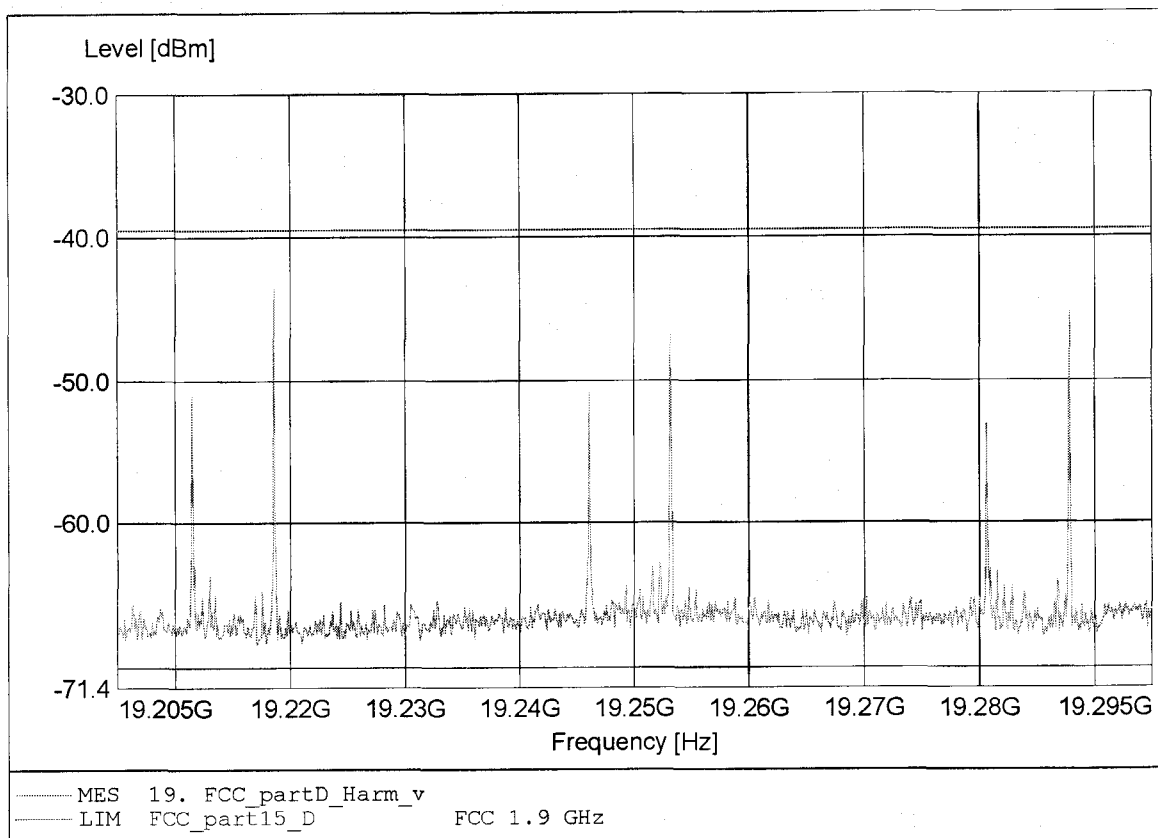

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Applicant: Ascom Tateco AB
EUT : US-DECT Remote Fix Part
Model: BS-330 / Ant.: 2 / Ch.: 0/2/4
Temperature/ Voltage: Temp.: 23°C, Unom.: 30 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.219GHz Pmax:-52.22dBm RBW:10 kHz

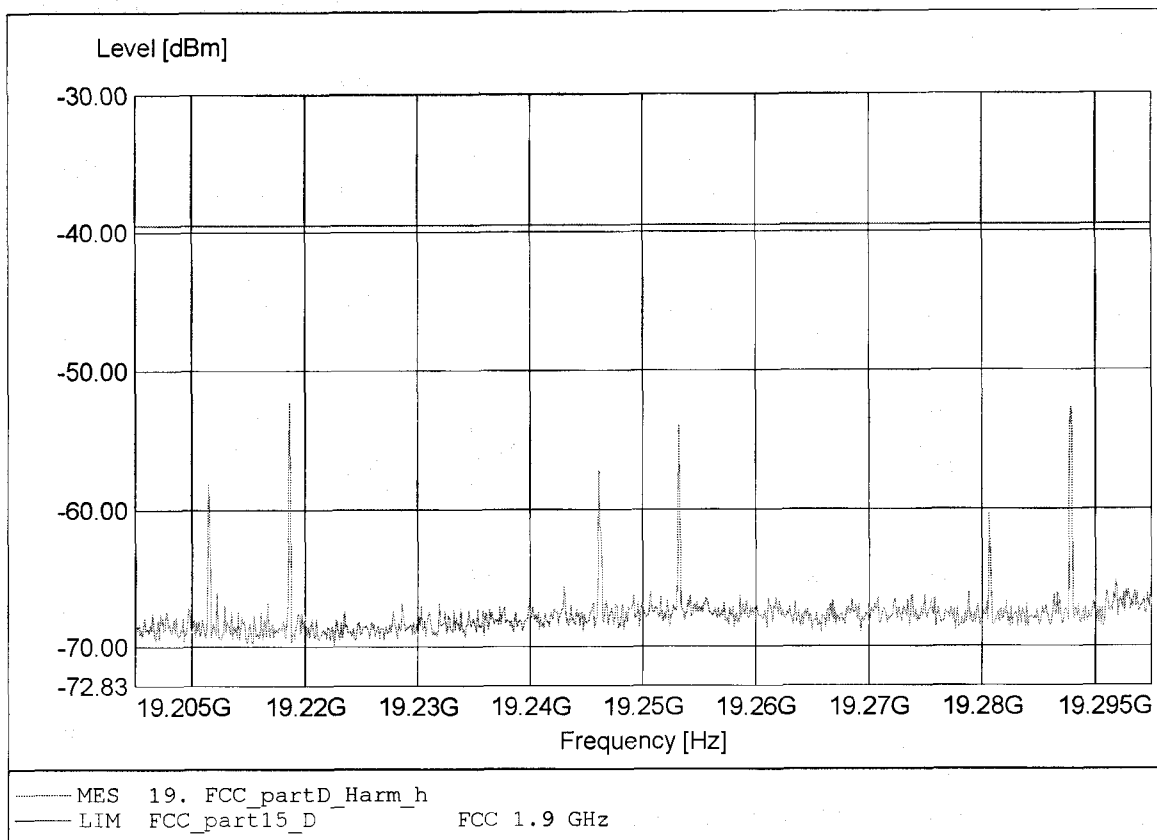

Appendix T

Frame period

Frame Repetition Stability / Frame Period and Jitter

Tested according ANSI C63.17-1998 Sec

Measurement results Fixed Part

Test Performed	Criteria
Frame Period	10 ms
Frame repetition stability	10 ppm
Jitter	25 μ s

Frame Repetition Stability


Frequency (MHz)	Standard Deviation (Hz)	Mean (Hz)	Frame Repetition Stability (ppm)
1924,992	7,07521E-06	99,99977205	0,212

$$\text{Frame Repetition Stability} = 3 * \text{Standard Deviation} / \text{Frame Rate} * 10E06$$

Jitter Measurement

Frequency (MHz)	Standard Deviation (μ s)	Mean (ms)	Jitter (μ s)
1924,992	0,122	10,0000228	0,366

Jitter = 3 * Standard Deviation

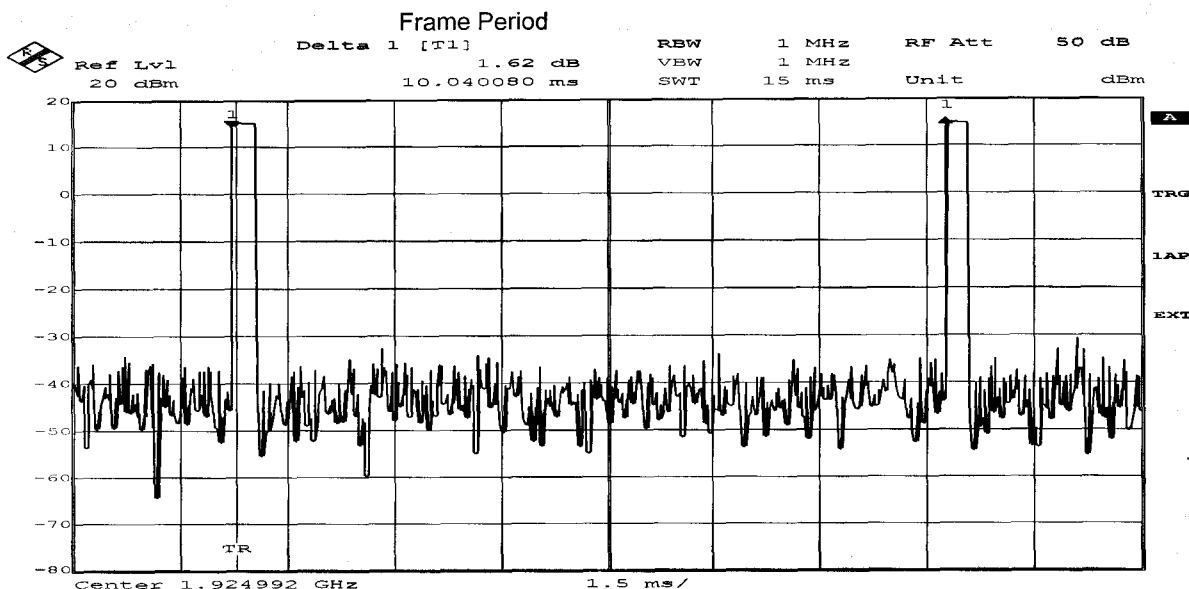

Title: Frame Periode DECT
 Comment A: FCC 15.232 (E)
 Date: 20.JUL.2005 14:41:38

Appendix U

Frequency stability

Frequency Stability § 15.323 (f)

Tested according ANSI C63.17-1998 Section 6.2.3 / 6.2.4

Measurement results Fixed Part

Temp °C	Supply Voltage	Frequency of carrier (MHz)	delta f(min) (KHz)	delta f(max) (KHz)	maximum delta f (ppm)	Mean (MHz)	Deviation ppm
20	Vnom	1924,992	-55,564	-0,867	-28,86	1924,959232	Reference
20	Vmin	1924,992	-55,562	-0,865	-28,86	1924,959234	0,00
20	Vmax	1924,992	-55,566	-0,869	-28,87	1924,95923	0,00
-10	Vnom	1924,992	-35,975	12,763	-18,69	1924,973654	-7,49
55	Vnom	1924,992	-59,834	-10,569	-31,08	1924,955384	2,00

Limit : 10 ppm

$$\text{Deviation ppm} = \frac{FR - FM}{FR} * 10^6$$

FR = Reference frequency of carrier at 20°C and Vnom

FM = Measured frequency of carrier

