



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 15.227 TEST REPORT

### LOW POWER UNLICENSED TRANSMITTER

Applicant	SCIENTIFIC TOYS, LTD.
Address	RM.1108, 11/F., BLOCK B, NEW MANDARIN PLAZA 14 SCIENCE MUSEUM ROAD TST EAST KOWLOON HONG KONG
FCC ID	BY34734-27TP
Product Description	26.96-27.28 MHz WIRELESS R/C TOY-TX
Date Sample Received	7/1/2009
Date Tested	7/2/2009
Tested By	JOE SCOGLIO
Approved By	MARIO DE ARANAZETA
Timco Report No.	1488UT9TestReport.doc
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



## TABLE OF CONTENTS

GENERAL REMARKS.....	3
REPORT SUMMARY .....	4
TEST ENVIRONMENT.....	4
TEST SETUP.....	4
DUT SPECIFICATION .....	5
TEST EQUIPMENT LIST .....	6
TEST PROCEDURES .....	7
RADIATION INTERFERENCE.....	8
OCCUPIED BANDWIDTH.....	9

APPLICANT: SCIENTIFIC TOYS LTD.  
FCC ID: BY34734-27TP  
REPORT: Y:\S\SCIENTIF\1488UT9\1488UT9TestReport.doc

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report  
 not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, Fl 32669



### Authorized Signatory Name:

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date: 7/1/2009**

APPLICANT: SCIENTIFIC TOYS LTD.  
FCC ID: BY34734-27TP  
REPORT: Y:\S\SCIENTIF\1488UT9\1488UT9TestReport.doc

**REPORT SUMMARY**

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.227, ANSI C63.4: 2003

**TEST ENVIRONMENT**

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C Relative humidity: 50%

**TEST SETUP**

Test Exercise (e.g. software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.

**DUT SPECIFICATION**

Applicant	SCIENTIFIC TOYS, LTD.		
Description	26.96-27.28 MHz WIRELESS R/C TOY-TX		
FCC ID	BY34734-27TP		
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

APPLICANT: SCIENTIFIC TOYS LTD.  
 FCC ID: BY34734-27TP  
 REPORT: Y:\S\SCIENTIF\1488UT9\1488UT9TestReport.doc

### TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 2/5/09	2/5/12
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Frequency Counter	HP	5385A	2730A03025	CAL 7/6/07	7/6/09
Hygro-Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log-Periodic	Electro-Metrics	LPA-30	409	CAL 7/18/08	7/18/09
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	CAL 6/2/09	6/2/11

APPLICANT: SCIENTIFIC TOYS LTD.  
 FCC ID: BY34734-27TP  
 REPORT: Y:\S\SCIENTIF\1488UT9\1488UT9TestReport.doc

**TEST PROCEDURES**

**Radiated Spurious Emissions:** The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and the following plot was generated. The vertical scale is set to 10 dB per division.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dB $\mu$ V	ACF dB/m	Cable Loss dB	Field Strength dB $\mu$ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56

**ANSI C63.4-2003 Measurement Procedures:** The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

For measurements below 30 MHz, a loop antenna was used and rotated in horizontal and vertical positions to maximize emissions. Emissions attenuated more than 20 dB below the permissible value are not reported.

**RADIATION INTERFERENCE**

**Rules Part No.:** 15.227

**Requirements:**

Frequency MHz	Limits
Fundamental Frequency	80.0 dBµV/m measured @ 3 meters
30 – 88	40.0 dBµV/m measured @ 3 meters
80 – 216	43.5 dBµV/m measured @ 3 meters
216 – 960	46.0 dBµV/m measured @ 3 meters
Above 960	54.0 dBµV/m measured @ 3 meters

**Test Data:**

Emission Frequency MHz	Meter Reading dBµV	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dBµV/m	Margin dB
27.10	31.6	V	0.40	12.03	44.03	35.97
27.10	45.5	H	0.40	13.36	59.26	20.74
54.20	10.8	H	0.51	10.07	21.38	18.62
54.20	13.0	V	0.51	9.51	23.02	16.98
81.40	15.9	H	0.60	8.64	25.14	14.86
81.40	22.3	V	0.60	8.74	31.64	8.36
108.50	7.4	H	0.66	10.29	18.35	25.15
108.50	8.3	V	0.66	10.82	19.78	23.72
135.70	5.9	H	0.69	14.34	20.93	22.57
135.70	9.6	V	0.69	14.94	25.23	18.27
162.80	3.5	V	0.75	17.23	21.48	22.02
162.80	3.9	H	0.75	16.26	20.91	22.59
217.10	12.7	V	0.93	11.45	25.08	20.92
217.10	15.5	H	0.93	11.65	28.08	17.92
244.30	6.9	H	0.99	12.32	20.21	25.79
244.30	7.0	V	0.99	12.36	20.35	25.65
271.40	14.5	H	1.04	13.64	29.18	16.82
271.40	15.70	V	1.04	13.53	30.27	15.73

APPLICANT: SCIENTIFIC TOYS LTD.  
 FCC ID: BY34734-27TP  
 REPORT: Y:\S\SCIENTIF\1488UT9\1488UT9TestReport.doc




## OCCUPIED BANDWIDTH

**Rules Part No.:** 15.227

**Requirements:** The field strength of any emissions appearing outside of 26.96 and 27.28MHz shall be attenuated to the general limits of 15.209.

**Test Data:** Please refer to the following plots.

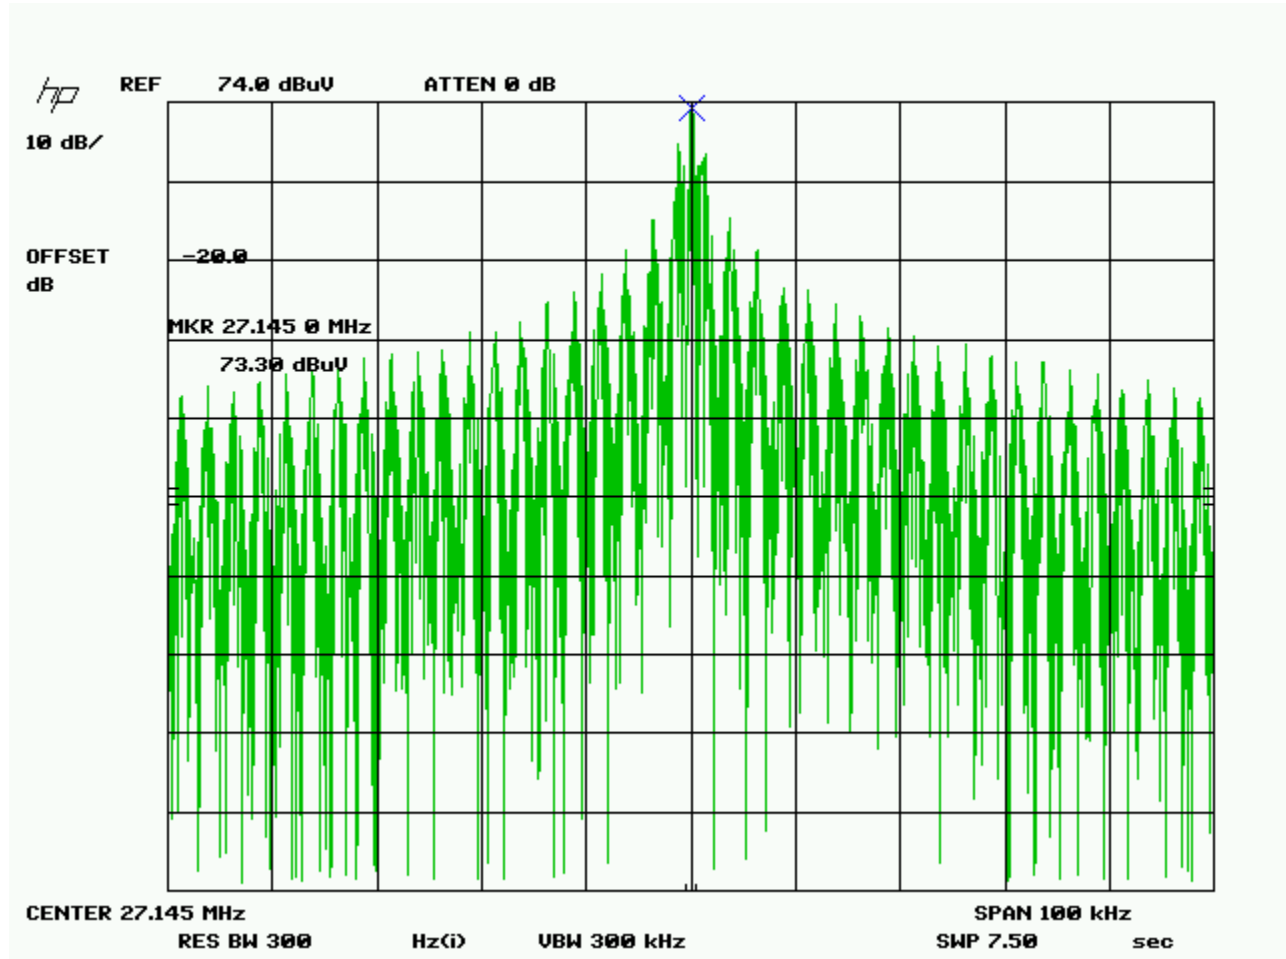

APPLICANT: SCIENTIFIC TOYS LTD.  
 FCC ID: BY34734-27TP  
 REPORT: Y:\S\SCIENTIF\1488UT9\1488UT9TestReport.doc