

**Gakkiku Compliance Company Limited**

Room 1501, 15/F., SPA Centre,

53-55 Lockhart Road,

Wanchai,

Hong Kong

Tel: (852) 8113 2281

Email: info@gakkiku.com

Test Report


Applicant	Scientific Toys Ltd
Address	Rm. 1108, 11/F., Block B, New Mandarin Plaza, 14 Science Museum Road, TST East, Kowloon, Hong Kong
FCC ID Number	FCC ID: BY34795-24GT
Tested Brand Name(s)	None
Tested Model Number(s)/ Item Number(s)	BY34795-24GT
Product Description	2.4 GHz Wireless Remote Control Device - TX
Operating Frequency	2404.00-2478.00 MHz
Rules/Standards	Part 15.249 of the FCC Rules
Received Date	17th June, 2017
Tested Date	17th June, 2017
Tested by	 Jason Su (Engineer of Shenzhen SEM.Test Technology Co., Ltd.)
Reviewed by	 Silin Chen (EMC Manager of Shenzhen SEM.Test Technology Co., Ltd.)
Signed by	 Jandy So (Manager of Shenzhen SEM.Test Technology Co., Ltd.)
Approved by	Gilbert Lui (Marketing Manager of Gakkiku Compliance Company Limited)
Report Number	GCCL201706170A
Test Results	<input checked="" type="checkbox"/> PASSED <input type="checkbox"/> FAILED

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	7
1.3 TEST METHODOLOGY	7
1.4 TEST FACILITY.....	7
1.5 EUT SETUP AND TEST MODE	8
1.6 MEASUREMENT UNCERTAINTY.....	8
1.7 TEST EQUIPMENT LIST AND DETAILS.....	9
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENTS.....	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT	11
4. RADIATED EMISSIONS	12
4.1 STANDARD APPLICABLE.....	12
4.2 TEST PROCEDURE	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.4 ENVIRONMENTAL CONDITIONS.....	14
4.5 SUMMARY OF TEST RESULTS/PLOTS	14
5. OUT OF BAND EMISSIONS	23
5.1 STANDARD APPLICABLE.....	23
5.2 TEST PROCEDURE	23
5.3 ENVIRONMENTAL CONDITIONS.....	23
5.4 SUMMARY OF TEST RESULTS/PLOTS	23
6. EMISSION BANDWIDTH	26
6.1 STANDARD APPLICABLE.....	26
6.2 TEST PROCEDURE	26
6.3 ENVIRONMENTAL CONDITIONS.....	26
6.4 SUMMARY OF TEST RESULTS/PLOTS	26

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Scientific Toys Ltd
Address of applicant: Rm. 1108, 11/F., Block B, New Mandarin Plaza,
14 Science Museum Road, TST East, Kowloon, Hong Kong

Manufacturer: Scientific Toys Ltd
Address of manufacturer: Rm. 1108, 11/F., Block B, New Mandarin Plaza,
14 Science Museum Road, TST East, Kowloon, Hong Kong

General Description of EUT	
Product Description:	2.4 GHz Wireless Remote Control Device - TX
Tested Trade Name:	None
Tested Model Number/ Item Number:	BY34795-24GT
Adding Model Number(s)/ Item Number(s):	AD15454, 99100, 27015, 33340, 33360, 23340, 23342, 23345, 27014, 27015, 33341, 33345, 33350, 33361, 33360, 33340, 33341, 33342, 33344, 33348, 33343-33360, 33361, 33362, 33363, 33364, 33365, 33366, 33367, 33368, 33369, 33370, 33371-33399, 33400, 23340, 23345, 23341-23350, 63340, 27014, 27500, 27501, 27502, 27503, 27504, 27505, 27506, 27507, 27508, 27509, 27510, 27511, 27512, 27513, 27514, 27515, 27516, 27517, 27518, 27519, 27520, 27521, 27522-27529, 27530, 27531, 27532-27539, 27540, 27541, 27542-27549, 27550, 27551, 27552-27559, 27560, 27561, 27562-27569, 27570, 27571, 27572-27579, 27580, 27581, 27582-27589, 27590, 27591, 27592-27599, 27800, 27801, 27802, 27803, 27804, 27805, 27806, 27807, 27808, 27809, 27810, 27811-27819, 28720, 27821-27829, 27830, 27831-27839, 27840, 27841-24849, 27850, 27851-27869, 27860, 27861-27869, 27870, 27871-27879, 27880, 27881-27889, 27890, 27891-27899, 27900, 98122, 98120, 98122, 98121-98129, 98130-98139, 98132, 99670, 99671-99679, 91460-91479, 91480, 91481, 91482, 91483-91489, 91586, 97128, 97126, 97120, 97121, 97122, 97123, 97124, 97125, 97127, 97129, 97130, 97131-97139, 97140, 97141-97149, 97150, 20028, 20001, 20006, 99647, 99640-99649, 95527, 95520-95529, 97136, 97135, 97128, 97138, 97118, 97121, 97130, 97131, 97132, 97133, 97134, 97135, 97136, 97137, 97138, 97139, 97140, 97141, 97142, 97143, 97144, 97145, 97146, 97147, 97148, 97149,

	97150, 94500, 94501, 94507, 29100, 30760, 31680-31689, 21902, 21907, 21959, 21975, 21977, 93817, 21446, 21448, 21440, 21442, 21416, 21437, 21438, 32100-32109, 32107, 32108, 30756, 30753, 21005, 21007, 21000-21010, 27717, 29982, 27723, 27415, 27410, 27411-27419, 27420, 27421, 27422, 27423, 27424-27429, 27430, 22102, 22103, 22100-22120, 21110, 21111, 21112, 21113, 21114, 21115, 21116, 21117, 21118, 21119, 21120, 21121-21129, 21130, 21131-21139, 21140, 21141-21146, 21147, 21148, 21149, 21150, 24017, 24018, 24019, 24020, 24021, 224022, 24023, 4043, 24000-24050, 24600, 24601-24609, 24610, 24611-24619, 24620, 24621, 24622, 24623, 24624, 24625, 24626, 24627, 24628, 24629, 24630, 24631, 24632, 24633, 24634, 24635, 24636, 24637, 24639, 24640, 24641, 24642, 26658, 24643, 24644-24649, 24650, 24651, 24652-24657, 24658, 27410, 27420, 99480, 99470, 24644, 24645, 24646, 24600-24660, 24550, 99420, 24700, 24701, 24702, 24703, 24704, 24705-24730, 22920, 22921-22940, 98790, 99597, 99840, 99870, 99660, 95551, 95552, 95553, 95554, 95555, 95556, 95557, 95558, 95559, 95550-95560, 98790, 99663, 99660, 98781, 95263, 95267, 95268, 95551, 95555, 95559, 95167, 99910, 99917, 21627, 21634, 99843, 99840, 99870, 21060, 21070, 21080, 99668, 99658, 99659, 28000, 28001-28019, 28020, 28021, 28022, 28023, 28024, 28025, 28026, 28027, 28028, 28029, 28030, 28031, 28032, 28033, 28034, 28035, 28036, 28037, 28038, 28039, 28040, 28041-28049, 28050, 28051-28099, 95166, 95167, 95730, 95734, 95737, 95731-95740, 99457, 99467, 98867, 98877, 98857-98897, 21700, 21702, 21701-21730, 21917, 21930, 21931, 21932, 21933, 21934, 21935, 21936, 21937, 21938, 21940, 21900-21970, 99037, 99497, 99498, 95030, 95031-95039, 20017, 20010, 20001, 20002, 20003, 20005, 20006, 20007, 20008, 20009, 20010, 20011-20015, 20016, 20024, 20018-20050, 23810, 23814, 23817, 23820, 23800-23830, 97200, 97201, 97207, 97210, 97220, 97230, 97240, 97202-97250, 21860, 21861, 21862, 21863, 21864, 21865, 21866, 21867, 21868, 21869, 21870, 21871, 21872, 21873, 21874, 21875, 21876, 21877, 21878, 21879, 21880, 21881, 21882, 21883, 21884, 21885, 21886, 21887, 21888, 21889, 21890, 21891, 21892, 21893, 21894, 21895, 21896, 21897, 21898, 21899, 21900, 24900, 24901-24909, 24910, 24911-24919, 24920, 24921, 24922, 24923, 24924, 24925, 24926, 24927, 24928, 24929, 24930, 24931-24950, 21917, 21857, 21897, 25919, 25929, 25939, 25969, 99900, 99901-99909, 99910, 99911-99919, 99920, 99921, 99922,
--	--

	99923, 99924, 99925, 99926, 99927, 99928, 99929, 99930, 99931, 99932, 99933-99939, 99037, 99877, 24930, 20017, 99079, 99096, 99097, 99098, 99099, 97038, 97128, 97138, 21867, 22837, 99497, 99347, 97200, 97207, TE129, TE128, 21868, 21869, 21870, 21871, 21872, 21873, 21874, 21875, 21876, 21877, 21878, 21879, 21880, 21881, 21882, 21883, 21884, 21885, 21886, 21887, 21888, 21889, 21890, 21891, 21850-21899, 99900, 99902, 99901-99909, 99910, 99911-99919, 99917, 99927, 99928, 99920-99929, 99937, 99930-99937, 99947, 99940-99949, 99957, 99950-99959, 99967, 99960-99969, 99977, 99970-99979, 99987, 99980-99989, 99997, 99990-99999, 99070, 99071-99076, 99072, 99077, 99078, 99079, 99080, 99081, 99082-99089, 99090, 99096, 99097, 99098, 99099, 99080-99095, 93817, 21959, 21975, 21978, 21446, 21121, 21124, 21129, 21120-21130, 21425, 21424, 21815, 21820, 21821, 21822-21850, 21465, 27000, 27001, 27002, 27003, 27004, 27005, 27006, 27007, 27008, 27009, 27010, 27011, 27012, 27013, 27014, 27015, 27016, 27017, 27018, 27019, 27020, 27021, 27022, 27023, 27024, 27025, 27026, 27027, 27028, 27028, 27030, 27031-27100, 99750, 99751-99780, 97000, 97001-97009, 97010, 97011-97030, 41000-41009, 41010, 41011, 41012, 41013, 41014, 41015, 41016, 41017, 41018, 41019, 41020, 41021-41050, 80890, 80990, 80891-80999, 30690, 30700, 30693, 29100, 30760, 30650, 31210, 31440, 31223, 36744, 69160, 69170, 71884, 72884, 78060, 78080, 78083, 70360, 70362, 70370, 70371, 70372, 70350-70400, 70390, 70391, 70392, 70393, 74231, 74232, 74233, 71856, 71050, 70467, 72866, 72887, 60150, 60160, 60170, 60171-60179, 60360, 40360, 40380, 40370, 40760, 40560-40580, 40567, 40568, 40569, 40570, 40571, 40572, 40573, 40574, 40575, 2679707, 39100, 39101-39109, 39110, 39111-39119, 39120, 39121, 39129, 39130, 39131, 39132, 39133, 39134, 39135, 39136, 39137, 39138, 39139, 39140, 39141, 39142, 39143, 39144, 39145, 39146, 39147, 39148, 39149, 39150, 39151-39159, 92100, 92101-92109, 92110, 92111-92119, 92120, 92121-92129, 92130, 92131-92139, 92140, 92141, 92142, 92143, 92144, 92145, 92146, 92147, 92148, 92149, 92150, 92151, 92152, 92153, 92154, 92155, 92156, 92157, 92158, 92159, 92159, 92160, 92161, 92162, 92163, 92164, 92165, 92166, 92167, 92168, 92169, 92170, 92171, 92172, 92173, 92174, 92175, 92176, 92177, 92178, 92179, 92180-92199, 92200, 21005, 21006, 21007, 21000-21010, 69100, 69101-69109, 69110, 69111-69119, 69120, 69121-69129, 69130, 69131-69139, 69140, 69141-69149, 69150,
--	---

	69151-69159, 69160 [All Adding Brand Name(s) and Model Number(s)/Item Number(s) are same electrically identical as Tested Brand Name and Model Number/Item Number]
Power Source:	DC 6.0V (4 units of DC 1.5V AAA-Size Battery)
Power Adapter Model:	/
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of above adding model number(s)/item number(s) listed in the report is different from above tested model number/item number, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Frequency Range:	2404.00-2478.00 MHz
Max. Field Strength/ RF Output Power::	85.22dBuV/m
Type of Modulation:	GFSK
Type of Antenna:	Fixed 34mm-long AWG#22 wire integral antenna
Antenna Gain:	0 dBi
Lowest Internal Clock Frequency of EUT:	12 MHz

1.2 Test Standards

The following report is prepared on behalf of the Scientific Toys Ltd in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the FCC Rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the FCC Rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, Guangdong, 518101, China.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Lowest Channel	2404.00 MHz
TM2	Near Middle Channel	2441.00 MHz
TM3	Highest Channel	2478.00 MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/ Unshielded	With/ Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty			
Parameter	Conditions	Uncertainty	
RF Output Power	Conducted	±0.42dB	
Occupied Bandwidth	Conducted	±1.5%	
Conducted Spurious Emission	Conducted	±2.17dB	
Conducted Emissions	Conducted	±2.88dB	
Transmitter Spurious Emissions	Radiated	±5.1dB	

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarzbeck	VULB9163	9163-333	2017-06-12	2018-06-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-12	2018-06-11
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-12	2018-06-11
SEMT-1069	Loop Antenna	Schwarzbeck	FMZB 1516	9773	2017-06-12	2018-06-11
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarzbeck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
Part 15.203	Antenna Requirement	Compliant
Part 15.205	Restricted Band of Operation	Compliant
Part 15.207(a)	Conducted Emission	N/A*
Part 15.209(a)(f)	Radiated Spurious Emissions	Compliant
Part 15.249(a)	Field Strength of Emissions	Compliant
Part 15.249(d)	Out of Band Emission	Compliant
Part 15.215 (c)	Emission Bandwidth	Compliant

*Remark:

The AC Line Conducted Emissions testing is exempted because it is powered solely by batteries.
Thus, the AC Line Conducted Emissions testing is not applicable.

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a fixed 34mm-long AWG#22 wire integral antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to FCC Part 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

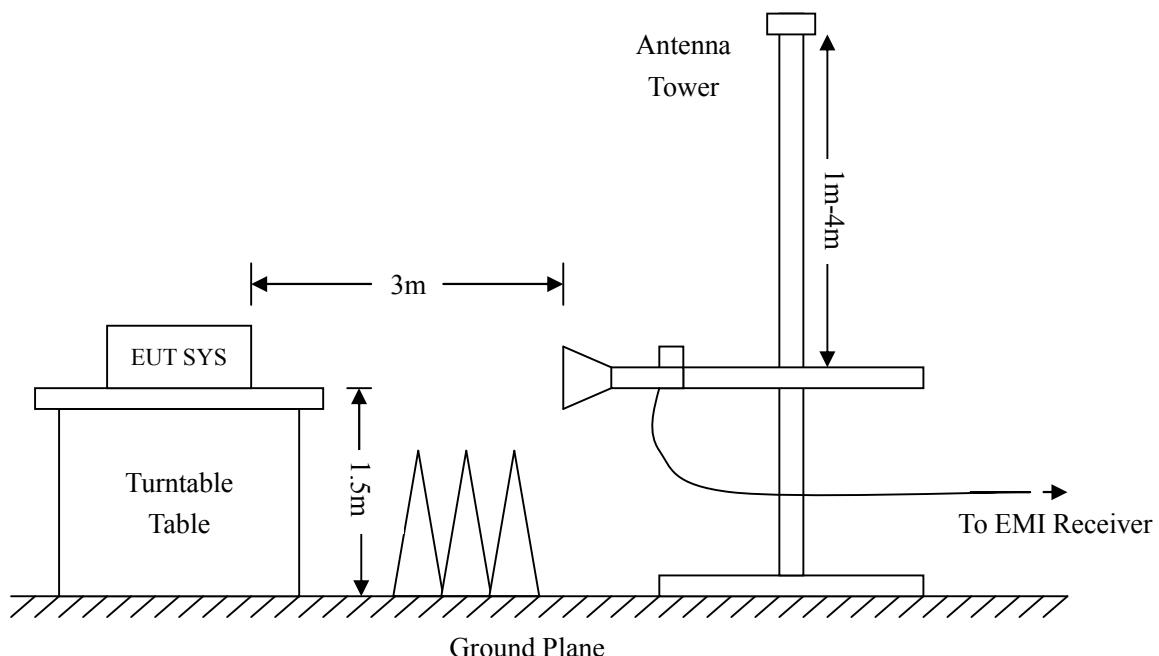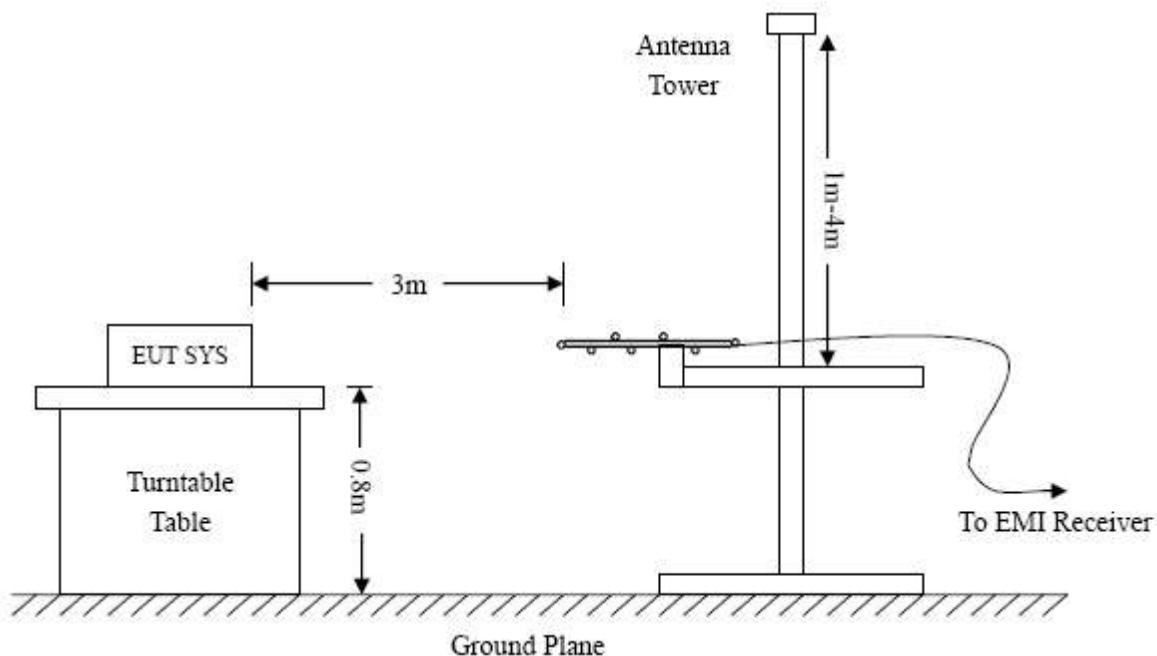

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions


Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:


**-17.16 dB at 887.6099 MHz in the Vertical polarization, Highest Channel, 9 kHz to 25 GHz,
3Meters**

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

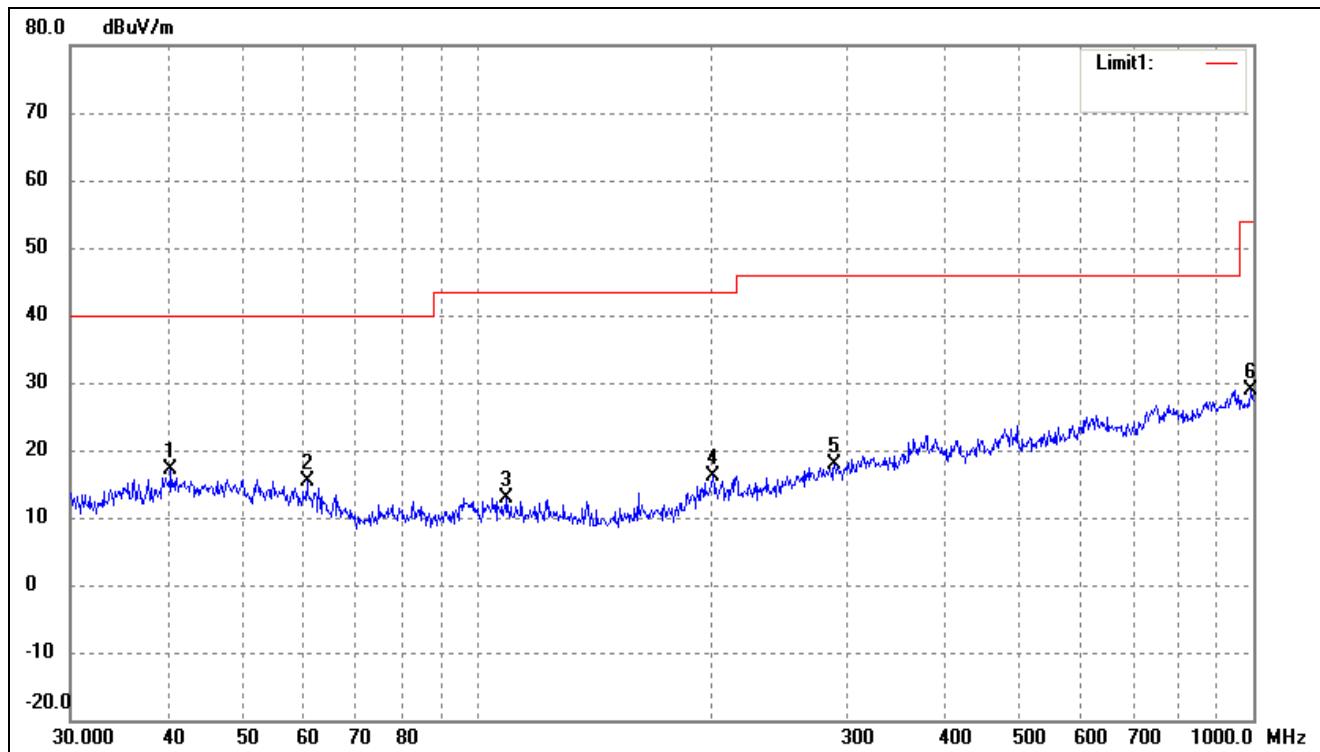Plot of Radiated Emissions Test Data (30MHz to 1GHz)*Product Description:* 2.4 GHz Wireless Remote Control Device - TX*Tested Model**Number/* BY34795-24GT*Item Number:**Operating Condition:* Transmitting Lowest Channel (2404.00 MHz)*Power Source:* DC 6.0V (4 units of DC 1.5V AAA-Size Battery)*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (·)	Height (cm)	Remark
1	40.4172	24.72	-7.70	17.02	40.00	-22.98	121	110	Peak
2	60.4919	25.21	-9.74	15.47	40.00	-24.53	153	117	Peak
3	109.4116	24.11	-11.15	12.96	43.50	-30.54	243	144	Peak
4	201.3930	24.75	-8.66	16.09	43.50	-27.41	182	253	Peak
5	289.0021	23.67	-5.90	17.77	46.00	-28.23	227	185	Peak
6	993.0114	24.48	4.49	28.97	54.00	-25.03	301	285	Peak

Test Specification: Vertical

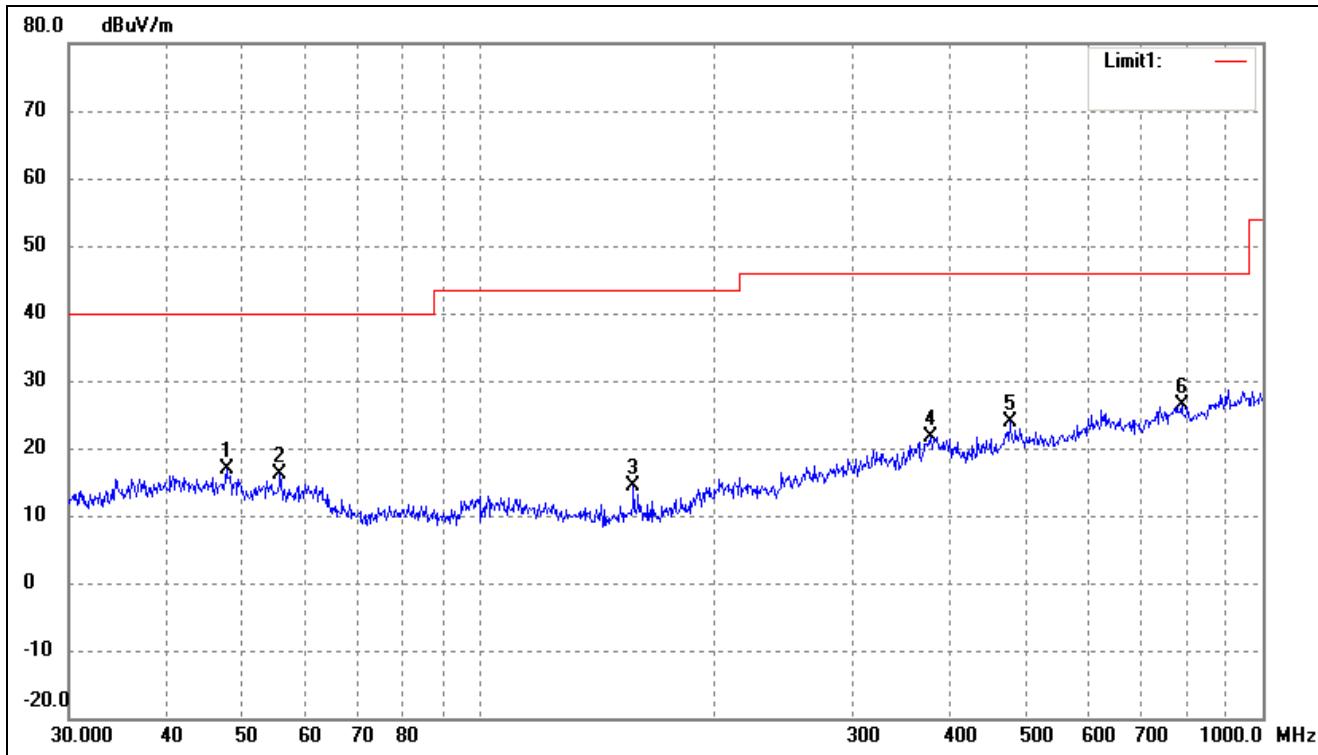


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	47.6586	24.93	-8.17	16.76	40.00	-23.24	153	103	Peak
2	55.8047	25.30	-9.05	16.25	40.00	-23.75	265	150	Peak
3	157.5589	26.61	-12.31	14.30	43.50	-29.20	142	252	Peak
4	377.2591	23.94	-2.26	21.68	46.00	-24.32	319	211	Peak
5	475.4991	25.28	-1.42	23.86	46.00	-22.14	175	299	Peak
6	787.8513	23.83	2.51	26.34	46.00	-19.66	212	100	Peak

Operating Condition: Transmitting Near Middle Channel (2441.00 MHz)


Power Source: DC 6.0V (4 units of DC 1.5V AAA-Size Battery)

Test Specification: Horizontal

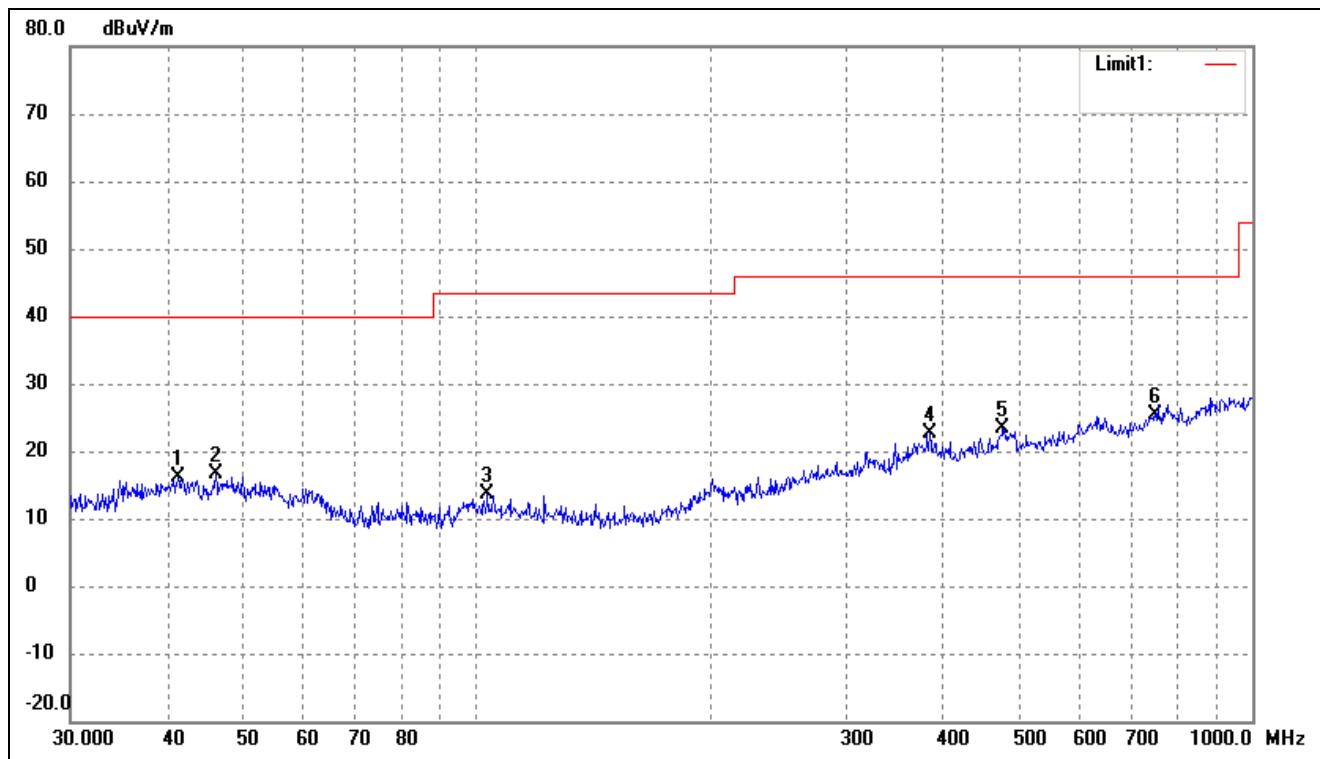

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (.)	Height (cm)	Remark
1	41.2765	23.86	-7.75	16.11	40.00	-23.89	124	123	Peak
2	46.1780	24.81	-8.07	16.74	40.00	-23.26	108	109	Peak
3	103.4421	24.51	-10.99	13.52	43.50	-29.98	108	106	Peak
4	383.9318	24.96	-2.30	22.66	46.00	-23.34	139	125	Peak
5	477.1694	24.60	-1.27	23.33	46.00	-22.67	176	152	Peak
6	750.1083	23.37	1.95	25.32	46.00	-20.68	257	253	Peak

Test Specification: Vertical

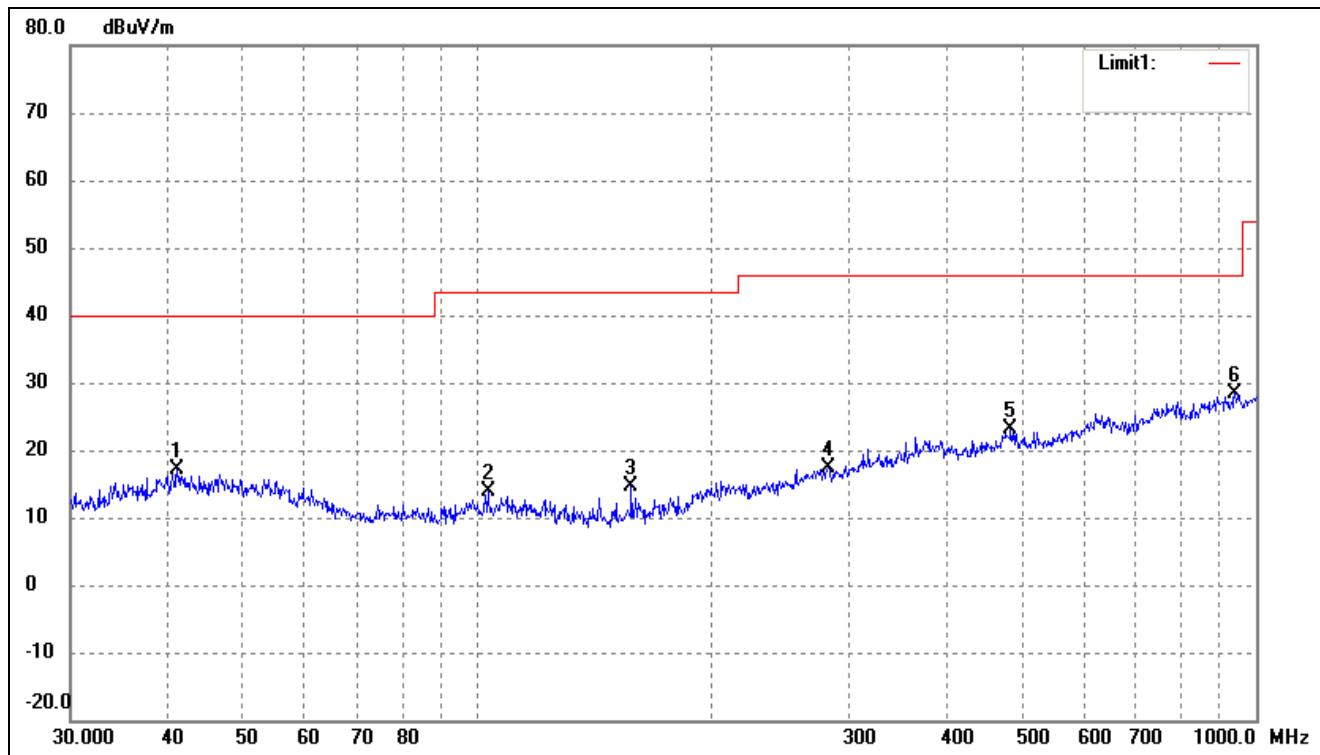


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	41.1320	24.93	-7.74	17.19	40.00	-22.81	109	142	Peak
2	103.0800	24.84	-10.97	13.87	43.50	-29.63	146	135	Peak
3	157.5589	27.04	-12.31	14.73	43.50	-28.77	156	200	Peak
4	281.9946	23.44	-6.06	17.38	46.00	-28.62	121	284	Peak
5	483.9094	24.51	-1.27	23.24	46.00	-22.76	144	153	Peak
6	938.8326	24.22	4.24	28.46	46.00	-17.54	130	163	Peak

Operating Condition: Transmitting Highest Channel (2478.00 MHz)


Power Source: DC 6.0V (4 units of DC 1.5V AAA-Size Battery)

Test Specification: Horizontal

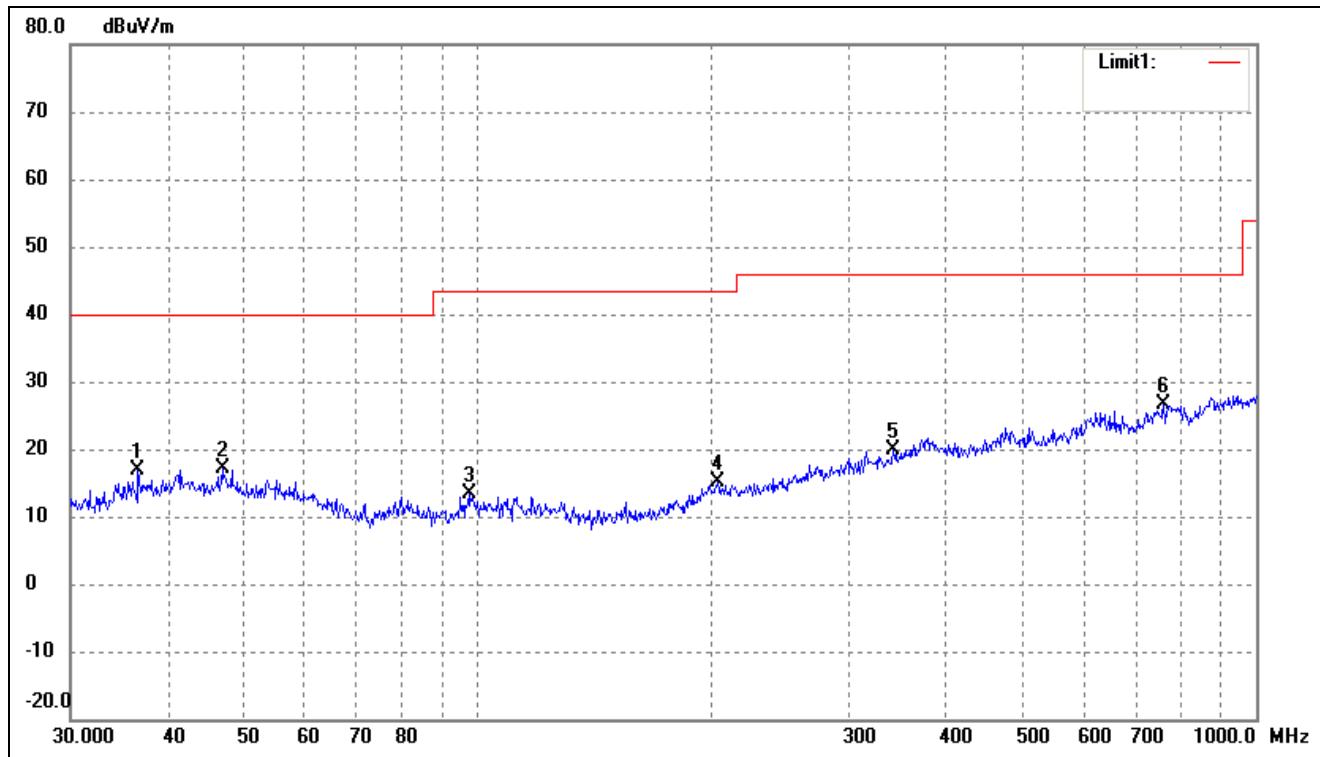

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (.)	Height (cm)	Remark
1	36.6375	25.59	-8.59	17.00	40.00	-23.00	146	119	Peak
2	46.9948	25.23	-8.13	17.10	40.00	-22.90	148	166	Peak
3	97.4560	24.82	-11.42	13.40	43.50	-30.10	143	142	Peak
4	203.5228	23.86	-8.68	15.18	43.50	-28.32	163	165	Peak
5	341.9787	24.70	-4.82	19.88	46.00	-26.12	201	151	Peak
6	760.7036	24.85	1.84	26.69	46.00	-19.31	205	202	Peak

Test Specification: Vertical

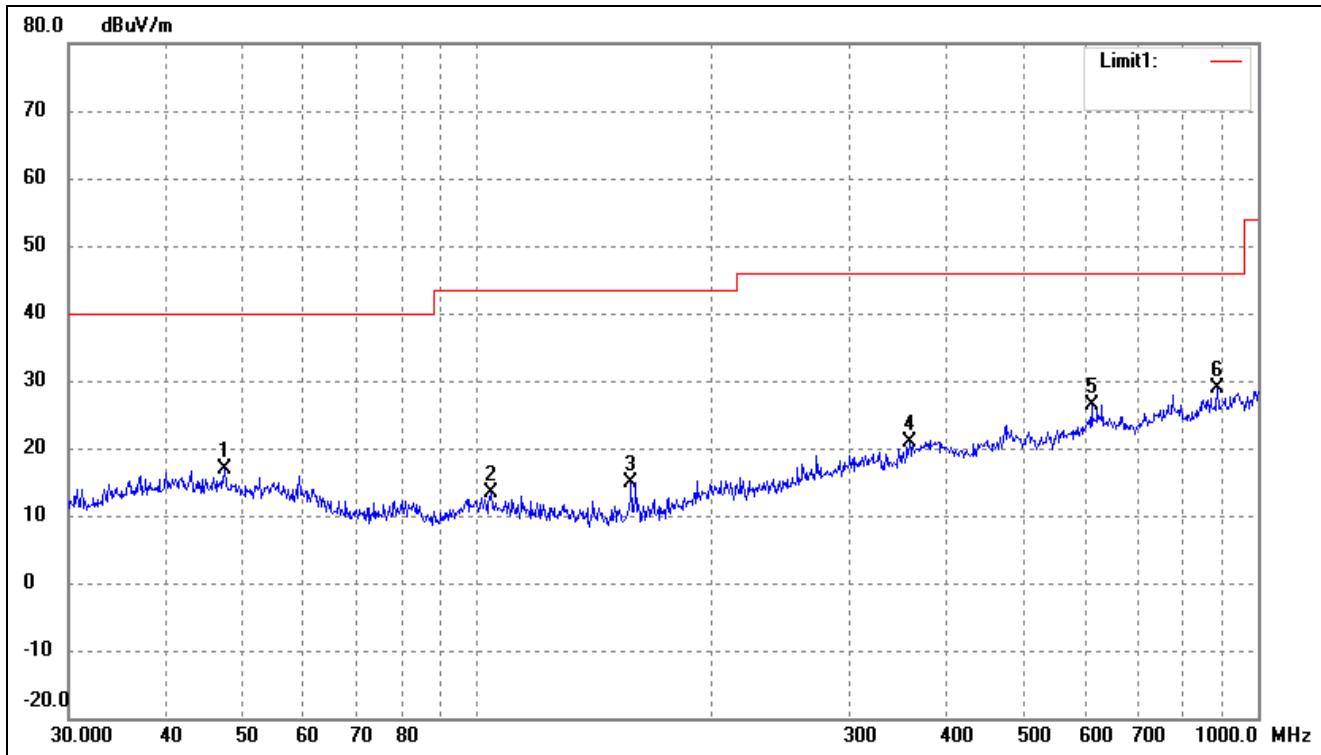

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	47.4918	25.01	-8.16	16.85	40.00	-23.15	117	143	Peak
2	104.1701	24.47	-11.01	13.46	43.50	-30.04	183	200	Peak
3	157.5589	27.27	-12.31	14.96	43.50	-28.54	161	205	Peak
4	357.9287	24.19	-3.43	20.76	46.00	-25.24	154	255	Peak
5	612.0642	25.81	0.68	26.49	46.00	-19.51	142	154	Peak
6	887.6099	25.69	3.15	28.84	46.00	-17.16	194	230	Peak

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Lowest Channel - 2404.00 MHz							
2404	88.71	-3.49	85.22	114	-28.78	H	PK
2404	87.18	-3.49	83.68	94	-10.32	H	AV
4808	41.51	2.21	43.72	74	-30.28	H	PK
4808	29.55	2.13	31.68	54	-22.32	H	AV
7212	40.48	7.23	47.71	74	-26.29	H	PK
7212	28.21	7.19	35.40	54	-18.60	H	AV
2404	83.70	-3.49	80.21	114	-33.79	V	PK
2404	76.20	-3.49	72.71	94	-21.29	V	AV
4808	41.32	2.13	43.45	74	-30.55	V	PK
4808	30.30	2.13	32.43	54	-21.57	V	AV
7212	40.15	7.23	47.38	74	-26.62	V	PK
7212	28.80	7.19	35.99	54	-18.01	V	AV
Near Middle Channel - 2441.00 MHz							
2441	85.71	-3.43	82.28	114	-31.72	H	PK
2441	81.18	-3.43	77.75	94	-16.25	H	AV
4882	42.93	1.25	44.18	74	-29.82	H	PK
4882	30.15	1.34	31.49	54	-22.51	H	AV
7323	40.40	7.23	47.63	74	-26.37	H	PK
7323	28.47	7.15	35.62	54	-18.38	H	AV
2441	83.57	-3.43	80.14	114	-33.86	V	PK
2441	73.87	-3.43	70.44	94	-23.56	V	AV
4882	41.90	1.41	43.31	74	-30.69	V	PK
4882	29.98	1.34	31.32	54	-22.68	V	AV
7323	39.82	8.26	48.08	74	-25.92	V	PK
7323	26.50	8.26	34.76	54	-19.24	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Highest Channel - 2478.00 MHz							
2478	86.17	-3.33	82.84	114	-31.16	H	PK
2478	85.11	-3.33	81.78	94	-12.22	H	AV
4956	41.26	2.13	43.39	74	-30.61	H	PK
4956	30.07	2.13	32.20	54	-21.80	H	AV
7434	40.19	7.19	47.38	74	-26.62	H	PK
7434	28.48	7.19	35.67	54	-18.33	H	AV
2478	83.22	-3.33	79.89	114	-34.11	V	PK
2478	72.45	-3.33	69.12	94	-24.88	V	AV
4956	41.59	2.10	43.69	74	-30.31	V	PK
4956	29.32	2.13	31.45	54	-22.55	V	AV
7434	39.75	7.23	46.98	74	-27.02	V	PK
7434	28.26	7.15	35.41	54	-18.59	V	AV

Note: Testing is carried out with frequency rang 9 kHz to the 10th harmonic, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Emissions attenuated more than 20 dB below the permissible value are not reported.

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC Rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC Part 15.209 Limits or complies with the FCC Part 15.249 requirements.


Please refer to the test plots as below.

Lowest Bandedge
Vertical (Worst case)

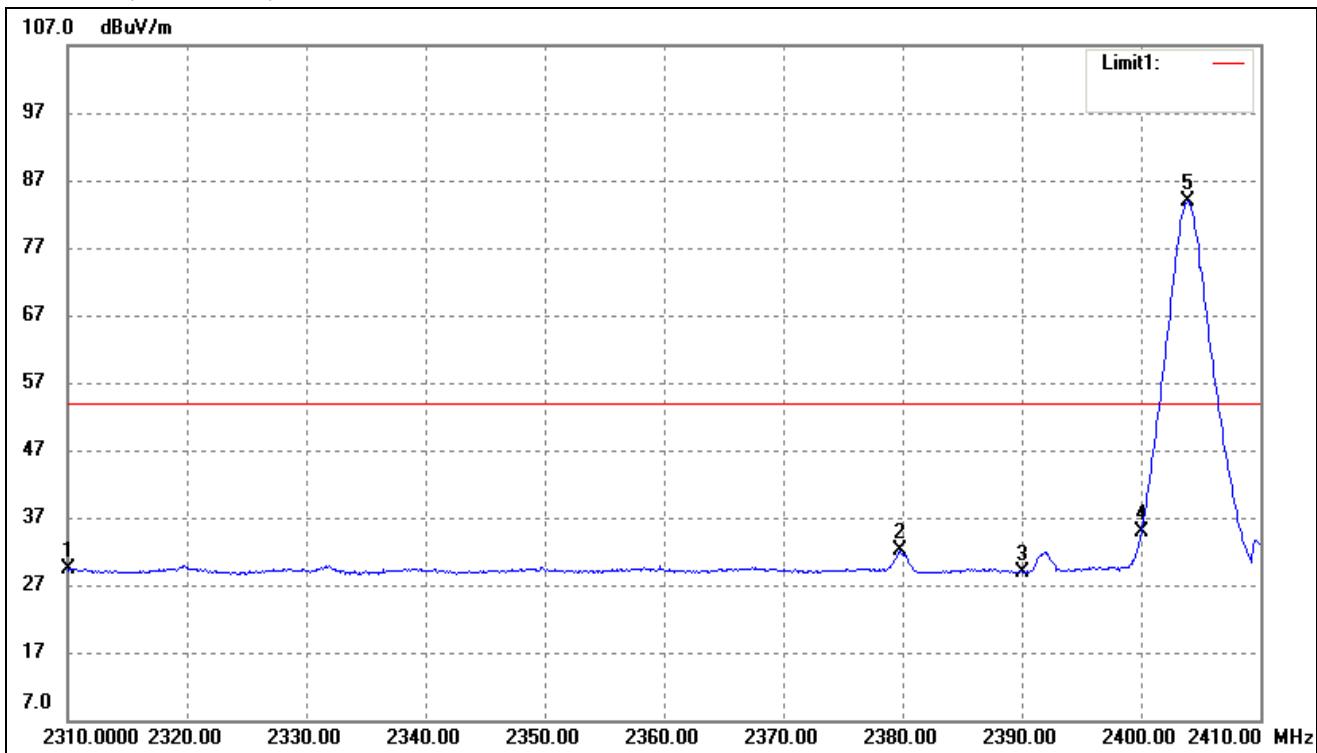

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	33.08	-3.69	29.39	54.00	-24.61	Average Detector
	2310.000	47.04	-3.69	43.35	74.00	-30.65	Peak Detector
2	2379.800	35.69	-3.51	32.18	54.00	-21.82	Average Detector
	2379.850	46.58	-3.51	43.07	74.00	-30.93	Peak Detector
3	2390.000	32.42	-3.49	28.93	54.00	-25.07	Average Detector
	2390.000	46.32	-3.49	42.83	74.00	-31.17	Peak Detector
4	2400.000	38.22	-3.46	34.76	54.00	-19.24	Average Detector
	2400.000	68.55	-3.46	65.09	74.00	-8.91	Peak Detector
5	2403.900	87.37	-3.45	83.92	/	/	Average Detector
	2404.270	88.45	-3.44	85.01	/	/	Peak Detector

Highest Bandedge
Vertical (Worst case)

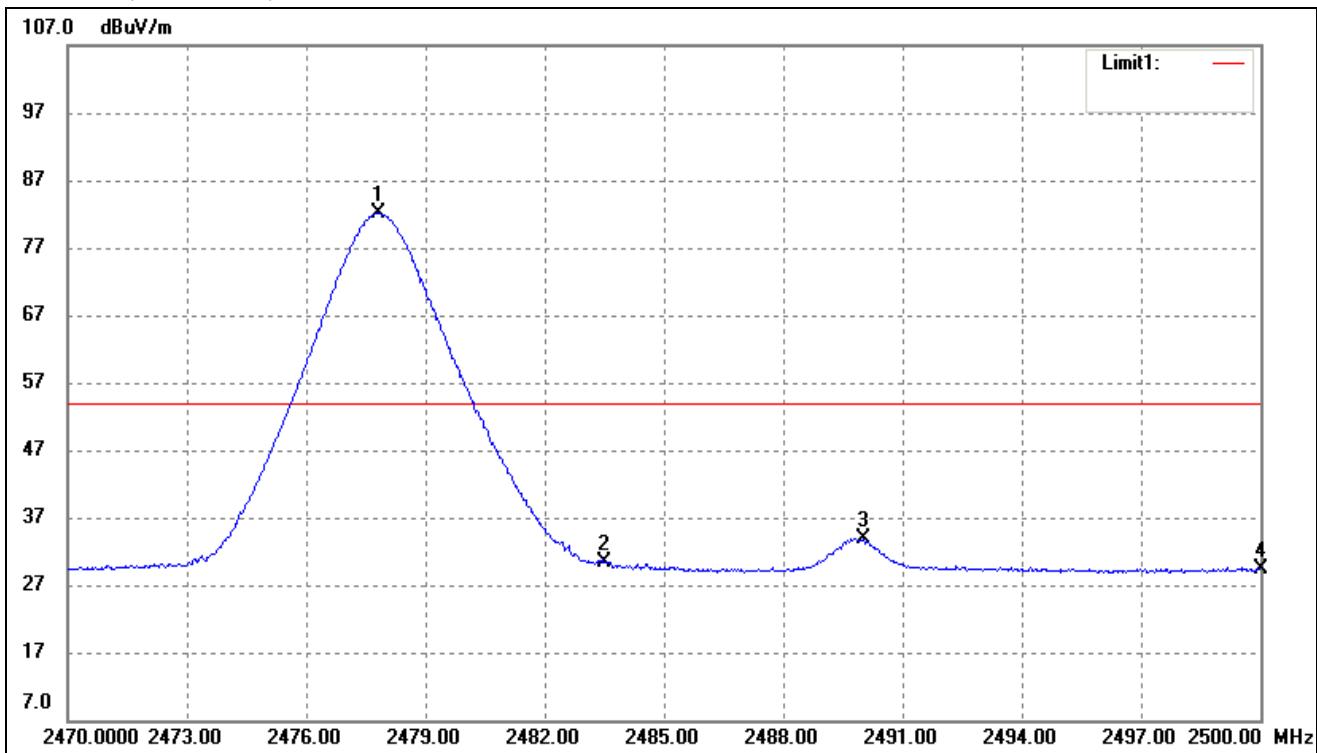

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2477.830	85.39	-3.27	82.12	/	/	Average Detector
	2478.220	85.37	-3.26	82.11	/	/	Peak Detector
2	2483.500	33.59	-3.25	30.34	54.00	-23.66	Average Detector
	2483.500	48.08	-3.25	44.83	74.00	-29.17	Peak Detector
3	2490.010	37.17	-3.23	33.94	54.00	-20.06	Average Detector
	2489.470	48.55	-3.23	45.32	74.00	-28.68	Peak Detector
4	2500.000	32.58	-3.20	29.38	54.00	-24.62	Average Detector
	2500.000	45.77	-3.20	42.57	74.00	-31.43	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to FCC Part 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows:

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

$\text{RBW} \geq 1\%$ 20dB Bandwidth, $\text{VBW} \geq \text{RBW}$

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Channel	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
Lowest Channel	2404.00	2009.9	1179
Near Middle Channel	2441.00	2496.8	1944
Highest Channel	2478.00	1539.4	1524

Please refer to the following test plots


Lowest Channel:

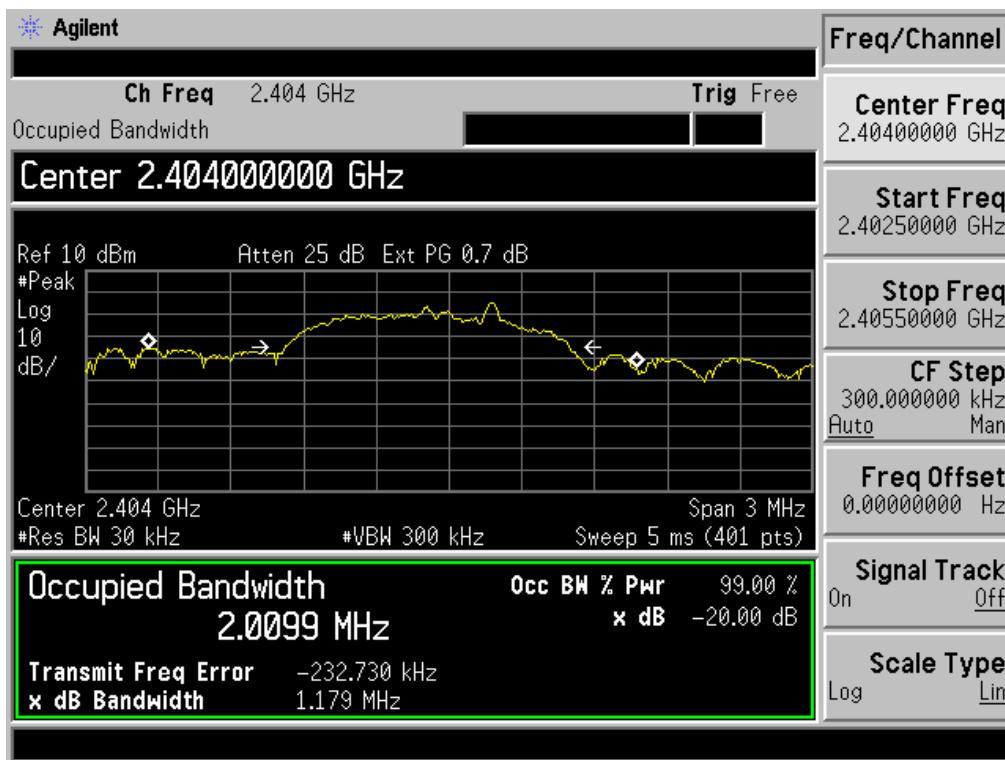

Near Middle Channel:

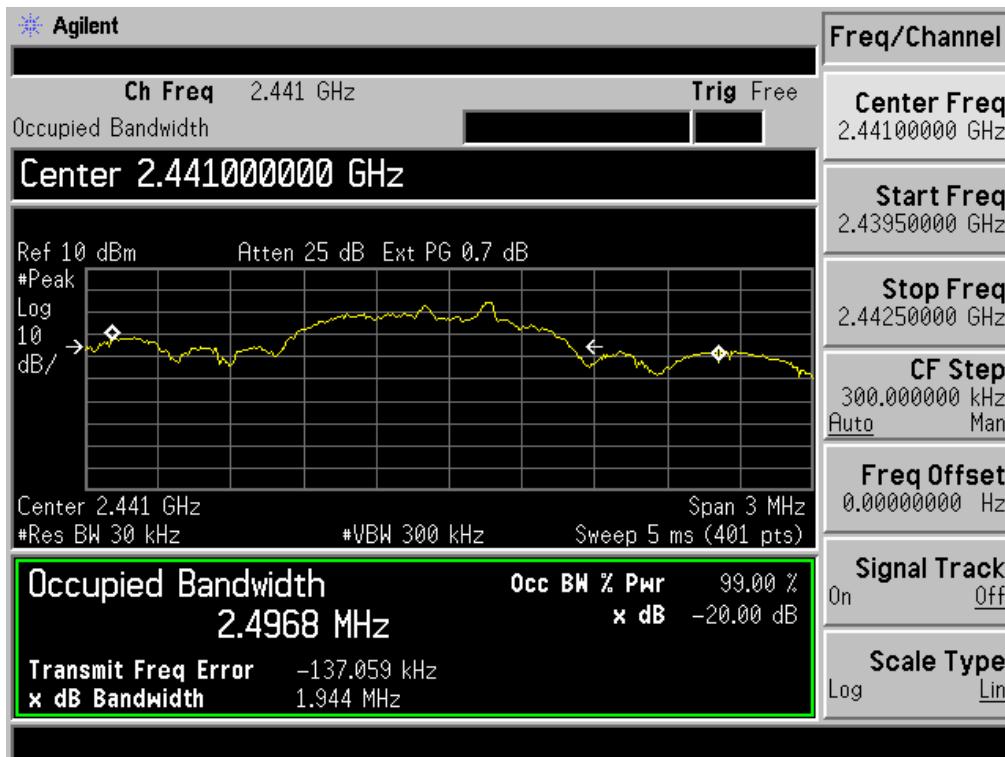

Highest Channel:

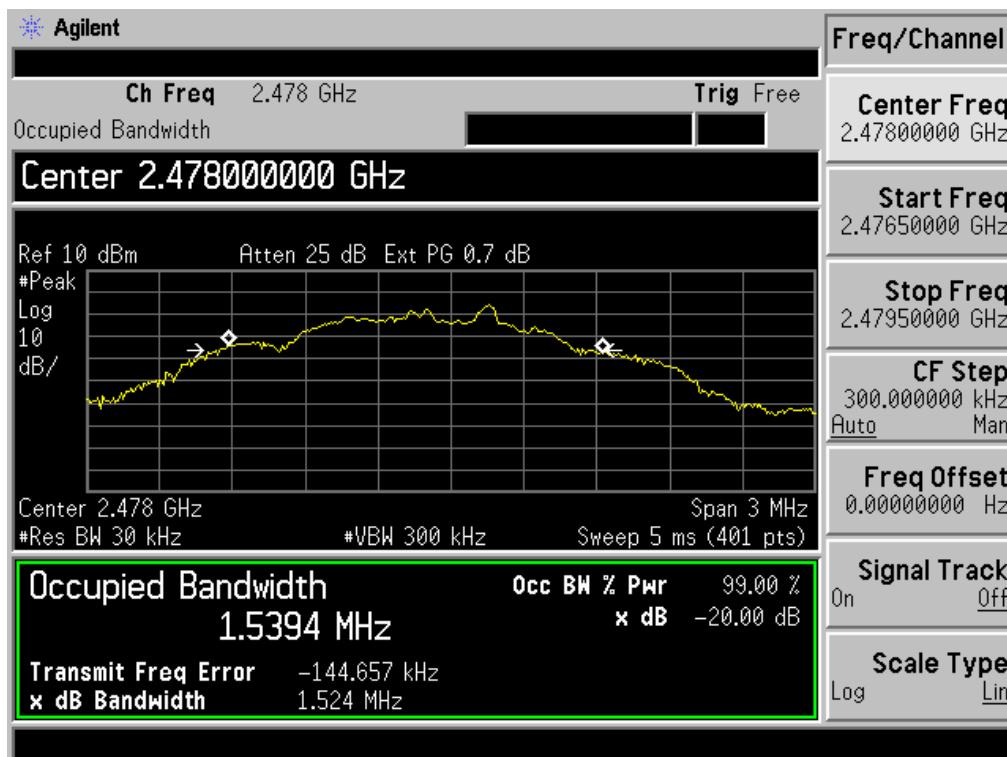

***** END OF REPORT *****