849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: 27MHz R/C TOY - TX - REPAIR RETEST

FCC ID: BY3E898

Applicant:

SCIENTIFIC TOYS, LTD. 13/F., CHAI WAN INDUSTRIAL CENTRE 20 LEE CHUNG STREET CHAI WAN, HONG KONG

Date Receipt: 8/14/2003

Date Tested: 8/21/2003

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

TEST REPORT CONTAINING:

PAGE	1 TEST EQUIPMENT LIST
PAGE	2TEST PROCEDURE
PAGE	3RADIATION INTERFERENCE TEST DATA
PAGE	4OCCUPIED BANDWIDTH
PAGE	5 OCCUPIED BANDWIDTH PLOT

EXHIBITS CONTAINING:

EXHIBIT	1BLOCK DIAGRAM
EXHIBIT	2SCHEMATIC
EXHIBIT	3PARTS LIST
EXHIBIT	4 INSTRUCTION MANUAL
EXHIBIT	5SAMPLE OF FCC ID LABEL
EXHIBIT	6LOCATION OF FCC ID LABEL
EXHIBIT	7EXTERNAL PHOTOGRAPHS
EXHIBIT	8PHOTOGRAPHS
EXHIBIT	9CIRCUIT DESCRIPTION

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Equipment List

Device 3-Meter OATS	Manufacturer TEI	Model N/A	Serial Number N/A	Cal/Char Date Listed	Due Date 1/13/06
				1/13/03	2/12/2
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
Biconnical	Electro-	BIA-25	1171	CAL 4/26/01	4/26/03
Antenna	Metrics				
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Blue Tower RF	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
Preselector					
Blue Tower Spectrum	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
Analyzer	Eleatro	ANG 25/2	2604	CAL 10/9/01	10/0/03
LISN	Electro- Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
LISN	Electro- Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05
Log-Periodic	Electro-	EM-6950	632	CHAR 10/15/01	10/15/03
Antenna	Metrics				
Log-Periodic	Electro-	LPA-25	1122	CAL 10/2/01	10/2/03
Antenna	Metrics				
Log-Periodic	Electro-	LPA-30	409	CAL 3/4/03	3/4/05
Antenna	Metrics				
Silver Tower	HP	8449B	3008A01075	CHAR 1/28/02	1/28/04
Preamplifier					
Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/14/02	10/14/04
Silver Tower	HP	85685A	2620A00294	CAL 10/14/02	10/14/04
RF		0500511	20201100251	0111 10/11/01	20, 21, 01
Preselector					
Silver Tower	HP	8566B Opt 462	3552A22064	CAL 10/14/02	10/14/04
Spectrum		_	3638A08608		
Analyzer					
Tan Tower	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
Preamplifier					
Tan Tower	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
Quasi-Peak					
Adapter					
Tan Tower RF	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
Preselector					
Tan Tower	HP	8566B Opt 462	3138A07786	CAL 8/31/01	8/31/03
Spectrum			3144A20661		
Analyzer					
3/10-Meter	TEI	N/A	N/A	Listed	3/26/04
OATS				3/26/01	

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°C with a humidity of 76%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.227

REQUIREMENTS: CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.

OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

40.0 dBuV/M MEASURED AT 3 METERS

30 - 88 MHz 40.0 dBuV/M 88 - 216 MHz 43.5 dBuV/M 216 - 960 MHz 46.0 dBuV/m ABOVE 960 MHz 54.0 dBuV/m

TEST DATA:

Emission	Meter	ANT.	Coax		Field	
Frequency	Reading	POLARITY	Loss	Correction	Strength	Margin
MHz	dBuV		đВ	Factor	dBuV/m	đВ
				đВ		
27.15	25.1	H	0.24	13.44	38.78	41.22
27.15	41.3	v	0.24	13.44	54.98	25.02
54.30	11.8	v	0.80	10.05	22.65	17.35
54.30	13.1	H	0.80	10.05	23.95	16.05
81.45	15.3	v	0.80	8.48	24.58	15.42
81.45	16.2	H	0.80	8.48	25.48	14.52
108.60	7.9	v	0.80	10.08	18.78	24.72
108.60	8.6	H	0.80	10.08	19.48	24.02
135.75	7.8	v	0.84	13.94	22.58	20.92
135.75	12.9	H	0.84	13.94	27.68	15.82
162.90	4.4	H	0.90	15.87	21.17	22.33
190.05	4.3	v	1.08	13.81	19.19	24.31
190.05	5.8	H	1.08	13.81	20.69	22.81
244.35	6.5	v	1.38	12.04	19.92	26.08
244.35	9.1	H	1.38	12.04	22.52	23.48
108.60 108.60 135.75 135.75 162.90 190.05 190.05 244.35	7.9 8.6 7.8 12.9 4.4 4.3 5.8 6.5	V H V H H V H	0.80 0.80 0.84 0.84 0.90 1.08 1.08	10.08 10.08 13.94 13.94 15.87 13.81 13.81	18.78 19.48 22.58 27.68 21.17 19.19 20.69 19.92	24.72 24.02 20.92 15.82 22.33 24.31 22.81 26.08

SAMPLE CALCULATION: FSdBuV/m = MR (dBuV) + ACFdB.

TEST PROCEDURE: The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY: NAM NGUYEN **DATE:** 8/21/2003

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.227

REQUIREMENTS: The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated to the general limits of 15.209.

THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division. The horizontal scale is set to 10 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: NAM NGUYEN DATE: 8/21/2003


APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898

849 NW State Road 45 Newberry, Florida 32669 http://www.timcoengr.com

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH PLOT

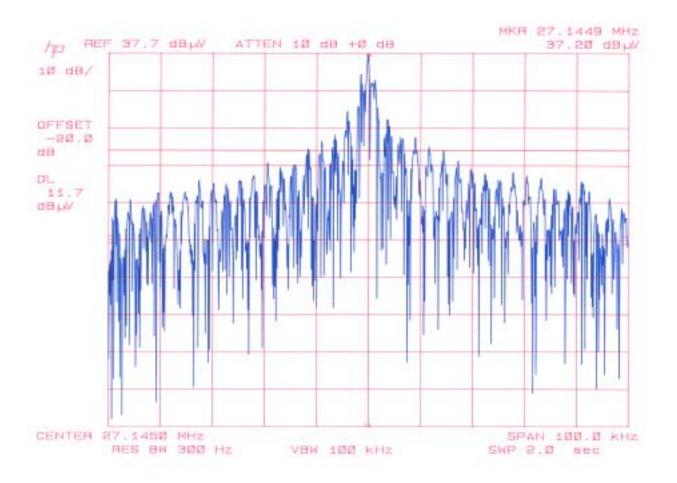

APPLICANT: SCIENTIFIC TOYS, LTD.

FCC ID: BY3E898