

Prüfbericht-Nr.: <i>Test Report No.:</i>	50178149 001	Auftrags-Nr.: <i>Order No.:</i>	114080702
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	07-Aug-2018
Auftraggeber: <i>Client:</i>	Trans Electric Co., Ltd. 771, Sec. 2, Chungsan Road, Huatang, Changhua, Taiwan.		
Prüfgegenstand: <i>Test item:</i>	HD wireless Sender & Receiver		
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	WTR-5000		
Auftrags-Inhalt: <i>Order content:</i>	FCC IC		
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 Part 2 Subpart J Section 2.1093 IEEE std 1528-2013 RSS-102 KDB 447498 KDB 865664 KDB 248227 KDB 941225		
Wareneingangsdatum: <i>Date of receipt:</i>	10-Apr-2017		
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000497838-006		
Prüfzeitraum: <i>Testing period:</i>	20-Apr-2017 - 20-Apr-2017		
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Taiwan Ltd.		
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Taiwan Ltd.		
Prüfergebnis*: <i>Test result*:</i>	Pass		
geprüft von / tested by:		kontrolliert von / reviewed by:	
28-Aug-2018 Mars Y.J. Lin / Project Engineer		28-Aug-2018 Jack H.C. Chang / Project Manager	
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			Name / Stellung <i>Name / Position</i>
			Unterschrift <i>Signature</i>
Sonstiges / Other:			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>	
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet		Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>			

v04

STATEMENT OF COMPLIANCE

TEST ITEM	SPECIFICATION	RESULT
Specific Absorption Rate - Wi-Fi 802.11 a/ n(20M/40M) – 5GHz Band	CFR Title 47 Part 2 Subpart J Section 2.1093 IEEE 1528-2013 RSS-102 KDB 447498 D01 KDB 447498 D02 KDB 865664 D01 D02 KDB 248227 D01	PASS

This device complies with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg) specified in CFR Title 47 Part 2 Subpart J Section 2.1093 and ANSI/IEEE C95.1-1992.

This device has been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and Published RF exposure KDB procedures.

Refer to the maximum results of Specific Absorption Rate (SAR) during testing as below.

FREQUENCY BAND	EXPOSURE POSITION	HIGHEST REPORTED SAR _{1G} VALUE (W/KG)
802.11 a/n - 5GHz Band	Body	0.881

Revision History

Rev.	Date	Revisions	Revised By
00	5-May-2017	Initial Issue	Sam Kuo

This test report contains a reference to the previous version test report that it replaces.

Contents

CONTENTS	4
1. GENERAL REMARKS	5
1.1 COMPLEMENTARY MATERIALS	5
2. TEST FACILITIES	5
2.1 TEST ENVIRONMENT	5
3. SAR MEASUREMENT SYSTEM	6
3.1 SAR MEASUREMENT SYSTEM	6
3.2 SYSTEM COMPONENTS	7
3.3 SCANNING PROCEDURE	9
4. LIST OF TEST AND MEASUREMENT INSTRUMENTS	10
5. DEVICE UNDER TEST	11
5.1 DEVICE OVERVIEW	11
5.2 NUMBER OF CHANNEL	11
5.3 CONDUCTED POWER	12
5.4 DUT TESTING POSITION	12
5.5 TEST OPERATION AND TEST SOFTWARE	13
5.6 CONDUCTED POWER TABLE	14
5.7 SUMMARY OF SAR TEST RESULTS	17
5.8 SIMULTANEOUS TRANSMISSION CONDITIONS	18
6. SYSTEM VERIFICATION	19
6.1 DIELECTRIC PROPERTY MEASUREMENTS	19
6.2 TEST SYSTEM CHECK	20
7. MEASUREMENT UNCERTAINTY	21

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

- Appendix A: Photographs of the test set-up
- Appendix B: System check
- Appendix C: Test Plots of SAR Measurement
- Appendix D: Calibration Certificate

2. Test Facilities

TÜVRheinland Taiwan Co., Ltd.
13F. No. 758, Sec. 4, Bade Rd., Taipei 105, Taiwan, R. O. C.



Testing Laboratory
0759

TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th

2.1 Test Environment

Ambient Temperature: 20 - 24°C
Tissue Simulating Liquid: 22 ±2°C

3. SAR Measurement System

3.1 SAR Measurement System

The DASY5 System for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

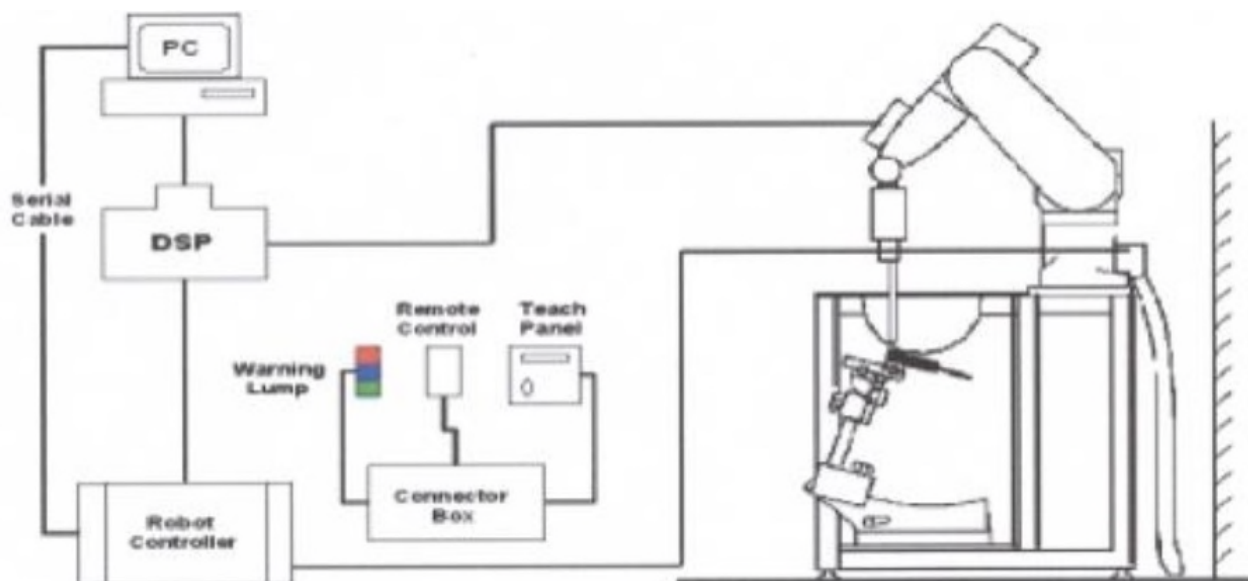


Figure 1. SAR Lab Test Measurement Set-up

3.2 System Components

EX3DV4 Probe Specification



Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz, Linearity: ± 0.2 dB, (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20mm) Tip diameter: 2.5mm (Body: 12mm) Typical distance From probe tip to dipole centers: 1mm
Application	High precision dosimetric measurements in any exposure scenario. Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%

Device Holder



Device holder for Head-Held Transmitters



Device holder for Laptops and Tablets

The DASY device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.


Phantom Description

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 30 liters

Dimensions: 190x600x0 mm (H x L x W)

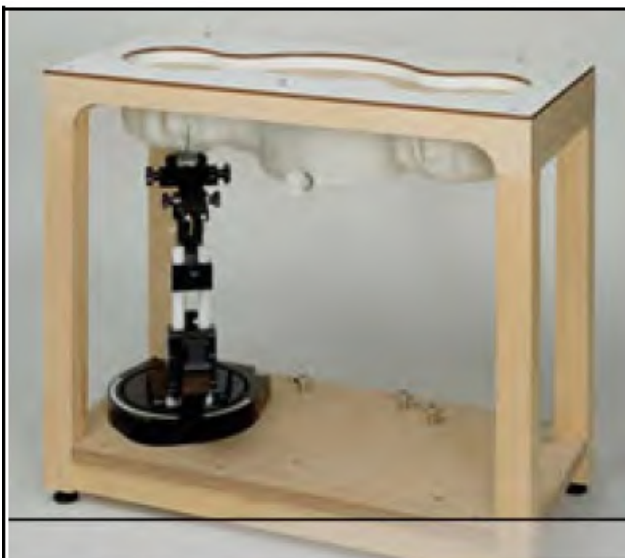

3.3 Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

Step 1: Power Reference Measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing is set according to FCC KDB Publication 865664. During scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Step 3: Zoom Scan

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions.

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step1.

4. List of Test and Measurement Instruments

Dielectric Property Measurements

Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal. Due Date
Network Analyzer	Keysight	E5080A	MY55200677	26-Mar-16	25-Mar-18
Dielectric Probe kit	Agilent	85070E	8710-2036	N/A	N/A
Shorting block	Agilent	85070E	60003	N/A	N/A
Digital Thermometer	WISEWIND	1509	509Q24R	16-May-16	15-May-17
Pocket Digital Thermometer	DGS	A9SA-ST9215C	160520302	16-May-16	15-May-17

System check

Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal. Due Date
Signal Generator	Agilent	N5171B	MY53050377	8-Mar-17	7-Mar-18
Power Sensor	Agilent	U2021XA	MY53480013	8-Mar-17	7-Mar-18
Amplifier	EMCI	EMC2830P	980325	N/A	N/A
Directional coupler	Woken	0110A05601O-10	COM65JW1A3	N/A	N/A
E-Field Probe	Speag	EX3DV4	7400	9-May-16	8-May-17
Data Acquisiton Electronics	Speag	DAE4	855	26-May-16	25-May-17
System Validation Diploe	Speag	D5GHzV2	1235	10-May-16	9-May-17
System Validation Diploe	Speag	D2450V2	804	24-May-16	23-May-17

Other

Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal. Due Date
Spectrum Analyzer	R&S	FSP30	837866/009	13-Jan-17	12-Jan-18

5. Device Under Test

5.1 Device Overview

Band & Mode	802.11a/n(20M)/n(40M) 5GHz
Operation Frequency	5180MHz~5220MHz, 5745MHz~5795MHz

5.2 Number of Channel

	CH	Frequency
		(MHz)
802.11a Band I	36	5180
802.11a Band I	40	5200
802.11a Band I	44	5220
802.11n (HT20) Band I	36	5180
802.11n (HT20) Band I	40	5200
802.11n (HT20) Band I	44	5220
802.11n (HT40) Band I	38	5190
802.11a Band IV	149	5745
802.11a Band IV	157	5785
802.11a Band IV	165	5825
802.11n (HT20) Band IV	149	5745
802.11n (HT20) Band IV	157	5785
802.11n (HT20) Band IV	165	5825
802.11n (HT40) Band IV	151	5755
802.11n (HT40) Band IV	159	5795


5.3 Conducted Power

This device operates using the following maximum and modulated average output power specifications. SAR values were scaled to the maximum allowed power to determine compliance according to KDB 447498 D01.

Please refer to the 5.6 for detailed information.

5.4 DUT Testing Position

Since this HDMI dongle can be used in close proximity to the human. According to technical standards, this device was tested for SAR compliance in Body-worn specified in KDB 447498 D02.

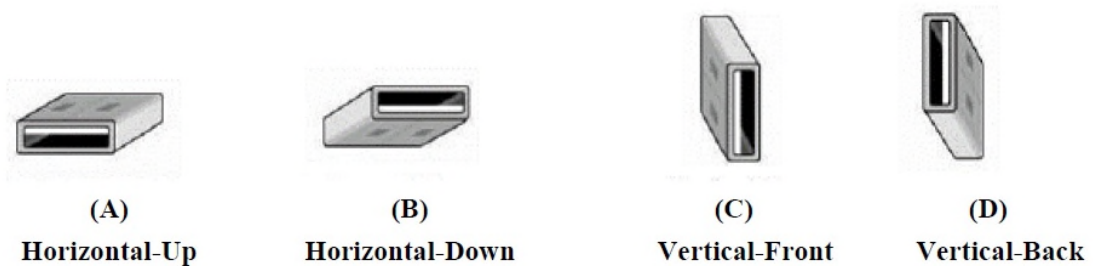

5.5 Test Operation and Test Software

For WLAN SAR testing, use chipset specific software to control the EUT, and makes it transmit in maximum power.

Auxiliary Equipment:

The EUT has been tested together with the following additional accessories:

Description	Manufacturer	Model No.	Serial No.
Notebook(EMC-06)	Lenovo	TP00048A	PB-0F8B2

5.6 Conducted Power Table

WLAN802.11 a/n(20M/40M) conducted power table:

Antenna Band	SISO		MIMO
	TX0	TX1	TX0+TX1
WLAN802.11 a	✓	✓	
WLAN802.11n(20M)	✓	✓	✓
WLAN802.11n(40M)	✓	✓	✓

TX0

802.11a		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6
36	5180	10	9.32
40	5200	10	9.34
44	5220	10	9.48

TX1

802.11a		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6
36	5180	10	9.29
40	5200	10	9.24
44	5220	10	9.38

TX0

802.11a		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6
149	5745	10	9.80
157	5785	10	9.44
165	5825	10	9.53

TX1

802.11a		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6
149	5745	10	9.74
157	5785	10	9.71
165	5825	10	9.65

TX0

802.11n(20M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6.5
36	5180	10	9.44
40	5200	10	9.51
44	5220	10	9.62

TX1

802.11n(20M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6.5
36	5180	10	9.33
40	5200	10	9.21
44	5220	10	9.45

TX0

802.11n(20M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6.5
149	5745	10	9.41
157	5785	10	9.31
165	5825	10	9.35

TX1

802.11n(20M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
			6.5
149	5745	10	9.36
157	5785	10	9.34
165	5825	10	9.28

TX0

802.11n(40M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
38	5190	10	13.5
			9.48

TX1

802.11n(40M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
38	5190	10	13.5
			9.33

TX0

802.11n(40M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
151	5755	10	13.5
159	5795	10	9.44
			9.58

TX1

802.11n(40M)		Max. Output Power (dBm)	Average Output Power (dBm)
CH	Frequency (MHz)		Data Rate (Mbps)
151	5755	10	13.5
159	5795	10	9.15
			9.37

5.7 Summary of SAR test results

802.11a 5G Band1 Ant TX0

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11a	Up side	5	44	5220	6Mbps	9.48	10	12.72	100	0.139	0.157	
WLAN 5G	802.11a	Down side	5	44	5220	6Mbps	9.48	10	12.72	100	0.032	0.036	
WLAN 5G	802.11a	Front side	5	44	5220	6Mbps	9.48	10	12.72	100	0.078	0.088	
WLAN 5G	802.11a	Back side	5	44	5220	6Mbps	9.48	10	12.72	100	0.032	0.036	

802.11a 5G Band4 Ant TX0

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11a	Up side	5	149	5745	6Mbps	9.8	10	4.71	100	0.185	0.194	
WLAN 5G	802.11a	Down side	5	149	5745	6Mbps	9.8	10	4.71	100	0.276	0.289	
WLAN 5G	802.11a	Front side	5	149	5745	6Mbps	9.8	10	4.71	100	0.038	0.040	
WLAN 5G	802.11a	Back side	5	149	5745	6Mbps	9.8	10	4.71	100	0.083	0.087	

802.11a 5G Band1 Ant TX1

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11a	Up side	5	44	5220	6Mbps	9.38	10	15.35	100	0.048	0.055	
WLAN 5G	802.11a	Down side	5	44	5220	6Mbps	9.38	10	15.35	100	0.116	0.134	
WLAN 5G	802.11a	Front side	5	44	5220	6Mbps	9.38	10	15.35	100	0.038	0.044	
WLAN 5G	802.11a	Back side	5	44	5220	6Mbps	9.38	10	15.35	100	0.092	0.106	

802.11a 5G Band4 Ant TX1

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11a	Up side	5	149	5745	6Mbps	9.74	10	15.35	100	0.206	0.219	
WLAN 5G	802.11a	Down side	5	149	5745	6Mbps	9.74	10	15.35	100	0.373	0.396	
WLAN 5G	802.11a	Front side	5	149	5745	6Mbps	9.74	10	15.35	100	0.011	0.012	
WLAN 5G	802.11a	Back side	5	149	5745	6Mbps	9.74	10	15.35	100	0.706	0.750	
WLAN 5G	802.11a	Back side	5	157	5785	6Mbps	9.71	10	15.35	100	0.653	0.698	
WLAN 5G	802.11a	Back side	5	165	5825	6Mbps	9.65	10	15.35	100	0.793	0.860	

802.11n Mode 5G Band1 Ant TX0

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11n20	Back side	5	44	5220	20Mbps	9.62	10	9.14	100	0.023	0.025	
WLAN 5G	802.11n40	Back side	5	38	5190	40Mbps	9.48	10	12.72	100	0.042	0.047	

802.11n Mode 5G Band1 Ant TX1

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11n20	Back side	5	44	5220	20Mbps	9.45	10	13.5	100	0.114	0.129	
WLAN 5G	802.11n40	Back side	5	38	5190	40Mbps	9.33	10	16.68	100	0.166	0.194	

802.11n Mode 5G Band4 Ant TX0

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11n20	Back side	5	149	5745	20Mbps	9.41	10	14.55	100	0.053	0.061	
WLAN 5G	802.11n40	Back side	5	151	5755	40Mbps	9.58	10	10.15	100	0.073	0.080	

802.11n Mode 5G Band4 Ant TX1

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor (%)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
WLAN 5G	802.11n20	Back side	5	149	5745	20Mbps	9.36	10	15.88	100	0.765	0.886	
WLAN 5G	802.11n40	Back side	5	151	5755	40Mbps	9.37	10	15.61	100	0.785	0.908	

Notes:

1. Liquid tissue depth is at least 10cm for 5GHz SAR measurements.
2. SAR results must be scaled to the maximum allowed power according to KDB 447498 D02.
3. SAR measurement procedure for the Dongle is described in KDB 447498D02.
4. According to KDB 865664 D01, SAR measurement variability must be assessed for each frequency band when the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once.

5.8 Simultaneous Transmission Conditions

Mode \ Report SAR _{1g}	TX0	TX1	Max. \sum SAR _{1g}
802.11n(20M) 5.2G	0.025	0.129	0.154
802.11n(20M) 5.8G	0.061	0.886	0.947
802.11n(40M) 5.2G	0.047	0.194	0.241
802.11n(40M) 5.8G	0.08	0.908	0.988

Max. \sum SAR_{1g} = 0.988W/kg < 1.6W/kg, so the simultaneous transmission SAR are not required for TX0 and TX1.

6. System Verification

6.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm (Frequency $\leq 3\text{GHz}$) or ≥ 10 cm (Frequency $> 3\text{GHz}$) during all tests.

Measured Tissue Properties

Date	Freq. (MHz)	Liquid Parameters	Measured	Target	Delta (%)	Limit \pm (%)
20-Apr-2017	Body 5190	Relative Permittivity (ϵ_r)	49.67	49.03	-1.31	5
		Conductivity (σ (S/m))	5.43	5.29	-2.69	5
20-Apr-2017	Body 5200	Relative Permittivity (ϵ_r)	49.65	49.01	-1.3	5
		Conductivity (σ (S/m))	5.45	5.3	-2.86	5
20-Apr-2017	Body 5220	Relative Permittivity (ϵ_r)	49.59	48.99	-1.23	5
		Conductivity (σ (S/m))	5.48	5.32	-3.01	5
20-Apr-2017	Body 5745	Relative Permittivity (ϵ_r)	48.01	48.27	0.54	5
		Conductivity (σ (S/m))	6.2	5.94	-4.52	5
20-Apr-2017	Body 5755	Relative Permittivity (ϵ_r)	47.99	48.26	0.57	5
		Conductivity (σ (S/m))	6.22	5.95	-4.6	5
20-Apr-2017	Body 5785	Relative Permittivity (ϵ_r)	47.89	48.22	0.68	5
		Conductivity (σ (S/m))	6.27	5.98	-4.87	5
20-Apr-2017	Body 5800	Relative Permittivity (ϵ_r)	47.14	48.2	2.2	5
		Conductivity (σ (S/m))	6.29	6	-4.83	5
20-Apr-2017	Body 5825	Relative Permittivity (ϵ_r)	47.07	48.17	2.27	5
		Conductivity (σ (S/m))	6.32	6.03	-4.82	5

6.2 Test System Check

The SAR system must be validated against its performance specifications before it is deployed.

A system check measurement was made following the determination of the dielectric parameters of the tissue simulating liquid, using the dipole validation kit. A power level of 250 mW for 2.4GHz band or 100mW for 5GHz band as supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the following table.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$)

System Performance Check Results

Date	Frequency (MHz)	Tissue type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Target 1g SAR (W/kg)	Delta (%)
20-Apr-2017	5200	Body	100	1235	7400	855	6.81	7.21	-5.5
20-Apr-2017	5800	Body	100	1235	7400	855	7.81	7.4	5.5

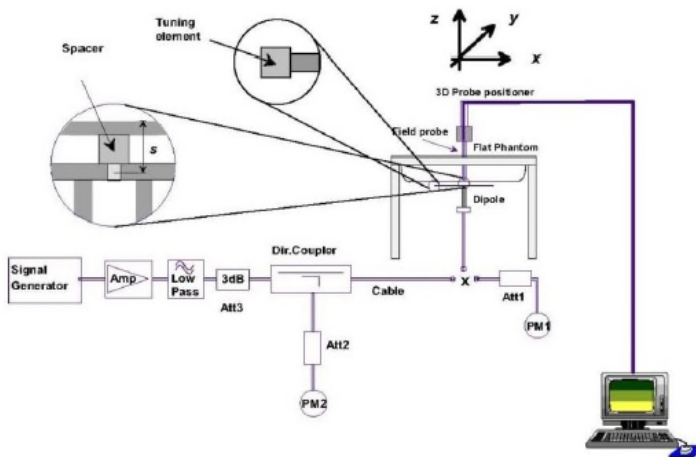


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

7. Measurement Uncertainty

Measurement Uncertainty evaluation template for EUT SAR test
IEEE 1528 30MHz- 6GHz

A	c	D	E	f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty %	Probability Distributioin	Div Valu e	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system								
Probe calibration(under 6Ghz)	6.30%	N	1	1	1	6.30%	6.30%	∞
Axial Isotropy	0.50%	R	1.73	1	1	0.29%	0.29%	∞
Hemispherical Isotropy	1.30%	R	1.73	1	1	0.75%	0.75%	∞
Boundary Effect	2.00%	R	1.73	1	1	1.15%	1.15%	∞
Linearity	0.60%	R	1.73	1	1	0.35%	0.35%	∞
Modulation Response	2.40%	R	1.73	1	1	1.39%	1.39%	∞
System Detection Limits	1.00%	R	1.73	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	1.73	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	1.73	1	1	1.50%	1.50%	∞
RF ambient condition - noise	3.00%	R	1.73	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	1.73	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.80%	R	1.73	1	1	0.46%	0.46%	∞
Probe Positioning with respect to phantom shell	6.70%	R	1.73	1	1	3.87%	3.87%	∞
Max SAR Eval	1.00%	R	1.73	1	1	0.58%	0.58%	∞
Test Sample related								
Test sample positioning	2.90%	N	1	1	1	2.90%	2.90%	145
Device Holder Uncertainty	3.60%	N	1	1	1	3.60%	3.60%	5
Power scaling	0.00%	R	1.73	1	1	0.00%	0.00%	∞
Drift of output power	5.00%	R	1.73	1	1	2.89%	2.89%	∞
Phantom and Setup								
Phantom Uncertainty	7.60%	R	1.73	1	1	4.39%	4.39%	∞
SAR correction	1.90%	R	1.73	1	0.84	1.10%	0.92%	M
Liquid conductivity(meas.)	5.00%	R	1.73	0.78	0.71	2.25%	2.05%	M
Liquid permittivity(meas.)	5.00%	R	1.73	0.6	0.49	1.73%	1.41%	M
Temp. unc. - Conductivity	3.40%	R	1.73	0.78	0.71	1.53%	1.39%	M
Temp. unc. - Permittivity	0.40%	R	1.73	0.23	0.26	0.05%	0.06%	M
Combined standard uncertainty		RSS				11.34%	11.23%	748
Expant uncertainty (95% confidence interval), K=2						22.69%	22.46%	

Appendix B: System Check

Date: 20-Apr-2017

Dipole 5200MHz_SN:1235

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: CW; Frequency: 5200 MHz;

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.451$ mho/m; $\epsilon_r = 49.653$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/CW/Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 14.310 mW/g


Configuration/CW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.231 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 30.160 W/kg

SAR(1 g) = 6.81 mW/g; SAR(10 g) = 1.9 mW/g

Maximum value of SAR (measured) = 14.588 mW/g

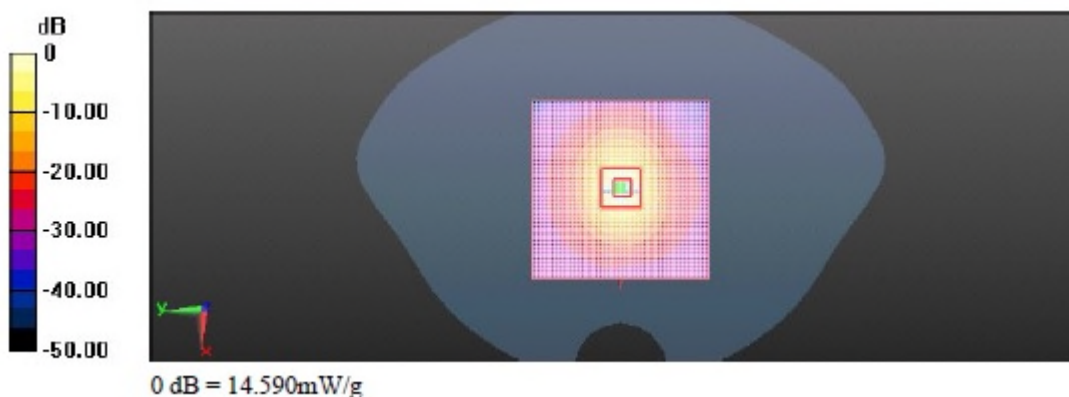

Date: 20-Apr-2017

Dipole 5800MHz_SN:1235

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: CW; Frequency: 5800 MHz;

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.294$ mho/m; $\epsilon_r = 47.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/CW/Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 16.402 mW/g


Configuration/CW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.522 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 35.638 W/kg

SAR(1 g) = 7.81 mW/g; SAR(10 g) = 2.17 mW/g

Maximum value of SAR (measured) = 16.778 mW/g

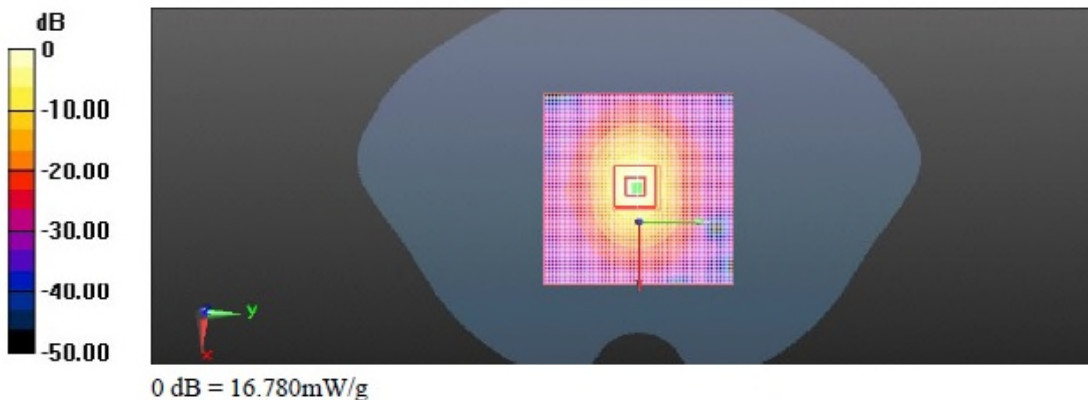

Appendix C: Test Plots of SAR Measurement

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Up side_CH44_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.530 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.341 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.324 mW/g

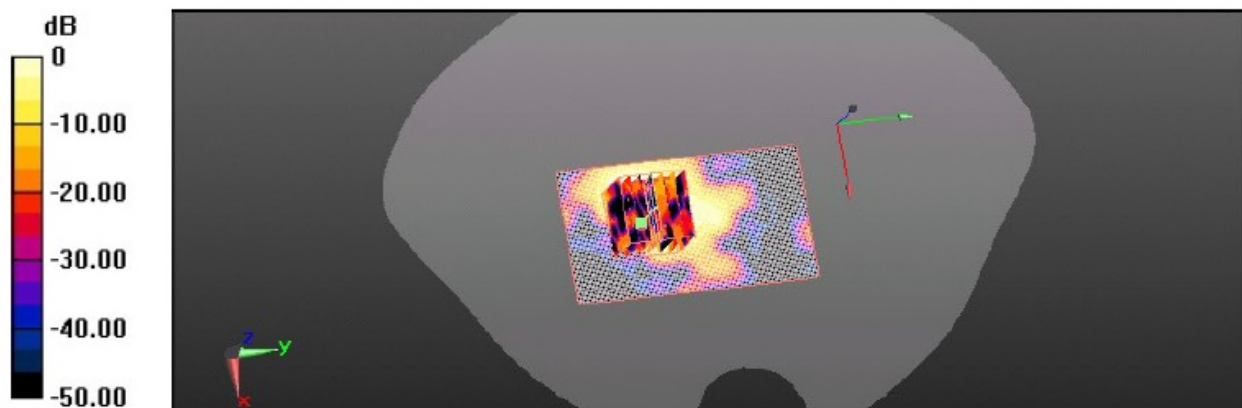

0 dB = 0.320mW/g

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Up side_CH44_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.180 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.189 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.110 mW/g

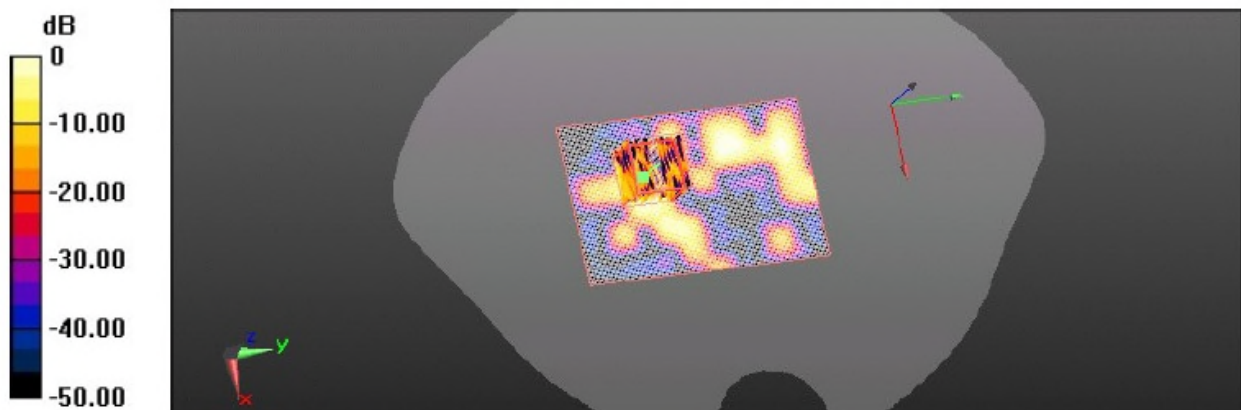

0 dB = 0.110mW/g

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Down side_CH44_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.082 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.702 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.00961 mW/g

Maximum value of SAR (measured) = 0.075 mW/g

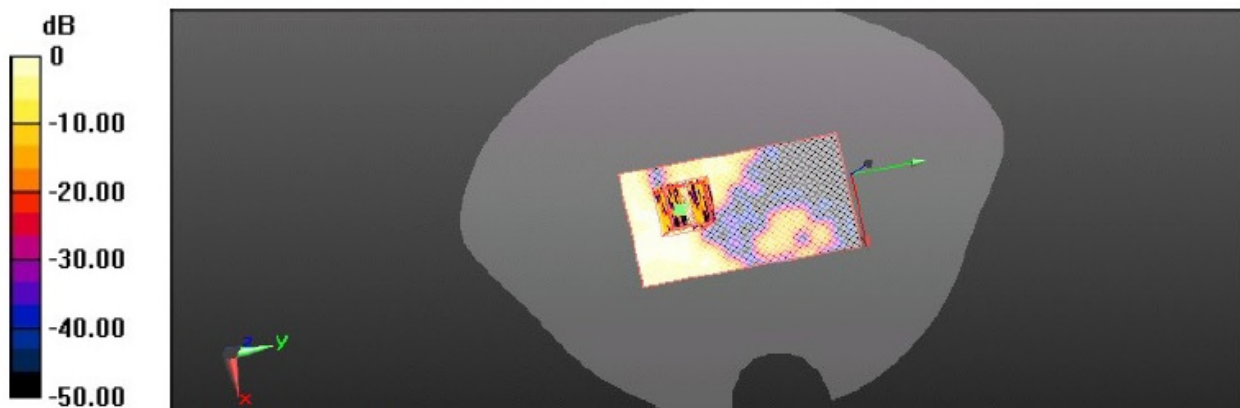

0 dB = 0.070mW/g

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Down side_CH44_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.232 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.100 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.258 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

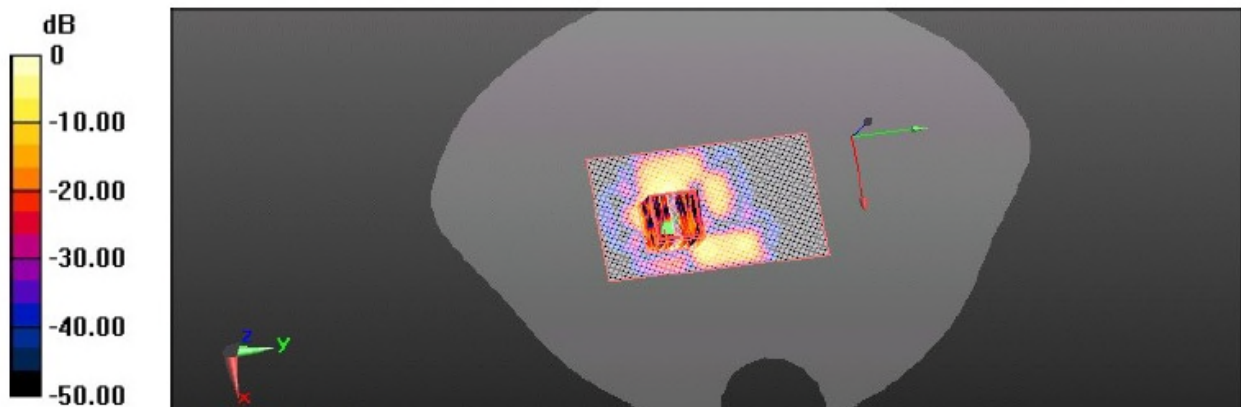

0 dB = 0.270mW/g

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Front side_CH44_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.198 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.164 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.012 mW/g

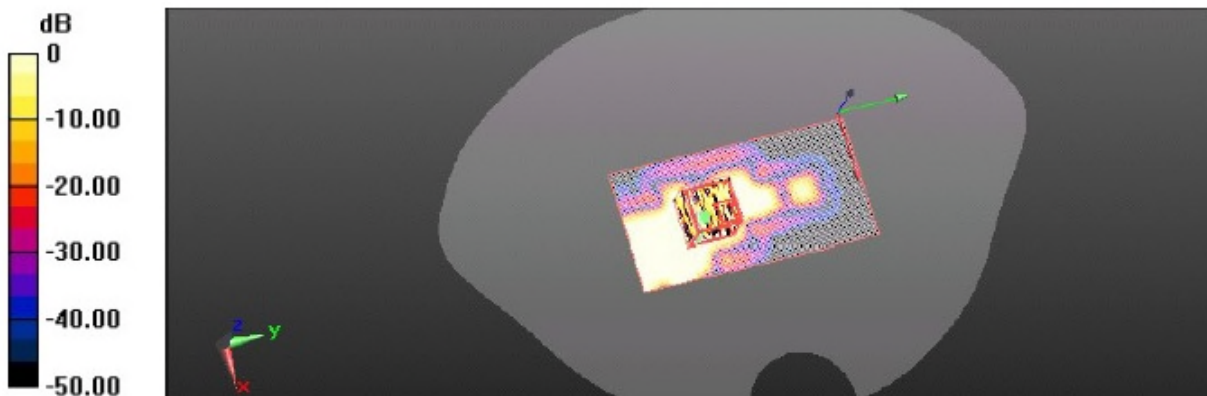

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Front side_CH44_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.483 \text{ mho/m}$; $\epsilon_r = 49.591$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.118 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.179 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.08 mW/g

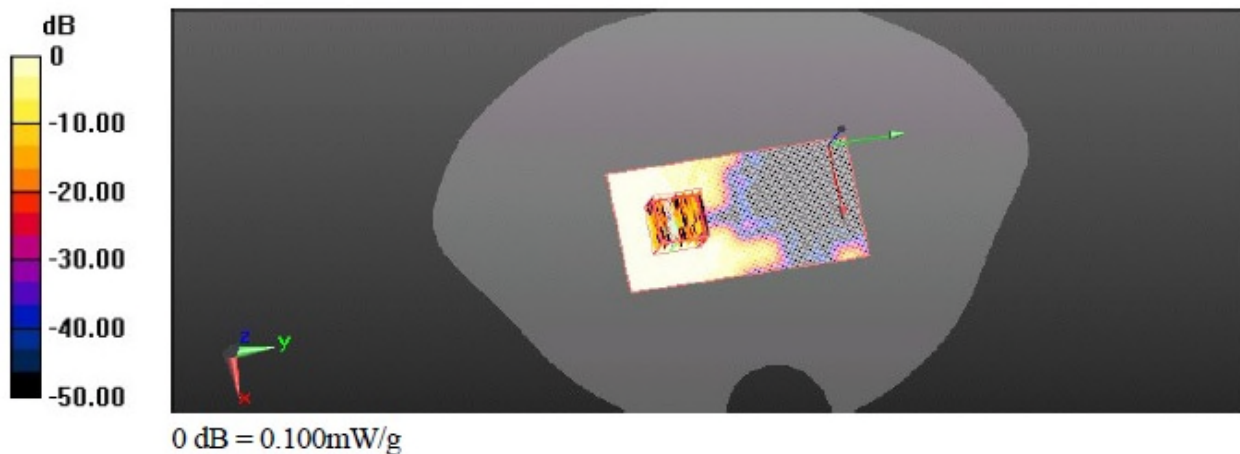

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Back side_CH44_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.082 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.702 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.00961 mW/g

Maximum value of SAR (measured) = 0.075 mW/g

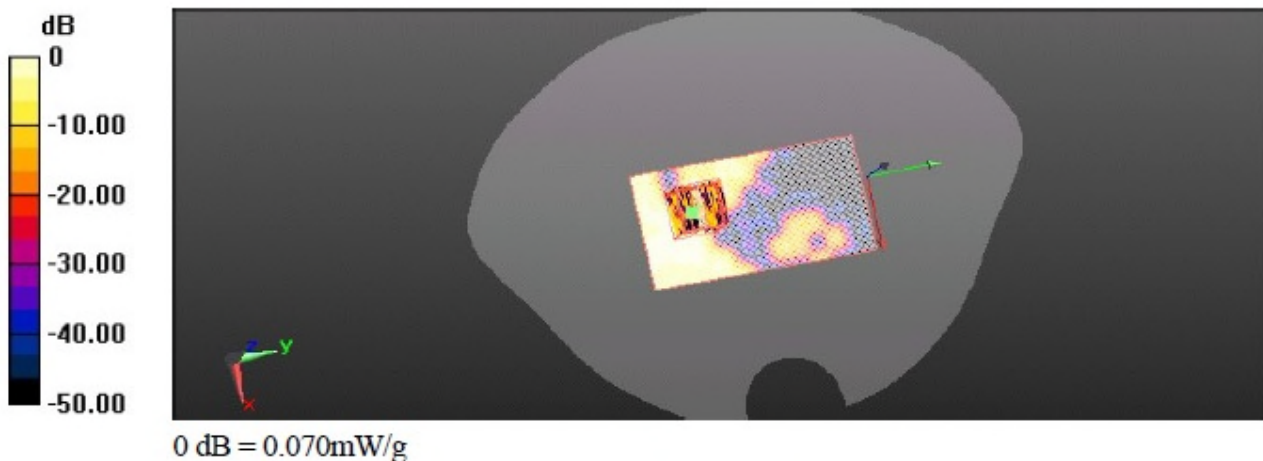

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Back side_CH44_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN a/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.231 mW/g


Configuration/WLAN a/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.189 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.218 mW/g

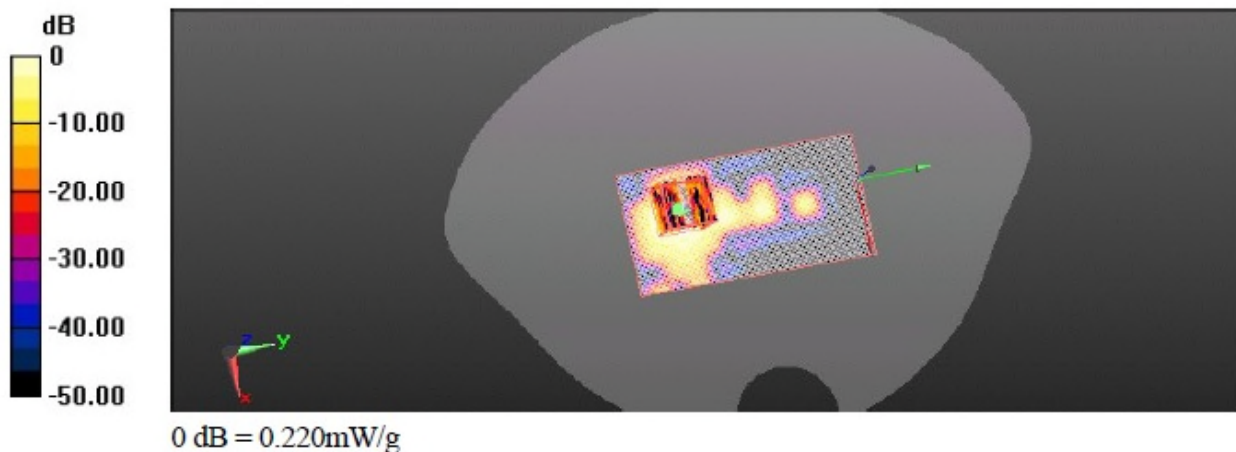

Date: 20-Apr-2017

WLAN802.11n(20M)_Body-worn_Back side_CH44_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.049 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.371 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.00691 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

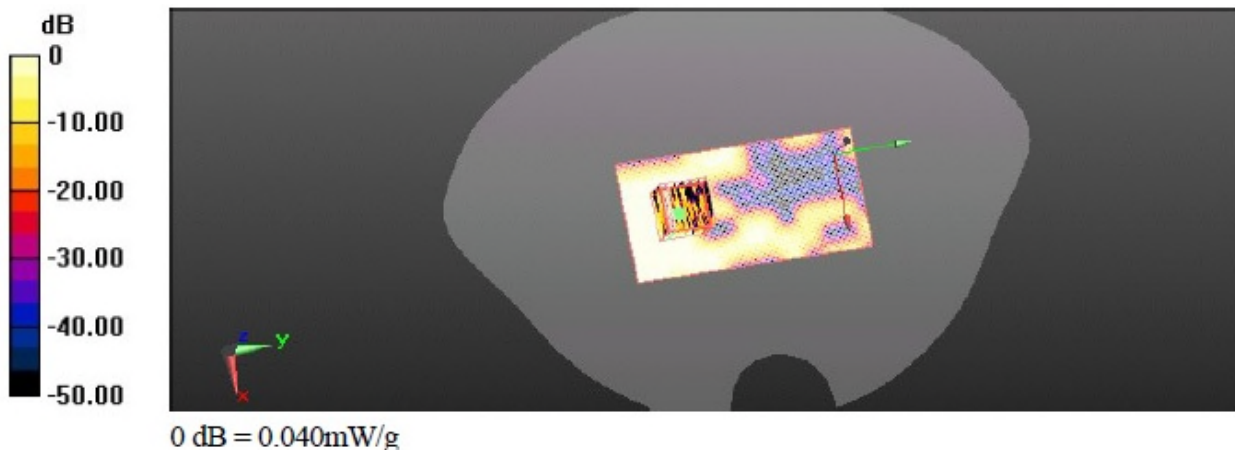

Date: 20-Apr-2017

WLAN802.11n(20M)_Body-worn_Back side_CH44_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5220 MHz;

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.483$ mho/m; $\epsilon_r = 49.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.251 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.363V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.271 mW/g

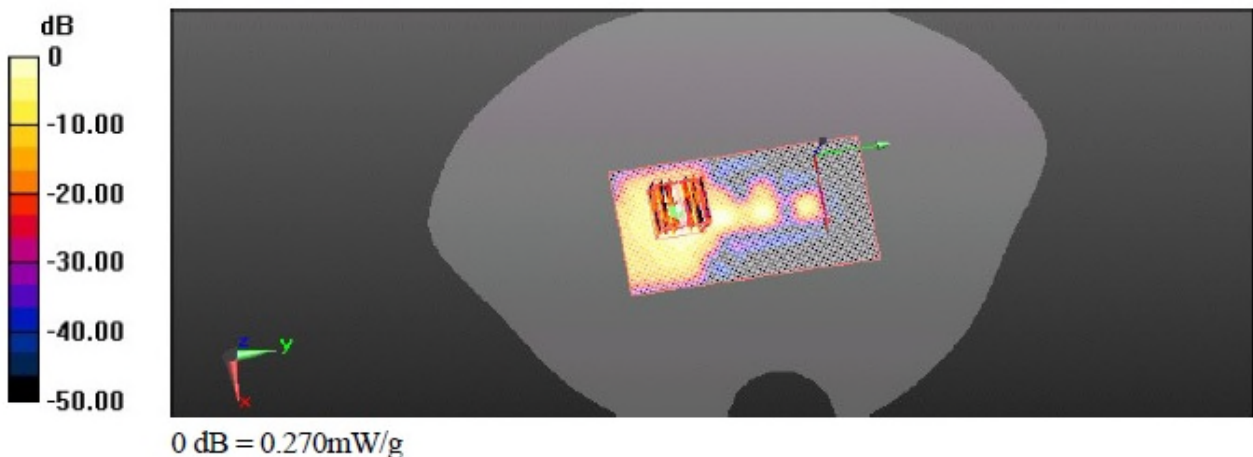

Date: 20-Apr-2017

WLAN802.11n(40M)_Body-worn_Back side_CH39_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5190 MHz;

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.428$ mho/m; $\epsilon_r = 49.667$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.119 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.220V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.085 mW/g

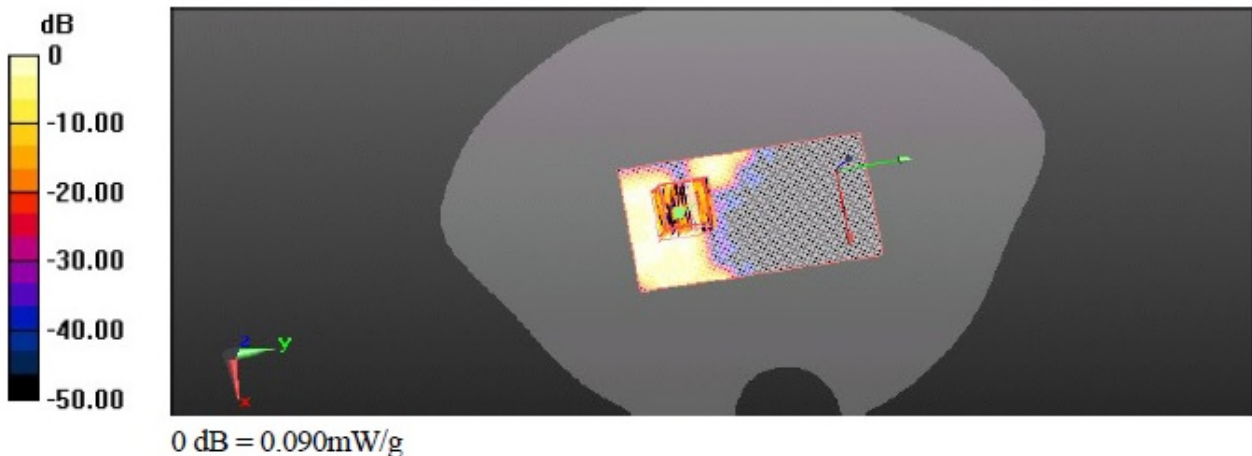

Date: 20-Apr-2017

WLAN802.11n(40M)_Body-worn_Back side_CH39_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5190 MHz;

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.428$ mho/m; $\epsilon_r = 49.667$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.341 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.887V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.278 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

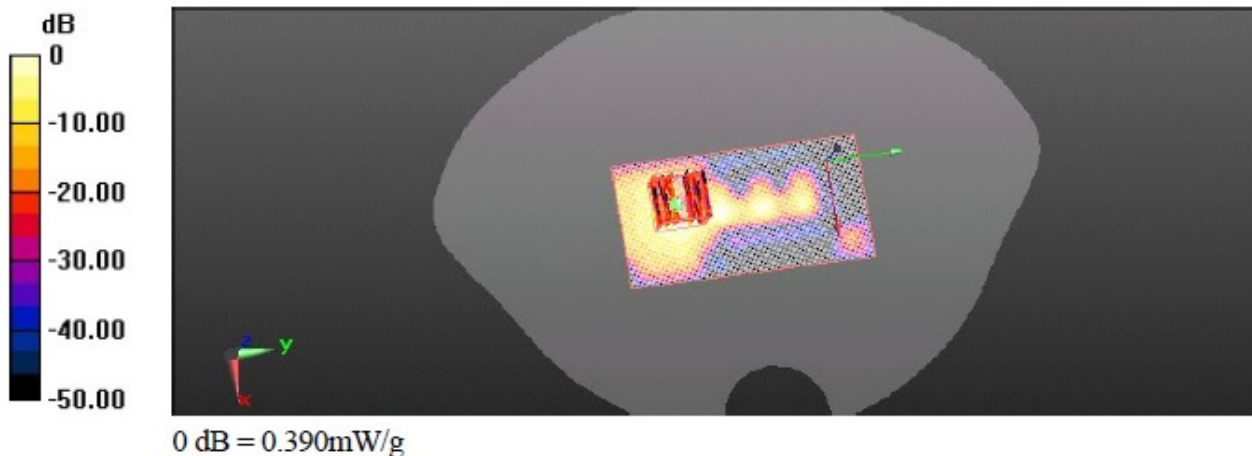

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Up side_CH149_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.204$ mho/m; $\epsilon_r = 48.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.482 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.945V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

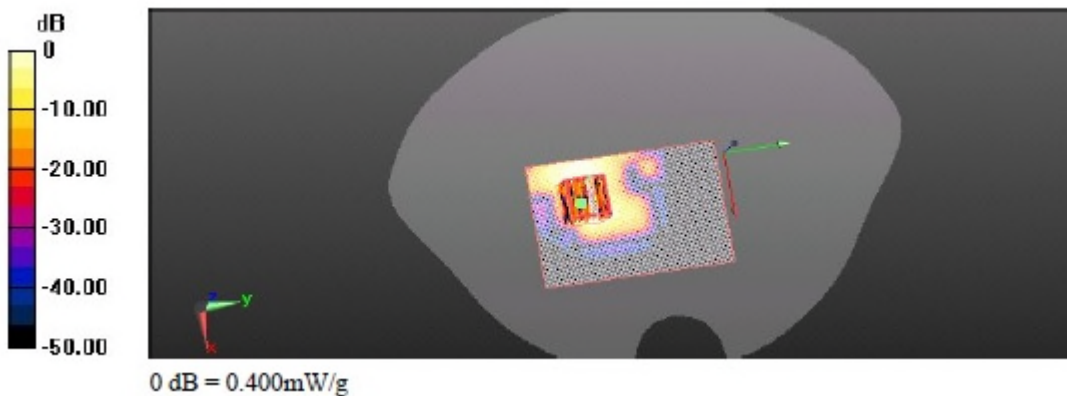

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Up side_CH149_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.523 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.233V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.429 mW/g

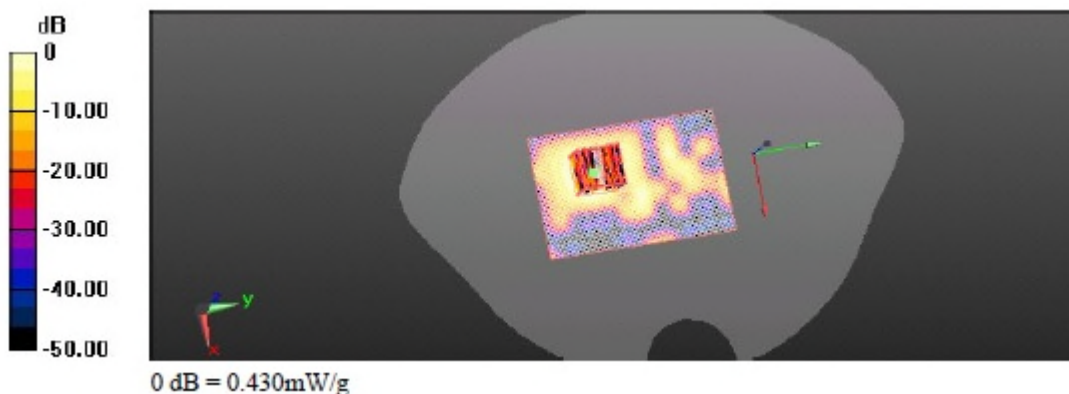

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Down side_CH149_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.204$ mho/m; $\epsilon_r = 48.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.988 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.731V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.816 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 1.023 mW/g

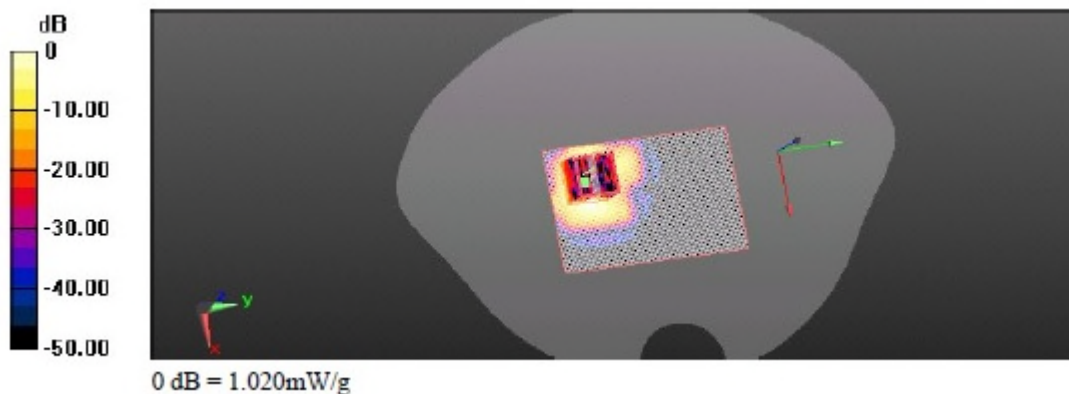

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Down side_CH149_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.178 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.536V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.524 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 1.282 mW/g

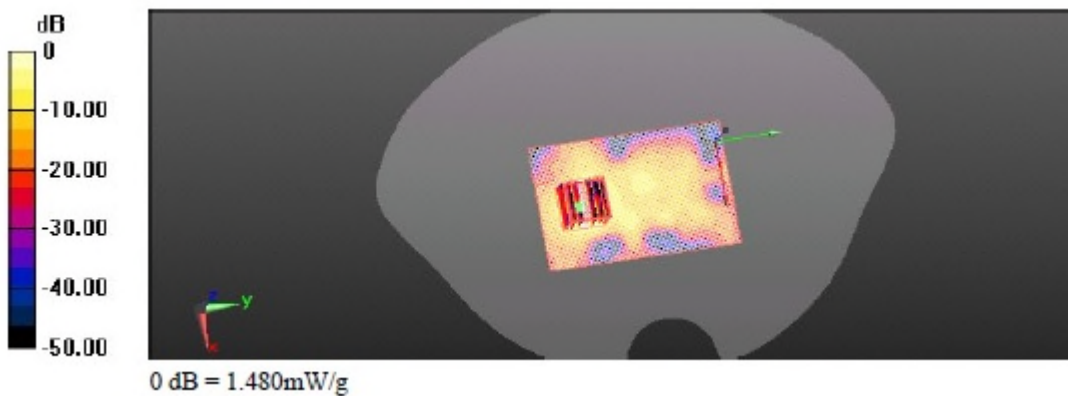

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Front side_CH149_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.159 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.151V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.00589 mW/g

Maximum value of SAR (measured) = 0.140 mW/g

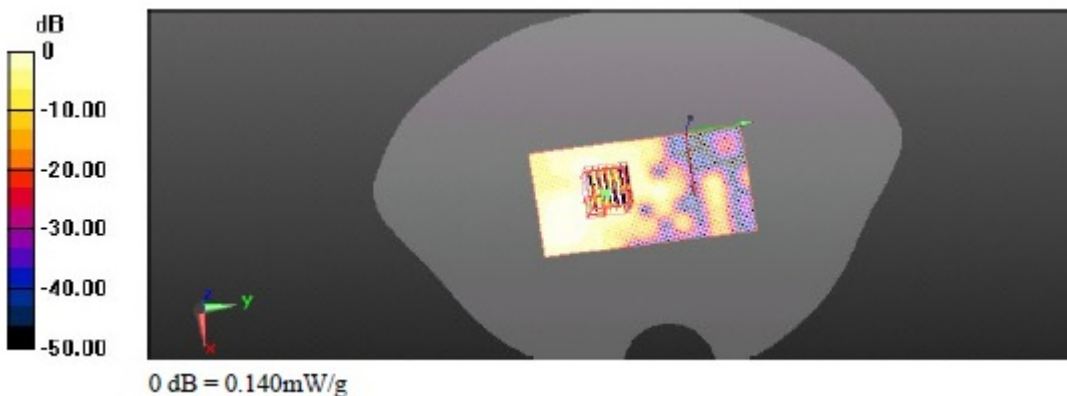

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Front side_CH149_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.159 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.162V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.008 mW/g

Maximum value of SAR (measured) = 0.012 mW/g

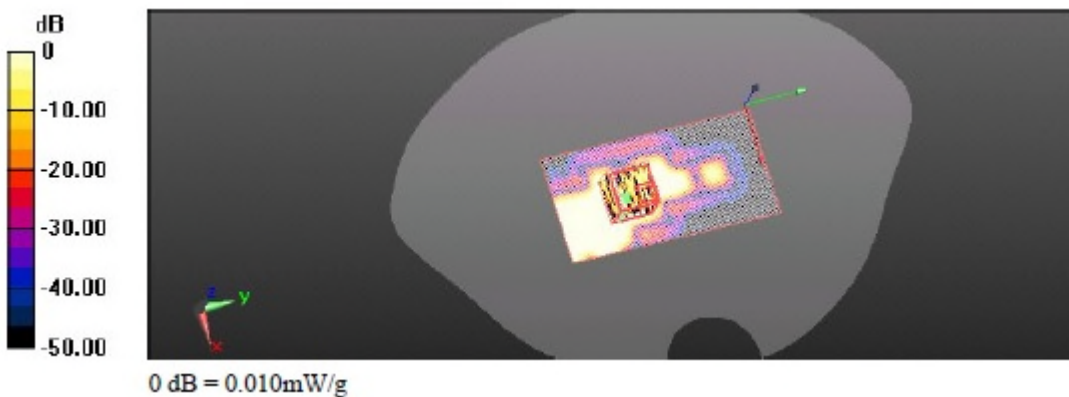

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Back side_CH149_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.204$ mho/m; $\epsilon_r = 48.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.146 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.579V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

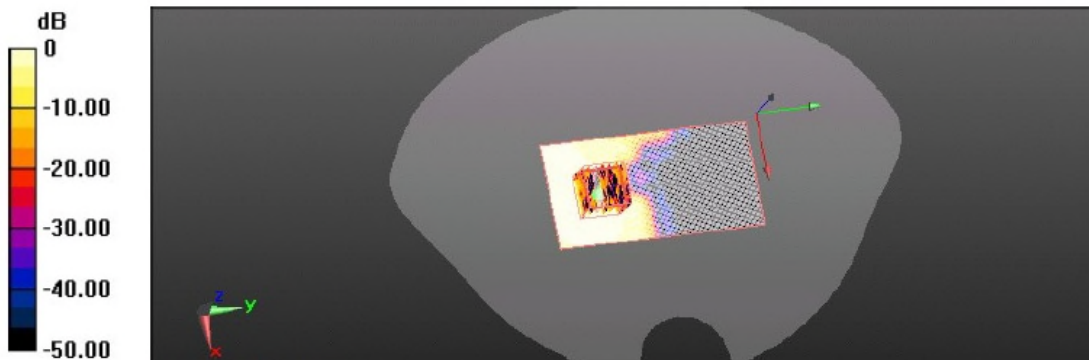

0 dB = 0.150mW/g

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Back side_CH149_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.580 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.371 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 5.262 W/kg

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 2.034 mW/g

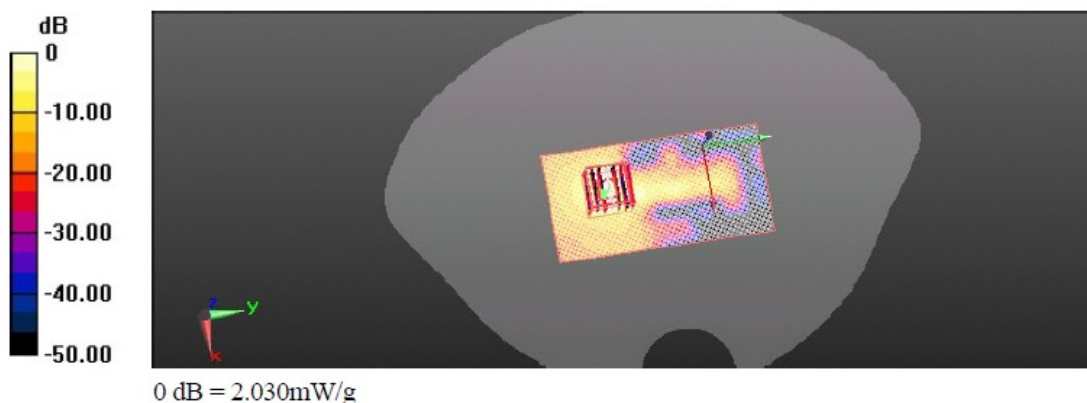

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Back side_CH157_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5785 MHz;

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.274 \text{ mho/m}$; $\epsilon_r = 47.894$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.562 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.256V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.866 W/kg

SAR(1 g) = 0.653 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 1.933mW/g

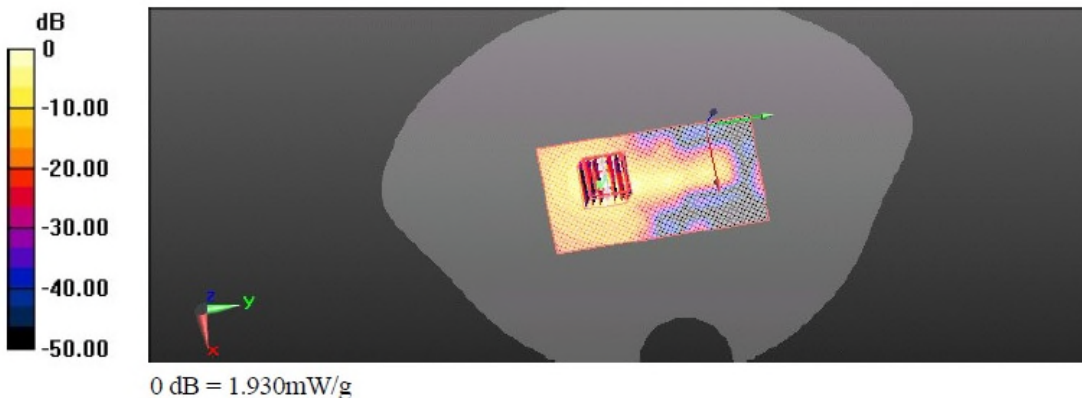

Date: 20-Apr-2017

WLAN802.11a_Body-worn_Back side_CH165_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5825 MHz;

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.231 \text{ mho/m}$; $\epsilon_r = 47.074$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.948 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 8.408V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 5.210 W/kg

SAR(1 g) = 0.793 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 2.424mW/g

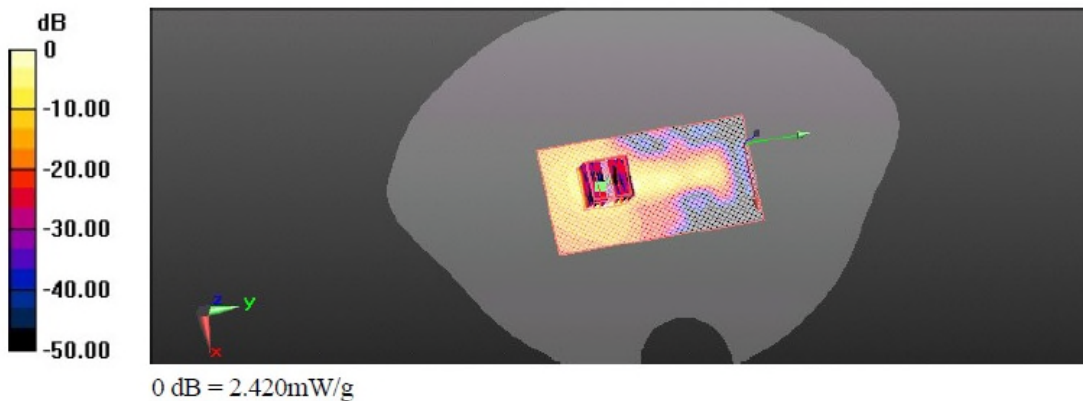

Date: 20-Apr-2017

WLAN802.11n(20M)_Body-worn_Back side_CH149_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.132 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.427V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.103mW/g

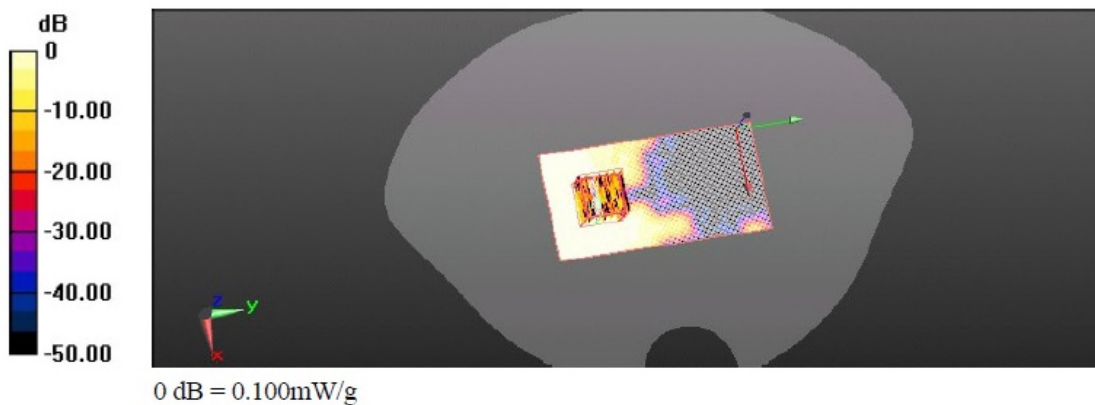

Date: 20-Apr-2017

WLAN802.11n(20M)_Body-worn_Back side_CH149_TX1_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5745 MHz;

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.204 \text{ mho/m}$; $\epsilon_r = 48.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(3.88, 3.88, 3.88); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.638 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.970V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 5.269 W/kg

SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 1.933mW/g

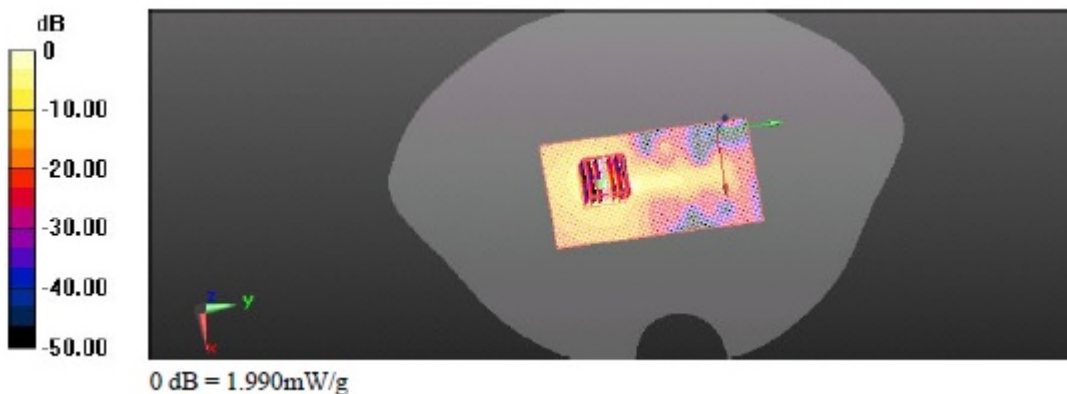

Date: 20-Apr-2017

WLAN802.11n(40M)_Body-worn_Back side_CH151_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5755 MHz;

Medium parameters used: $f = 5755$ MHz; $\sigma = 6.221$ mho/m; $\epsilon_r = 47.986$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.155 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.117V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.155mW/g

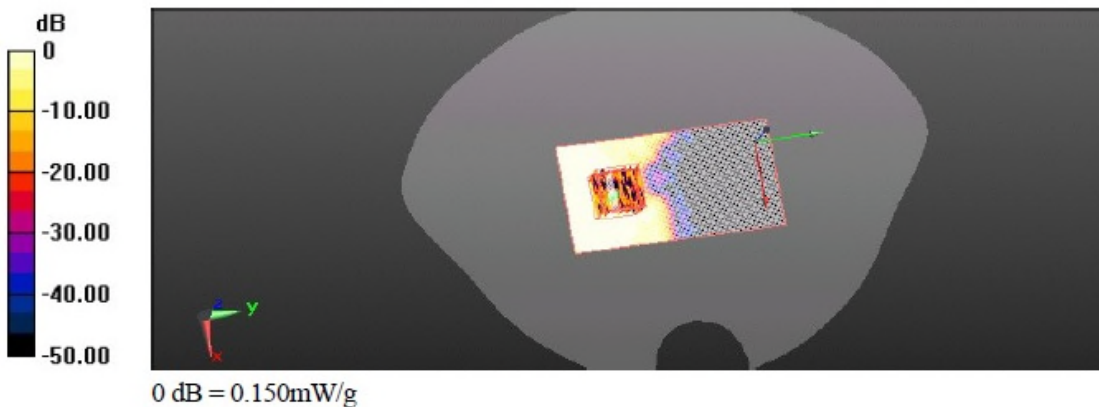

Date: 20-Apr-2017

WLAN802.11n(40M)_Body-worn_Back side_CH151_TX0_5mm

TUV Test Services, a test lab operated by TUV Corporation at Taipei, Taiwan

Communication System: WLAN 5G; Frequency: 5755 MHz;

Medium parameters used: $f = 5755 \text{ MHz}$; $\sigma = 6.221 \text{ mho/m}$; $\epsilon_r = 47.986$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration

- Probe: EX3DV4 - SN7400; ConvF(4.59, 4.59, 4.59); Calibrated: 5/9/2016
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn855; Calibrated: 5/26/2016
- Measurement SW: DASY52, Version 52.6 (2)

Configuration/WLAN n(20M)/Area Scan (101x161x1): Measurement grid:

$dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.681 mW/g

Configuration/WLAN n(20M)/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.458V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 5.124 W/kg

SAR(1 g) = 0.785 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 1.933mW/g

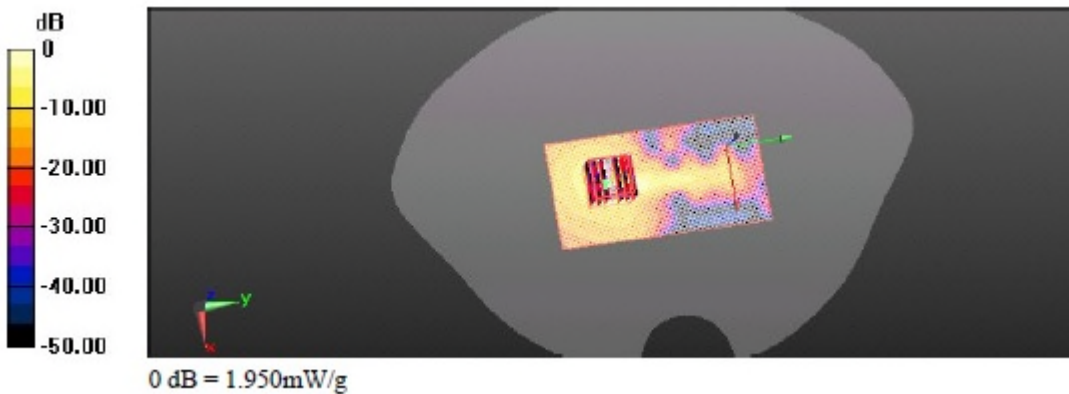

Appendix D: Calibration Certificate

EX3DV4 – SN:7400

May 9, 2016

Probe EX3DV4

SN:7400

Manufactured: November 19, 2015
Calibrated: May 9, 2016

Calibrated for DASY/EASY Systems
(Note: non compatible with DASY2 system!)

EX3DV4-SN:7400

May 9, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7400

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.40	0.43	0.48	$\pm 10.1\%$
DCP (mV) ^B	100.8	97.3	100.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X	0.0	0.0	1.0	0.00	141.2	$\pm 3.5\%$
		Y	0.0	0.0	1.0		151.5	
		Z	0.0	0.0	1.0		149.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:7400

May 9, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7400

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^g	ConvF X	ConvF Y	ConvF Z	Alpha ^d	Depth ^a (mm)	Unc (k=2)
2450	39.2	1.80	7.11	7.11	7.11	0.36	0.80	± 12.0 %
5200	36.0	4.66	4.93	4.93	4.93	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.77	4.77	4.77	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.67	4.67	4.67	0.45	1.80	± 13.1 %
5600	35.5	5.07	4.48	4.48	4.48	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.29	4.29	4.29	0.50	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 160 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^d Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7400

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^h (mm)	Unc (k=2)
2450	52.7	1.95	7.18	7.18	7.18	0.39	0.88	± 12.0 %
5200	49.0	5.30	4.59	4.59	4.59	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.34	4.34	4.34	0.55	1.90	± 13.1 %
5500	48.6	5.65	3.79	3.79	3.79	0.60	1.90	± 13.1 %
5600	48.5	5.77	3.62	3.62	3.62	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.88	3.88	3.88	0.60	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 190 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^e At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3746- SN-7400

May 9, 2016

Frequency Response of E-Field (TEM-Cell: if1110 EXX, Waveguide: R22)

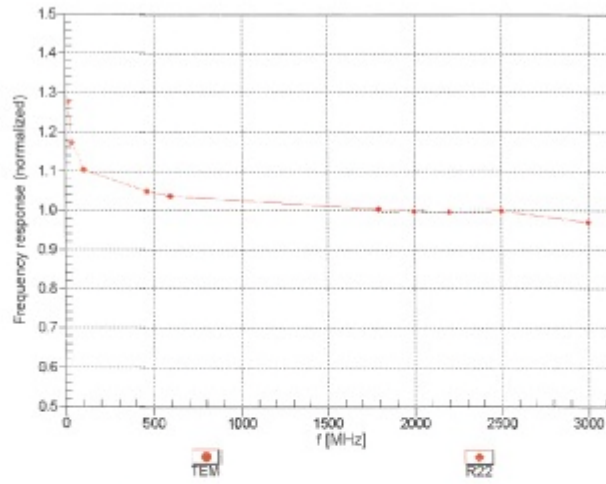


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4- SN:7400

May 9, 2016



Receiving Pattern (ϕ), $\theta = 0^\circ$

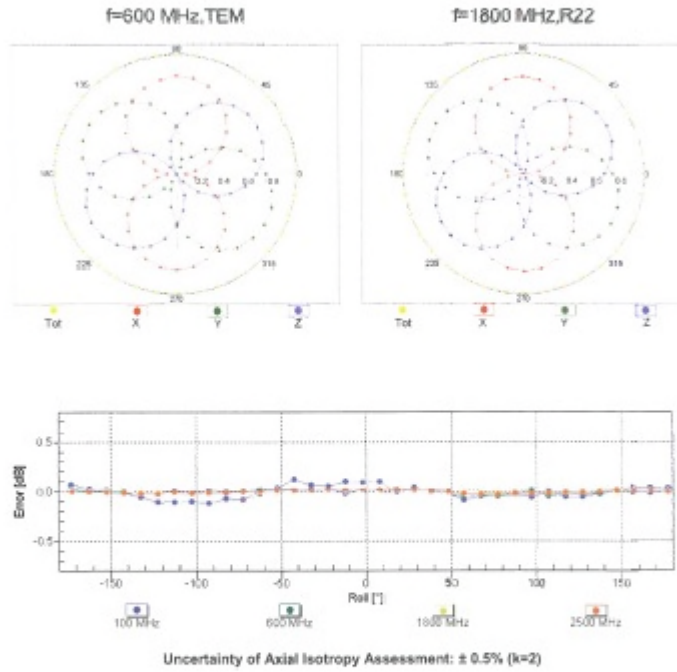

EX3DV4- SN:7400

May 9, 2016

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

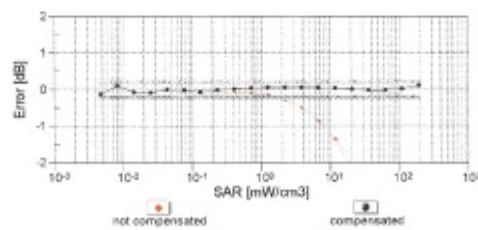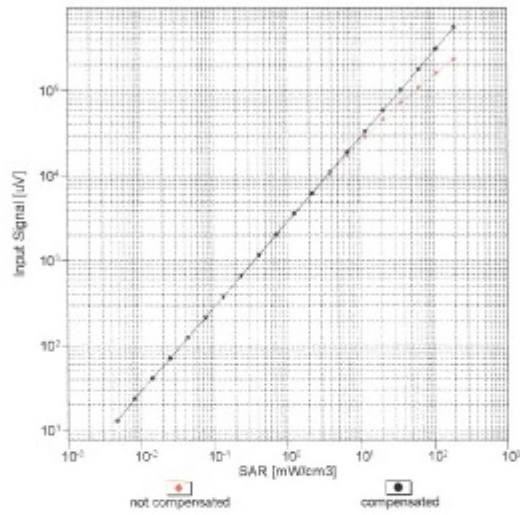


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)


EX37400_SN:7400

May 9, 2016

Conversion Factor Assessment

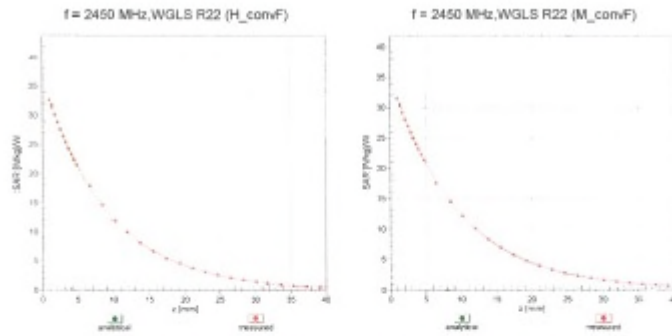

Deviation from Isotropy in Liquid Error (ϕ, θ), $f = 900$ MHz

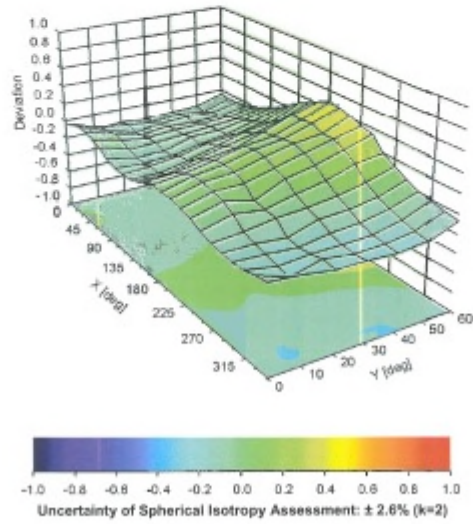

EX3DV4- SN:7400

May 9, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7400

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-22.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client TÜV TW (Auden)

Certificate No: D2450V2-804_May16

CALIBRATION CERTIFICATE			
Object	D2450V2 - SN: 804		
Calibration procedure(s)	QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz		
Calibration date:	May 24, 2016		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3°C and humidity < 70%.</p> <p>Calibration Equipment used (M&E critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02288)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (204)	06-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	06-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02232)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02232)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41069317	07-Oct-15 (No. 217-02232)	In house check: Oct-16
RF generator R&S SMT-05	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyser HP 8753E	SN: US37390685	19-Oct-01 (in house check Oct-15)	In house check: Oct-16
Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature 
Approved by:	Name Karja Pokovic	Function Technical Manager	Signature 
			Issued: May 27, 2016
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: D2450V2-804_May16

Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- a) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.6 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	50.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.6 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.5 W/kg ± 16.5 % (k=2)

DASY5 Validation Report for Head TSL

Date: 24.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 804


Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.76, 7.76, 7.76); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 111.3 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 25.8 W/kg
SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.95 W/kg
Maximum value of SAR (measured) = 20.8 W/kg

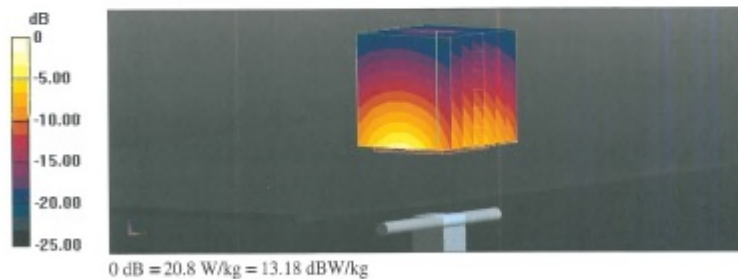

DASY5 Validation Report for Body TSL

Date: 24.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 804


Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 104.4 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 25.5 W/kg
SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.93 W/kg
Maximum value of SAR (measured) = 20.8 W/kg

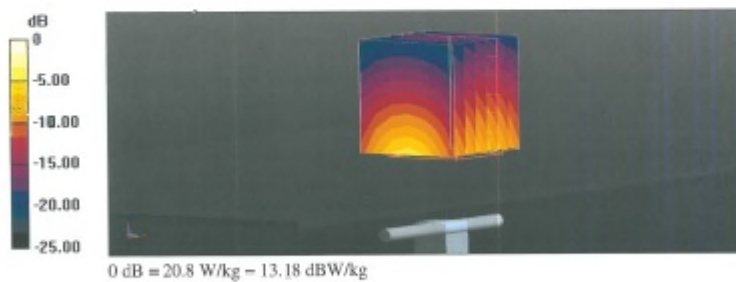

Impedance Measurement Plot for Body TSL

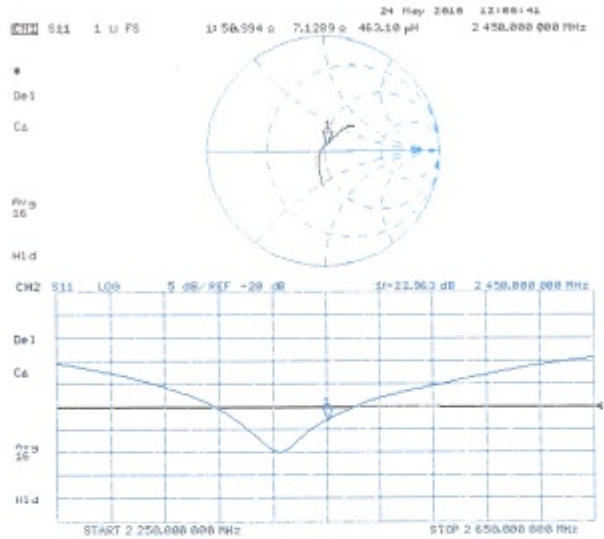

Schmid & Partner Engineering AG

s p e a g

Zugheussstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, <http://www.speag.com>

IMPORTANT NOTICE

USAGE OF THE DAE 4

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE4 unit is closed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

Schmid & Partner Engineering

TN_BR040315AD DAE4.doc

11.12.2009

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client TÜV TW (Auden)

Certificate No: DAE4-855_May16

CALIBRATION CERTIFICATE

Object: DAE4 - SD 000 D04 BM - SN: 855

Calibration procedure(s): QA CAL-06.v29
Calibration procedure for the data acquisition electronics (DAE)


Calibration date: May 26, 2016


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements [SI].
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Kettley Multimeter Type 2001	SN: 0810278	09-Sep-15 (No:17153)	Sep-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	05-Jan-16 (in house check)	In house check: Jan-17
Calibrator Box V2.1	SE UMS 006 AA 1002	05-Jan-16 (in house check)	In house check: Jan-17

Calibrated by: Name: Eric Hainfeld, Function: Technician, Signature: 

Approved by: Name: Fia Bornholt, Function: Deputy Technical Manager, Signature: 

Issue: May 26, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16225	16066
Channel Y	16093	16725
Channel Z	16612	16919

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	1.12	-0.11	2.62	0.53
Channel Y	-0.59	-1.99	0.81	0.56
Channel Z	-0.71	-2.04	0.54	0.44

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (k Ω)	Measuring (M Ω)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8104 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependant linearization parameters
Polarization φ	φ rotation around probe axis
Polarization β	β rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 8 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\beta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependant ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).