

FCC Part 15 EMI TEST REPORT

of

E.U.T. : WATERPROOF BLUETOOTH
SPEAKER
MODEL : H200
FCC ID. : BYGH200
Frequency Range : 2402MHz~2480MHz

for

APPLICANT : SANGEAN ELECTRONICS INC.
ADDRESS : NO.18, LANE 7, LI-DE STREET, CHUNG HO
DISTRICT, NEW TAIPEI CITY, 23584, TAIWAN,
R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN
NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.
TEL : (02)26023052 FAX: (02)26010910

[http : // www.etc.org.tw](http://www.etc.org.tw); e-mail : emc@etc.org.tw

Report Number : 16-07-RBF-042-01

TEST REPORT CERTIFICATION

Applicant : SANGEAN ELECTRONICS INC.
NO.18, LANE 7, LI-DE STREET, CHUNG HO DISTRICT, NEW
TAIPEI CITY, 23584, TAIWAN, R.O.C.

Manufacturer : SANGEAN ELECTRONICS (DONGGUAN) LIMITED
NO.1 RIVERSIDE STREET, SHISHUIKOU SECTION, LIANHU
ROAD, QIAOTOU TOWN, DONGGUAN CITY, GUANGDONG
PROVINCE P.R.CHINA

Description of EUT

- a) Type of EUT : WATERPROOF BLUETOOTH SPEAKER
b) Trade Name : SANGEAN
c) Model No. : H200
d) Power Supply : Battery DC 3.6V 2200mAh 7.92Wh
Adapter Model:HA06-13050100-02
I/P:100-240V, 50/60Hz, 0.3A
O/P:5.0V, 1.0A
f) Frequency Range : 2402MHz~2480MHz;

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	N/A
Band Edge Requirement	Pass
Duty Cycle	N.A.
20dB Bandwidth	Pass

Date Test Item Received : Jul. 26, 2016
Date Test Campaign Completed : Aug. 25, 2016
Date of Issue : Sep. 30, 2016

Test Engineer : Peter Liao
(Peter Liao, Engineer)

Approve & Authorized Signer : S. S. Liou
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN



Table of Contents	Page
Cover Page.....	I
TEST REPORT CERTIFICATION.....	II
Table of Contents.....	IV
1 GENERAL INFORMATION	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	5
2.5 User Information	6
3. SYSTEM TEST CONFIGURATION	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT.....	8
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.4.1 RF Portion.....	11
4.4.3 Other Emissions	23
4.5 Field Strength Calculation	27
4.6 Photos of Radiation Measuring Setup.....	28
5 CONDUCTED EMISSION MEASUREMENT	30
5.1 Standard Applicable	30
5.2 Measurement Procedure.....	30
5.3 Conducted Emission Data	31
5.4 Result Data Calculation	33
5.5 Conducted Measurement Equipment	33
5.6 Photos of Conduction Measuring Setup.....	34
6 ANTENNA REQUIREMENT	35
6.1 Standard Applicable	35

6.2 Antenna Construction.....	35
7 BAND EDGES MEASUREMENT	36
7.1 Standard Applicable	36
7.2 Measurement Procedure.....	36
7.3 Measurement Equipment	37
7.4 Measurement Data	37
8. DUTY CYCLE.....	42
8.1 Standard Applicable	42
8.2 Measurement Equipment	42
8.3 Measurement Data	42
9. BANDWIDTH OF EMISSION.....	45
9.1 Applicable Standard.....	45
9.2 Measurement Procedure.....	45
9.3 Measurement Equipment	46
9.4 Measurement Data	46

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : WATERPROOF BLUETOOTH SPEAKER
- b) Trade Name : SANGEAN
- c) Model No. : H200
- d) Power Supply : Battery DC 3.6V 2200mAh 7.92Wh
Adapter Model:HA06-13050100-02
I/P:100-240V, 50/60Hz, 0.3A
O/P:5.0V, 1.0A
- e) Frequency Range : 2402MHz~2480MHz

1.2 Characteristics of Device

WATERPROOF BLUETOOTH SPEAKER with Bluetooth Ver 4.1 (No BLE mode supported).

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details.

Measurement Software

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

This site is FCC 2.948 listed and accepted in a letter dated Jan. 29, 2014.

Registration Number: 90589

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50MH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56	56-46
0.5 - 5.0	56	46
5.0 - 30.0	60	50

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

For intentional radiator device, per §15.249(a), the field strength of emissions shall comply with the following :

Frequency MHz	Distance Meters	Fundamental		Harmonic	
		dB μ V/m	mV/m	dB μ V/m	μ V/m
902 - 928	3	94	50	54	500
2400 - 2483.5	3	94	50	54	500
5725 - 5875	3	94	50	54	500
24000 - 24250	3	108	250	68	2500

In accordance with §15.249(e), limits shown in above table are based on average limits for frequencies above 1000 MHz, and frequencies below 1000 MHz are based on quasi peak. However, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20 dB.

(3) Spurious in Out Band Requirement

For intentional device, according to §15.249 (d), emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits in §15.209.

(4) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation.

All measurement were intentional to maximum the emissions from EUT by varying the connection cables, therefore, the test result is sure to meet the applicable requirement.

3.2 Devices for Tested System

Device	Manufacturer	Model / FCC ID	Description
WATERPROOF BLUETOOTH SPEAKER*	SANGEAN ELECTRONICS (DONGGUAN) LIMITED	H200 / BYGH200	---

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For intentional radiators, according to §15.249 (a), the fundamental field strength shall not exceed 94 dB μ V/m and the harmonics shall not exceed 54 dB μ V/m. For out band emission except for harmonics shall be comply with §15.209 or at least attenuated by 50 dB below the level of the fundamental.

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


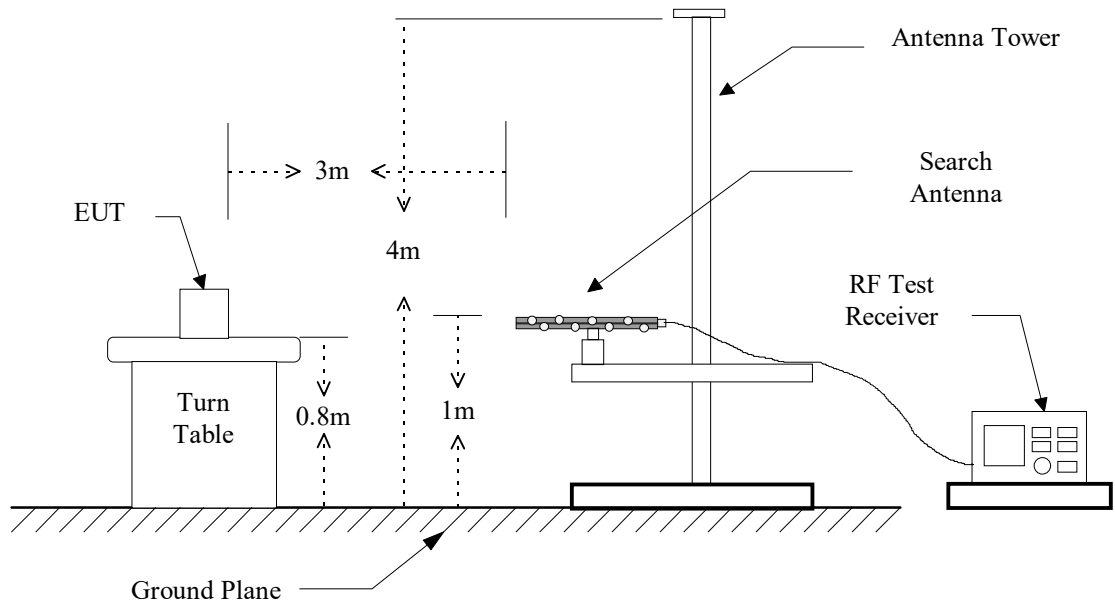


Figure 2 : Frequencies measured above 1 GHz configuration

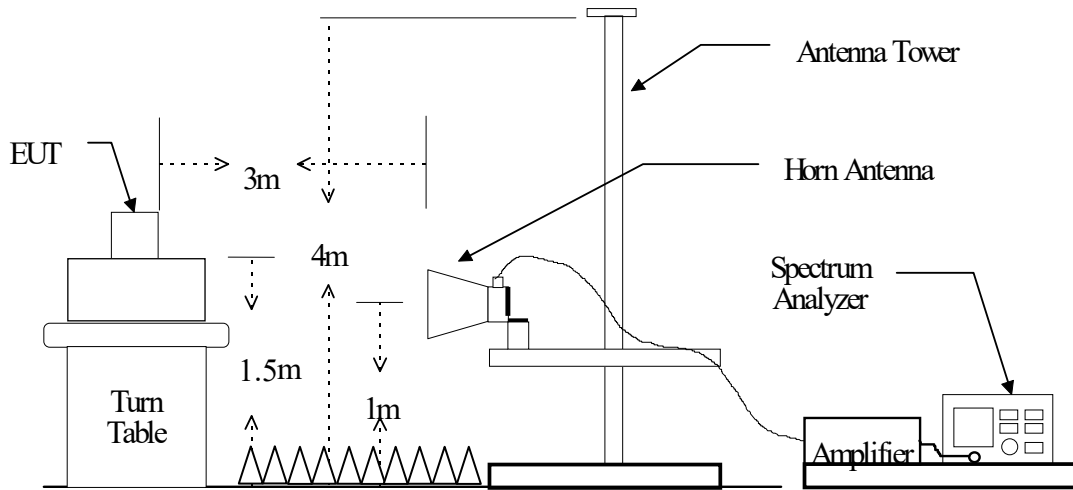

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESCI	2015/12/05	2016/12/04
Bi-Log Antenna	ETC	MCTD 2786	2016/07/15	2017/07/14
Log-periodic Antenna	EMCO	3146	2015/11/17	2016/11/16
Biconical Antenna	EMCO	3110	2015/11/17	2016/11/16
Horn Antenna	EMCO	3115	2015/10/08	2016/10/07
Horn Antenna	EMCO	3116	2015/10/12	2016/10/11
Horn Antenna	EMCO	3160	2015/10/12	2016/10/11
Spectrum	R&S	FSP3	2015/12/21	2016/12/20
Amplifier	HP	8447D	2015/12/17	2016/12/16
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06
Amplifier	HP	83051A	2016/07/18	2017/07/17
LOOP Antenna	EMCO	6512	2015/10/01	2016/09/30

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)


Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW $\geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 RF Portion

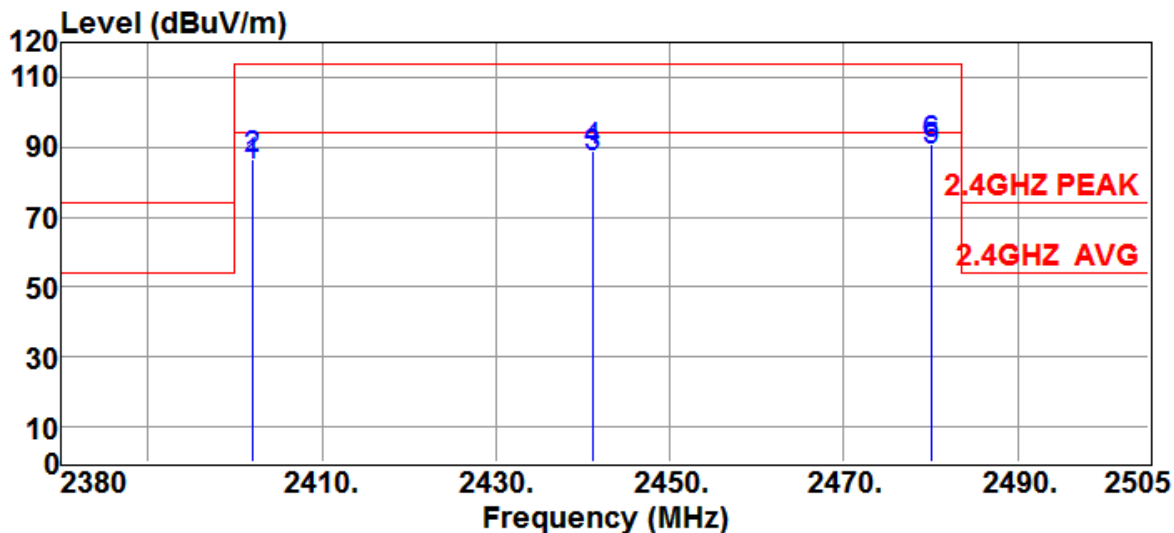


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Fundamental / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2402.0950	90.8	-6.0	84.8	94.0	-9.2	Average
2402.0950	92.6	-6.0	86.6	114.0	-27.4	Peak
2441.0910	92.8	-6.0	86.8	94.0	-7.2	Average
2441.0910	95.0	-6.0	89.0	114.0	-25.0	Peak
2480.0920	94.7	-5.8	88.9	94.0	-5.1	Average
2480.0920	96.7	-5.8	90.9	114.0	-23.1	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

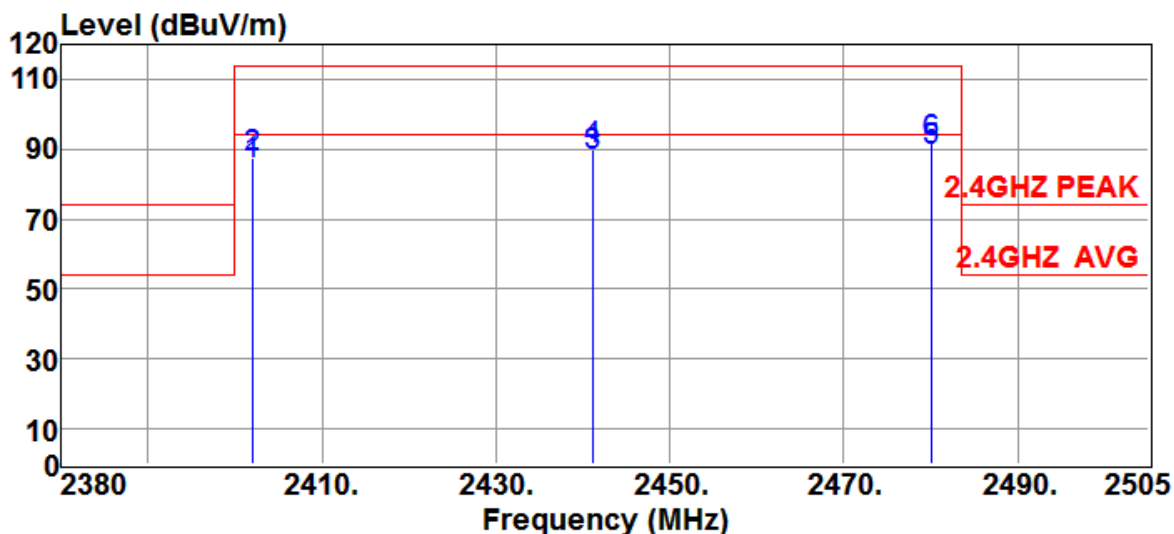


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Fundamental / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2402.0960	91.5	-6.0	85.5	94.0	-8.5	Average
2402.0960	93.7	-6.0	87.7	114.0	-26.3	Peak
2441.0960	93.8	-6.0	87.8	94.0	-6.2	Average
2441.0960	95.7	-6.0	89.7	114.0	-24.3	Peak
2480.0970	95.4	-5.8	89.6	94.0	-4.4	Average
2480.0970	97.6	-5.8	91.8	114.0	-22.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

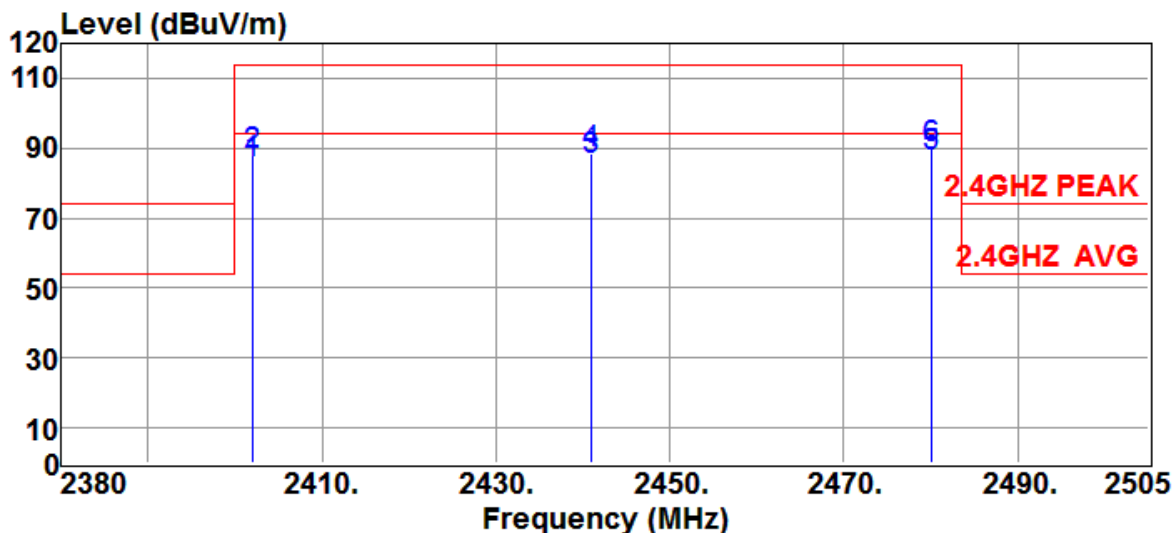


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Fundamental / EDR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2402.0250	92.0	-6.3	85.7	94.0	-8.3	Average
2402.0250	94.1	-6.3	87.8	114.0	-26.2	Peak
2441.0390	93.0	-6.3	86.7	94.0	-7.3	Average
2441.0390	94.8	-6.3	88.5	114.0	-25.5	Peak
2480.0780	93.7	-6.1	87.6	94.0	-6.4	Average
2480.0780	95.8	-6.1	89.7	114.0	-24.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

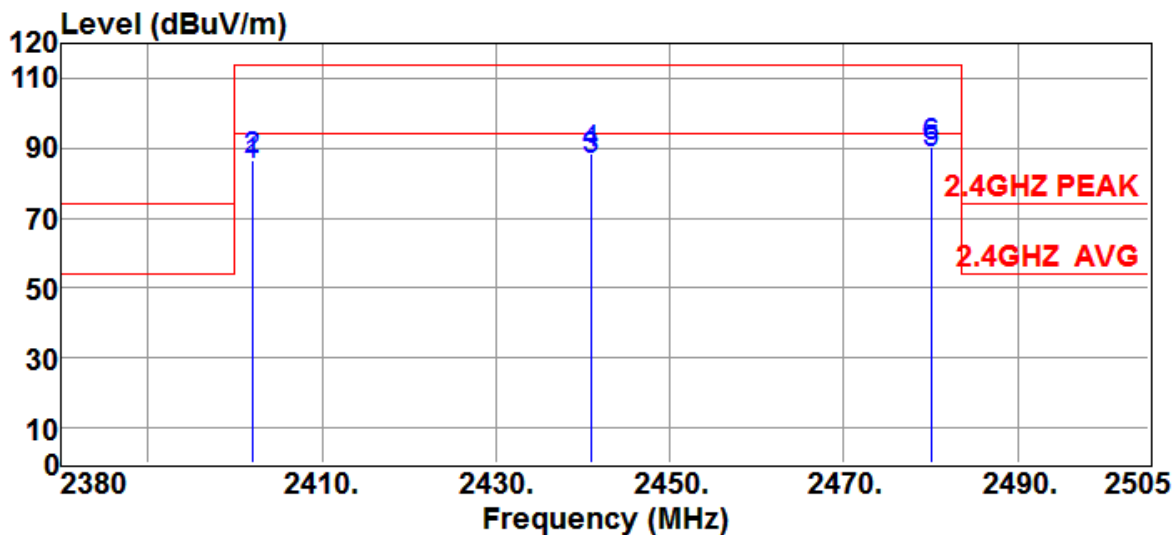


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Fundamental / EDR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
2402.0250	91.2	-6.3	84.9	94.0	-9.1	Average
2402.0250	93.0	-6.3	86.7	114.0	-27.3	Peak
2441.0380	93.0	-6.3	86.7	94.0	-7.3	Average
2441.0380	94.9	-6.3	88.6	114.0	-25.4	Peak
2480.0780	94.8	-6.1	88.7	94.0	-5.3	Average
2480.0780	96.7	-6.1	90.6	114.0	-23.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

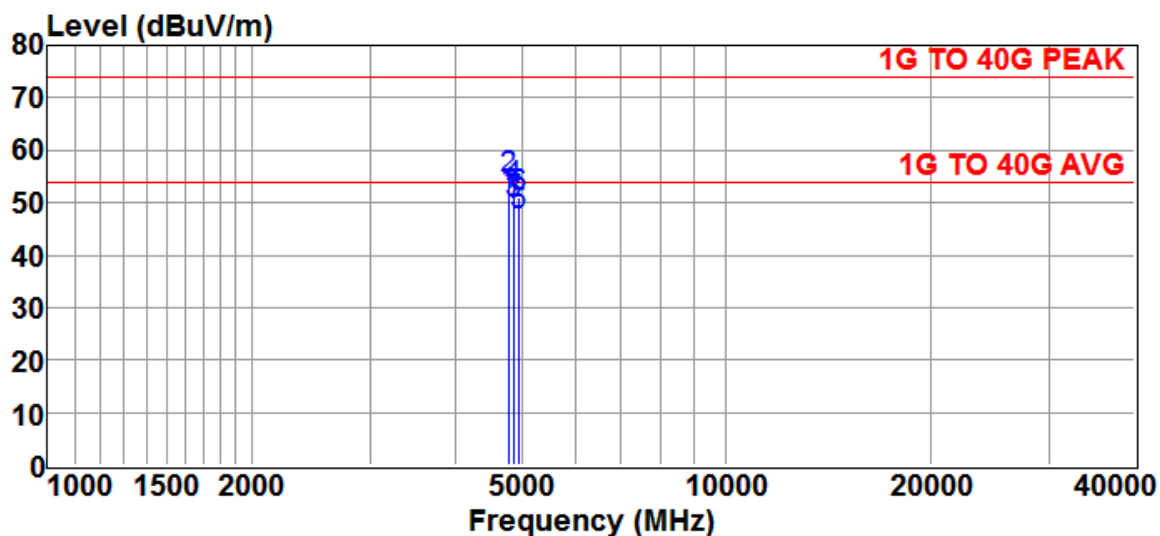


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Harmonics / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
4804.1900	50.6	0.8	51.4	54.0	-2.6	Average
4804.1900	53.8	0.8	54.6	74.0	-19.4	Peak
4882.1820	48.7	0.9	49.6	54.0	-4.4	Average
4882.1820	51.8	0.9	52.7	74.0	-21.3	Peak
4960.1840	46.3	1.3	47.6	54.0	-6.4	Average
4960.1840	49.6	1.3	50.9	74.0	-23.1	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

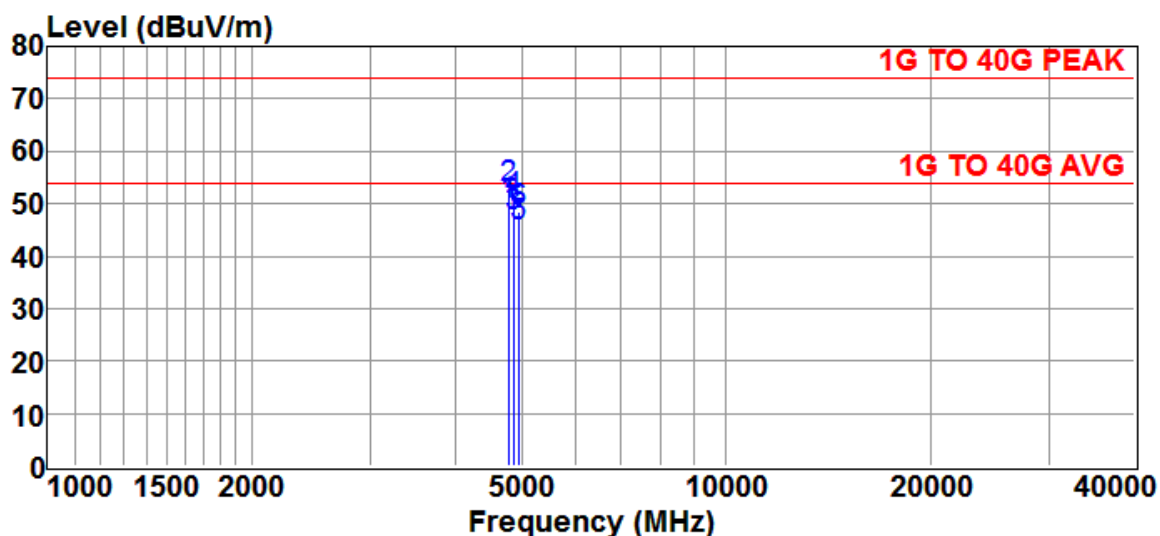


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Harmonics / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz,2441MHz,2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4804.1900	48.9	0.8	49.7	54.0	-4.3	Average
4804.1900	52.1	0.8	52.9	74.0	-21.1	Peak
4882.1820	46.6	0.9	47.5	54.0	-6.5	Average
4882.1820	49.7	0.9	50.6	74.0	-23.4	Peak
4960.1840	44.4	1.3	45.7	54.0	-8.3	Average
4960.1840	47.3	1.3	48.6	74.0	-25.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

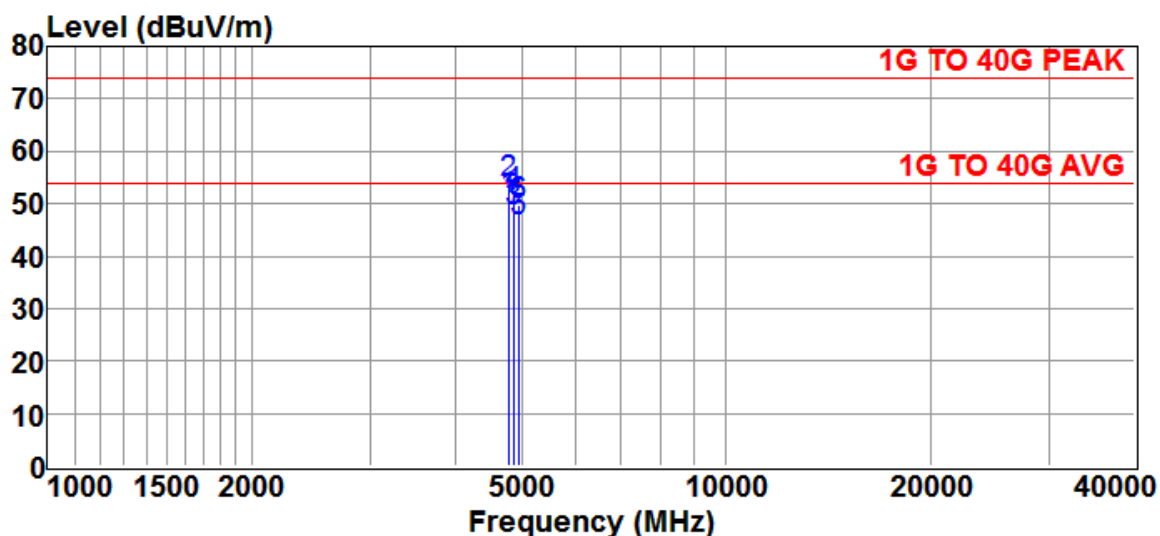


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Harmonics / EDR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dB μ V	Correction Factor dB	Result dB μ V/m	Limits dB μ V/m	Over limit dB	Detector
4804.0500	49.8	0.8	50.6	54.0	-3.4	Average
4804.0500	53.1	0.8	53.9	74.0	-20.1	Peak
4882.0780	47.5	0.9	48.4	54.0	-5.6	Average
4882.0780	50.7	0.9	51.6	74.0	-22.4	Peak
4960.1560	45.2	1.3	46.5	54.0	-7.5	Average
4960.1560	48.4	1.3	49.7	74.0	-24.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

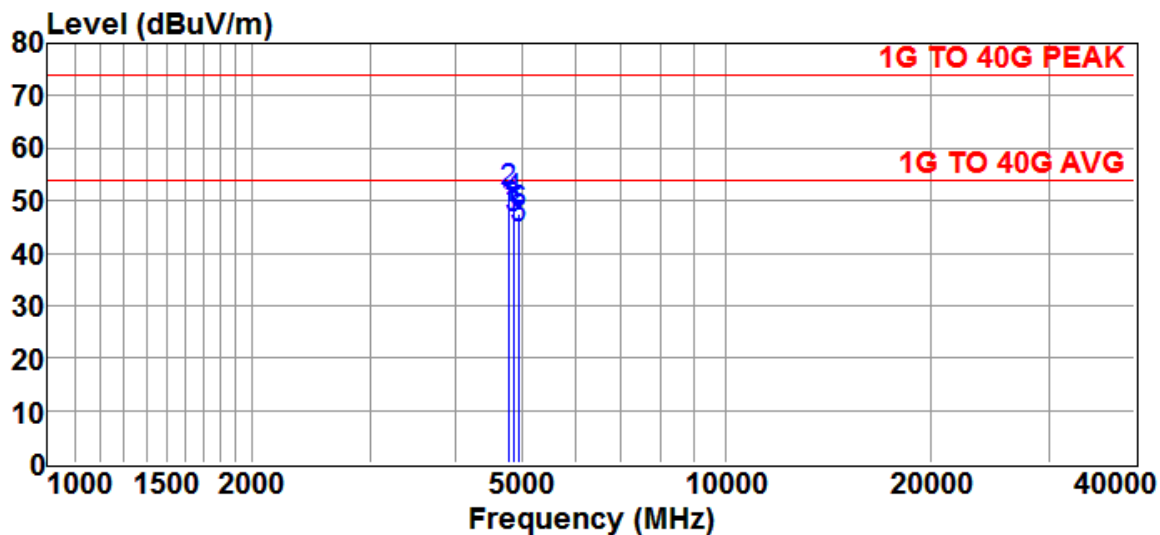


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Harmonics / EDR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
4804.0500	47.8	0.8	48.6	54.0	-5.4	Average
4804.0500	51.0	0.8	51.8	74.0	-22.2	Peak
4882.0780	45.6	0.9	46.5	54.0	-7.5	Average
4882.0780	48.8	0.9	49.7	74.0	-24.3	Peak
4960.1560	43.2	1.3	44.5	54.0	-9.5	Average
4960.1560	46.1	1.3	47.4	74.0	-26.6	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

4.4.2 Radiated Emissions in Restricted Bands

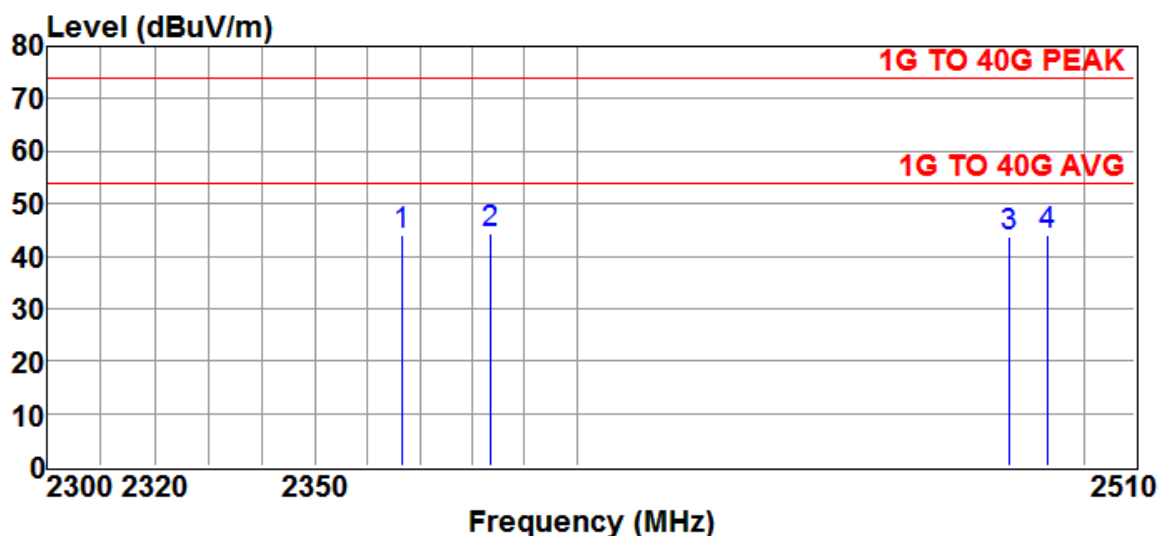


Site :Open Site #2 Date :2015-08-26
 EUT :WATERPROOF BLUETOOTH SPEAKER Ant. Pol. :HORIZONTAL
 Model :H200 Detector :
 Power Rating :From AC Adaptor(DC 5.0V) Engineer :Peter Liao
 Limit :1G TO 40G PEAK Temp. :26°C
 Memo :Restricted Bands / BR Humi. :58 %
 Memo :TX/RX:2402MHz, 2441MHz, 2480MHz

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2366.6000	50.3	-6.4	43.9	54.0	-10.1	Peak
2383.5000	50.7	-6.3	44.4	54.0	-9.6	Peak
2485.0000	49.9	-6.1	43.8	54.0	-10.2	Peak
2492.6000	50.1	-6.1	44.0	54.0	-10.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

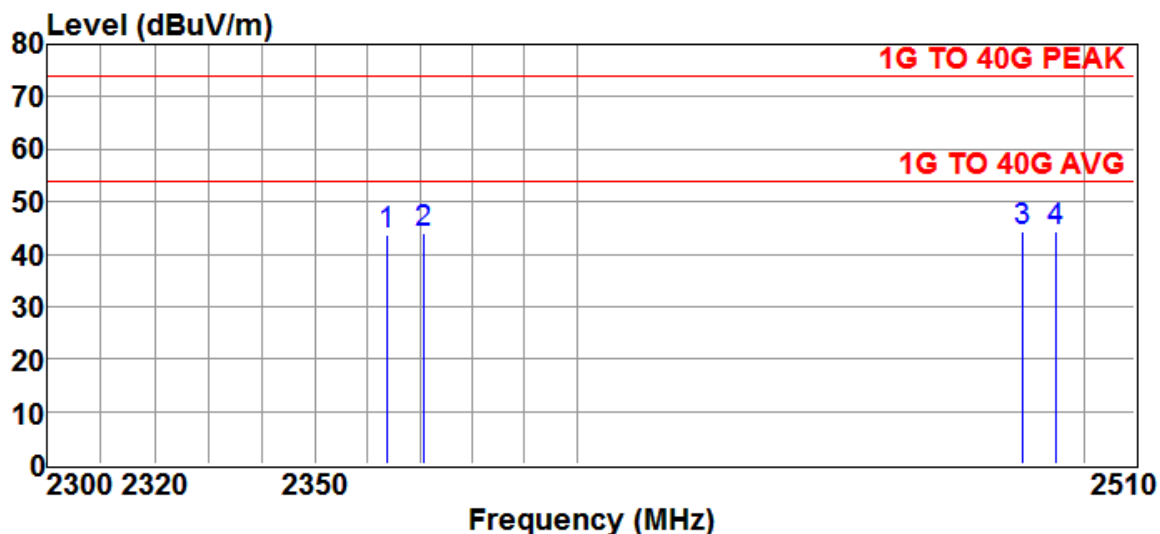


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Restricted Bands / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dB μ V	Correction Factor dB	Result dB μ V/m	Limits (AVG) dB μ V/m	Over limit dB	Detector
2363.6000	50.1	-6.4	43.7	54.0	-10.3	Peak
2370.6000	50.4	-6.3	44.1	54.0	-9.9	Peak
2487.5000	50.4	-6.1	44.3	54.0	-9.7	Peak
2494.2000	50.3	-6.1	44.2	54.0	-9.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

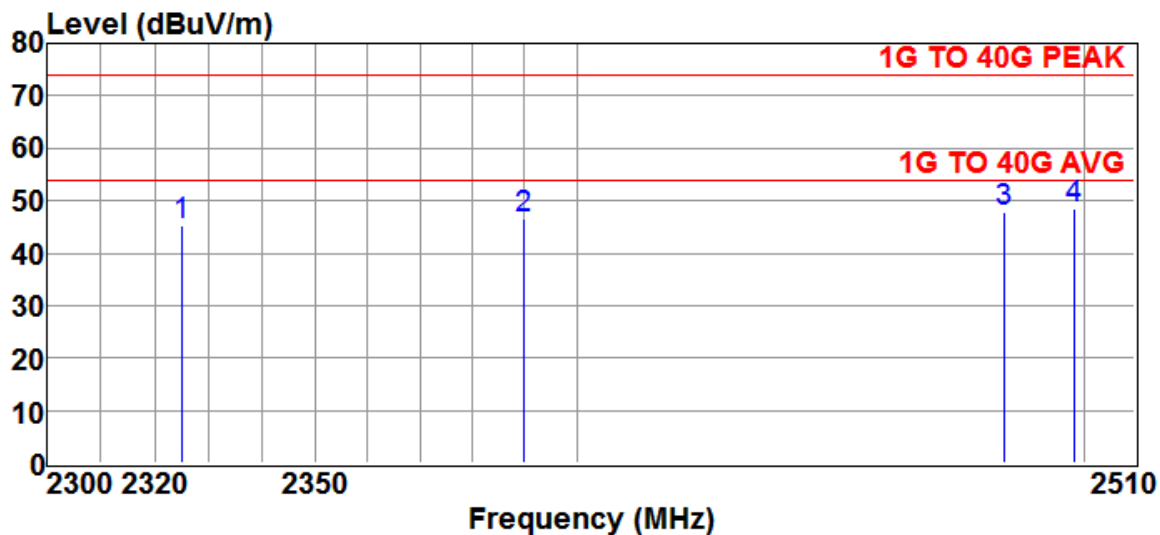


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Restricted Bands / EDR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
2325.0000	51.7	-6.4	45.3	54.0	-8.7	Peak
2390.0000	53.0	-6.3	46.7	54.0	-7.3	Peak
2484.0000	53.9	-6.1	47.8	54.0	-6.2	Peak
2498.0000	54.7	-6.1	48.6	54.0	-5.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

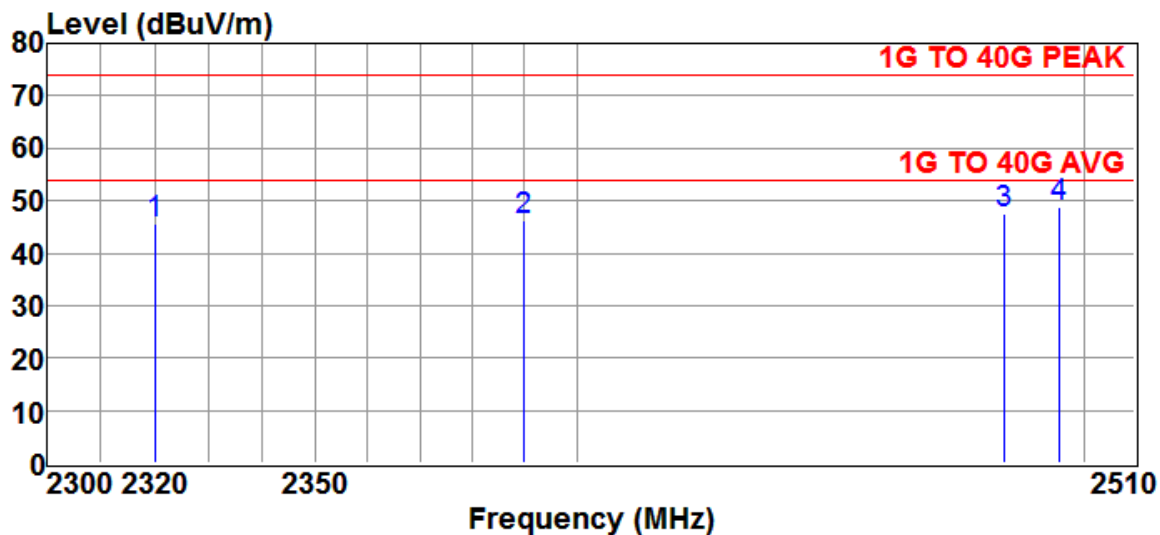

Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:1G TO 40G PEAK	Temp.	:26°C
Memo	:Restricted Bands / EDR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
2320.0000	52.1	-6.4	45.7	54.0	-8.3	Peak
2390.0000	52.6	-6.3	46.3	54.0	-7.7	Peak
2484.0000	53.7	-6.1	47.6	54.0	-6.4	Peak
2495.0000	55.0	-6.1	48.9	54.0	-5.1	Peak

Note :


1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.3 Other Emissions

a) Emission frequencies below 1 GHz

Operation Mode : Operation

Test Date : Aug. 25, 2016 Temperature : 31 °C Humidity : 61 %

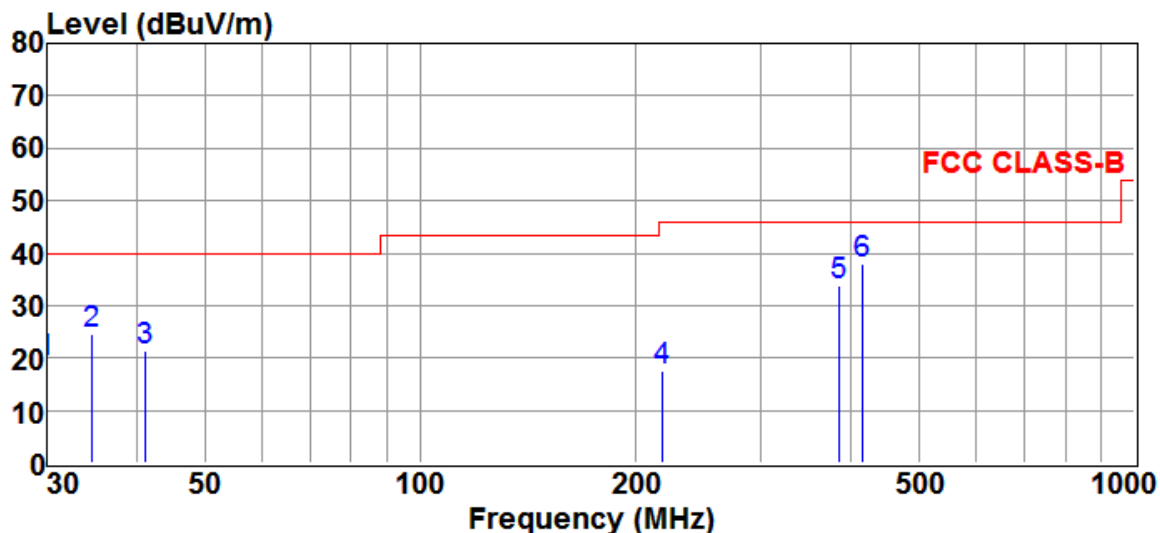


Site	:Open Site #2	Date	:2016-08-25
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:FCC CLASS-B	Temp.	:31°C
Memo	:Charging & BT Operation	Humi.	:61 %

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
30.0000	2.8	16.4	19.2	40.0	-20.8	QP
34.7600	10.0	14.4	24.4	40.0	-15.6	QP
41.1320	8.1	13.4	21.5	40.0	-18.5	QP
218.3080	-1.1	18.5	17.4	46.0	-28.6	QP
385.2800	14.8	18.9	33.7	46.0	-12.3	QP
416.1790	18.3	19.8	38.1	46.0	-7.9	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

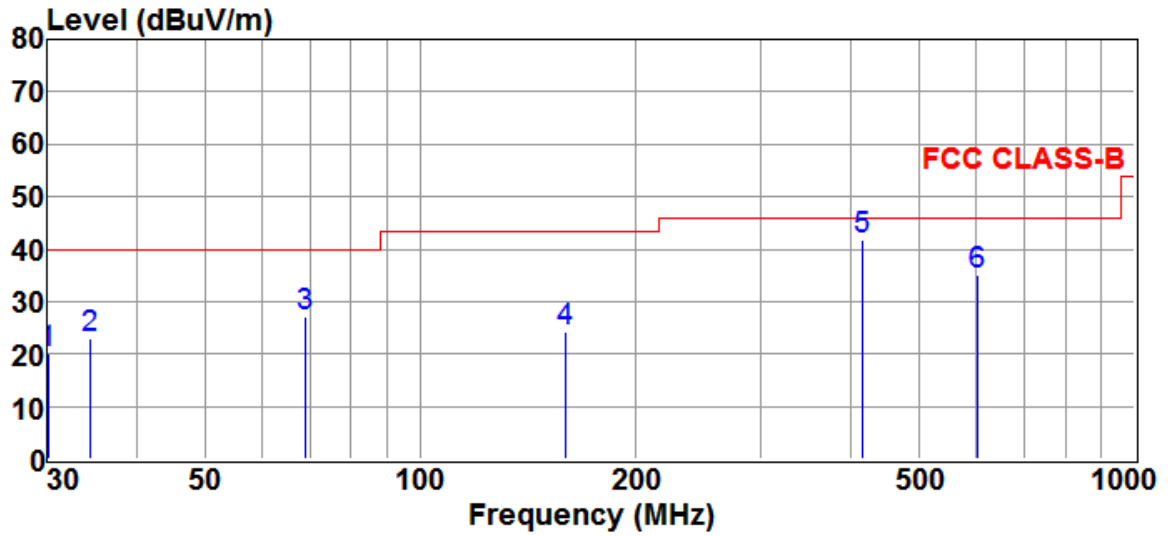


Site	:Open Site #2	Date	:2016-08-25
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:FCC CLASS-B	Temp.	:31°C
Memo	:Charging & BT Operation	Humi.	:61 %

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
30.2110	3.7	16.4	20.1	40.0	-19.9	QP
34.5170	8.6	14.4	23.0	40.0	-17.0	QP
69.1140	16.2	10.9	27.1	40.0	-12.9	QP
159.7840	9.9	14.2	24.1	43.5	-19.4	QP
416.1790	21.9	19.8	41.7	46.0	-4.3	QP
601.4270	11.7	23.3	35.0	46.0	-11.0	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

b) Emission frequencies above 1 GHz

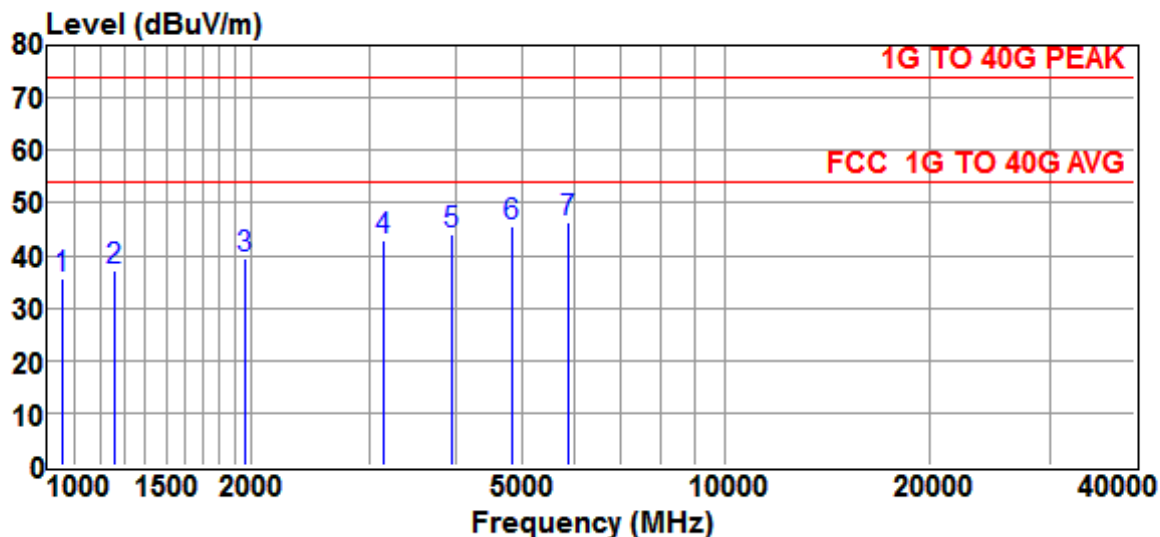


Site	:CHAMBER #2	Date	:2016-08-24
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:WATERPROOF BLUETOOTH SPEAKER	Model	:H200
Power Rating	:From AC Adaptor(DC 5.0V)	Temp.	:27°C
Engineer	:Peter Liao	Humi.	:58 %
Test Mode	:Charging & BT Operation		

Freq MHz	Reading dB μ V	Correction Factor dB	Result dB μ V/m	Limits (AVG) dB μ V/m	Over limit dB	Detector
1059.0120	48.3	-12.6	35.7	54.0	-18.3	Peak
1257.7760	48.4	-11.3	37.1	54.0	-16.9	Peak
1961.4840	46.3	-7.0	39.3	54.0	-14.7	Peak
3136.6100	46.3	-3.3	43.0	54.0	-11.0	Peak
3959.3160	44.7	-0.6	44.1	54.0	-9.9	Peak
4856.5670	44.6	1.0	45.6	54.0	-8.4	Peak
5872.3700	43.4	2.9	46.3	54.0	-7.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

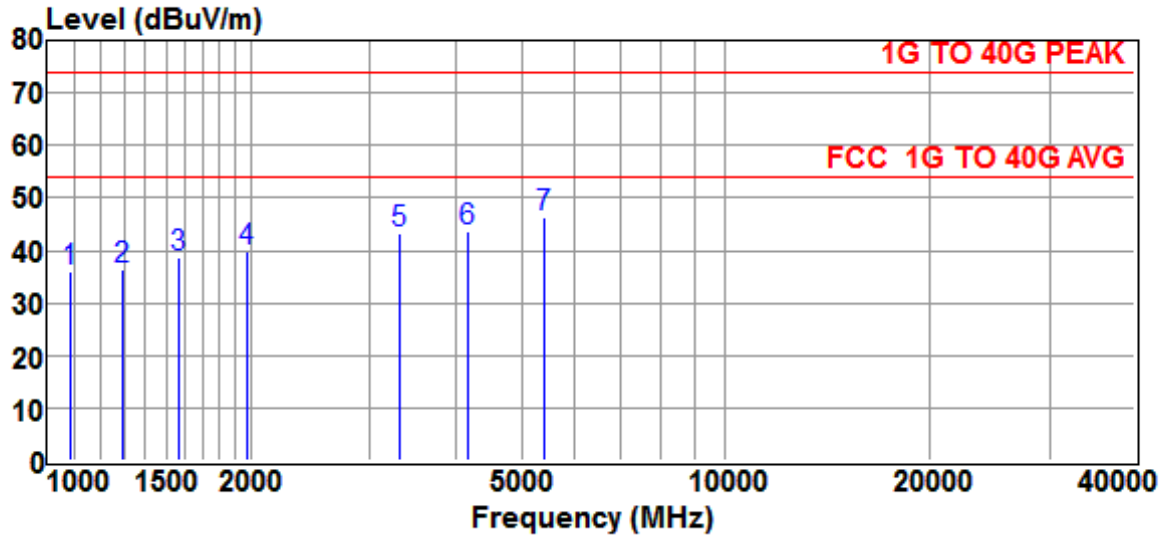

Site	:CHAMBER #2	Date	:2016-08-24
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:WATERPROOF BLUETOOTH SPEAKER	Model	:H200
Power Rating	:From AC Adaptor(DC 5.0V)	Temp.	:27°C
Engineer	:Peter Liao	Humi.	:58 %
Test Mode	:Charging & BT Operation		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
1085.9130	48.4	-12.4	36.0	54.0	-18.0	Peak
1299.0030	47.4	-11.1	36.3	54.0	-17.7	Peak
1570.7030	48.0	-9.4	38.6	54.0	-15.4	Peak
1968.5260	46.8	-7.0	39.8	54.0	-14.2	Peak
3309.8250	46.1	-2.7	43.4	54.0	-10.6	Peak
4163.0190	44.2	-0.4	43.8	54.0	-10.2	Peak
5388.4290	43.9	2.4	46.3	54.0	-7.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\mathbf{Result = Reading + Corrected Factor}$$

where Corrected Factor



$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

(Below 1GHz)



(Above 1GHz)

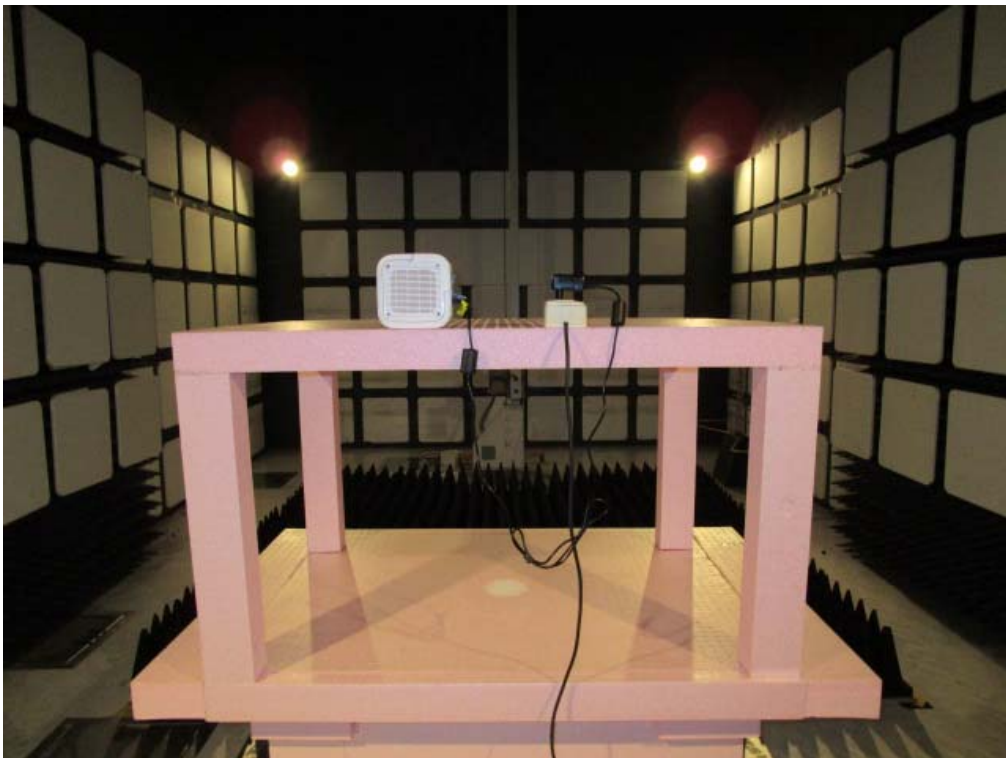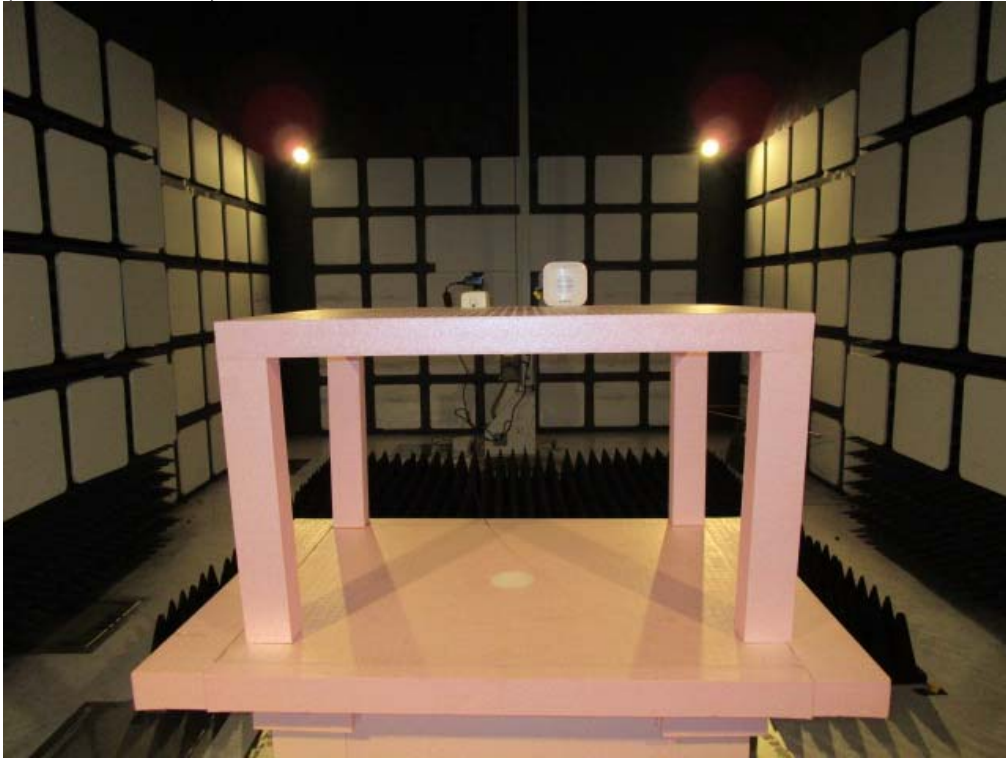


5 CONDUCTED EMISSION MEASUREMENT

5.1 Standard Applicable


For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively. Both Limits are identical specification.

5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then records the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

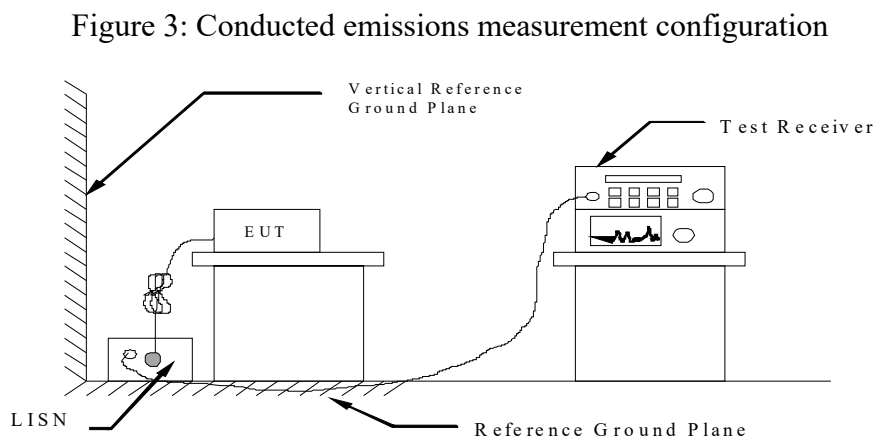

5.3 Conducted Emission Data

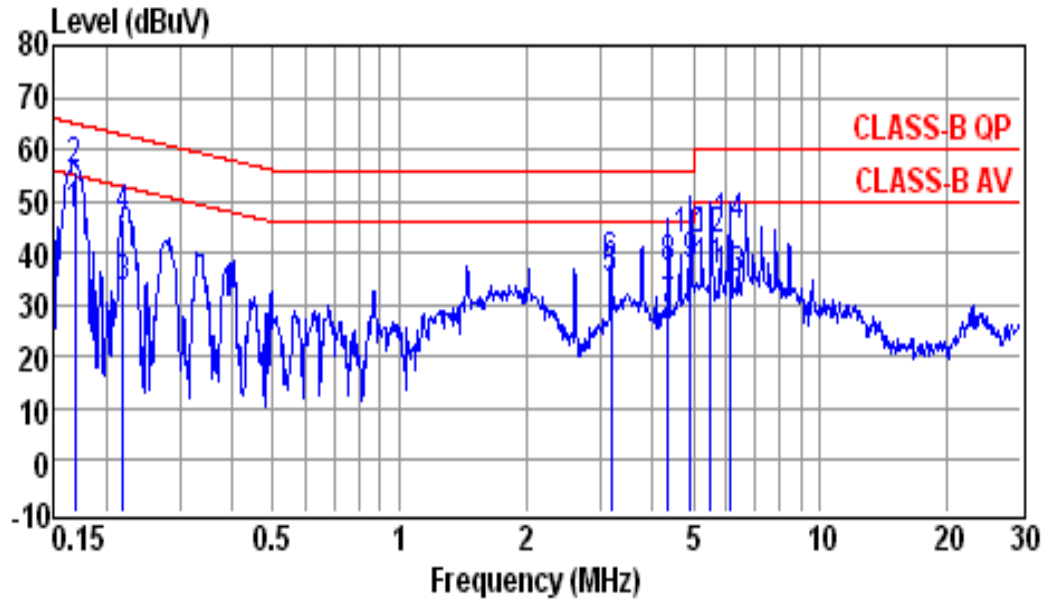


Site : conducted #1 Date : 08-23-2016
 Condition : CLASS-B QP LISN : NEUTRAL
 Tem / Hum : 27 °C / 58%
 Test Mode : Charging & BT Operation
 EUT : WATERPROOF BLUETOOTH SPEAKER
 Power Rating : 120VAC/60Hz

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1685	36.80	10.15	46.95	55.03	-8.08	Average
0.1685	45.40	10.15	55.55	65.03	-9.48	QP
0.2197	22.97	10.15	33.12	52.83	-19.71	Average
0.2197	36.40	10.15	46.55	62.83	-16.28	QP
3.1900	24.27	10.30	34.57	46.00	-11.43	Average
3.1900	27.30	10.30	37.60	56.00	-18.40	QP
4.3610	18.51	10.34	28.85	46.00	-17.15	Average
4.3610	26.49	10.34	36.83	56.00	-19.17	QP
4.9260	26.89	10.37	37.26	46.00	-8.74	Average
4.9260	31.71	10.37	42.08	56.00	-13.92	QP
5.5050	25.88	10.39	36.27	50.00	-13.73	Average
5.5050	31.67	10.39	42.06	60.00	-17.94	QP
6.0890	24.43	10.41	34.84	50.00	-15.16	Average
6.0890	34.67	10.41	45.08	60.00	-14.92	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

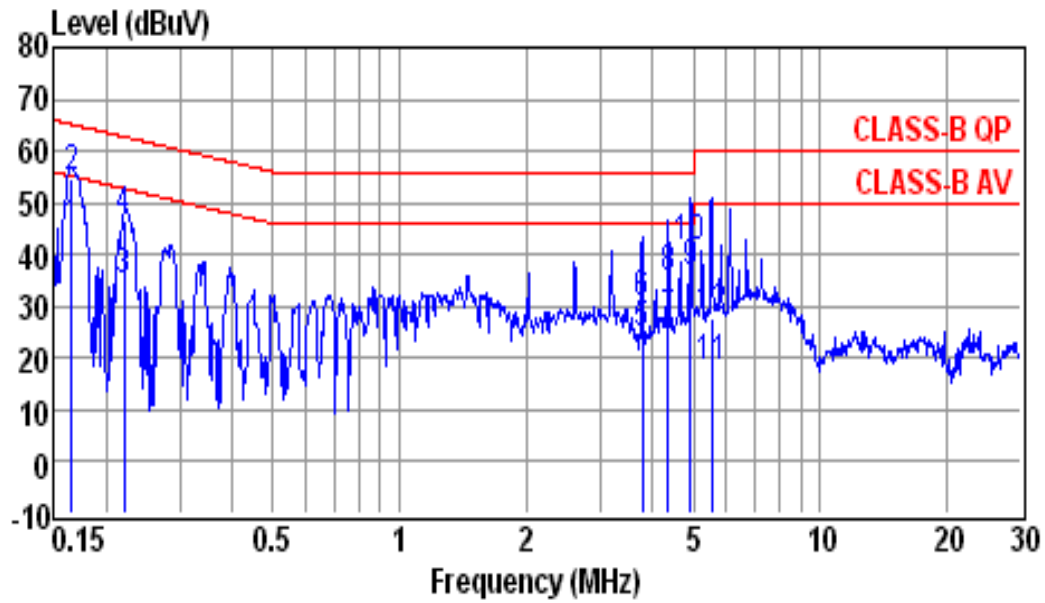

Site : conducted #1 Date : 08-23-2016
 Condition : CLASS-B QP LISN : LINE
 Tem / Hum : 27 °C / 58%
 Test Mode : Charging & BT Operation
 EUT : WATERPROOF BLUETOOTH SPEAKER
 Power Rating : 120VAC/60Hz

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1659	34.28	10.15	44.43	55.16	-10.73	Average
0.1659	44.71	10.15	54.86	65.16	-10.30	QP
0.2208	24.45	10.16	34.61	52.79	-18.18	Average
0.2208	36.65	10.16	46.81	62.79	-15.98	QP
3.7790	14.20	10.32	24.52	46.00	-21.48	Average
3.7790	20.21	10.32	30.53	56.00	-25.47	QP
4.3610	16.09	10.35	26.44	46.00	-19.56	Average
4.3610	24.85	10.35	35.20	56.00	-20.80	QP
4.9260	25.87	10.38	36.25	46.00	-9.75	Average
4.9260	30.78	10.38	41.16	56.00	-14.84	QP
5.5350	7.71	10.41	18.12	50.00	-31.88	Average
5.5350	17.47	10.41	27.88	60.00	-32.12	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB}\mu\text{V}$$

$$\begin{aligned} \text{Level in } \mu\text{V} &= \text{Common Antilogarithm}[(22.6 \text{ dB}\mu\text{V})/20] \\ &= 13.48 \mu\text{V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipments are used during the conducted test.

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2015/12/05	2016/12/04
LISN	EMCO	3625/2	2015/10/28	2016/10/26
LISN	Rohde & Schwarz	ESH2-Z5	2016/05/05	2017/05/04

5.6 Photos of Conduction Measuring Setup



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

The antenna is integrated on the device. No consideration of replacement. Please refer to the construction Photo for details.

7 BAND EDGES MEASUREMENT

7.1 Standard Applicable

According to 15.249(d), out band emission except for harmonics shall be comply with §15.209 or at least attenuated by 50 dB below the level of the fundamental.

7.2 Measurement Procedure

A) 50 dB attenuation method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

B) Radiated Emission method

1. Following the measurement procedures in section 4.2 with the EUT set to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
2. Measure the highest amplitude appearing on spectral displayed.
3. Repeat above procedures until all measured frequencies were complete.

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW \geq 1/T, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

7.3 Measurement Equipment

A) 50 dB attenuation method

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06

B) Radiated Emission method


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESCI	2015/12/05	2016/12/04
Bi-Log Antenna	ETC	MCTD 2786	2016/07/15	2017/07/14
Log-periodic Antenna	EMCO	3146	2015/11/17	2016/11/16
Biconical Antenna	EMCO	3110	2015/11/17	2016/11/16
Horn Antenna	EMCO	3115	2015/10/08	2016/10/07
Horn Antenna	EMCO	3116	2015/10/12	2016/10/11
Horn Antenna	EMCO	3160	2015/10/12	2016/10/11
Spectrum	R&S	FSP3	2015/12/21	2016/12/20
Amplifier	HP	8447D	2015/12/17	2016/12/16
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06
Amplifier	HP	83051A	2016/07/18	2017/07/17
LOOP Antenna	EMCO	6512	2015/10/01	2016/09/30

7.4 Measurement Data

Test Result: (Radiated Emission method)

The radiated emission test results of the lower and the upper band edges were comply with §15.209. Please refer to the following pages for test results.

Radiated Emission Test Results of the Band Edges

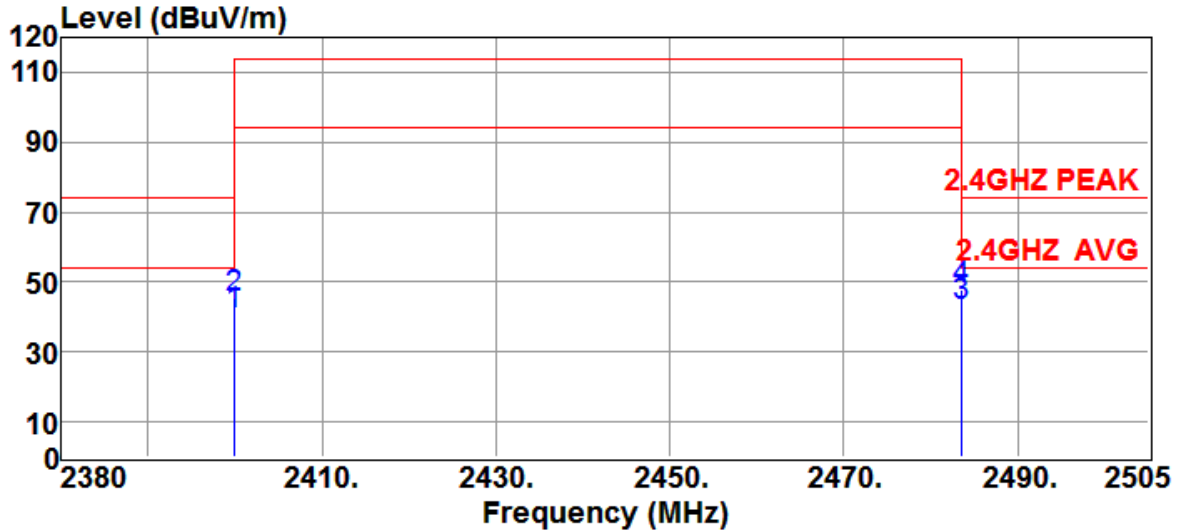


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Band edge / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2400.0000	46.8	-6.0	40.8	54.0	-13.2	Average
2400.0000	51.6	-6.0	45.6	74.0	-28.4	Peak
2483.5000	48.7	-5.8	42.9	54.0	-11.1	Average
2483.5000	53.4	-5.8	47.6	74.0	-26.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

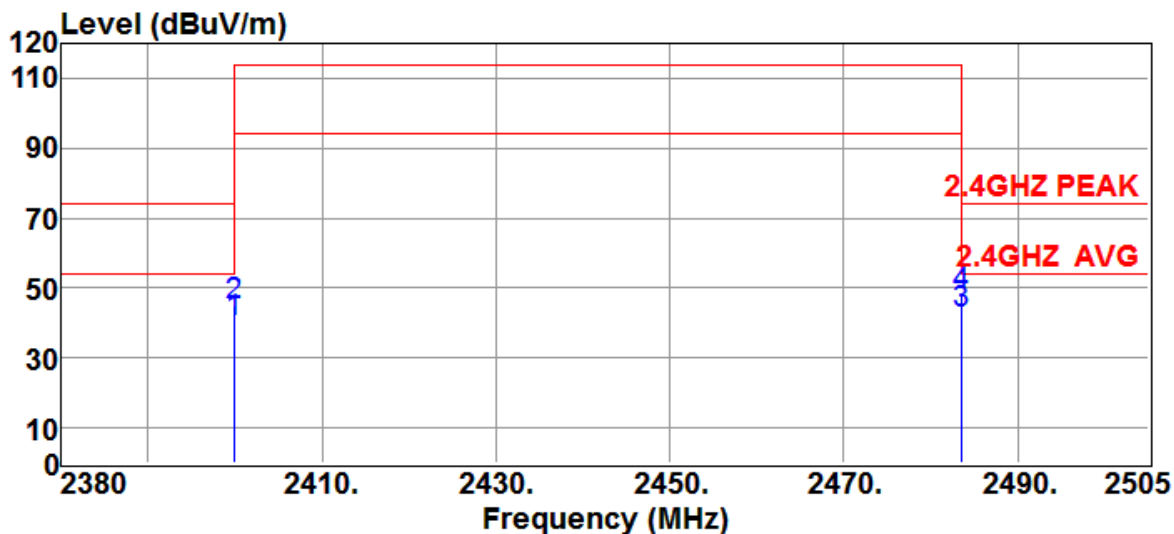


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Band edge / BR	Humi.	:58 %
Memo	:TX/RX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dB μ V	Correction Factor dB	Result dB μ V/m	Limits dB μ V/m	Over limit dB	Detector
2400.0000	46.1	-6.0	40.1	54.0	-13.9	Average
2400.0000	50.9	-6.0	44.9	74.0	-29.1	Peak
2483.5000	48.4	-5.8	42.6	54.0	-11.4	Average
2483.5000	53.6	-5.8	47.8	74.0	-26.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

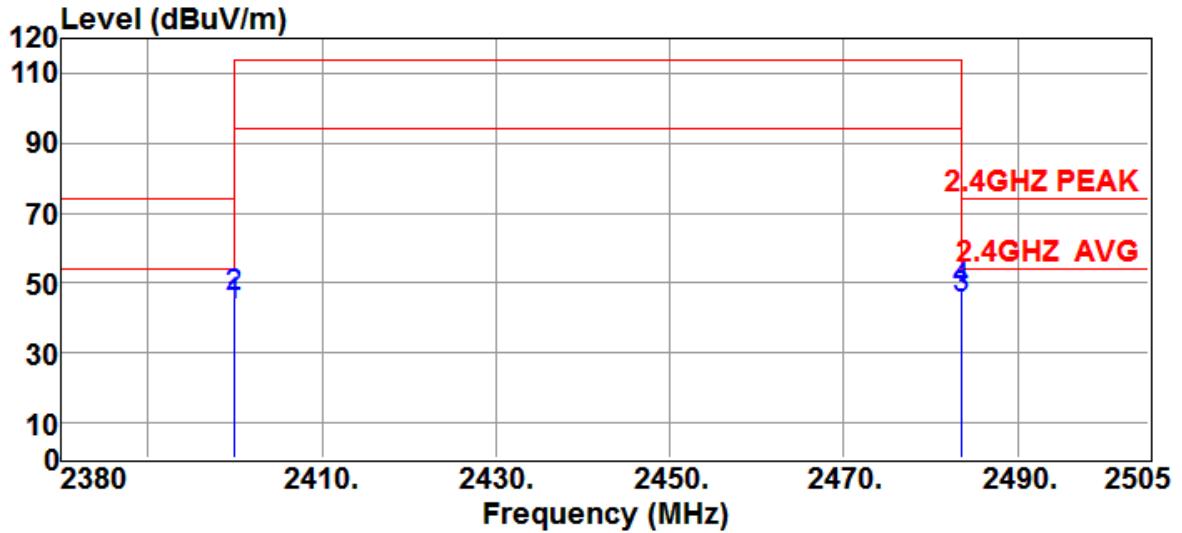


Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:HORIZONTAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Band edge / EDR	Humi.	:58 %
Memo	:TX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2400.0000	49.9	-6.3	43.6	54.0	-10.4	Average
2400.0000	52.1	-6.3	45.8	74.0	-28.2	Peak
2483.5000	51.7	-6.1	45.6	54.0	-8.4	Average
2483.5000	54.0	-6.1	47.9	74.0	-26.1	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

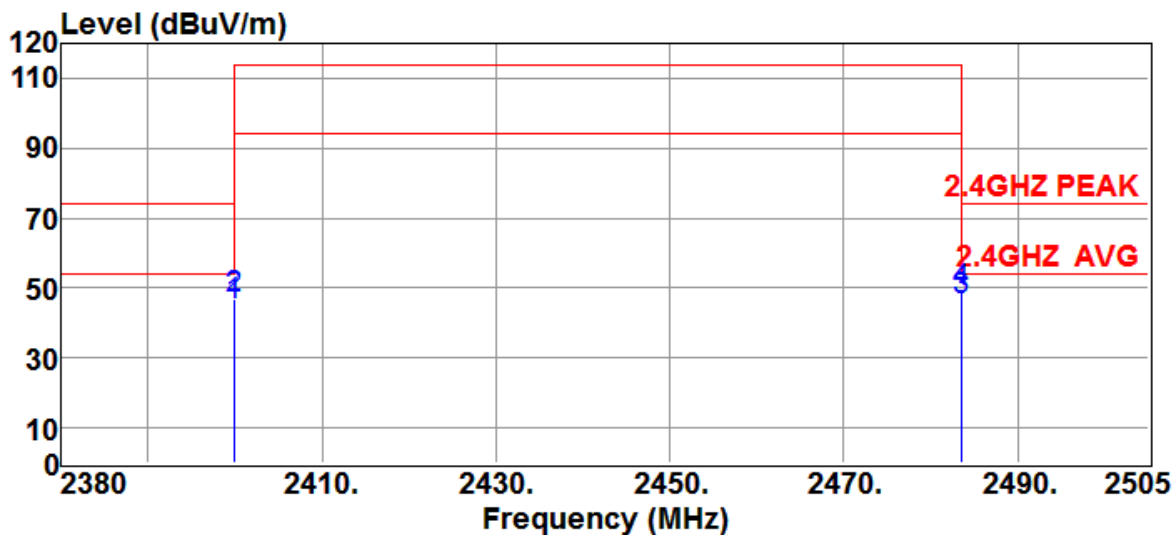

Site	:Open Site #2	Date	:2016-08-26
EUT	:WATERPROOF BLUETOOTH SPEAKER	Ant. Pol.	:VERTICAL
Model	:H200	Detector	:
Power Rating	:From AC Adaptor(DC 5.0V)	Engineer	:Peter Liao
Limit	:2.4GHZ PEAK	Temp.	:26°C
Memo	:Band edge / EDR	Humi.	:58 %
Memo	:TX:2402MHz, 2441MHz, 2480MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
2400.0000	51.1	-6.3	44.8	54.0	-9.2	Average
2400.0000	53.2	-6.3	46.9	74.0	-27.1	Peak
2483.5000	52.6	-6.1	46.5	54.0	-7.5	Average
2483.5000	54.9	-6.1	48.8	74.0	-25.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

8. DUTY CYCLE

8.1 Standard Applicable

None. Reference only.

8.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13

8.3 Measurement Data

Test Date : Aug. 26, 2016 Temperature : 26 °C Humidity : 53 %

Duty Cycle Calculation

Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
BR / DH5	3.76	3.00	79.8	0.333	1
EDR / DH5	3.76	3.00	79.8	0.333	1


Note:

1. DH5 has the highest duty cycle worst case and is reported.
2. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Refer to the following page for data plots.

BR / DH5

Period

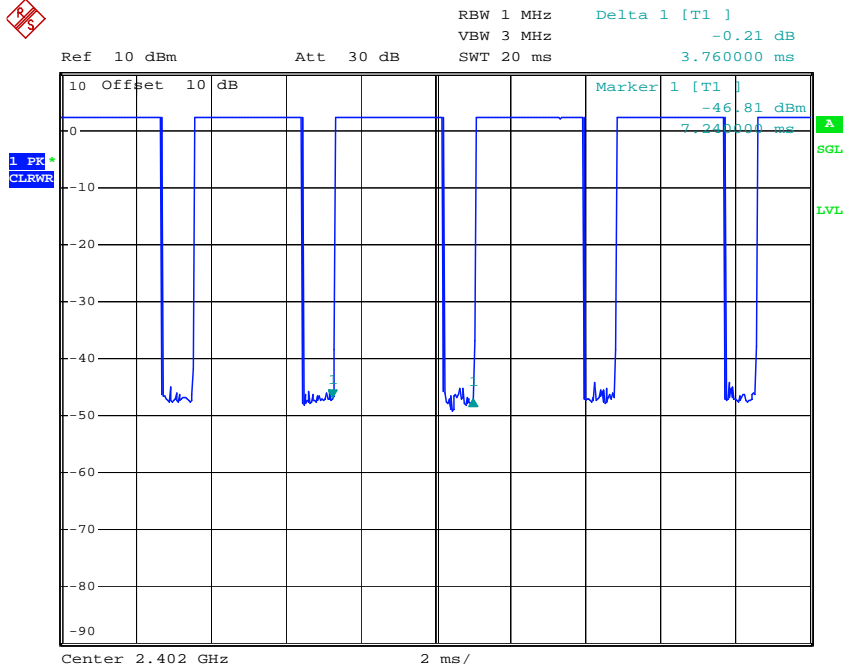


Transmission duration (T)

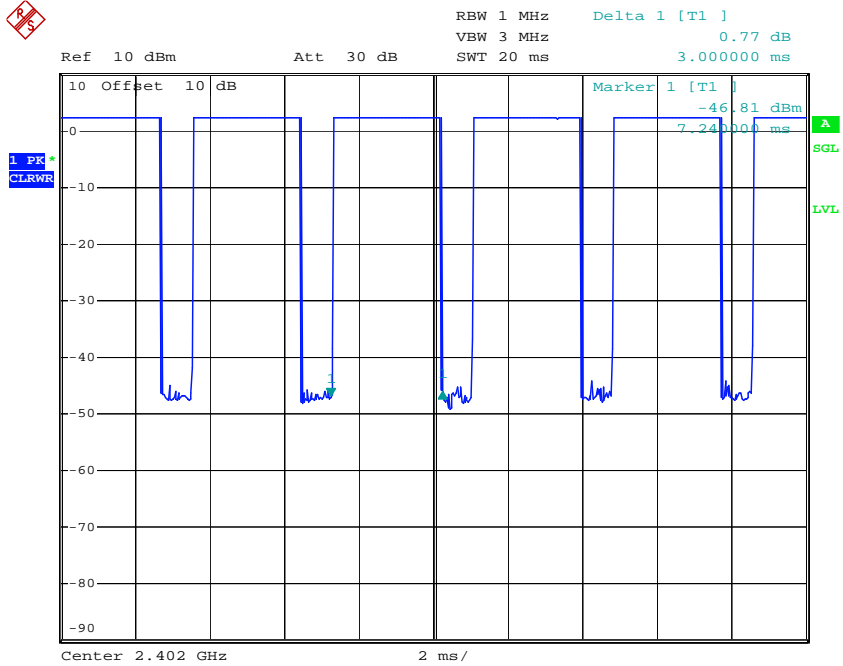


EDR / DH5

Period

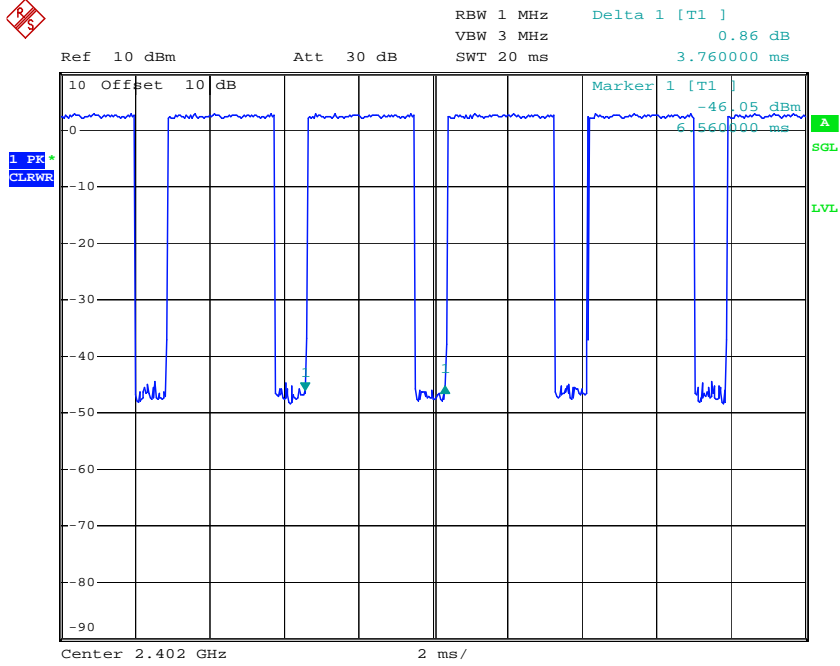

Transmission duration (T)

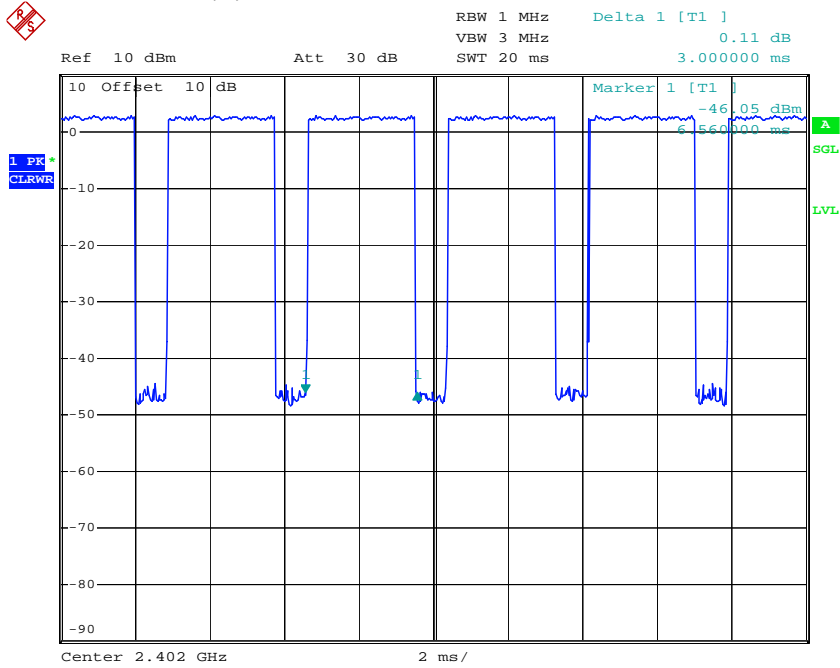

9. BANDWIDTH OF EMISSION

9.1 Applicable Standard

Per FCC rule §15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. The settings of spectrum analyzer is as followings.
 - 1) Set RBW in the range of 1% to 5% of the OBW.
 - 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - 3) Detector = Peak.
 - 4) Trace mode = max hold.
 - 5) Sweep = auto couple.
 - 6) Allow the trace to stabilize.
 - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. Alternatively, use the -20 dB bandwidth function of the spectrum analyzer.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13

9.4 Measurement Data


Test Date : Aug. 26, 2016 Temperature : 26 °C Humidity : 53 %

- a) Lower Band Edge : The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.
- b) Upper Band Edge : The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

BR


Lower band edge / -20dB BW plot of the lowest channel

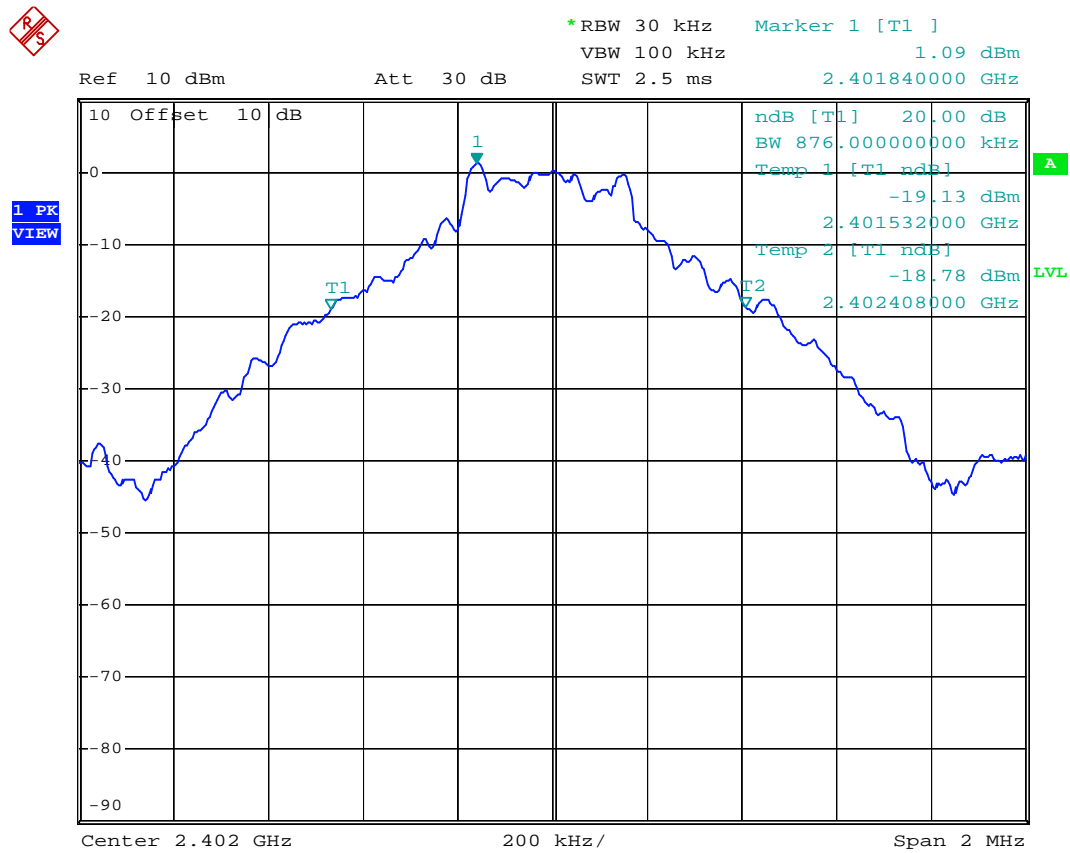

According to 15.215(c), the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

BR


Middle band edge / -20dB BW plot of the lowest channel

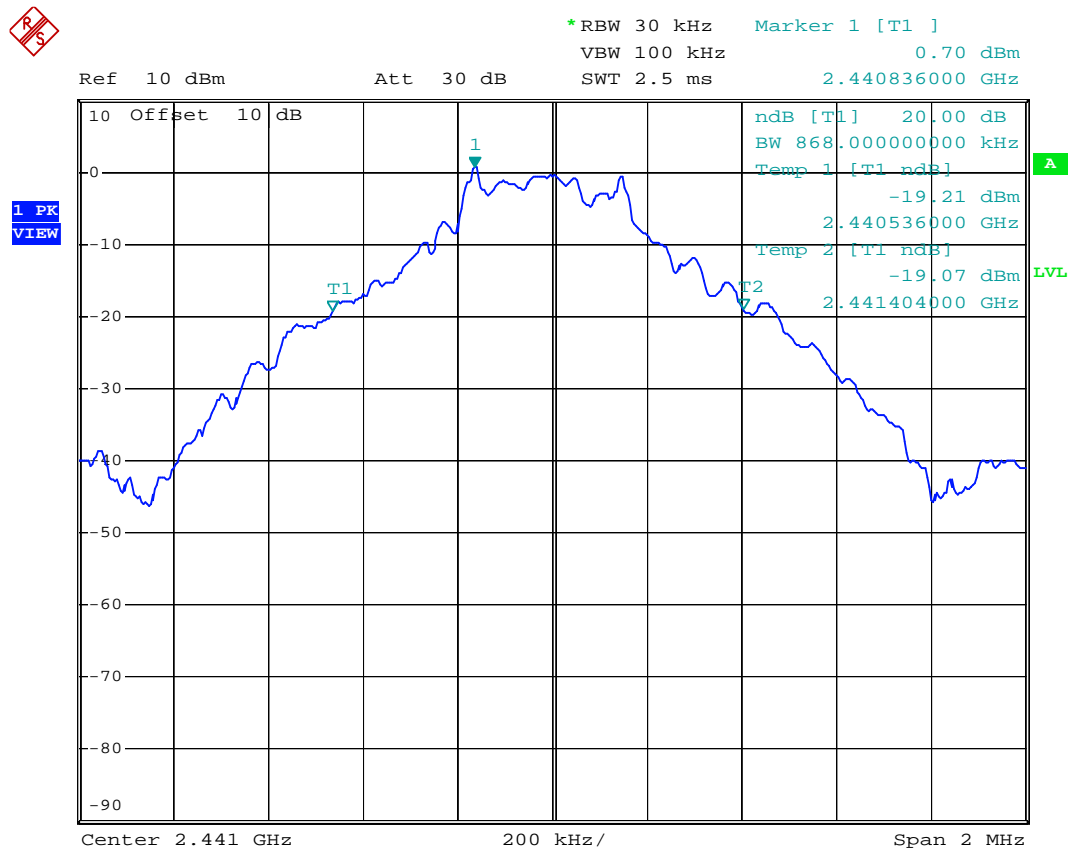

According to 15.215(c), the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

BR


Upper band edge / -20dB BW plot of the highest channel

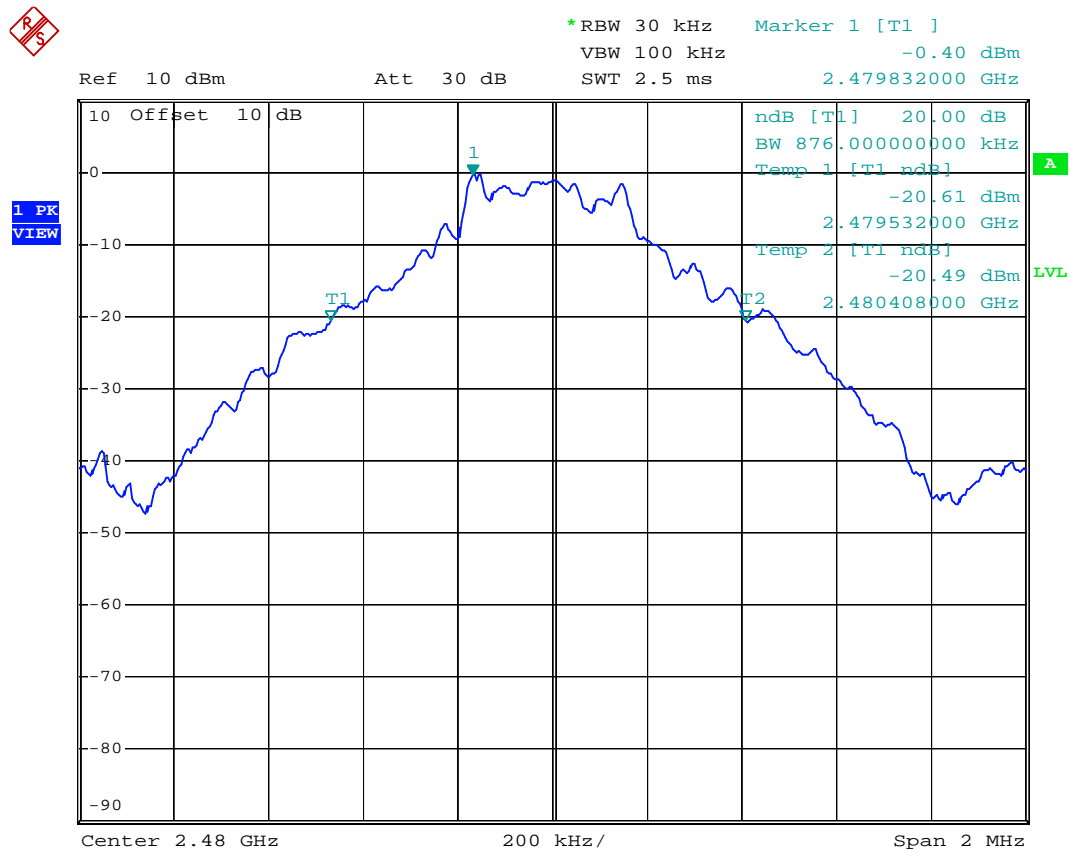

According to 15.215(c), the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

EDR


Lower band edge / -20dB BW plot of the lowest channel

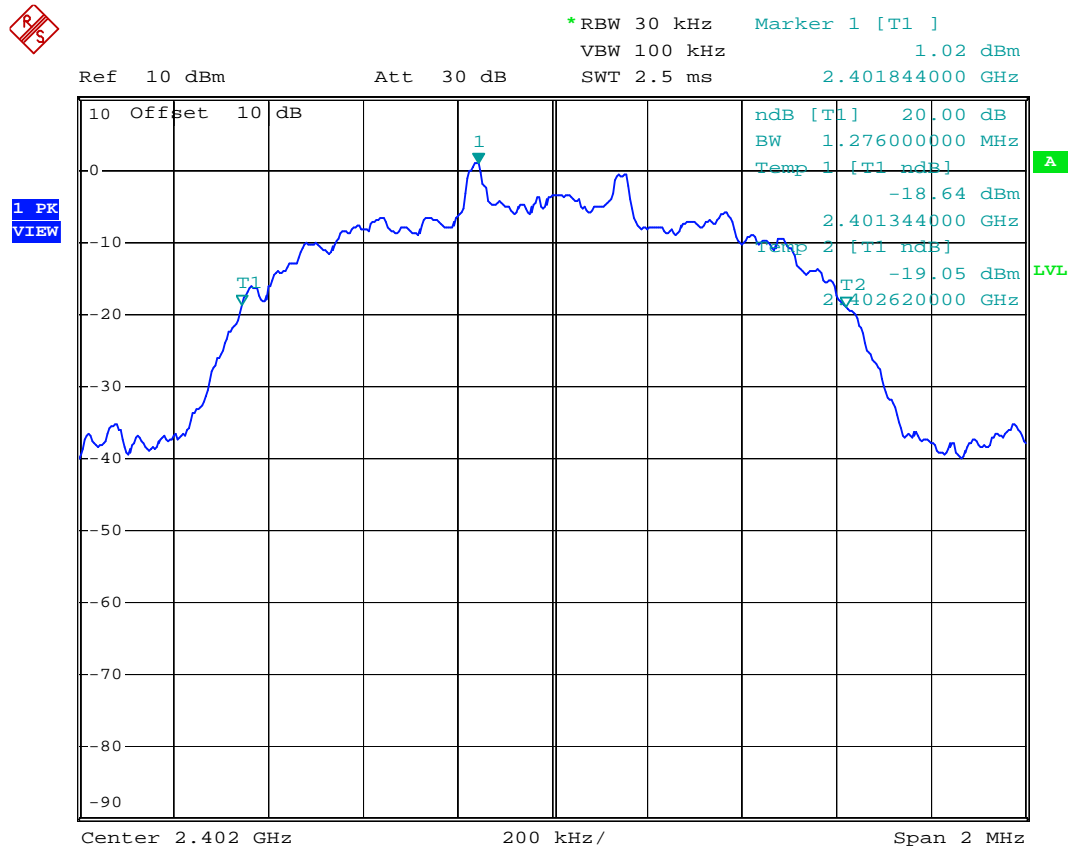

According to 15.215(c), the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

EDR


Middle band edge / -20dB BW plot of the lowest channel

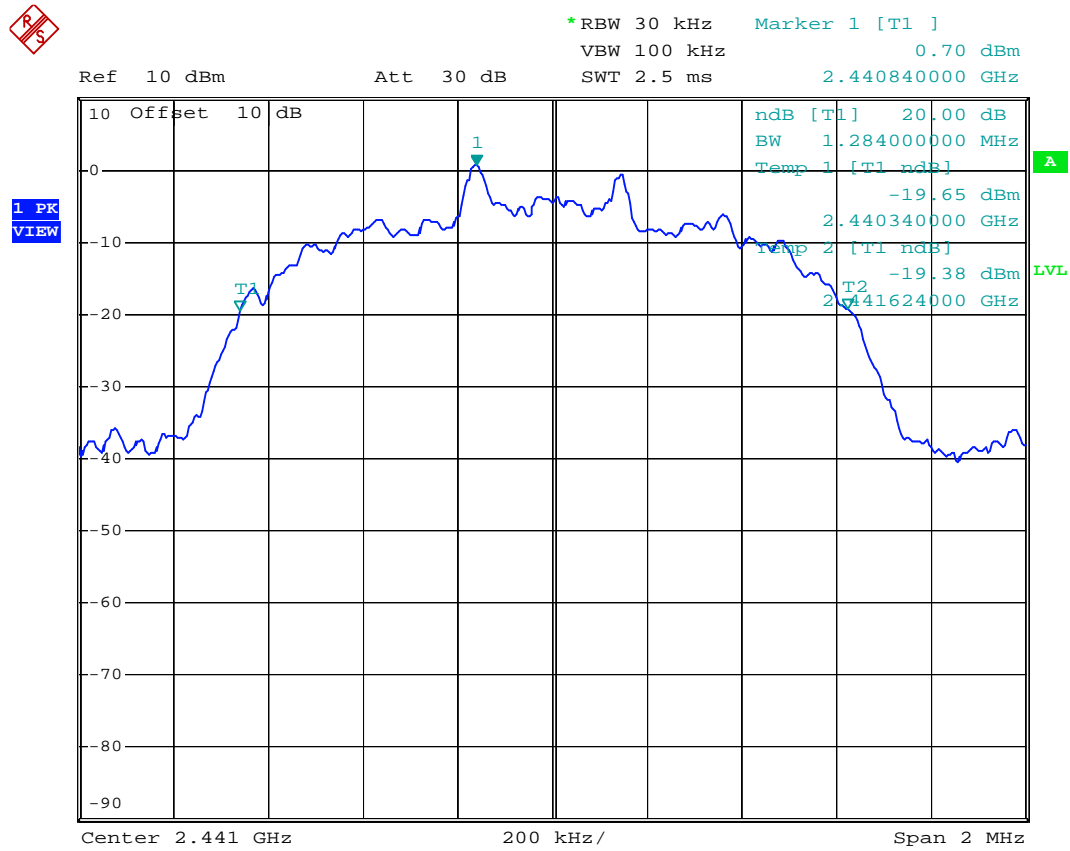

According to 15.215(c), the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

EDR

Upper band edge / -20dB BW plot of the highest channel

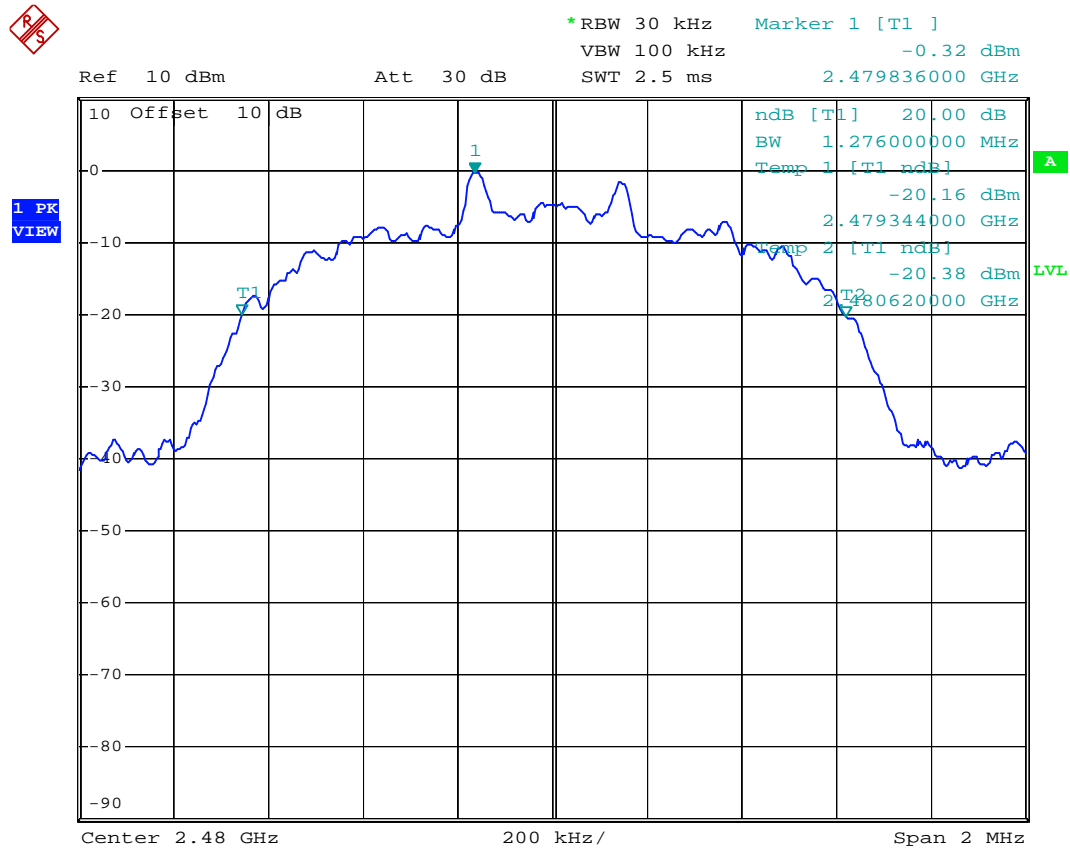

According to 15.215(c), the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.