

FCC UNII RF TEST REPORT



Test Report Number.....	HME-19081322-LC-FCC-NII
Applicant.....	HM Electronics Inc
Applicant Address.....	2848 Whiptail Loop, Carlsbad, CA 92010 USA
Product Name.....	Base Transceiver
Model Number.....	1408-US
Family Product/Model.....	N/A
FCC ID.....	BYM1408
Date of EUT received.....	09/27/2019
Date of Test.....	09/27/2019 – 04/12/2020
Report Issue Date.....	05/12/2020
Test Standards.....	47CFR Part 15.407
Test Result.....	Pass

Issued By:

Vista Laboratories

1261 Puerta Del Sol, San Clemente, CA 92673 USA

www.vista-compliance.com

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

Tested by:

David Zhang/Test Engineer

Approved By:

Yuna Yin/Engineering Reviewer

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



Laboratory Introduction

Vista Labs is an A2LA accredited 17025 compliant regulatory compliance testing laboratories (Cert. number: 4848-01) strategically located in Orange County, providing services in the electrical and telecommunication industries. Vista labs is also recognized testing facility for Australia (ACMA), Chinese Taipei (BSMI), Chinese Taipei (NCC), Hong Kong (OFCA), Israel (MOC), Korea (RRA), Singapore (IMDA), Vietnam (MIC), etc.

Our comprehensive testing services include safety testing, EMC emission and susceptibility testing, RF and wireless testing (including DFS).

As your partner, Vista investigates appropriate test standards, develops test plans, performs troubleshooting & failure analysis, reviews documentation, and provides test reports for a complete compliance testing and certification package.



17025 Product Testing Accreditation Certificate



17065 Product Certification Accreditation Certificate



Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval

1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



TABLE OF CONTENTS

1 GENERAL INFORMATION5

1.1 Applicant5

1.2 Product information5

1.3 Test standard and method6

1.4 Test Purpose and statement6

2 TEST SITE INFORMATION7

3 MODIFICATION OF EUT.....7

4 TEST CONFIGURATION AND OPERATION.....7

4.1 EUT test configuration.....7

4.2 EUT test channel8

4.3 Supporting Equipment8

4.4 EUT setup diagram8

4.5 EUT operation8

4.6 Test software.....8

5 EUT AND TEST SETUP PICTURES9

5.1 EUT external pictures9

5.2 EUT test setup10

6 TEST SUMMARY11

7 UNCERTAINTY OF MEASUREMENT.....12

8 TEST SUMMARY AND RESULT13

8.1 Antenna Requirement13

8.2 6 d Bandwidth14

8.3 26 d Bandwidth17

8.4 Maximum Output Power.....21

8.5 Power Spectral Density31

8.6 Automatically Discontinue Transmission35

8.7 Radiated Spurious Emissions into Restricted Frequency Bands.....36

8.8 Conducted Emissions58

9 TEST INSTRUMENT LIST62



Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



REVISION HISTORY

Revision	Issue Date	Description	Note
Original	05/12/2020	Original release	N/A

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



1 General Information

1.1 Applicant

Applicant:	HM Electronics Inc
Applicant address:	2848 Whiptail Loop, Carlsbad, CA 92010 USA
Manufacturer:	HM Electronics Inc
Manufacturer Address:	2848 Whiptail Loop, Carlsbad, CA 92010 USA

1.2 Product information

Product Name	Base Transceiver
Model Number	1408-US
Family Model Number	N/A
Serial Number	F46YC009
Frequency Band	BLE: 2402-2480MHz 5Ghz-20Mhz: 5180-5240Mhz, 5260-5320Mhz, 5500-5720Mhz, 5745-5825Mhz
Type of modulation	BLE: GFSK 5GHz: OFDM
Equipment Class/ Category	DTS, UNII
Maximum output power	See test result
Antenna Information	BLE: Internal chip antenna, 2.5 dBi gain 5GHz: 2 x External omni-directional antenna, 4 dBi gain
Clock Frequencies	N/A
Port/Connectors	PoE, RJ45, USB-C, fiber optic
Input Power	12VDC, 5A
Power Adapter Manu/Model	ATS065T-P120
Power Adapter SN	uA67-1012-C14-2
Hardware version	N/A
Software version	N/A
Simultaneous Transmission	BLE and 5GHz can transmit simultaneously. EUT has two 5GHz antennas, but these two antennas do not transmit simultaneously.
Additional Info	N/A

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



1.3 Test standard and method

Test standard	47CFR Part 15.407
Test method	ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v02r01

1.4 Test Purpose and statement

The purpose of this test report is intended to demonstrate the compliance of product listed in section 1.2, received from company listed in section 1.1, to the requirements of standard and method listed in section 1.3. Based on our test results, we conclude that the product tested complies with the requirements of the standards indicated.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



2 Test site information

Lab performing tests	Vista Laboratories
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA
Phone Number	+1 (949) 393-1123
Website	www. Vista-compliance.com

Test condition	Test Engineer	Test Environment	Test Date
RF conducted	David Zhang	23.5°C / 58.2%/996 mbar	09/27/2019 – 04/12/2020
Radiated	David Zhang	23.5°C / 58.2%/996 mbar	09/27/2019 – 04/12/2020

3 Modification of EUT

The EUT is an engineering test sample loaded with RF testing firmware specifically designed to support the RF TX/RX measurement in different aspects.

4 Test configuration and operation

4.1 EUT test configuration

EUT is powered by external DC power supply for testing purpose. EUT’s RF antenna port is connected to spectrum analyzer through RF test cable for measurement. The test software is used to set EUT to different transmission mode in terms of radio mode (5GHz, BLE), test channel, modulation on/off, etc.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



4.2 EUT test channel

Radio	Channel	Radio	Channel
5GHz	5180	5GHz	5720
5GHz	5220	5GHz	5745
5GHz	5240	5GHz	5785
5GHz	5260	5GHz	5825
5GHz	5300	5GHz	
5GHz	5320		
5GHz	5500		
5GHz	5580		
5GHz	5700		

4.3 Supporting Equipment

Index	Description	Model	S/N	Brand	Remark
1	AC/DC Adapter	ATS065T-P120	uA67-1012-C14-11	eUrasia Power	-

4.4 EUT setup diagram



4.5 EUT operation

The test software is used to set EUT to different transmission mode in terms of radio mode (5GHz, BLE), test channel, data rate, etc.

4.6 Test software

Index	Description	Remark
1	Putty.exe 0.63	Set Wi-Fi radio to different test mode
2	EMISoft Vasona 6.0049	EMC/Spurious emission test software used during testing

5 EUT and test setup pictures


5.1 EUT external pictures



EUT Top View



EUT Bottom View

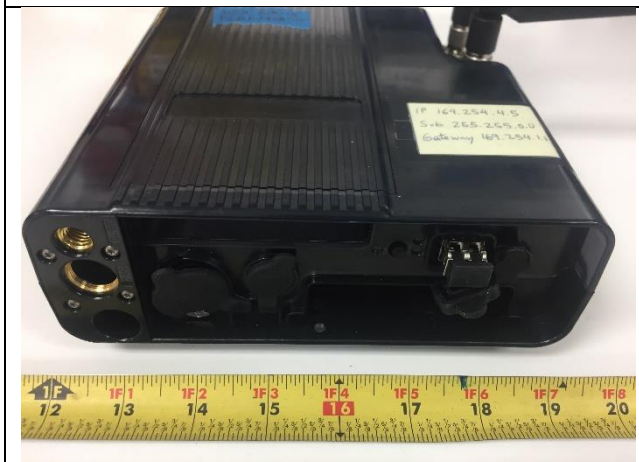


EUT Front View



EUT Rear View




EUT Left View

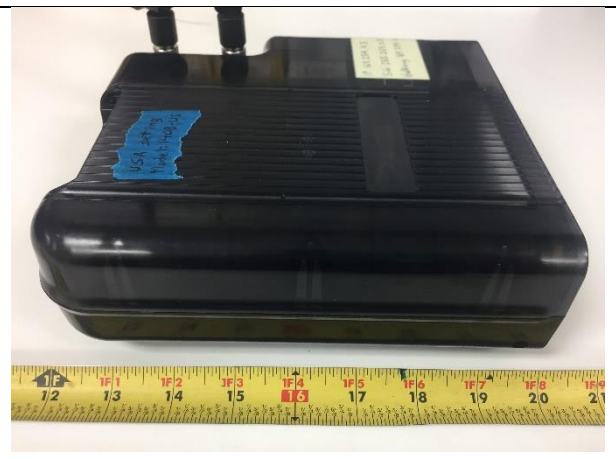


EUT Right View

5.2 EUT test setup

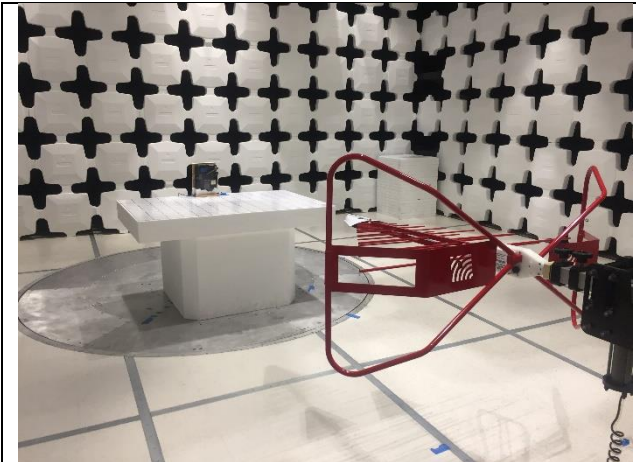


RE Below 1GHz – Front View

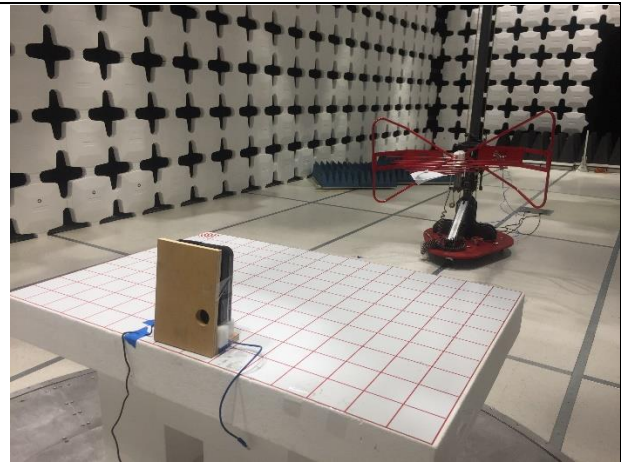


RE Below 1GHz – Rear View




RE Above 1GHz – Front View

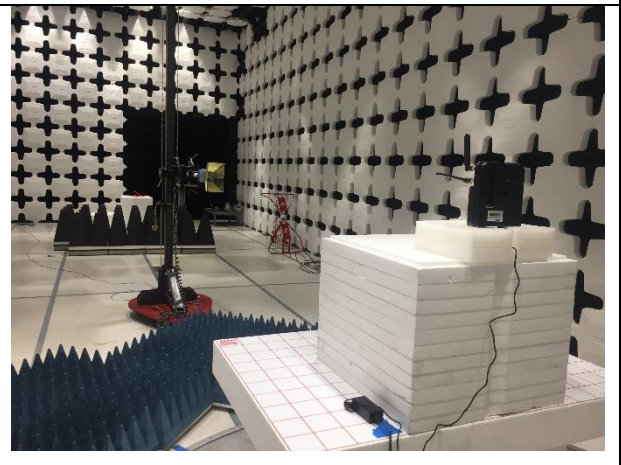

RE Above 1GHz – Rear View

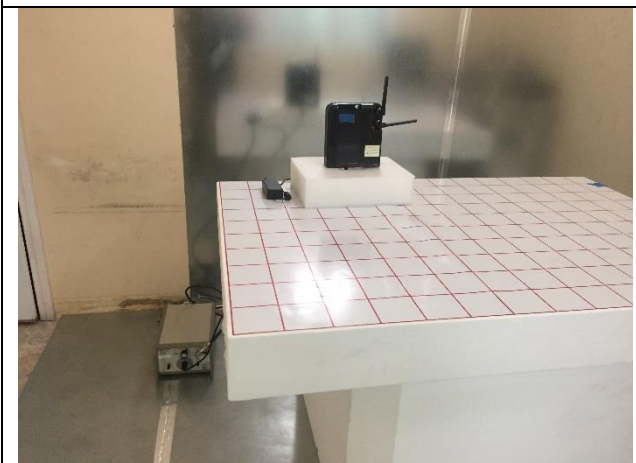

AC Line CE – Front View

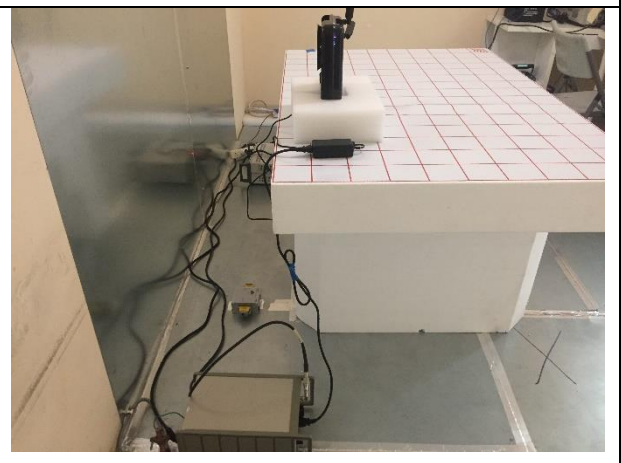

AC Line CE – Rear View

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



6 Test Summary

FCC Rules	Test Item	Section	Verdict
§15.203	Antenna Requirement	8.1	Pass
§15.407(e)	6 dB Bandwidth	8.2	Pass
§15.407(a)	26 dB Bandwidth	8.3	Pass
§15.407(a)	Conducted Maximum Output Power & E.I.R.P	8.4	Pass
§15.407(a)	Power Spectral Density & E.I.R.Psd	8.5	Pass
§15.407(c)	Automatically Discontinue Transmission	8.6	Pass
§15.205, §15.209, §15.407(b)	Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	8.7	Pass
§15.207 (a)	AC Power Line Conducted Emissions	8.8	Pass

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



7 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
RF Output Power (Conducted)	±1.2 dB
Power Spectral Density	±0.9 dB
Unwanted Emission (conducted)	±2.6 dB
Occupied Channel Bandwidth	±5 %
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8 Test summary and result

8.1 Antenna Requirement

8.1.1 Requirement

Per § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.1.2 Result

Analysis:

EUT has two external antennas. Connector type is reversed TNC connector. No standard RF connector or coupling is used.

Conclusion:

EUT complies with antenna requirement in § 15.203.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.2 6 d Bandwidth

8.2.1 Requirement

§ 15.407 (e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.2.2 Test setup



8.2.3 Test Procedure

According to 789033 D02 General U-NII Test Procedures New Rules v02r01, Section C) Emission bandwidth.

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Use automatic bandwidth measurement capability on instrument to obtain BW result.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US




8.2.4 Test Result

For U-NII-3 band

Mode/ Bandwidth	Channel	Frequency (MHz)	Data rate	Measured Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
5GHz	149	5745	6Mbps	16380	500	Pass
5GHz	157	5785	6Mbps	16370	500	Pass
5GHz	165	5825	6Mbps	17210	500	Pass

8.2.5 Test Plots

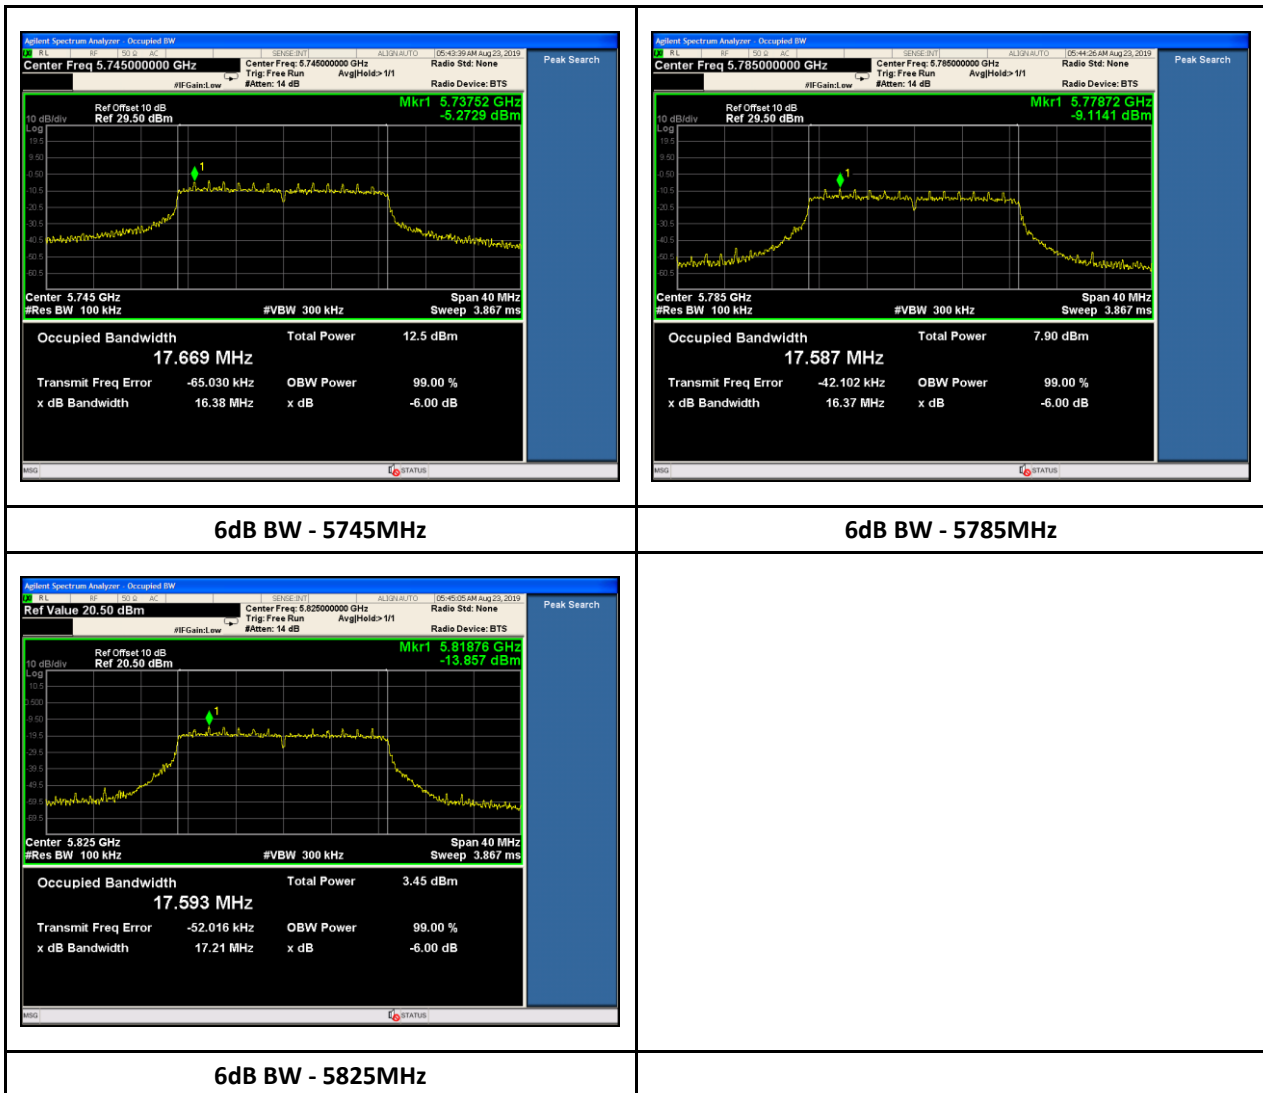

6dB BW - 5745MHz

6dB BW - 5785MHz

6dB BW - 5825MHz

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US




8.3 26 d Bandwidth

8.3.1 Requirement

§ 15.407 (a)

This section is for reporting purpose only. There are no restriction limits for bandwidth.

8.3.2 Test setup



8.3.3 Test Procedure

According to 789033 D02 General U-NII Test Procedures New Rules v02r01, Section C) Emission bandwidth.

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 26 dB, if the functionality described above (i.e., $RBW, VBW \geq 3 \times RBW$, peak detector with maximum hold) is implemented by the instrumentation function.

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the video bandwidth (VBW) $\geq 3 \times RBW$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Use automatic bandwidth measurement capability on instrument to obtain BW result.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.3.4 Test Result

For U-NII-1 band

Mode/ Bandwidth	Channel	Frequency (MHz)	Data rate	Measured 26 dB Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
5GHz	36	5180	MCS0	28210	N/A	N/A
5GHz	44	5220	MCS0	27670	N/A	N/A
5GHz	48	5240	MCS0	26100	N/A	N/A

For U-NII-2A band

Mode/ Bandwidth	Channel	Frequency (MHz)	Data rate	Measured Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
5GHz	52	5260	MCS0	22200	N/A	N/A
5GHz	60	5300	MCS0	21070	N/A	N/A
5GHz	64	5320	MCS0	21450	N/A	N/A


For U-NII-2C band

Mode/ Bandwidth	Channel	Frequency (MHz)	Data rate	Measured 26 dB Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
5GHz	100	5500	MCS0	21560	N/A	N/A
5GHz	116	5580	MCS0	21700	N/A	N/A
5GHz	140	5700	MCS0	21720	N/A	N/A


For U-NII-2C band Cross-band channel

Mode/ Bandwidth	Channel	Frequency (MHz)	Data rate	Measured 26 dB Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
5GHz	144	5720	MCS0	21730	N/A	N/A


8.3.5 Test Plots

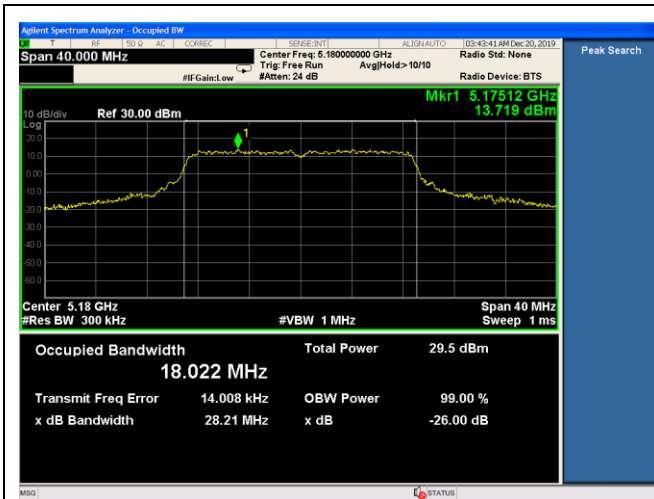


26dB BW - 5180MHz

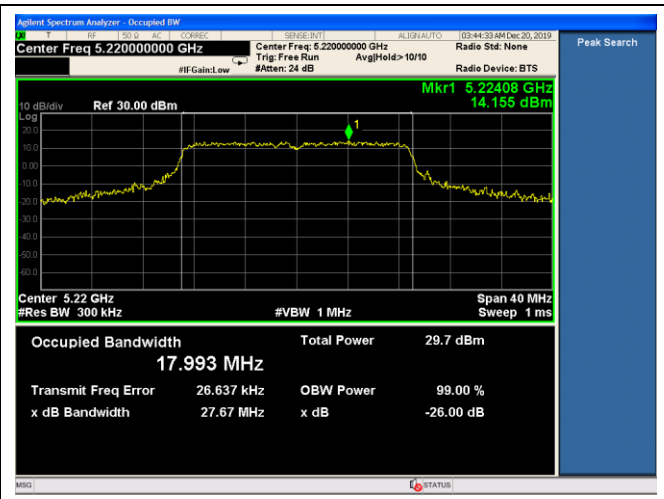


26dB BW - 5220MHz

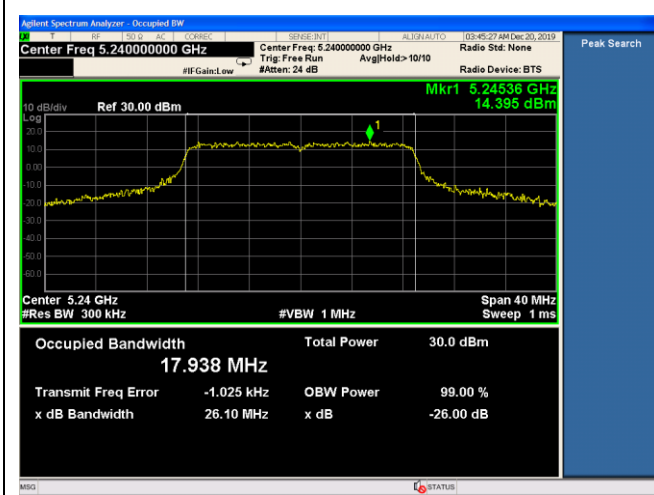


26dB BW - 5240MHz

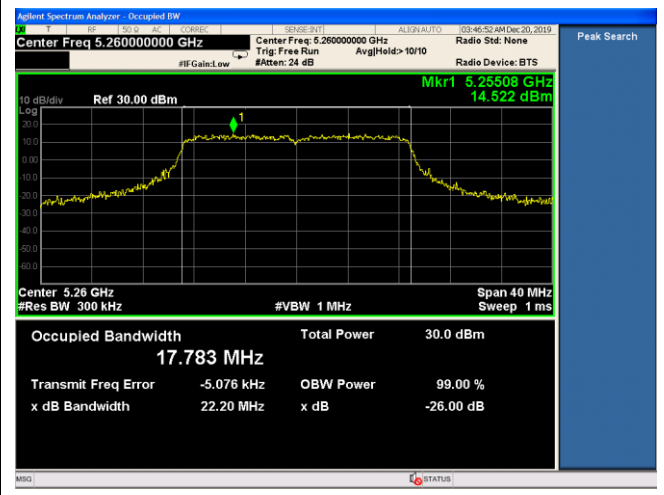

26dB BW - 5260MHz

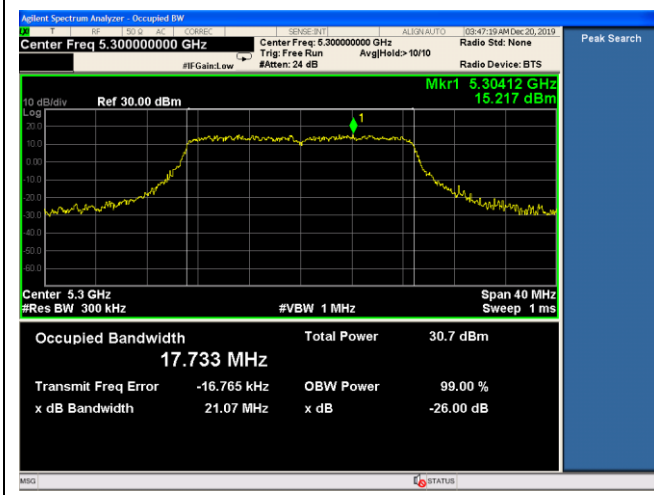


26dB BW - 5300MHz

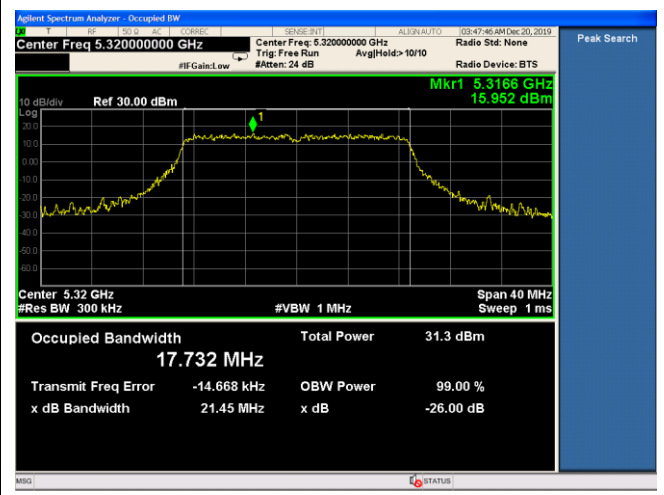


26dB BW - 5320MHz


Report Number: HME-19081322-LC-FCC-NII
 Product: Base Transceiver
 Model Number: 1408-US

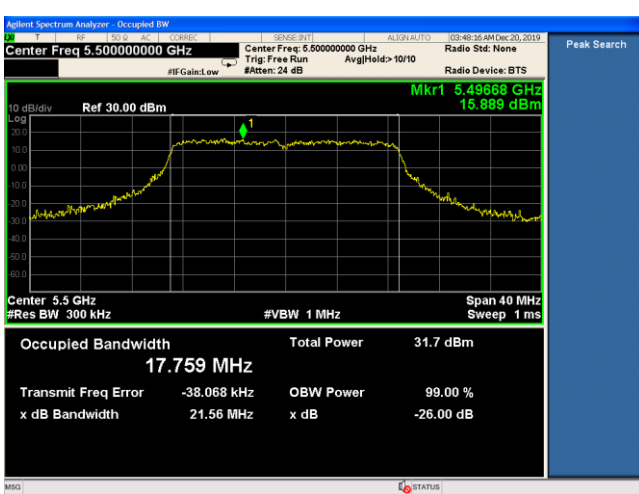


26dB BW – 5500MHz

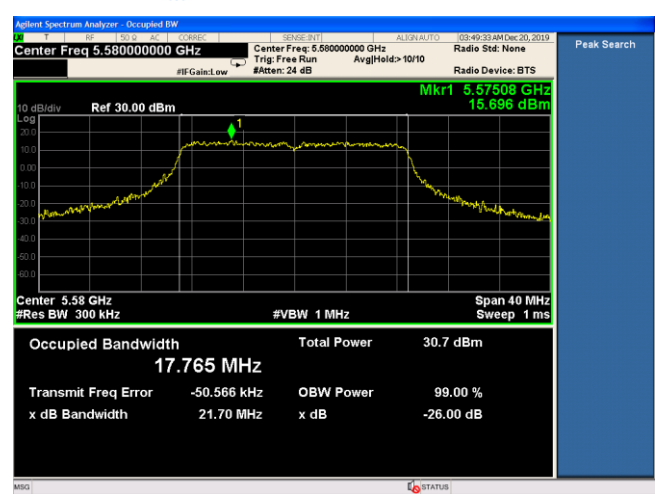

26dB BW - 5580MHz

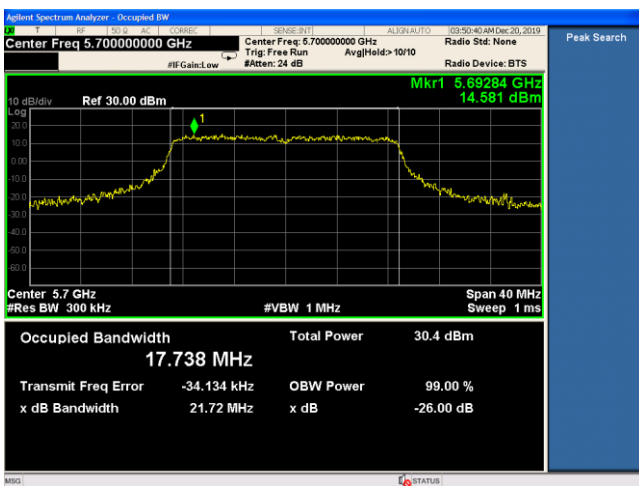

26dB BW - 5700MHz

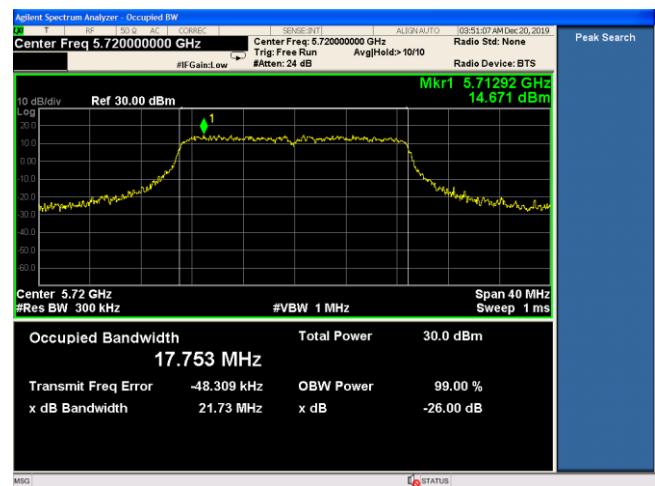

26dB BW - 5720MHz



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval

1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.4 Maximum Output Power

8.4.1 Requirement

§ 15.407 (a)

FCC for the 5.15–5.25 GHz bands:

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ISED for the 5.15–5.25 GHz bands:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For the 5.25–5.725 GHz bands:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

For the band 5.725-5.85 GHz:

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



Per § 15.407 (a),

For the 5.15–5.25 GHz bands:

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25–5.725 GHz bands:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


For the band 5.725-5.85 GHz:

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.4.2 Test setup

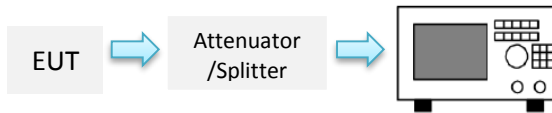

8.4.3 Test Procedure

According to 789033 D02 General U-NII Test Procedures New Rules v02r01, Section E) Maximum conducted output power, 2, b), method SA-1

1. Set span to encompass the entire emission bandwidth (EBW)(or, alternatively, the entire 99% occupied bandwidth)of the signal.
2. Set RBW=1MHz
3. Set VBW $\geq 3 \times$ RBW
4. Number of points in sweep $\geq 2 \times$ span/ RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto couple.
6. Detector = Power averaging (RMS)
7. Trace average at least 100 traces in power averaging(rms)mode.
8. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.4.4 Test Result

For U-NII-1 band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 power (dBm)	TX2 power (dBm)	Highest or Total power (dBm)	Max Output Power Limit (dBm)	Result
5GHz	5180	MCS0	18.58	19.66	18.58	30.00	Pass
5GHz	5220	MCS0	23.30	24.04	24.04	30.00	Pass
5GHz	5240	MCS0	22.92	23.50	23.50	30.00	Pass

For U-NII-2A band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 power (dBm)	TX2 power (dBm)	Highest or Total power (dBm)	Max Output Power (dBm)	Result
5GHz	5260	MCS0	22.13	22.14	22.14	24.00	Pass
5GHz	5300	MCS0	22.02	22.35	22.35	24.00	Pass
5GHz	5320	MCS0	22.25	22.25	22.25	24.00	Pass

For U-NII-2C band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 power (dBm)	TX2 power (dBm)	Highest or Total power (dBm)	Max Output Power (dBm)	Result
5GHz	5500	MCS0	18.93	18.46	18.93	24.00	Pass
5GHz	5580	MCS0	21.98	21.95	21.98	24.00	Pass
5GHz	5700	MCS0	16.94	16.40	16.94	23.93	Pass

For U-NII-3 band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 power (dBm)	TX2 power (dBm)	Highest or Total power (dBm)	Max Output Power Limit (dBm)	Result
5GHz	5745	MCS0	23.72	24.00	24.00	30.00	Pass
5GHz	5785	MCS0	23.53	23.65	23.65	30.00	Pass
5GHz	5825	MCS0	22.89	23.60	23.60	30.00	Pass

For U-NII-2C band Cross-band channel

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 power (dBm)	TX2 power (dBm)	Highest or Total power (dBm)	Max Output Power (dBm)	Result
5GHz	5720	MCS0	21.85	21.75	21.85	23.83	Pass




Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US




Note:


- 1) EUT has two TX chains, but they don't transmit simultaneously and are not MIMO. It's not required the combine the power of two chains in this case.

8.4.5 Test Plots

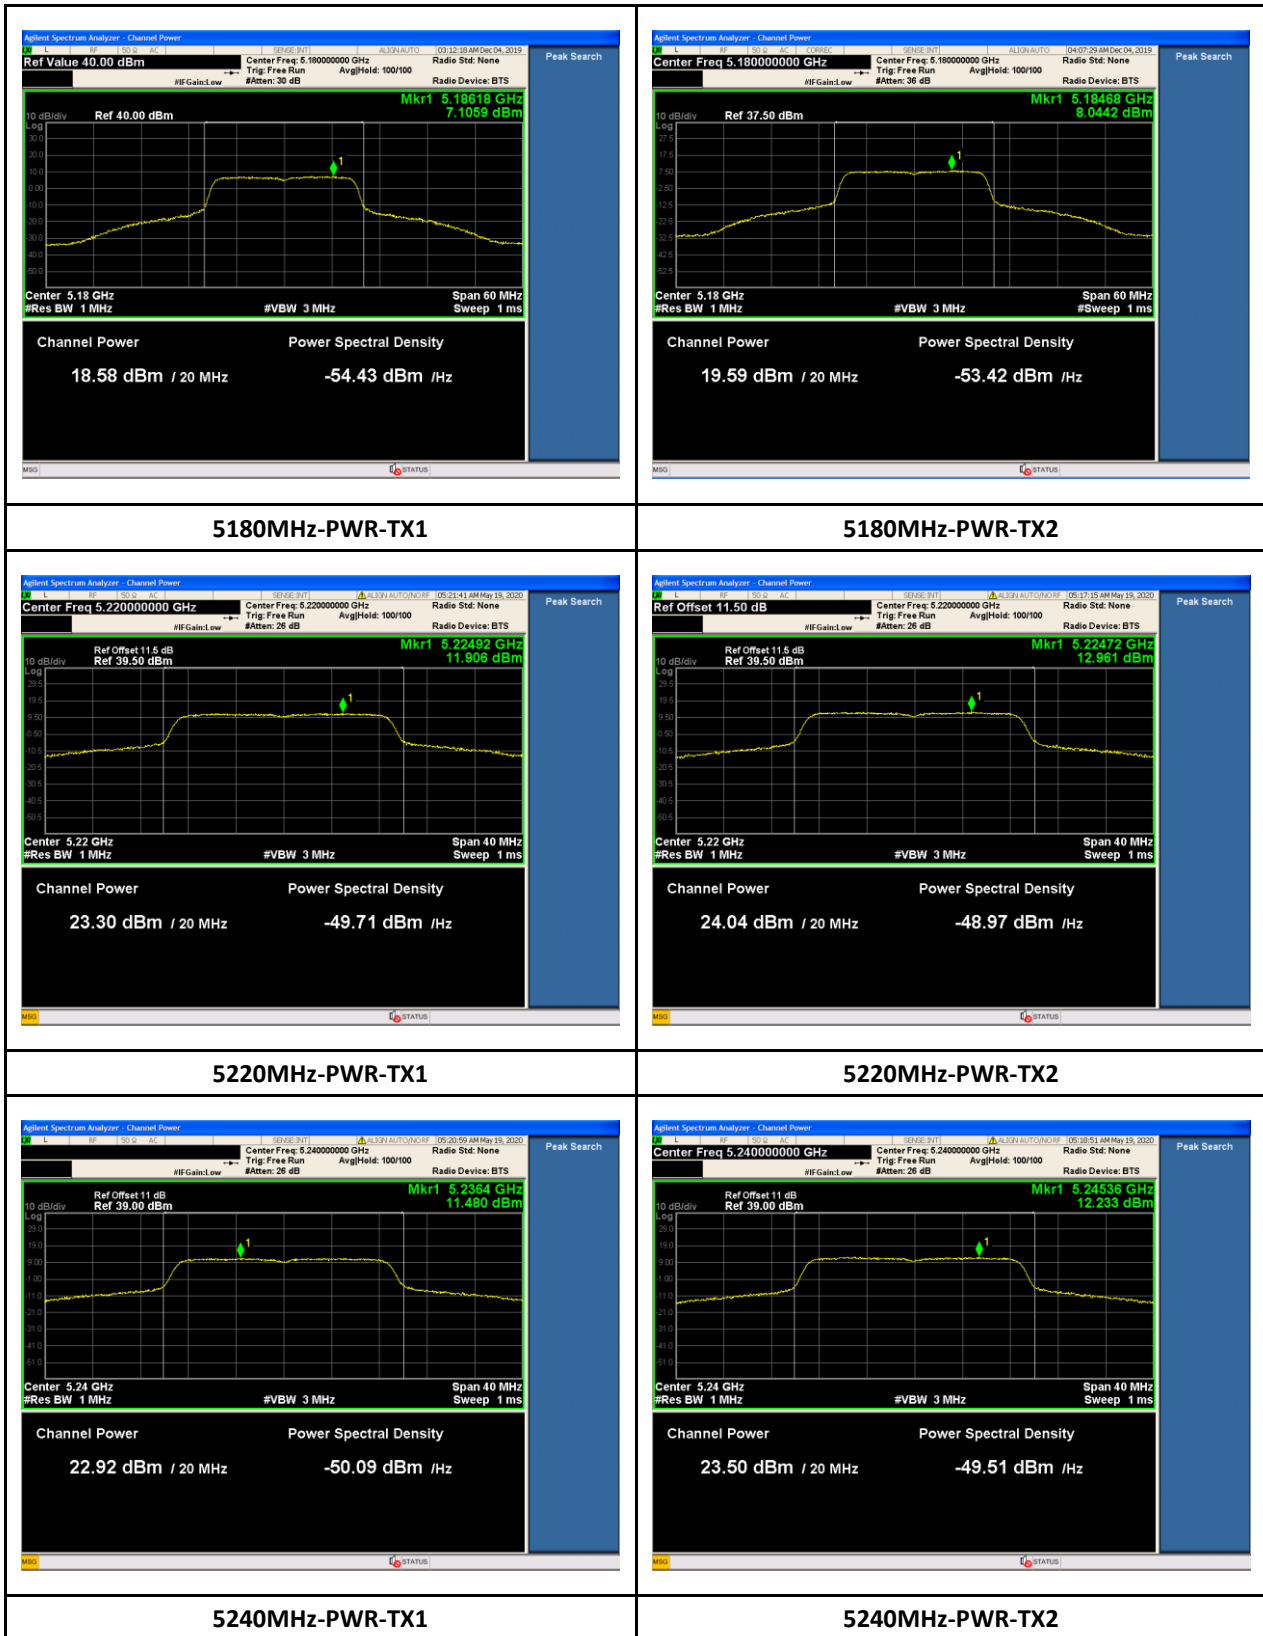

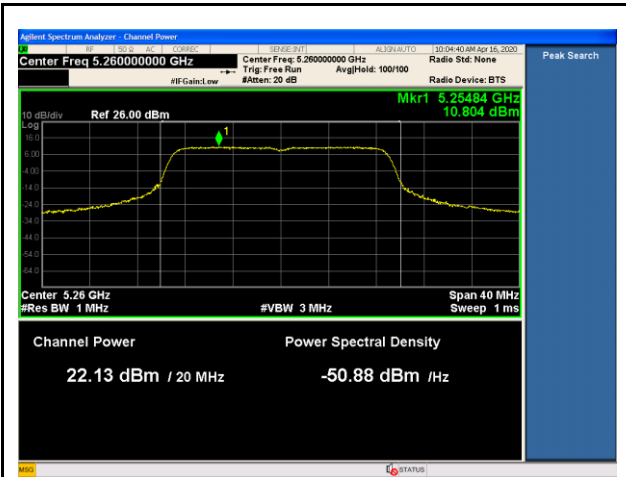


5260MHz-PWR-TX1

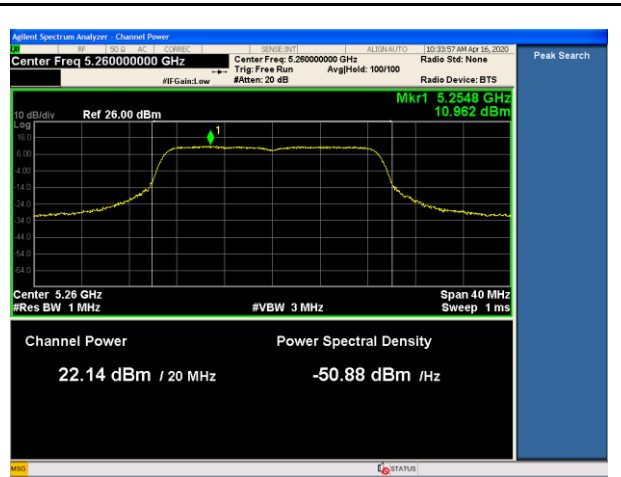


5260MHz-PWR-TX2




5300MHz-PWR-TX1

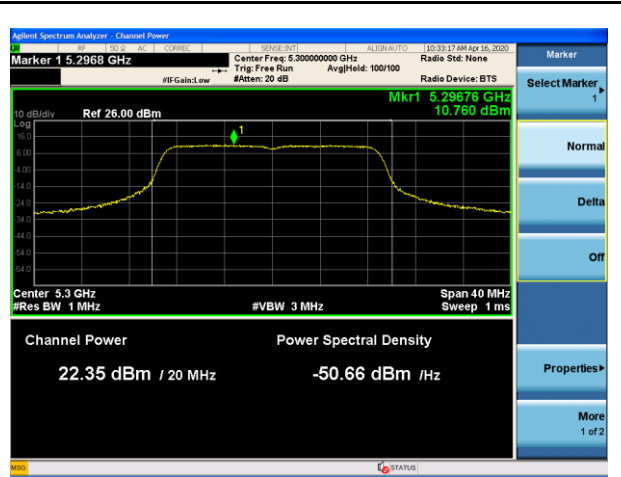


5300MHz-PWR-TX2

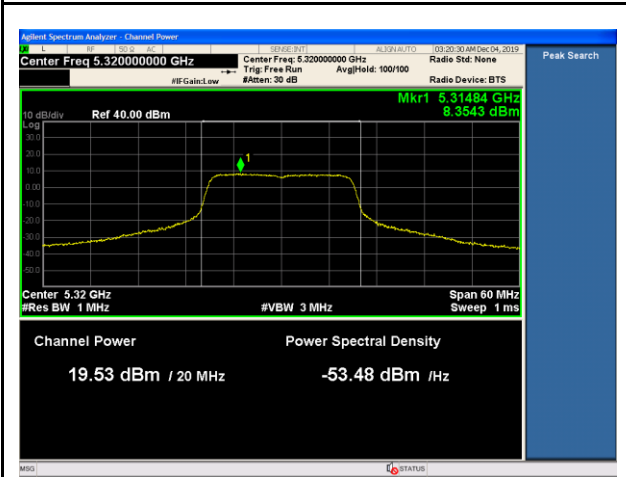


5320MHz-PWR-TX1

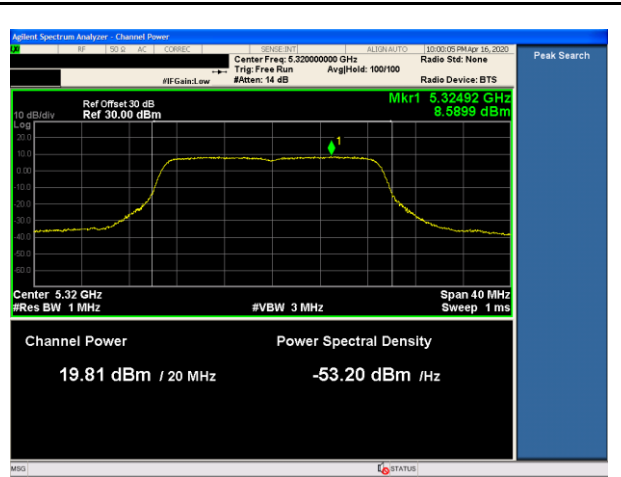


5320MHz-PWR-TX2

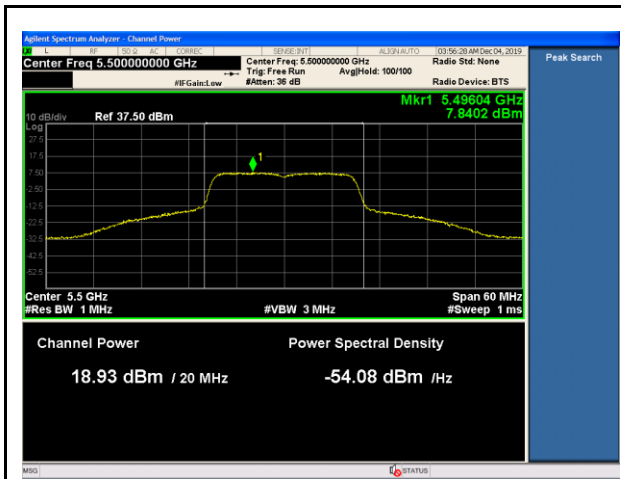


5500MHz-PWR-TX1

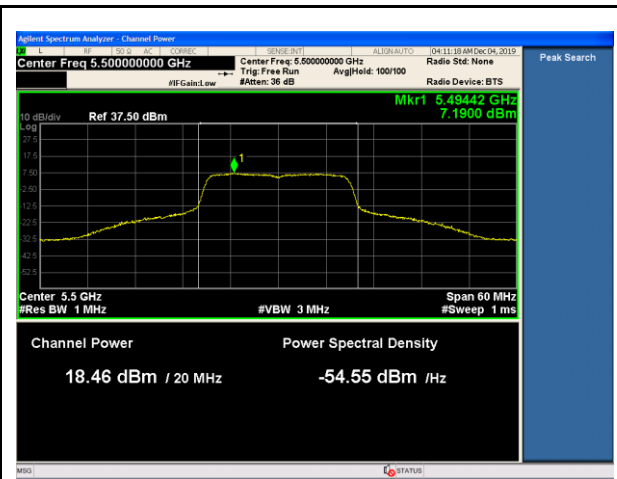


5500MHz-PWR-TX2

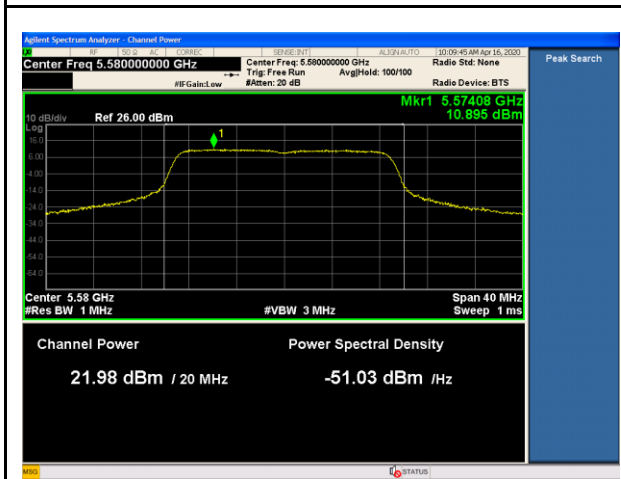


5580MHz-PWR-TX1

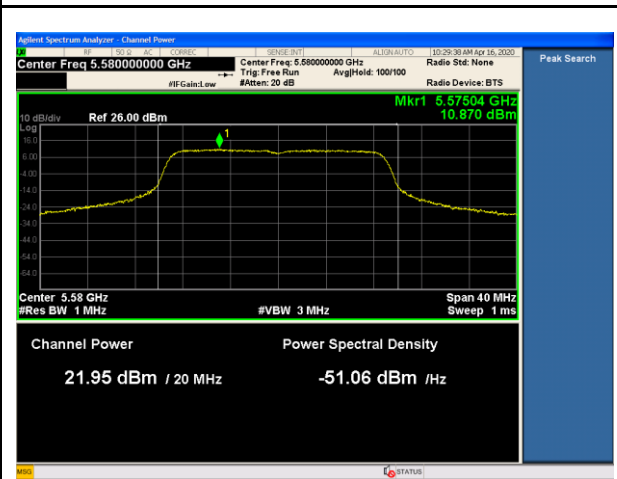

5580MHz-PWR-TX2

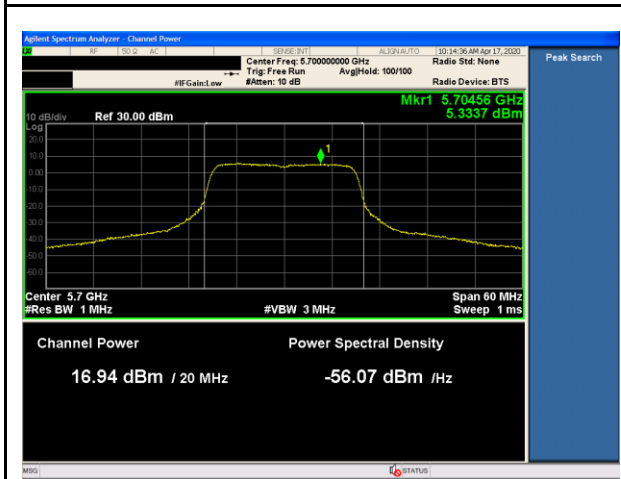


5700MHz-PWR-TX1

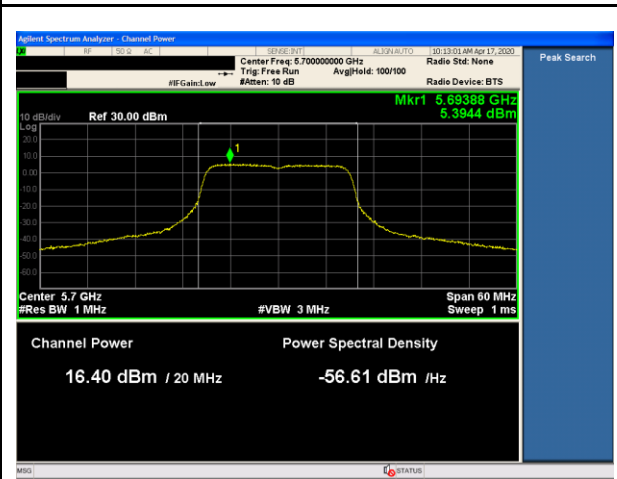


5700MHz-PWR-TX2



5745MHz-PWR-TX1

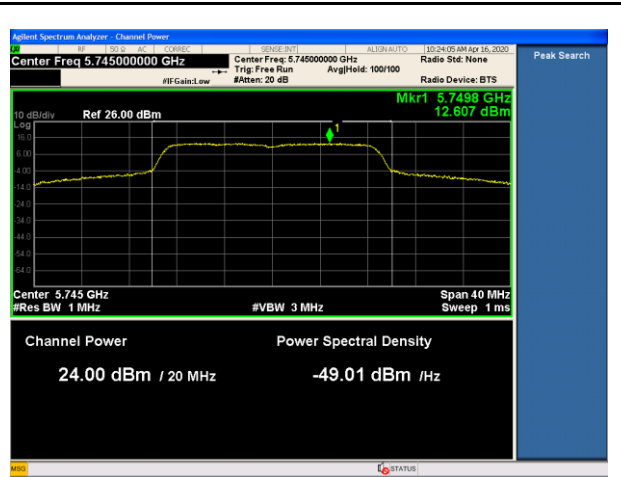

5745MHz-PWR-TX2

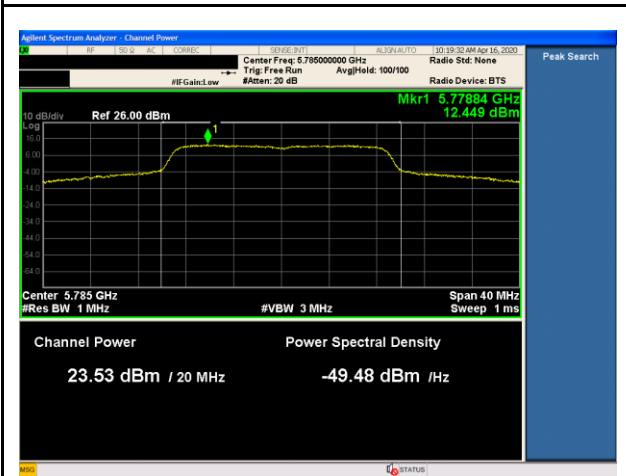


5785MHz-PWR-TX1



5785MHz-PWR-TX2




5825MHz-PWR-TX1

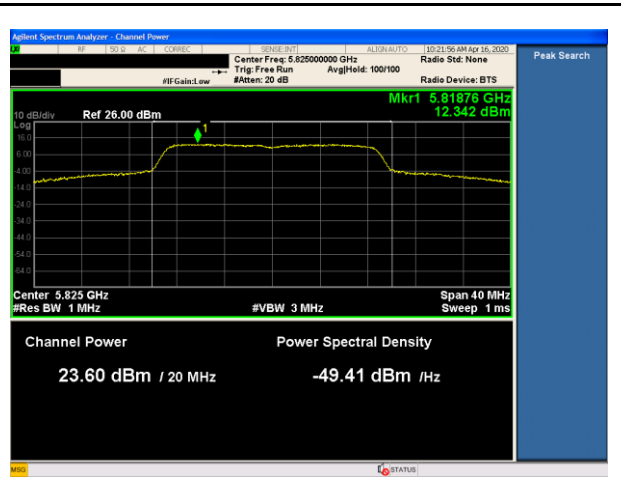

5825MHz-PWR-TX2

Report Number: HME-19081322-LC-FCC-NII
 Product: Base Transceiver
 Model Number: 1408-US

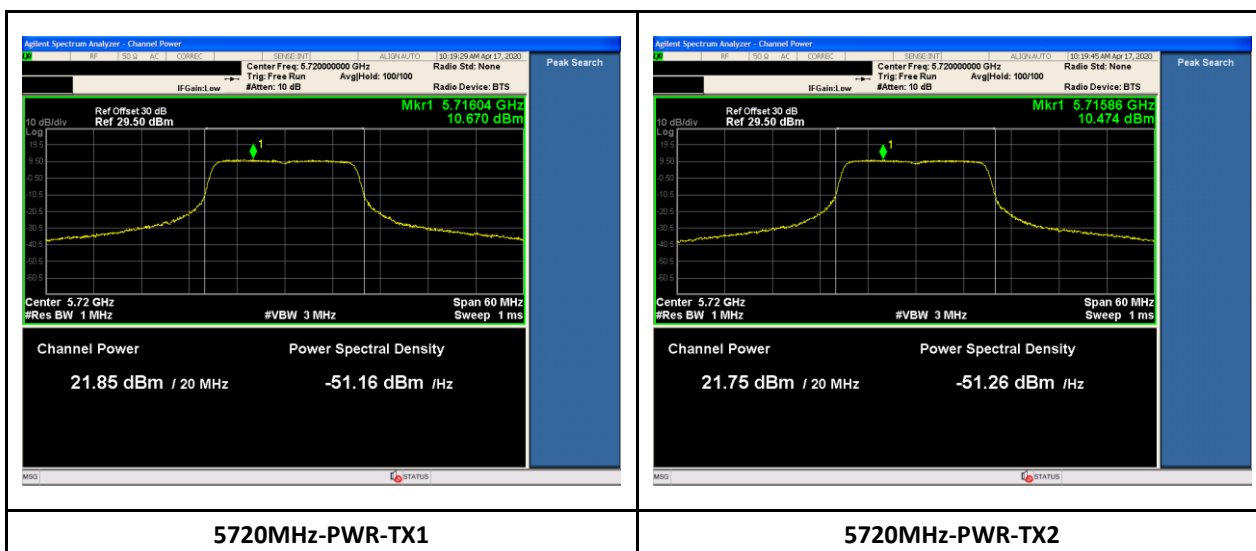

Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval

1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.5 Power Spectral Density

8.5.1 Requirement

§ 15.407 (a)

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.


For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.5.2 Test setup



8.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, section F) Maximum power spectral density. Method SA-1

1. Set span to encompass the entire emission bandwidth (EBW)(or, alternatively, the entire 99% occupied bandwidth)of the signal.
2. Set RBW=1MHz
3. Set VBW $\geq 3 \times$ RBW
4. Number of points in sweep $\geq 2 \times$ span/ RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto couple.
6. Detector = Power averaging (RMS)
7. Trace average at least 100 traces in power averaging(rms)mode.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.5.4 Test Result

For U-NII-1 band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 PSD (dBm/MHz)	TX2 PSD (dBm/MHz)	Highest or Total PSD (dBm/MHz)	Max PSD (dBm/MHz)	Result
5GHz	5180	MCS0	7.106	8.044	8.044	17	Pass
5GHz	5220	MCS0	11.906	12.961	12.961	17	Pass
5GHz	5240	MCS0	11.480	12.233	12.233	17	Pass

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 PSD (dBm/MHz)	TX2 PSD (dBm/MHz)	Highest or Total PSD (dBm/MHz)	Max PSD (dBm/MHz)	Result
5GHz	5260	MCS0	10.804	10.962	10.962	11	Pass
5GHz	5300	MCS0	10.687	10.760	10.760	11	Pass
5GHz	5320	MCS0	10.818	10.927	10.927	11	Pass

For U-NII-2C band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 PSD (dBm/MHz)	TX2 PSD (dBm/MHz)	Highest or Total PSD (dBm/MHz)	Max PSD (dBm/MHz)	Result
5GHz	5500	MCS0	7.840	7.190	7.840	11	Pass
5GHz	5580	MCS0	10.895	10.870	10.895	11	Pass
5GHz	5700	MCS0	5.334	5.394	5.394	11	Pass

For U-NII-3 band

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 PSD (dBm/MHz)	TX2 PSD (dBm/MHz)	Highest or Total PSD (dBm/MHz)	Corrected PSD (dBm/500KHz)	Max PSD (dBm/500KHz)	Result
5GHz	5745	MCS0	12.573	12.607	12.607	9.597	30	Pass
5GHz	5785	MCS0	12.449	12.375	12.449	9.439	30	Pass
5GHz	5825	MCS0	11.676	12.342	12.342	9.332	30	Pass

For U-NII-2C band Cross-band channel

Mode/ Bandwidth	Frequency (MHz)	Data rate	TX1 PSD (dBm/MHz)	TX2 PSD (dBm/MHz)	Highest or Total PSD (dBm/MHz)	Max PSD (dBm/MHz)	Result
5GHz	5720	MCS0	10.670	10.474	10.633	11	Pass



Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



Note:

- 1) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- 2) EUT has two TX chains, but they don't transmit simultaneously and are not MIMO. It's not required the combine the PSD of two chains in this case.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.5.5 Test Plots

Refer to test plots in conducted peak output power

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US




8.6 Automatically Discontinue Transmission

8.6.1 Requirement

§ 15.407 (c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.6.2 Test setup



8.6.3 Test Result

The transmission on this device is based on a single type, unique frame structure which only allows it to transmit a 730 uS duration within every 5000 uS period. In case of absence of information, the EUT will continue to transmit using repetitive codes to complete frame or burst intervals.

This frame structure makes the maximum TX duty cycle and channel loading to be:

$$\text{Channel loading} = 730 \text{ us} / 5000 \text{ us} * 100\% = 14.6 \%$$

8.7 Radiated Spurious Emissions into Restricted Frequency Bands

8.7.1 Requirement


§ 15.205, 15.209, 15.407(b)

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.
- (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.
- (5) Restricted band, emission must also comply with the radiated emission limits specified in 15.209


Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 960	200
Above 960	500


8.7.2 Test setup

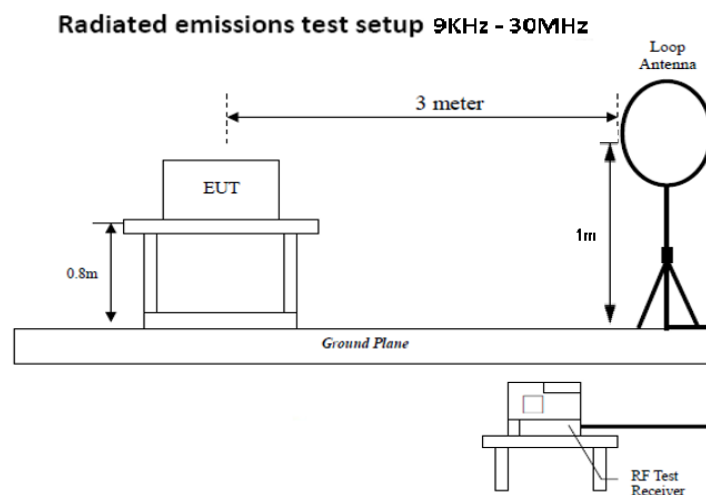

Radiated emissions test setup 30 MHz - 1 GHz

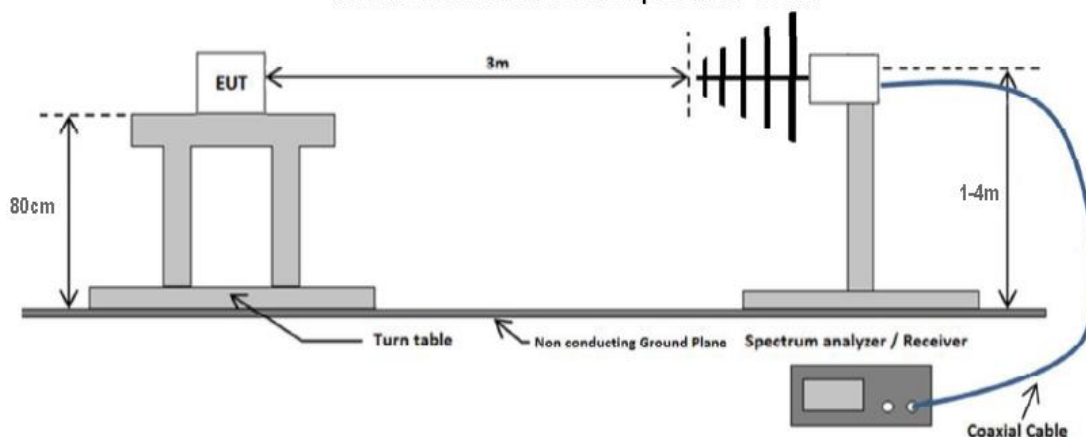

Radiated emissions test setup above 1 GHz

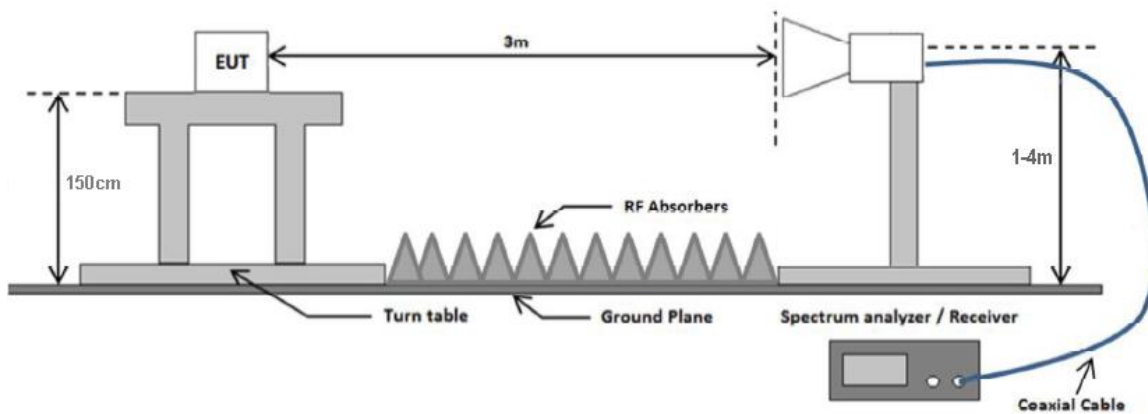

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.7.3 Test Procedure

According to FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement. And subclause 12.7 Radiated spurious emission measurements in ANSI C62.10-2013 as well as the procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 was followed. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.


1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

8.7.4 Test Result

RADIATED EMISSIONS < 1 GHZ

Test Standard:	15.209, 15.407	Mode:	5180 MHz
Frequency Range:	30 - 1000 MHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5180 MHz

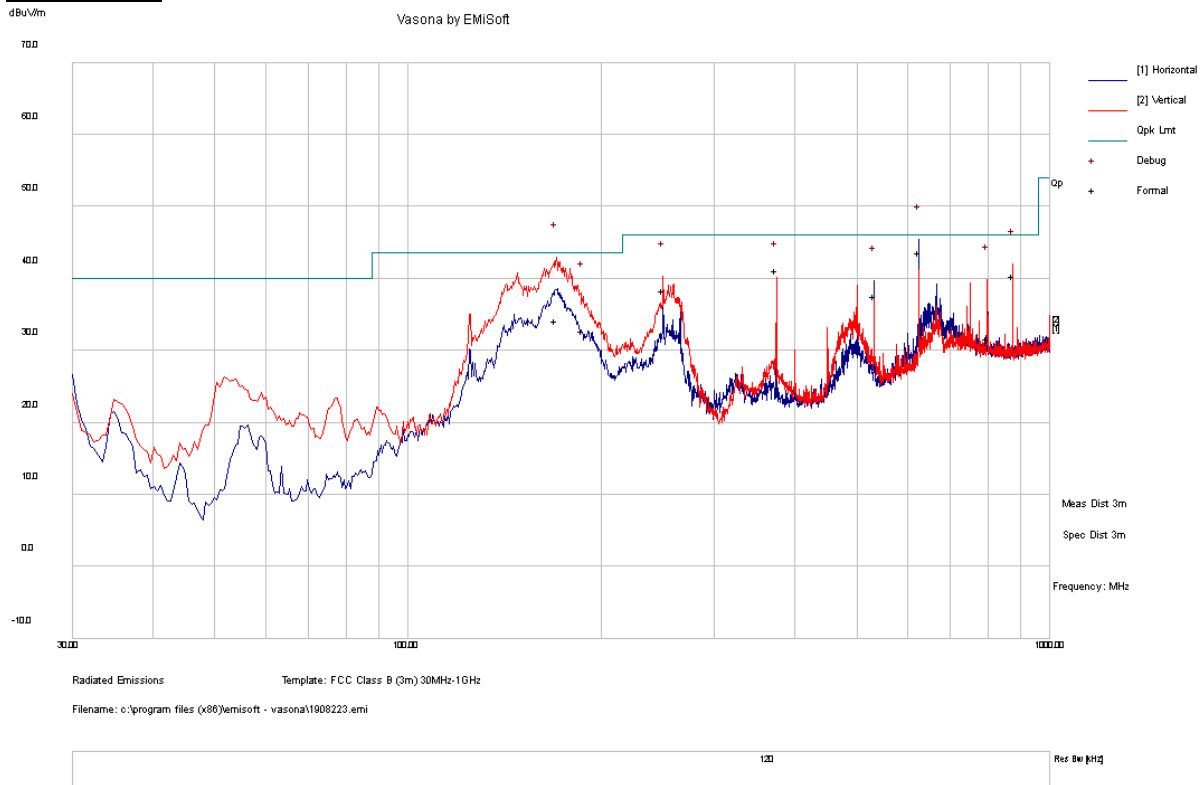


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
169.97	51.99	4.46	-22.21	34.24	QP	V	234	127	43.50	-9.26	Pass
624.93	45.40	7.20	-8.99	43.61	QP	H	103	193	46.00	-2.39	Pass
874.90	40.06	7.52	-7.12	40.46	QP	V	100	228	46.00	-5.54	Pass
249.95	52.35	5.25	-19.26	38.35	QP	V	102	240	46.00	-7.65	Pass
374.96	49.68	6.21	-14.73	41.17	QP	V	161	0	46.00	-4.83	Pass
187.18	50.21	4.62	-21.97	32.86	QP	V	100	350	43.50	-10.64	Pass
798.23	31.23	7.25	-6.76	31.72	QP	V	292	10	46.00	-14.28	Pass
531.94	42.97	6.45	-11.76	37.65	QP	H	136	235	46.00	-8.35	Pass

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5500 MHz
Frequency Range:	30 - 1000 MHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5500MHz

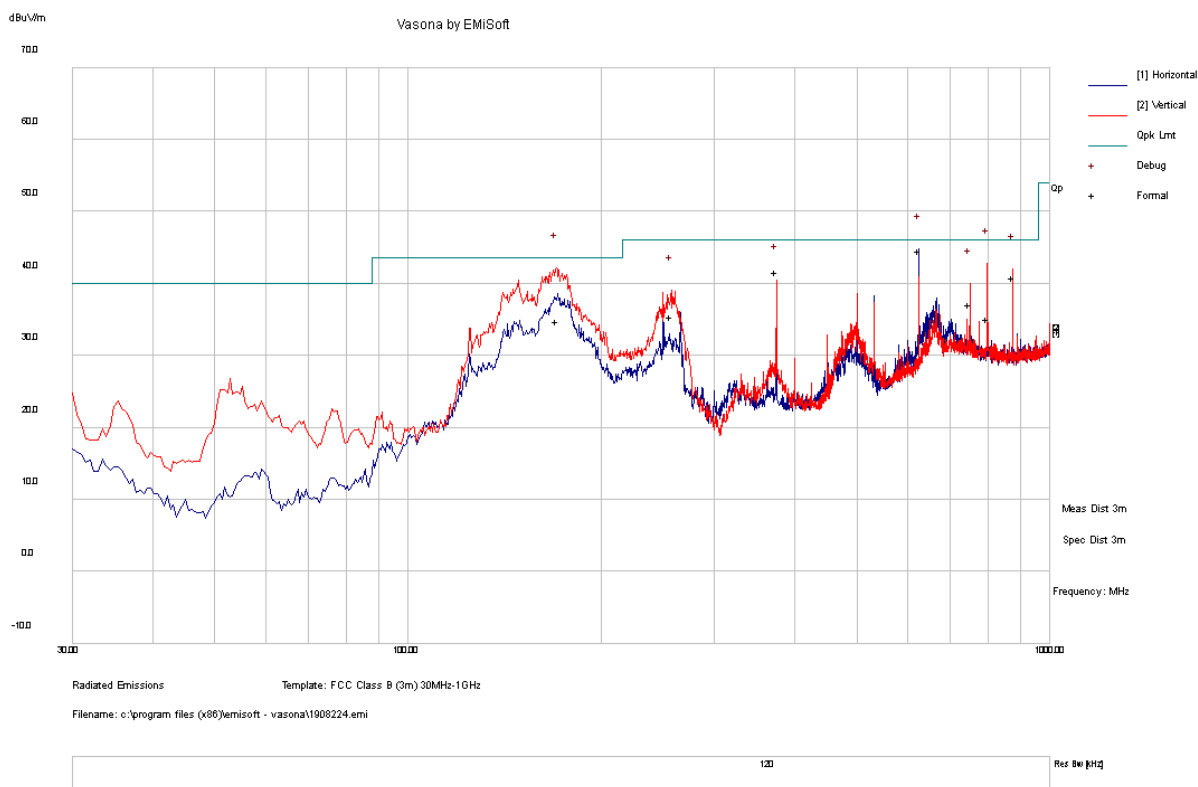

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
624.95	46.33	7.20	-8.99	44.54	QP	H	115	202	46	-1.46	Pass
170.40	52.59	4.46	-22.20	34.85	QP	V	238	0	44	-8.65	Pass
798.00	34.59	7.25	-6.76	35.08	QP	V	322	348	46	-10.92	Pass
874.91	40.48	7.52	-7.12	40.89	QP	V	100	36	46	-5.11	Pass
374.96	50.11	6.21	-14.73	41.59	QP	V	134	356	46	-4.41	Pass
749.98	36.40	7.28	-6.60	37.07	QP	V	112	352	46	-8.93	Pass
256.91	49.27	5.32	-19.17	35.41	QP	V	138	109	46	-10.59	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



Test Standard:	15.209, 15.407	Mode:	BLE + 5GHz co-located
Frequency Range:	30 - 1000 MHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

BLE + 5GHz co-located

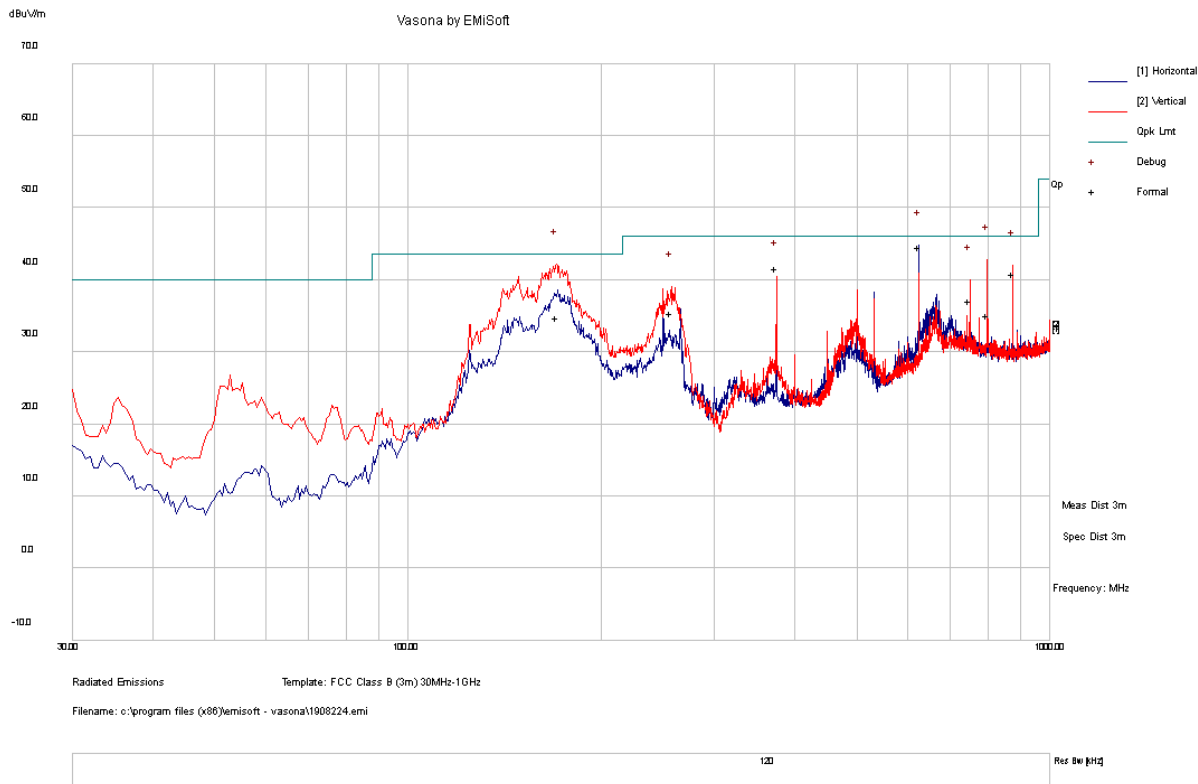

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
624.95	46.33	7.20	-8.99	44.54	QP	H	115	202	46.00	-1.46	Pass
170.40	52.59	4.46	-22.20	34.85	QP	V	238	0	43.50	-8.65	Pass
798.00	34.59	7.25	-6.76	35.08	QP	V	322	348	46.00	-10.92	Pass
874.91	40.48	7.52	-7.12	40.89	QP	V	100	36	46.00	-5.11	Pass
374.96	50.11	6.21	-14.73	41.59	QP	V	134	356	46.00	-4.41	Pass
749.98	36.40	7.28	-6.60	37.07	QP	V	112	352	46.00	-8.93	Pass
256.91	49.27	5.32	-19.17	35.41	QP	V	138	109	46.00	-10.59	Pass




Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval

1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

RADIATED EMISSIONS > 1 GHz

Test Standard:	15.209, 15.407	Mode:	5180MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5180MHz

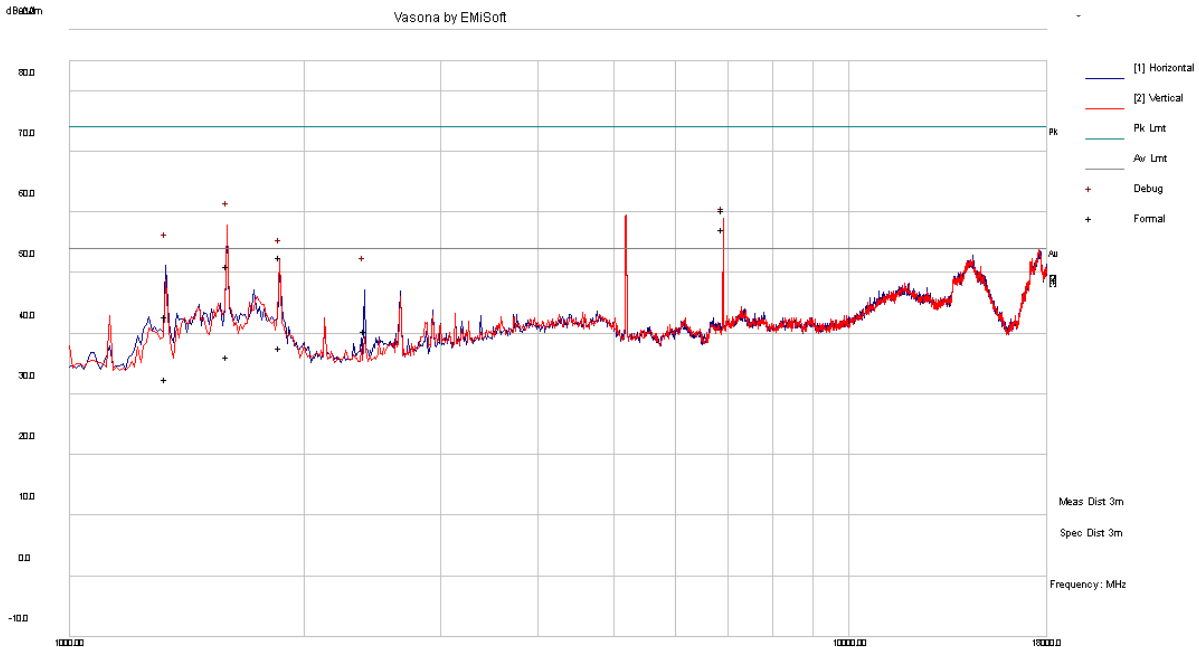

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz

Filename: c:\program files (x86)\emisoft - vasona\1908234.emi

1000 Res: 0uV/m


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1596.23	43.80	10.73	-3.36	51.17	Peak Max	V	199	142	74	-22.83	Pass
6906.57	33.08	15.86	11.35	60.29	Peak Max	V	100	295	74	-13.71	Pass
1330.09	36.16	10.56	-3.81	42.90	Peak Max	V	304	272	74	-31.10	Pass
1862.10	43.05	10.40	-0.88	52.58	Peak Max	V	244	0	74	-21.42	Pass
1596.23	28.79	10.73	-3.36	36.16	Average Max	V	199	142	54	-17.84	Pass
6906.57	24.99	15.86	11.35	52.20	Average Max	V	100	295	54	-1.80	Pass
1330.09	25.82	10.56	-3.81	32.57	Average Max	V	304	272	54	-21.43	Pass
1862.10	28.24	10.40	-0.88	37.76	Average Max	V	244	0	54	-16.24	Pass

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5220MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5220 MHz

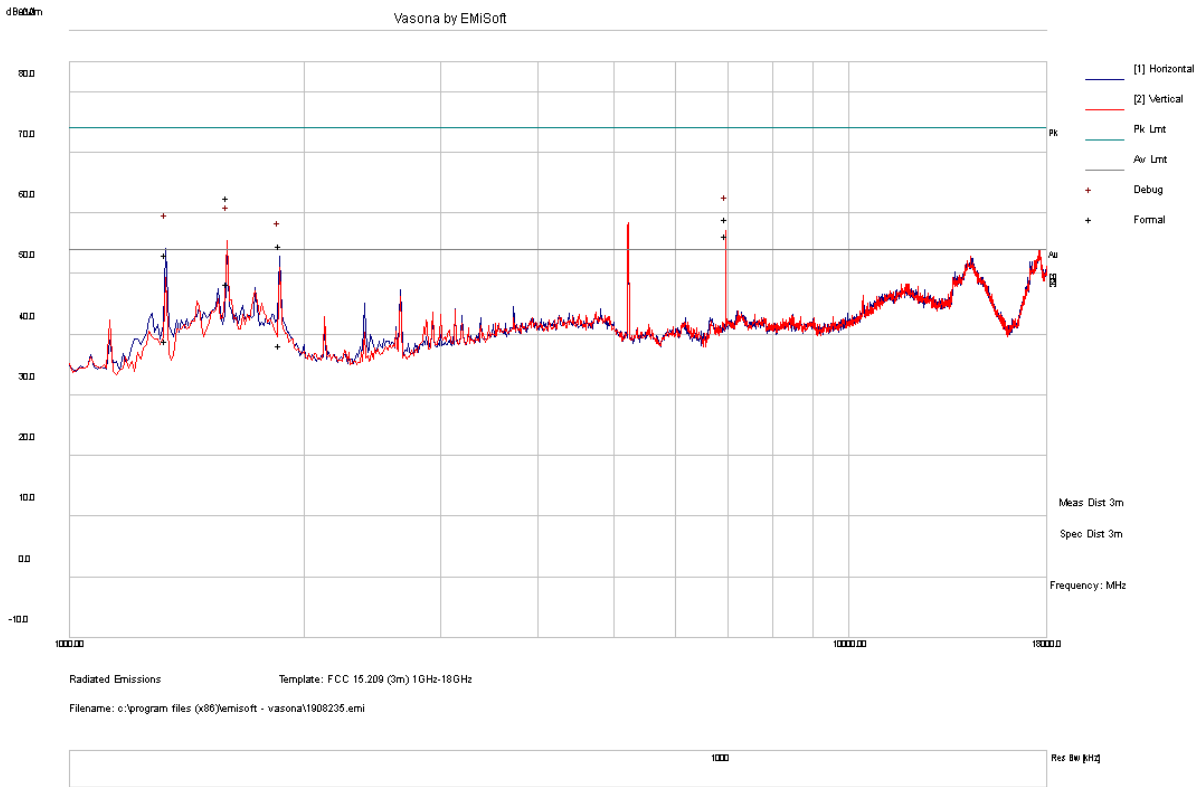

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
6960.03	31.85	15.97	11.27	59.09	Peak Max	V	120	298	74	-14.92	Pass
1595.94	55.20	10.73	-3.37	62.56	Peak Max	V	253	356	74	-11.44	Pass
1330.36	46.38	10.56	-3.82	53.13	Peak Max	H	231	38	74	-20.87	Pass
1862.25	45.15	10.40	-0.88	54.68	Peak Max	H	197	96	74	-19.32	Pass
6960.03	25.00	15.97	11.27	52.24	Average Max	V	120	298	54	-1.76	Pass
1595.94	40.98	10.73	-3.37	48.34	Average Max	V	253	356	54	-5.66	Pass
1330.36	32.17	10.56	-3.82	38.91	Average Max	H	231	38	54	-15.09	Pass
1862.25	28.68	10.40	-0.88	38.20	Average Max	H	197	96	54	-15.80	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5240MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5240 MHz

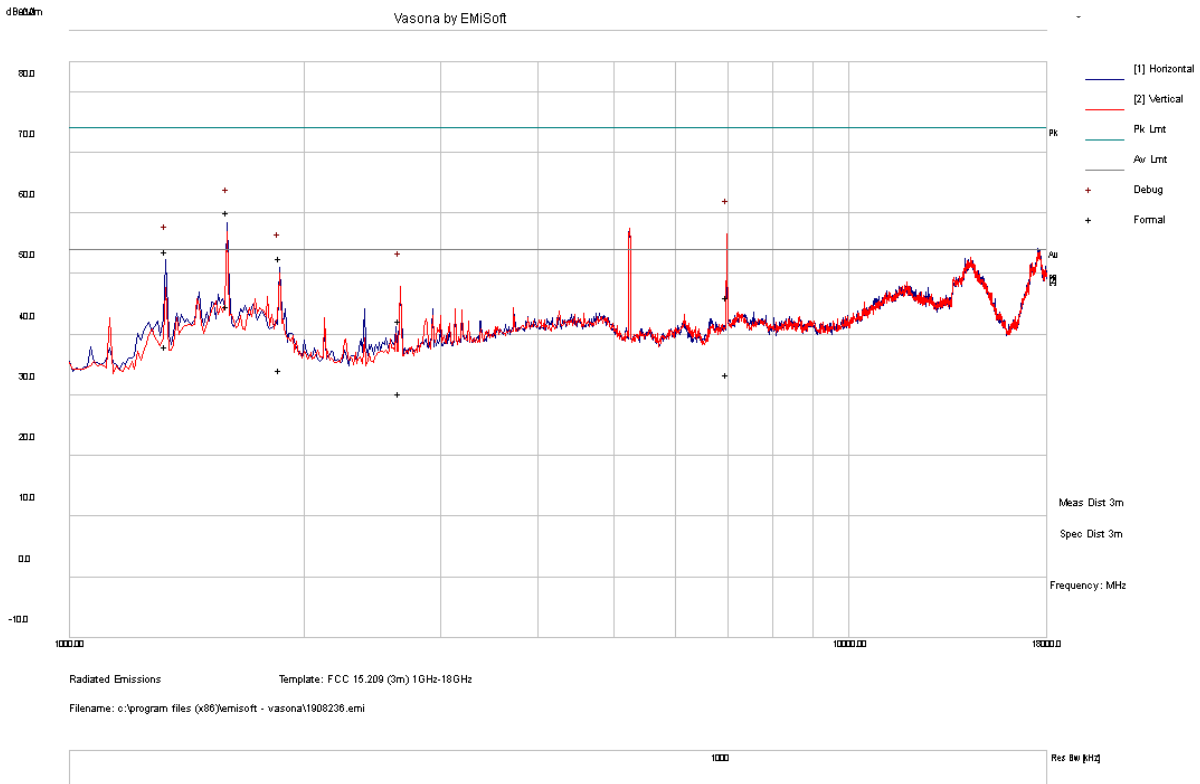

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1596.06	52.81	10.73	-3.36	60.18	Peak Max	H	171	28	74	-13.82	Pass
6986.63	30.89	16.02	11.21	58.12	Peak Max	V	114	302	74	-15.88	Pass
1329.81	46.99	10.56	-3.81	53.74	Peak Max	H	251	210	74	-20.26	Pass
1861.79	43.11	10.40	-0.88	52.64	Peak Max	H	267	104	74	-21.36	Pass
2658.87	30.09	10.98	1.30	42.38	Peak Max	V	115	162	74	-31.63	Pass
1596.06	37.41	10.73	-3.36	44.78	Average Max	H	171	28	54	-9.22	Pass
6986.63	25.66	16.02	11.21	52.90	Average Max	V	114	302	54	-1.10	Pass
1329.81	31.38	10.56	-3.81	38.12	Average Max	H	251	210	54	-15.88	Pass
1861.79	24.64	10.40	-0.88	34.16	Average Max	H	267	104	54	-19.84	Pass
2658.87	17.95	10.98	1.30	30.24	Average Max	V	115	162	54	-23.76	Pass



Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval


1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5260MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5260 MHz

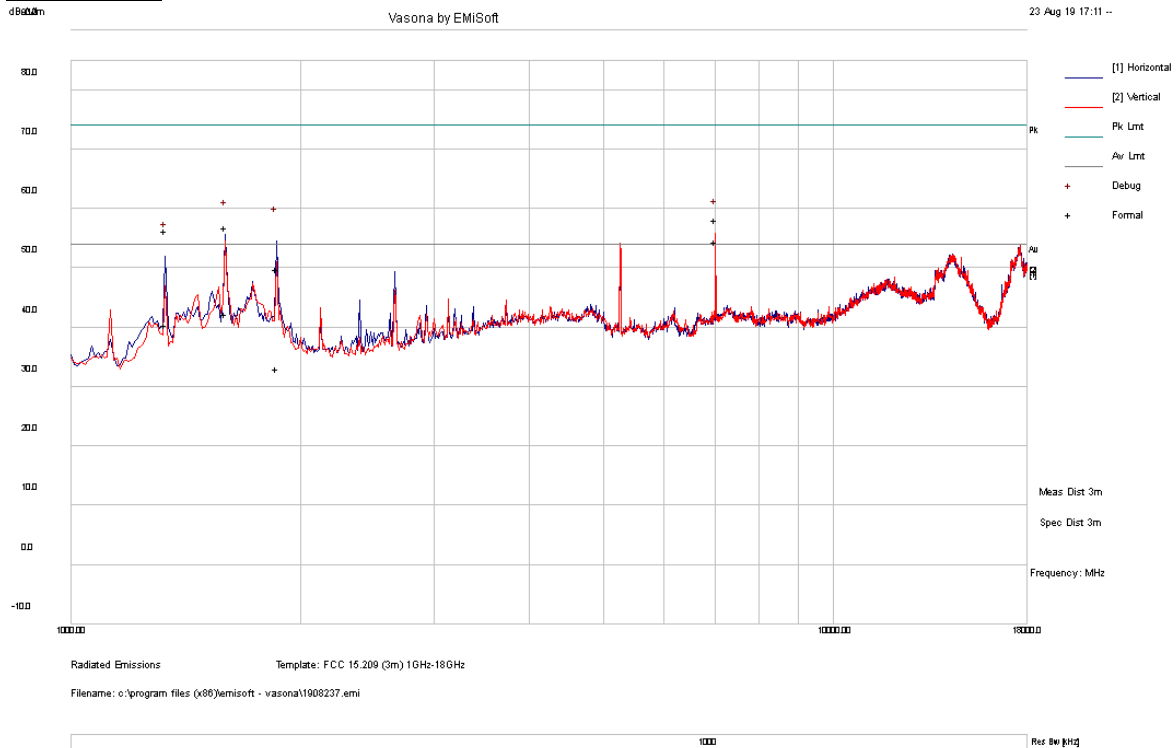

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
7013.38	30.75	16.08	11.24	58.06	Peak Max	V	101	298	74	-15.94	Pass
1596.08	49.52	10.73	-3.36	56.89	Peak Max	H	242	82	74	-17.11	Pass
1862.44	40.32	10.40	-0.88	49.84	Peak Max	H	360	255	74	-24.16	Pass
1330.00	49.56	10.56	-3.81	56.31	Peak Max	H	108	309	74	-17.69	Pass
7013.38	25.12	16.08	11.24	52.43	Average Max	V	101	298	54	-1.57	Pass
1596.08	34.99	10.73	-3.36	42.36	Average Max	H	242	82	54	-11.64	Pass
1862.44	23.52	10.40	-0.88	33.04	Average Max	H	360	255	54	-20.96	Pass
1330.00	33.78	10.56	-3.81	40.53	Average Max	H	108	309	54	-13.47	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5300MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5300 MHz

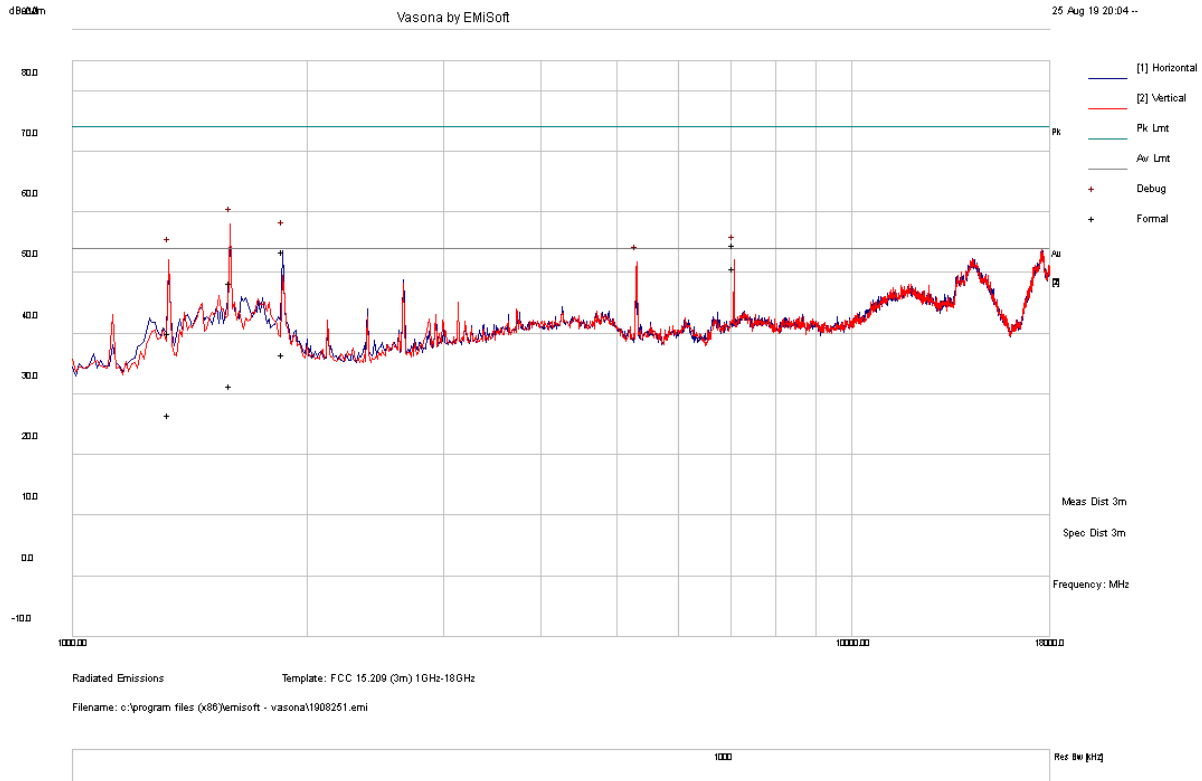

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1595.26	41.10	10.73	-3.37	48.46	Peak Max	V	300	195	74	-25.54	Pass
1862.64	44.06	10.40	-0.88	53.58	Peak Max	V	149	348	74	-20.42	Pass
7066.70	27.11	16.18	11.40	54.69	Peak Max	V	165	290	74	-19.31	Pass
1329.36	33.31	10.56	-3.81	40.06	Peak Max	V	168	217	74	-33.95	Pass
1595.26	24.02	10.73	-3.37	31.38	Average Max	V	300	195	54	-22.62	Pass
1862.64	27.07	10.40	-0.88	36.60	Average Max	V	149	348	54	-17.41	Pass
7066.70	23.11	16.18	11.40	50.69	Average Max	V	165	290	54	-3.31	Pass
1329.36	19.89	10.56	-3.81	26.64	Average Max	V	168	217	54	-27.36	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5320MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5320 MHz

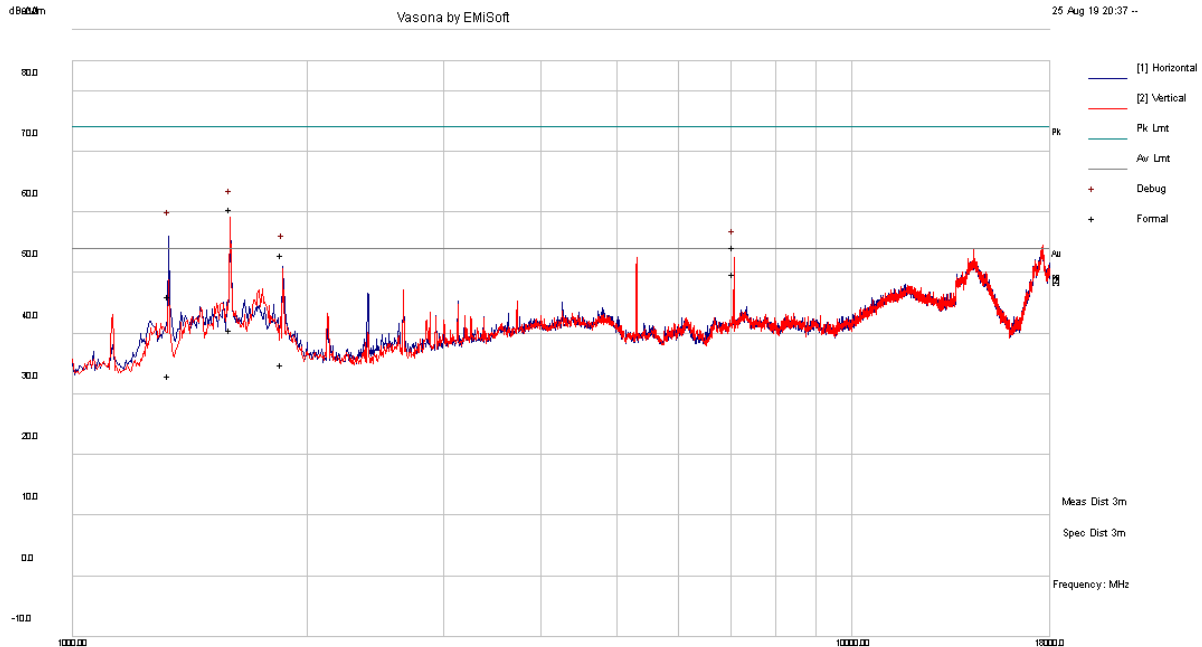

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz
 Filename: c:\program files (x86)\emisoft - vasona\1908252.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1595.70	53.10	10.73	-3.37	60.47	Peak Max	V	239	360	74	-13.53	Pass
1330.74	39.50	10.56	-3.82	46.25	Peak Max	V	100	245	74	-27.75	Pass
7066.52	26.75	16.18	11.40	54.33	Peak Max	V	116	288	74	-19.67	Pass
1860.70	43.42	10.41	-0.88	52.95	Peak Max	V	195	6	74	-21.05	Pass
1595.70	33.24	10.73	-3.37	40.60	Average Max	V	239	360	54	-13.40	Pass
1330.74	26.34	10.56	-3.82	33.09	Average Max	V	100	245	54	-20.91	Pass
7066.52	22.22	16.18	11.40	49.80	Average Max	V	116	288	54	-4.20	Pass
1860.70	25.36	10.41	-0.88	34.89	Average Max	V	195	6	54	-19.11	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5500MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5500 MHz

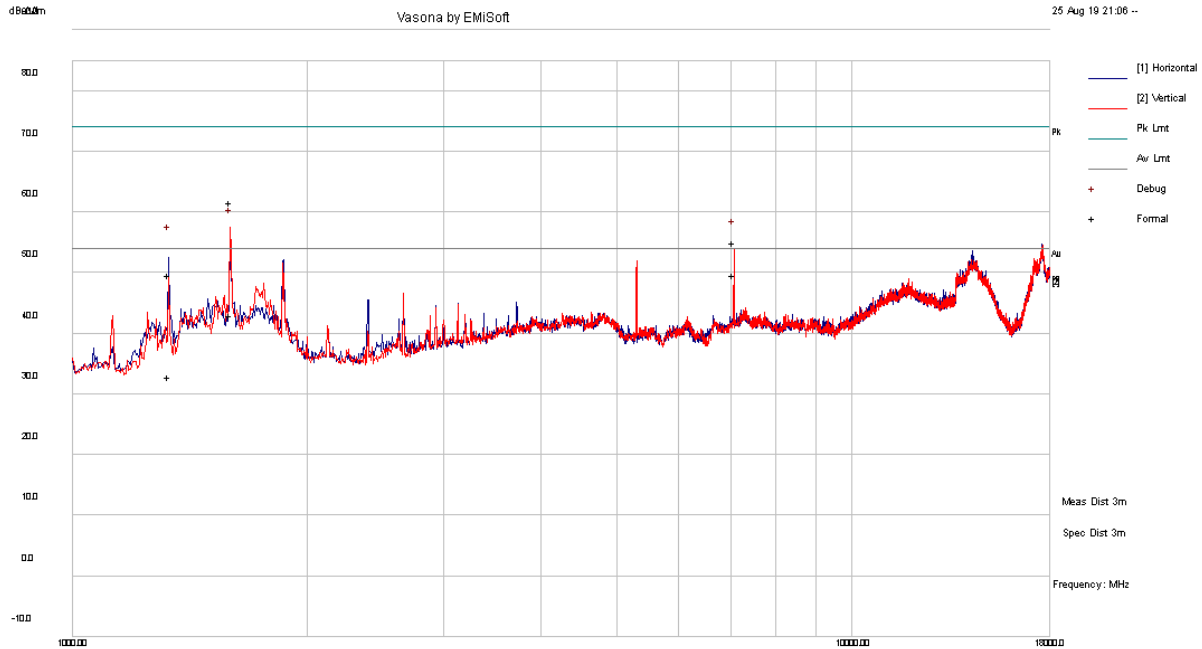

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz
 Filename: c:\program files (x86)\emisoft - vasona\1908253.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1596.85	54.21	10.73	-3.36	61.58	Peak Max	V	271	0	74	-12.42	Pass
7066.42	27.40	16.18	11.40	54.99	Peak Max	V	143	289	74	-19.01	Pass
1328.93	42.95	10.56	-3.81	49.70	Peak Max	V	343	305	74	-24.30	Pass
1596.85	35.59	10.73	-3.36	42.97	Average Max	V	271	0	54	-11.03	Pass
7066.42	22.09	16.18	11.40	49.67	Average Max	V	143	289	54	-4.33	Pass
1328.93	26.05	10.56	-3.81	32.80	Average Max	V	343	305	54	-21.20	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5580MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5580 MHz

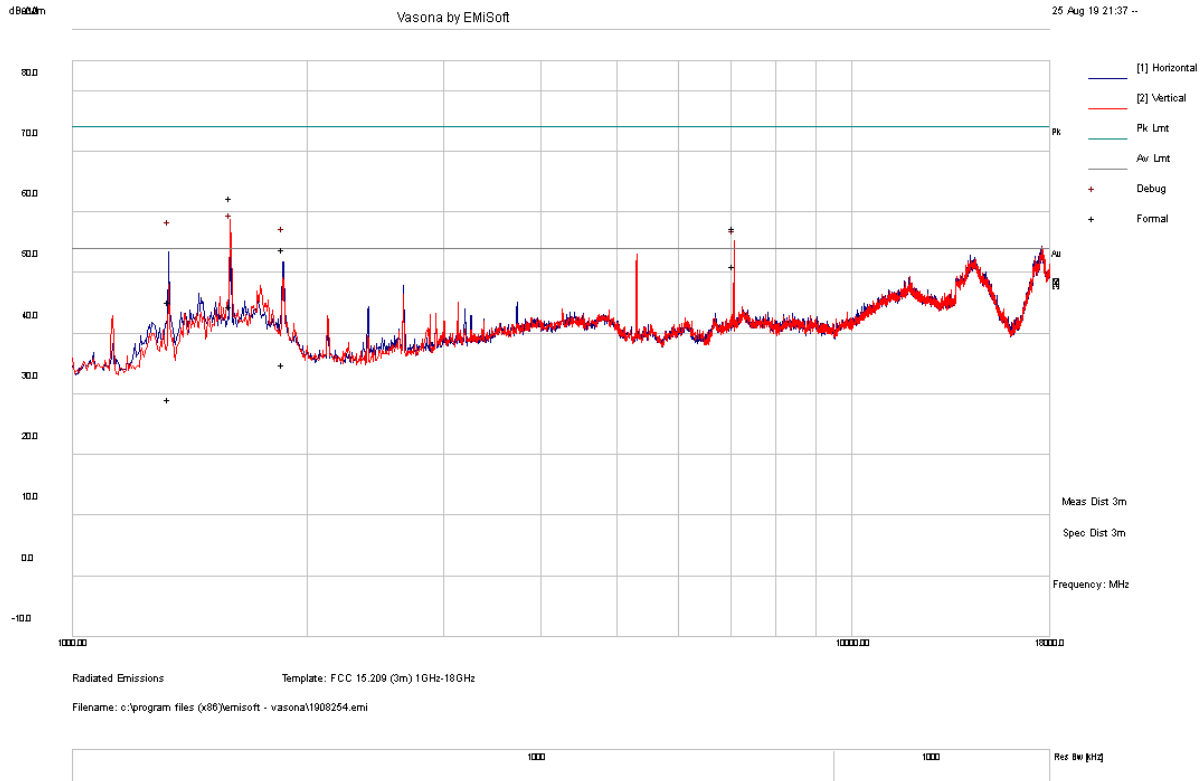

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1597.14	55.04	10.73	-3.36	62.42	Peak Max	V	187	0	74	-11.58	Pass
1330.39	38.54	10.56	-3.82	45.29	Peak Max	V	132	268	74	-28.71	Pass
1862.89	44.34	10.40	-0.88	53.87	Peak Max	V	298	309	74	-20.13	Pass
7066.52	29.75	16.18	11.40	57.33	Peak Max	V	204	298	74	-16.67	Pass
1597.14	37.17	10.73	-3.36	44.54	Average Max	V	187	0	54	-9.46	Pass
1330.39	22.42	10.56	-3.82	29.17	Average Max	V	132	268	54	-24.83	Pass
1862.89	25.32	10.40	-0.88	34.84	Average Max	V	298	309	54	-19.16	Pass
7066.52	23.59	16.18	11.40	51.17	Average Max	V	204	298	54	-2.83	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5580MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5700 MHz

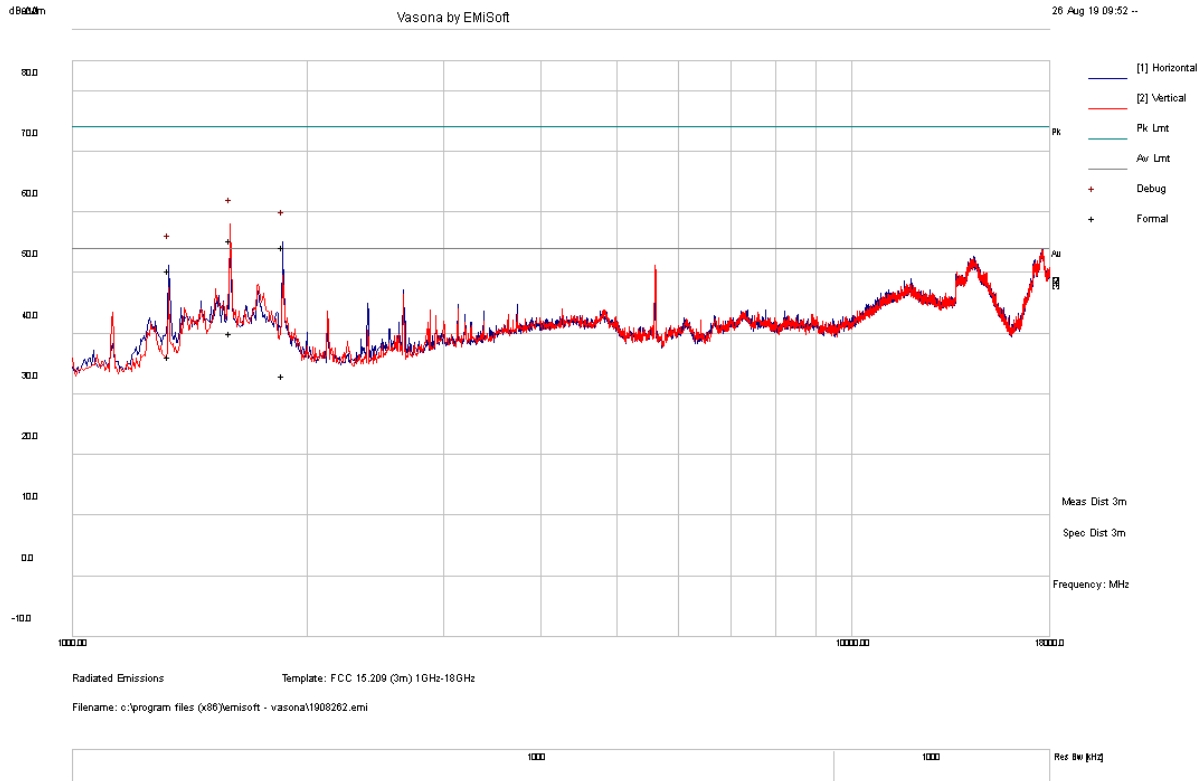

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1596.49	47.95	10.73	-3.36	55.32	Peak Max	V	268	239	74	-18.68	Pass
1862.02	44.69	10.40	-0.88	54.22	Peak Max	V	116	317	74	-19.78	Pass
1330.65	43.63	10.56	-3.82	50.38	Peak Max	V	104	263	74	-23.62	Pass
1596.49	32.75	10.73	-3.36	40.12	Peak Max	V	268	239	54	-13.88	Pass
1862.02	23.56	10.40	-0.88	33.09	Average Max	V	116	317	54	-20.91	Pass
1330.65	29.41	10.56	-3.82	36.16	Average Max	V	104	263	54	-17.84	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5745MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5745 MHz

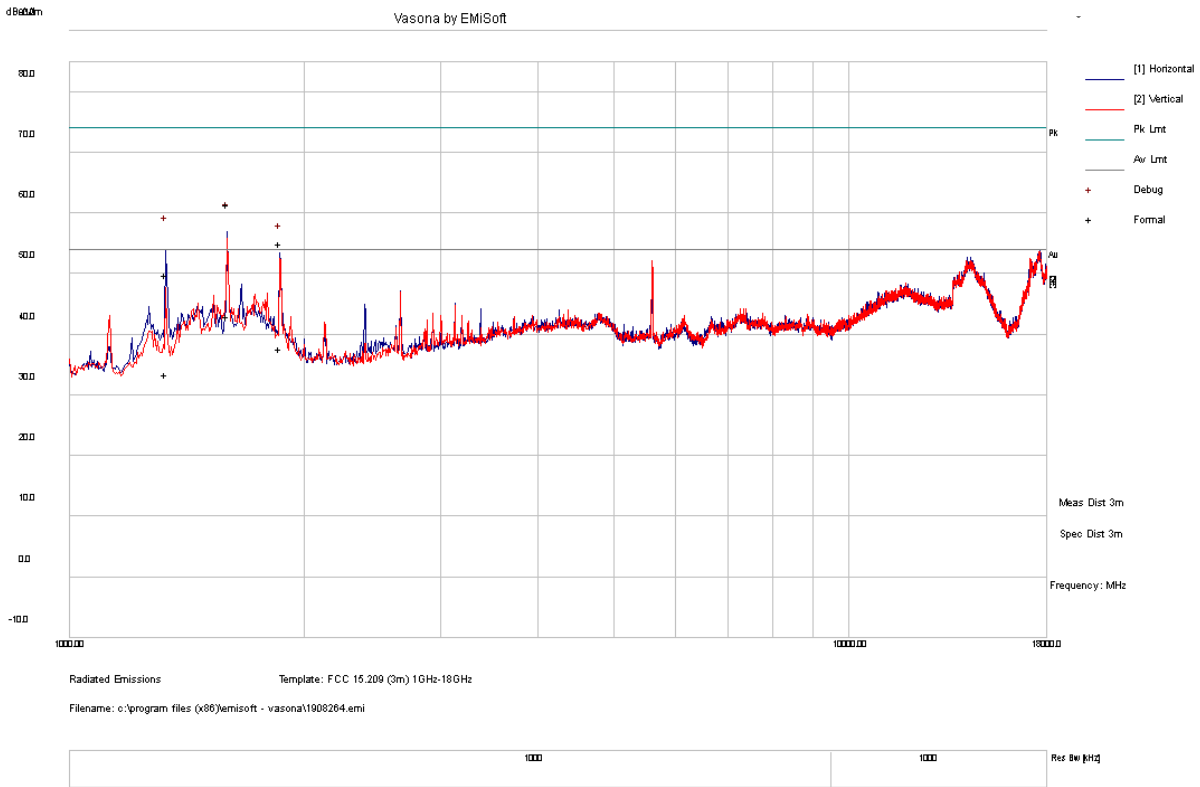

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1594.85	54.13	10.73	-3.37	61.50	Peak Max	V	206	352	74	-12.51	Pass
1330.30	43.04	10.56	-3.82	49.79	Peak Max	V	377	346	74	-24.22	Pass
1862.81	45.54	10.40	-0.88	55.06	Peak Max	V	180	6	74	-18.94	Pass
1594.85	35.59	10.73	-3.37	42.95	Average Max	V	206	352	54	-11.05	Pass
1330.30	26.69	10.56	-3.82	33.44	Average Max	V	377	346	54	-20.56	Pass
1862.81	28.10	10.40	-0.88	37.63	Average Max	V	180	6	54	-16.37	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5785MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5785 MHz

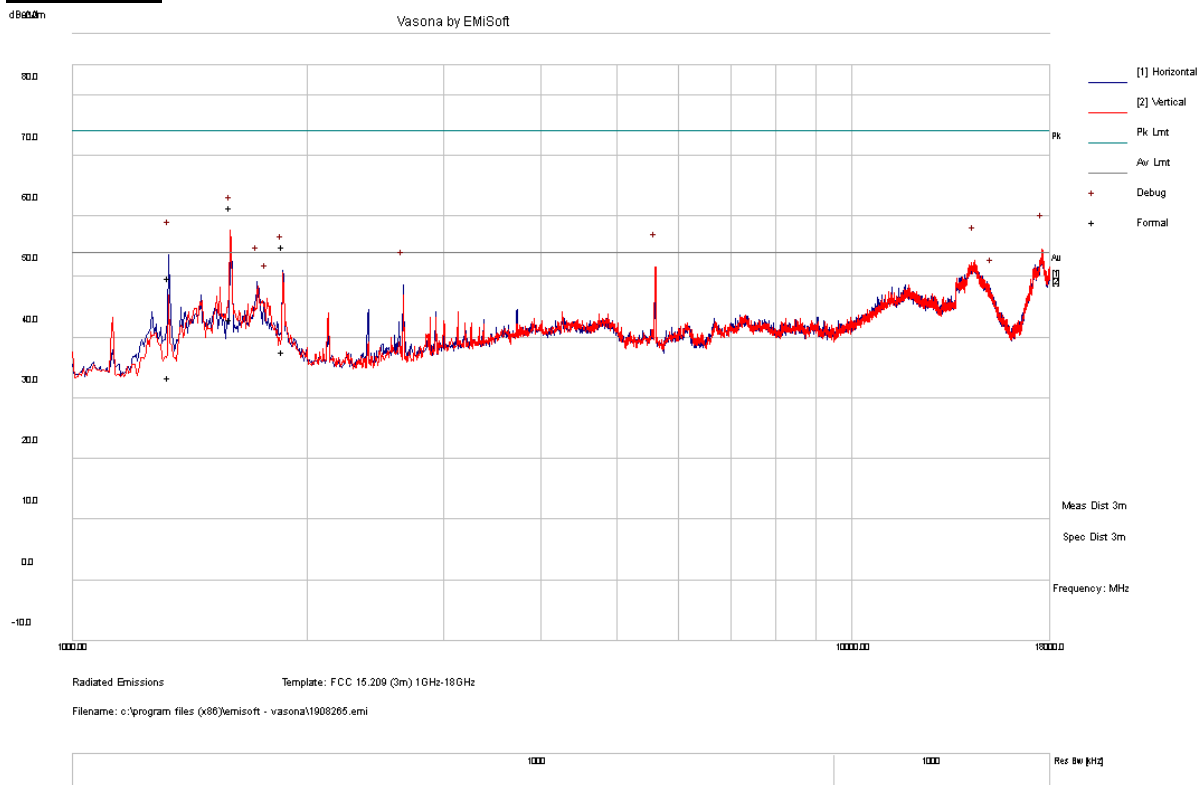

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1594.85	54.13	10.73	-3.37	61.50	Peak Max	V	206	352	74	-12.51	Pass
1330.30	43.04	10.56	-3.82	49.79	Peak Max	V	377	346	74	-24.22	Pass
1862.81	45.54	10.40	-0.88	55.06	Peak Max	V	180	6	74	-18.94	Pass
1594.85	35.59	10.73	-3.37	42.95	Average Max	V	206	352	54	-11.05	Pass
1330.30	26.69	10.56	-3.82	33.44	Average Max	V	377	346	54	-20.56	Pass
1862.81	28.10	10.40	-0.88	37.63	Average Max	V	180	6	54	-16.37	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	5825MHz
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

5825 MHz

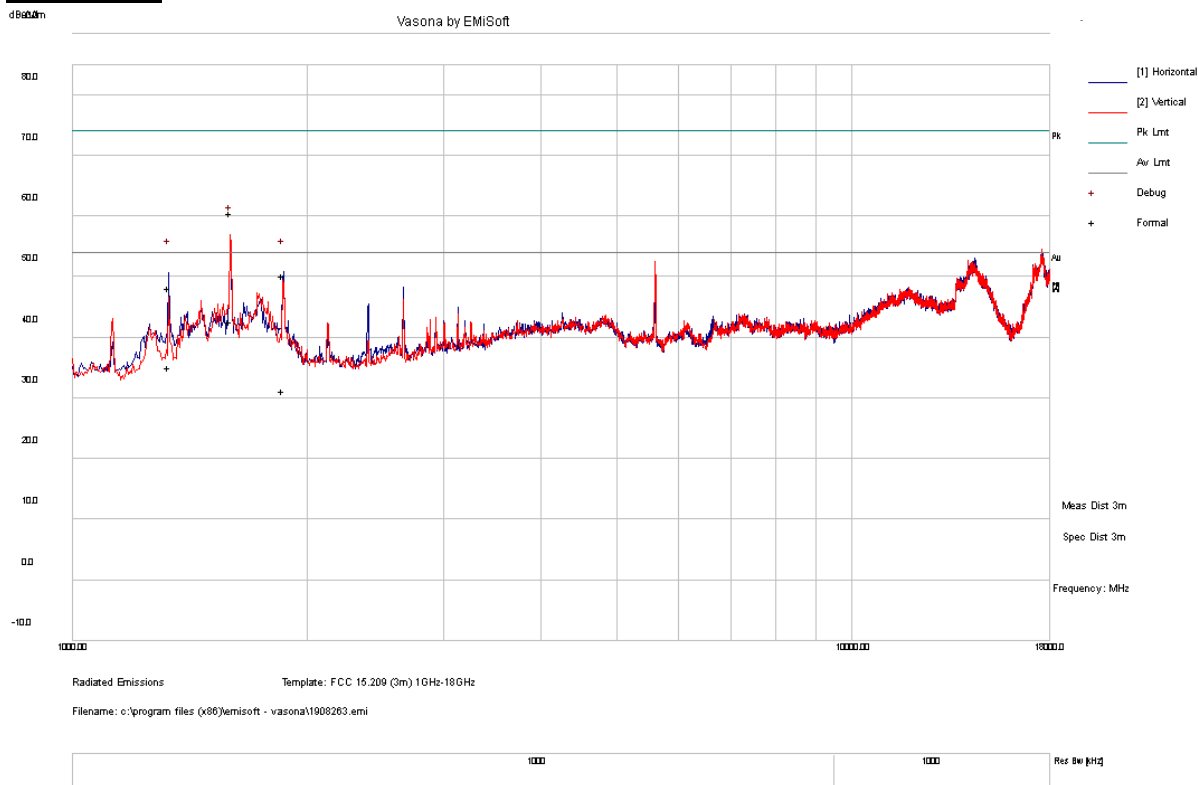

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1596.42	53.15	10.73	-3.36	60.52	Peak Max	V	154	0	74	-13.48	Pass
1864.28	40.63	10.40	-0.88	50.15	Peak Max	V	253	314	74	-23.85	Pass
1330.48	41.53	10.56	-3.82	48.27	Peak Max	V	133	248	74	-25.73	Pass
1596.42	35.25	10.73	-3.36	42.62	Average Max	V	154	0	54	-11.38	Pass
1864.28	21.72	10.40	-0.88	31.24	Average Max	V	253	314	54	-22.76	Pass
1330.48	28.31	10.56	-3.82	35.06	Average Max	V	133	248	54	-18.94	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval


1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com

Report Number: HME-19081322-LC-FCC-NII
Product: Base Transceiver
Model Number: 1408-US



Test Standard:	15.209, 15.407	Mode:	BLE+5GHz co-located
Frequency Range:	1 - 18 GHz	Test Date:	12/09/2019 - 12/30/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

BLE+5GHz co-located

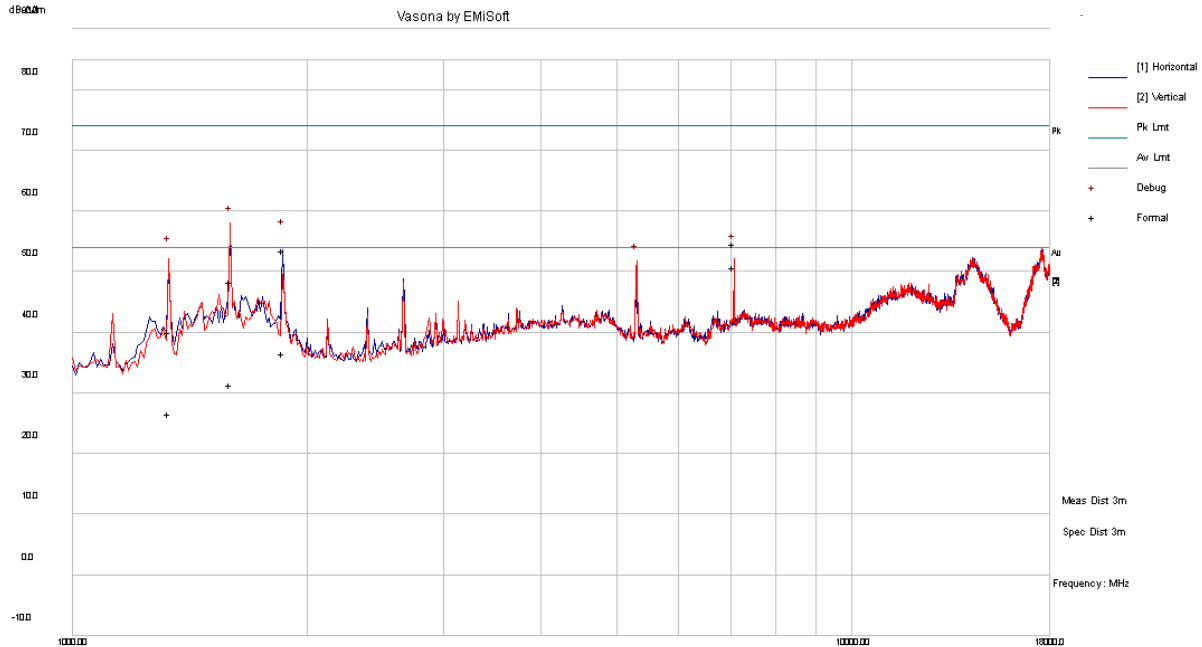

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz
 Filename: c:\program files (x86)\emisoft - vasona\1908261.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
1595.26	41.10	10.73	-3.37	48.46	Peak Max	V	300	195	74	-25.54	Pass
1862.64	44.06	10.40	-0.88	53.58	Peak Max	V	149	348	74	-20.42	Pass
7066.70	27.11	16.18	11.40	54.69	Peak Max	V	165	290	74	-19.31	Pass
1329.36	33.31	10.56	-3.81	40.06	Peak Max	V	168	217	74	-33.95	Pass
1595.26	24.02	10.73	-3.37	31.38	Average Max	V	300	195	54	-22.62	Pass
1862.64	27.07	10.40	-0.88	36.60	Average Max	V	149	348	54	-17.41	Pass
7066.70	23.11	16.18	11.40	50.69	Average Max	V	165	290	54	-3.31	Pass
1329.36	19.89	10.56	-3.81	26.64	Average Max	V	168	217	54	-27.36	Pass



Electromagnetic Compatibility
 Radio Frequency
 Product Certification
 International Approval

1261 Puerta Del Sol
 San Clemente, CA, 92673
 +1 (949) 393-1123
www.vista-compliance.com


Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US




18GHz – 40GHz test result


Note: no substantial emission is found other than the noise floor.

Radiated Band Edge measurement result

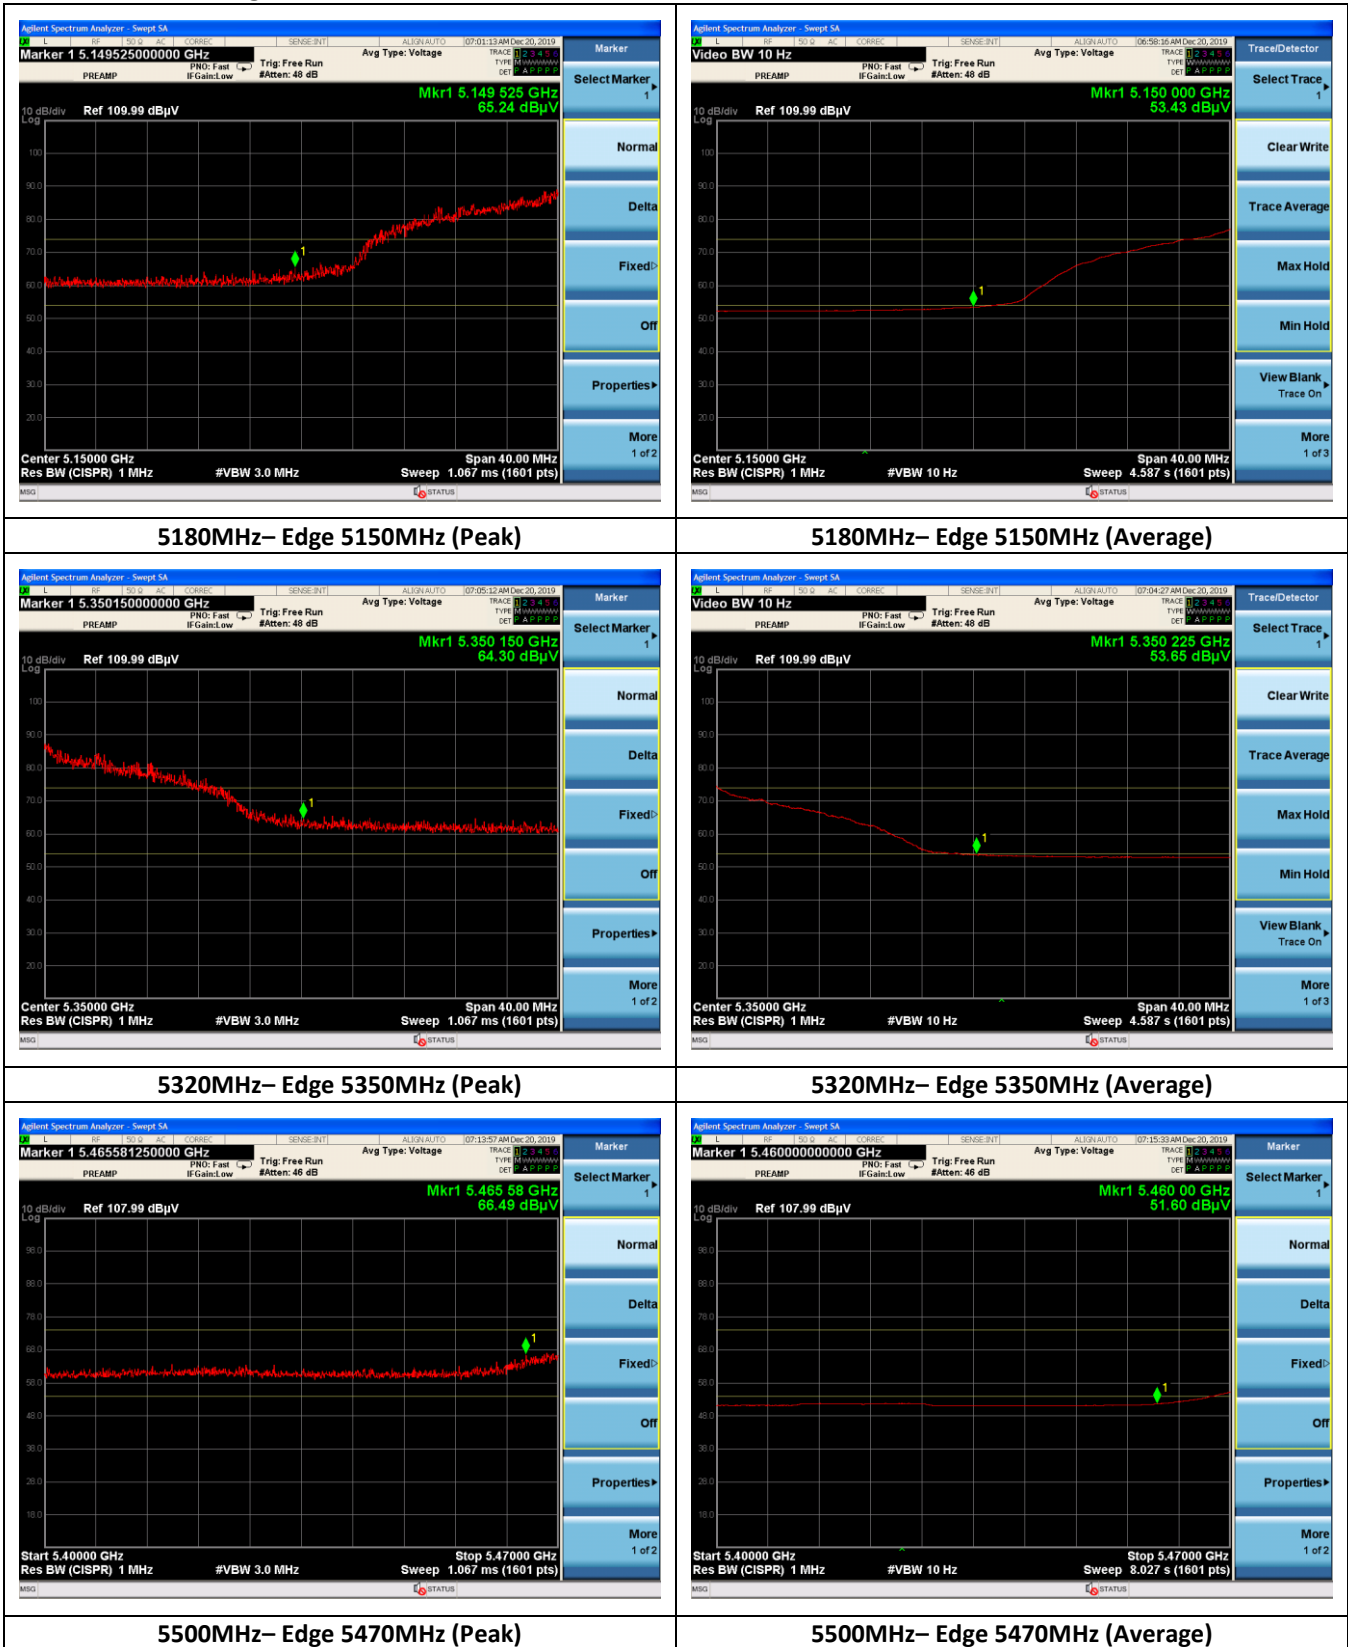


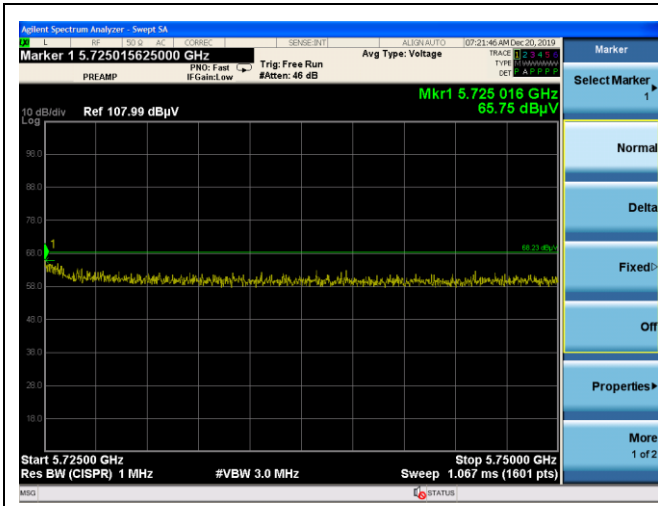

5700MHz– Edge 5725MHz (Peak)

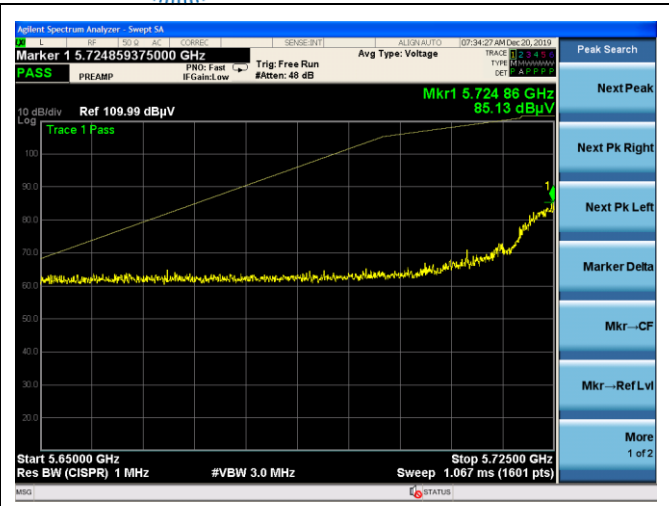

5745MHz– Edge 5725MHz (Peak)

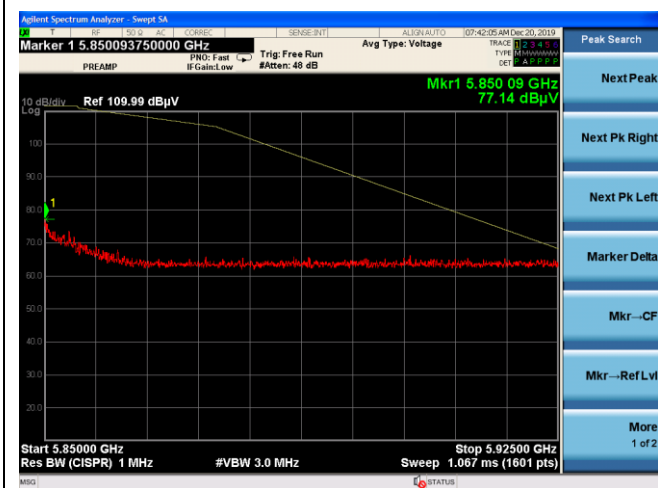

5825MHz– Edge 5850MHz (Peak)



8.8 Conducted Emissions

8.8.1 Requirement


Per § 15.207 (a), an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limits for Conducted Emissions at the Mains Ports

Section	Frequency ranges (MHz)	Limit (dBuV)	
		QP	Average
Class B devices	0.15 – 0.5	66 – 56	56 – 46
	0.5 – 5	56	46
	5 - 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.

8.8.2 Test setup

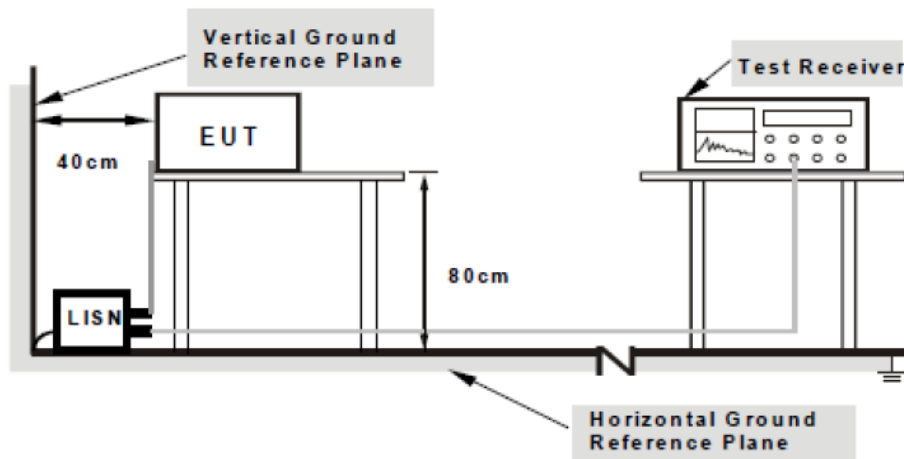

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.8.3 Test Procedure

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment was powered separately from another main supply.
5. The EUT was switched on and allowed to warm up to its normal operating condition.
6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
7. High peaks, relative to the limit line, were then selected.
8. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made
9. All possible modes of operation were investigated. Only the worst case emissions were measured and reported. All other emissions were relatively insignificant.


Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



8.8.4 Test Result

Neutral Line

Test Standard:	Part 15.207	Mode:	Neutral, AC/DC adapter
Frequency Range:	0.15-30MHz	Test Date:	11/20/2019
Antenna Type/Polarity:	N/A	Test Personnel:	David Zhang
Remark:	Class B, 120VAC, 60Hz	Test Result:	Pass

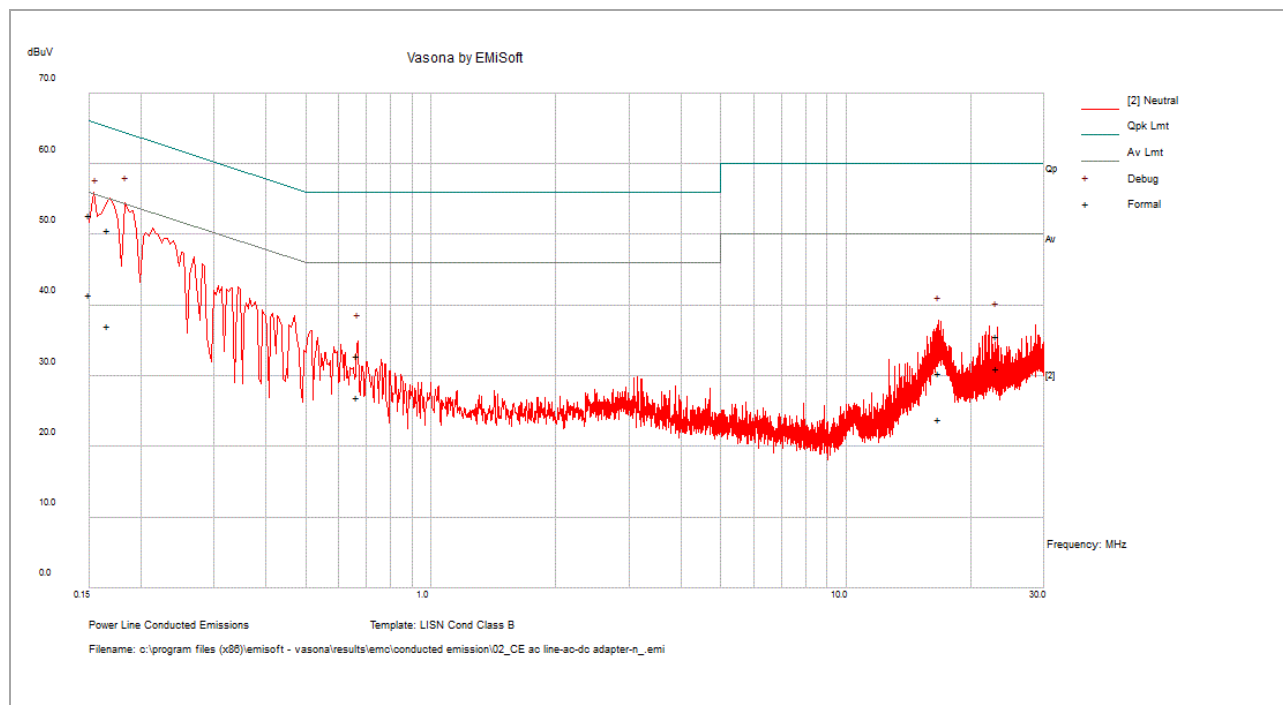

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Meas. Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.17	40.30	10.10	0.20	50.60	QP	Neutral	65.10	-14.60	Pass
0.15	42.50	10.10	0.20	52.80	QP	Neutral	66.00	-13.20	Pass
0.66	22.70	10.10	0.10	32.90	QP	Neutral	56.00	-23.10	Pass
16.77	19.20	10.70	0.40	30.30	QP	Neutral	60.00	-29.70	Pass
23.13	24.20	10.80	0.60	35.60	QP	Neutral	60.00	-24.40	Pass
0.17	26.80	10.10	0.20	37.10	AV	Neutral	55.10	-18.00	Pass
0.15	31.10	10.10	0.20	41.40	AV	Neutral	56.00	-14.60	Pass
0.66	16.80	10.10	0.10	27.00	AV	Neutral	46.00	-19.00	Pass
16.77	12.80	10.70	0.40	23.90	AV	Neutral	50.00	-26.10	Pass
23.13	19.70	10.80	0.60	31.10	AV	Neutral	50.00	-18.90	Pass




Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval

1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

Live Line

Test Standard:	Part 15.207	Mode:	Line, AC/DC adapter
Frequency Range:	0.15-30MHz	Test Date:	11/20/2019
Antenna Type/Polarity:	N/A	Test Personnel:	David Zhang
Remark:	Class B, 120VAC, 60Hz	Test Result:	Pass

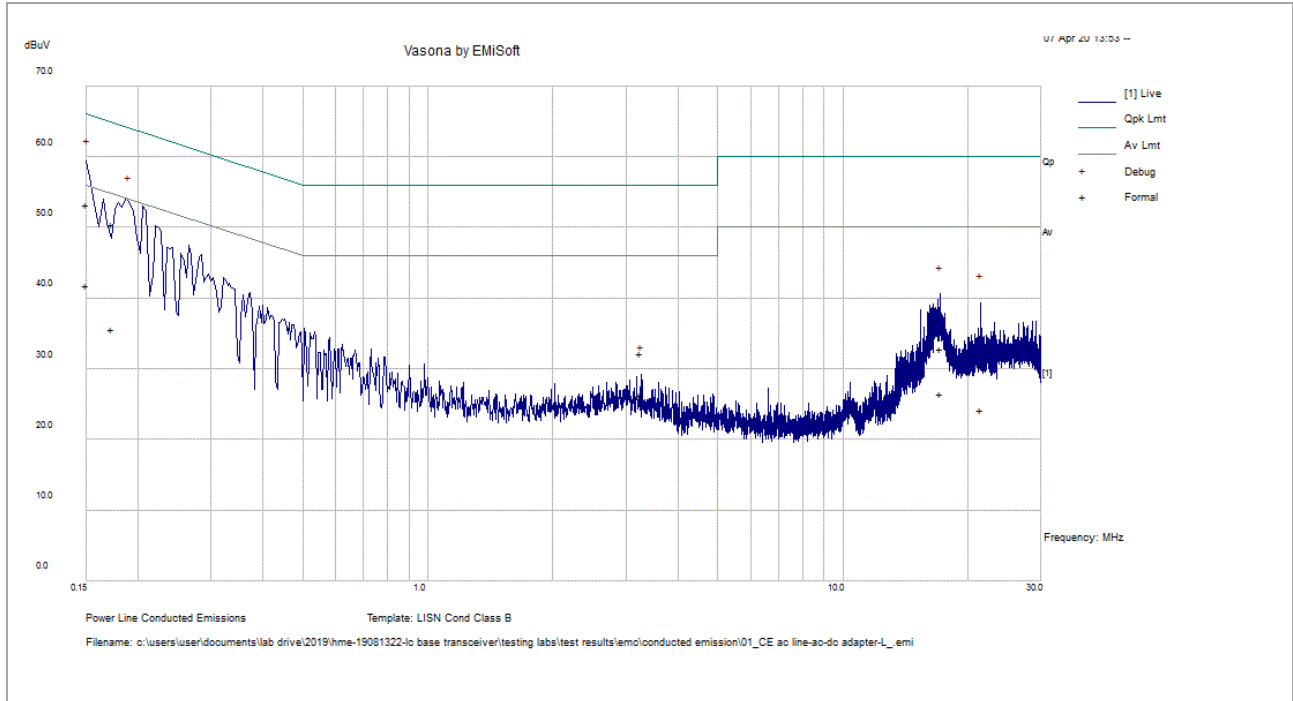

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Meas. Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.15	42.90	10.10	0.20	53.20	QP	Live	66.00	-12.80	Pass
0.17	40.20	10.10	0.20	50.40	QP	Live	64.80	-14.40	Pass
17.18	21.70	10.70	0.50	32.90	QP	Live	60.00	-27.10	Pass
21.52	19.00	10.80	0.60	30.30	QP	Live	60.00	-29.70	Pass
3.26	21.80	10.30	0.10	32.30	QP	Live	56.00	-23.70	Pass
0.15	31.50	10.10	0.20	41.80	AV	Live	56.00	-14.20	Pass
0.17	25.30	10.10	0.20	35.60	AV	Live	54.80	-19.20	Pass
17.18	15.20	10.70	0.50	26.40	AV	Live	50.00	-23.60	Pass
21.52	12.80	10.80	0.60	24.20	AV	Live	50.00	-25.80	Pass
3.26	15.90	10.30	0.10	26.30	AV	Live	46.00	-19.70	Pass

Report Number:	HME-19081322-LC-FCC-NII
Product:	Base Transceiver
Model Number:	1408-US



9 Test instrument list

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	5/11/2019	5/11/2020
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	5/4/2019	5/4/2020
EMC Test Receiver	R&S	ESL6	100230	5/7/2019	5/7/2020
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	5/4/2019	5/4/2020
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2019	11/15/2020
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	5/2/2019	5/2/2020
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	5/2/2019	5/2/2020
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	5/10/2019	5/10/2020
True RMS Multi-meter	UNI-T	UT181A	C173014829	5/10/2019	5/10/2020
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	5/9/2019	5/9/2020
RF Attenuator	Pasternack	PE7005-3	VL061	5/10/2019	5/10/2020
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	5/10/2019	5/10/2020
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	5/9/2019	5/9/2020
RE test cable (below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	5/10/2019	5/10/2020
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	5/10/2019	5/10/2020
RE test cable (>18GHz)	Sucoflex	104	344903/4	5/10/2019	5/10/2020
Pulse limiter	Com-Power	LIT-930A	531727	5/15/2019	5/15/2020
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	5/10/2019	5/10/2020
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	5/9/2019	5/9/2020
Wideband Communication	R&S	CMW500	147508	5/8/2019	5/8/2020