

## FCC ISED RF Test Report

<b>Test Report Number</b>	HME-20080441-LC-FCC-IC-DTS
<b>FCC ID</b> <b>ISED ID</b>	BYM7002 1860A-7002
<b>Applicant</b>	HM Electronics Inc
<b>Applicant Address</b>	2848 Whiptail Loop, Carlsbad, CA 92010 USA
<b>Product Name</b>	Nexeo AIO headset
<b>Model (s)</b>	7002
<b>Date of Receipt</b>	09/01/2020
<b>Date of Test</b>	09/01/2020 – 10/26/2020
<b>Report Issue Date</b>	10/27/2020
<b>Test Standards</b>	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017
<b>Test Result</b>	<b>PASS</b>
	<p>Issued by:</p> <p><b>Vista Compliance Laboratories</b>          1261 Puerta Del Sol, San Clemente, CA 92673 USA  <a href="http://www.vista-compliance.com">www.vista-compliance.com</a></p>
 <hr style="width: 80%; margin: 0 auto;"/> <p><b>Daniel Bruno (Test Technician)</b></p>	 <hr style="width: 80%; margin: 0 auto;"/> <p><b>David Zhang (Technical Manager)</b></p>
<p><small>This report is for the exclusive use of the applicant. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Note that the results contained in this report pertain only to the test samples identified herein, and the results relate only to the items tested and the results that were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested and the results thereof based upon the information provided to us. The applicant has 60 days from date of issuance of this report to notify us of any material error or omission. Failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.</small></p>	

### REVISION HISTORY

Report Number	Version	Description	Issued Date
HME-20080441-LC-FCC-IC-DTS	01	Initial report	10/27/2020

**TABLE OF CONTENTS**

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>4</b>
<b>2</b>	<b>GENERAL INFORMATION.....</b>	<b>5</b>
2.1	Applicant.....	5
2.2	Product information.....	5
2.3	Test standard and method .....	6
<b>3</b>	<b>TEST SITE INFORMATION.....</b>	<b>6</b>
<b>4</b>	<b>MODIFICATION OF EUT / DEVIATIONS FROM STANDARDS.....</b>	<b>6</b>
<b>5</b>	<b>TEST CONFIGURATION AND OPERATION.....</b>	<b>6</b>
5.1	EUT Test Configuration.....	6
5.2	Supporting Equipment .....	7
<b>6</b>	<b>UNCERTAINTY OF MEASUREMENT .....</b>	<b>8</b>
<b>7</b>	<b>TEST RESULTS.....</b>	<b>9</b>
7.1	Antenna Requirement .....	9
7.2	DTS (6 dB) Bandwidth .....	10
7.3	Occupied Bandwidth (99%).....	13
7.4	Maximum Output Power.....	16
7.5	Power Spectral Density.....	19
7.6	Conducted Band-Edge Measurement.....	22
7.7	Radiated Band-Edge & Spurious Emissions into Restricted Frequency Bands .....	24
<b>8</b>	<b>EUT AND TEST SETUP PHOTOS.....</b>	<b>36</b>
<b>9</b>	<b>TEST INSTRUMENT LIST .....</b>	<b>37</b>

## 1 Test Summary

Test Item	Test Requirement	Test Method	Result
Antenna Requirement	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	Pass
DTS (6 dB) Channel Bandwidth	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	Pass
Occupied Bandwidth	RSS-Gen Issue 5, Mar 2019	RSS-Gen Issue 5, Mar 2019	Pass
Conducted Maximum Output Power	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	Pass
Power Spectral Density	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	Pass
Conducted Band-Edge & Unwanted Emissions	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	Pass
Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	Pass
AC Power Line Conducted Emissions	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017	ANSI C63.10 (2013)	N/A1)

Note: EUT is battery operated and does not connect to AC power line directly or indirectly.

## 2 General Information

### 2.1 Applicant

<b>Applicant</b>	HM Electronics Inc
<b>Applicant address</b>	2848 Whiptail Loop, Carlsbad, CA 92010 USA
<b>Manufacturer</b>	HM Electronics Inc
<b>Manufacturer Address</b>	2848 Whiptail Loop, Carlsbad, CA 92010 USA

### 2.2 Product information

<b>Product Name</b>	Nexeo AIO headset
<b>Model Number</b>	7002
<b>Family Models</b>	N/A
<b>Serial Number</b>	N/A
<b>Frequency Band</b>	<p><b><u>For United states:</u></b>  BLE: 2402-2480MHz  NFC: 13.56MHz (Passive Tag)  5Ghz-20Mhz: 5180-5240Mhz, 5260-5320Mhz, 5500-5720Mhz, 5745-5825Mhz</p> <p><b><u>For Canada (5600-5650MHz blocked):</u></b>  BLE: 2402-2480MHz  NFC: 13.56MHz (Passive Tag)  5GHz: 5180-5240Mhz, 5260-5320Mhz, 5500-5580MHz, 5660-5720MHz, 5745-5825MHz</p>
<b>Type of modulation</b>	BLE: GFSK 5GHz: OFDM NFC: ASK
<b>Equipment Class</b>	DTS, U-NII
<b>Antenna Information</b>	BLE: Internal chip antenna, 0 dBi gain 5GHz: Internal antenna, 1.3 dBi gain NFC: Internal coil antenna
<b>Clock Frequencies</b>	N/A
<b>Input Power</b>	Lithium battery: DC 3.7V
<b>Power Adapter Manufacturer/Model</b>	N/A
<b>Power Adapter SN</b>	N/A
<b>Hardware version</b>	N/A
<b>Software version</b>	N/A
<b>Simultaneous Transmission</b>	BLE and 5GHz can transmit simultaneously.
<b>Additional Info</b>	N/A

## 2.3 Test standard and method

<b>Test standard</b>	47 CFR Part 15.247 RSS-247 Issue 2, Feb 2017
<b>Test method</b>	ANSI C63.10-2013 558074 D01 15.247 Meas Guidance v05r02

## 3 Test Site Information

<b>Lab performing tests</b>	Vista Laboratories, Inc.
<b>Lab Address</b>	1261 Puerta Del Sol, San Clemente, CA 92673 USA
<b>Phone Number</b>	+1 (949) 393-1123
<b>Website</b>	www.vista-compliance.com

Test Condition	Temperature	Humidity	Atmospheric Pressure
RF Testing	23.5°C	58.2%	996 mbar
Radiated Emission Testing	23.5°C	58.2%	996 mbar

## 4 Modification of EUT / Deviations from Standards

The EUT is an engineering test sample loaded with RF testing firmware specifically designed to support the RF TX/RX measurement in different aspects.

## 5 Test Configuration and Operation

### 5.1 EUT Test Configuration

The EUT is powered by removable battery. EUT was set to continuous transmission mode during TX testing.

The following software was used for testing.

Software	Description
EMISoft Vasona	EMC/RF Spurious emission test software used during testing
cmd.exe	To set EUT into continuous TX and RX mode under different modulation, data rate and channel, etc.
RTX EAI Port Server	Establish communication between test laptop and EUT

## 5.2 Supporting Equipment

Description	Manufacturer	Model #	Serial #
Laptop	Dell	Latitude E6440	FFF4JC2

## 6 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
RF Output Power (Conducted)	±1.2 dB
Power Spectral Density	±0.9 dB
Unwanted Emission (conducted)	±2.6 dB
Occupied Channel Bandwidth	±5 %
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB



## 7 Test Results

### 7.1 Antenna Requirement

#### 7.1.1 Requirement

Per § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 7.1.2 Result

Analysis:

- EUT uses internal chip antenna. No standard RF connector is used.

Conclusion:

- EUT complies with antenna requirement in § 15.203.


## 7.2 DTS (6 dB) Bandwidth

### 7.2.1 Requirement

§ 15.247 (a)(2), RSS-247 §5.2

Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 KHz.

### 7.2.2 Test Setup



### 7.2.3 Test Procedure


According to section 8.2, option 2, in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.8 of ANSI C63.10-2013:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Use automatic bandwidth measurement capability on instrument to obtain BW result.

### 7.2.4 Test Result


Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
BLE	2402	1Mbps	521.7	500	Pass
BLE	2440	1Mbps	518.0	500	Pass
BLE	2480	1Mbps	514.8	500	Pass

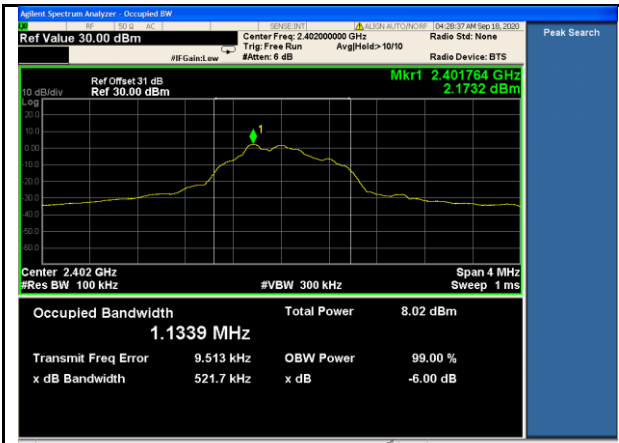

BLE-DTS BW-Low-1Mbps

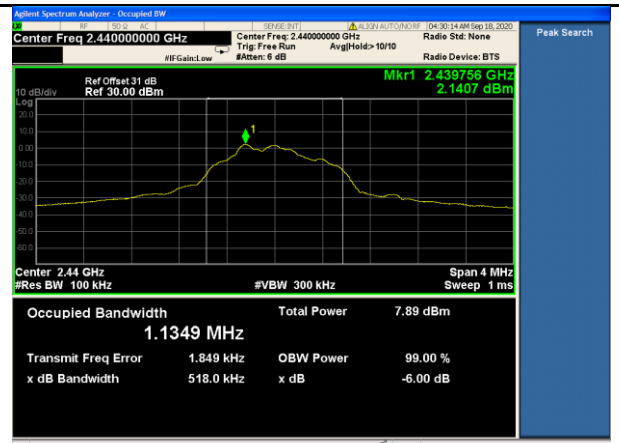

BLE-DTS BW-Mid-1Mbps

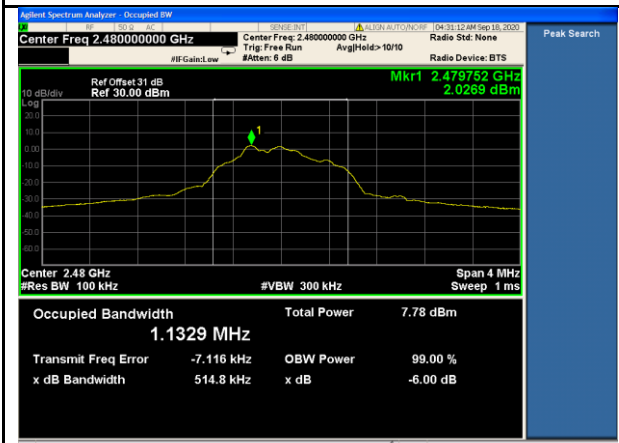

BLE-DTS BW-High-1Mbps

## 7.3 Occupied Bandwidth (99%)

### 7.3.1 Requirement

RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

### 7.3.2 Test Setup



### 7.3.3 Test Procedure

According to section RSS-Gen §6.7

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

1. Set RBW = 1% to 5% of the actual occupied BW.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Span = large enough to capture all products of the modulation process
7. Allow the trace to stabilize.
8. Use automatic bandwidth measurement capability on instrument to obtain BW result.

### 7.3.4 Test Result

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured 99% OBW (KHz)	Limit (KHz)	Result
BLE	2402	1Mbps	1137.8	N/A	Pass
BLE	2440	1Mbps	1137.4	N/A	Pass
BLE	2480	1Mbps	1133.6	N/A	Pass

### 7.3.5 Test Plots



## 7.4 Maximum Output Power


### 7.4.1 Requirement

§ 15.247 (b)(3), RSS-247 §5.4

or systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: the maximum output power is 1 Watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.4.2 Test Setup



### 7.4.3 Test Procedure

For BLE, power measurement is according to subclause 11.9.1.1 of ANSI C63.10-2013:


1. Set the RBW  $\geq$  DTS bandwidth
2. Set VBW  $\geq$  3 X RBW.
2. Set SPAN  $\geq$  3 X RBW.
3. Sweep time = auto couple.
4. Detector = peak.
5. Trace mode = max hold
6. Allow trace to fully stabilize.
7. Use peak marker function to determine the peak amplitude level.



#### 7.4.4 Test Result

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured Output Power (dBm)	Max Output Power (dBm)	Result
BLE	2402	1Mbps	2.175	30	Pass
BLE	2440	1Mbps	2.147	30	Pass
BLE	2480	1Mbps	2.032	30	Pass

### 7.4.5 Test Plots

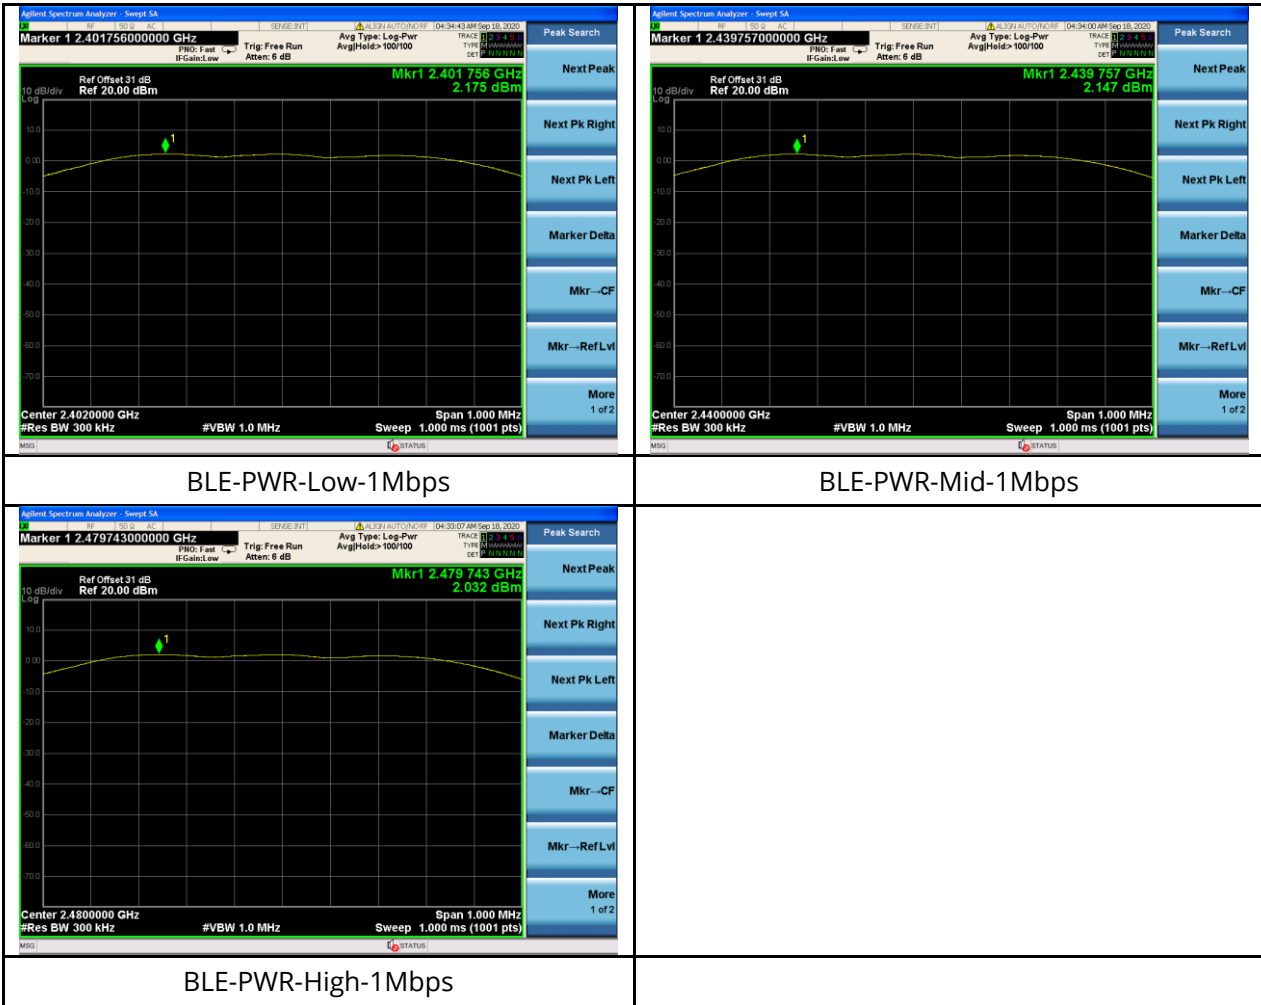


## 7.5 Power Spectral Density

### 7.5.1 Requirement

§ 15.247 (e), RSS-247 §5.2

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power is used to determine the power spectral density.

### 7.5.2 Test Setup



### 7.5.3 Test Procedure


According to section 8.4 in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.10.2 PKPSD of ANSI C63.10-2013:

1. Set analyser centre frequency to DTS channel centre frequency.
2. Set the span to 1.5 X DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.5.4 Test Result

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured PSD (dBm/3KHz)	Max PSD (dBm/3KHz)	Result
BLE	2402	1Mbps	-15.609	8	Pass
BLE	2440	1Mbps	-15.721	8	Pass
BLE	2480	1Mbps	-15.820	8	Pass

### 7.5.5 Test Plots

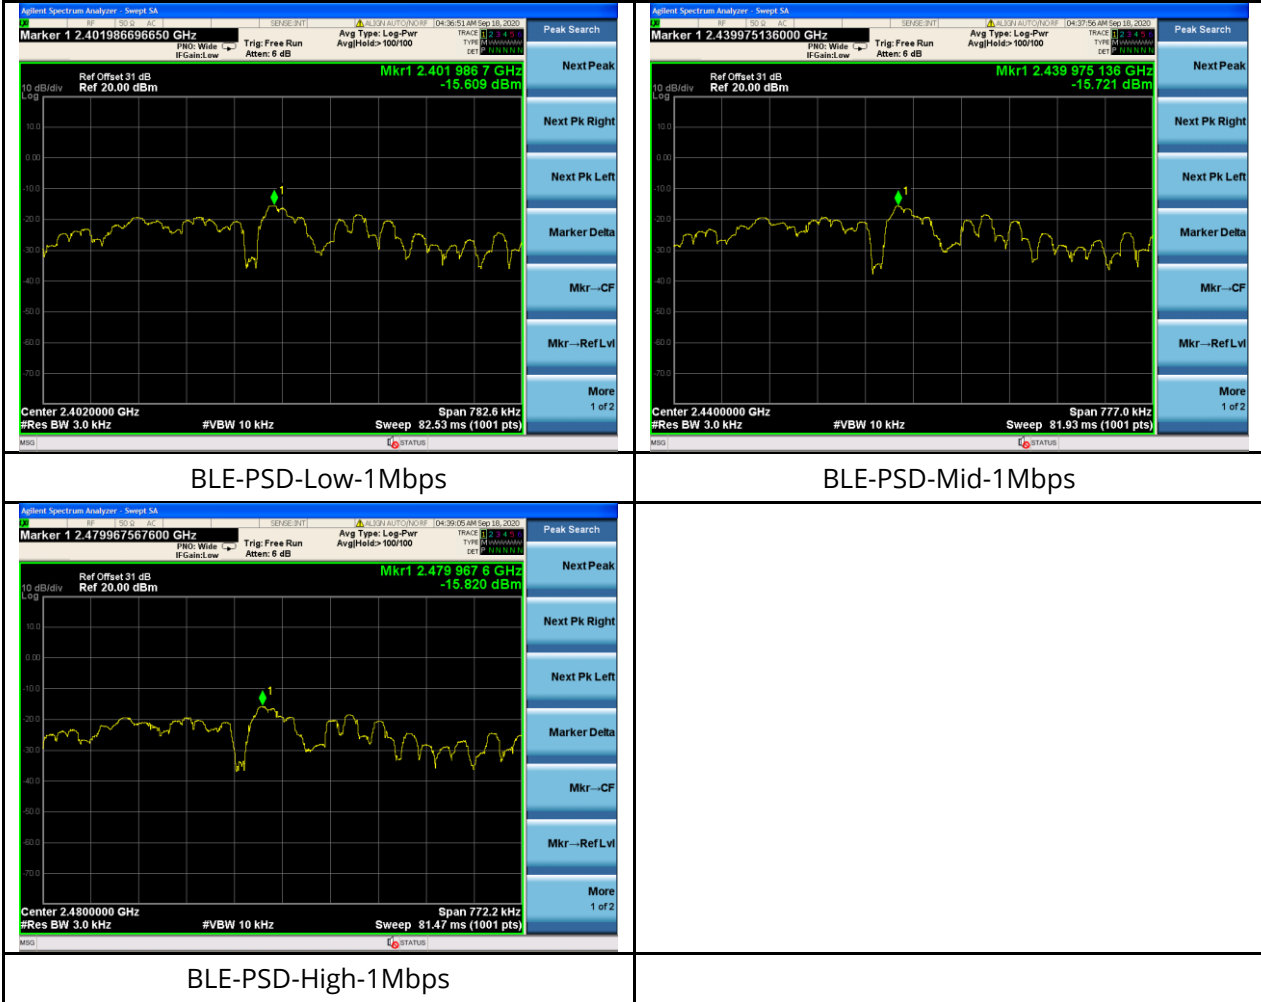


## 7.6 Conducted Band-Edge Measurement

### 7.6.1 Requirement

§ 15.247 (d), RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 7.6.2 Test Setup



### 7.6.3 Test Procedure


According to section 8.5 Emission level measurement, in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.11.3 in ANSI C63.10-2013:

1. Set the centre frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

### 7.6.4 Test Result

See test plots

### 7.6.5 Test Plots

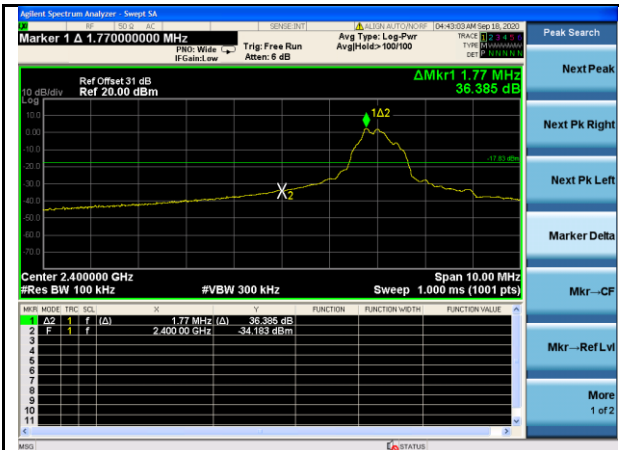

BLE-Band Edge-Low-1Mbps




BLE-Band Edge-High-1Mbps



BLE-Out of Band Emission-Low-1Mbps



BLE-Out of Band Emission-Mid-1Mbps

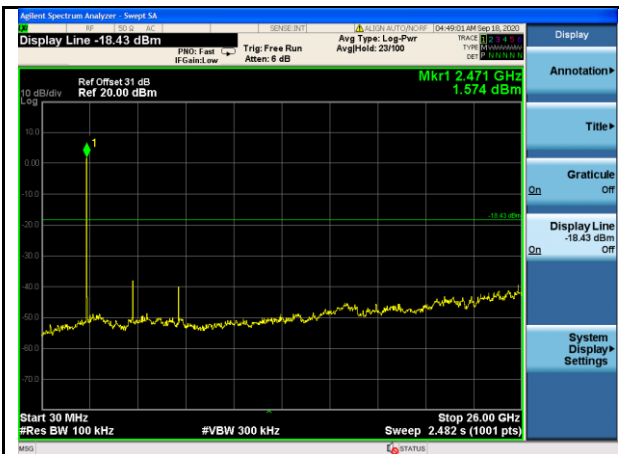

BLE-Out of Band Emission-High-1Mbps

## 7.7 Radiated Band-Edge & Spurious Emissions into Restricted Frequency Bands

### 7.7.1 Requirement


§ 15.247 (d), RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Frequency Range (MHZ)	Field Strength ( $\mu\text{V}/\text{m}$ )
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 960	200
Above 960	500

### 7.7.2 Test Setup

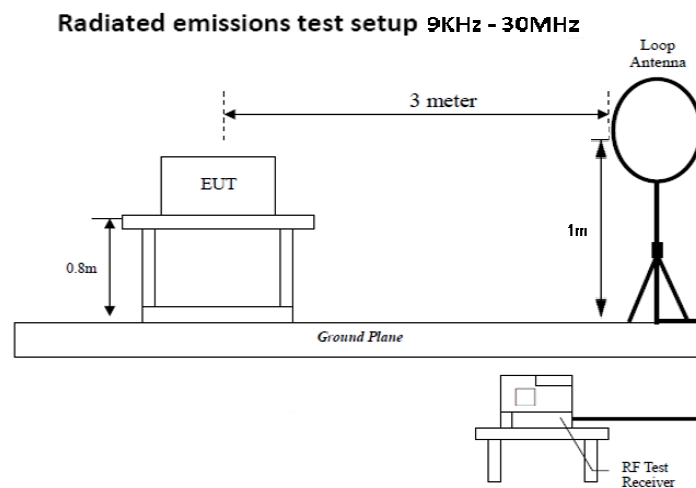




**Radiated emissions test setup 30 MHz - 1 GHz**

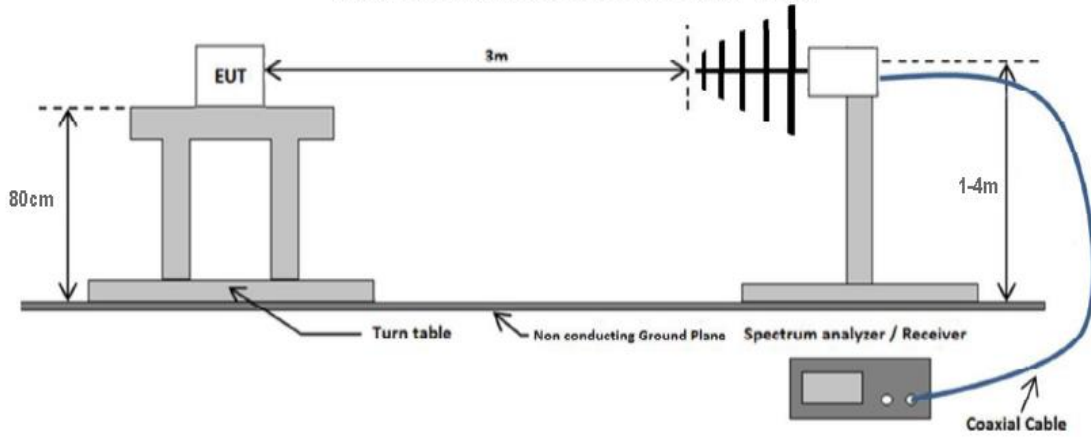

**Radiated emissions test setup above 1 GHz**

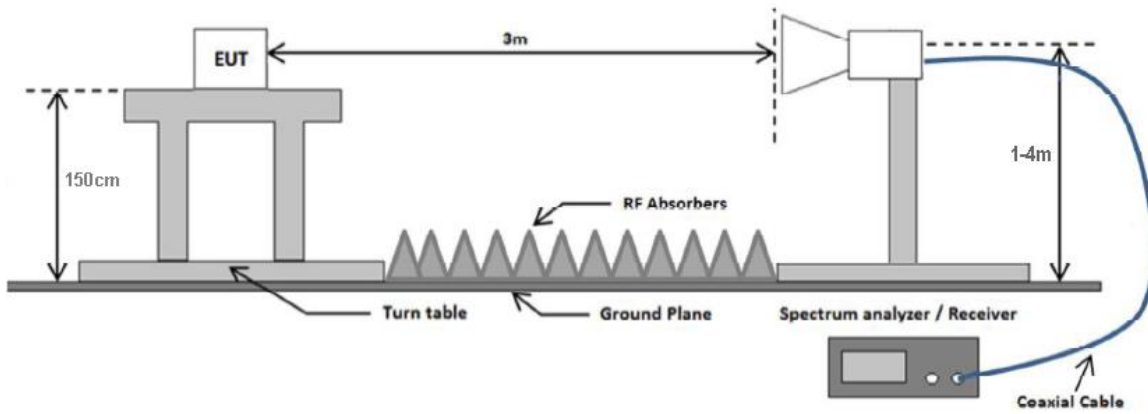

### 7.7.3 Test Procedure


According to section 8.6 in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.12.2.7 Radiated spurious emission measurements in ANSI C62.10-2013 as well as the procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 was followed. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

7.7.4 Test Result

## RADIATED EMISSIONS BELOW 1 GHZ

Test Standard:	15.247, RSS-247,	Mode:	Radiated Emission Below 1GHz - BLE mid CH
Frequency Range:	30 MHz - 1 GHz	Test Date:	10/16/2020
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	N/A	Test Result:	Pass

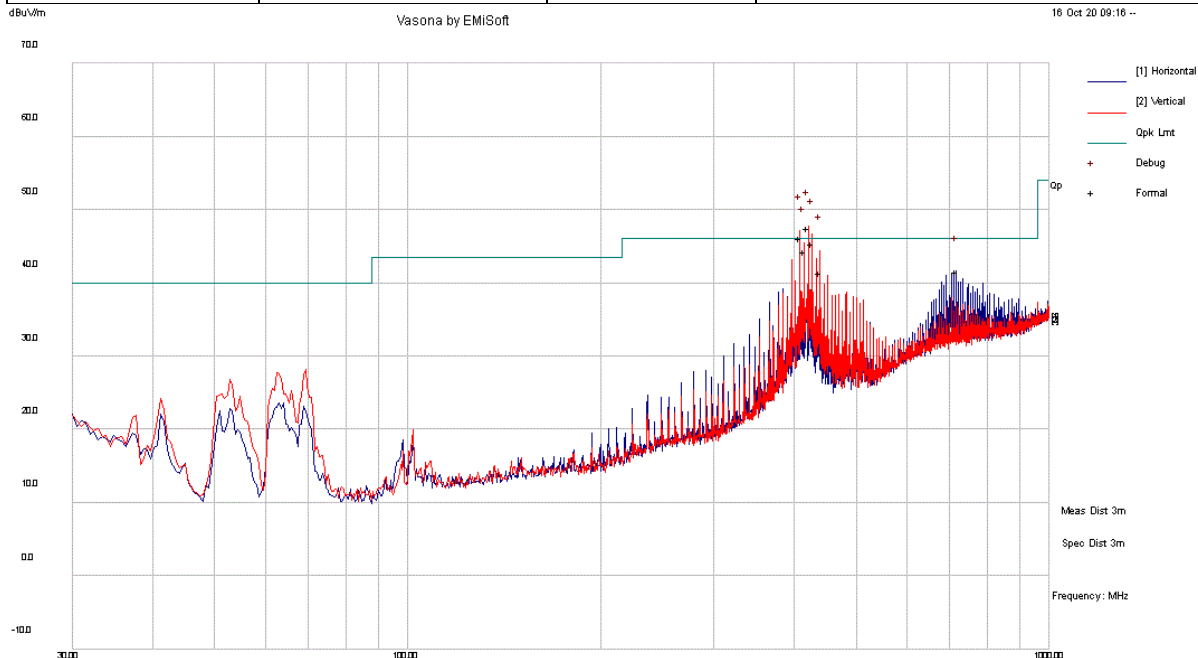


Radiated Emissions  
 Template: FCC Class B (3m) 30MHz-1GHz  
 Filename: c:\users\camara\google drive\2020\ime-20080441-lc\_fcc\_test\_ce\fcc\_testing\test results\rf\ble\rfse\rfse below 1ghz\01\_rse-below 1ghz-mid\_new.ami

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
420.85	54.70	6.30	-13.40	47.50	Quasi Max	V	104	334	46	N/A	N/A
408.55	53.00	6.30	-13.20	46.10	Quasi Max	V	108	293	46	N/A	N/A
426.98	52.70	6.30	-13.50	45.50	Quasi Max	V	101	354	46	N/A	N/A
414.73	51.30	6.30	-13.30	44.30	Quasi Max	V	113	291	46	-1.7	Pass
439.33	49.00	6.20	-13.80	41.50	Quasi Max	V	104	357	46	-4.5	Pass

Note: The emission at around 400MHz are from digital circuit, not from RF transmitter, and shall be compared to the Class A digital limit declared by manufacturer, instead of 15.209 limit. See the data under ITE mode for comparison.

Test Standard:	RSS-Gen, RSS-247	Mode:	BLE + 5GHz co-located
Frequency Range:	30 - 1000 MHz	Test Date:	10/16/2020
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	N/A	Test Result:	Pass

## BLE + 5GHz co-located

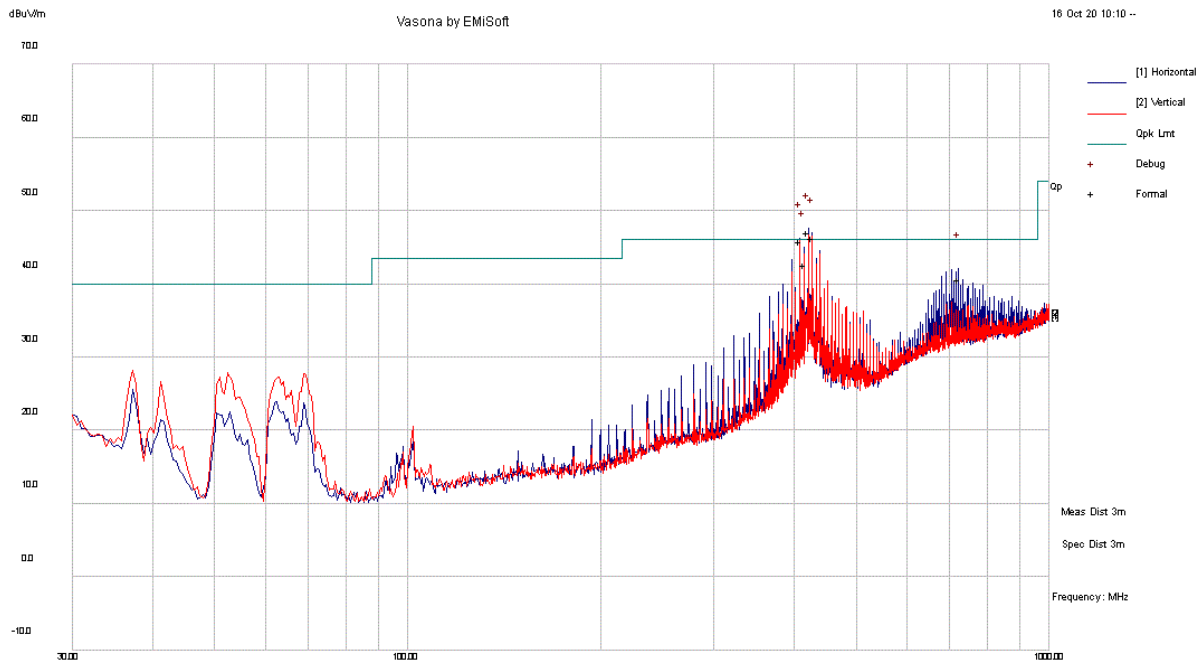


Radiated Emissions Template: FCC Class B (3m) 30MHz-1GHz  
 Filename: c:\users\camara\google drive\2020\hme-20040121-lc\_fcc\_issd\_ce\fcc\_issd\_testing\test results\rf\ble\rfse\rfse below 1ghz\03\_rse-below 1ghz-BLE mid-5G\_emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
420.86	54.30	6.30	-13.40	47.10	Quasi Max	H	206	337	46	N/A	N/A
426.98	53.50	6.30	-13.50	46.30	Quasi Max	H	178	328	46	N/A	N/A
408.55	52.70	6.30	-13.20	45.80	Quasi Max	H	196	335	46	N/A	N/A
414.70	49.70	6.30	-13.30	42.70	Quasi Max	H	100	353	46	-3.3	Pass
721.91	41.50	7.30	-8.00	40.70	Quasi Max	H	103	11	46	-5.3	Pass

Note: The emission at around 400MHz are from digital circuit, not from RF transmitter, and shall be compared to the Class A digital limit declared by manufacturer, instead of 15.209 limit. See the data under ITE mode for comparison.

Test Standard:	FCC Part 15B, ICES-003	Mode:	ITE mode (TX off)
Frequency Range:	30 - 1000 MHz	Test Date:	09/01/2020
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	Class A	Test Result:	Pass

## ITE mode (Transmitter off)

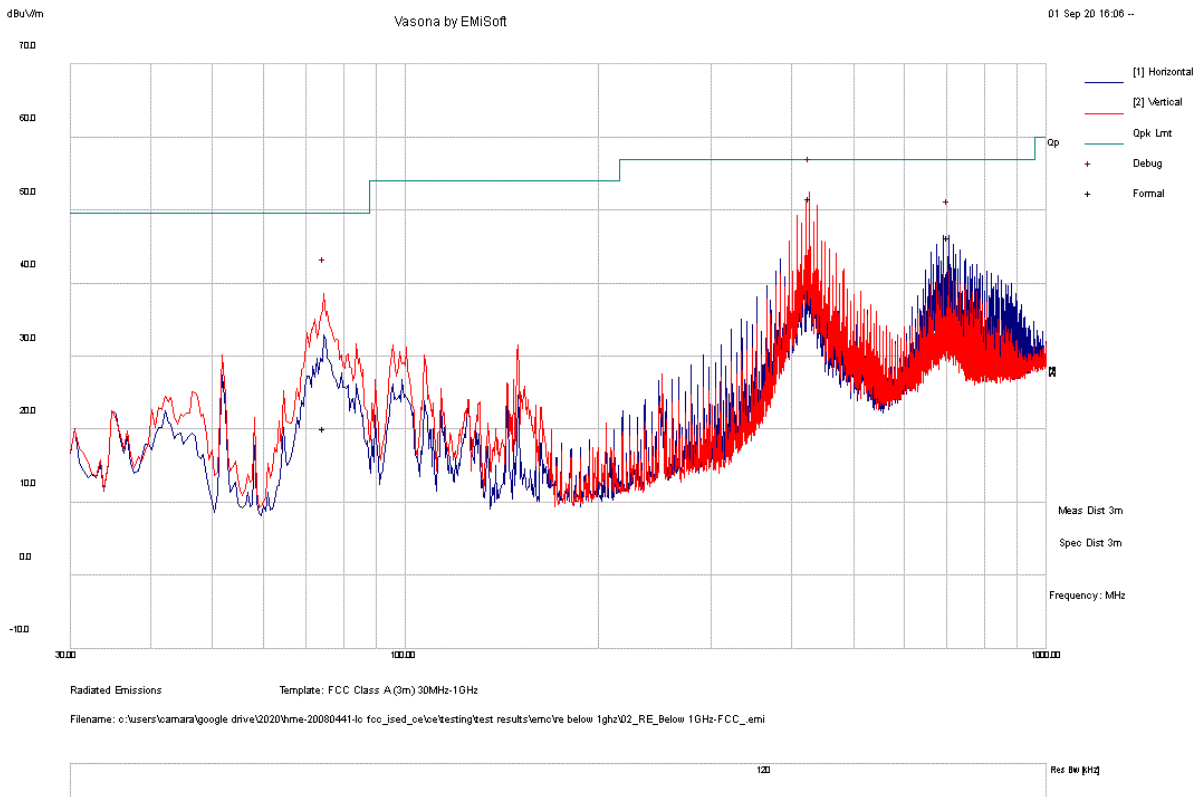


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
426.98	59.00	6.30	-13.50	51.70	Quasi Max	V	122	343	56.90	-5.20	Pass
703.50	47.40	7.30	-8.30	46.40	Quasi Max	H	100	13	56.90	-10.50	Pass
74.75	41.50	3.20	-24.50	20.30	Quasi Max	V	288	38	49.60	-29.30	Pass

Note: These data are for comparison purpose only. The emissions at around 400 MHz exist when transmitters are off. Limit here is Class A limit.

## RADIATED EMISSIONS 1 - 18 GHZ

Test Standard:	15.247, RSS-247	Mode:	Radiated Emission RF Above 1GHz - BLE Low
Frequency Range:	1 GHz - 18GHz	Test Date:	09/15/2020
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	N/A	Test Result:	Pass

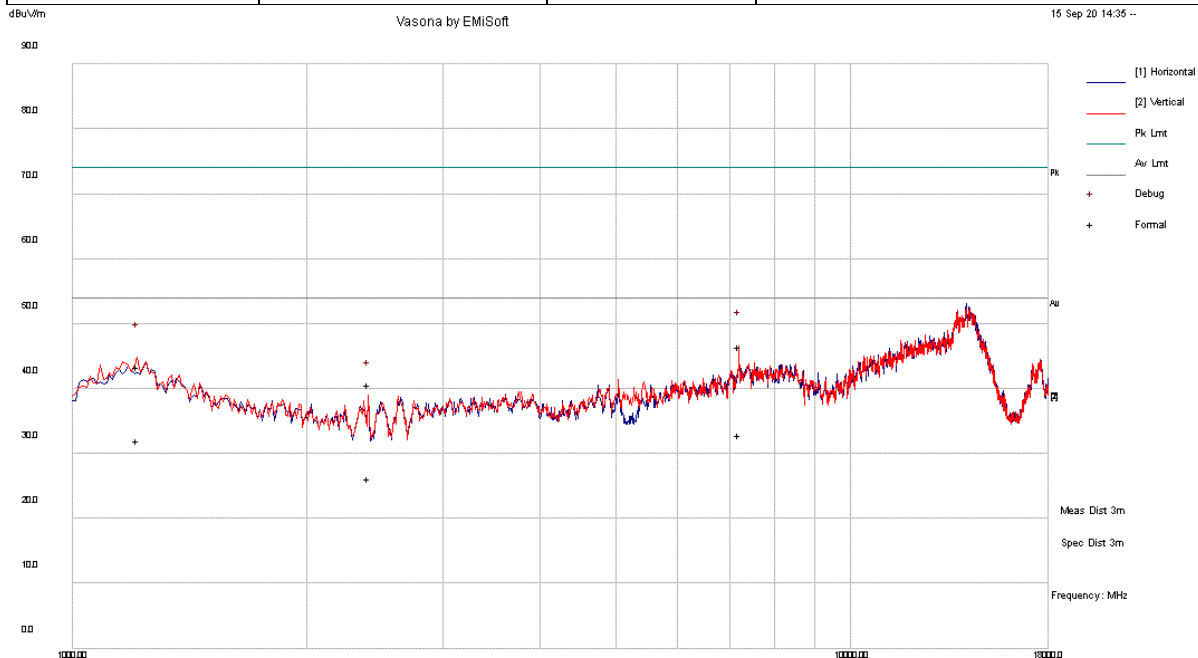


Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz  
 Filename: c:\users\camara\google drive\2020\hme-20080441-lc\_fcc\_ised\_ce\fcc\_ised\testing\test results\vt\ble\yse above 1ghz\01\_RSEabove 1GHz-Low\_emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
7205.515	24.8	20.5	1.2	46.5	Peak Max	V	210	256	74	-27.5	Pass
1211.008	34.4	14.3	-5.3	43.4	Peak Max	V	250	222	74	-30.6	Pass
2401.97	35.4	14.7	-9.4	40.6	Peak Max	V	400	215	74	-33.4	Pass
7205.515	11.3	20.5	1.2	33	Average Max	V	210	256	54	-21	Pass
1211.008	23.1	14.3	-5.3	32.1	Average Max	V	250	222	54	-21.9	Pass
2401.97	21	14.7	-9.4	26.3	Average Max	V	400	215	54	-27.7	Pass

**Report#** HME-20040121-LC-FCC-IC-DTS

Test Standard:	15.247, RSS-247	Mode:	Radiated Emission RF Above 1GHz - BLE Mid
Frequency Range:	1 GHz – 18GHz	Test Date:	09/15/2020
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	N/A	Test Result:	Pass

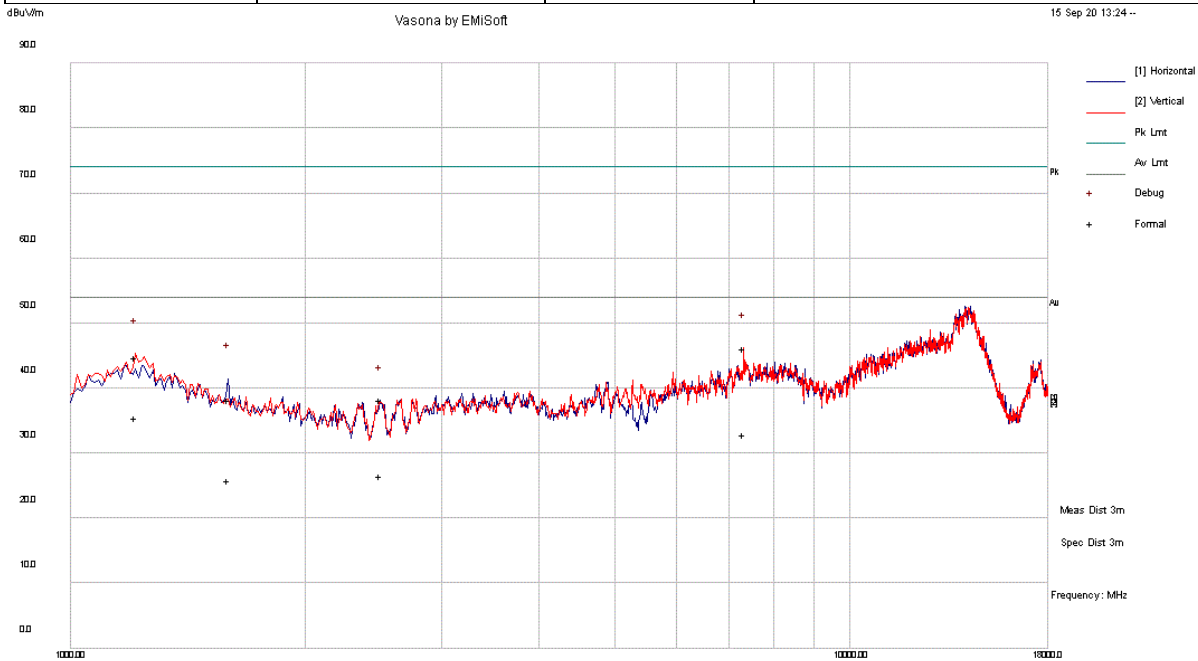

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz


Filename: c:\users\camara\google drive\2020\hme-20080441-lc\_fcc\_ised\_ce\foe\_ised\testing\test results\rf\ble\rfse\rfse above 1ghz\02\_RSEabove 1GHz-Mid\_emi

Res Bu [dBuV]

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
7319.888	24.3	20.7	1.2	46.1	Peak Max	V	307	308	74	-27.9	Pass
1211.298	35.9	14.3	-5.3	44.9	Peak Max	V	272	63	74	-29.1	Pass
1593.593	32.5	14.7	-9	38.3	Peak Max	H	371	99	74	-35.7	Pass
2497.617	32.5	14.8	-9.1	38.3	Peak Max	V	379	347	74	-35.7	Pass
7319.888	11.1	20.7	1.2	33	Average Max	V	307	308	54	-21	Pass
1211.298	26.5	14.3	-5.3	35.5	Average Max	V	272	63	54	-18.5	Pass
1593.593	20.2	14.7	-9	25.9	Average Max	H	371	99	54	-28.1	Pass
2497.617	20.8	14.8	-9.1	26.6	Average Max	V	379	347	54	-27.4	Pass

**Report#** HME-20040121-LC-FCC-IC-DTS

Test Standard:	15.247, RSS-247	Mode:	Radiated Emission RF Above 1GHz - BLE High
Frequency Range:	1 GHz – 18GHz	Test Date:	09/15/2020
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	N/A	Test Result:	Pass

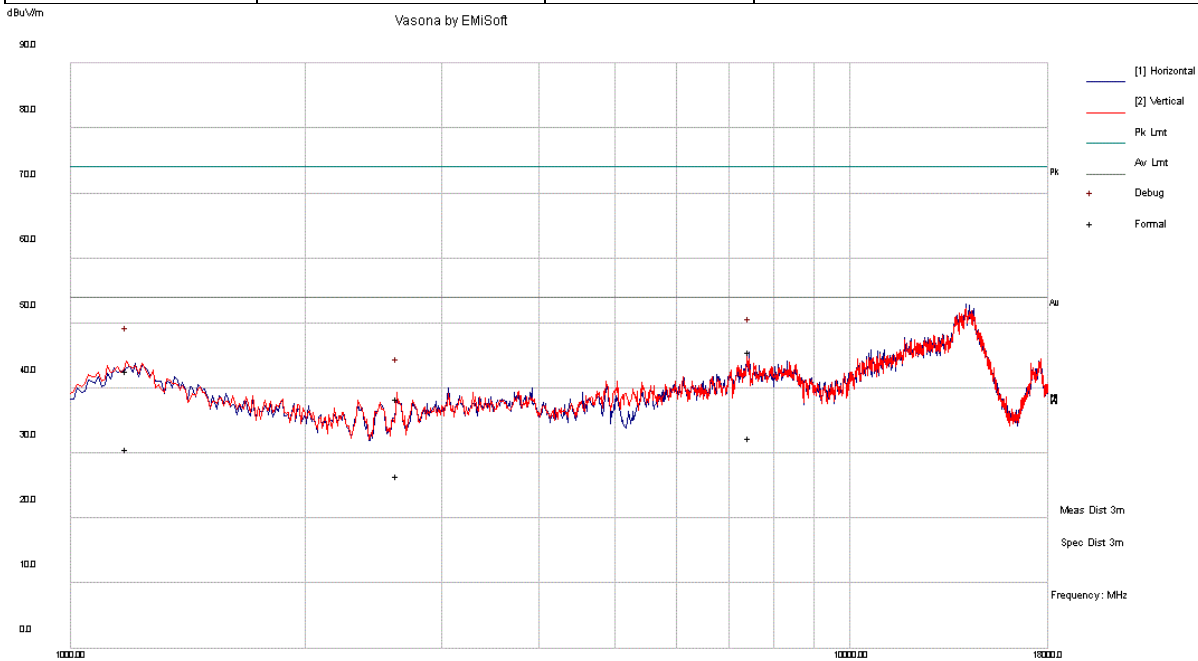

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz

Filename: c:\users\camara\google drive\hme-20080441-lc\_fcc\_ised\_ce\iced\_testing\test results\rf\ble\yse\yse above 1ghz\03\_RSEabove 1GHz-High\_emi


Res Bu [dBm]

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
7439.328	23.8	20.9	1	45.6	Peak Max	H	152	323	74	-28.4	Pass
1180.018	33.7	14.3	-5.2	42.8	Peak Max	V	348	263	74	-31.2	Pass
2624.943	32	14.9	-8.5	38.4	Peak Max	V	327	84	74	-35.6	Pass
7439.328	10.6	20.9	1	32.5	Average Max	H	152	323	54	-21.5	Pass
1180.018	21.6	14.3	-5.2	30.7	Average Max	V	348	263	54	-23.3	Pass
2624.943	20.1	14.9	-8.5	26.5	Average Max	V	327	84	54	-27.5	Pass



Test Standard:	RSS-Gen, RSS-247	Mode:	BLE+5GHz co-located
Frequency Range:	1 - 18 GHz	Test Date:	09/15/2020
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Daniel Bruno
Remark:	N/A	Test Result:	Pass

## BLE+5GHz co-located

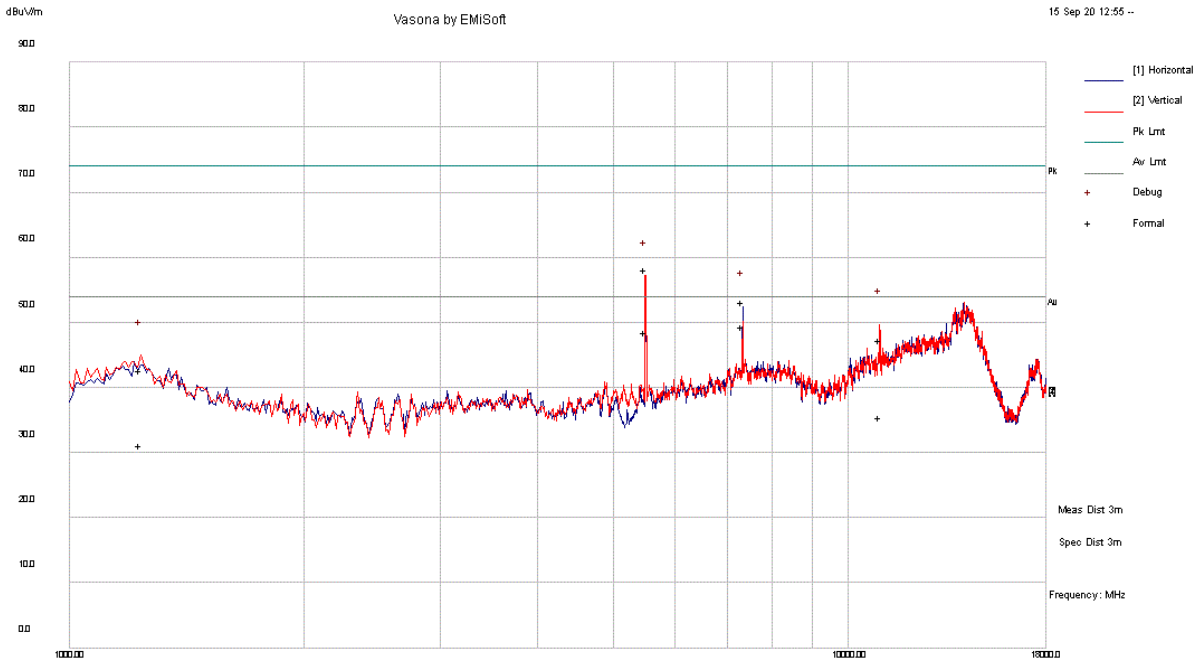

Radiated Emissions Template: FCC 15.209 (3m) 1GHz-18GHz  
 Filename: c:\users\camara\google drive\2020\ime-20080441-lc\_fcc\_test\_ce\fcc\_testing\test results\vt\5g\se above 1ghz\14\_RSE-Above 1 GHz-5600+BLEMHz.emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
7333.19	31.40	20.70	1.20	53.30	Peak Max	H	100	31	74	-20.70	Pass
10997.39	20.50	23.90	3.00	47.30	Peak Max	V	197	86	74	-26.70	Pass
1234.99	33.90	14.40	-5.60	42.70	Peak Max	V	269	110	74	-31.30	Pass
7333.19	27.50	20.70	1.20	49.40	Average Max	H	100	31	54	-4.6	Pass
10997.39	8.80	23.90	3.00	35.60	Average Max	V	197	86	54	-18.4	Pass
1234.99	22.40	14.40	-5.60	31.20	Average Max	V	269	110	54	-22.8	Pass

Note: the highest emission is fundamental emission.


**Radiated Emission between 9KHz - 30MHz test result**

Note: no substantial emission is found other than the noise floor. Different modes have been verified.

**Radiated Emission between 18GHz - 40GHz test result**

Note: no substantial emission is found other than the noise floor. Different modes have been verified.

### Restricted Band Measurement Result

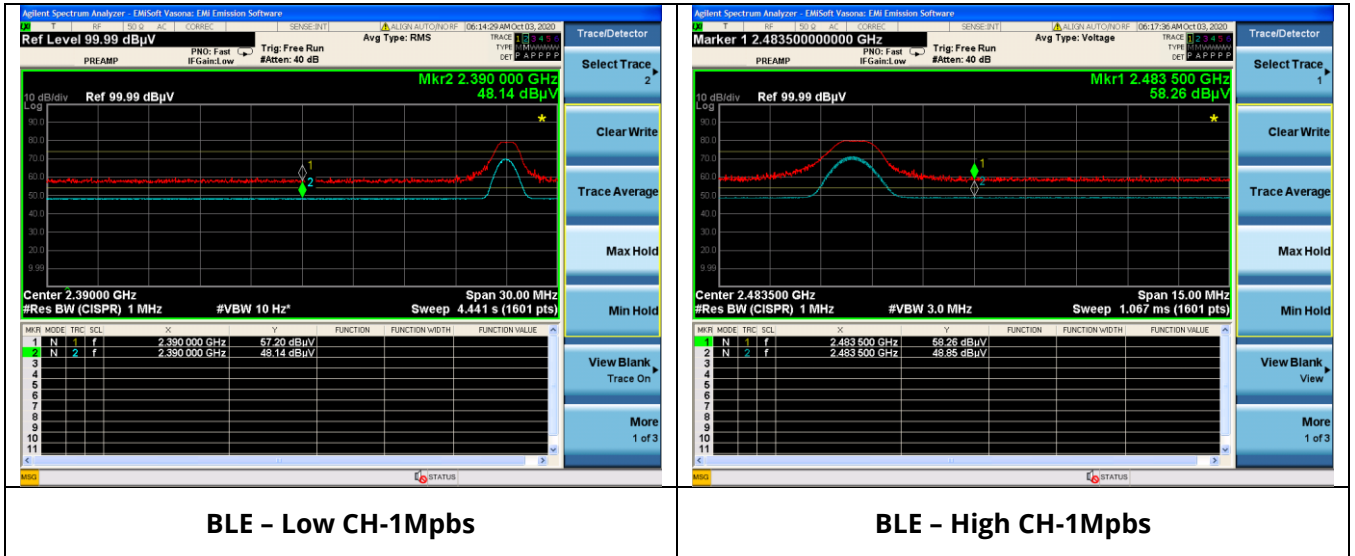

## 8 EUT and Test Setup Photos

See FCC exhibits

## 9 Test Instrument List

Equipment	Manufacturer	Model	Instrument Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	10/18/19	10/18/20
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	6/17/20	6/17/21
EMC Test Receiver	R&S	ESL6	100230	6/14/20	6/14/21
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	5/4/20	5/4/21
LISN (9KHz – 30MHz)	Com-Power	LI-550C	20140050	01/29/2020	01/29/2021
LISN (9KHz – 30MHz)	Com-Power	LI-550C	20140051	01/29/2020	01/29/2021
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2019	11/15/2020
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	5/14/2020	5/14/2021
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	6/24/20	6/24/21
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	7/16/2020	7/16/2021
True RMS Multi-meter	UNI-T	UT181A	C173014829	5/5/2020	5/5/2021
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	5/15/2020	5/15/2021
RF Attenuator	Pasternack	PE7005-3	VL061	7/16/2020	7/16/2021
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	7/16/2020	7/16/2021
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	5/16/20	5/16/21
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	7/16/2020	7/16/2021
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	7/16/2020	7/16/2021
RE test cable (>18GHz)	Sucoflex	104	344903/4	7/16/2020	7/16/2021
Pulse limiter	Com-Power	LIT-930A	531727	7/16/2020	7/16/2021
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	7/16/2020	7/16/2021
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	7/16/2020	7/16/2021
Vector Signal Generator	Keysight	N5182A	US47080548	6/17/20	6/17/21
RF Power Amplifier (80-1000MHz)	Ophir	5226FE	1013/1815	N/A	N/A
RF Power Amplifier (700-6000MHz)	Ophir	5293FE	1063/1815	N/A	N/A
Horn Antenna (1-18GHz)	FT-RF	HA-07M18G-NF	180010HA	N/A	N/A