

**HME***Customer Driven*

Date: August 20, 2003

TUV Product Service  
 10040 Mesa Rim Road  
 San Diego, Ca. 92121  
 Attn: Ms. Judy Evans

Dear Ms. Evans,

The following is the test setup and equipment used for the re-measurement of the occupied bandwidth of the HS400 Headset (FCC ID: BYMHS400).

**Equipment Used:**

HP8920A, Serial Number 3438A05630, RF Communications Test Set  
 HP8594E, Serial Number 3325A00532, Spectrum Analyzer

**Test Set Up:****Modulation Limiting:**

The audio output of the HP8920A was connected to the Unit Under Test (UUT). The RF deviation of the UUT was measured on the HP8920A. The audio input frequency was swept to find the point of maximum deviation. The audio input frequency was set to the frequency of maximum deviation, and the level then increased until the deviation ceased to increase with increasing audio level. The audio frequency was then set to 2500Hz, and the level was then reduced to achieve 50% modulation. The audio level was then increased by 16dB.

Data:

Freq. (Hz)	Deviation (kHz)	Freq. (Hz)	Deviation (kHz)	Freq. (Hz)	Deviation (kHz)
500	1.10	2100	1.99	3700	2.19
600	1.17	2200	2.07	3800	2.06
700	1.22	2300	2.11	3900	1.93
800	1.29	2400	2.14	4000	1.80
900	1.33	2500	2.22		
1000	1.42	2600	2.24		
1100	1.45	2700	2.30		
1200	1.55	2800	2.34		
1300	1.58	2900	2.36		
1400	1.63	3000	2.42		
1500	1.71	3100	2.44		
1600	1.74	3200	2.46		
1700	1.82	3300	2.46		
1800	1.86	3400	2.44		
1900	1.90	3500	2.38		
2000	1.98	3600	2.30		

Maximum Deviation is at 3200Hz. Increasing Audio level provides a maximum deviation of 2.92kHz with an input of 35 millivolts. 50% deviation = 1.46kHz with an input of 1.8 millivolts. +16 dB is input of 11.3 millivolts.



Customer Driven

Occupied Bandwidth:

With the UUT set to 2500Hz modulation, 50% deviation (+16dB), the HP8594E Spectrum Analyzer was used to measure the 99% occupied bandwidth using the internal function for this purpose.

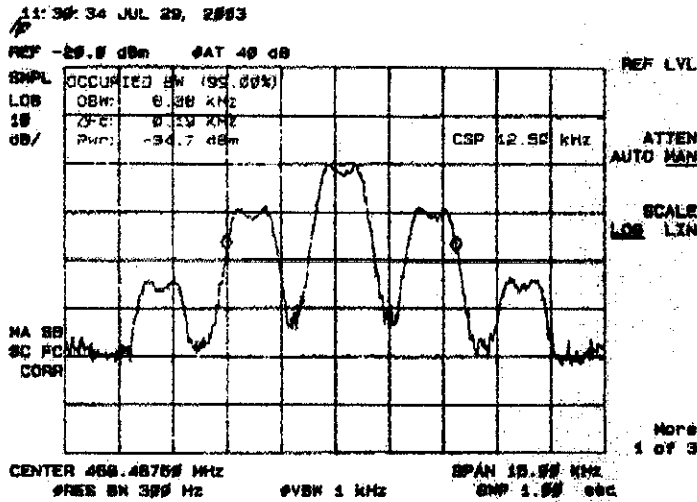


Figure 1 HS400 Channel 0 Modulated with 2500Hz + 16dB

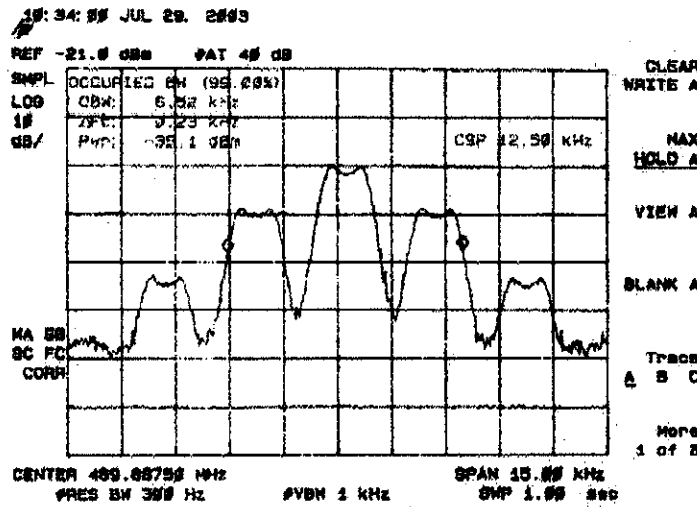


Figure 2 HS400 Channel 7 Modulated with 2500Hz + 16dB

Best Regards,

*Thomas P. Riches*  
 Thomas P. Riches  
 Engineering Services Manager