

APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 4a

FREQUENCY DRIFT VS. TEMPERATURE
P379 HETERODYNE PROCESSOR

DEGREES C	MEASURED LO FREQUENCY(Hz)	DEVIATION(Hz)	DEVIATION(%)
+50	747,251,102	1802	0.000241
+40	747,250,350	1050	0.000141
+30	747,249,830	530	0.000071
+25	747,249,300	0	0.000000
+20	747,249,277	-23	-0.000003
+10	747,249,165	-135	-0.000018
0	747,249,135	-165	-0.000022
-10	747,248,220	-1080	-0.000145
-20	747,247,500	-1800	-0.000241
-30	747,243,800	-5500	-0.000736

APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 5

TABULATED AGC DATA

INPUT LEVEL(dB)	RELATIVE OUTPUT dB=100% OUTPUT POWER
-15	-0.1
-10	-0.1
-5	0
500uV=0dB	0.0
+5	0
+10	0
+15	0
+20	-0.1
-15	0
-10	0
-5	0
1000uV=0dB	0.0
+5	0
+10	0
+15	0
+20	-0.1
+25	-0.1
-15	0
-10	0
-5	0
5000uV=0dB	0.0
+5	0
+10	0
+15	-0.1
+20	-0.1

EXHIBIT 6a

APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 6b

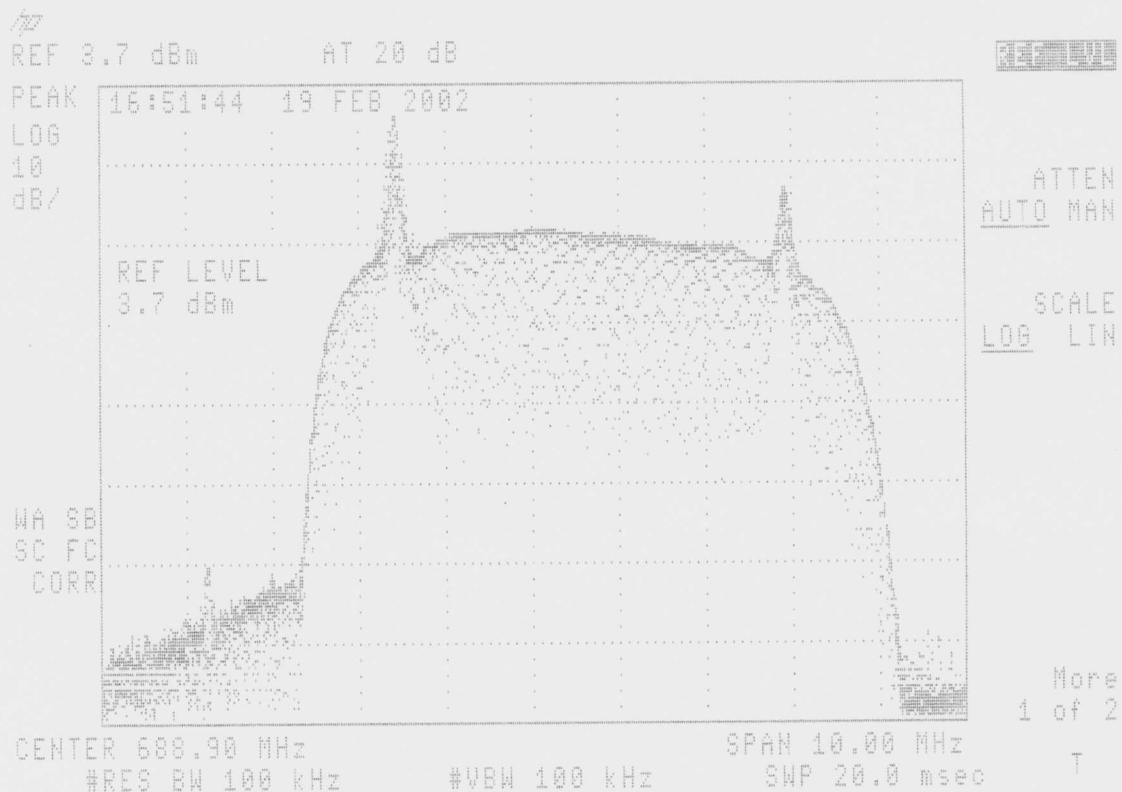


EXHIBIT 6c



APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 9

Power requirements for the 20 Watt UHF Translator were determined as follows:

1. The translator's visual power meter measures the peak visual power by reading the average levels of a detected sample of the output. The meter is calibrated by multiplying the above visual power reading by 168%. The visual metering circuitry has a negligible response to the aural power due to the large (>10MHz) detector bandwidth. When the detector bandwidth is this large, the detector does not peak detect the intercarrier beat product.
2. The aural power is measured by reading the peak level of the detected 4.5MHz intercarrier product. The level of this product has a direct correspondence to the aural power and is independent of the visual power as long as the peak visual power exceeds the aural power. This is always true for normal operation.

BZ5MX20UX
POWER MEASUREMENTS

MEASURED VISUAL POWER	MEASURED AURAL POWER	SUPPLY CURRENT TO OUTPUT DEVICES VISUAL ONLY	SUPPLY CURRENT TO OUTPUT DEVICES VISUAL & AURAL
NOTE 1	NOTE 2	NOTE 3	NOTE 3
12.5 WATTS	2.0 WATTS	2.9 AMPS	2.9 AMPS

NOTE 1: Measured on the Model 43 Bird Wattmeter with the visual carrier modulated by the standard synchronizing signal at 75% of peak amplitude and the aural carrier disabled.


NOTE 2: Measured on the Model 43 Bird Wattmeter with the visual carrier disabled.

NOTE 3: The voltage across the output devices on all models is +28 volts. The output devices are operated Class A.

APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 10a

UM700A Video Measurement Set
Channel A System Default
18-Feb-02 14:27:32

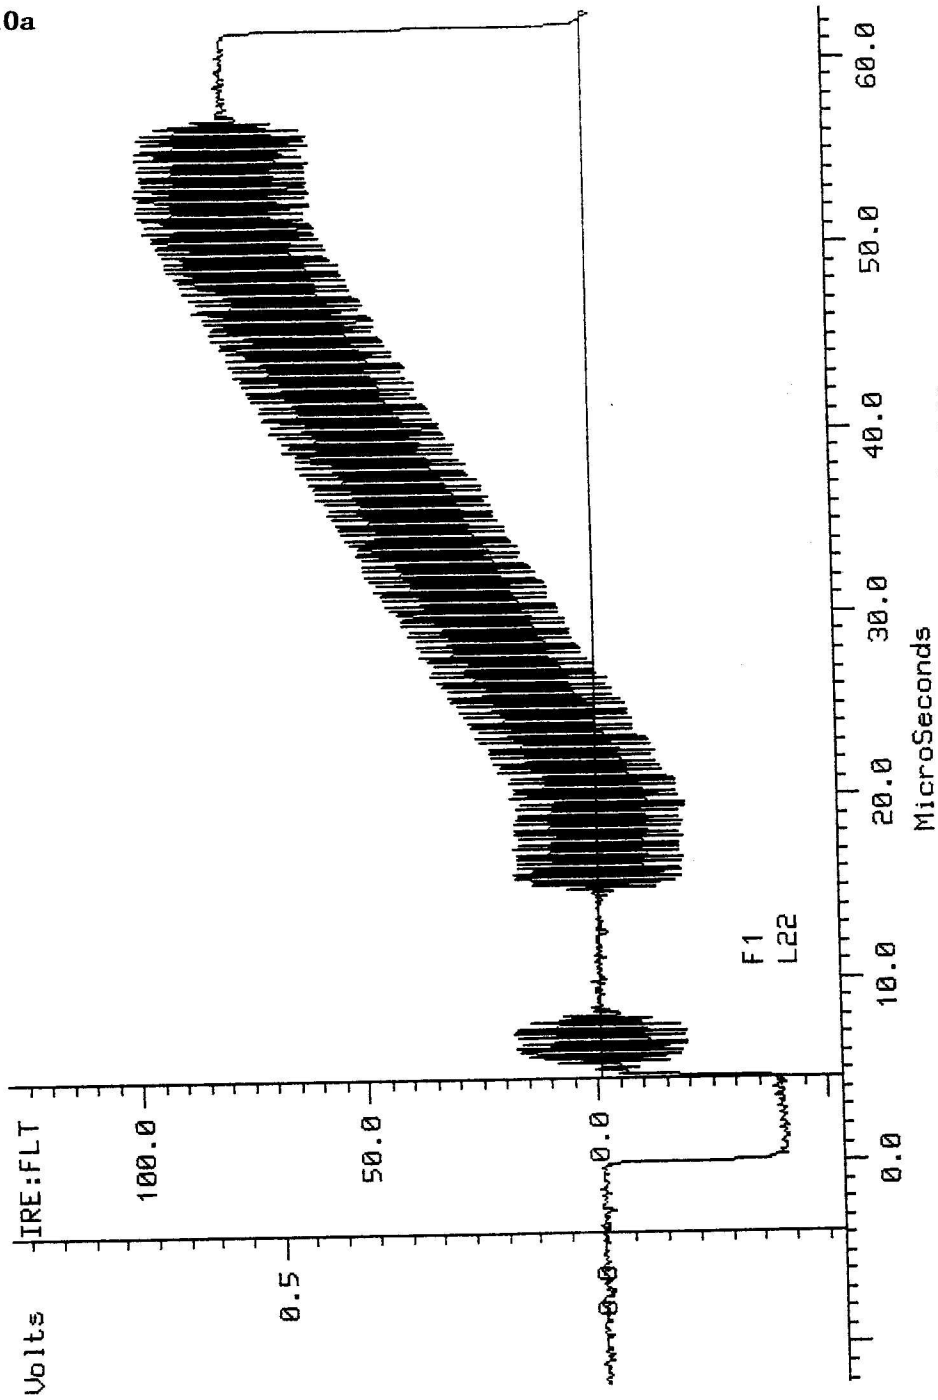

APL = 39.1%
525 line NTSC No Filtering
Slow clamp to 0.00 V at 6.63 μ s

Precision Mode Off
Synchronous
Sync = Source
Frames selected: 1 2


APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 10b

UM700A Video Measurement Set

18-Feb-02 14:29:20

Channel A System Default

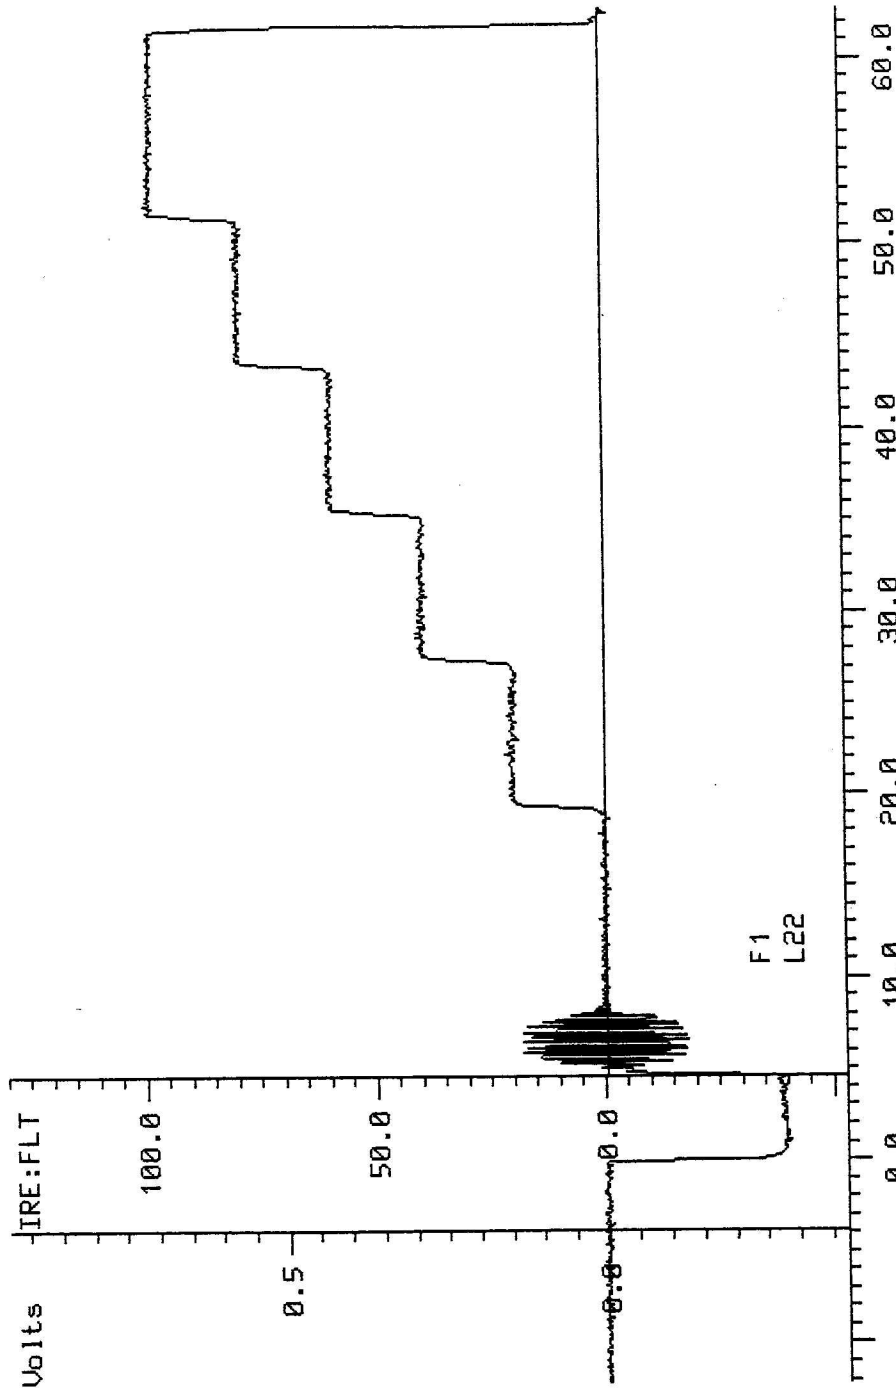

Noise reduction: 4.77db
APL = 49.4%
525 line NTSC No Filtering
Slow clamp to 0.00 V at 6.63 uS

Precision Mode Off
Synchronous Sync = Source
Frames selected: 1 2

APPLICATION FOR FCC CERTIFICATION
 BZ5MX20UX
 HETERODYNE PROCESSOR INPUT
 20 WATT UHF TRANSLATOR

UM700A Video Measurement Set

Channel A System Default

18-Feb-02 14:33:00

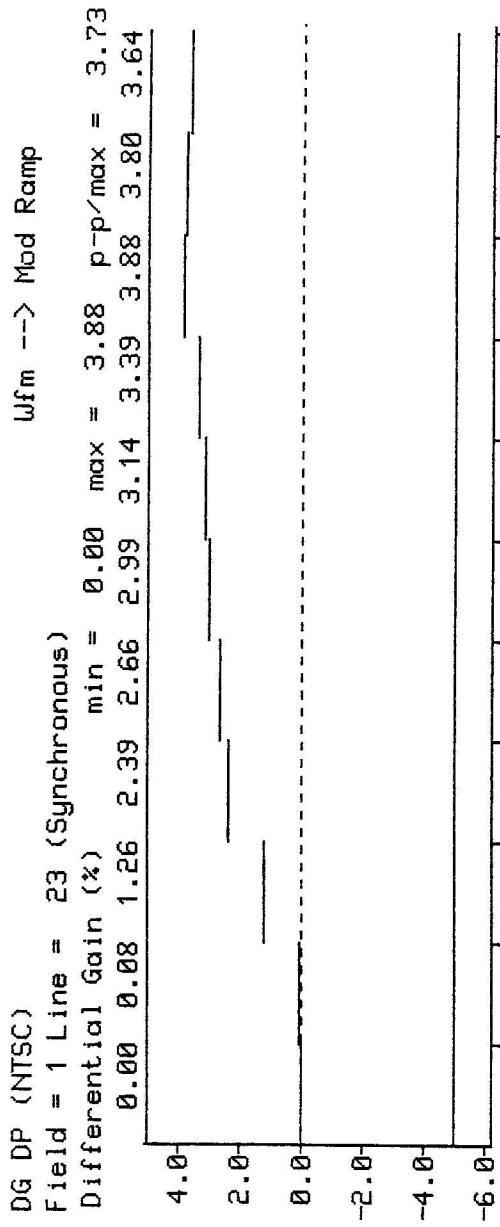


EXHIBIT 10c

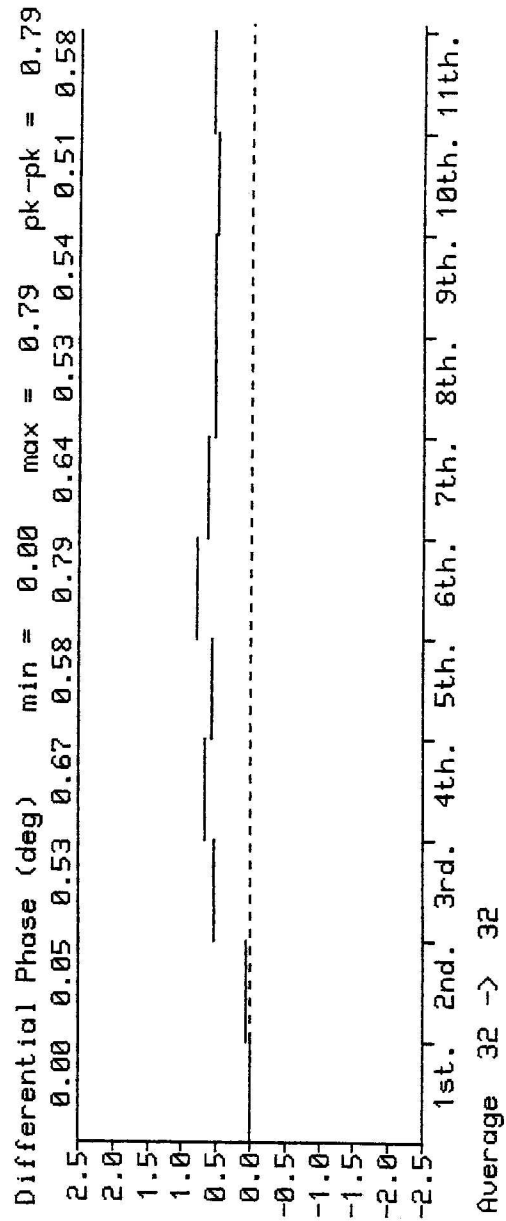


EXHIBIT 10d

APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 11a

OVERALL GROUP DELAY

FREQUENCY(MHz)	OVERALL DELAY (nS)
0.20	0 (Reference)
0.40	-40
0.60	-30
0.80	-20
1.00	-10
1.20	-30
1.40	+20
1.60	0
1.80	-10
2.00	0
2.20	+10
2.40	-10
2.60	+10
2.80	0
3.00	-40
3.20	-60
3.40	-100
3.58	-165
3.80	-250
4.00	-280
4.18	-300

APPLICATION FOR FCC CERTIFICATION
BZ5MX20UX
HETERODYNE PROCESSOR INPUT
20 WATT UHF TRANSLATOR

EXHIBIT 11b

