



STC Test Report

Date : 2013-05-29

Page 1 of 41

No. : DM110869

Applicant (SHF513): Hip Shing Electronics Ltd.
Units 1, 2 & 3, 20/F., New Treasure Centre, 10., Ng Fong Street, San Po Kong, Kowloon, Hong Kong

Manufacturer: Dongguan Zhi Cheng Electronic Products Co., Ltd.
China, Dongguanshi, Tangxia, Ping San 188 Ind. Zone

Description of Sample(s): Submitted sample(s) said to be
Product: AUDIO SPEAKER UNIT
Brand Name: Damson
Model Number: DA3D05
FCC ID: BZADDA3D05

Date Sample(s) Received: 2013-03-07

Date Tested: 2013-03-15 to 2013-05-28

Investigation Requested: Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 . FCC KDB Publication 558074 D01 DTS Meas Guidance v02and ANSI C63.4:2009 for FCC Certification.

Conclusion(s): The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remark(s): Bluetooth 4.0 (GFSK)



LONG Yun Jian, Along
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



STC Test Report

Date : 2013-05-29

Page 2 of 41

No. : DM110869

CONTENT:

Cover	Page 1 of 41	
Content	Page 2-3 of 41	
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 4 of 41
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 4 of 41
1.3	Date of Order	Page 4 of 41
1.4	Submitted Sample(s)	Page 4 of 41
1.5	Test Duration	Page 4 of 41
1.6	Country of Origin	Page 4 of 41
1.7	RF Module Details	Page 5 of 41
1.8	Antenna Details	Page 5 of 41
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 6 of 41
2.2	Test Standards and Results Summary	Page 6 of 41
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-33 of 41

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 3 of 41

No. : DM110869

Appendix A

List of Measurement Equipment

Page 34 of 41

Appendix B

Photographs of EUT

Page 35 - 41 of 41



STC Test Report

Date : 2013-05-29

Page 4 of 41

No. : DM110869

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited
EMC Laboratory
68 Fumin Nan Road, Dalang, Dongguan, China

Telephone: (86 769) 81119888

Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product: AUDIO SPEAKER UNIT
Manufacturer: Dongguan zhi cheng electronic products co., Ltd.
Brand Name: Damson
Model Number: DA3D05
Rating: 18Vd.c. with Jack
The AC/DC adaptor was provided by the applicant with following details:
Brand name: GPE; Model no.: GPE248-180133-Z; Input: 100-240Va.c. 50/60Hz 0.75A;
Output: 18Vd.c. 1330mA 23.94W.

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Hip Shing Electronics Ltd., AUDIO SPEAKER UNIT, it is Audio System, modulation by IC; and type is frequency hopping speed spectrum Modulation.

1.3 Date of Order

2013-03-07

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2013-03-15 to 2013-05-28

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 5 of 41

No. : DM110869

1.7 RF Module Details

Module Model Number: JS-BTM8645
Module FCC ID:
Module Transmission Type: Bluetooth 4.0
Modulation: GFSK
Data Rates: 1Mbps
Frequency Range: 2400-2483.5MHz
Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: PCB layout internal antenna
Antenna Length: 17mm
Antenna Gain: 0.0dBi

1.9 Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 6 of 41

No. : DM110869

2.0 **Technical Details**

2.1 **Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 Regulations. FCC KDB Publication 558074 D01 DTS Meas Guidance v02 and ANSI C63.4:2009 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Maximum Peak Output Power	FCC 47CFR 15.247(b)(3)	FCC KDB Publication 558074 D01 DTS Meas Guidance v02	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Spectral Density	FCC 47CFR 15.247(e)	FCC KDB Publication 558074 D01 DTS Meas Guidance v02	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC KDB Publication 558074 D01 DTS Meas Guidance v02	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band Edge Emissions	FCC 47CFR 15.247(d)	FCC KDB Publication 558074 D01 DTS Meas Guidance v02	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable



STC Test Report

Date : 2013-05-29

Page 7 of 41

No. : DM110869

3.0 Test Results

3.1 Emission


3.1.1 Maximum Peak Output Power

Test Requirement:	FCC 47CFR 15.247(b)(3)
Test Method:	FCC KDB Publication 558074 D01 DTS Meas Guidance v02
Test Date:	2013-03-16
Mode of Operation:	Bluetooth 4.0 Tx mode

Test Method:

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

Test Setup:

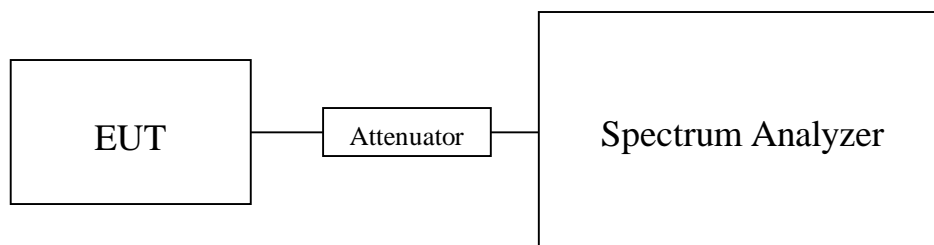

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 8 of 41

No. : DM110869

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of BT4.0 Tx Mode, (2402MHz to 2480MHz) : Pass (TX Unit) (GFSK)		
Maximum conducted output power		
Channel	Frequency(MHz)	Output Power(Watt)
0	2402	0.00234
19	2440	0.00333
39	2480	0.00427

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 26GHz 1.7dB



STC Test Report

Date : 2013-05-29

Page 9 of 41

No. : DM110869

3.1.2 Radiated Emissions


Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2009
Test Date: 2013-03-16
Mode of Operation: Bluetooth 4.0 Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of "STC (Dongguan) Company Limited" with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

Test Setup:

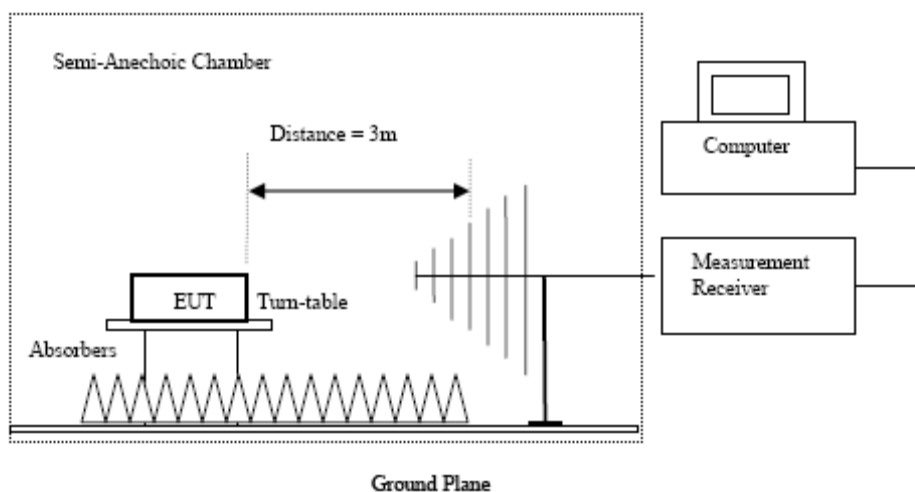

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 10 of 41

No. : DM110869

Limits for Radiated Emissions [FCC 47 CFR 15.247 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (GFSK) (9kHz – 30MHz): Pass

The Low Frequency, which started from 9KHz to 30MHz, was Pre-scan and the result which was more than 20dB lower than the Limit line.

Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
MHz	Level @ 3m	Factor	Strength	@ 3m	$\mu\text{V/m}$	Polarity
	$\text{dB}\mu\text{V}$	dB/m	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\mu\text{V/m}$	
4804.0	10.9	41.5	52.4	74.0	21.6	Horizontal
4804.0	13.8	41.5	55.3	74.0	18.7	Vertical
7206.0	5.6	48.8	54.4	74.0	19.6	Horizontal
7206.0	7.1	48.8	55.9	74.0	18.1	Vertical

Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
MHz	Level @ 3m	Factor	Strength	@ 3m	$\mu\text{V/m}$	Polarity
	$\text{dB}\mu\text{V}$	dB/m	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\mu\text{V/m}$	
4804.0	-3.0	41.5	38.5	54.0	15.5	Horizontal
4804.0	-0.6	41.5	40.9	54.0	13.1	Vertical
7206.0	-8.5	48.8	40.3	54.0	13.7	Horizontal
7206.0	-8.8	48.8	40.0	54.0	14.0	Vertical

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 11 of 41

No. : DM110869

Result of Tx mode (2440.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB μ V/m	
4880.0	12.7	41.4	54.1	74.0	19.9	Horizontal
4880.0	14.4	41.4	55.8	74.0	18.2	Vertical
7320.0	4.7	48.7	53.4	74.0	20.6	Horizontal
7320.0	7.1	48.7	55.8	74.0	18.2	Vertical

Result of Tx mode (2440.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB μ V/m	
4880.0	-2.2	41.4	39.2	54.0	14.8	Horizontal
4880.0	0.2	41.4	41.6	54.0	12.4	Vertical
7320.0	-9.8	48.7	38.9	54.0	15.1	Horizontal
7320.0	-7.2	48.7	41.5	54.0	12.5	Vertical

Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB μ V	dB/m	dB μ V/m	μ V/m	μ V/m	
4960.0	12.8	41.4	54.2	74.0	19.8	Horizontal
4960.0	13.9	41.4	55.3	74.0	18.7	Vertical
7440.0	4.5	48.7	53.2	74.0	20.8	Horizontal
7441.0	6.8	48.7	55.5	74.0	18.5	Vertical

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB μ V	dB/m	dB μ V/m	μ V/m	μ V/m	
2400.0	28.4	35.4	63.8	74.0	10.2	Vertical
2483.5	22.5	35.4	57.9	74.0	16.1	Vertical

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 12 of 41

No. : DM110869

Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB μ V	dB/m	dB μ V/m	μ V/m	μ V/m	
4960.0	-1.9	41.4	39.5	54.0	14.5	Horizontal
4960.0	-1.2	41.4	40.2	54.0	13.8	Vertical
7440.0	-10.1	48.6	38.5	54.0	15.5	Horizontal
7440.0	-7.4	48.6	41.2	54.0	12.8	Vertical

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB μ V	dB/m	dB μ V/m	μ V/m	μ V/m	
2400.0	9.5	35.4	44.9	54.0	9.1	Vertical
2483.5	3.8	35.4	39.2	54.0	14.8	Vertical

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty
(9kHz-30MHz): 3.3dB
(30MHz -1GHz): 4.6dB
(1GHz -26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 13 of 41

No. : DM110869

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V}/\text{m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (GFSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

Horizontal

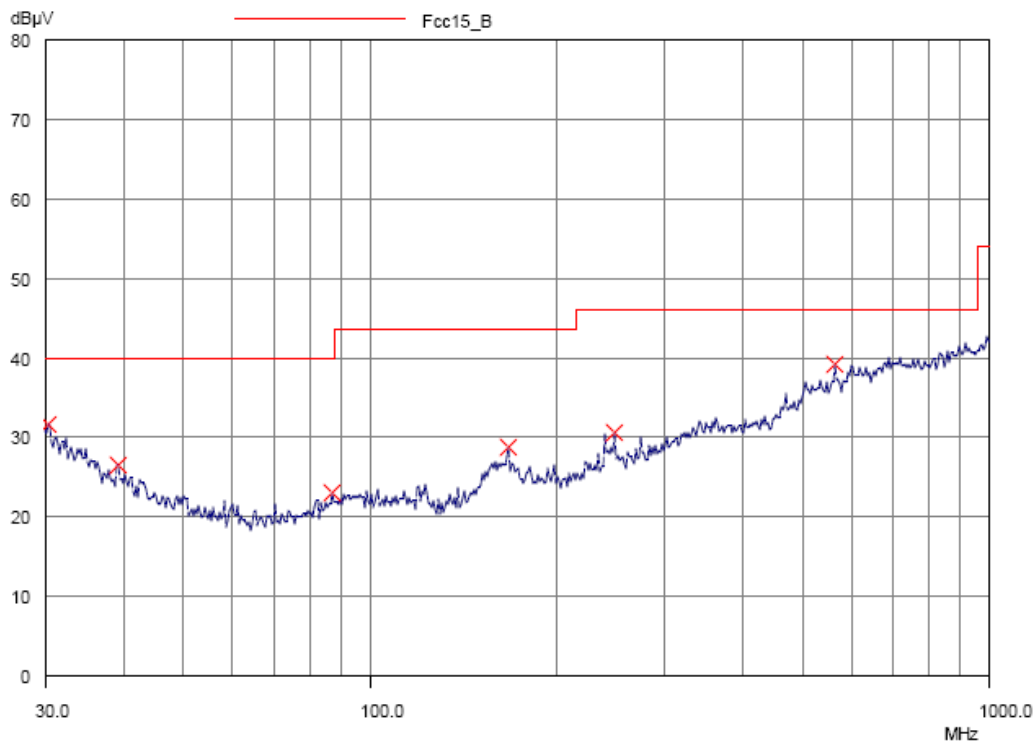

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 14 of 41

No. : DM110869

Result of Bluetooth Communication mode (GFSK) (30MHz – 1GHz): Pass

Radiated Emissions					
Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @ 3m dB μ V/m	Limit @ 3m dB μ V/m	Level @ 3m μ V/m	Limit @ 3m μ V/m
30.3	Horizontal	31.7	40.0	38.5	100
39.3	Horizontal	26.6	40.0	21.4	100
87.1	Horizontal	23.1	40.0	14.3	100
168.0	Horizontal	28.8	43.5	27.5	150
248.5	Horizontal	30.7	46.0	34.3	200
563.3	Horizontal	39.3	46.0	92.3	200

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 15 of 41

No. : DM110869

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (GFSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

Vertical

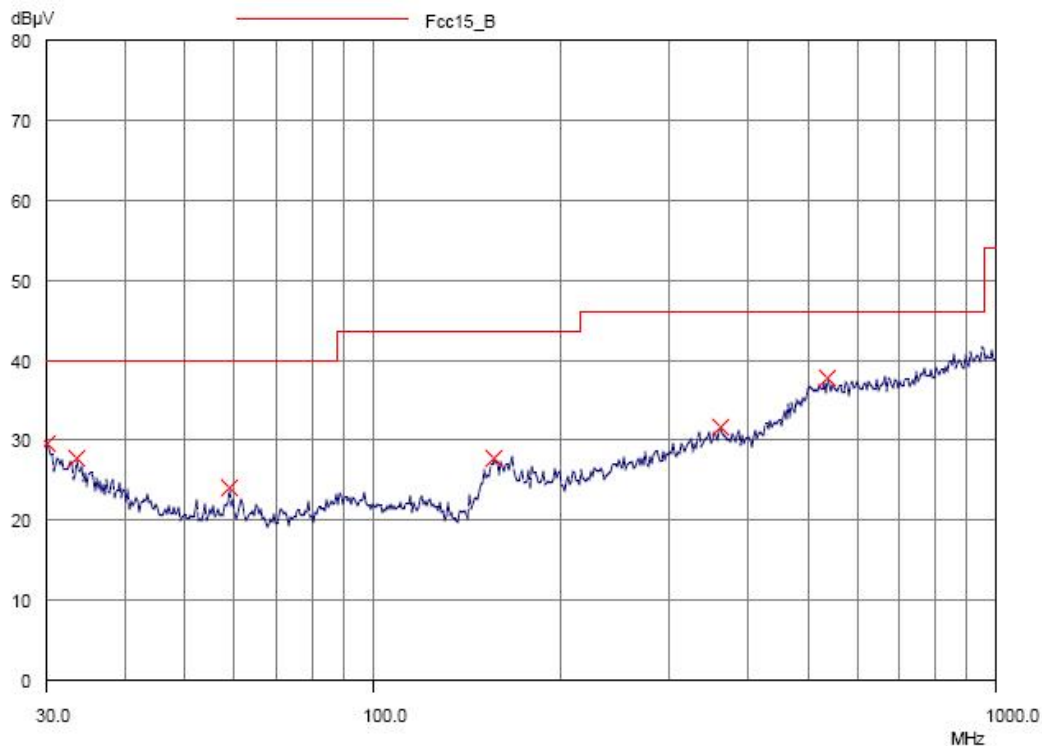

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 16 of 41

No. : DM110869

Result of Bluetooth Communication mode (GFSK) (30MHz – 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @ 3m dB μ V/m	Limit @ 3m dB μ V/m	Level @ 3m μ V/m	Limit @ 3m μ V/m
30.1	Vertical	29.7	40.0	30.5	100
33.5	Vertical	27.8	40.0	24.5	100
58.9	Vertical	24.0	40.0	15.8	100
157.4	Vertical	27.9	43.5	24.8	150
361.2	Vertical	31.7	46.0	38.5	200
536.1	Vertical	37.9	46.0	78.5	200

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 17 of 41

No. : DM110869


3.1.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:2009
Test Date:	2013-03-08
Mode of Operation:	Bluetooth Communication mode (GFSK)
Test Voltage:	117V a.c., 60Hz

Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

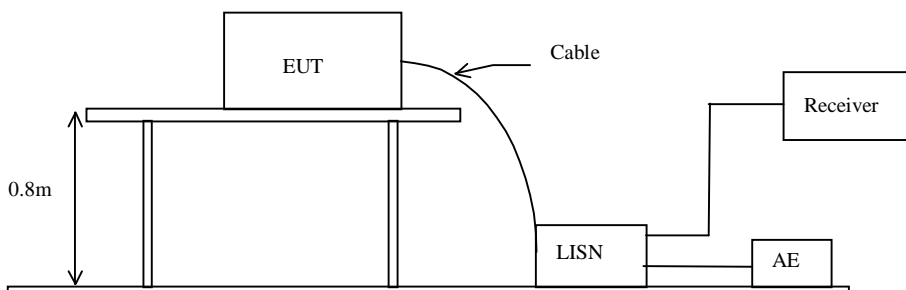

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 18 of 41

No. : DM110869

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (GFSK) (L): PASS

Please refer to the following diagram for individual results.

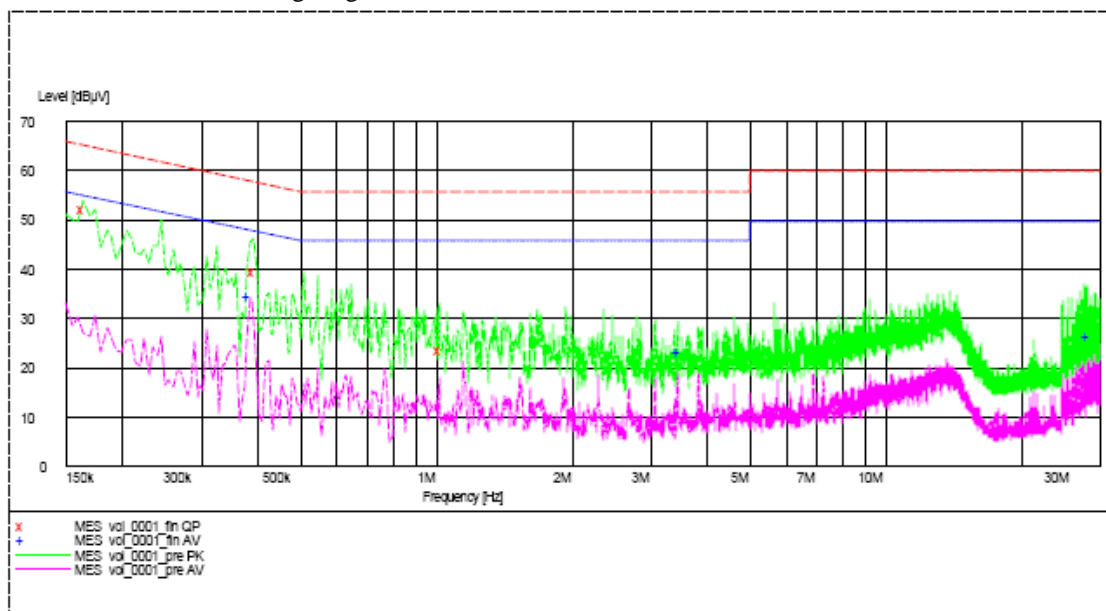

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 19 of 41

No. : DM110869

Results of Bluetooth Communication mode (GFSK) (L): PASS

Conductor	Frequency	Quasi-peak		Average	
		Level	Limit	Level	Limit
Live or Neutral	MHz	dB μ V	dB μ V	dB μ V	dB μ V
Live	0.385	-*-	-*-	34.5	46.0
Live	3.455	-*-	-*-	23.4	46.0
Live	28.290	-*-	-*-	26.4	50.0
Live	0.165	52.1	65.0	-*-	-*-
Live	0.395	39.6	58.0	-*-	-*-
Live	1.020	23.6	56.0	-*-	-*-

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 20 of 41

No. : DM110869

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (GFSK) (N): PASS

Please refer to the following diagram for individual results.

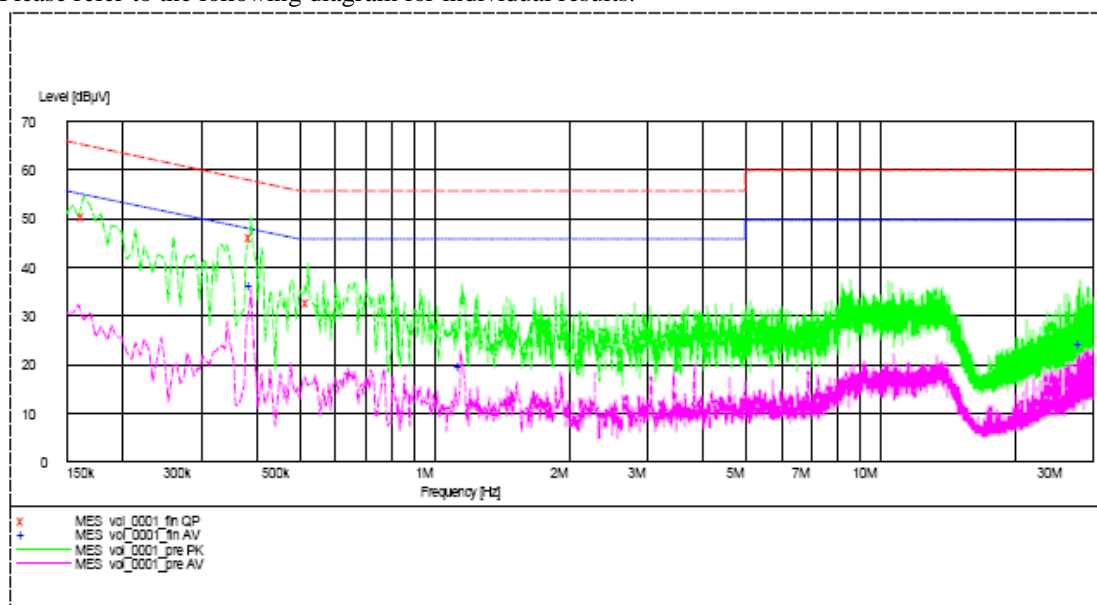



STC Test Report

Date : 2013-05-29

Page 21 of 41

No. : DM110869

Results of Bluetooth Communication mode (GFSK) (N): PASS

Conductor	Frequency	Quasi-peak		Average	
		Level	Limit	Level	Limit
Live or Neutral	MHz	dB μ V	dB μ V	dB μ V	dB μ V
Neutral	0.390	50.5	65.0	36.5	48.0
Neutral	1.150	-*-	-*-	19.9	46.0
Neutral	28.290	-*-	-*-	24.4	50.0
Neutral	0.165	50.5	58.0	-*-	-*-
Neutral	0.525	32.8	56.0	-*-	-*-

Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 22 of 41

No. : DM110869

3.1.3 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)
Test Method: FCC KDB Publication 558074 D01 DTS Meas Guidance v02
Test Date: 2013-03-15
Mode of Operation: Bluetooth 4.0 Tx mode

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Results of BT 4.0 Mode (Tx:2402MHz to 2480MHz) : Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2402.0	-10.53	8dBm
2440.0	-7.41	8dBm
2480.0	-7.43	8dBm

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2013-05-29

Page 23 of 41


No. : DM110869

Bluetooth 4.0 mode (Tx: 2402MHz to 2480MHz)

2402.0 MHz

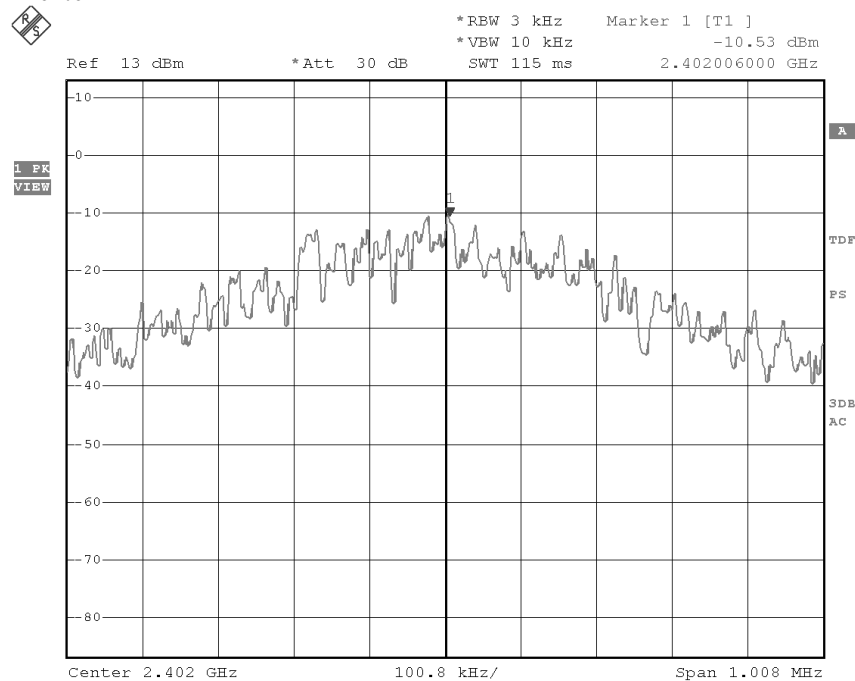

2440.0 MHz

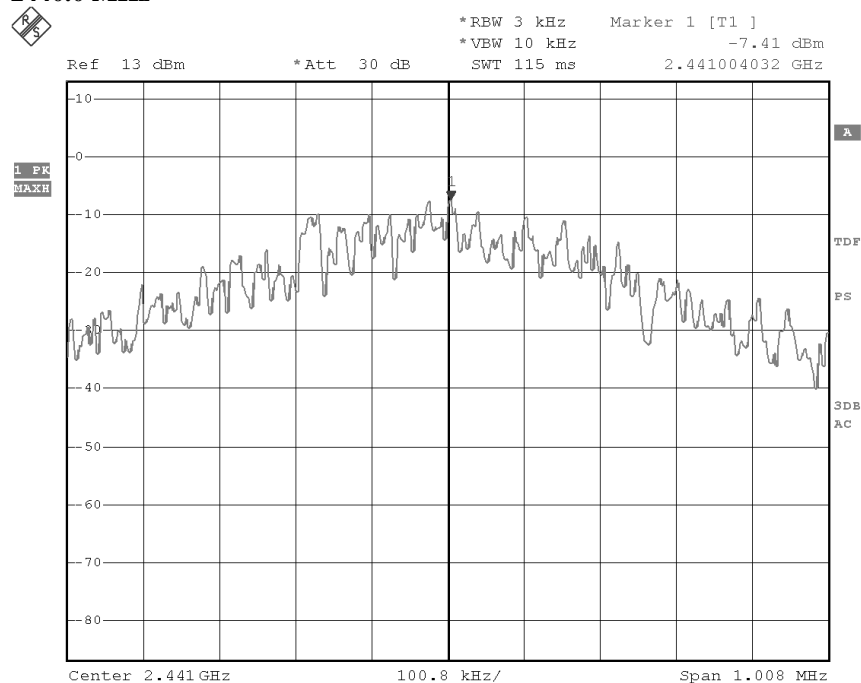

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2013-05-29

Page 24 of 41

No. : DM110869

2480.0 MHz

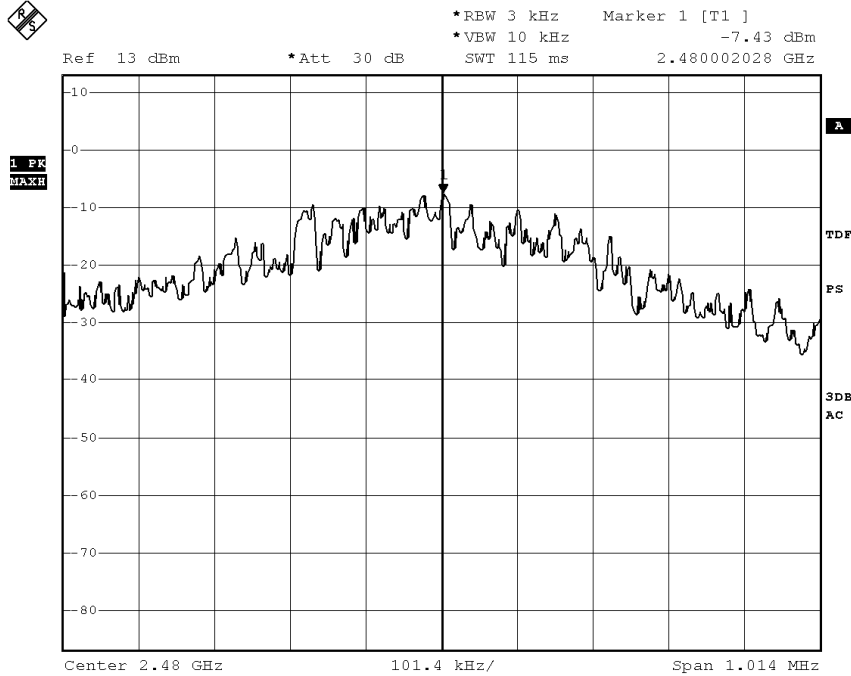

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 25 of 41

No. : DM110869

3.1.4 6dB Bandwidth Measurement

Test Requirement:	FCC 47CFR 15.247(a)(2)
Test Method:	FCC KDB Publication 558074 D01 DTS Meas Guidance v02
Test Date:	2013-03-15
Mode of Operation:	Bluetooth 4.0 Tx mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



STC Test Report

Date : 2013-05-29


Page 26 of 41

No. : DM110869

Limits for 6dB Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2402.0	0.672	> 500

6 dB Bandwidth Plot on Configuration BT 4.0 (GFSK: 2402MHz)

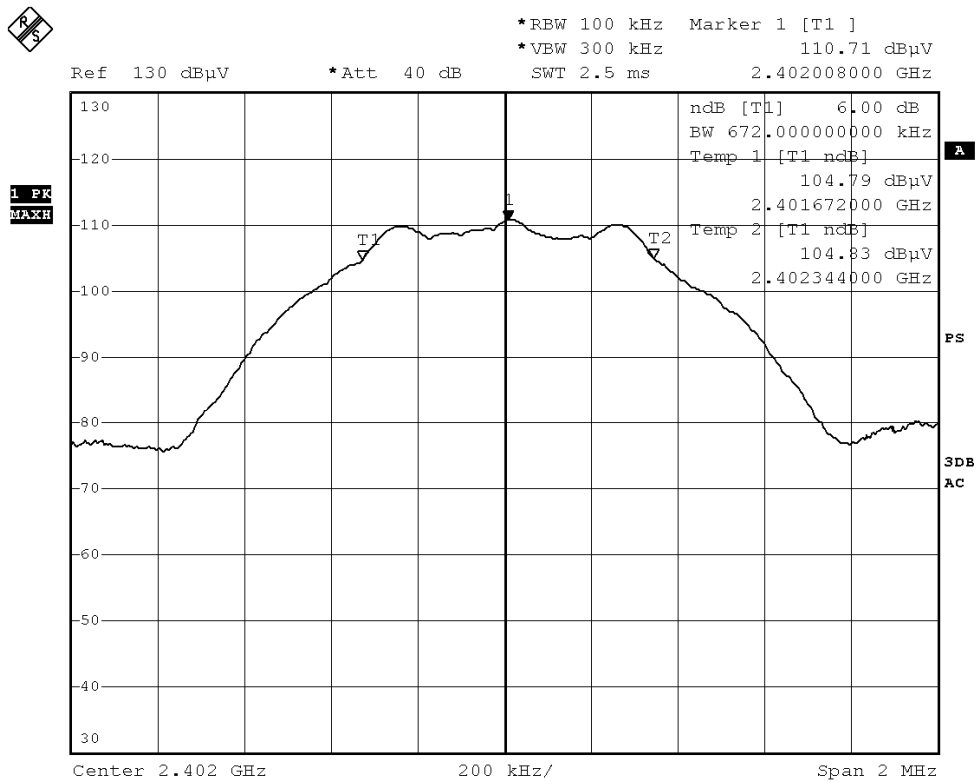

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29


Page 27 of 41

No. : DM110869

Limits for 6dB Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2441.0	0.672	> 500

6 dB Bandwidth Plot on Configuration BT 4.0 (GFSK: 2441MHz)

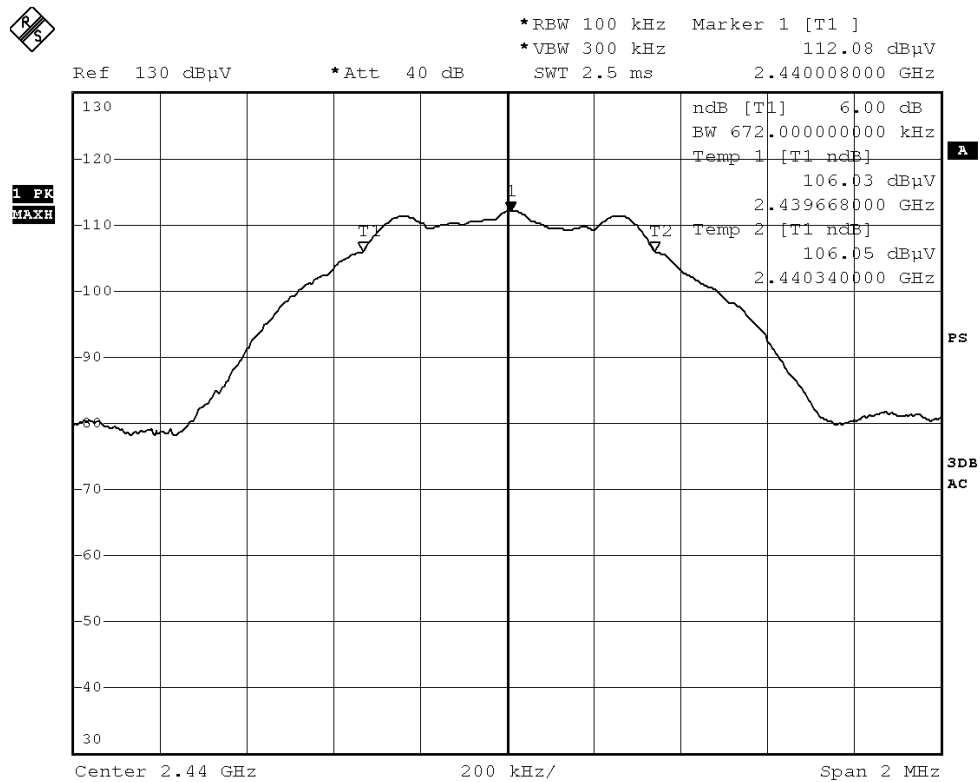

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29


Page 28 of 41

No. : DM110869

Limits for 6dB Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2480.0	0.676	> 500

6 dB Bandwidth Plot on Configuration BT 4.0 (GFSK: 2480MHz)

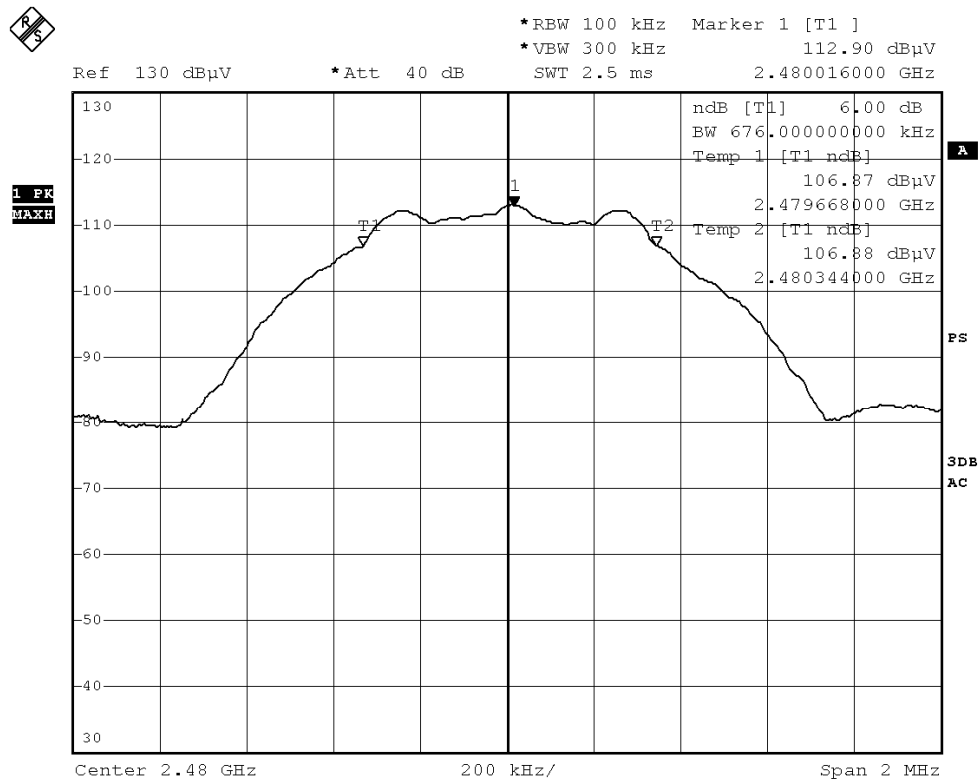

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 29 of 41

No. : DM110869

3.1.5 Band Edges Measurement

Test Requirement:	FCC 47CFR 15.247
Test Method:	FCC KDB Publication 558074 D01 DTS Meas Guidance v02
Test Date:	2013-03-15
Mode of Operation:	Bluetooth 4.0 Tx mode

Test Method:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW and VBW are set to 100kHz for this measurement.

Test Setup:

As Test Setup of clause 3.1.2 in this test report.




STC Test Report

Date : 2013-05-29

Page 30 of 41

No. : DM110869

Band-edge Compliance of RF Emissions – Lowest (GFSK: BT4.0 mode 2402MHz)

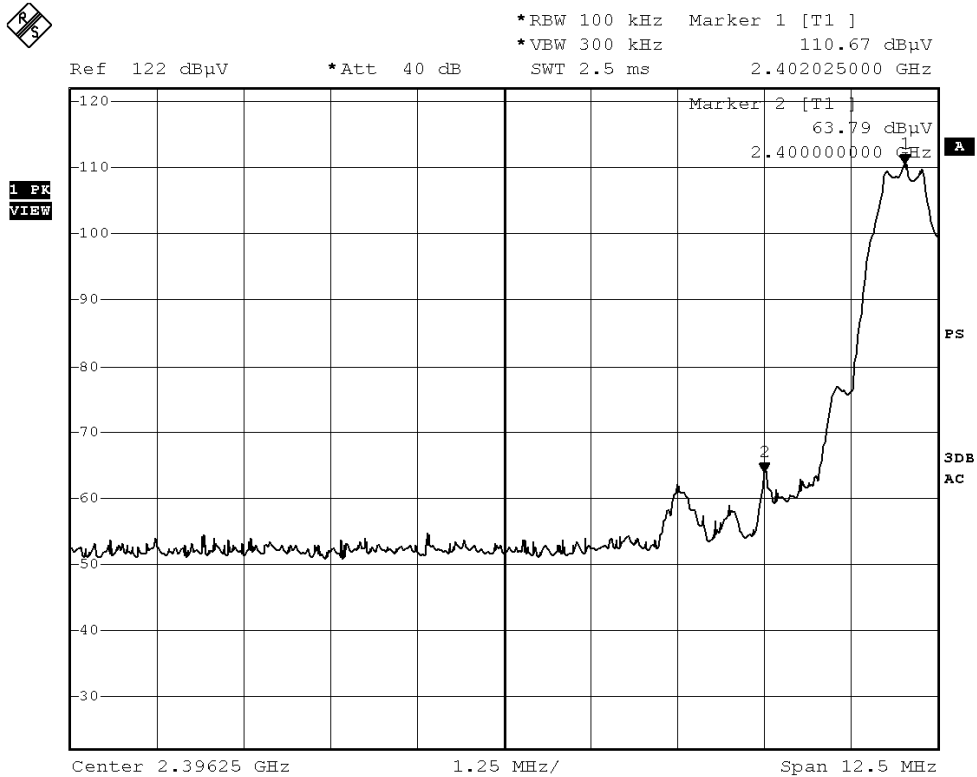

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2013-05-29

Page 31 of 41

No. : DM110869

Band-edge Compliance of RF Emissions – Highest (GFSK: BT4.0 mode 2480MHz)

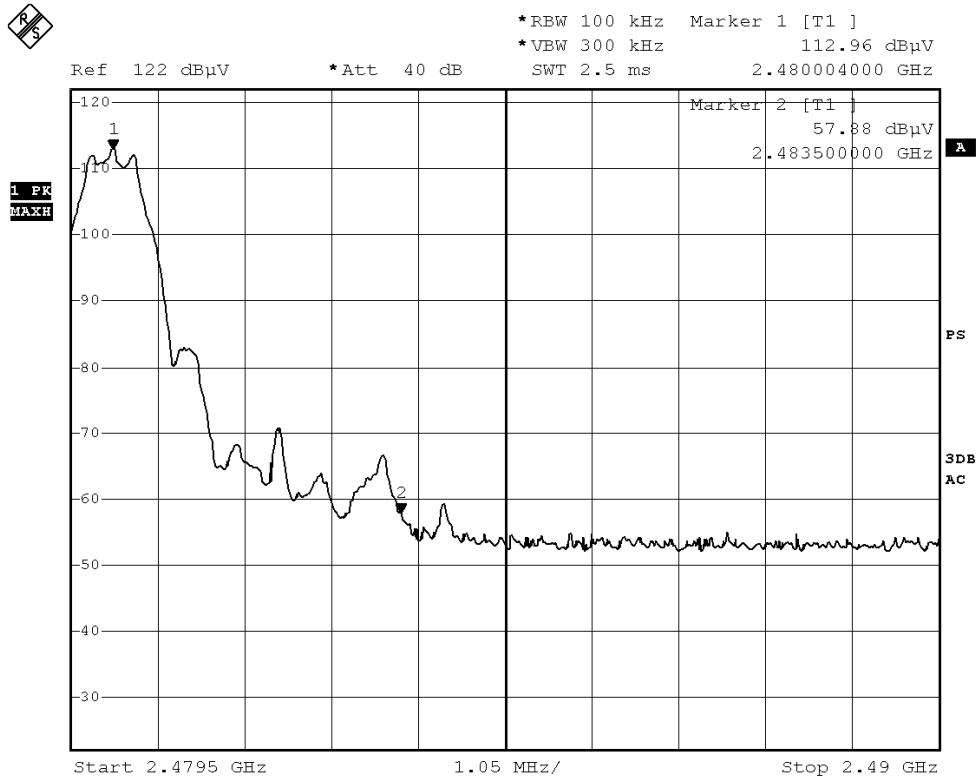

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 32 of 41

No. : DM110869

3.1.6 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB layout internal antenna. There is no external antenna, the antenna gain = 0.0dBi. All component install on inside of EUT. User unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 33 of 41

No. : DM110869

3.1.7 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2013-05-28

Mode of Operation: Tx mode

Test Method:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

Test Results:

The EUT complied with the requirement(s) of this section.

EUT meets the requirements of these sections as proven through MPE calculation

The MPE calculation for EUT @ 20cm

Based on the highest P = 4.27 mW

$$\begin{aligned} P_d &= PG / 4\pi R^2 = (4.27 \times 1.0) / 12.566 * (20)^2 \\ &= (4.27) / 12.566 \times 400 = 4.27 / 5026.4 \\ &= 0.0008495 \text{ mW/cm}^2 \end{aligned}$$

where:

*Pd = power density in mW/cm²

* G = Antenna numeric gain (1.0); Log G = g/10 (g = 0dBi).

* P = Conducted RF power to antenna (4.27 mW).

* R = Minimum allowable distance.(20 cm)

*The power density Pd = 0.0008495mW/cm² is less than 1 mW/cm² (listed MPE limit)

*The SAR evaluation is not needed (this is a desk top device, R> 20 cm)

* The EUT(antenna) must be 0.2 meters away from the General Population.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 34 of 41

No. : DM110869

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2013.03.15	2014.03.14
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2013.03.15	2014.03.14
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2012.07.06	2013.07.05
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2012.07.06	2013.07.05
EMD041	TWO-LINE V-NETWORK	ROHDE & SCHWARZ	ENV216	100261	2012.07.06	2013.07.05
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2012.11.03	2014.11.02
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2012.11.28	2014.11.27
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2013.03.15	2014.03.14
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2013.03.15	2014.03.14
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2013.03.15	2014.03.14
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2012.03.26	2014.03.25
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42-15-C-KF	J2021100721001	2013.01.25	2015.01.24

Remarks:-

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2013-05-29

Page 35 of 41

No. : DM110869

Appendix B

Photographs of EUT


Front View of the product




Rear View of the product



Inner Circuit Top View- All PCBs

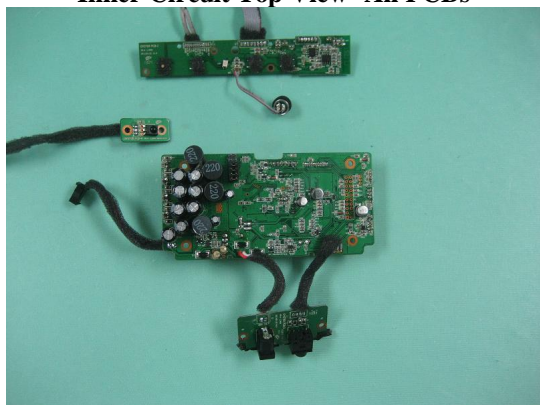

Inner Circuit Bottom View- All PCBs

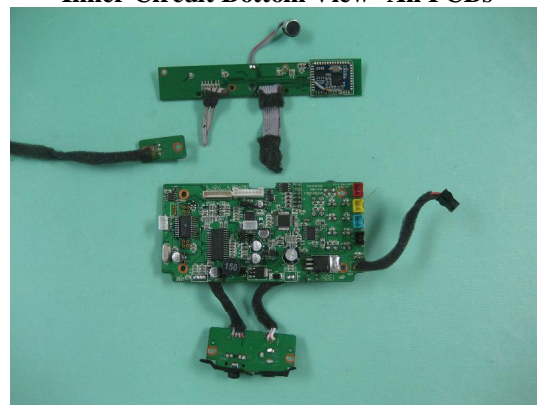

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2013-05-29

Page 36 of 41


No. : DM110869

Photographs of EUT

Inner Circuit Top View

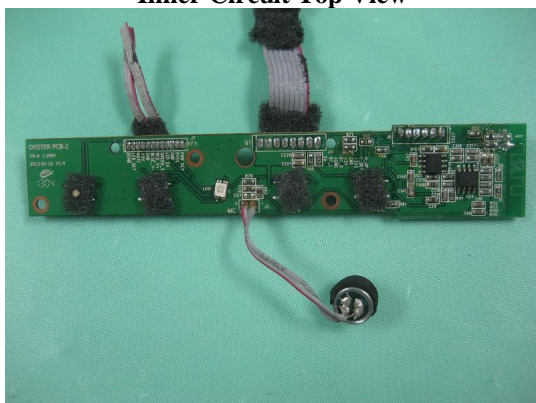

Inner Circuit Bottom View

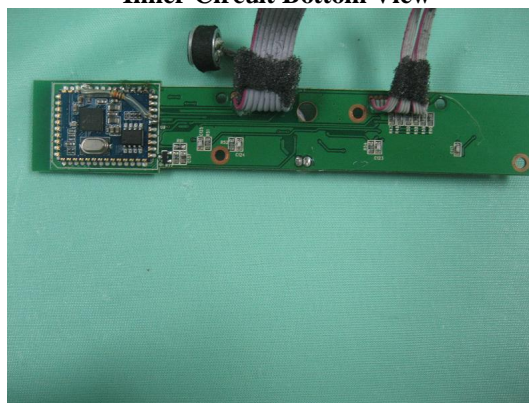

Inner Circuit Top View



Inner Circuit Bottom View





STC Test Report


Date : 2013-05-29

Page 37 of 41


No. : DM110869

Photographs of EUT


Inner Circuit Top View

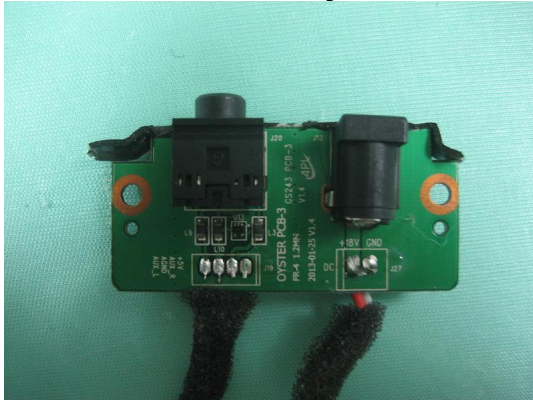


Inner Circuit Bottom View

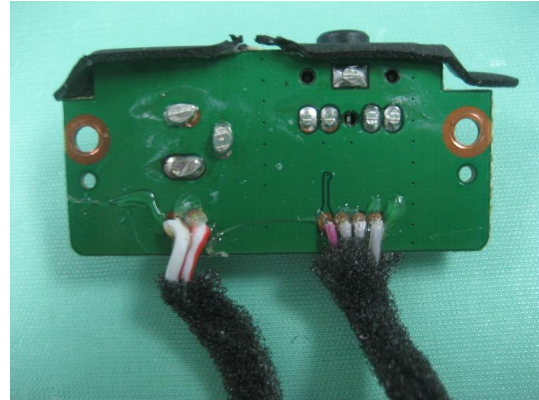

Inner Circuit Top View

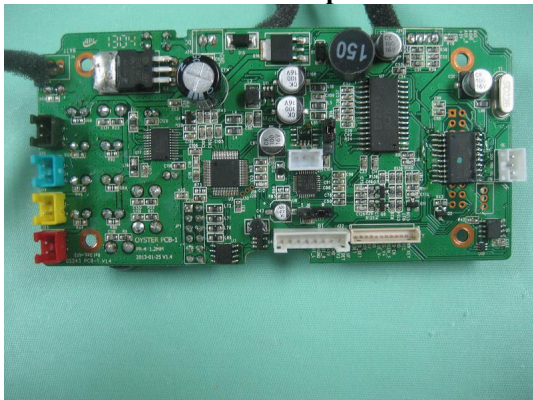

Inner Circuit Bottom View

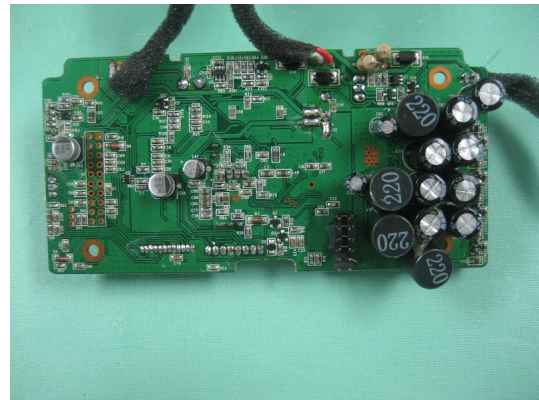

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 38 of 41

No. : DM110869

Photographs of EUT

Measurement of Radiated Emission Test Set Up



The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2013-05-29

Page 39 of 41

No. : DM110869

Photographs of EUT

Measurement of Radiated Emission Test Set Up

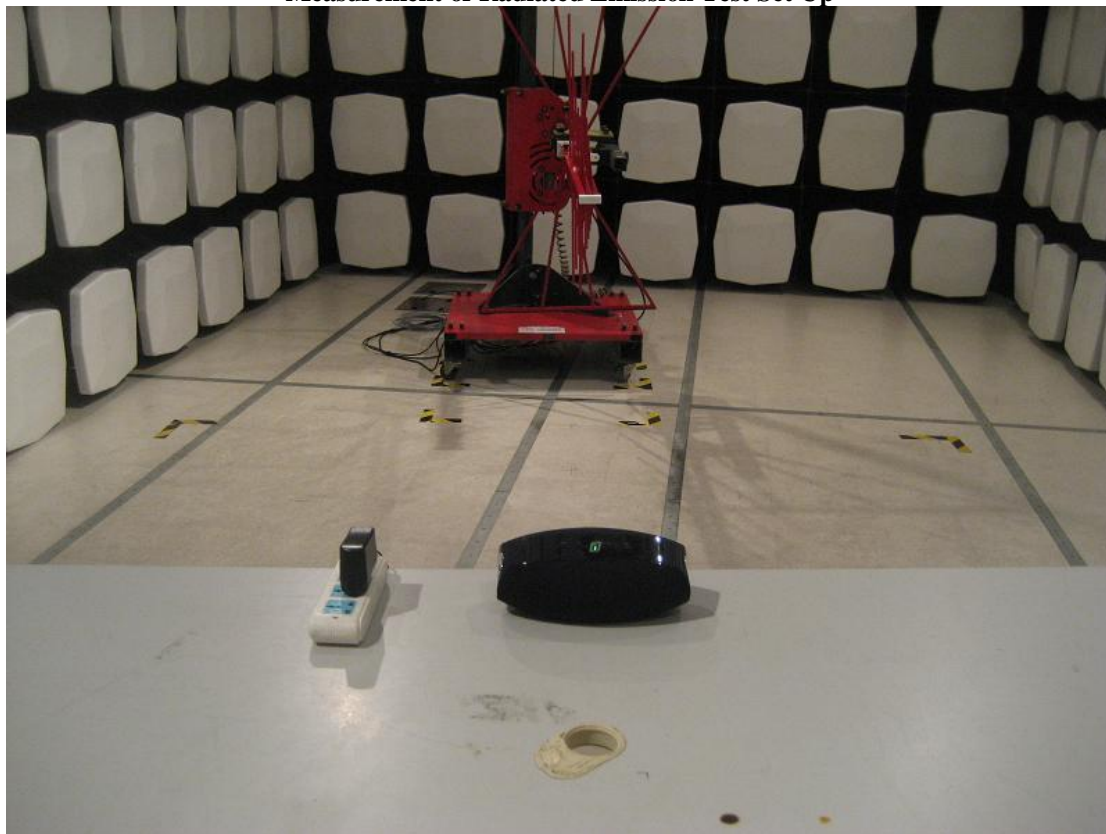

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2013-05-29

Page 40 of 41

No. : DM110869

Photographs of EUT

Measurement of Radiated Emission Test Set Up

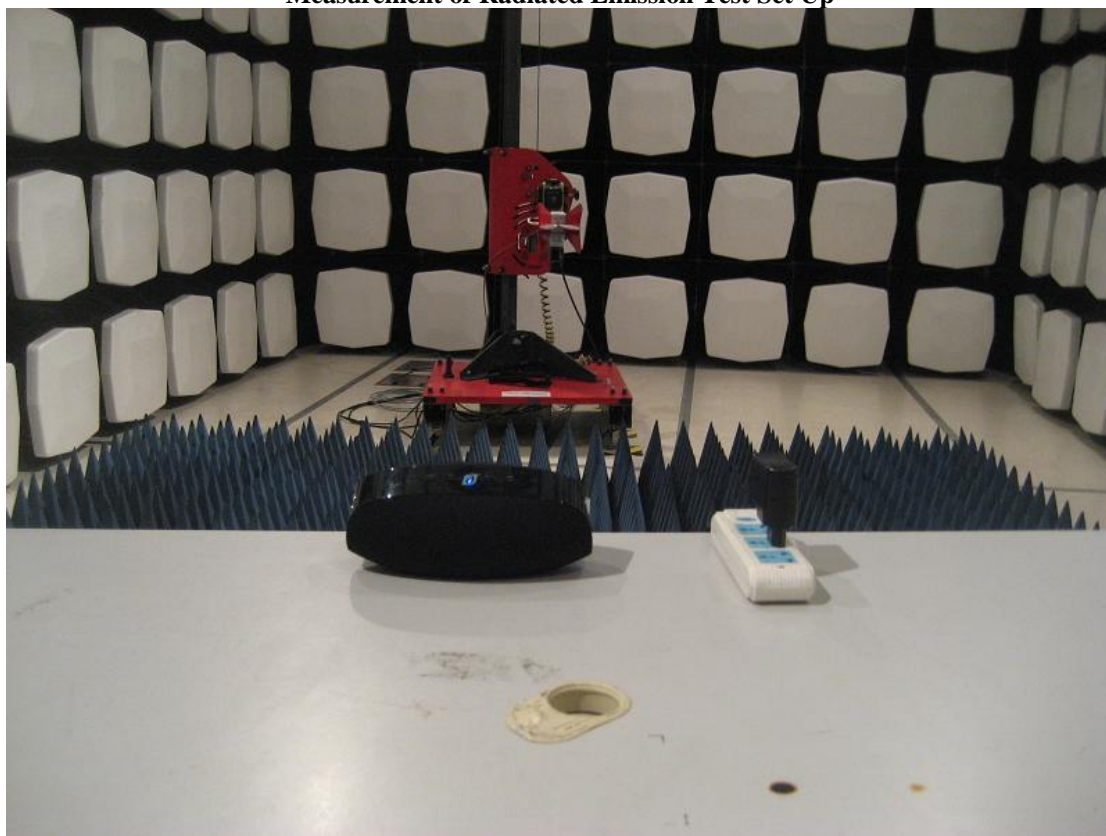

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2013-05-29

Page 41 of 41

No. : DM110869

Photographs of EUT

Measurement of Conducted Emission Test Set Up



******* End of Test Report *******

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage