



## STC Test Report

Date: 2015-03-03

Page 1 of 41

No.: MH191208

**Applicant:** Hip Shing Electronics Ltd.  
Units 1.2&3, 20/F., New Treasure Centre, 10 Ng Fong Street,  
San Po Kong, Kowloon, Hong Kong

**Manufacturer:** Dongguan Zhi Cheng Electronic Products Co., Ltd.  
No. 11 Shangbao Road, 188 Industrial Zone, Pingshan,  
Tangxia, Dongguan, Guangdong, China

**Description of Sample(s):** Submitted sample(s) said to be  
Product: Digital Radio Station  
Brand Name: REVO  
Model Number: SuperConnect  
FCC ID: BZAWDFB0315H2

**Date Sample(s) Received:** 2015-02-06

**Date Tested:** 2015-02-07 to 2015-02-14

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014. FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 and ANSI C63.4:2009 for FCC Certification.

**Conclusion(s):** The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remark(s):** Bluetooth DTS (GFSK)

Dr. LEE Kam Chuen\*

Authorized Signatory

ElectroMagnetic Compatibility Department

For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date: 2015-03-03

Page 2 of 41

No.: MH191208

### **CONTENT:**

|                          |  |                  |
|--------------------------|--|------------------|
| Cover                    | Page 1 of 41   |                  |
| Content                  | Page 2 of 41   |                  |
| <br>                     |  |                  |
| <b><u>1.0</u></b>        | <b><u>General Details</u></b>                              |                  |
| 1.1                      | Test Laboratory  | Page 3 of 41     |
| 1.2                      | Equipment Under Test [EUT]<br>Description of EUT operation | Page 3 of 41     |
| 1.3                      | Date of Order  | Page 3 of 41     |
| 1.4                      | Submitted Sample(s)  | Page 3 of 41     |
| 1.5                      | Test Duration  | Page 3 of 41     |
| 1.6                      | Country of Origin  | Page 3 of 41     |
| 1.7                      | RF Module Details  | Page 4 of 41     |
| 1.8                      | Antenna Details  | Page 4 of 41     |
| 1.9                      | Channel List   | Page 4 of 41     |
| <br>                     |  |                  |
| <b><u>2.0</u></b>        | <b><u>Technical Details</u></b>                            |                  |
| 2.1                      | Investigations Requested                                   | Page 5 of 41     |
| 2.2                      | Test Standards and Results Summary                         | Page 5 of 41     |
| <br>                     |  |                  |
| <b><u>3.0</u></b>        | <b><u>Test Results</u></b>                                 |                  |
| 3.1                      | Emission   | Page 6-35 of 41  |
| <br>                     |  |                  |
| <b><u>Appendix A</u></b> |  |                  |
|                          | List of Measurement Equipment                              | Page 36 of 41    |
| <br>                     |  |                  |
| <b><u>Appendix B</u></b> |  |                  |
|                          | Photographs of EUT   | Page 37-41 of 41 |

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date: 2015-03-03

Page 3 of 41

No.: MH191208

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

#### **1.2 Equipment Under Test [EUT] Description of Sample(s)**

Product: Digital Radio Station  
Manufacturer: Dongguan Zhi Cheng Electronic Products Co., Ltd.  
No. 11 Shangbao Road, 188 Industrial Zone, Pingshan,  
Tangxia, Dongguan, Guangdong, China  
Brand Name: REVO  
Model Number: SuperConnect  
Rating: Input: 100-240Va.c. 50/60Hz 0.75A,  
Output: 18Vd.c. 1330mA

The AC/DC adaptor was provided by the applicant with following details:-  
Brand name: REVO Model no.: GPE248-180133-Z

##### **1.2.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Digital Radio Station, modulation by IC; and type is frequency hopping speed spectrum Modulation.

#### **1.3 Date of Order**

2015-02-06

#### **1.4 Submitted Sample(s):**

1 Sample

#### **1.5 Test Duration**

2015-02-07 to 2015-02-14

#### **1.6 Country of Origin**

China

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-03

Page 4 of 41

No.: MH191208

### 1.7 RF Module Details

Module Model Number: JS-BTM8645  
Module FCC ID: N/A  
Module Transmission Type: Bluetooth DTS  
Modulation: GFSK  
Data Rates: 1Mbps  
Frequency Range: 2400-2483.5MHz  
Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

### 1.8 Antenna Details

Antenna Type: Meander line antenna  
Antenna Gain: 2.12dBi

### 1.9 Channel List

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | 21      | 2444            |
| 2       | 2406            | 22      | 2446            |
| 3       | 2408            | 23      | 2448            |
| 4       | 2410            | 24      | 2450            |
| 5       | 2412            | 25      | 2452            |
| 6       | 2414            | 26      | 2454            |
| 7       | 2416            | 27      | 2456            |
| 8       | 2418            | 28      | 2458            |
| 9       | 2420            | 29      | 2460            |
| 10      | 2422            | 30      | 2462            |
| 11      | 2424            | 31      | 2464            |
| 12      | 2426            | 32      | 2466            |
| 13      | 2428            | 33      | 2468            |
| 14      | 2430            | 34      | 2470            |
| 15      | 2432            | 35      | 2472            |
| 16      | 2434            | 36      | 2474            |
| 17      | 2436            | 37      | 2476            |
| 18      | 2438            | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 5 of 41

No.: MH191208

### **2.0** **Technical Details**

#### **2.1** **Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations. FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 and ANSI C63.4:2009 for FCC Certification.

#### **2.2** **Test Standards and Results Summary Tables**

| <b>EMISSION<br/>Results Summary</b> |                        |   |                  |                                     |                          |                          |
|-------------------------------------|------------------------|---|------------------|-------------------------------------|--------------------------|--------------------------|
| Test Condition                      | Test Requirement       | Test Method   | Class / Severity | Test Result                         |                          |                          |
|                                     |                        |   |                  | Pass                                | Fail                     | N/A                      |
| Maximum Peak Output Power           | FCC 47CFR 15.247(b)(3) | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Spurious Emissions         | FCC 47CFR 15.209       | ANSI C63.4:2009   | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| AC Mains Conducted Emissions        | FCC 47CFR 15.207       | ANSI C63.4:2009   | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Power Spectral Density              | FCC 47CFR 15.247(e)    | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 6dB Bandwidth                       | FCC 47CFR 15.247(a)(2) | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Band Edge Emissions (Radiated)      | FCC 47CFR 15.247(d)    | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Antenna requirement                 | FCC 47CFR 15.203       | N/A   | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| RF Exposure                         | FCC 47CFR 15.247(i)    | N/A   | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Note: N/A - Not Applicable

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 6 of 41

No.: MH191208

### **3.0 Test Results**

#### **3.1 Emission**


##### **3.1.1 Maximum Peak Output Power**

|                    |   |
|--------------------|---|
| Test Requirement:  | FCC 47CFR 15.247(b)(3)                                  |
| Test Method:       | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 |
| Test Date:         | 2015-02-07  |
| Mode of Operation: | Bluetooth DTS Tx mode                                   |

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

#### **Test Setup:**

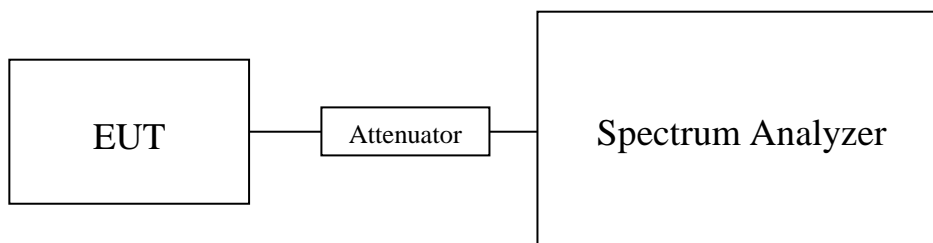

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 7 of 41

No.: MH191208

### **Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:**

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

| <b>Results of BT DTS Tx Mode (2402MHz to 2480MHz) : Pass (TX Unit) (GFSK)</b> |                       |                           |
|---|-----------------------|---------------------------|
| <b>Maximum conducted output power</b>   |                       |                           |
| <b>Channel</b>  | <b>Frequency(MHz)</b> | <b>Output Power(Watt)</b> |
| 0   | 2402                  | 0.002023                  |
| 20  | 2442                  | 0.002153                  |
| 39  | 2480                  | 0.002023                  |

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB  
1GHz to 26GHz 1.7dB

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-03

Page 8 of 41

No.: MH191208

**Test plot of Maximum Peak Conducted Output Power :**

**Bluetooth Communication mode (BT DTS-GFSK, 2402MHz)**

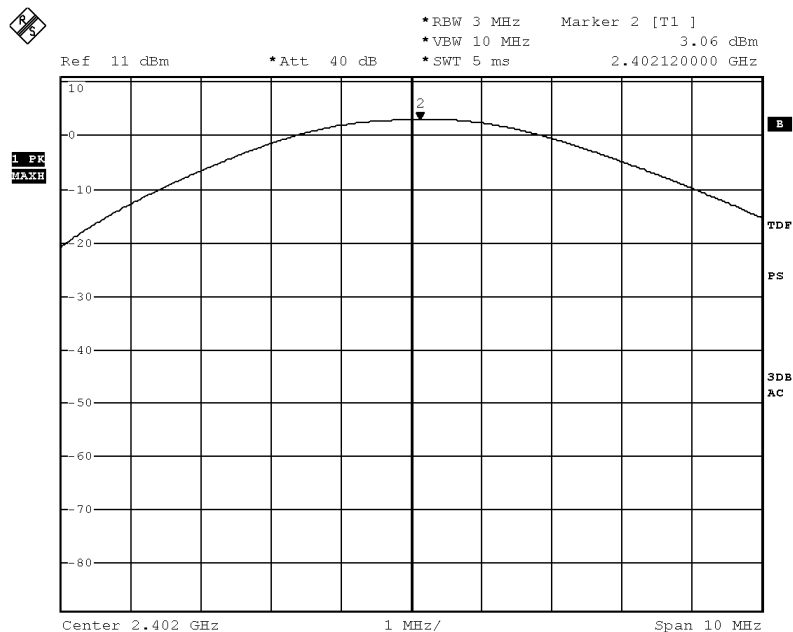

Date: 7.FEB.2015 13:37:00

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage






## STC Test Report

Date: 2015-03-03

Page 9 of 41

No.: MH191208

### Bluetooth Communication mode (BT DTS-GFSK, 2442MHz)

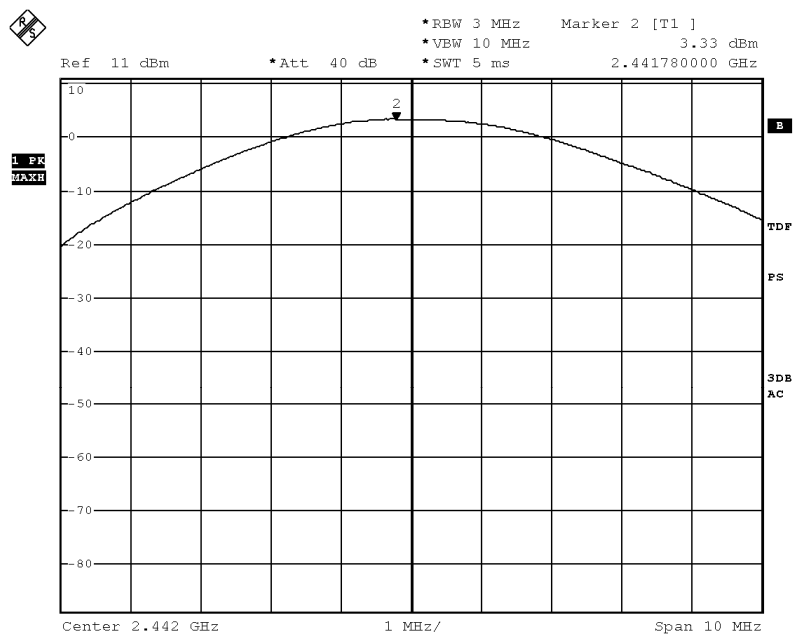

Date: 7.FEB.2015 13:37:50

**The Hong Kong Standards and Testing Centre Ltd.**  
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date: 2015-03-03

Page 10 of 41

No.: MH191208

### Bluetooth Communication mode (BT DTS-GFSK, 2480MHz)

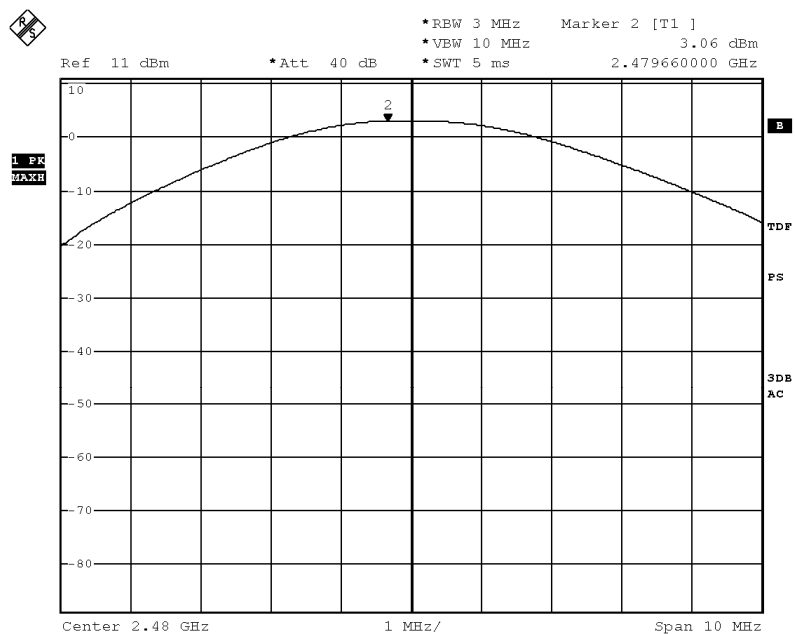

Date: 7.FEB.2015 13:38:33

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 11 of 41

No.: MH191208

### 3.1.2 Radiated Emissions


Test Requirement: FCC 47CFR 15.209  
Test Method: ANSI C63.4:2009  
Test Date: 2015-02-10  
Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK)

#### Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

#### Test Setup:

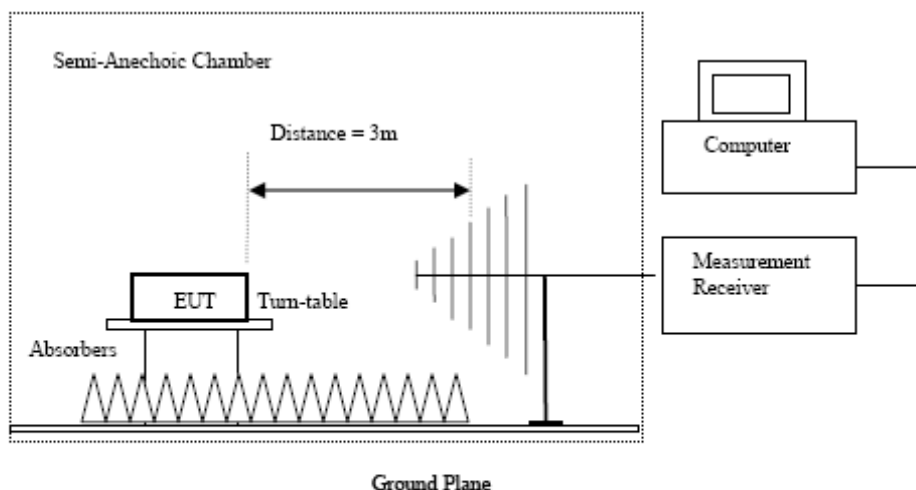

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 12 of 41

No.: MH191208

### **Limits for Radiated Emissions [FCC 47 CFR 15.247 Class B]:**

| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[ $\mu$ V/m] |
|--------------------------|-----------------------------------|
| 0.009-0.490              | 2400/F (kHz)                      |
| 0.490-1.705              | 24000/F (kHz)                     |
| 1.705-30                 | 30                                |
| 30-88                    | 100                               |
| 88-216                   | 150                               |
| 216-960                  | 200                               |
| Above960                 | 500                               |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### **Result of Bluetooth Communication mode (GFSK) (9kHz – 30MHz): Pass**

The Low Frequency, which started from 9KHz to 30MHz, was Pre-scan and the result which was more than 20dB lower than the Limit line.

### **Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass**

| <b>Field Strength of Spurious Emissions<br/>Peak Value</b> |                                     |                              |                                   |                              |                        |                     |
|--|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz   | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4804.0   | 15.6                                | 41.5                         | 57.1                              | 74.0                         | 16.9                   | Vertical            |
| 4804.0   | 12.9                                | 42.4                         | 55.3                              | 74.0                         | 18.7                   | Horizontal          |
| 7206.0   | 8.0                                 | 45.1                         | 53.1                              | 74.0                         | 21.0                   | Vertical            |
| 7206.0   | 8.2                                 | 46.2                         | 54.4                              | 74.0                         | 19.6                   | Horizontal          |
| 9608.0   | 6.3                                 | 48.0                         | 54.3                              | 74.0                         | 19.7                   | Vertical            |
| 9608.0   | 4.8                                 | 48.8                         | 53.6                              | 74.0                         | 20.4                   | Horizontal          |
| 12010.0  | 4.1                                 | 51.5                         | 55.6                              | 74.0                         | 18.4                   | Vertical            |
| 12010.0  | 2.9                                 | 52.4                         | 55.3                              | 74.0                         | 18.7                   | Horizontal          |

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-03

Page 13 of 41

No.: MH191208

| Field Strength of Spurious Emissions<br>Average Value |                                     |                              |                                   |                              |                        |                     |
|---|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4804.0  | 0.2                                 | 41.5                         | 41.7                              | 54.0                         | 12.3                   | Vertical            |
| 4804.0  | -2.8                                | 42.4                         | 39.7                              | 54.0                         | 14.4                   | Horizontal          |
| 7206.0  | -7.5                                | 45.1                         | 37.6                              | 54.0                         | 16.4                   | Vertical            |
| 7206.0  | -5.4                                | 46.2                         | 40.8                              | 54.0                         | 13.2                   | Horizontal          |
| 9608.0  | -9.1                                | 48.0                         | 38.9                              | 54.0                         | 15.1                   | Vertical            |
| 9608.0  | -11.5                               | 48.8                         | 37.3                              | 54.0                         | 16.7                   | Horizontal          |
| 12010.0   | -11.6                               | 51.5                         | 39.9                              | 54.0                         | 14.1                   | Vertical            |
| 12010.0   | -11.5                               | 52.4                         | 40.92                             | 54.0                         | 13.1                   | Horizontal          |

Result of Tx mode (2442.0 MHz) (GFSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|--|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4884.0   | 15.1                                | 41.6                         | 56.7                              | 74.0                         | 17.3                   | Vertical            |
| 4884.0   | 12.3                                | 42.5                         | 54.8                              | 74.0                         | 19.2                   | Horizontal          |
| 7326.0   | 1.5                                 | 45.2                         | 46.7                              | 74.0                         | 27.3                   | Vertical            |
| 7326.0   | 8.3                                 | 46.3                         | 54.6                              | 74.0                         | 19.4                   | Horizontal          |
| 9768.0   | 6.1                                 | 48.1                         | 54.2                              | 74.0                         | 19.8                   | Vertical            |
| 9768.0   | 6.3                                 | 48.9                         | 55.2                              | 74.0                         | 18.8                   | Horizontal          |
| 12210.0  | 4.0                                 | 51.6                         | 55.6                              | 74.0                         | 18.4                   | Vertical            |
| 12210.0  | 3.7                                 | 52.5                         | 56.2                              | 74.0                         | 17.8                   | Horizontal          |

| Field Strength of Spurious Emissions<br>Average Value |                                     |                              |                                   |                              |                        |                     |
|---|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4884.0  | -0.3                                | 41.6                         | 41.3                              | 54.0                         | 12.7                   | Vertical            |
| 4884.0  | -3.0                                | 42.5                         | 39.5                              | 54.0                         | 14.5                   | Horizontal          |
| 7326.0  | -5.0                                | 45.2                         | 40.2                              | 54.0                         | 13.8                   | Vertical            |
| 7326.0  | -6.4                                | 46.3                         | 39.9                              | 54.0                         | 14.1                   | Horizontal          |
| 9768.0  | -9.2                                | 48.1                         | 38.9                              | 54.0                         | 15.1                   | Vertical            |
| 9768.0  | -8.3                                | 48.9                         | 40.6                              | 54.0                         | 13.4                   | Horizontal          |
| 12210.0   | -11.4                               | 51.6                         | 40.2                              | 54.0                         | 13.8                   | Vertical            |
| 12210.0   | -10.7                               | 52.5                         | 41.9                              | 54.0                         | 12.2                   | Horizontal          |

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 14 of 41

No.: MH191208

### Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

| Field Strength of Spurious Emissions |                                     |                              |                                   |                              |                        |                     |
|--------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Peak Value                           |                                     |                              |                                   |                              |                        |                     |
| Frequency<br>MHz                     | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4960.0                               | 14.9                                | 41.4                         | 56.3                              | 74.0                         | 17.7                   | Vertical            |
| 4960.0                               | 11.5                                | 42.7                         | 54.2                              | 74.0                         | 19.8                   | Horizontal          |
| 7440.0                               | 7.6                                 | 45.6                         | 53.2                              | 74.0                         | 20.8                   | Vertical            |
| 7440.0                               | 9.2                                 | 46.5                         | 55.7                              | 74.0                         | 18.3                   | Horizontal          |
| 9920.0                               | 5.3                                 | 48.6                         | 53.9                              | 74.0                         | 20.1                   | Vertical            |
| 9920.0                               | 5.17                                | 49.7                         | 54.9                              | 74.0                         | 19.1                   | Horizontal          |
| 12400.0                              | 4.0                                 | 51.7                         | 55.7                              | 74.0                         | 18.3                   | Vertical            |
| 12400.0                              | 3.3                                 | 52.7                         | 56.0                              | 74.0                         | 18.0                   | Horizontal          |

| Field Strength of Spurious Emissions |                                     |                              |                                   |                              |                        |                     |
|--------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Average Value                        |                                     |                              |                                   |                              |                        |                     |
| Frequency<br>MHz                     | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4960.0                               | -0.4                                | 41.4                         | 41.1                              | 54.0                         | 13.0                   | Vertical            |
| 4960.0                               | -2.9                                | 42.7                         | 39.8                              | 54.0                         | 14.2                   | Horizontal          |
| 7440.0                               | -7.9                                | 45.6                         | 37.7                              | 54.0                         | 16.3                   | Vertical            |
| 7440.0                               | 6.2                                 | 46.5                         | 52.7                              | 54.0                         | 1.3                    | Horizontal          |
| 9920.0                               | -10.4                               | 48.6                         | 38.2                              | 54.0                         | 15.8                   | Vertical            |
| 9920.0                               | -9.5                                | 49.7                         | 40.2                              | 54.0                         | 13.8                   | Horizontal          |
| 12400.0                              | -11.7                               | 51.7                         | 40.0                              | 54.0                         | 14.0                   | Vertical            |
| 12400.0                              | -12.4                               | 52.7                         | 40.28                             | 54.0                         | 13.7                   | Horizontal          |

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty (9kHz-30MHz): 2.0dB  
(30MHz -1GHz): 4.9dB  
(1GHz -6GHz): 4.02dB  
(6GHz -26.5GHz): 4.03dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-03

Page 15 of 41

No.: MH191208

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[ $\mu\text{V}/\text{m}$ ] |
|--------------------------|---|
| 0.009-0.490              | 2400/F (kHz)                                    |
| 0.490-1.705              | 24000/F (kHz)                                   |
| 1.705-30                 | 30  |
| 30-88                    | 100   |
| 88-216                   | 150   |
| 216-960                  | 200   |
| Above960                 | 500   |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Bluetooth Communication mode (30MHz – 1GHz): Pass

Please refer to the following table for result details

#### Horizontal

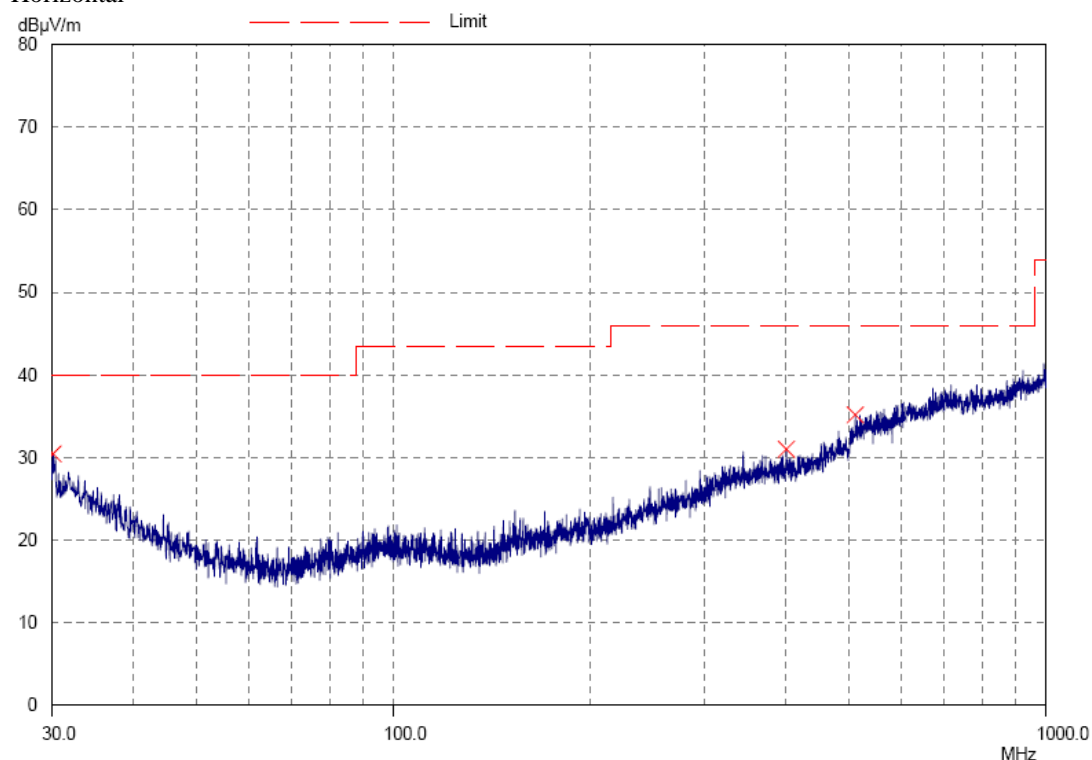

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 16 of 41

No.: MH191208

### **Result of Bluetooth Communication mode (30MHz – 1GHz): Pass**

| <b>Radiated Emissions<br/>Quasi-Peak</b> |                     |                              |                              |                           |                           |
|--|---------------------|------------------------------|------------------------------|---------------------------|---------------------------|
| Emission<br>Frequency<br>MHz             | E-Field<br>Polarity | Level<br>@3m<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Level<br>@3m<br>$\mu$ V/m | Limit<br>@3m<br>$\mu$ V/m |
| 30.1                                     | Horizontal          | 30.4                         | 40.0                         | 33.1                      | 100                       |
| 400.4                                    | Horizontal          | 31.1                         | 46.0                         | 35.9                      | 200                       |
| 510.6                                    | Horizontal          | 35.1                         | 46.0                         | 56.9                      | 200                       |

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2015-03-03

Page 17 of 41

No.: MH191208

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[ $\mu\text{V}/\text{m}$ ] |
|--------------------------|---|
| 0.009-0.490              | 2400/F (kHz)                                    |
| 0.490-1.705              | 24000/F (kHz)                                   |
| 1.705-30                 | 30  |
| 30-88                    | 100   |
| 88-216                   | 150   |
| 216-960                  | 200   |
| Above960                 | 500   |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Bluetooth Communication mode (30MHz – 1GHz): Pass

Please refer to the following table for result details

Vertical

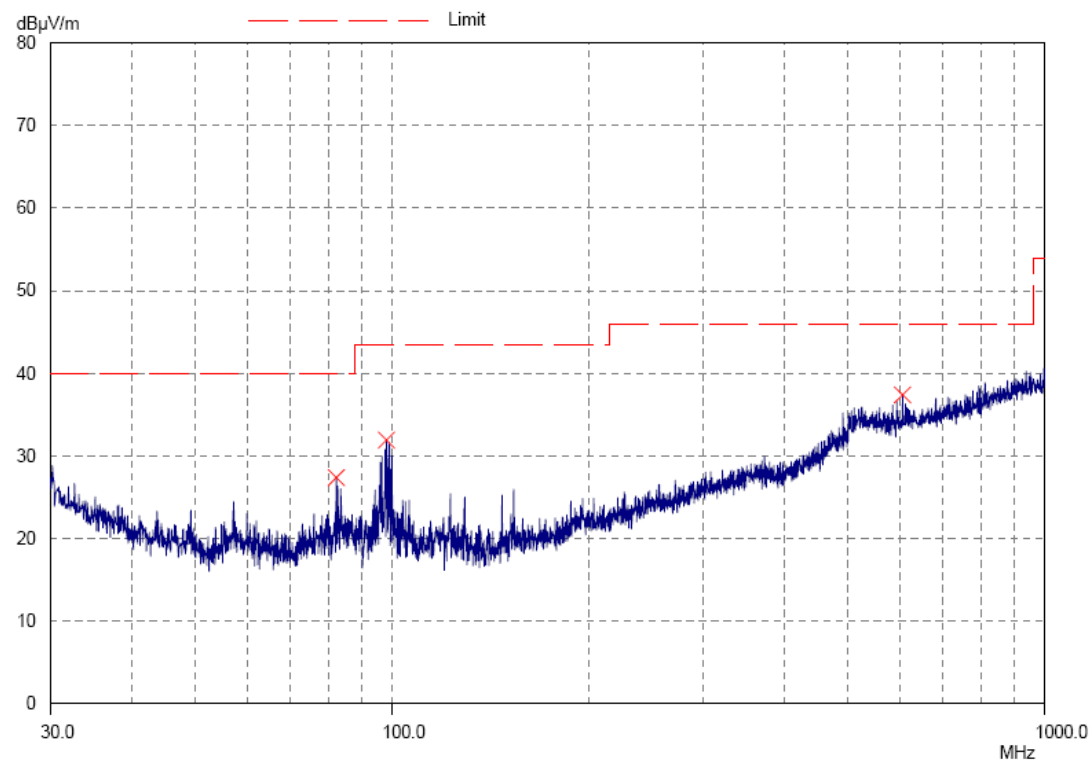

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 18 of 41

No.: MH191208

### **Result of Bluetooth Communication mode (30MHz – 1GHz): Pass**

| <b>Radiated Emissions<br/>Quasi-Peak</b> |                     |                              |                              |                           |                           |
|--|---------------------|------------------------------|------------------------------|---------------------------|---------------------------|
| Emission<br>Frequency<br>MHz             | E-Field<br>Polarity | Level<br>@3m<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Level<br>@3m<br>$\mu$ V/m | Limit<br>@3m<br>$\mu$ V/m |
| 82.2                                     | Vertical            | 27.3                         | 40.0                         | 23.2                      | 100                       |
| 98.1                                     | Vertical            | 31.9                         | 43.5                         | 39.4                      | 150                       |
| 605.9                                    | Vertical            | 37.4                         | 46.0                         | 74.1                      | 200                       |

#### Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 19 of 41

No.: MH191208


### 3.1.3 Conducted Emissions (0.15MHz to 30MHz)

|                    |                                     |
|--------------------|-------------------------------------|
| Test Requirement:  | FCC 47CFR 15.207                    |
| Test Method:       | ANSI C63.4:2009                     |
| Test Date:         | 2015-02-09                          |
| Mode of Operation: | Bluetooth Communication mode (GFSK) |
| Test Voltage:      | 120V a.c., 60Hz                     |

#### Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### Test Setup:

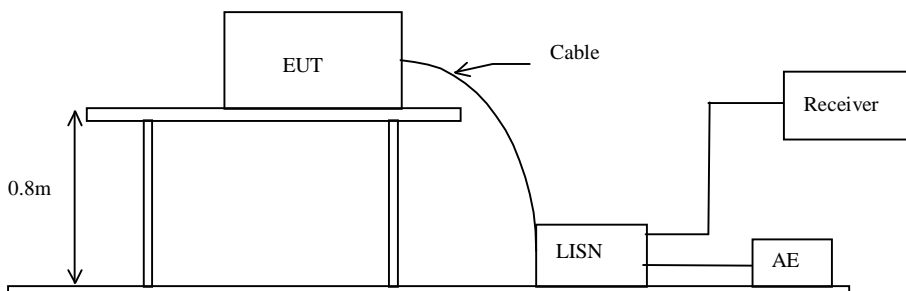

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 20 of 41

No.: MH191208

**Limit for Conducted Emissions (FCC 47 CFR 15.207):**


| Frequency Range [MHz] | Quasi-Peak Limits [dBμV] | Average [dBμV] |
|-----------------------|--------------------------|----------------|
| 0.15-0.5              | 66 to 56*                | 56 to 46*      |
| 0.5-5.0               | 56                       | 46             |
| 5.0-30.0              | 60                       | 50             |

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

**Result of Bluetooth Communication mode (L): PASS**

Please refer to the following diagram for individual results.

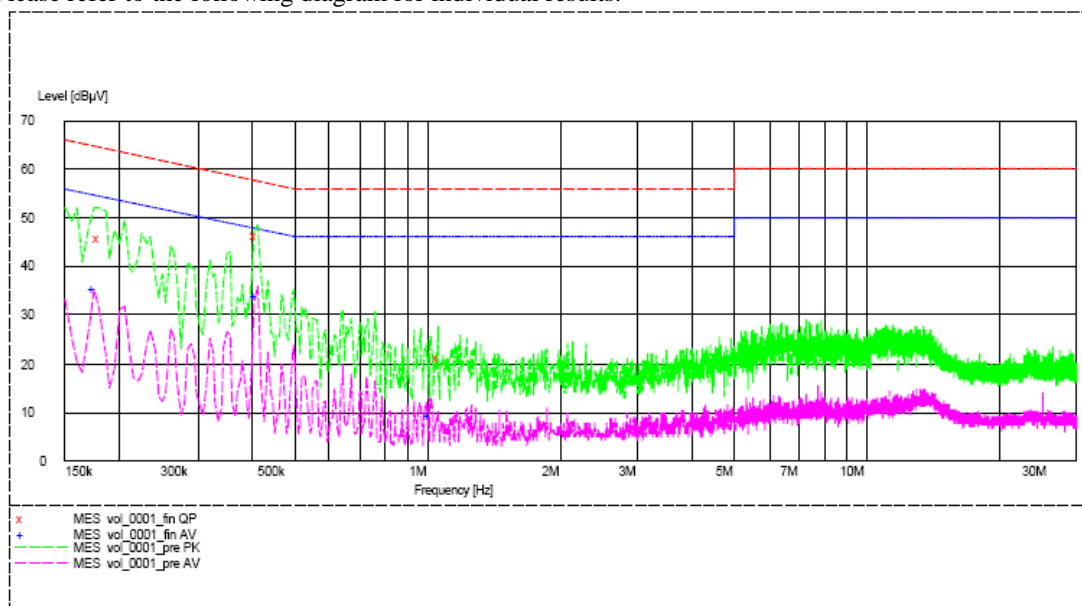

| Conductor<br>Live or Neutral | Frequency<br>MHz | Quasi-peak    |               | Average       |               |
|------------------------------|------------------|---------------|---------------|---------------|---------------|
|                              |                  | Level<br>dBμV | Limit<br>dBμV | Level<br>dBμV | Limit<br>dBμV |
| Live                         | 0.180            | 45.6          | 65.0          | _*-           | _*-           |
| Live                         | 0.410            | 46.5          | 58.0          | _*-           | _*-           |
| Live                         | 1.055            | 21.1          | 56.0          | _*-           | _*-           |
| Live                         | 0.175            | _*-           | _*-           | 35.6          | 55.0          |
| Live                         | 0.410            | _*-           | _*-           | 34.0          | 48.0          |
| Live                         | 1.015            | _*-           | _*-           | 9.5           | 46.0          |

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 21 of 41

No.: MH191208

### Limit for Conducted Emissions (FCC 47 CFR 15.207):


| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[dB $\mu$ V] | Average<br>[dB $\mu$ V] |
|--------------------------|-----------------------------------|-------------------------|
| 0.15-0.5                 | 66 to 56*                         | 56 to 46*               |
| 0.5-5.0                  | 56                                | 46                      |
| 5.0-30.0                 | 60                                | 50                      |

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Result of Bluetooth Communication mode (N): PASS

Please refer to the following diagram for individual results.

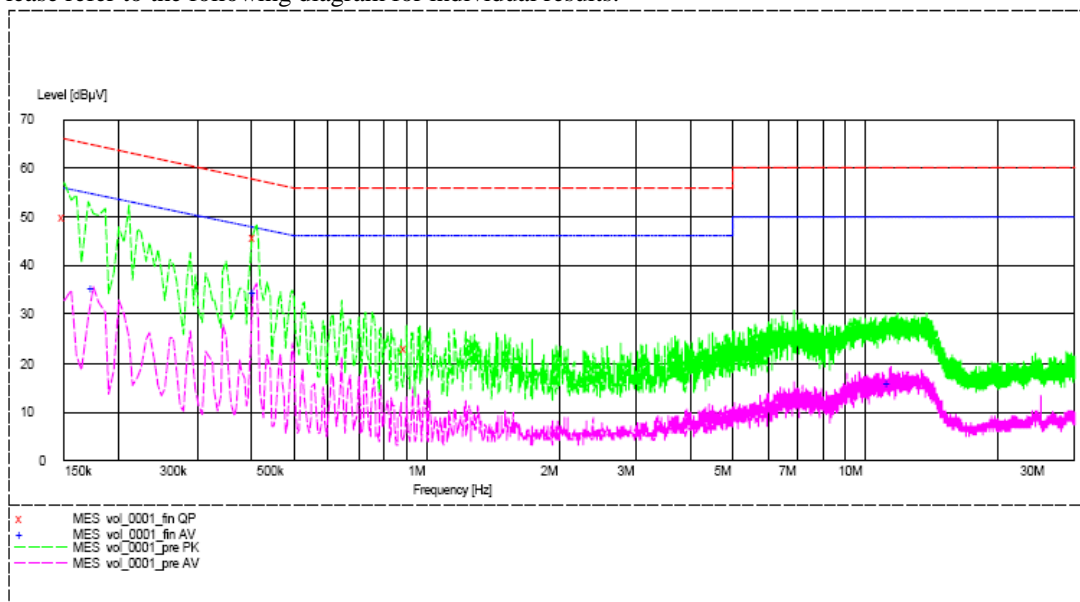

| Conductor<br>Live or Neutral | Frequency<br>MHz | Quasi-peak          |                     | Average             |                     |
|------------------------------|------------------|---------------------|---------------------|---------------------|---------------------|
|                              |                  | Level<br>dB $\mu$ V | Limit<br>dB $\mu$ V | Level<br>dB $\mu$ V | Limit<br>dB $\mu$ V |
| Neutral                      | 0.150            | 49.9                | 66.0                | -*-                 | -*-                 |
| Neutral                      | 0.410            | 45.9                | 58.0                | -*-                 | -*-                 |
| Neutral                      | 0.905            | 23.1                | 56.0                | -*-                 | -*-                 |
| Neutral                      | 0.175            | -*-                 | -*-                 | 35.6                | 55.0                |
| Neutral                      | 0.410            | -*-                 | -*-                 | 34.5                | 48.0                |
| Neutral                      | 11.405           | -*-                 | -*-                 | 16.2                | 50.0                |

Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.25dB

-\*- Emission(s) that is far below the corresponding limit line.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 22 of 41

No.: MH191208

### 3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)  
Test Method: FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02  
Test Date: 2015-02-07  
Mode of Operation: Bluetooth DTS Tx mode

#### Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

#### Test Setup:

As Test Setup of clause 3.1.1 in this test report.

#### Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

#### Results of Bluetooth DTS Mode (Tx:2402MHz to 2480MHz) : Pass (TX Unit)

##### Maximum power spectral density

| Transmitter Frequency (MHz) | Maximum Power spectral density level / 3kHz band (dBm) | Maximum Power spectral density / 3kHz band limit |
|-----------------------------|--|--|
| 2402.0                      | -13.30   | 8dBm   |
| 2442.0                      | -12.97   | 8dBm   |
| 2480.0                      | -12.81   | 8dBm   |

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date: 2015-03-03

Page 23 of 41

No.: MH191208

### Bluetooth DTS mode (Tx: 2402MHz to 2480MHz) 2402.0 MHz

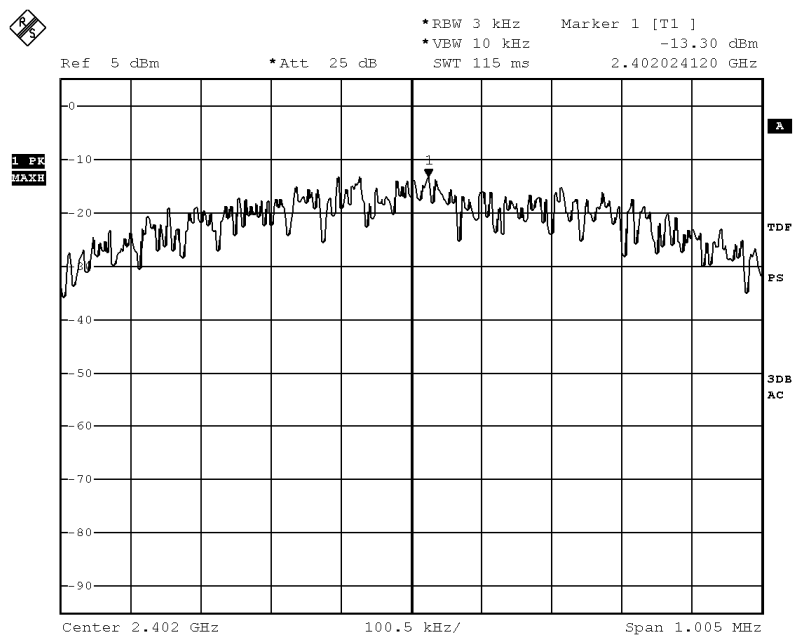

Date: 7.FEB.2015 13:57:39

**The Hong Kong Standards and Testing Centre Ltd.**  
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date: 2015-03-03

Page 24 of 41

No.: MH191208

2442.0 MHz

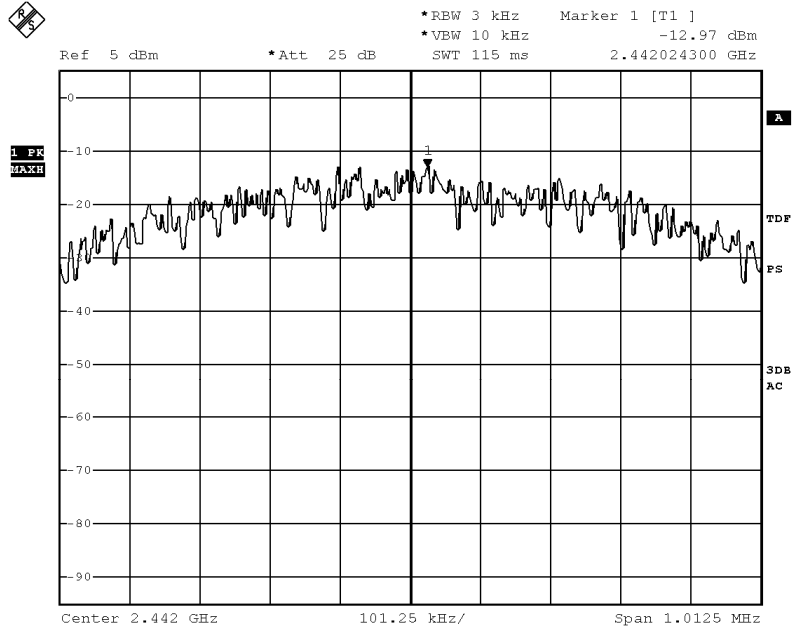

Date: 7.FEB.2015 13:57:11

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage






## STC Test Report

Date: 2015-03-03

Page 25 of 41

No.: MH191208

2480.0 MHz

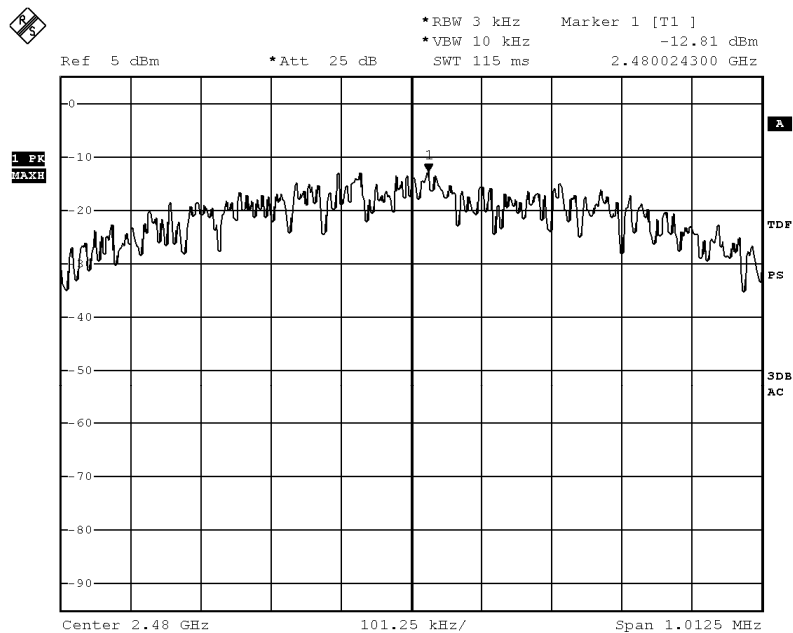

Date: 7.FEB.2015 13:56:49

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date: 2015-03-03

Page 26 of 41

No.: MH191208

### **3.1.5 6dB Bandwidth Measurement**

|                    |   |
|--------------------|---|
| Test Requirement:  | FCC 47CFR 15.247(a)(2)                                  |
| Test Method:       | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 |
| Test Date:         | 2015-02-07  |
| Mode of Operation: | Bluetooth DTS Tx mode                                   |

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03


Page 27 of 41

No.: MH191208

### Limits for 6dB Bandwidth Measurement:

| Center Frequency<br>[MHz] | 6dB Bandwidth<br>[kHz] | FCC Limits<br>[kHz] |
|---------------------------|------------------------|---------------------|
| 2402.0                    | 670                    | > 500               |

6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2402MHz)

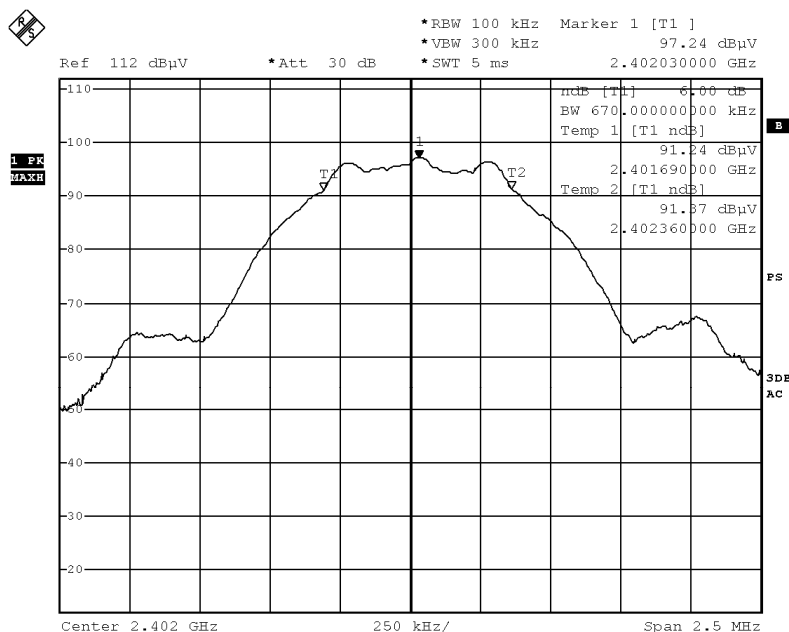

Date: 7.FEB.2015 13:13:28

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03


Page 28 of 41

No.: MH191208

### Limits for 6dB Bandwidth Measurement:

| Center Frequency<br>[MHz] | 6dB Bandwidth<br>[kHz] | FCC Limits<br>[kHz] |
|---------------------------|------------------------|---------------------|
| 2442.0                    | 675                    | > 500               |

6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2442MHz)

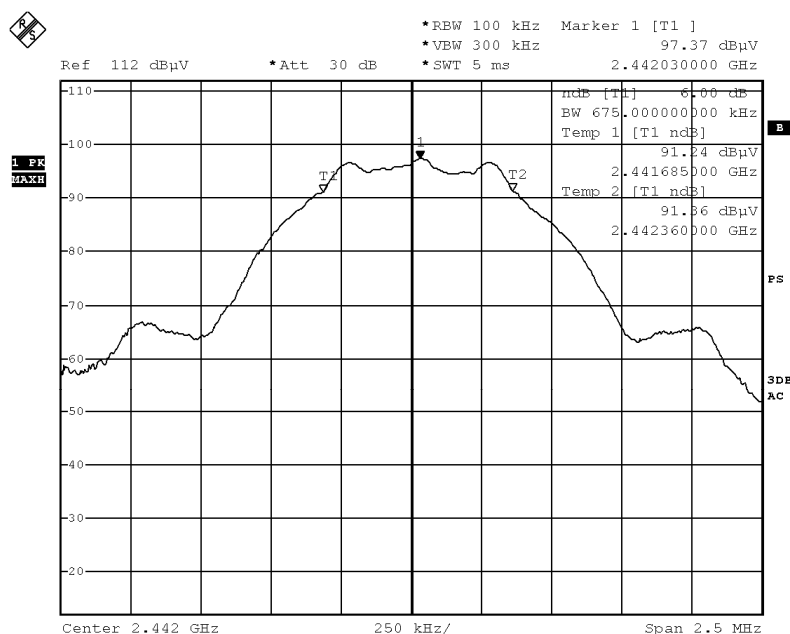

Date: 7.FEB.2015 13:15:39

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03


Page 29 of 41

No.: MH191208

### Limits for 6dB Bandwidth Measurement:

| Center Frequency<br>[MHz] | 6dB Bandwidth<br>[kHz] | FCC Limits<br>[kHz] |
|---------------------------|------------------------|---------------------|
| 2480.0                    | 675                    | > 500               |

6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2480MHz)

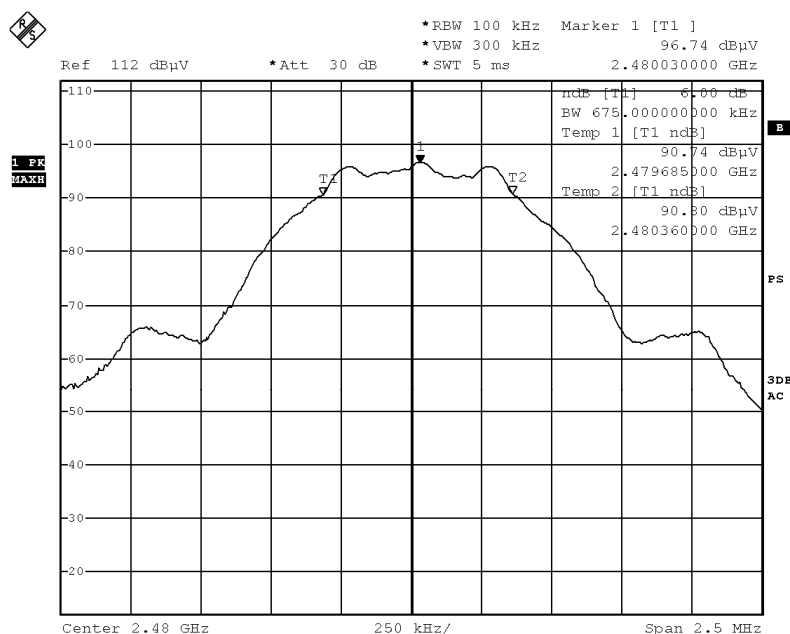

Date: 7.FEB.2015 13:16:37

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date: 2015-03-03

Page 30 of 41

No.: MH191208

### **3.1.6 Band Edges Measurement**

|                    |   |
|--------------------|---|
| Test Requirement:  | FCC 47CFR 15.247  |
| Test Method:       | FCC KDB Publication 558074 D01 DTS Meas Guidance v03r02 |
| Test Date:         | 2015-02-07  |
| Mode of Operation: | Bluetooth DTS Tx mode                                   |

#### **Test Method:**

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW and VBW are set to 100kHz for this measurement.

#### **Test Setup:**

As Test Setup of clause 3.1.2 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 31 of 41

No.: MH191208


### Band-edge Compliance of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

| Frequency Range<br>[MHz]         | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|----------------------------------|---|
| 2400 – Lowest Fundamental (2402) | 48.14   |

### Band-edge Compliance of RF Conducted Emissions – Lowest (GFSK: Bluetooth DTS mode 2402MHz)

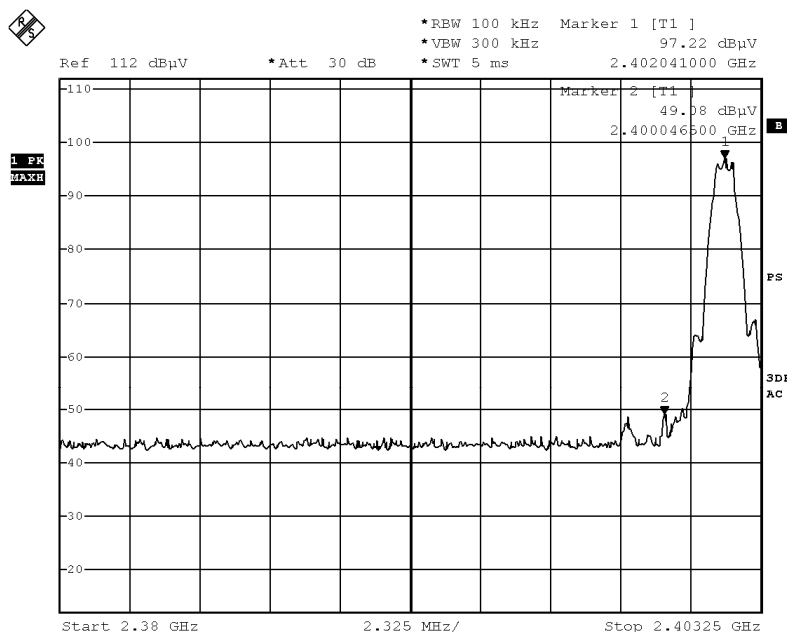

Date: 7.FEB.2015 13:24:54

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# STC Test Report

Date: 2015-03-03


Page 32 of 41

No.: MH191208

### Band-edge Compliance of RF Conducted Emissions Measurement:

| Frequency Range<br>[MHz]            | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|-------------------------------------|---|
| 2483.5 - Highest Fundamental (2480) | 52.67   |

### Band-edge Compliance of RF Conducted Emissions – Highest (GFSK: Bluetooth DTS mode 2480MHz)

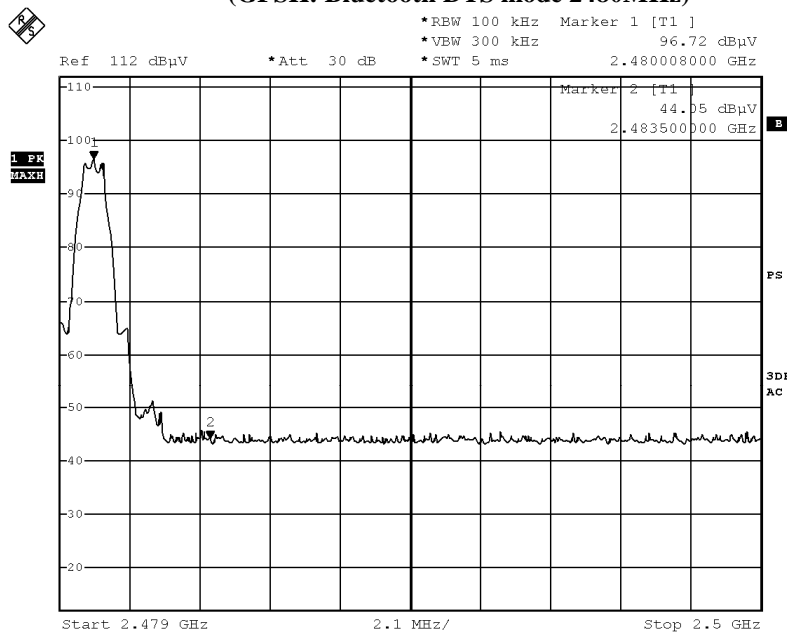

Date: 7.FEB.2015 13:23:27

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2015-03-03

Page 33 of 41

No.: MH191208

### Band-edge Compliance of RF Radiated Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

### Result: Band-edge Compliance of RF Radiated Emissions (Lowest)

| Field Strength of Band-edge Compliance<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|--|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2400.0   | 27.6                                | 36.8                         | 64.4                              | 74.0                         | 9.6                    | Vertical            |

| Field Strength of Band-edge Compliance<br>Average Value |                                     |                              |                                   |                              |                        |                     |
|---|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz  | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2400.0  | 3.5                                 | 36.8                         | 40.3                              | 54.0                         | 13.7                   | Vertical            |

### Result: Band-edge Compliance of RF Radiated Emissions (Highest)

| Field Strength of Band-edge Compliance<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|--|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2483.5   | 25.8                                | 36.8                         | 62.6                              | 74.0                         | 11.4                   | Horizontal          |

| Field Strength of Band-edge Compliance<br>Average Value |                                     |                              |                                   |                              |                        |                     |
|---|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz  | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2483.5  | 3.3                                 | 36.8                         | 40.1                              | 54.0                         | 14.0                   | Horizontal          |

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date: 2015-03-03

Page 34 of 41

No.: MH191208

### **3.1.7 Antenna Requirement**

#### **Test Requirements: § 15.203**

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Meander line antenna. There is no external antenna, the antenna gain = 2.12dBi.  
All component install on inside of EUT. User unable to remove or changed the Antenna.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 35 of 41

No.: MH191208

### **3.1.8 RF Exposure**

Test Requirement: FCC 47CFR 15.247(i)  
Test Date: 2015-02-14  
Mode of Operation: Tx mode

#### **Test Method:**

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

#### **Test Results:**

The EUT complied with the requirement(s) of this section.  
EUT meets the requirements of these sections as proven through MPE calculation  
The MPE calculation for EUT @ 20cm  
Based on the highest P = 2.153 mW

$$\begin{aligned} P_d &= PG / 4\pi R^2 = (2.153 \times 1.63) / 12.566 \times (20)^2 \\ &= (3.5093) / 12.566 \times 400 = 3.4017 / 5026.4 \\ &= 0.000698 \text{ mW/cm}^2 \end{aligned}$$

where:

- \*Pd = power density in mW/cm<sup>2</sup>
- \* G = Antenna numeric gain (1.63); Log G = g/10 ( g = 2.12dBi ).
- \* P = Conducted RF power to antenna (2.153 mW).
- \* R = Minimum allowable distance.(20 cm)

- \*The power density Pd = 0.000698mW/cm<sup>2</sup> is less than 1 mW/cm<sup>2</sup> (listed MPE limit)
- \*The SAR evaluation is not needed ( this is a desk top device, R> 20 cm )
- \* The EUT( antenna ) must be 0.2 meters away from the General Population.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-03

Page 36 of 41

No.: MH191208

### Appendix A

#### List of Measurement Equipment

##### Radiated Emission

| EQP NO. | DESCRIPTION                          | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL   | DUE CAL    |
|---------|--------------------------------------|--------------|-----------|------------|------------|------------|
| EM299   | DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA | ETS-LINDGREN | 3115      | 00114120   | 2014/01/15 | 2016/01/25 |
| EM300   | PYRAMIDAL STANDARD GAIN HORN ANTENNA | ETS-LINDGREN | 3160-09   | 00130130   | 2014/01/23 | 2016/01/23 |
| EM215   | MULTIDEVICE CONTROLLER               | EMCO         | 2090      | 00024676   | N/A        | N/A        |
| EM216   | MINI MAST SYSTEM                     | EMCO         | 2075      | 00026842   | N/A        | N/A        |
| EM217   | ELECTRIC POWERED TURNTABLE           | EMCO         | 2088      | 00029144   | N/A        | N/A        |
| EM218   | ANECHOIC CHAMBER                     | ETS-LINDGREN | FACT-3    | --         | 2014/09/30 | 2015/09/30 |
| EM219   | BICONILOG ANTENNA                    | EMCO         | 3142C     | 00029071   | 2013/04/25 | 2015/04/25 |
| EM022   | LOOP ANTENNA                         | EMCO         | 6502      | 1189-2424  | 2014/01/15 | 2016/01/15 |
| EM229   | EMI TEST RECEIVER                    | R&S          | ESIB40    | 100248     | 2014/05/26 | 2015/05/26 |

##### Line Conducted

| EQP NO. | DESCRIPTION       | MANUFACTURER                        | MODEL NO. | SERIAL NO.      | LAST CAL   | DUE CAL    |
|---------|-------------------|-------------------------------------|-----------|-----------------|------------|------------|
| EM232   | LISN              | SCHAFFNER                           | NNB41     | 04/100082       | 2014/12/08 | 2015/12/08 |
| EM181   | EMI TEST RECEIVER | ROHDE & SCHWARZ                     | ESIB7     | 100072          | 2014/05/26 | 2015/05/26 |
| EM179   | IMPULSE LIMITER   | ROHDE & SCHWARZ                     | ESH3-Z2   | 357-8810.52/54  | 2015/01/14 | 2016/01/14 |
| EM154   | SHIELDING ROOM    | SIEMENS<br>MATSUSHITA<br>COMPONENTS | N/A       | 803-740-057-99A | 2012/02/03 | 2017/02/03 |

Remarks:-

N/A Not Applicable or Not Available

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-03

Page 37 of 41

No.: MH191208

### Appendix B

#### Photographs of EUT

**Front View of the product**




**Rear View of the product**



**Inside View of the product**



**Inner Circuit Top View**

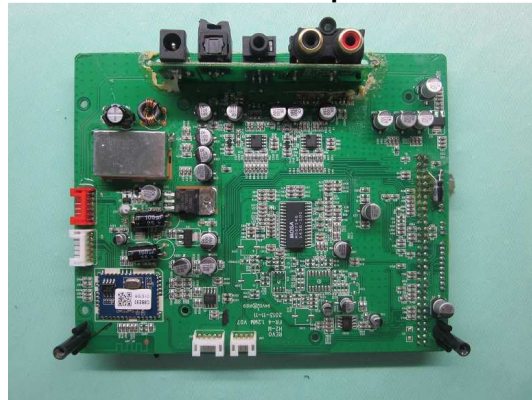

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-03

Page 38 of 41


No.: MH191208

### Photographs of EUT

**Inner Circuit Bottom View**

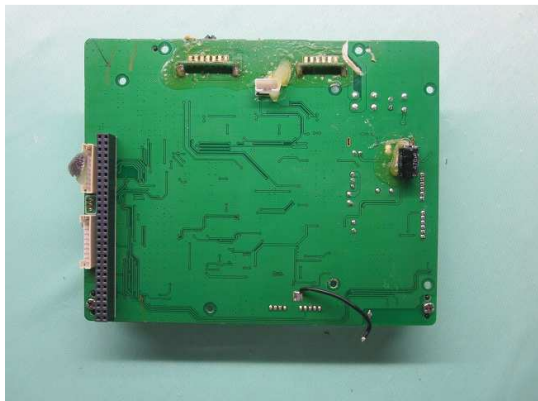

**Inner Circuit Bottom View**

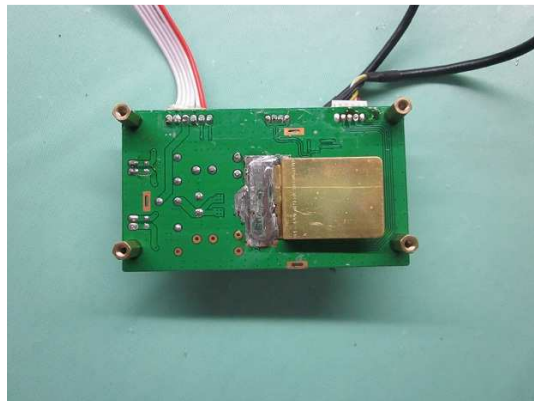

**Inner Circuit Top View**




**Inner Circuit Bottom View**



**Inner Circuit Top View**



**Inner Circuit Top View**

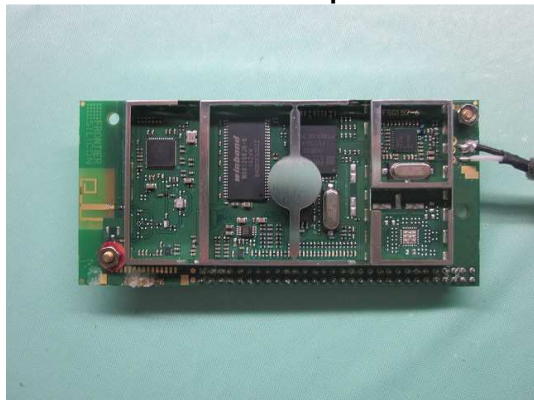

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-03

Page 39 of 41


No.: MH191208

### Photographs of EUT

**Inner Circuit Top View**

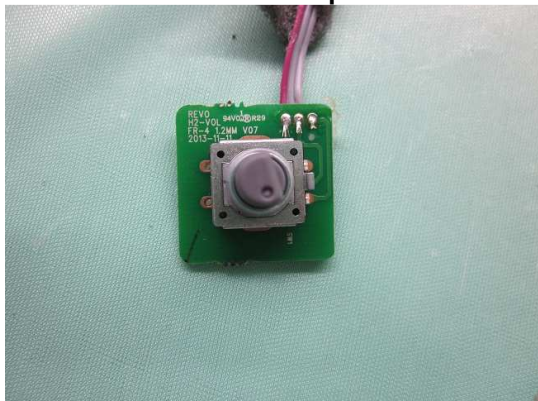

**Inner Circuit Bottom View**

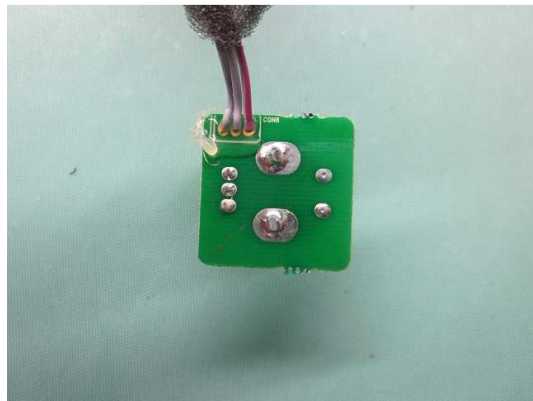

**Inner Circuit Top View**



**Inner Circuit Bottom View**



**Inner Circuit Top View**



**Inner Circuit Bottom View**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-03

Page 40 of 41


No.: MH191208

### Photographs of EUT

**Measurement of Radiated Emission Test Set Up**

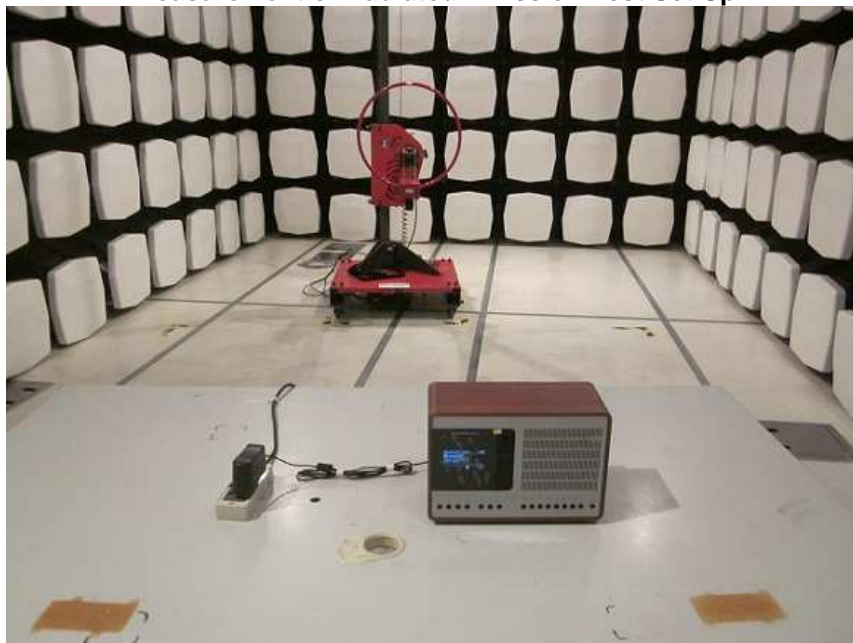

**Measurement of Radiated Emission Test Set Up**

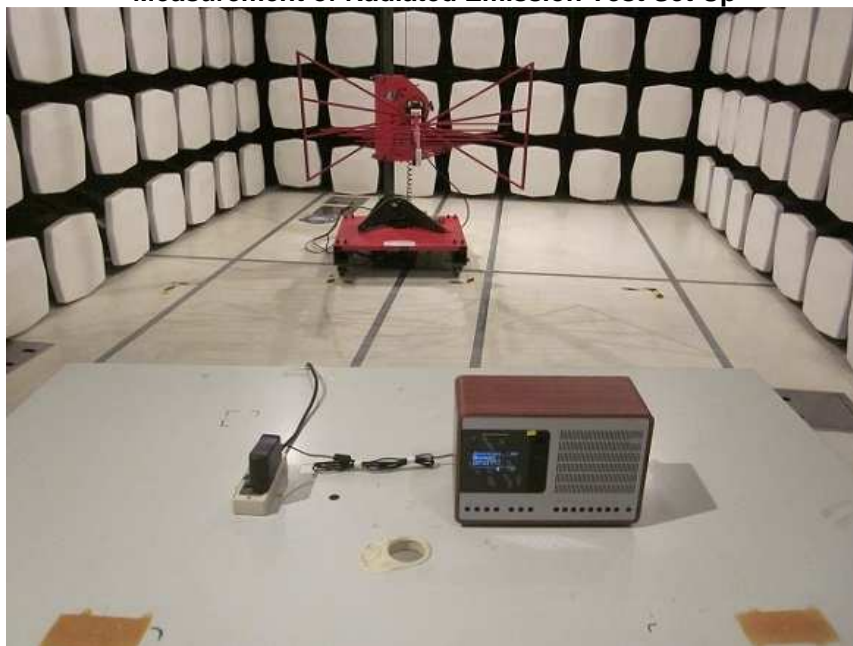

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report


Date: 2015-03-03

Page 41 of 41

No.: MH191208

### Photographs of EUT

**Measurement of Radiated Emission Test Set Up**

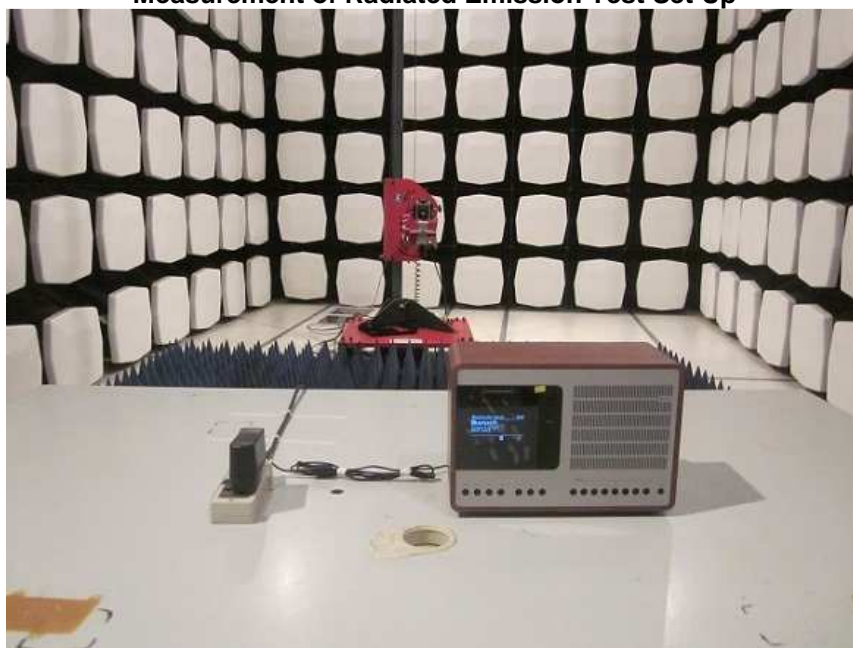

**Measurement of Conducted Emission Test Set Up**



\*\*\*\*\* End of Test Report \*\*\*\*\*

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage