



## STC Test Report

Date: 2015-03-04

Page 1 of 66

No.: MH191209

**Applicant:** Hip Shing Electronics Ltd.  
Units 1.2&3, 20/F., New Treasure Centre, 10 Ng Fong Street,  
San Po Kong, Kowloon, Hong Kong

**Manufacturer:** Dongguan Zhi Cheng Electronic Products Co., Ltd.  
No. 11 Shangbao Road, 188 Industrial Zone, Pingshan,  
Tangxia, Dongguan, Guangdong, China

**Description of Sample(s):** Submitted sample(s) said to be  
Product: Digital Radio Station  
Brand Name: REVO  
Model Number: SuperConnect  
FCC ID: BZAWDFB0315H2

**Date Sample(s) Received:** 2015-02-06

**Date Tested:** 2015-02-07 to 2015-02-14

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in  
accordance with FCC 47CFR [Codes of Federal Regulations]  
Part 15: 2014 and ANSI C63.4:2009 for FCC Certification.

**Conclusion(s):** The submitted product COMPLIED with the requirements of  
Federal Communications Commission [FCC] Rules and  
Regulations Part 15. The tests were performed in accordance  
with the standards described above and on Section 2.2 in this  
Test Report.

**Remark(s):** ---

---

Dr. LEE Kam Chuen  
Authorized Signatory  
ElectroMagnetic Compatibility Department  
For and on behalf of  
The Hong Kong Standards and Testing Centre Ltd.



## STC Test Report

Date: 2015-03-04

Page 2 of 66

No.: MH191209

### **CONTENT:**

Cover	Page 1 of 66	
Content	Page 2 of 66	
<b><u>1.0</u></b>	<b><u>General Details</u></b>	
1.1	Test Laboratory	Page 3 of 66
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 66
1.3	Date of Order	Page 3 of 66
1.4	Submitted Sample(s)	Page 3 of 66
1.5	Test Duration	Page 3 of 66
1.6	Country of Origin	Page 3 of 66
<b><u>2.0</u></b>	<b><u>Technical Details</u></b>	
2.1	Investigations Requested	Page 4 of 66
2.2	Test Standards and Results Summary	Page 4 of 66
<b><u>3.0</u></b>	<b><u>Test Results</u></b>	
3.1	Emission	Page 5-60 of 66
<b><u>Appendix A</u></b>		
	List of Measurement Equipment	Page 61 of 66
<b><u>Appendix B</u></b>		
	Photographs of EUT	Page 62-66 of 66

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-04

Page 3 of 66

No.: MH191209

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

#### **1.2 Equipment Under Test [EUT] Description of Sample(s)**

Product: Digital Radio Station  
Manufacturer: Dongguan Zhi Cheng Electronic Products Co., Ltd.  
No. 11 Shangbao Road, 188 Industrial Zone, Pingshan,  
Tangxia, Dongguan, Guangdong, China  
Brand Name: REVO  
Model Number: SuperConnect  
Rating: Input: 100-240Va.c. 50/60Hz 0.75A,  
Output: 18Vd.c. 1330mA

The AC/DC adaptor was provided by the applicant with following details:-  
Brand name: REVO Model no.: GPE248-180133-Z

##### **1.2.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Hip Shing Electronics Ltd., Digital Radio Station. the transmission signal is digital modulated with channel frequency range 2412-2462MHz..

#### **1.3 Date of Order**

2015-02-06

#### **1.4 Submitted Sample(s):**

1 Sample

#### **1.5 Test Duration**

2015-02-07 to 2015-02-14

#### **1.6 Country of Origin**

China

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-04

Page 4 of 66

No.: MH191209

### **2.0     Technical Details**

#### **2.1     Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations and ANSI C63.4:2009 for FCC Certification.

#### **2.2     Test Standards and Results Summary Tables**

<b>EMISSION Results Summary</b>						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(3)	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Spectral Density	FCC 47CFR 15.247(e)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band Edge Emissions	FCC 47CFR 15.247(d)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 5 of 66

No.: MH191209

### **3.0 Test Results**

#### **3.1 Emission**


##### **3.1.1 Maximum Peak Output Power**

Test Requirement:	FCC 47CFR 15.247(b)(3)
Test Method:	N/A
Test Date:	2015-02-13
Mode of Operation:	WiFi mode

#### **Test Method:**

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

#### **Test Setup:**

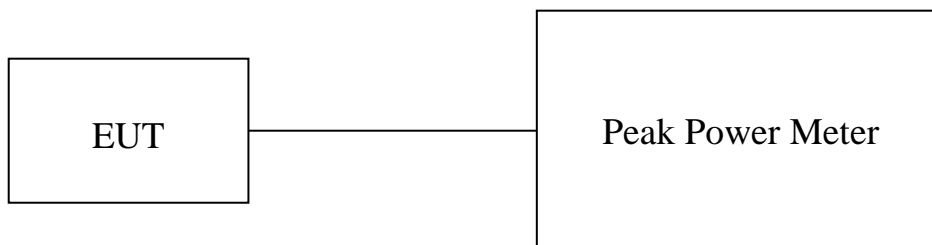

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 6 of 66

No.: MH191209

### **Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:**

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

<b>Results of WiFi Tx Mode 802.11 b, (2412MHz to 2462MHz) : Pass (TX Unit)</b>		
<b>Maximum conducted output power</b>		
<b>Channel</b>	<b>Frequency(MHz)</b>	<b>Output Power(Watt)</b>
Low	2412	0.01578
Middle	2437	0.01629
High	2462	0.01671

<b>Results of WiFi Tx Mode 802.11 g, (2412MHz to 2462MHz) : Pass (TX Unit)</b>		
<b>Maximum conducted output power</b>		
<b>Channel</b>	<b>Frequency(MHz)</b>	<b>Output Power(Watt)</b>
Low	2412	0.03350
Middle	2437	0.03648
High	2462	0.03954

<b>Results of WiFi Tx Mode 802.11 n20, (2412MHz to 2462MHz) : Pass (TX Unit)</b>		
<b>Maximum conducted output power</b>		
<b>Channel</b>	<b>Frequency(MHz)</b>	<b>Output Power(Watt)</b>
Low	2412	0.02742
Middle	2437	0.02812
High	2462	0.02958

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB  
1GHz to 26GHz 1.7dB

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 7 of 66

No.: MH191209

### 3.1.2 Radiated Emissions


Test Requirement: FCC 47CFR 15.209  
Test Method: ANSI C63.4:2009  
Test Date: 2015-02-10  
Mode of Operation: Tx mode / WiFi mode

#### Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-anechoic chamber located on the G/F of "STC (Dongguan) Company Limited" with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

#### Test Setup:

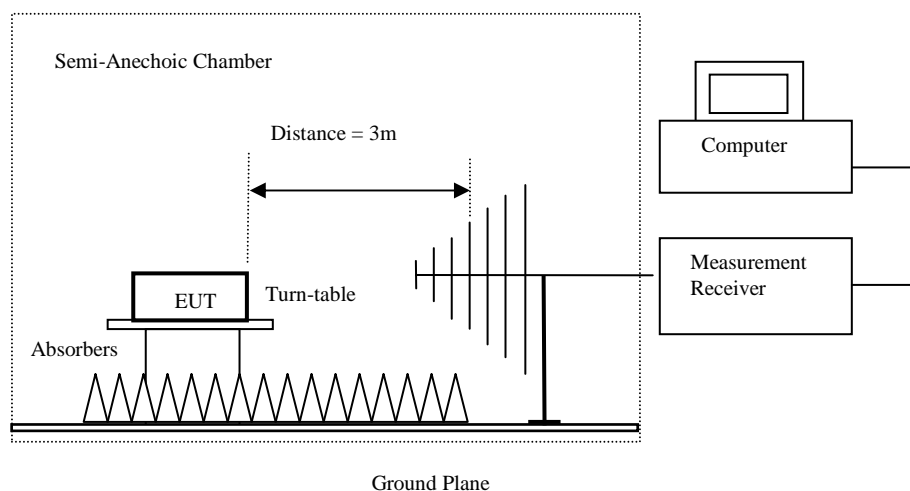

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 8 of 66

No.: MH191209

### Limits for Radiated Emissions [FCC 47 CFR 15.247 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V/m}$ ]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Tx mode (2412.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu\text{V}$	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Limit dB $\mu\text{V/m}$	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

### Results of Tx mode (2412.0 MHz) (802.11b) (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu\text{V}$	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Limit dB $\mu\text{V/m}$	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

### Result of Tx mode (2412.0 MHz) (802.11b) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V}$	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Limit @3m dB $\mu\text{V/m}$	Margin dB $\mu\text{V/m}$	E-Field Polarity
4824.0	15.1	41.5	56.6	74.0	17.4	Vertical
4824.0	13.1	42.4	55.5	74.0	18.5	Horizontal
7236.0	10.6	45.1	55.7	74.0	18.3	Vertical
7236.0	8.9	46.2	55.1	74.0	18.9	Horizontal
9648.0	7.8	48	55.8	74.0	18.2	Vertical
9648.0	5.8	48.8	54.6	74.0	19.4	Horizontal
12060.0	3.9	51.5	55.4	74.0	18.6	Vertical
12060.0	2.9	52.4	55.3	74.0	18.7	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)





## STC Test Report

Date: 2015-03-04

Page 9 of 66

No.: MH191209

**Result of Tx mode (2412.0 MHz) (802.11b) (Above 1GHz): Pass**

<b>Field Strength of Spurious Emissions Average Value</b>						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4824.0	2.0	41.5	43.5	54.0	10.5	Vertical
4824.0	-0.2	42.4	42.2	54.0	11.8	Horizontal
7236.0	-2.7	45.1	42.4	54.0	11.6	Vertical
7236.0	-5.2	46.2	41.0	54.0	13.0	Horizontal
9648.0	-6.7	48	41.3	54.0	12.7	Vertical
9648.0	-7.3	48.8	41.5	54.0	12.5	Horizontal
12060.0	-9.9	51.5	41.6	54.0	12.4	Vertical
12060.0	-10.2	52.4	42.2	54.0	11.8	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 10 of 66

No.: MH191209

**Result of Tx mode (2437.0 MHz) (802.11b) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Results of Tx mode (2437.0 MHz) (802.11b) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Result of Tx mode (2437.0 MHz) (802.11b) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4874.0	15.7	41.6	57.3	74.0	16.7	Vertical
4874.0	13.7	42.5	56.2	74.0	17.8	Horizontal
7311.0	10.0	45.2	55.2	74.0	18.8	Vertical
7311.0	8.8	46.3	55.1	74.0	18.9	Horizontal
9748.0	7.1	48.1	55.2	74.0	18.8	Vertical
9748.0	7.0	48.9	55.9	74.0	18.1	Horizontal
12185.0	3.9	51.6	55.5	74.0	18.5	Vertical
12185.0	2.9	52.5	55.4	74.0	18.6	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 11 of 66

No.: MH191209

**Result of Tx mode (2437.0 MHz) (802.11b) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4874.0	1.5	41.6	43.1	54.0	10.9	Vertical
4874.0	0.4	42.5	42.9	54.0	11.1	Horizontal
7311.0	-2.7	45.2	42.5	54.0	11.5	Vertical
7311.0	-4.2	46.3	42.1	54.0	11.9	Horizontal
9748.0	-6.3	48.1	41.8	54.0	12.2	Vertical
9748.0	-6.6	48.9	42.3	54.0	11.7	Horizontal
12185.0	-10.2	51.6	41.4	54.0	12.6	Vertical
12185.0	-10.4	52.5	42.1	54.0	11.9	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 12 of 66

No.: MH191209

**Result of Tx mode (2462.0 MHz) (802.11b) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

**Results of Tx mode (2462.0 MHz) (802.11b) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

**Result of Tx mode (2462.0 MHz) (802.11b) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4924.0	15.0	41.4	56.4	74.0	17.6	Vertical
4924.0	12.7	42.7	55.4	74.0	18.6	Horizontal
7386.0	8.9	45.6	54.5	74.0	19.5	Vertical
7386.0	8.4	46.5	54.9	74.0	19.1	Horizontal
9848.0	7.3	48.6	55.9	74.0	18.1	Vertical
9848.0	5.2	49.7	54.9	74.0	19.1	Horizontal
12310.0	3.5	51.7	55.2	74.0	18.8	Vertical
12310.0	2.8	52.7	55.5	74.0	18.5	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 13 of 66

No.: MH191209

**Result of Tx mode (2462.0 MHz) (802.11b) (Above 1GHz): Pass**

<b>Field Strength of Spurious Emissions Average Value</b>						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4924.0	0.9	41.4	42.3	54.0	11.7	Vertical
4924.0	-0.2	42.7	42.5	54.0	11.5	Horizontal
7386.0	-4.3	45.6	41.3	54.0	12.7	Vertical
7386.0	-5.3	46.5	41.2	54.0	12.8	Horizontal
9848.0	-6.3	48.6	42.3	54.0	11.7	Vertical
9848.0	-8.2	49.7	41.5	54.0	12.5	Horizontal
12310.0	-9.9	51.7	41.8	54.0	12.2	Vertical
12310.0	-10.8	52.7	41.9	54.0	12.1	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 14 of 66

No.: MH191209

**Result of Tx mode (2412.0 MHz) (802.11g) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Results of Tx mode (2412.0 MHz) (802.11g) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Result of Tx mode (2412.0 MHz) (802.11g) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4824.0	14.9	41.5	56.4	74.0	17.6	Vertical
4824.0	13.2	42.4	55.6	74.0	18.4	Horizontal
7236.0	10.7	45.1	55.8	74.0	18.2	Vertical
7236.0	8.5	46.2	54.7	74.0	19.3	Horizontal
9648.0	7.9	48	55.9	74.0	18.1	Vertical
9648.0	5.6	48.8	54.4	74.0	19.6	Horizontal
12060.0	3.9	51.5	55.4	74.0	18.6	Vertical
12060.0	3.2	52.4	55.6	74.0	18.4	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 15 of 66

No.: MH191209

**Result of Tx mode (2412.0 MHz) (802.11g) (Above 1GHz): Pass**

<b>Field Strength of Spurious Emissions Average Value</b>						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4824.0	1.8	41.5	43.3	54.0	10.7	Vertical
4824.0	-0.9	42.4	41.5	54.0	12.5	Horizontal
7236.0	-3.0	45.1	42.1	54.0	11.9	Vertical
7236.0	-4.3	46.2	41.9	54.0	12.1	Horizontal
9648.0	-6.9	48	41.1	54.0	12.9	Vertical
9648.0	-7.2	48.8	41.6	54.0	12.4	Horizontal
12060.0	-9.5	51.5	42.0	54.0	12.0	Vertical
12060.0	-9.9	52.4	42.5	54.0	11.5	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 16 of 66

No.: MH191209

**Result of Tx mode (2437.0 MHz) (802.11g) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Results of Tx mode (2437.0 MHz) (802.11g) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Result of Tx mode (2437.0 MHz) (802.11g) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4874.0	15.6	41.6	57.2	74.0	16.8	Vertical
4874.0	13.4	42.5	55.9	74.0	18.1	Horizontal
7311.0	10.5	45.2	55.7	74.0	18.3	Vertical
7311.0	9.1	46.3	55.4	74.0	18.6	Horizontal
9748.0	7.6	48.1	55.7	74.0	18.3	Vertical
9748.0	6.3	48.9	55.2	74.0	18.8	Horizontal
12185.0	4.0	51.6	55.6	74.0	18.4	Vertical
12185.0	3.5	52.5	56.0	74.0	18.0	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2015-03-04

Page 17 of 66

No.: MH191209

**Result of Tx mode (2437.0 MHz) (802.11g) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4874.0	2.1	41.6	43.7	54.0	10.3	Vertical
4874.0	0.6	42.5	43.1	54.0	10.9	Horizontal
7311.0	-3.3	45.2	41.9	54.0	12.1	Vertical
7311.0	-4.6	46.3	41.7	54.0	12.3	Horizontal
9748.0	-6.5	48.1	41.6	54.0	12.4	Vertical
9748.0	-6.4	48.9	42.5	54.0	11.5	Horizontal
12185.0	-10.2	51.6	41.4	54.0	12.6	Vertical
12185.0	-10.4	52.5	42.1	54.0	11.9	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 18 of 66

No.: MH191209

**Result of Tx mode (2462.0 MHz) (802.11g) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

**Results of Tx mode (2462.0 MHz) (802.11g) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

**Result of Tx mode (2462.0 MHz) (802.11g) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4924.0	15.0	41.4	56.4	74.0	17.6	Vertical
4924.0	12.9	42.7	55.6	74.0	18.4	Horizontal
7386.0	9.5	45.6	55.1	74.0	18.9	Vertical
7386.0	8.0	46.5	54.5	74.0	19.5	Horizontal
9848.0	7.2	48.6	55.8	74.0	18.2	Vertical
9848.0	5.6	49.7	55.3	74.0	18.7	Horizontal
12310.0	3.7	51.7	55.4	74.0	18.6	Vertical
12310.0	2.2	52.7	54.9	74.0	19.1	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 19 of 66

No.: MH191209

**Result of Tx mode (2462.0 MHz) (802.11g) (Above 1GHz): Pass**

<b>Field Strength of Spurious Emissions Average Value</b>						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4924.0	1.2	41.4	42.6	54.0	11.4	Vertical
4924.0	-0.8	42.7	41.9	54.0	12.1	Horizontal
7386.0	-4.3	45.6	41.3	54.0	12.7	Vertical
7386.0	-5.3	46.5	41.2	54.0	12.8	Horizontal
9848.0	-6.2	48.6	42.4	54.0	11.6	Vertical
9848.0	-8.2	49.7	41.5	54.0	12.5	Horizontal
12310.0	-9.8	51.7	41.9	54.0	12.1	Vertical
12310.0	-11.5	52.7	41.2	54.0	12.8	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 20 of 66

No.: MH191209

**Result of Tx mode (2412.0 MHz) (802.11n20) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Results of Tx mode (2412.0 MHz) (802.11n20) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Result of Tx mode (2412.0 MHz) (802.11n20) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4824.0	14.9	41.5	56.4	74.0	17.6	Vertical
4824.0	13.3	42.4	55.7	74.0	18.3	Horizontal
7236.0	10.3	45.1	55.4	74.0	18.6	Vertical
7236.0	9.0	46.2	55.2	74.0	18.8	Horizontal
9648.0	7.9	48	55.9	74.0	18.1	Vertical
9648.0	5.7	48.8	54.5	74.0	19.5	Horizontal
12060.0	4.6	51.5	56.1	74.0	17.9	Vertical
12060.0	3.0	52.4	55.4	74.0	18.6	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 21 of 66

No.: MH191209

**Result of Tx mode (2412.0 MHz) (802.11n20) (Above 1GHz): Pass**

<b>Field Strength of Spurious Emissions Average Value</b>						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4824.0	2.1	41.5	43.6	54.0	10.4	Vertical
4824.0	-0.3	42.4	42.1	54.0	11.9	Horizontal
7236.0	-2.6	45.1	42.5	54.0	11.5	Vertical
7236.0	-4.5	46.2	41.7	54.0	12.3	Horizontal
9648.0	-6.3	48	41.7	54.0	12.3	Vertical
9648.0	-7.8	48.8	41.0	54.0	13.0	Horizontal
12060.0	-9.5	51.5	42.0	54.0	12.0	Vertical
12060.0	-10.1	52.4	42.3	54.0	11.7	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 22 of 66

No.: MH191209

**Result of Tx mode (2437.0 MHz) (802.11n20) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Results of Tx mode (2437.0 MHz) (802.11n20) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

**Result of Tx mode (2437.0 MHz) (802.11n20) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4874.0	15.8	41.6	57.4	74.0	16.6	Vertical
4874.0	13.8	42.5	56.3	74.0	17.7	Horizontal
7311.0	10.6	45.2	55.8	74.0	18.2	Vertical
7311.0	9.1	46.3	55.4	74.0	18.6	Horizontal
9748.0	7.8	48.1	55.9	74.0	18.1	Vertical
9748.0	7.2	48.9	56.1	74.0	17.9	Horizontal
12185.0	3.7	51.6	55.3	74.0	18.7	Vertical
12185.0	3.8	52.5	56.3	74.0	17.7	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 23 of 66

No.: MH191209

**Result of Tx mode (2437.0 MHz) (802.11n20) (Above 1GHz): Pass**

<b>Field Strength of Spurious Emissions Average Value</b>						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4874.0	2.1	41.6	43.7	54.0	10.3	Vertical
4874.0	0.4	42.5	42.9	54.0	11.1	Horizontal
7311.0	-3.6	45.2	41.6	54.0	12.4	Vertical
7311.0	-4.2	46.3	42.1	54.0	11.9	Horizontal
9748.0	-6.1	48.1	42.0	54.0	12.0	Vertical
9748.0	-6.5	48.9	42.4	54.0	11.6	Horizontal
12185.0	-10.0	51.6	41.6	54.0	12.4	Vertical
12185.0	-10.8	52.5	41.7	54.0	12.3	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 24 of 66

No.: MH191209

**Result of Tx mode (2462.0 MHz) (802.11n20) (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

**Results of Tx mode (2462.0 MHz) (802.11n20) (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions Quasi-Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Limit dB $\mu$ V/m	E-Field Polarity
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

**Result of Tx mode (2462.0 MHz) (802.11n20) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
4924.0	14.7	41.4	56.1	74.0	17.9	Vertical
4924.0	12.9	42.7	55.6	74.0	18.4	Horizontal
7386.0	9.1	45.6	54.7	74.0	19.3	Vertical
7386.0	8.6	46.5	55.1	74.0	18.9	Horizontal
9848.0	7.2	48.6	55.8	74.0	18.2	Vertical
9848.0	5.1	49.7	54.8	74.0	19.2	Horizontal
12310.0	3.5	51.7	55.2	74.0	18.8	Vertical
12310.0	2.7	52.7	55.4	74.0	18.6	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2015-03-04

Page 25 of 66

No.: MH191209

**Result of Tx mode (2462.0 MHz) (802.11n20) (Above 1GHz): Pass**

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dBuV/m	E-Field Polarity
4924.0	1.8	41.4	43.2	54.0	10.8	Vertical
4924.0	-0.3	42.7	42.4	54.0	11.6	Horizontal
7386.0	-4.3	45.6	41.3	54.0	12.7	Vertical
7386.0	-5.6	46.5	40.9	54.0	13.1	Horizontal
9848.0	-6.7	48.6	41.9	54.0	12.1	Vertical
9848.0	-8.6	49.7	41.1	54.0	12.9	Horizontal
12310.0	-10.3	51.7	41.4	54.0	12.6	Vertical
12310.0	-11.0	52.7	41.7	54.0	12.3	Horizontal

**Remarks:**

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 9kHz-30MHz 3.3dB  
30MHz -1GHz 4.6dB  
1GHz -26GHz 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 26 of 66

No.: MH191209

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V}/\text{m}$ ]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of WiFi mode (30MHz – 1GHz): Pass

Please refer to the following table for result details

#### Horizontal

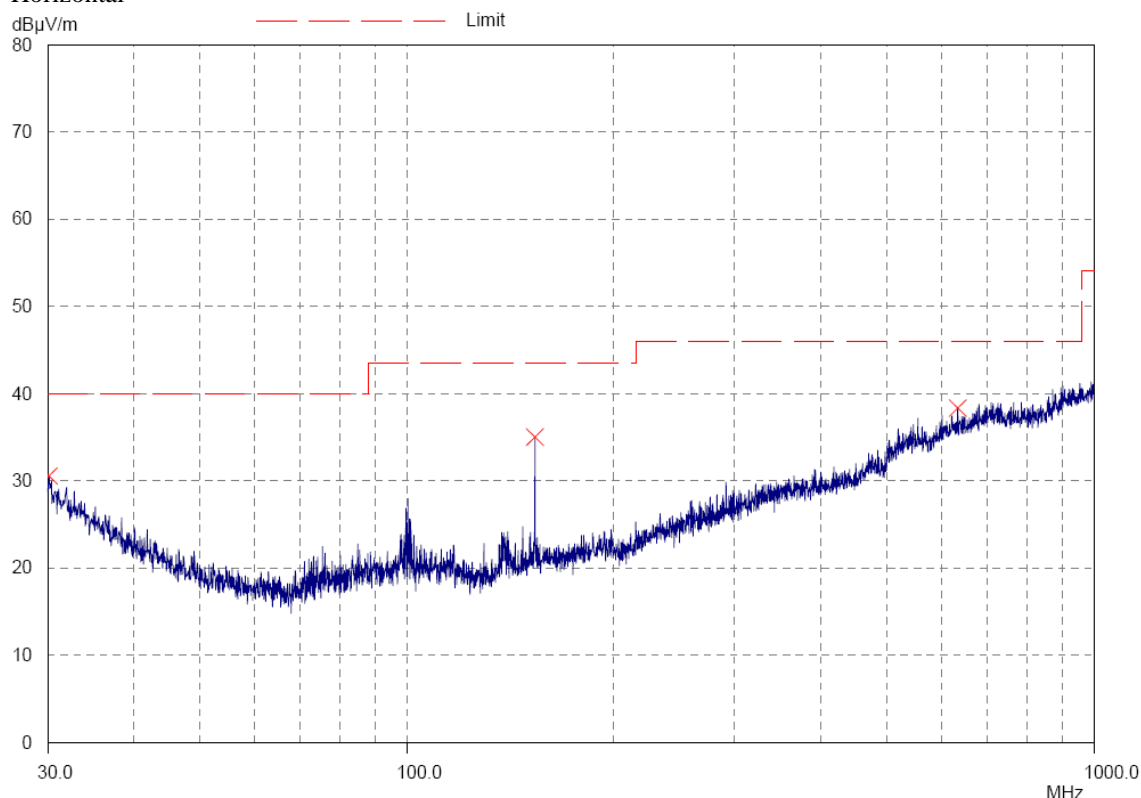

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 27 of 66

No.: MH191209

### **Result of WiFi mode (30MHz – 1GHz): Pass**

<b>Radiated Emissions Quasi-Peak</b>					
<b>Emission Frequency MHz</b>	<b>E-Field Polarity</b>	<b>Level @3m dB<math>\mu</math>V/m</b>	<b>Limit @3m dB<math>\mu</math>V/m</b>	<b>Level @3m dB<math>\mu</math>V/m</b>	<b>Limit @3m dB<math>\mu</math>V/m</b>
30.1	Horizontal	30.5	40.0	33.5	100
153.6	Horizontal	34.9	43.5	55.6	150
633.8	Horizontal	37.3	46.0	73.3	200

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 28 of 66

No.: MH191209

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V/m}$ ]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of WiFi mode (30MHz – 1GHz): Pass

Please refer to the following table for result details

#### Vertical

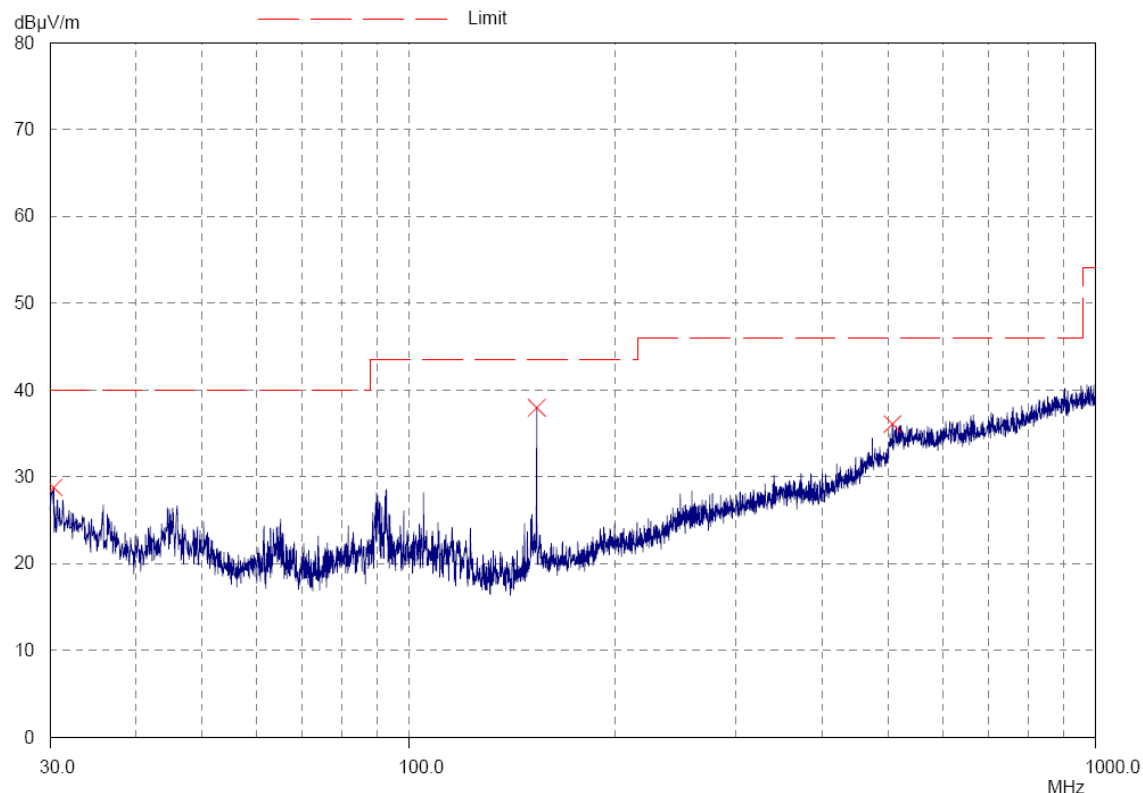

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 29 of 66

No.: MH191209

### **Result of WiFi mode (30MHz – 1GHz): Pass**

<b>Radiated Emissions Quasi-Peak</b>					
Emission Frequency MHz	E-Field Polarity	Level @3m dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Level @3m dB $\mu$ V/m	Limit @3m dB $\mu$ V/m
30.4	Vertical	28.7	40.0	27.2	100
153.6	Vertical	37.9	43.5	78.5	150
506.6	Vertical	36.1	46.0	63.8	200

#### Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 30 of 66

No.: MH191209

### 3.1.3 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)  
Test Method: ANSI C63.4:2009  
Test Date: 2015-02-11  
Mode of Operation: WiFi mode

#### Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

#### Test Setup:

As Test Setup of clause 3.1.1 in this test report.

#### Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF=10\log(3\text{ kHz}/100\text{ kHz})=-15.2\text{dB}$

#### Results of WiFi Mode 802.11 b (Tx:2412MHz to 2462MHz) : Pass (TX Unit)

##### Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-15.15	8dBm
2437.0	-14.67	8dBm
2462.0	-13.81	8dBm

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-04

Page 31 of 66

No.: MH191209

**Results of WiFi Mode 802.11 g (Tx:2412MHz to 2462MHz) : Pass (TX Unit)**

**Maximum power spectral density**

<b>Transmitter Frequency (MHz)</b>	<b>Maximum Power spectral density level / 3kHz band (dBm)</b>	<b>Maximum Power spectral density / 3kHz band limit</b>
2412.0	-20.07	<b>8dBm</b>
2437.0	-19.00	<b>8dBm</b>
2462.0	-18.66	<b>8dBm</b>

**Results of WiFi Mode 802.11 n20 (Tx:2412MHz to 2462MHz) : Pass (TX Unit)**

**Maximum power spectral density**

<b>Transmitter Frequency (MHz)</b>	<b>Maximum Power spectral density level / 3kHz band (dBm)</b>	<b>Maximum Power spectral density / 3kHz band limit</b>
2412.0	-18.82	<b>8dBm</b>
2437.0	-18.24	<b>8dBm</b>
2462.0	-17.40	<b>8dBm</b>

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 32 of 66

No.: MH191209


WiFi mode 802.11 b, (Tx: 2412MHz to 2462MHz)

CH 1 (2412.0 MHz)

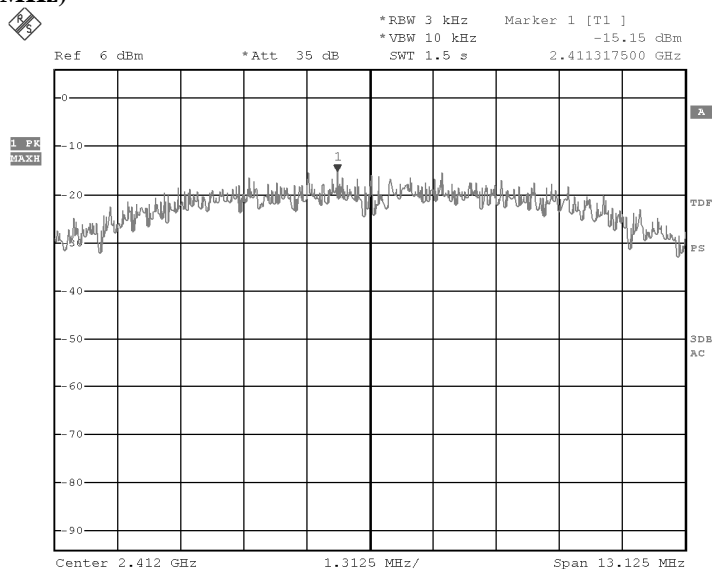

Date: 11.FEB.2015 19:37:41

CH 6 (2437.0 MHz)

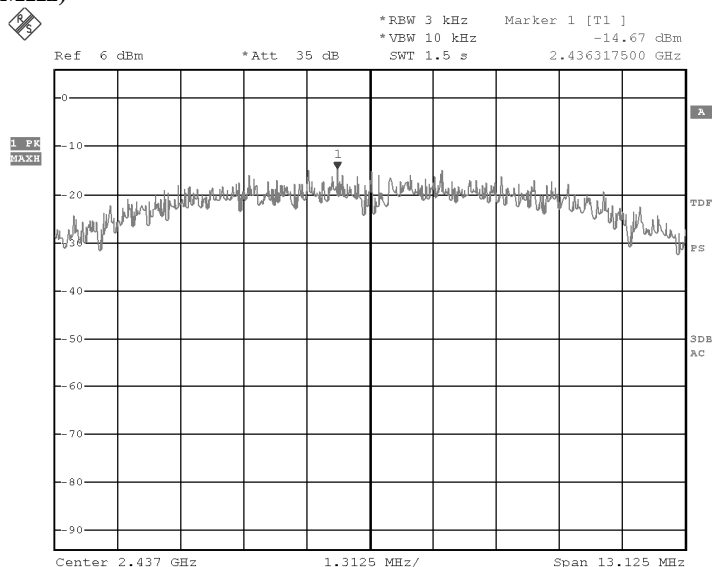

Date: 11.FEB.2015 19:39:05

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage






## STC Test Report

Date: 2015-03-04

Page 33 of 66

No.: MH191209


### CH 11 (2462.0 MHz)

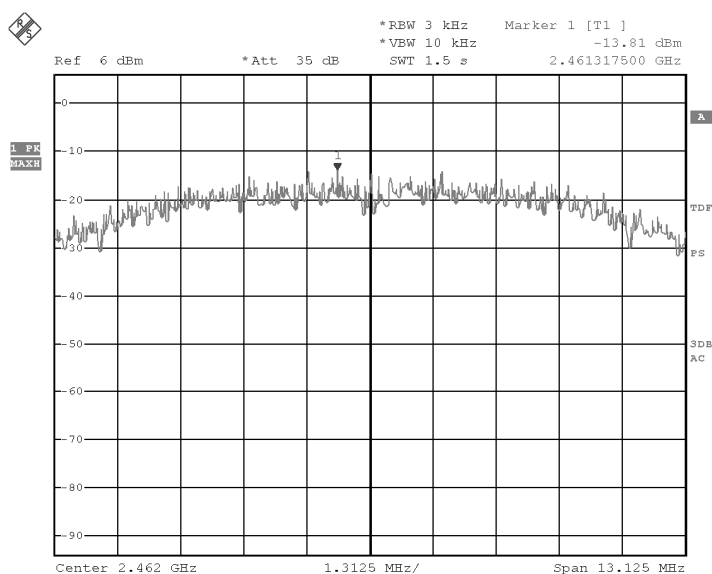

Date: 11.FEB.2015 19:40:40

### WiFi mode 802.11 g, (Tx:2412MHz to 2462MHz)

#### Ch 1 (2412.0 MHz)

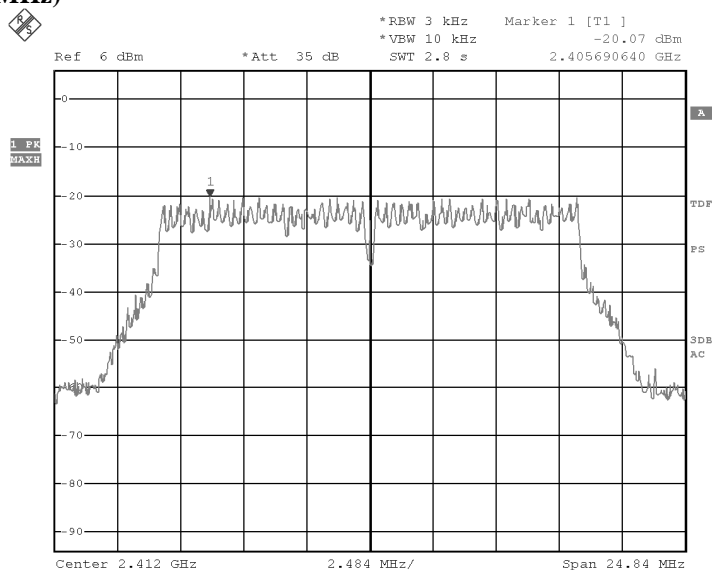

Date: 11.FEB.2015 19:42:43

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date: 2015-03-04

Page 34 of 66


No.: MH191209

### CH 6 (2437.0 MHz)

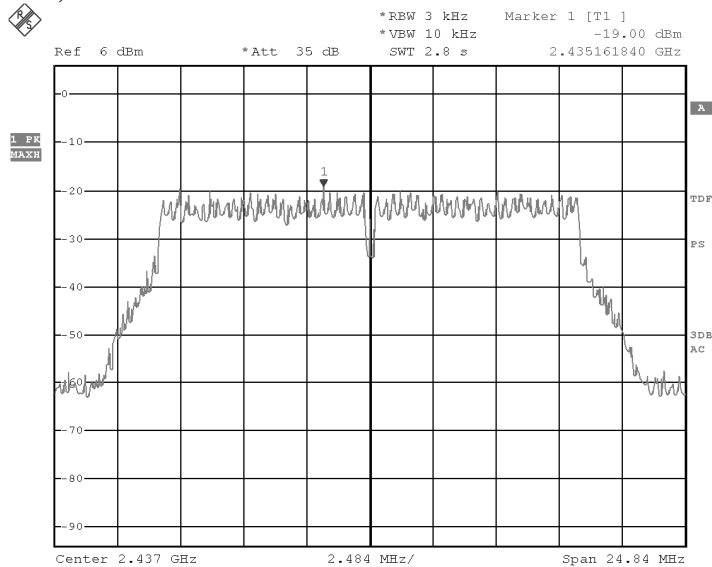

Date: 11.FEB.2015 19:44:00

### CH 11 (2462.0 MHz)

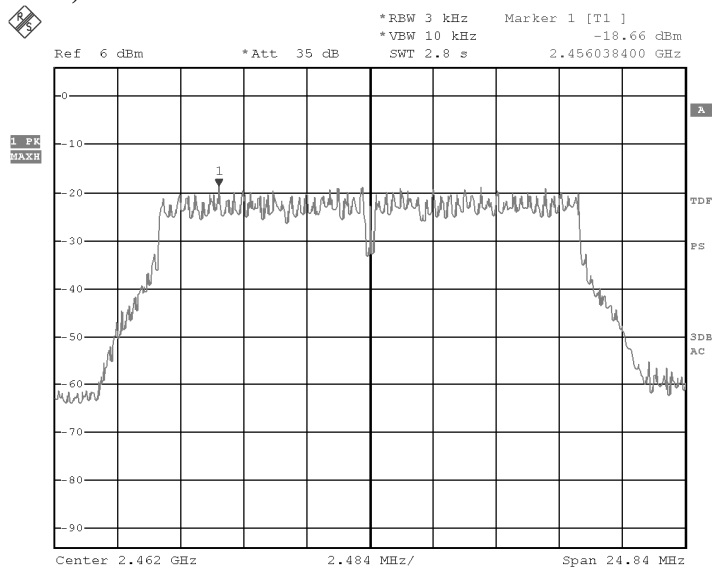

Date: 11.FEB.2015 19:46:00

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 35 of 66

No.: MH191209


WiFi mode 802.11 n20, (Tx: 2412MHz to 2462MHz)

CH 1 (2412.0 MHz)

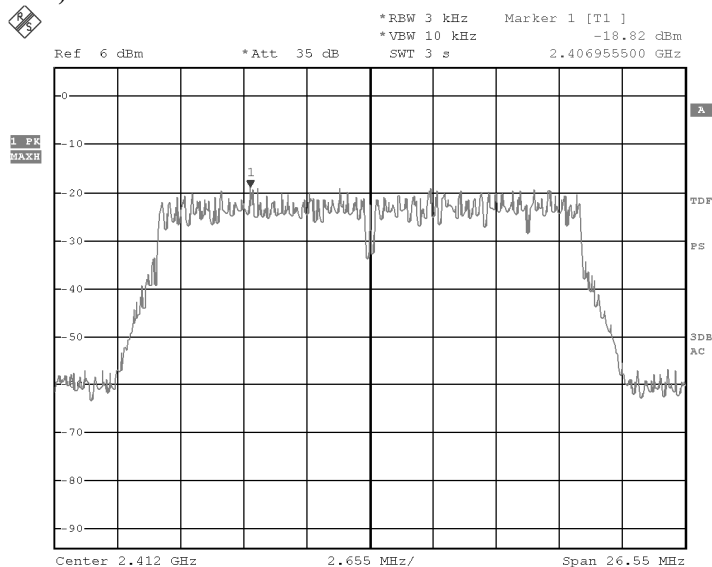

Date: 11.FEB.2015 19:52:08

CH 6 (2437.0 MHz)

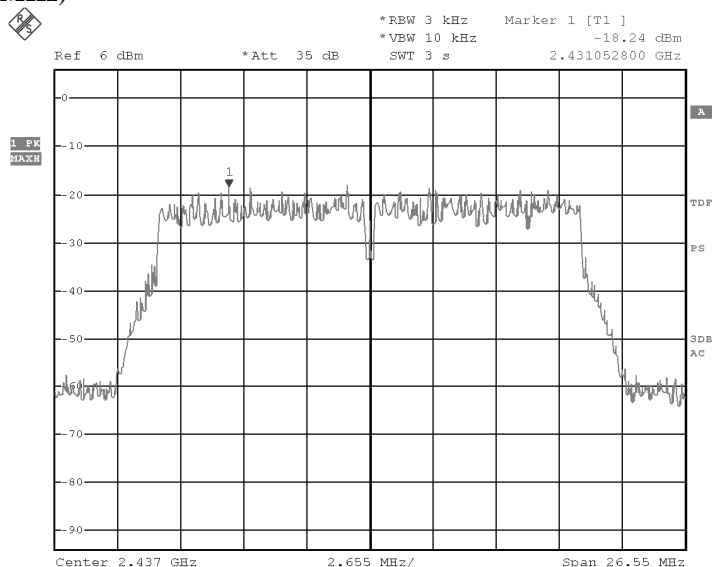

Date: 11.FEB.2015 19:50:04

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date: 2015-03-04

Page 36 of 66

No.: MH191209

Ch 11 (2462.0 MHz)

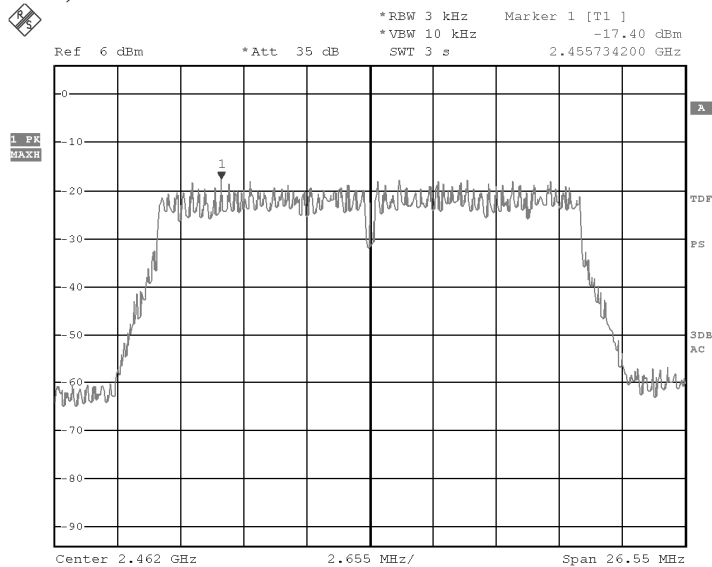

Date: 11.FEB.2015 19:47:53

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date: 2015-03-04

Page 37 of 66

No.: MH191209

### **3.1.4 6dB Spectrum Bandwidth Measurement**

Test Requirement:	FCC 47CFR 15.247(a)(2)
Test Method:	ANSI C63.4:2009
Test Date:	2015-02-11
Mode of Operation:	WiFi mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 38 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	8.75	> 500

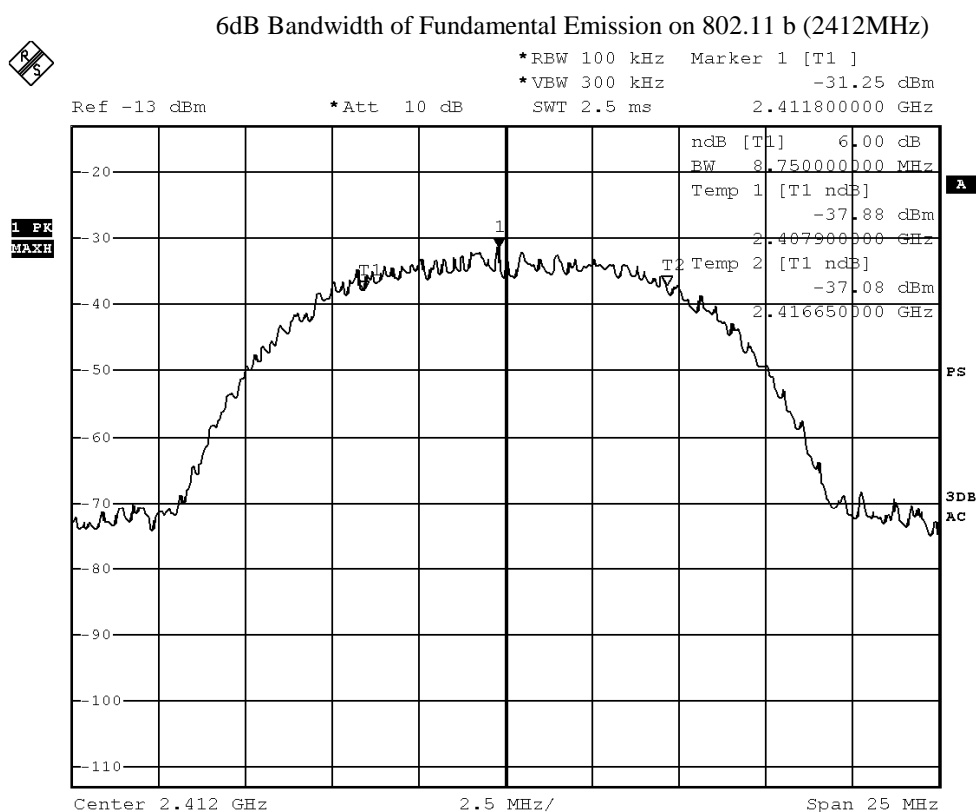

Date: 11.FEB.2015 18:47:20

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 39 of 66

No.: MH191209

**Limits for 6dB Spectrum Bandwidth Measurement:**

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	8.50	> 500

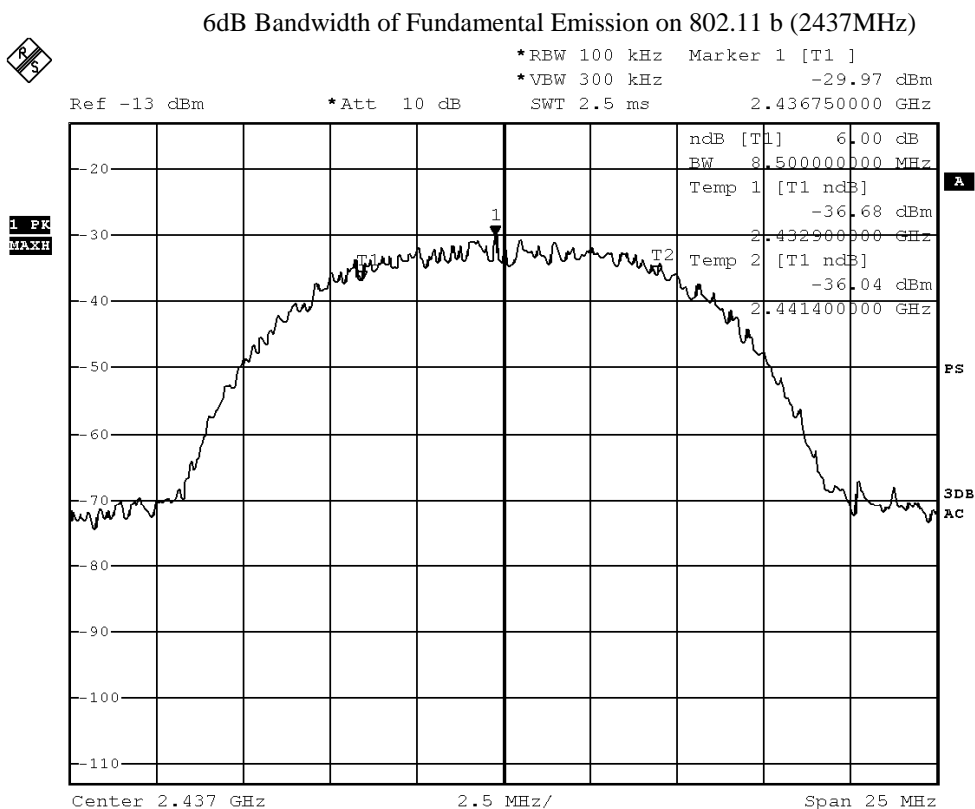

Date: 11.FEB.2015 18:49:01



## STC Test Report


Date: 2015-03-04

Page 40 of 66

No.: MH191209

**Limits for 6dB Spectrum Bandwidth Measurement:**

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	8.75	> 500

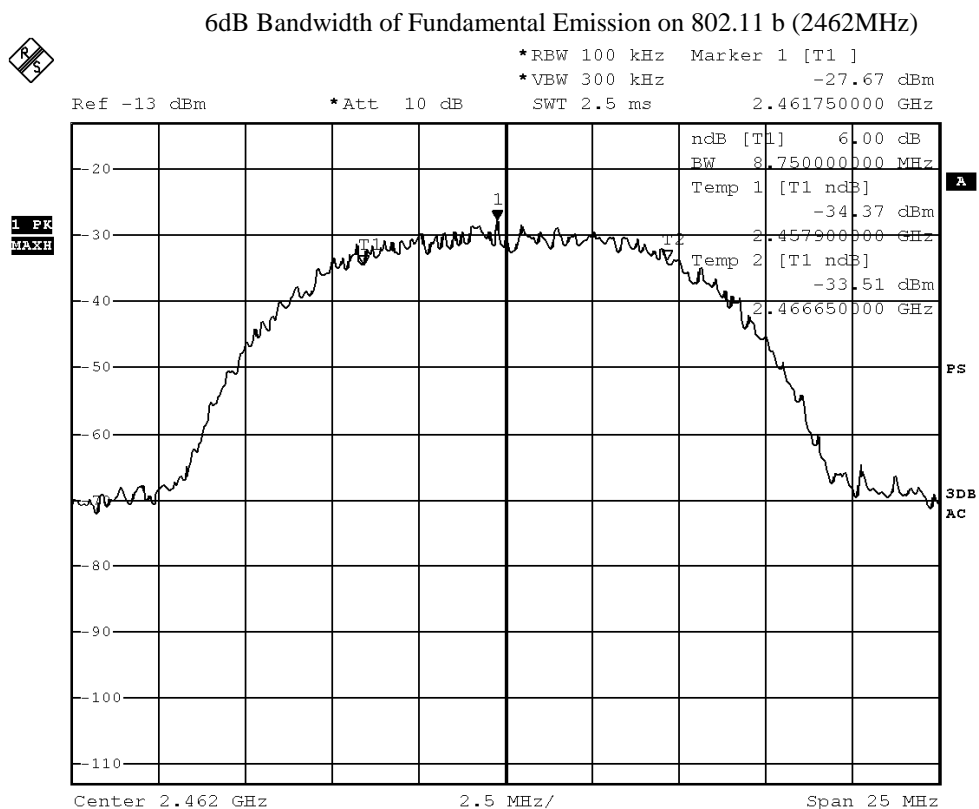

Date: 11.FEB.2015 18:50:57





## STC Test Report


Date: 2015-03-04

Page 41 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	16.56	> 500

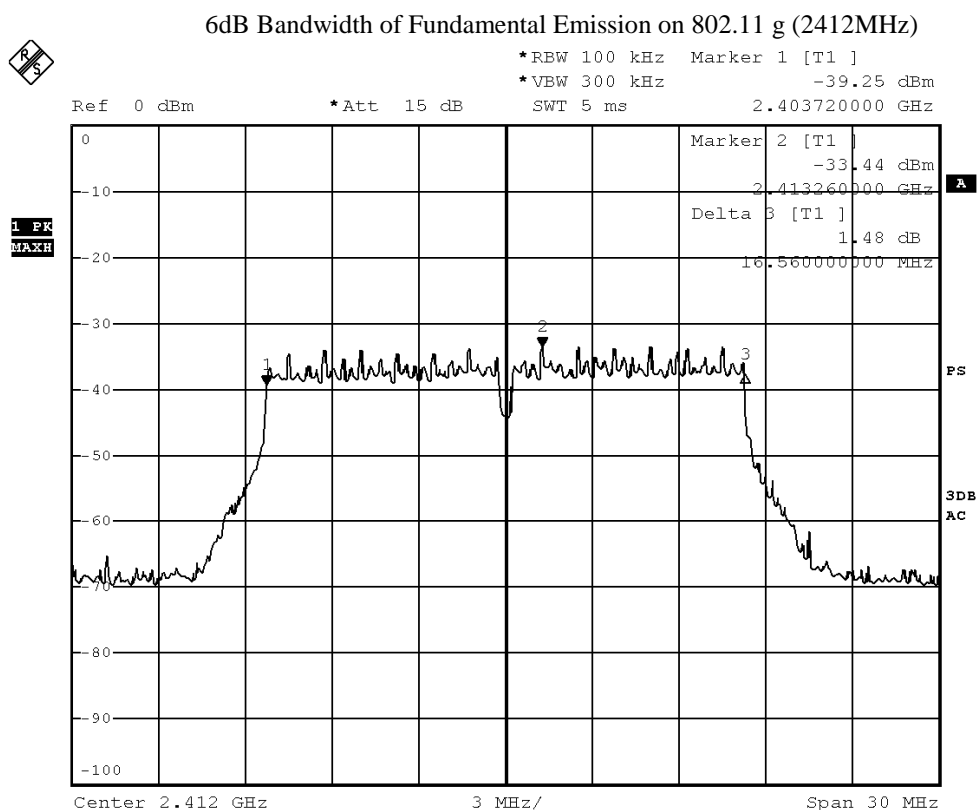

Date: 11.FEB.2015 19:20:41

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04


Page 42 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	16.56	> 500

### 6dB Bandwidth of Fundamental Emission on 802.11 g (2437MHz)

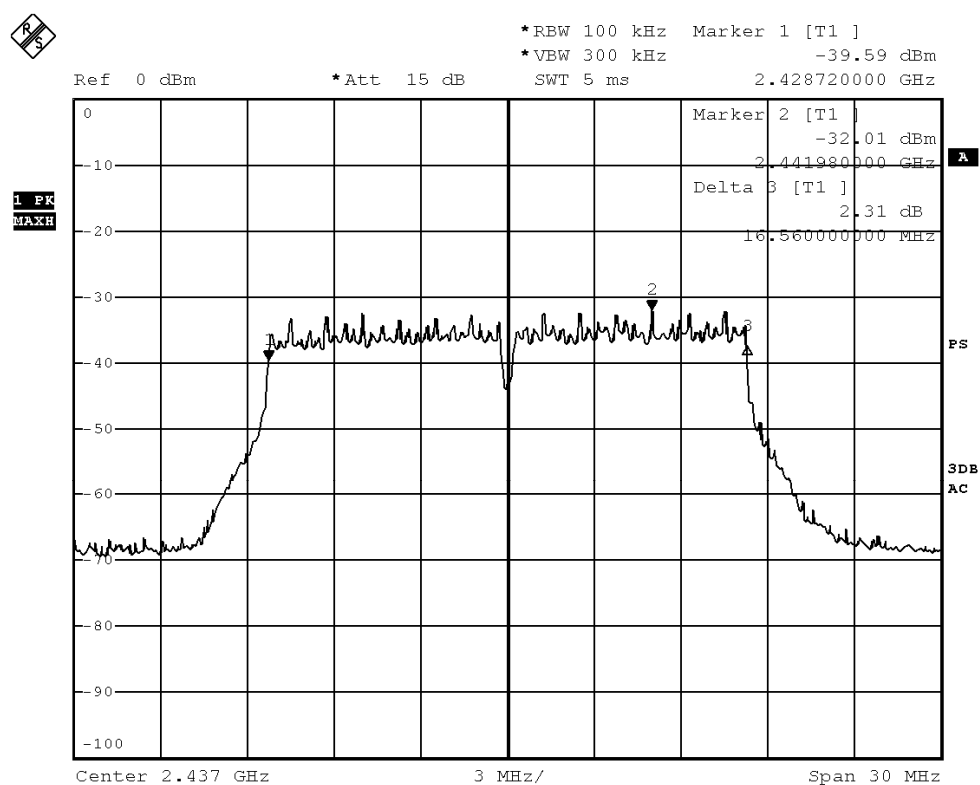

Date: 11.FEB.2015 19:18:50

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04


Page 43 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	16.56	> 500

### 6dB Bandwidth of Fundamental Emission on 802.11 g (2462MHz)

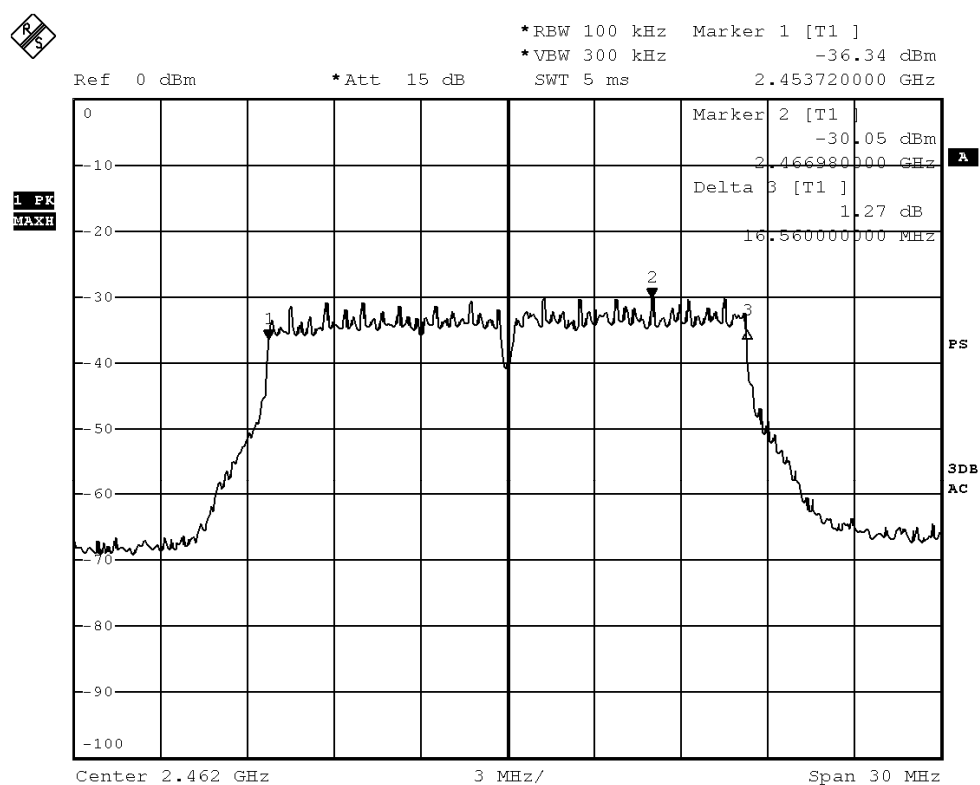

Date: 11.FEB.2015 18:56:31

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 44 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	17.64	> 500

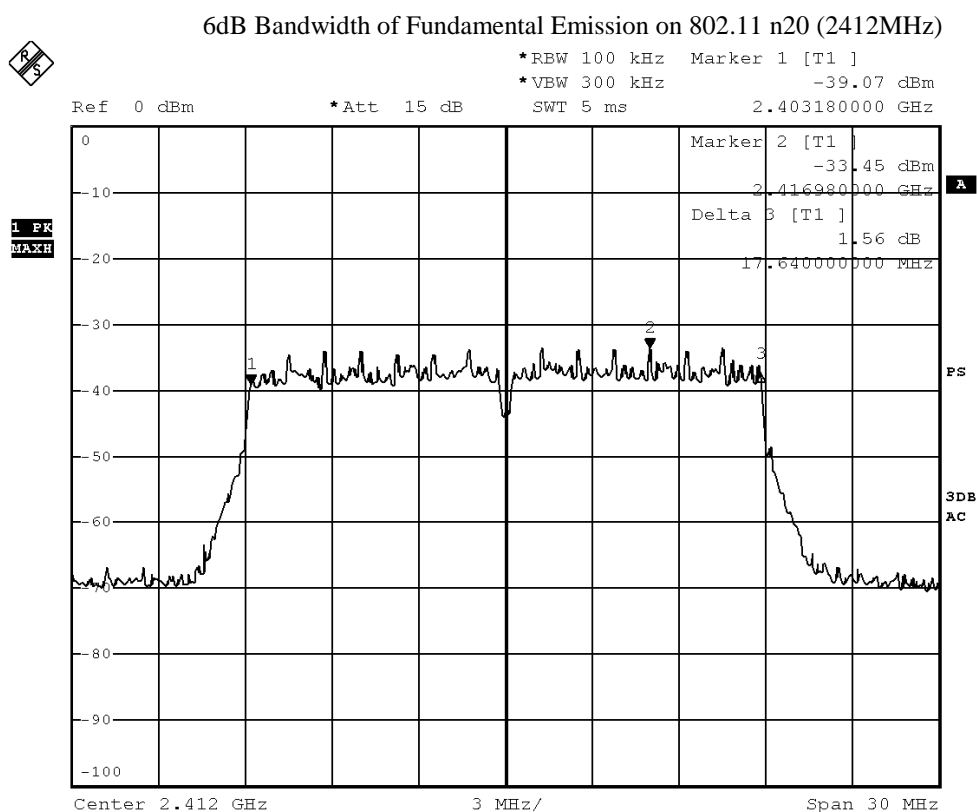

Date: 11.FEB.2015 19:24:20

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04


Page 45 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	17.70	> 500

### 6dB Bandwidth of Fundamental Emission on 802.11 n20 (2437MHz)

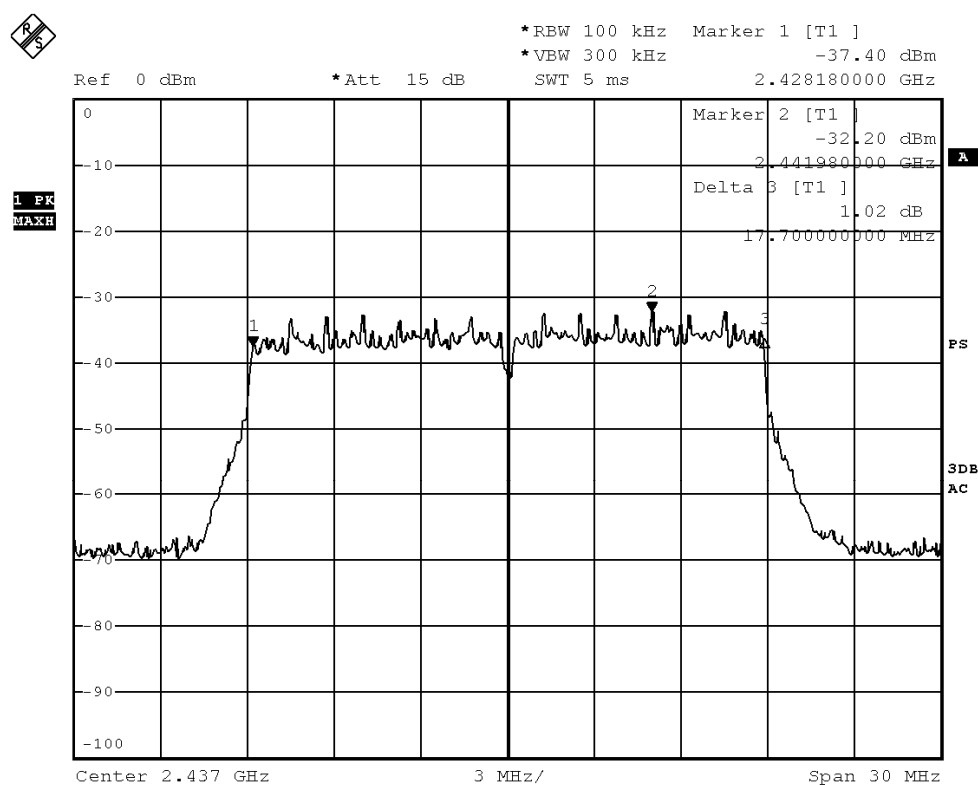

Date: 11.FEB.2015 19:26:10

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04


Page 46 of 66

No.: MH191209

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	17.70	> 500

### 6dB Bandwidth of Fundamental Emission on 802.11 n20 (2462MHz)

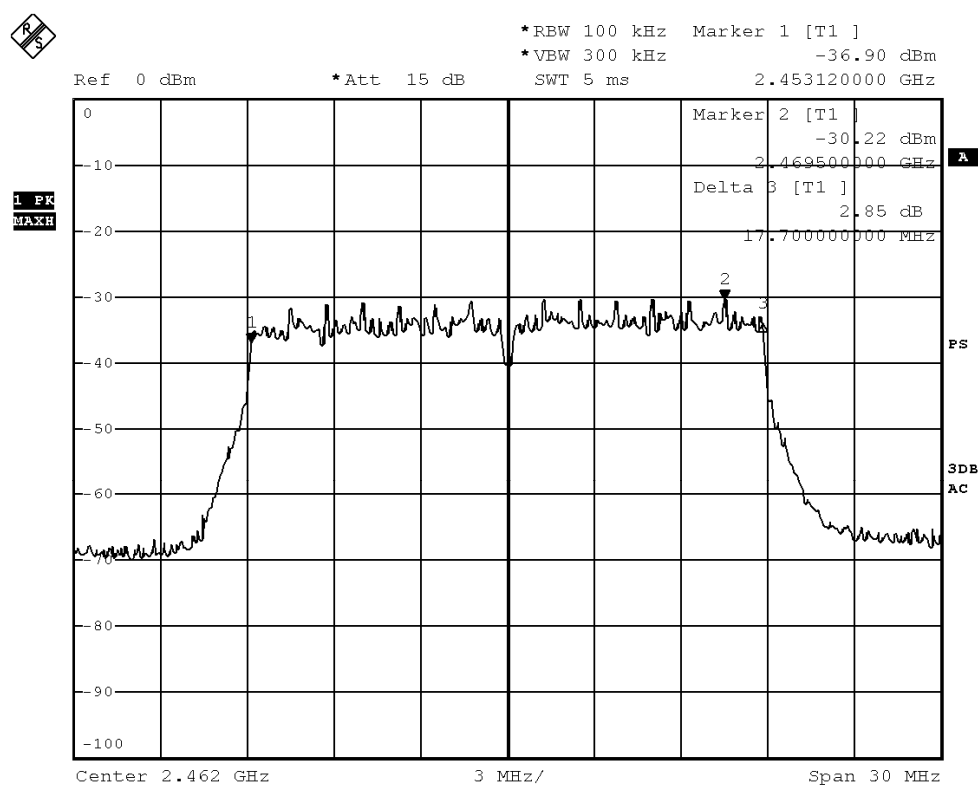

Date: 11.FEB.2015 19:28:22

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date: 2015-03-04

Page 47 of 66

No.: MH191209

### **3.1.5 Band Edges Measurement**

Test Requirement:	FCC 47CFR 15.247
Test Method:	ANSI C63.4:2009
Test Date:	2015-02-12
Mode of Operation:	WiFi mode

#### **Test Method:**

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW and VBW are set to 100kHz for this measurement.

#### **Test Setup:**

As Test Setup of clause 3.1.2 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 48 of 66

No.: MH191209


### Band-edge Compliance of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2412)	43.11

### Band-edge Compliance of RF Emissions – Lowest (802.11b)

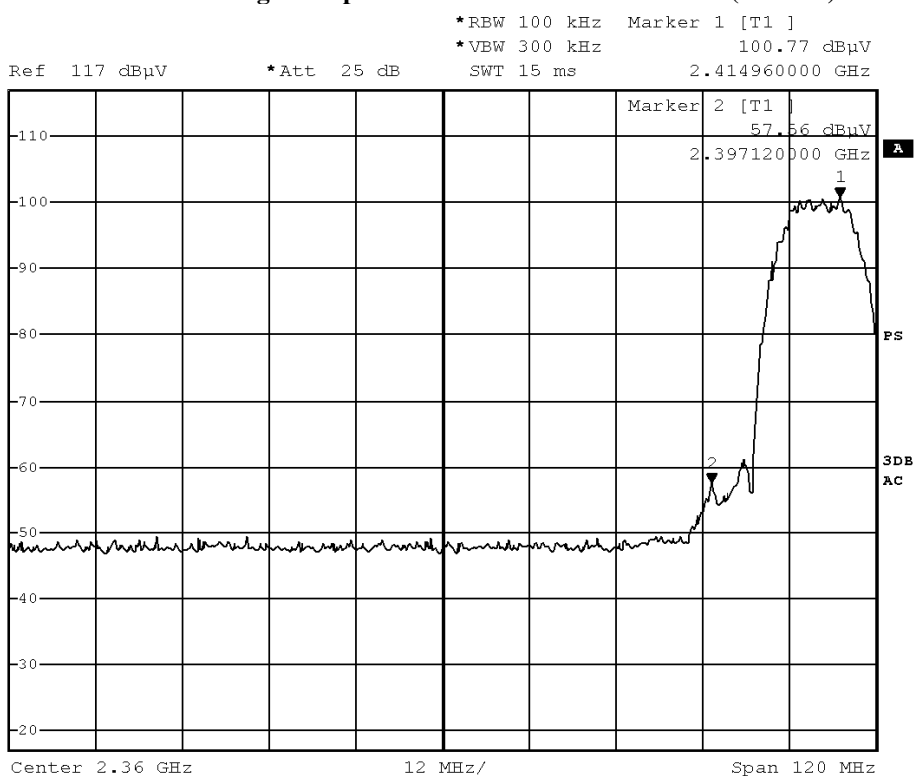

Date: 12.FEB.2015 08:30:33

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2015-03-04


Page 49 of 66

No.: MH191209

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2462)	56.65

### Band-edge Compliance of RF Emissions – Highest (802.11b)

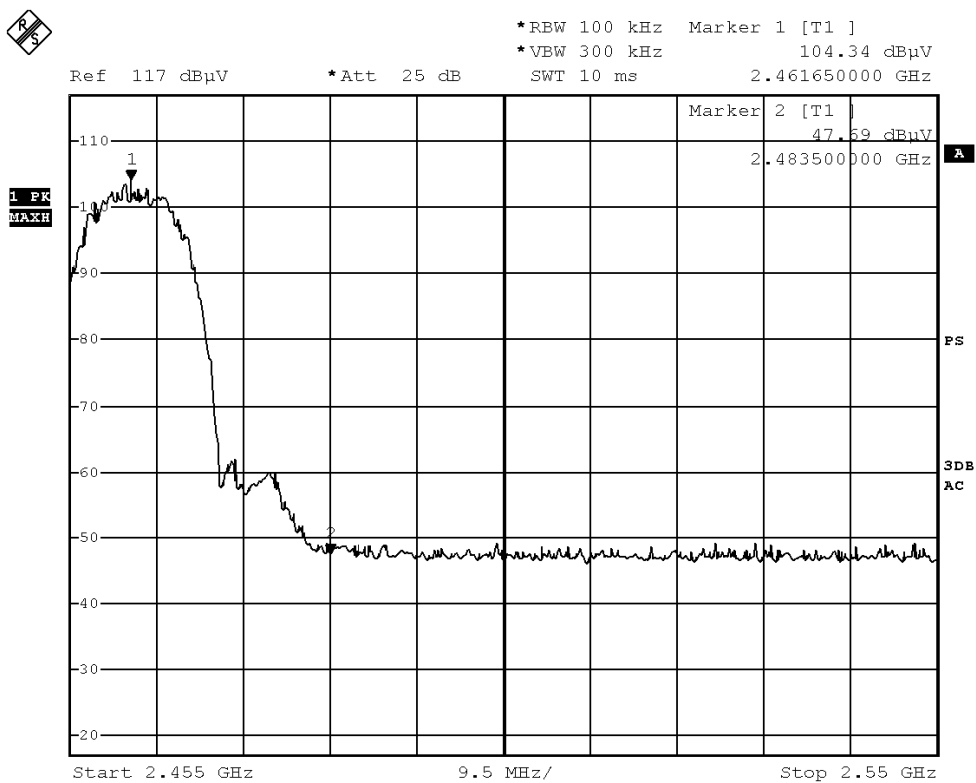

Date: 12.FEB.2015 09:06:47

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# STC Test Report

Date: 2015-03-04


Page 50 of 66

No.: MH191209

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2412)	35.07

### Band-edge Compliance of RF Emissions – Lowest (802.11g)

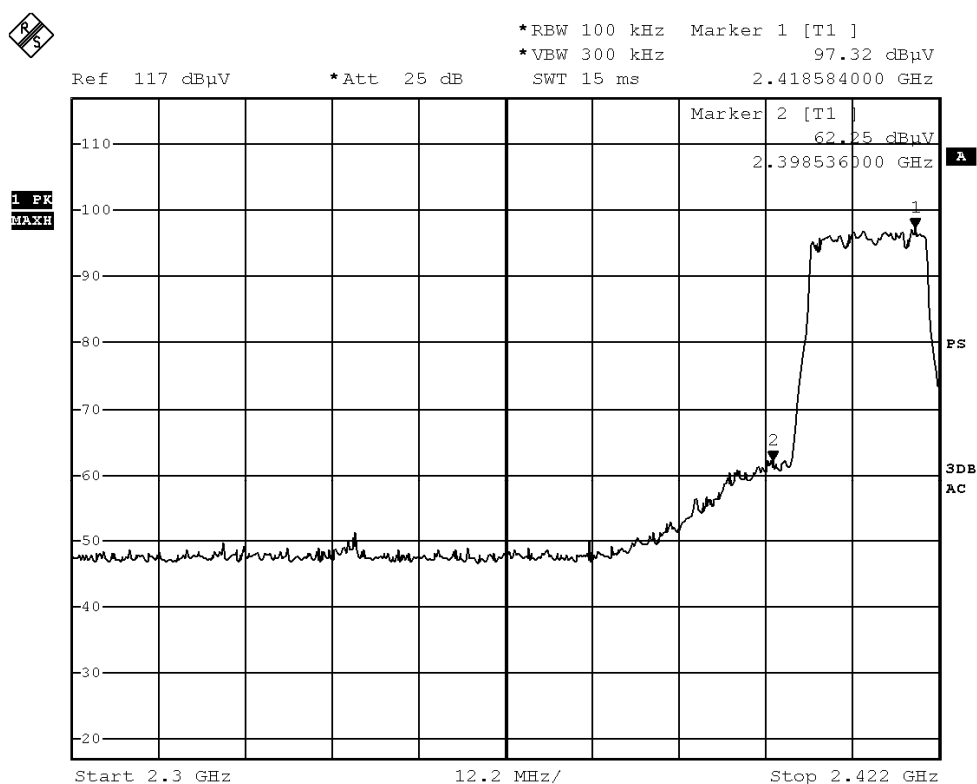

Date: 12.FEB.2015 08:33:47

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04


Page 51 of 66

No.: MH191209

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2462)	41.66

### Band-edge Compliance of RF Emissions – Highest (802.11g)

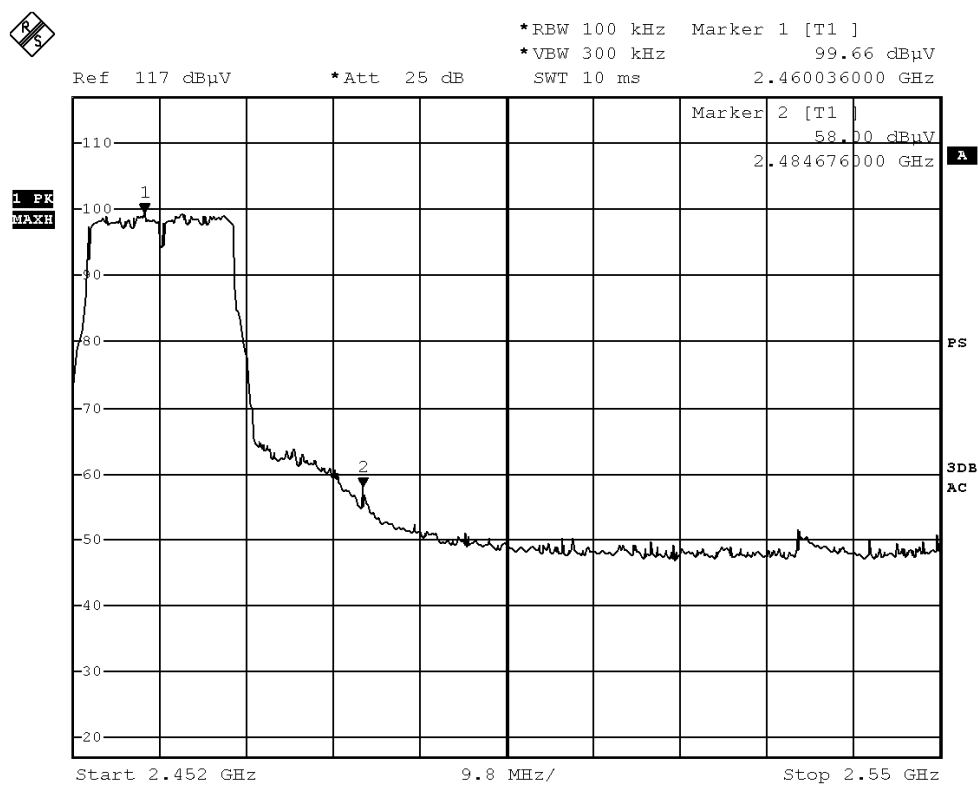

Date: 12.FEB.2015 09:08:47

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# STC Test Report

Date: 2015-03-04


Page 52 of 66

No.: MH191209

## Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2412)	33.72

## Band-edge Compliance of RF Emissions – Lowest (802.11n20)

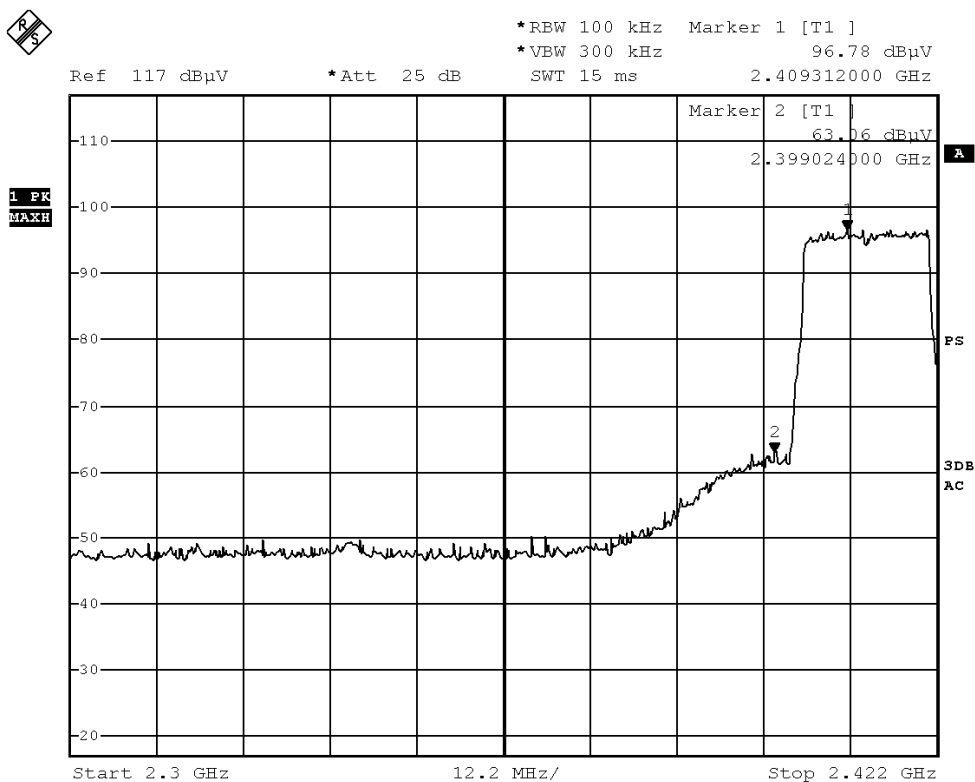

Date: 12.FEB.2015 08:36:56

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04


Page 53 of 66

No.: MH191209

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2462)	39.70

### Band-edge Compliance of RF Emissions – Highest (802.11n20)

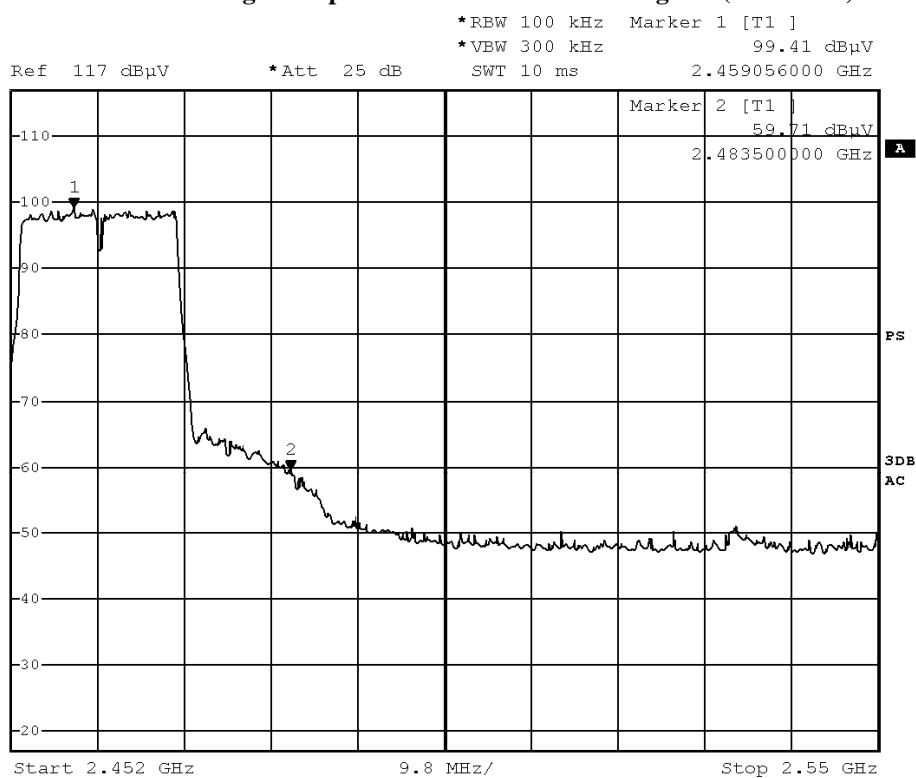

Date: 12.FEB.2015 09:16:32

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 54 of 66

No.: MH191209

### Band-edge Compliance of RF Radiated Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

### Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11b

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2400.0	18.1	36.8	54.9	74.0	19.1	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2400.0	4.7	36.8	41.5	54.0	12.5	Vertical

### Result: Band-edge Compliance of RF Radiated Emissions (Highest) -802.11b

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2483.5	19.2	36.4	55.6	74.0	18.4	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2483.5	5.9	36.4	42.3	54.0	11.7	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-04

Page 55 of 66

No.: MH191209

### **Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11g**

<b>Field Strength of Band-edge Compliance</b>						
<b>Peak Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2400.0	18.3	36.8	55.1	74.0	18.9	Vertical

<b>Field Strength of Band-edge Compliance</b>						
<b>Average Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2400.0	4.9	36.8	41.7	54.0	12.3	Vertical

### **Result: Band-edge Compliance of RF Radiated Emissions (Highest) -802.11g**

<b>Field Strength of Band-edge Compliance</b>						
<b>Peak Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2483.5	19.2	36.4	55.6	74.0	18.4	Horizontal

<b>Field Strength of Band-edge Compliance</b>						
<b>Average Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2483.5	6.0	36.4	42.4	54.0	11.6	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 56 of 66

No.: MH191209

### **Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11n20**

<b>Field Strength of Band-edge Compliance</b>						
<b>Peak Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2400.0	18.3	36.8	55.1	74.0	18.9	Vertical

<b>Field Strength of Band-edge Compliance</b>						
<b>Average Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2400.0	5.5	36.8	42.3	54.0	11.7	Vertical

### **Result: Band-edge Compliance of RF Radiated Emissions (Highest) -802.11n20**

<b>Field Strength of Band-edge Compliance</b>						
<b>Peak Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2483.5	18.5	36.4	54.9	74.0	19.1	Horizontal

<b>Field Strength of Band-edge Compliance</b>						
<b>Average Value</b>						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
2483.5	5.2	36.4	41.6	54.0	12.4	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2015-03-04

Page 57 of 66

No.: MH191209


### 3.1.6 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207  
Test Method: ANSI C63.4:2009  
Test Date: 2015-02-09  
Mode of Operation: WiFi mode

#### Test Method:

The test was performed in accordance with ANSI C63.4:2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### Test Setup:

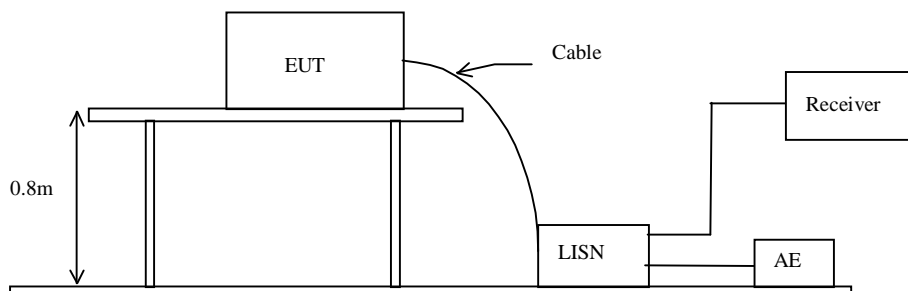

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 58 of 66

No.: MH191209

### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB $\mu$ V]	Average [dB $\mu$ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Results of WiFi mode (L): PASS

Please refer to the following diagram for individual results.

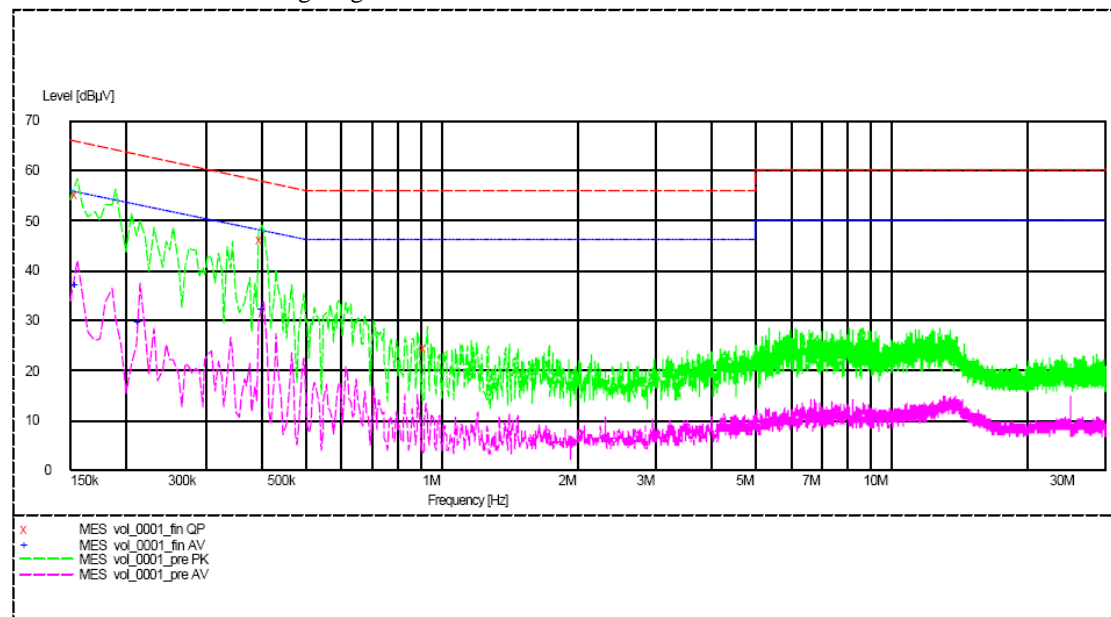

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB $\mu$ V	Limit dB $\mu$ V	Level dB $\mu$ V	Limit dB $\mu$ V
Live	0.155	-*-	-*-	36.9	56.0
Live	0.215	-*-	-*-	29.7	53.0
Live	0.405	-*-	-*-	32.0	48.0
Live	0.155	55.3	66.0	-*-	-*-
Live	0.400	46.0	58.0	-*-	-*-
Live	0.930	24.4	56.0	-*-	-*-

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 59 of 66

No.: MH191209

**Limit for Conducted Emissions (FCC 47 CFR 15.207):**


Frequency Range [MHz]	Quasi-Peak Limits [dBμV]	Average [dBμV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

**Results of WiFi mode (N): PASS**

Please refer to the following diagram for individual results.

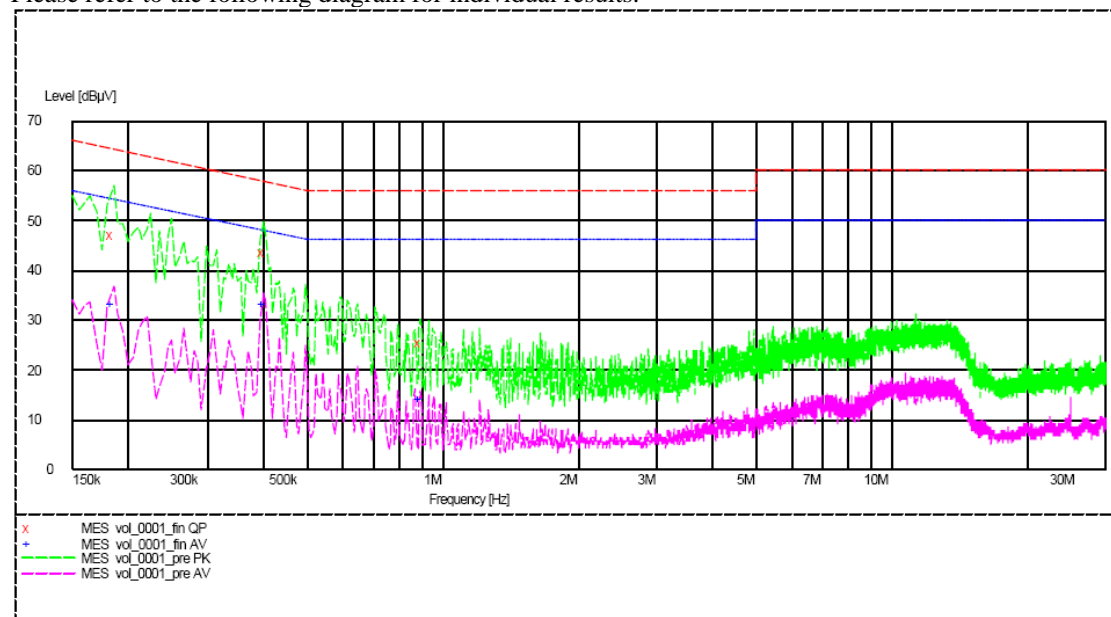

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dBμV	Limit dBμV	Level dBμV	Limit dBμV
Neutral	0.185	-*-	-*-	33.2	54.0
Neutral	0.400	-*-	-*-	33.1	48.0
Neutral	0.895	-*-	-*-	13.9	46.0
Neutral	0.185	47.1	64.0	-*-	-*-
Neutral	0.400	43.5	58.0	-*-	-*-
Neutral	0.895	25.5	56.0	-*-	-*-

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-\*- Emission(s) that is far below the corresponding limit line.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 60 of 66

No.: MH191209

### 3.1.7 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)  
Test Date: 2015-02-14  
Mode of Operation: WiFi mode

#### Test Method:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

#### Test Results:

The EUT complied with the requirement(s) of this section.  
EUT meets the requirements of these sections as proven through MPE calculation  
The MPE calculation for EUT @ 20cm  
Based on the highest P = 39.54 mW

$$\begin{aligned} P_d &= PG / 4\pi R^2 = (39.54 \times 2.51) / 12.566 \times (20)^2 \\ &= (99.25) / 12.566 \times 400 = 99.25 / 5026.4 \\ &= 0.0197 \text{ mW/cm}^2 \end{aligned}$$

where:

- \*Pd = power density in mW/cm<sup>2</sup>
- \* G = Antenna numeric gain (2.51); Log G = g/10 ( g = 4dBi ).
- \* P = Conducted RF power to antenna (39.54 mW).
- \* R = Minimum allowable distance.(20 cm)

- \*The power density Pd = 0.0197mW/cm<sup>2</sup> is less than 1 mW/cm<sup>2</sup> (listed MPE limit)
- \*The SAR evaluation is not needed ( this is a desk top device, R> 20 cm )
- \* The EUT( antenna ) must be 0.2 meters away from the General Population.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date: 2015-03-04

Page 61 of 66

No.: MH191209

### Appendix A

#### List of Measurement Equipment

##### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM299	DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA	ETS-LINDGREN	3115	00114120	2014/01/15	2016/01/25
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2014/01/23	2016/01/23
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2014/09/30	2015/09/30
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	2013/04/25	2015/04/25
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2014/01/15	2016/01/15
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2014/05/26	2015/05/26
EM045	POWER METER	ROHDE & SCHWARZ	NRVD	843246/028	2013/11/13	2015/11/13
EM318	USB WIDEBAND POWER SENSOR	AGILENT	U2022XA	MY53470001	2015/02/05	2016/02/05

##### Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM232	LISN	SCHAFFNER	NNB41	04/100082	2014/12/08	2015/12/08
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2014/05/26	2015/05/26
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2015/01/14	2016/01/14
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2012/02/03	2017/02/03

Remarks:-

CM Corrective Maintenance

N/A Not Applicable

TBD To Be Determined

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2015-03-04

Page 62 of 66

No.: MH191209

### Appendix B

#### Photographs of EUT

**Front View of the product**




**Rear View of the product**



**Inside View of the product**



**Inner Circuit Top View**

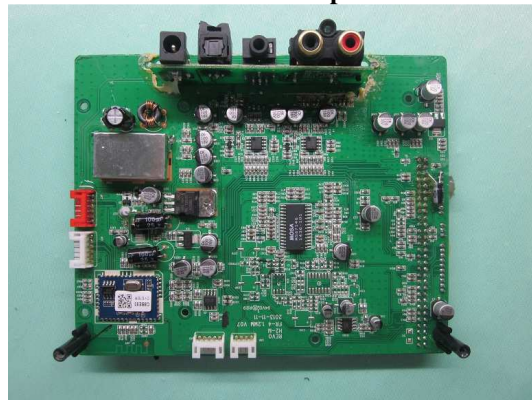

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 63 of 66


No.: MH191209

### Photographs of EUT

**Inner Circuit Bottom View**

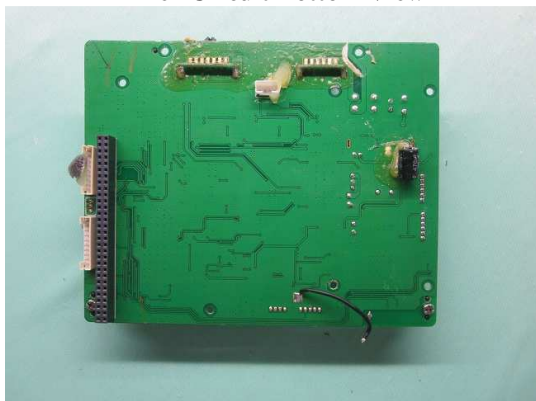

**Inner Circuit Bottom View**

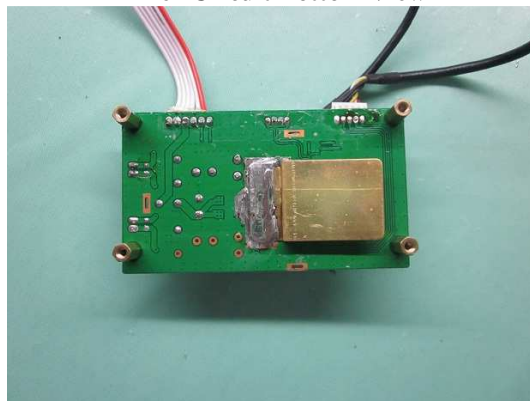

**Inner Circuit Top View**



**Inner Circuit Bottom View**



**Inner Circuit Top View**



**Inner Circuit Top View**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2015-03-04

Page 64 of 66


No.: MH191209

### Photographs of EUT

**Inner Circuit Top View**

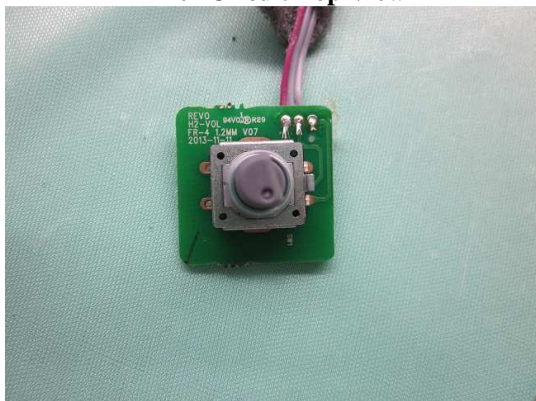

**Inner Circuit Bottom View**

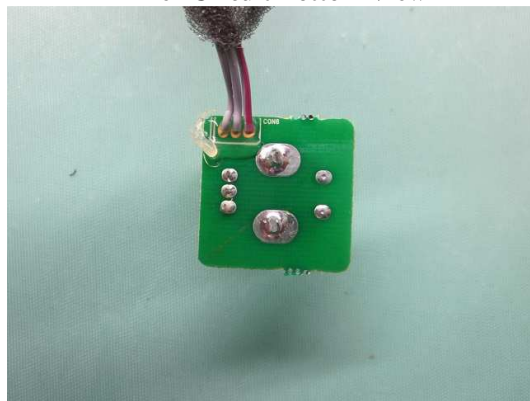


**Inner Circuit Top View**



**Inner Circuit Bottom View**



**Inner Circuit Top View**

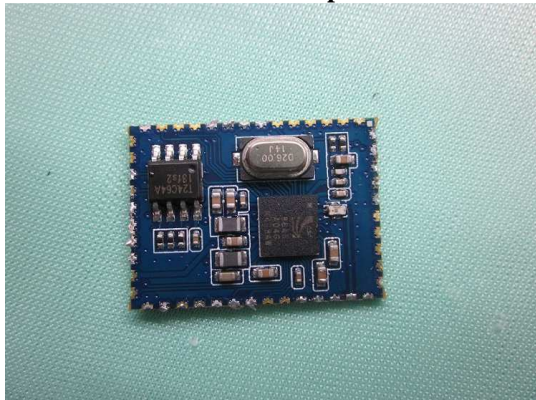

**Inner Circuit Bottom View**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report


Date: 2015-03-04

Page 65 of 66


No.: MH191209

### **Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**

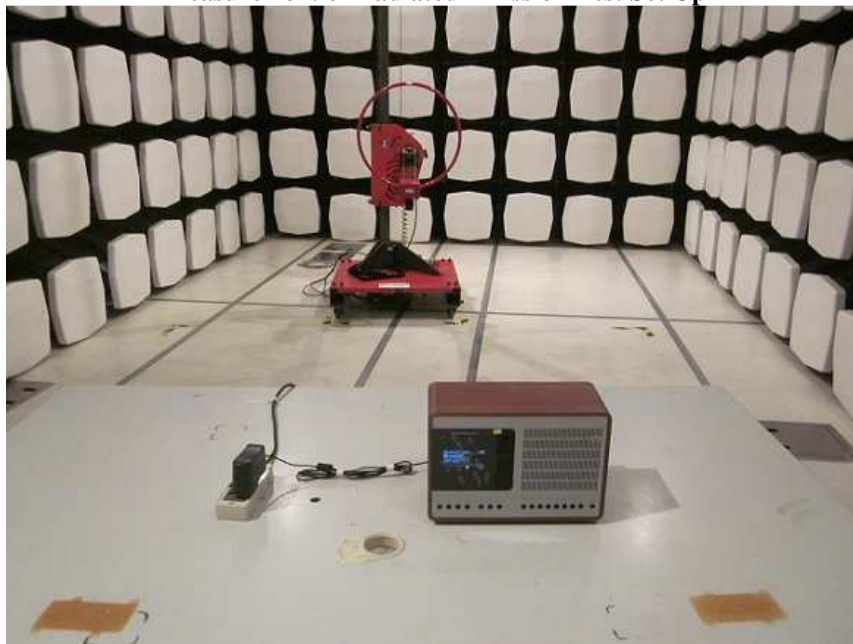

**Measurement of Radiated Emission Test Set Up**

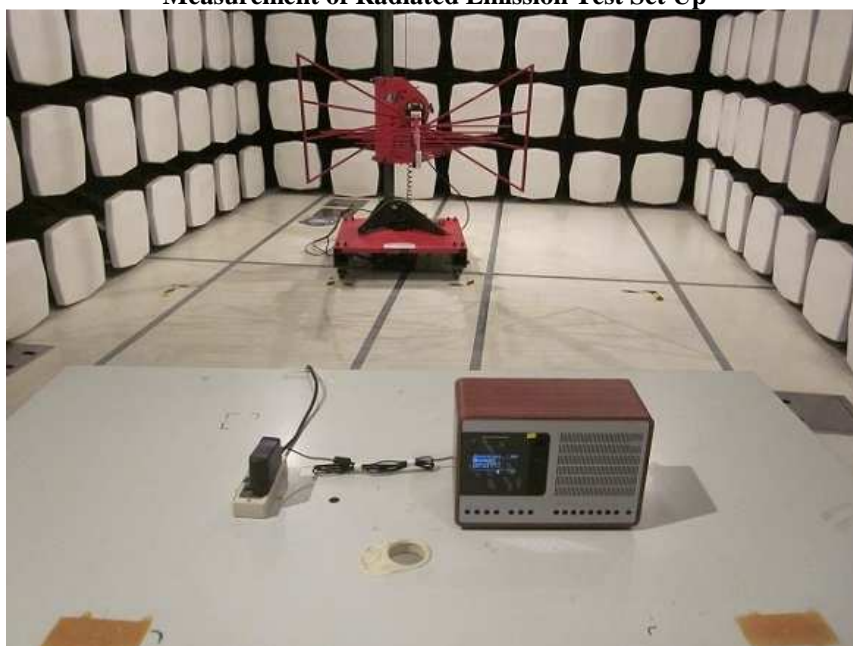

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**


Date: 2015-03-04

Page 66 of 66

No.: MH191209

### **Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**

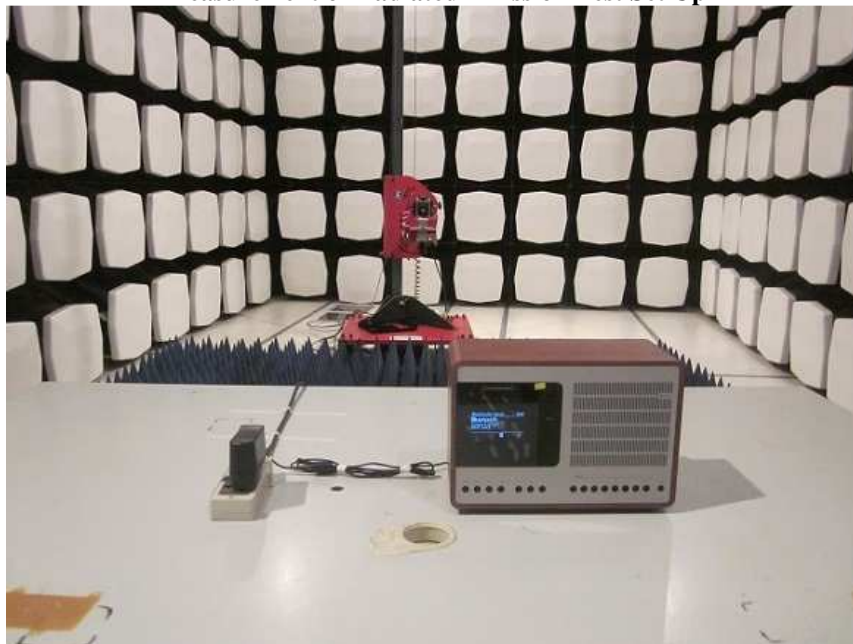

**Measurement of Conducted Emission Test Set Up**



**\*\*\*\*\* End of Test Report \*\*\*\*\***

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage